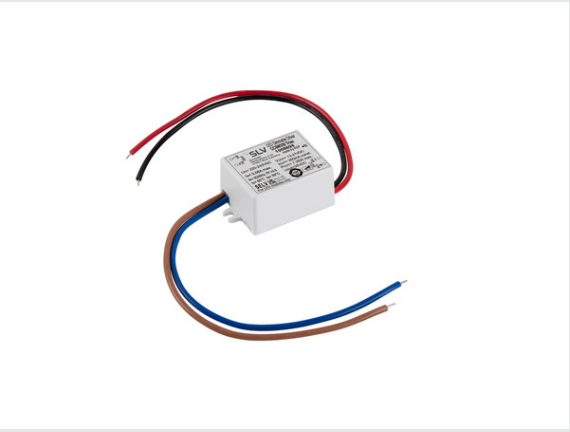


LED driver

6 W, 350 mA, PHASE, white

Square phase dimmable constant current driver with 6 W and 3500 mA, version with open cable ends.

TECHNICAL DATA

Item no.	1008698
IP Code	IP20
Primary nominal voltage	220-240V ~50/60 Hz
Secondary power / voltage	350 mA
Safety class	II
Safety class	II
Wattage	11 W
Minimum ambient temperature	-20 °C
Maximum ambient temperature	50 °C
Number of luminaires at LS B16A	64
Number of luminaires at LS C16A	102
Level of inrush current	8 A
Duration of inrush current	400 µs
Color	white
Depth	0 cm
Net weight	0.048 kg
Gross weight	0.053 kg