
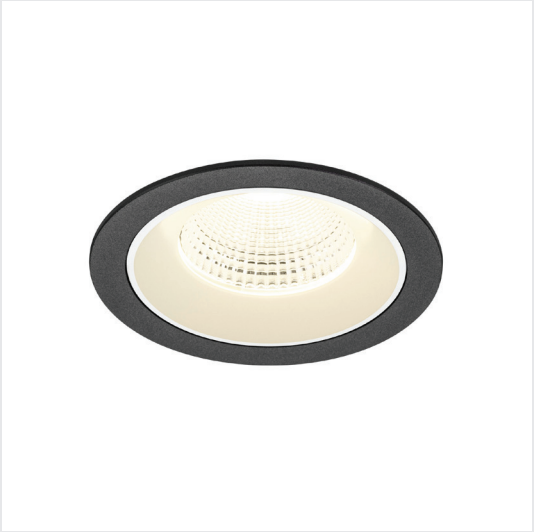


NUMINOS® L | DL

NUMINOS® L, Recessed ceiling light, 4000 K, 55°, IP20, round, black / white

Design, technology and function in perfection: NUMINOS is the light system from SLV that combines everything. With a variety of downlights and spotlights, you provide a thousand lighting design options. Like with the NUMINOS® DL L recessed ceiling light, which impresses with its high-quality workmanship and light. Ideal for unobtrusive, modern and space-saving lighting that draws the focus to objects or the room. The recessed ceiling light has a power consumption of 17 watts, a luminous flux of 2700 lumens, a colour temperature of 4000 Kelvin and a good colour reproduction index of over 90. Installation is then done in no time at all. When do you choose NUMINOS ® from SLV?



Light source

2093752	A D

Item no.	1009799
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Recessed
Assembly details	Ceiling,
Secondary power / voltage	500 mA
Safety class	III
Wattage	17 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Beam angle	55°
Color	black/white
CRI	90
UGR ≤	22
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Height	8.5 cm
Diameter	13 cm
Net weight	0.44 kg
Gross weight	0.59 kg
Shape of cut-out	round
Installation depth	8,5 cm
Installation diameter	12 cm

Accessories

1010697	LED driver, 21W, 500 mA
1010701	LED driver, 19 W, 500 mA, PHASE
1010705	LED driver, 36W, 500 mA, DALI
1010131	NUMINOS® L, reflector, gold
1010132	NUMINOS® L, reflector, copper
1010687	NUMINOS® L, Honeycomb diffuser
1010688	NUMINOS® L, Prismatic diffuser
1010689	NUMINOS® L, Frosted diffuser
1010690	NUMINOS® L, Elliptical diffuser
1006143	Numinos® M Reducing ring, round 240/120 mm black
1006144	Numinos® M Reducing ring, round 240/120 mm white
1006145	Numinos® M Reducing ring, square 240/120 mm black
1006146	Numinos® M Reducing ring, square 240/120 mm white