
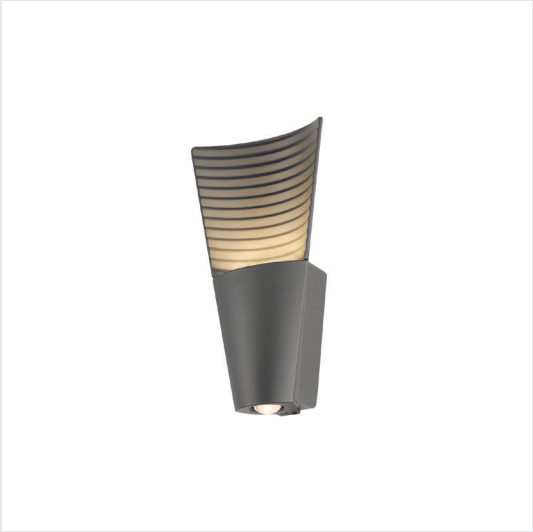


RASTERLYS | WL, UP/DOWN, PHASE

RASTERLYS WL UP/DOWN, wall-mounted luminaire, rectangular, 3000 K, 16 W, PHASE, 45°, anthracite

The RASTERLYS WL UP/DOWN is a surface-mounted wall light with a conical design, suitable for use in indoor and protected outdoor areas. It offers a luminous flux of 550 lumens at 16 watts and a colour temperature of 3000 K, producing warm white light. The luminaire is made of aluminium and features a glass cover, ensuring a robust and durable construction. Its dimensions are 25.4 cm in height, 13.5 cm in width, and 6.4 cm in depth. With a beam angle of 45°, it provides targeted illumination both upwards and downwards. Phase-cut and trailing-edge dimming allow for flexible light control. The IP65 rating and IK03 impact resistance make the luminaire resistant to dust, jet water, and mechanical impacts. The declared lifetime is 50,000 hours.



Light source

2643366	A G E

Item no.	1011020
Lamps included	No
Number of different light outlets	2
IP Code	IP65
Impact resistance class	IK03
Impact resistance	0.35 Joule
Assembly	Surface
Assembly details	Wall,
Dimmable	true
Dimming technology	Leading edgetrailing edge
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	350 mA
Safety class	I
Wattage	16 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	160.0
Number of luminaires at LS C16A	160.0
Level of inrush current	5 A
Duration of inrush current	100 µs
Temperature at glass (light emission)	56
Beam angle	45°
Color	anthracite
CRI	80
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	1
Width	13.5 cm
Height	25.4 cm