
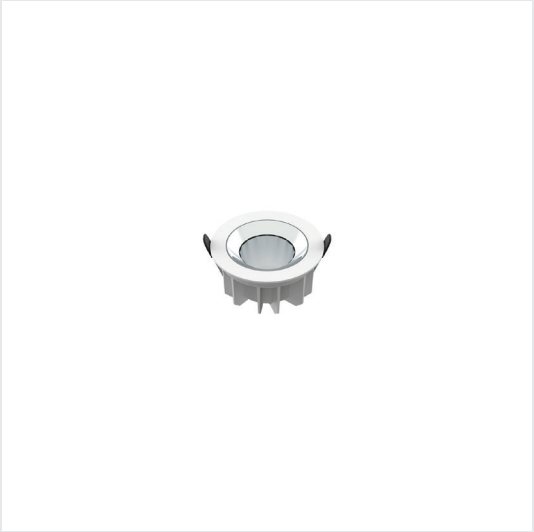


DOWNLIGHT P | 115 18 HG 830 60 ML WH IP54

DOWNLIGHT P, 115 18 HG 830 60 ML WH IP54

The recessed ceiling light DOWNLIGHT P 115 18 HG 830 60 ML WH IP54 is designed for installation in ceilings and is suitable for indoor use where protection-rated lighting is required. It features a round cut-out shape with a diameter of 11.5 cm and an installation depth of 6.9 cm. The housing is made of aluminium, ensuring a robust and durable construction. The luminaire offers a light output ranging from 1950 to 3720 lumens and a declared lifespan of 50,000 hours. It is protected to IP54 against dust and splashing water and has an impact resistance rating of IK08. These features make the luminaire a reliable solution for various lighting requirements in commercial and office buildings.



Light source

2545066	A B

Item no.	1011294
IP Code	IP20/IP54
Impact resistance class	IK08
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	300-450mA
Safety class	II
Wattage	11 W
Ambient temperature	85
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Number of luminaires at LS B16A	36.0
Number of luminaires at LS C16A	60.0
Level of inrush current	7.9 A
Duration of inrush current	3 µs
Beam angle	60°
Color	white
CRI	80
LXXBXX data	L80B20
Service life	50 000 h
Depth	6.9
Diameter	11.5 cm
Net weight	0.52 kg
Gross weight	0.6 kg
Shape of cut-out	round
Installation depth	13 cm
Installation diameter	10 cm