
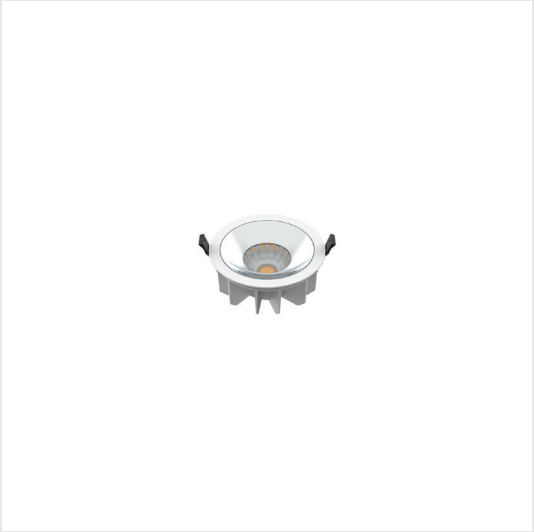


DOWNLIGHT P | 165 30 HG 830 60 ML WH IP54

DOWNLIGHT P, 165 30 HG 830 60 ML WH IP54

The recessed ceiling light DOWNLIGHT P 165 30 HG 830 60 ML WH IP54 is designed for installation in ceilings and is suitable for use in indoor areas requiring enhanced protection against dust and splashing water. The luminaire features a round cut-out shape with a diameter of 16.5 cm and an installation depth of 8.2 cm. The housing is made of aluminium and offers impact resistance class IK08. With a luminous flux ranging from 1930 to 3890 lumens and a colour temperature of 3000 Kelvin, it provides uniform and efficient illumination. The IP54 protection rating ensures protection against dust deposits and splashing water, making the luminaire suitable for use in more demanding environments.



Light source

2545097	A B

Item no.	1011297
IP Code	IP20/IP54
Impact resistance class	IK08
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	500-650mA
Safety class	II
Wattage	19 W
Ambient temperature	85
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Number of luminaires at LS B16A	36.0
Number of luminaires at LS C16A	60.0
Level of inrush current	7.9 A
Duration of inrush current	3 µs
Beam angle	60°
Color	white
CRI	80
LXXBXX data	L80B20
Service life	50 000 h
Depth	8.2
Diameter	16.5 cm
Net weight	0.76 kg
Gross weight	0.87 kg
Shape of cut-out	round
Installation depth	11 cm
Installation diameter	15 cm