
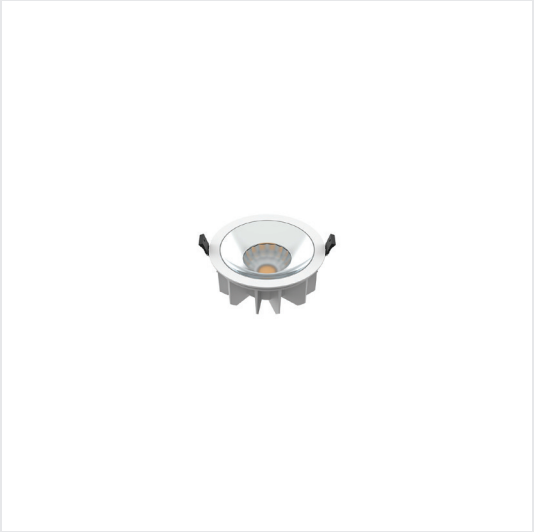


DOWNLIGHT P | 165 30 HG 830 60 ML DALI WH IP54

DOWNLIGHT P, 165 30 HG 830 60 ML DALI WH IP54

The recessed ceiling light DOWNLIGHT P 165 30 HG 830 60 ML DALI WH IP54 is designed for installation in ceilings and is suitable for indoor use where an IP54 protection rating is required. It features a round cut-out shape with a diameter of 16.5 cm and an installation depth of 8.2 cm. The housing is made of aluminium and offers impact resistance class IK08. The luminaire is equipped with DALI-2 dimming, allowing flexible control of light intensity. With a service life of 50,000 hours, it provides a long-lasting lighting solution. The luminous flux ranges from 650 to 4340 lumens, enabling adaptation to different lighting requirements.



Light source

2545097	A B

Item no.	1011298
IP Code	IP20/IP54
Impact resistance class	IK08
Dimmable	true
Dimming technology	DALI 2
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	500-650mA
Safety class	II
Wattage	19 W
Ambient temperature	85
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Number of luminaires at LS B16A	36.0
Number of luminaires at LS C16A	60.0
Level of inrush current	7.9 A
Duration of inrush current	3 µs
Beam angle	60°
Color	white
CRI	80
LXXBXX data	L80B20
Service life	50 000 h
Depth	8.2
Diameter	16.5 cm
Net weight	0.76 kg
Gross weight	0.87 kg
Shape of cut-out	round
Installation depth	11 cm
Installation diameter	15 cm