
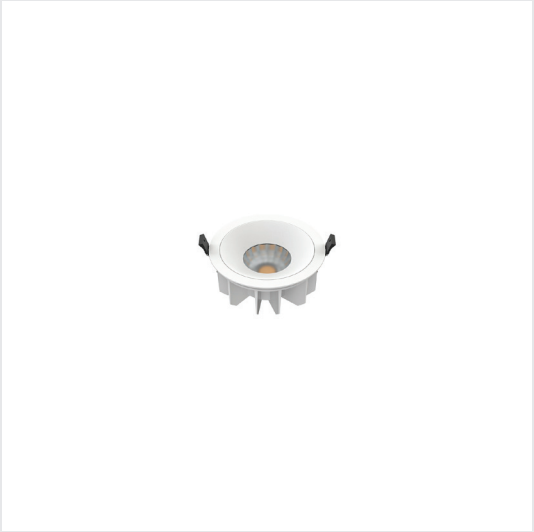


DOWNLIGHT P | 165 30 WM 830 60 ML DALI WH IP54

DOWNLIGHT P, 165 30 WM 830 60 ML DALI WH IP54

The ceiling recessed luminaire DOWNLIGHT P is designed for indoor use, for example in offices, retail spaces, or public buildings. It features a round recessed opening with a diameter of 16.5 cm and a mounting depth of 8.2 cm. The housing is made of aluminium, ensuring a robust and durable construction. The luminaire offers a light output ranging from 650 to 4410 lumens and is equipped with DALI-2 dimming, allowing flexible light control. The IP54 protection rating provides protection against dust deposits and splashing water, while the impact resistance class IK08 guarantees high resistance to mechanical stress. The luminaire is designed for a long service life of up to 50,000 hours.



Light source

2545097	A B

Item no.	1011299
IP Code	IP20/IP54
Impact resistance class	IK08
Dimmable	true
Dimming technology	DALI 2
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	500-650mA
Safety class	II
Wattage	19 W
Ambient temperature	85
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Number of luminaires at LS B16A	36.0
Number of luminaires at LS C16A	60.0
Level of inrush current	7.9 A
Duration of inrush current	3 µs
Beam angle	60°
Color	white
CRI	80
LXXBXX data	L80B20
Service life	50 000 h
Depth	8.2
Diameter	16.5 cm
Net weight	0.76 kg
Gross weight	0.87 kg
Shape of cut-out	round
Installation depth	11 cm
Installation diameter	15 cm