
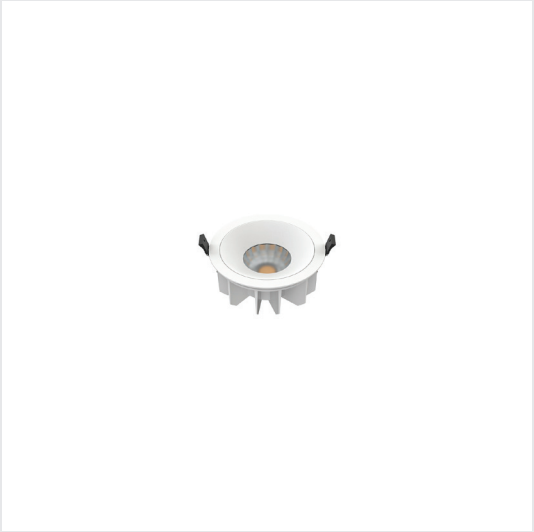


DOWNLIGHT P | 165 30 WM 830 60 ML WH IP54

DOWNLIGHT P, 165 30 WM 830 60 ML WH IP54

The recessed ceiling light DOWNLIGHT P 165 30 WM 830 60 ML WH IP54 is designed for indoor use where reliable and efficient lighting is required. It features a round installation opening with a diameter of 16.5 cm and an installation depth of 8.2 cm. The housing is made of aluminium, providing a robust construction. The luminaire has an IP54 rating for protection against dust and splashing water, as well as an IK08 impact resistance class. The light output ranges from 1950 to 3960 lumens, with a colour temperature of 3000 K and a colour rendering index of 80, ensuring a pleasant light quality. This luminaire is particularly suitable for commercial and public areas that require durable and high-performance lighting.



Light source

2545097	A G B

Item no.	1011300
IP Code	IP20/IP54
Impact resistance class	IK08
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	500-650mA
Safety class	II
Wattage	19 W
Ambient temperature	85
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Number of luminaires at LS B16A	36.0
Number of luminaires at LS C16A	60.0
Level of inrush current	7.9 A
Duration of inrush current	3 µs
Beam angle	60°
Color	white
CRI	80
LXXBXX data	L80B20
Service life	50 000 h
Depth	8.2
Diameter	16.5 cm
Net weight	0.76 kg
Gross weight	0.87 kg
Shape of cut-out	round
Installation depth	11 cm
Installation diameter	15 cm