
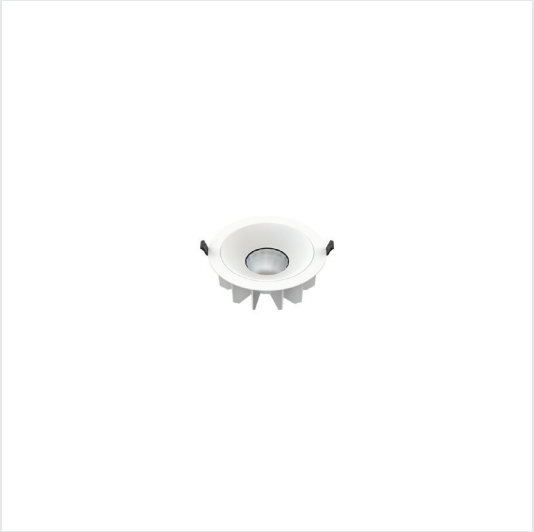


DOWNLIGHT P | 230 40 WM 830 60 ML WH IP54

DOWNLIGHT P, 230 40 WM 830 60 ML WH IP54

This ceiling recessed luminaire of the Downlight type is designed for installation in ceilings and is suitable for indoor use where an IP54 protection rating is required. The luminaire housing is made of aluminium and has a diameter of 23 centimetres as well as a depth of 9.5 centimetres. The luminaire offers a light output ranging from 2140 to 4710 lumens and features a declared service life of 50,000 hours. It is equipped with a round cut-out for mounting and has an impact resistance rating of IK08. Protection against dust and splashing water is ensured by the IP54 classification.



Light source

2545259	A G B

Item no.	1011304
IP Code	IP20/IP54
Impact resistance class	IK08
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	500-650mA
Safety class	II
Wattage	20 W
Ambient temperature	85
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Number of luminaires at LS B16A	36.0
Number of luminaires at LS C16A	60.0
Level of inrush current	21 A
Duration of inrush current	180 µs
Beam angle	60°
Color	white
CRI	80
LXXBXX data	L80B20
Service life	50 000 h
Depth	9.5
Diameter	23 cm
Net weight	1.14 kg
Gross weight	1.31 kg
Shape of cut-out	round
Installation depth	13 cm
Installation diameter	20 cm