PLEASE BE AWARE THAT THIS PDF HAS BEEN EDITED SUCH THAT THE STARTING INDEX PAGE NUMBERS JUMP TO THE PRODUCT PAGE AND THE PRODUCT SKU'S ARE HYPERLINKED TO THE PRODUCT WEBSITE FOR FURTHER INFORMATION, PLEASE HOLD 'CTRL' (WINDOWS) OR 'CMD' (MAC) WHILE TO CLICKING PRODUCT HYPERLINKS TO OPEN PRODUCT IN NEW TAB

BIG WHITE®
2026

SLV LIGHTING CATALOGUE

EXPERIENCE LIGHT

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SLVtec

FOLLOW THE BLUE STAR – THE NEW SLVtec® PRODUCT WORLD

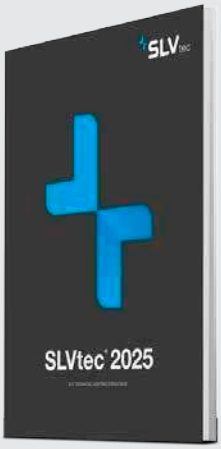

**THREE PERFORMANCE CLASSES.
COUNTLESS POSSIBILITIES.
ONE ANSWER: SLVtec®**

Whether you are looking for cost-efficient basic lighting, the ideal balance between price and performance or sophisticated lighting solutions: SLVtec® has the right answer for you.

All our products combine innovative technology, efficient light output and versatile applications for professionals who rely on function and quality every day.

VALUE
Reliable essentials for cost-efficient projects.

CORE
The perfect balance between price and performance.

PERFORMANCE
High-performance lighting for demanding projects.

OUR HIGHLIGHTS

EASYLIGHT & RETRO
LED continuous-row lighting systems with up to 200 lm/W, 100,000 h service life and tool-free installation



PAVANNO
Up to 190 lm/W, 100,000 h service life and UGR<19

TRACKSPOT P
Up to 170 lm/W, 75,000 h service life and CRI>90

Scan, discover, get started –
with the matching SLVtec® solution for your project at slv.com

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

INDOOR

Recessed lights 10
Ceiling lights 126
Pendant lights 182
Wall and ceiling lights 290
Table and floor lamps 432

48V system 466
Low-voltage cable system 514
High-voltage track 1-phase 524
High-voltage track 3-phase 582
Profile solutions and LED strips 658

OUTDOOR

Mobile lights and floor lamps 686
Spotlights 802
Ceiling lights 824
Wall and ceiling lights 838
Recessed lights 948
Recessed floor lights 958

ACCESSORIES

Lamps 998
Accessory parts 1010

NAVIGATION

Index, Application 1026
Index, Numerical 1058
Index, Alphabetical 1074

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NAVIGATION

CATEGORY OVERVIEW

Everything at a glance. Find the right lights based on category.

The complete overview can be found from page 1025 onwards.

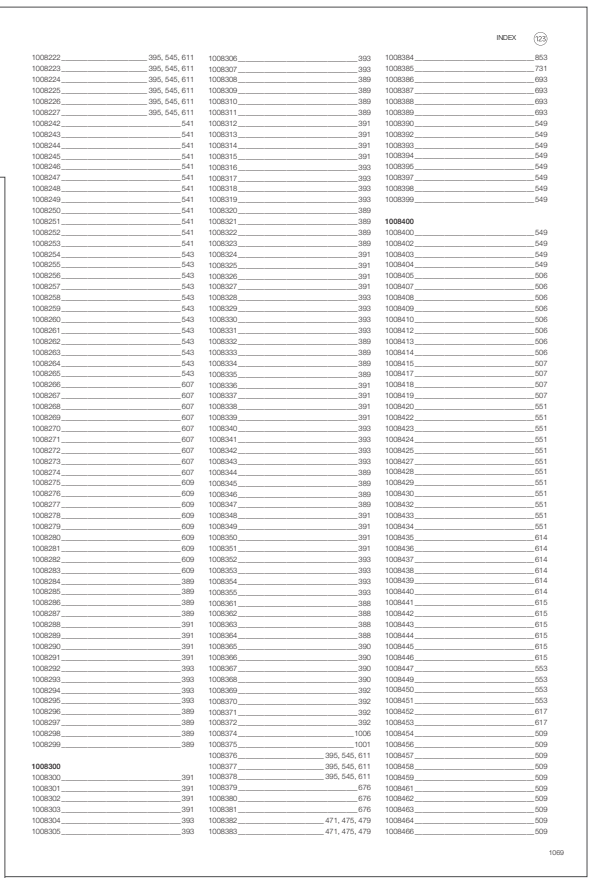

INDEX

Find your light quickly in the numerical or alphabetical index.

PRODUCT CATEGORIES

Know how long it lasts. The new icons and colours let you quickly and easily navigate to the respective product categories.

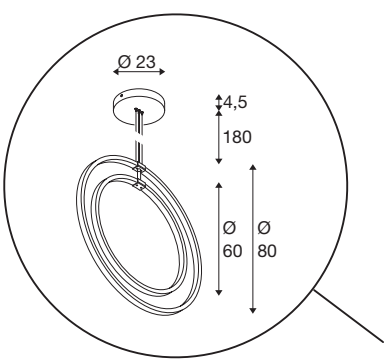

RECOMMENDATIONS

Fast and simple. Discover the right accessories and lamps for your selected products.

PLEASE NOTE

All measurements are given in **cm**.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CLEARLY EXPLAINED

In our new advice section, important information about lighting and our SLV products is explained clearly and concisely.

From planning tools and system representations to lighting knowledge, you'll learn everything in BIG WHITE®. Take note of this when browsing our yellow advice pages, too.

DESIGN YOUR LED PROFILE

Create accents or illuminate entire rooms – from 700 lm up to 4000 lm per metre.

Bring colour into play – LED strips available in white, as CCT (Tunable White) or RGBW version.

Frosted, opaque or transparent, i
versions – Choose from different
for various applications and light

All visible system components are
coordinated. The metal end caps
with the same powder as the pro

The strip mounting surface of the
powder-coated to optimise heat

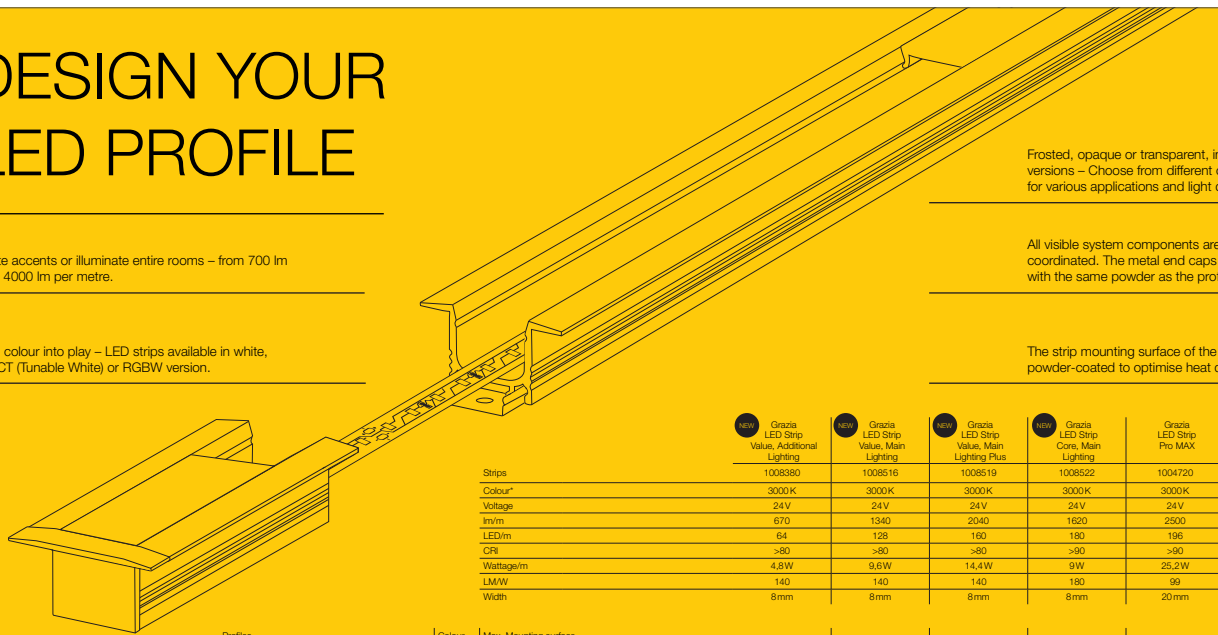

	NEW Grazia LED Strip Value, Additional Lighting	NEW Grazia LED Strip Value, Main Lighting	NEW Grazia LED Strip Value, Main Lighting Plus	NEW Grazia LED Strip Core, Main Lighting	Grazia LED Strip Pro MAX
Strips	1008380	1008516	1008519	1008522	1004720
Colour*	3000 K	3000 K	3000 K	3000 K	3000 K
Voltage	24 V	24 V	24 V	24 V	24 V
lm/m	670	1340	2040	1620	2500
LED/m	64	128	160	180	196
CRI	>80	>80	>80	>90	>90
Wattage/m	4,8 W	9,6 W	14,4 W	9 W	25,2 W
LM/W	140	140	140	180	99
Width	8 mm	8 mm	8 mm	8 mm	20 mm

Profiles		Colour	Max. Mounting surface					
GRAZIA 10 surface-mounted profile, flat 2 m	1000462	black	10 mm	✓	✓	✓	✓	-
	1000461	white						
GRAZIA 10 surface-mounted profile, standard 2 m	1000465	black	10 mm	✓	✓	✓	✓	-
	1000464	white						
GRAZIA 10 recessed profile 2 m	1000459	black	10 mm	✓	✓	✓	✓	-
	1000458	white						
GRAZIA 10 corner 2 m	1004889	aluminium	10 mm	✓	✓	✓	✓	-
	1004890	white						
GRAZIA 20 surface-mounted profile, standard 3 m	1000525	black	20 mm	✓	✓	✓	✓	✓
	1000524	white						
GRAZIA 20 surface-mounted profile, flat 3 m	1000534	black	20 mm	✓	✓	✓	✓	-
	1000533	white						
GRAZIA 20 recessed profile 3 m	1000498	black	20 mm	✓	✓	✓	✓	✓
	1000497	white						
GRAZIA 60 surface-mounted profile 1.5 m	1004896	black	40 mm	✓	✓	✓	✓	✓
	1004897	white						
GRAZIA 60 surface-mounted profile 3 m	1004898	black	40 mm	✓	✓	✓	✓	✓
	1004899	white						
GRAZIA 60 recessed profile 1.5 m	1004905	black	40 mm	✓	✓	✓	✓	✓
	1004906	white						
GRAZIA 60 recessed profile 3 m	1004908	black	40 mm	✓	✓	✓	✓	✓
	1004907	white						

Create your very own profile. Matching drivers are presented on our Accessories pages 1015–1019.

ALL PRODUCTS DIRECT ONLINE

At **slv.com** you will find the complete SLV range with all product details, descriptions, availability, and much more. Useful design files, 3D data, configurators and calculation tools are there to help you create your perfect lighting design.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

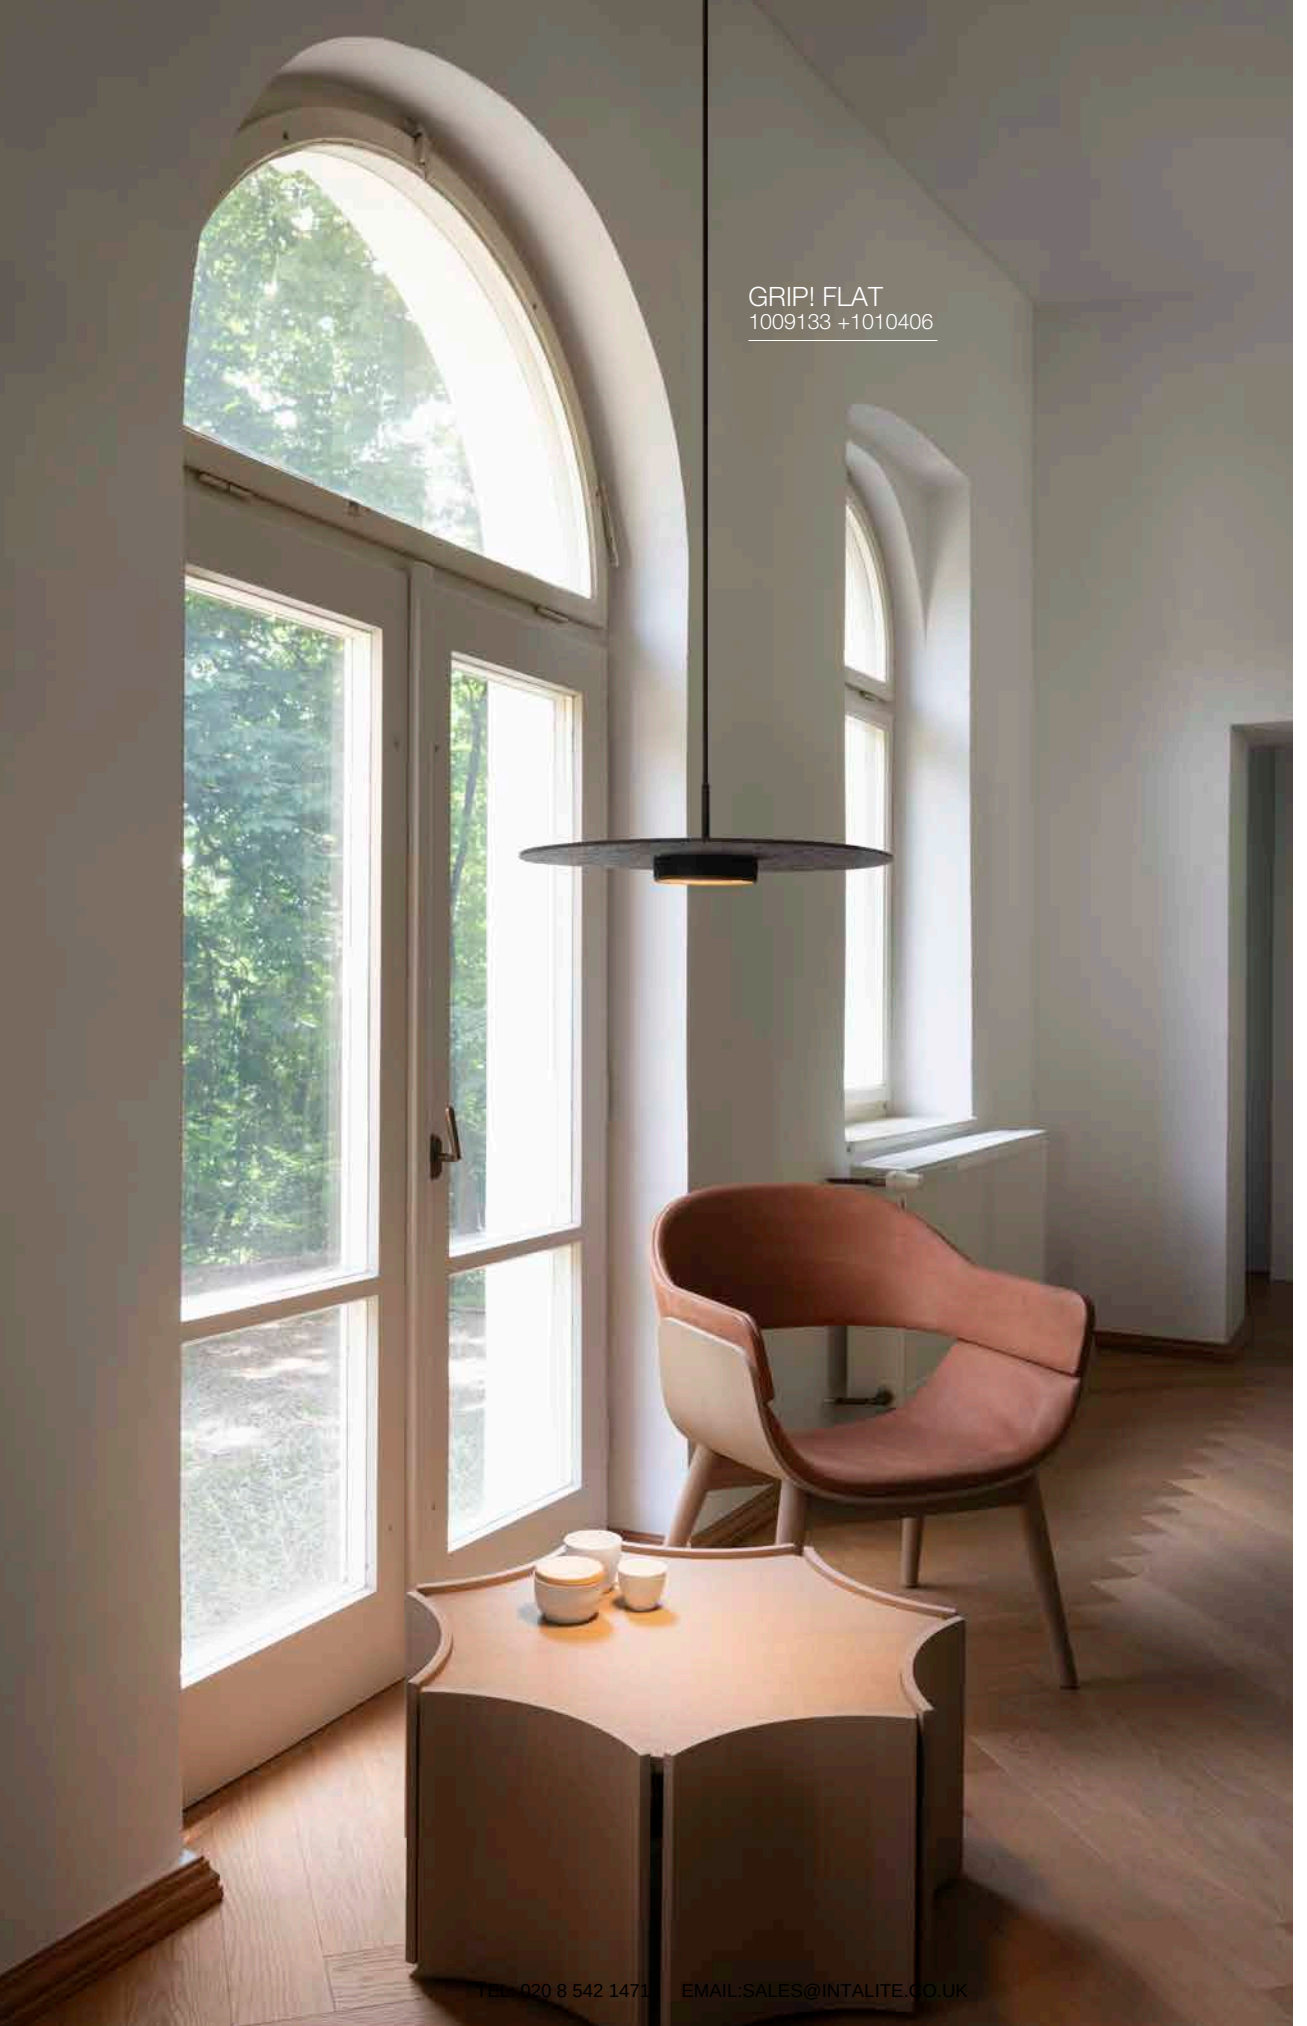

GRIP! FLAT
1009133 +1010406

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

WUD
1010401

SLV LIGHTING KNOWLEDGE

LUMEN

The luminous flux (indicated in Lumen) describes how much light is emitted in all directions by a light source. It represents the overall brightness perceived by the human eye. The efficiency of a light is often given in lumens per watt. The higher the luminous flux (in lumens) per power consumed (in watts), the more efficient the light source.

CRI

The colour rendering index is the impact of a light source on the colour of an object as perceived by the human eye compared to a natural source of light (e.g. sunlight). According to EN 12464-1, indoor spaces in which people spend or work for longer amounts of time should have a colour rendering index (CRI) of >80.

COLOUR TEMPERATURE

The colour temperature of a light source is indicated in Kelvin (K). The higher the colour temperature, the cooler and more stimulating the light (e.g. daylight = 5500 K). The lower the Kelvin figure, the warmer and cosier the light. The colour temperature of a 2700 K light bulb is now recommended as the perfect home lighting. The CCT switch allows the colour temperature of a luminaire to be adjusted.

DIM-TO-WARM (DTW)

The dim-to-warm feature lets you adjust the colour temperature and brightness of the light. The light colour changes from cool white to warm white when dimmed down, but cannot be controlled any further.

TUNEABLE WHITE (TW)

The Tuneable White function allows you to set the colour temperature of LED lights as desired. The light can be adjusted to suit different times of day and moods.

RGB RGB+W

An RGB-compatible luminaire covers the entire colour spectrum from red, green and blue with the white balance in the background. The white balance of the RGB+W is also optimised and can be represented in pastel tones.

PROTECTION CLASS

Protection classes indicate which safety measures a device has installed to prevent electric shocks. There are three protection classes which are represented by the symbols below.

IK

The IK protection class is a classification of building materials and surfaces that determines how resistant they are to mechanical impact such as blows, collisions or pressure.

IP

The abbreviation IP stands for Ingress Protection. The first digit in these standardised IP codes indicates the protection against solid objects, the second digit indicates protection against moisture.

HALF BEAM ANGLE

The half beam angle describes the light emission taking the composition of the luminaire, lamp and distance from an object into account. The smaller the half beam angle, the narrower the beam of light.

UGR

UGR (Unified Glare Rating) rates the glare of a luminaire to relieve the eye. The lower the UGR value, the more pleasant the light is to the eye. A UGR<19 is therefore recommended for workplaces.

SMART LIGHTING

Smart Lighting describes automated light management. With DALI, ZIGBEE, CASAMBI and BLUETOOTH, smart luminaires can be controlled via apps and other controls.

Roséfine
Luberon
Pour l'achat
de 6 Bibs à 44€
1 magnum
offert !!!
M
MARRENON

UNIVERSAL DOWNLIGHT | 15

KADUX | 18–19

KADUX | 21

KADUX | 22

KADUX | 22–23

NUMINOS® | 24–33

NUMINOS® MOVE | 34–43

NUMINOS® GIMBLE | 44–53

NEW

DYSKO | 61

NEW TRIA® 68 | 62–67, 70–87

NEW TRIA® UNIVERSAL | 68–69

NEW TRIA® | 90

NEW TRIA® | 91

NEW

GLENOS® PRO | 91

MEDO® | 92–95

HORN MINI | 96

HORN | 97–98

HORN 1 | 98

HORN T | 99

HORN MAGNA | 99

SENSER | 101–103

VERLUX | 105

DL 126 | 105

PIKA | 106

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

OCULUS | 107

OCCULDAS | 109

KARPO | 109

GRIP! | 111

PLASTRA | 112

SOCKET

VARU | 113

SOCKET

DOLIX OUT | 114

KINI | 115

AKALO D83 | 115

FRAME BASIC | 116

FRAME CURVE | 117

NOTAPO | 119

DOWNUNDER PUR | 120

MOBALA | 121

WORO | 121

PATTA–I | 122–123

PATTA–I | 122–123



PATTA–F | 124–125

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

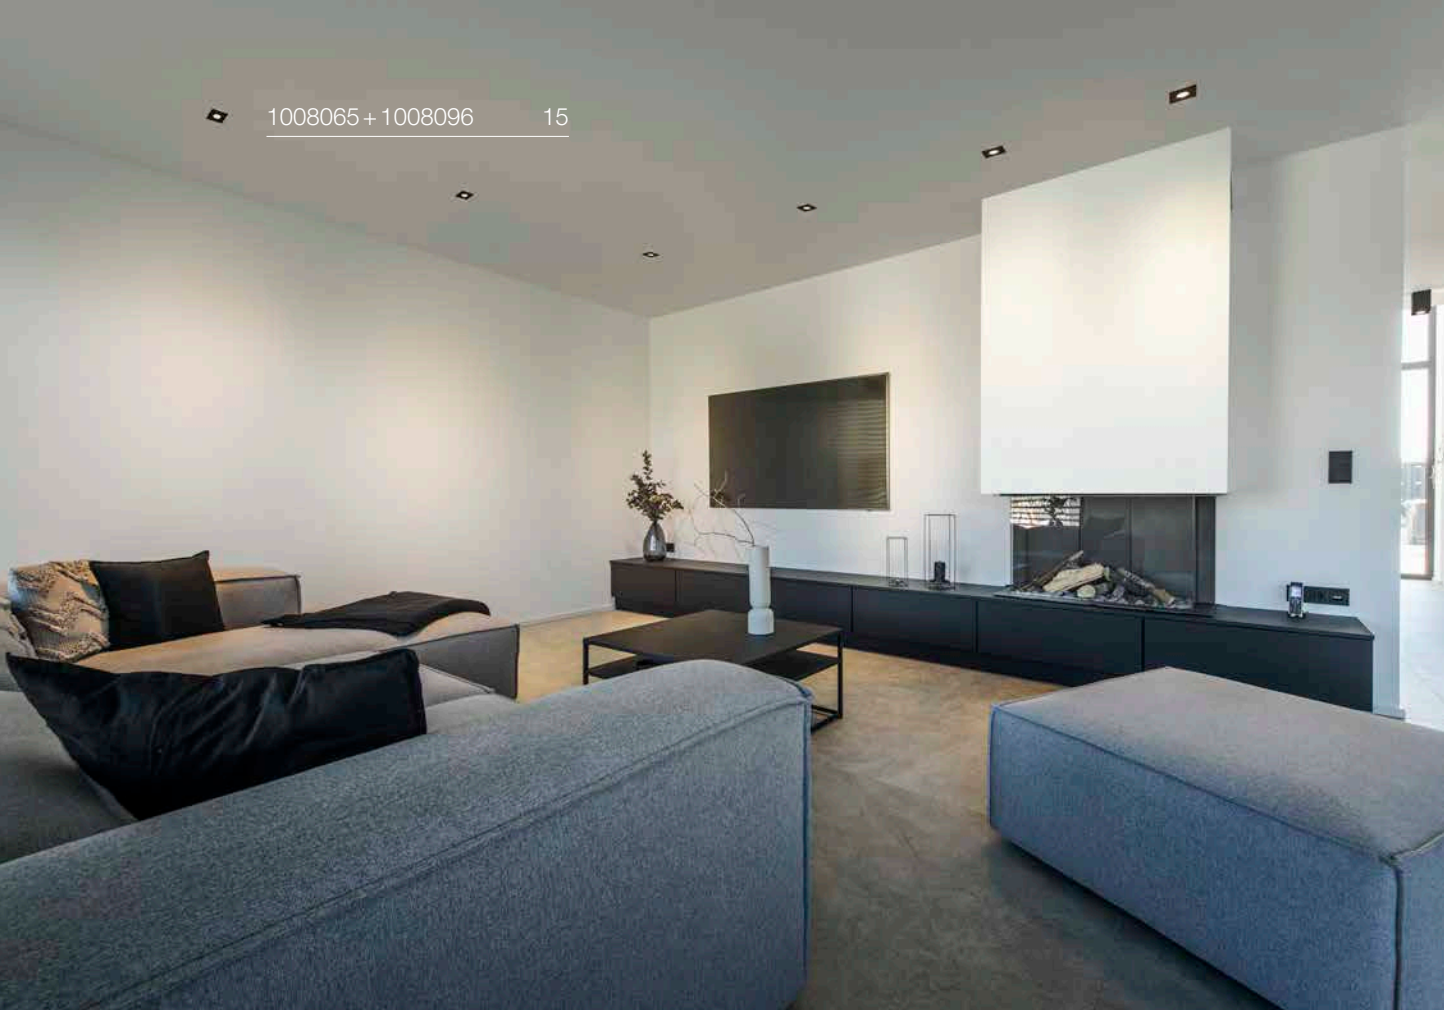

1008065 + 1008096 15

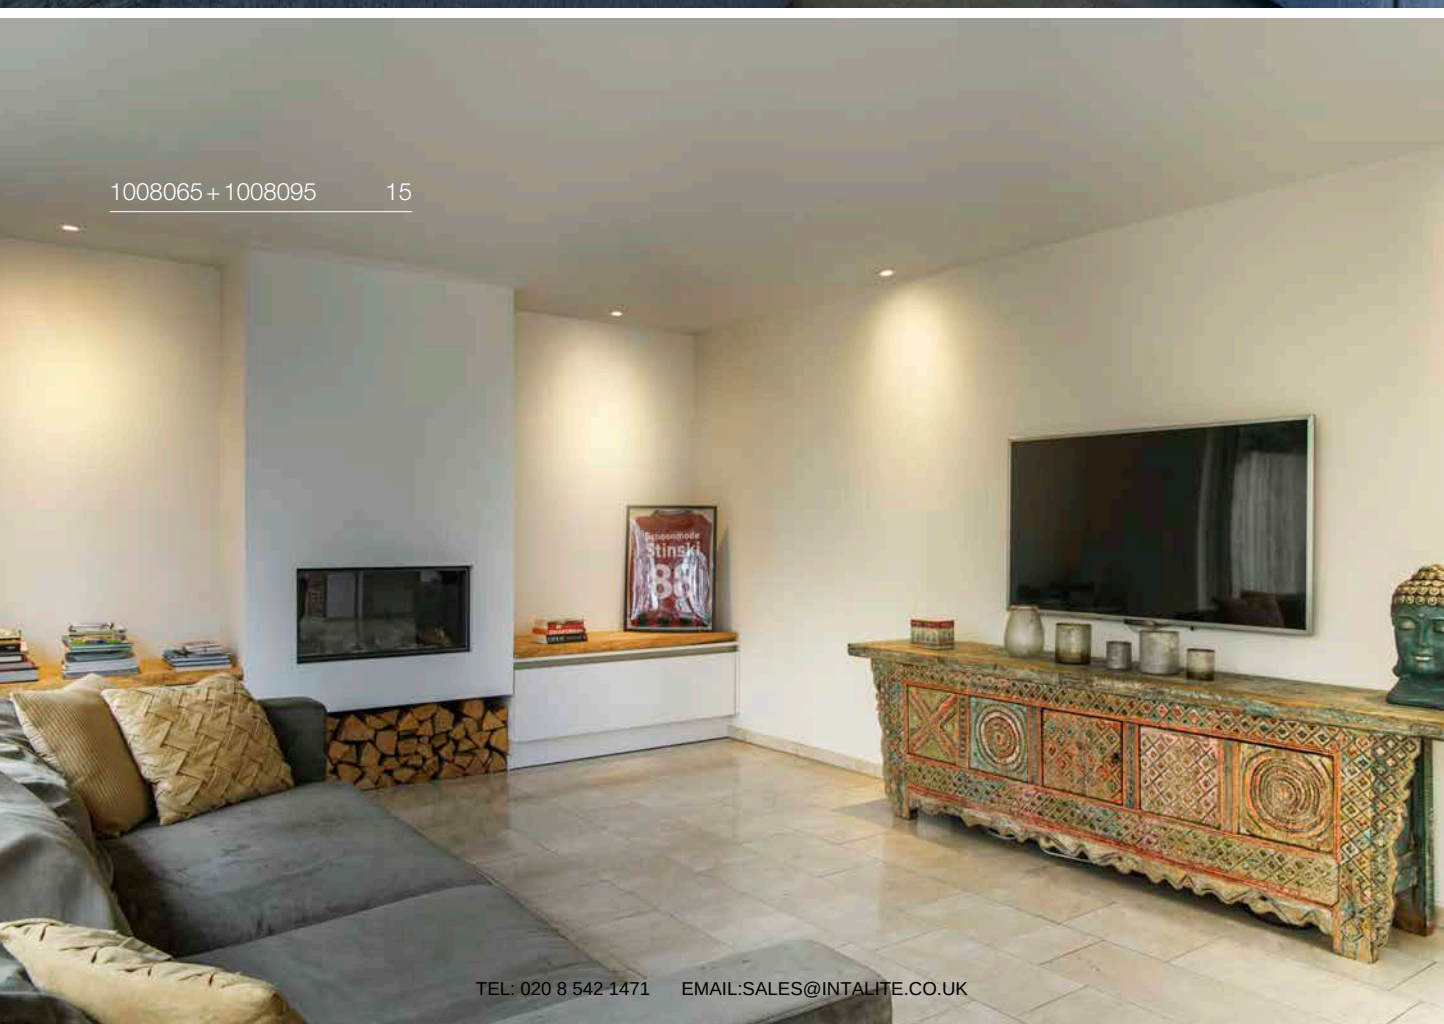

1008065 + 1008095 15

UNIVERSAL DOWNLIGHT
DL, PHASE

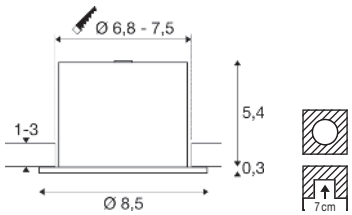

IP20 IK02 38° 30° 50000h L80B50

10

220-240 V ~50/60 Hz | 60 mA
Total wattage: 5 W / 7 W
Material: steel

- In conjunction with the fixed cover, the downlight fulfils RE2020 requirements
- Tested for use in fire-retardant rated suspended ceilings
- Lockable springs for easier assembly
- Material thickness of mounting surface: max. 30 mm

LED INSIDE CRI 90

5 W	470 lm	2700 K
	490 lm	3000 K
	500 lm	4000 K
	490 lm	6500 K
7 W	670 lm	2700 K
	680 lm	3000 K
	690 lm	4000 K
	680 lm	6500 K

Options	Prod. no.	GBP
● black	1008065	23.00

UNIVERSAL DOWNLIGHT
Cover, fixed, round, IP65

IP20/ IP65

Ø: 8.8 cm
H: 0.5 cm
Material: polycarbonate (PC)

- IP65 in conjunction with the universal downlight module

Options	Prod. no.	GBP
● black	1008067	2.60
○ white	1008068	2.60
● gold	1008070	3.00
◑ chrome	1008069	3.00

UNIVERSAL DOWNLIGHT
Cover, fixed, square, IP65

IP20/ IP65

L: 8.8 cm
W: 8.8 cm
H: 0.55 cm
Material: plastic PC

- IP65 in conjunction with the universal downlight module

Options	Prod. no.	GBP
● black	1008096	2.60
○ white	1008095	2.60
● gold	1008098	3.00
◑ chrome	1008097	3.00

UNIVERSAL DOWNLIGHT
Cover, pivoting, round, IP20

IP20

Ø: 8.8 cm
H: 0.35 cm
Material: Polycarbonate (PC)

Options	Prod. no.	GBP
● black	1007091	3.00
○ white	1007092	3.00
● gold	1007191	3.00
◑ aluminium	1007093	4.00

UNIVERSAL DOWNLIGHT
Cover, pivoting, square, IP20

IP20

L: 8.8 cm
W: 8.8 cm
H: 0.35 cm
Material: polycarbonate (PC)

Options	Prod. no.	GBP
● black	1007184	4.00
○ white	1007185	4.00
● gold	1007194	4.00
◑ aluminium	1007186	4.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

UNIVERSAL DOWNLIGHT: NOW EVEN MORE UNIVERSAL

- Can be used universally thanks to adjustable light colour: 2700/3000/4000/6500K and total wattage: 5W/7W
- Natural colour rendering CRI>90
- Customisable to your requirements: fixed version IP65 and pivoting version IP20
- Easy to install thanks to quick connector box and lockable springs
- Can be installed directly in the insulation or covered with insulating material
- Airtight when IP65 cover is used
- Tested for use in fire-retardant rated suspended ceilings

CHOOSE YOUR FAVOURITE ...

1. Bezel (fixed IP65, pivoting IP20)
2. Shape and colour (black, white, aluminium, gold)
3. Choice of colour temperature (2700, 3000, 4000, 6500K)
4. Choice of total wattage (5W, 7W)

DONE!

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

UNIVERSAL DOWNLIGHT



NEW

Easy installation by means of quick connector box
and lockable springs

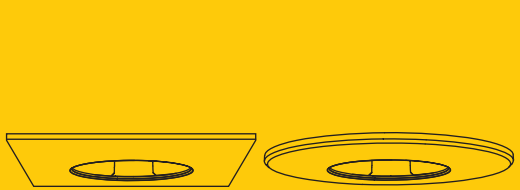

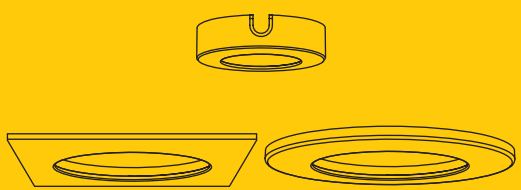

Choice of fixed or pivoting bezel, square or round design, and colours black, white, aluminium or gold

IP65

Fixed version IP 65 and airtight

IP20

Pivoting version IP20

Adjustable colour temperature
2700K / 3000K / 4000K / 6500K

Adjustable total wattage 5W / 7W

High light quality and colour rendering thanks
to LED with CRI90

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

KADUX
DL, single, DALI

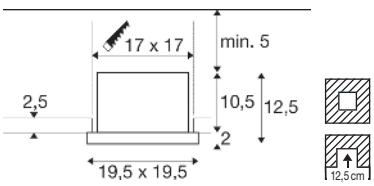

Dali Touch IP20 IK02 30° 20°

50 000 h L80B10 40

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/steel

- Material thickness of mounting surface: max. 25 mm

LED INSIDE CRI 90

Down	3050 lm 3350 lm	3000 K 4000 K

Options	Prod. no.	GBP
● black 3000 K	**1008568**	**197.00**
● black 4000 K	**1008570**	**197.00**
○ white 3000 K	**1008567**	**197.00**
○ white 4000 K	**1008569**	**197.00**

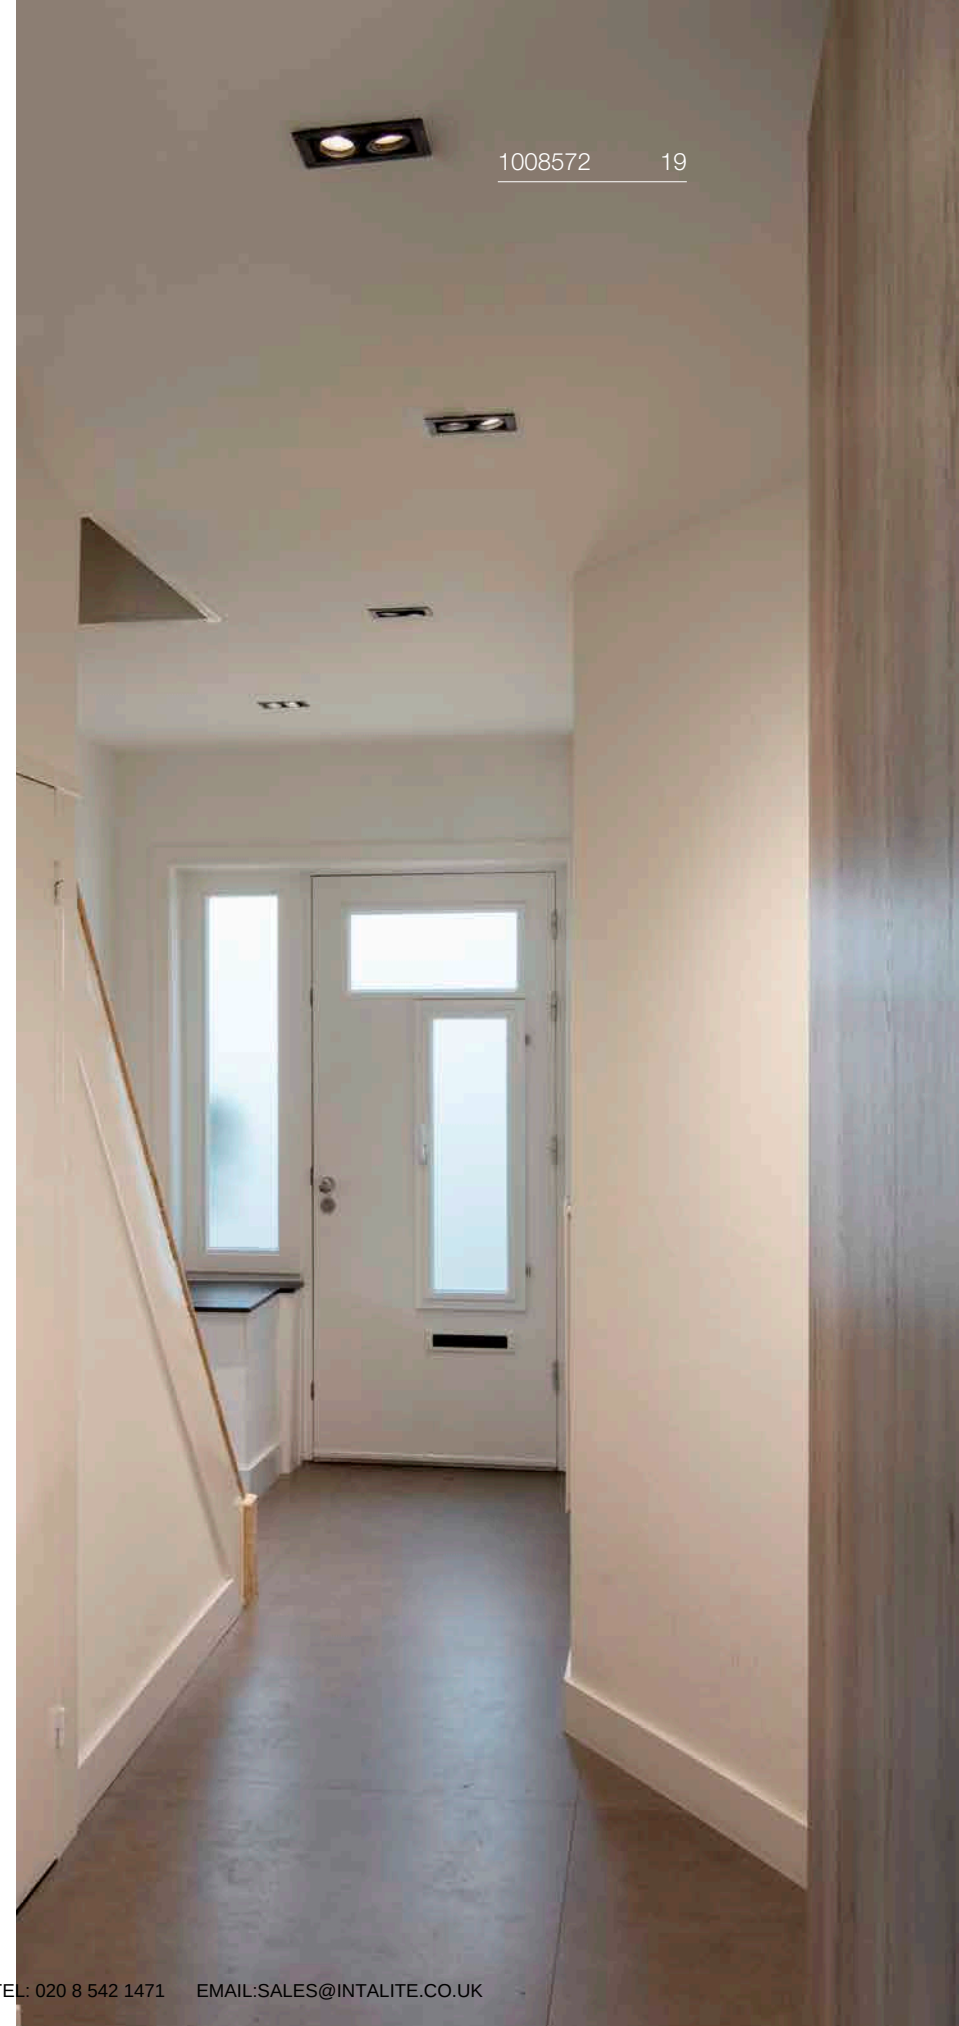

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

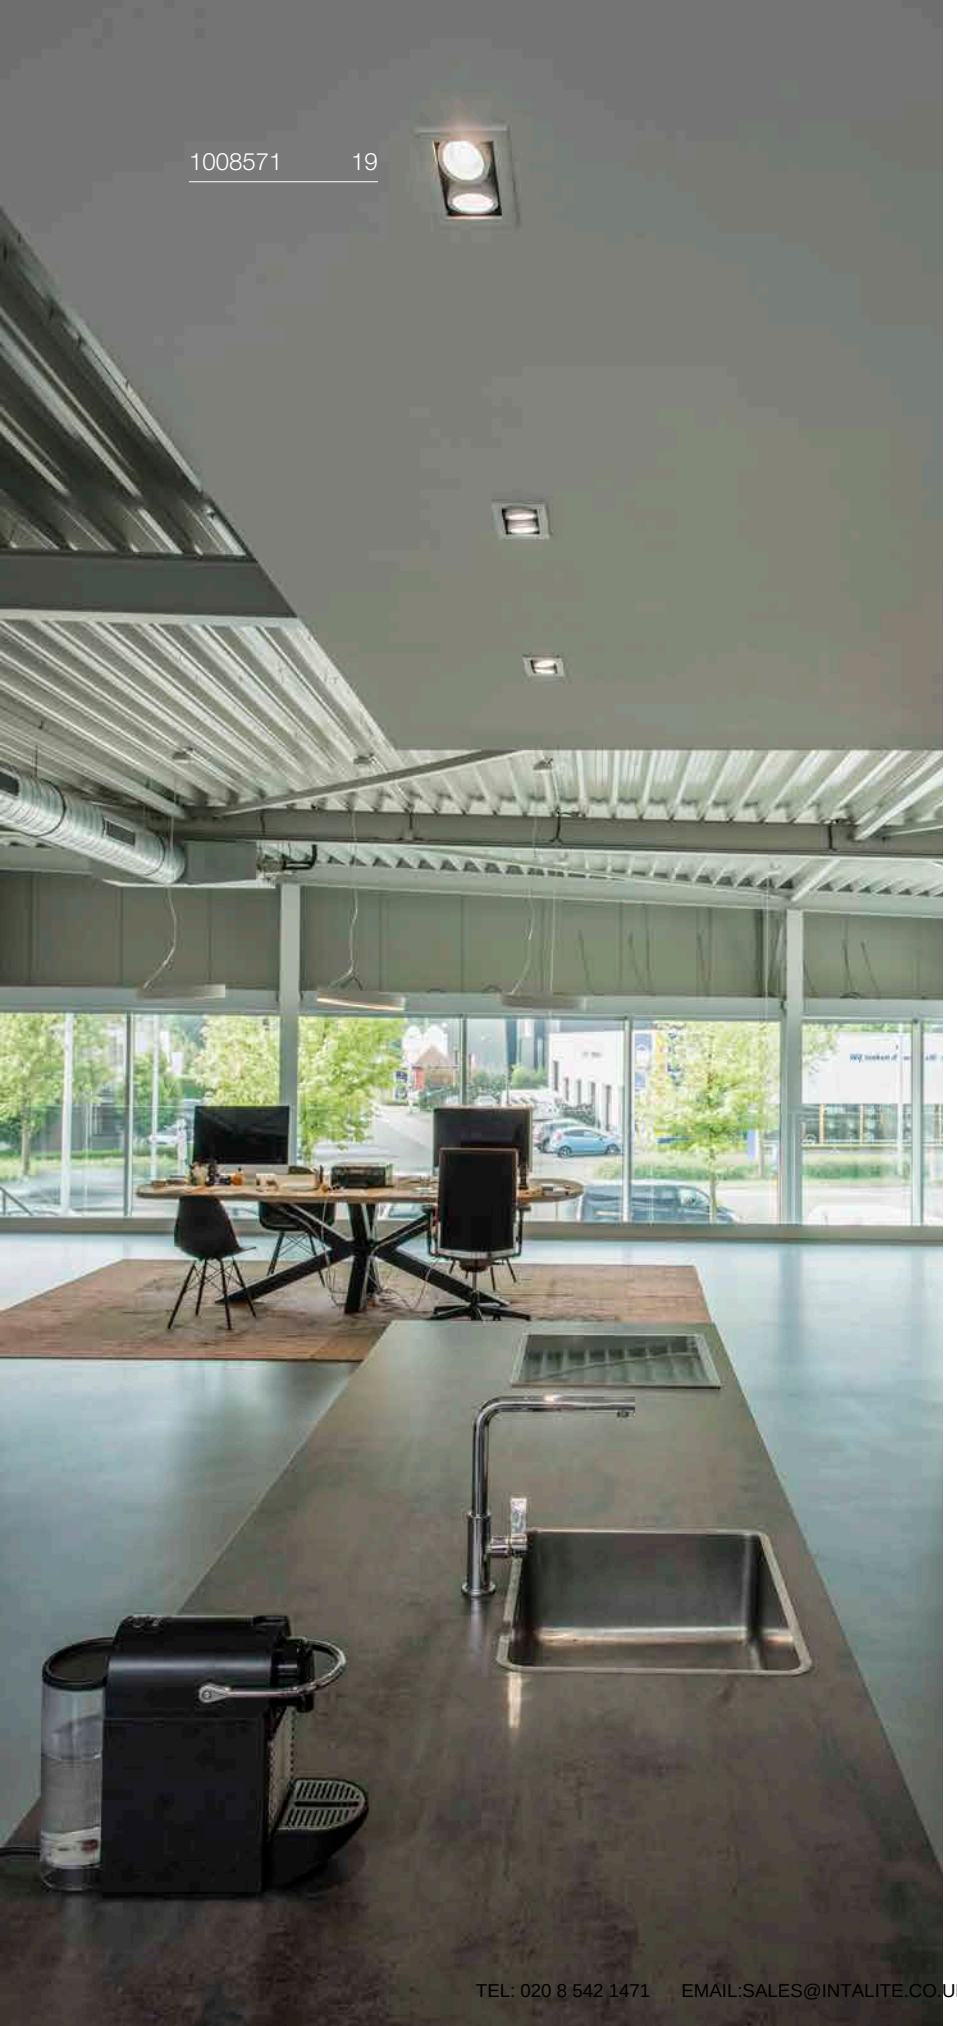

KADUX
DL, double, DALI

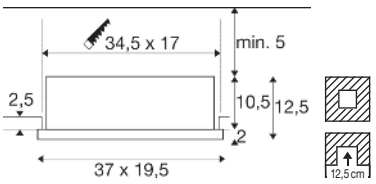

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 54 W
Material: aluminium/steel

- Material thickness of mounting surface: max. 25 mm

LED INSIDE CRI 90

Down	2x3150 lm	3000 K
	2x3400 lm	4000 K

Options	Prod. no.	GBP
● black 3000 K	**1008572**	**343.00**
● black 4000 K	**1008574**	**343.00**
○ white 3000 K	**1008571**	**343.00**
○ white 4000 K	**1008573**	**343.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007560 21

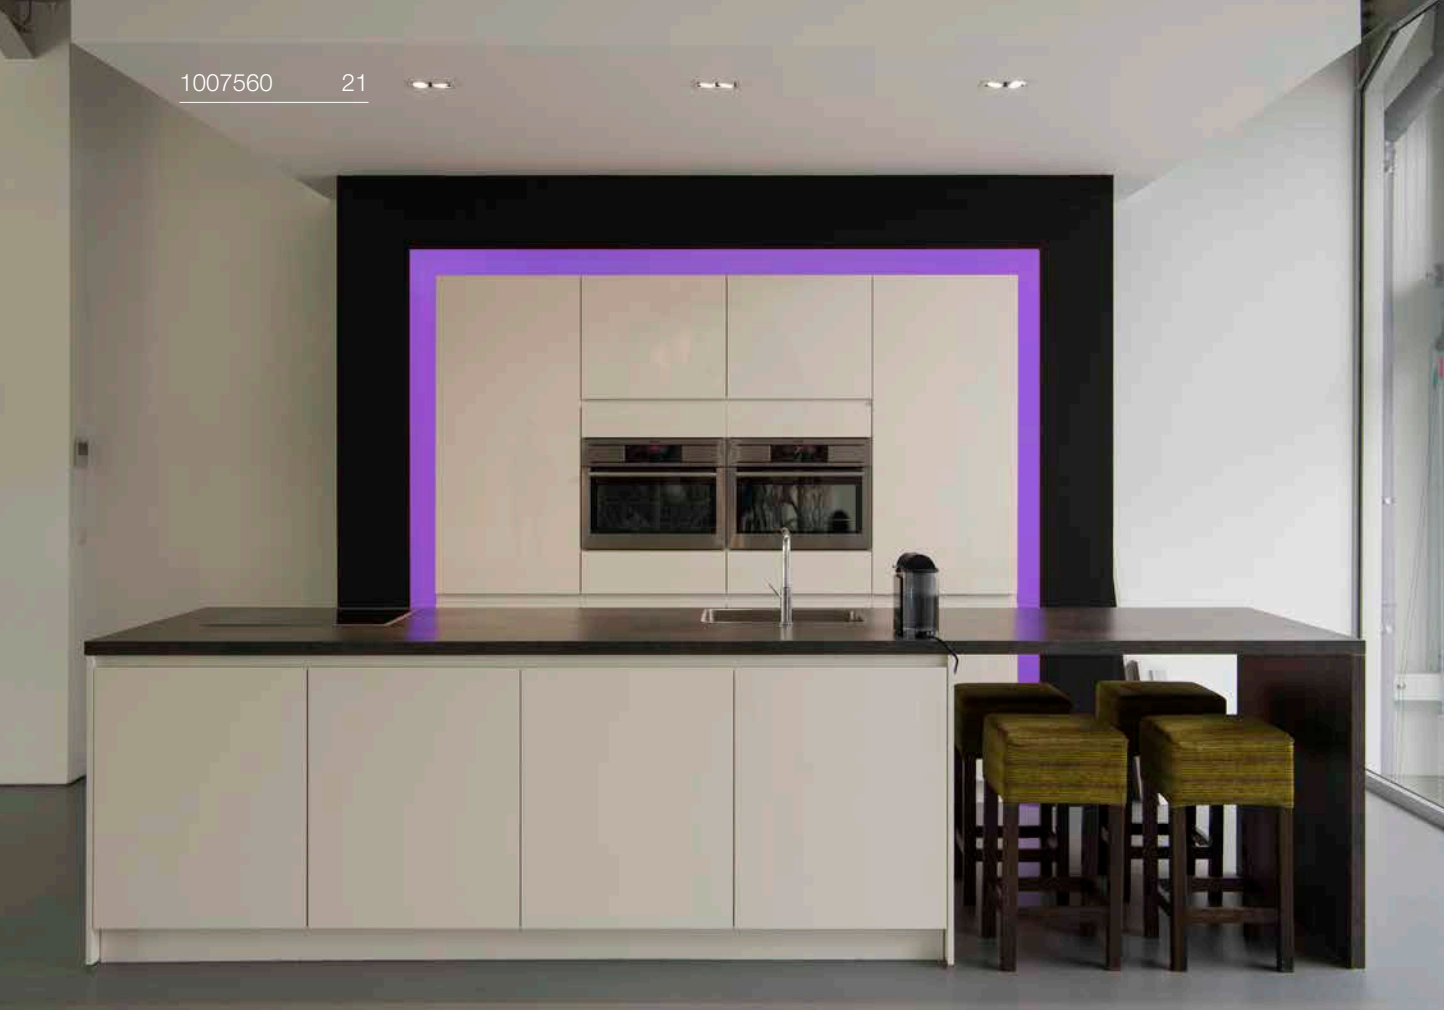

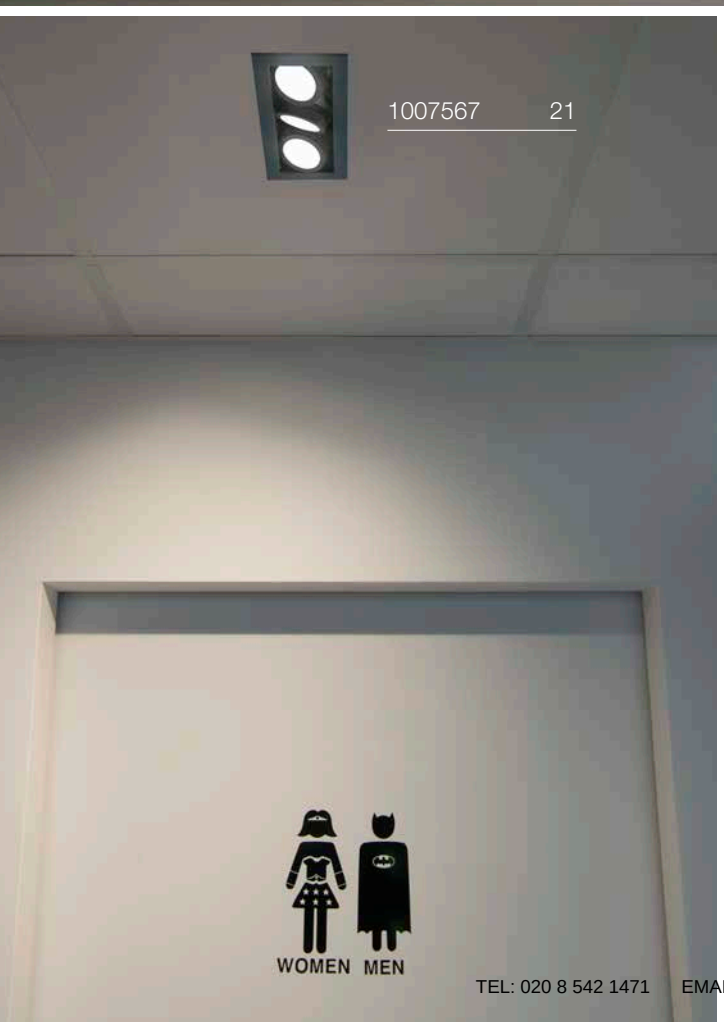

1007567 21

1007551 21

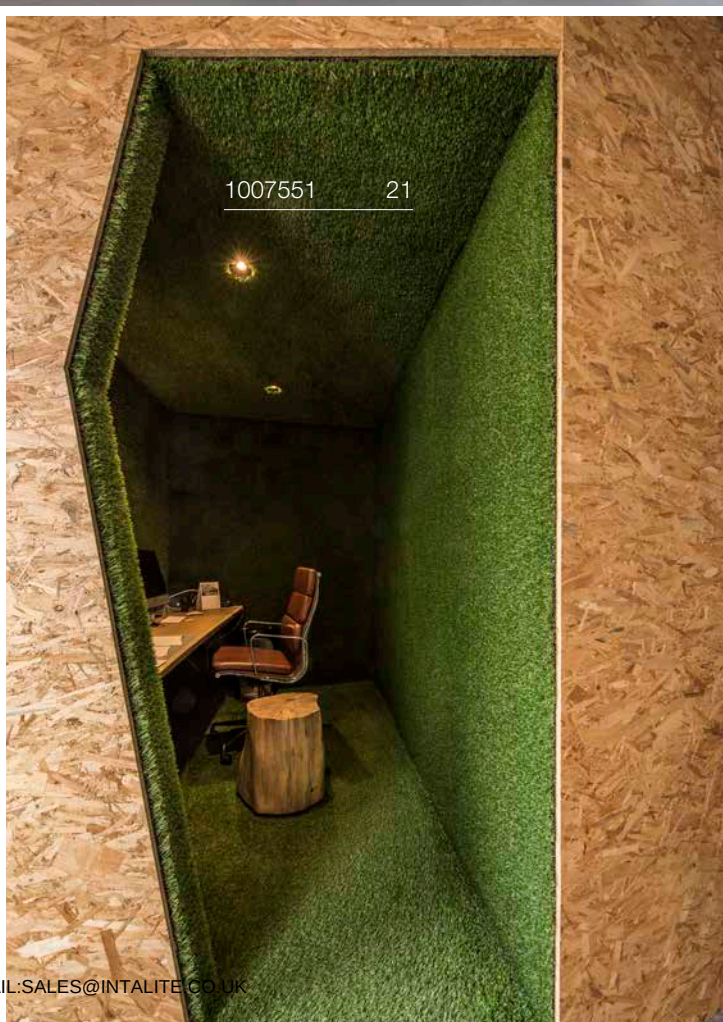

KADUX
DL, single, PHASE

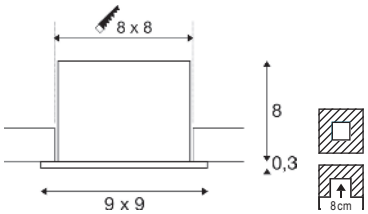

C,L IP20 IK02 38° 30° 50000h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.5 W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

LED INSIDE CRI 90

Down 770 lm|3000 K

Options	Prod. no.	GBP
● black	**1007551**	**73.00**
○ white	**1007552**	**73.00**

KADUX
DL, double, PHASE

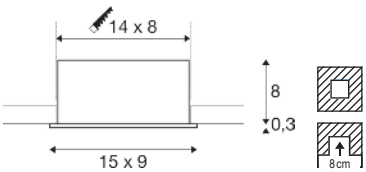

C,L IP20 IK02 2x 38° 30° 50000h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

LED INSIDE CRI 90

Down 1550 lm|3000 K

Options	Prod. no.	GBP
● black	**1007559**	**138.00**
○ white	**1007560**	**138.00**

KADUX
DL, triple, PHASE

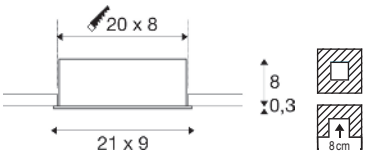

C,L IP20 IK02 3x 38° 30° 50000h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 20 W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

LED INSIDE CRI 90

Down 2350 lm|3000 K

Options	Prod. no.	GBP
● black	**1007567**	**181.00**
○ white	**1007568**	**181.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

KADUX
EL, single, QPAR51



IP20 30°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE 50 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**115510**	**29.00**
○ white	**115511**	**29.00**

GU10 | 6 W | 36°
360 lm | 2200 K | EEC = G
6 kWh/1000 h

Prod. no.: 1005273 9.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

KADUX
EL, double, QPAR51



IP20 30°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE 50 W

Base: 2xGU10

Options	Prod. no.	GBP
● black	**115520**	**53.00**
○ white	**115521**	**53.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

KADUX
EL, triple, QPAR51



IP20 30°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE 50 W

Base: 3xGU10

Options	Prod. no.	GBP
● black	**115530**	**72.00**
○ white	**115531**	**72.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

KADUX
EL, single, QPAR111



IP20 20°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 25 mm

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**115540**	**92.00**
○ white	**115541**	**92.00**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G
12 kWh/1000 h

Prod. no.: 1005297 73.00 GBP

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: 1010467 50.00 GBP

KADUX
EL, double, QPAR111



IP20 20°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 25 mm

SOCKET INSIDE 75 W

Base: 2xGU10

Options	Prod. no.	GBP
● black	**115550**	**141.00**
○ white	**115551**	**141.00**

GU10 | 8 W | 38°
680 lm | 2700 K | EEC = F
8 kWh/1000 h

Prod. no.: 1005274 26.00 GBP

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: 1010467 50.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® XS
DL



200 mA
Power consumption: 6.9 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All XS versions	**59.00**

⊕

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010125**	**7.00**
copper	**1010126**	**7.00**



● black

● black



○ white

● black

○ white

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	900 lm	20°	19	1009271	
		40°	22	1009274	
		55°	25	1009277	
3000 K	950 lm	20°	19	1009289	
		40°	22	1009292	
		55°	25	1009295	
4000 K	1000 lm	20°	19	1009307	
		40°	22	1009310	
		55°	25	1009313	
2700 K	900 lm	20°	19	1009280	
		40°	22	1009283	
		55°	25	1009286	
3000 K	950 lm	20°	19	1009298	
		40°	22	1009301	
		55°	25	1009304	
4000 K	1000 lm	20°	19	1009316	
		40°	22	1009319	
		55°	25	1009322	
2700 K	900 lm	20°	19	1009281	
		40°	22	1009284	
		55°	25	1009287	
3000 K	950 lm	20°	19	1009299	
		40°	22	1009302	
		55°	25	1009305	
4000 K	1000 lm	20°	19	1009317	
		40°	22	1009320	
		55°	25	1009323	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
		XS		
Prod. no.	**1005612**	**1005613**	**1005614**	**1005615**
GBP	**4.00**	**5.00**	**5.00**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® S
DL



IP20 IK02 50 000 h L90B10 10 cm INSIDE CRI 90

200 mA
Power consumption: 6.7 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All S versions	62.00

⊕

Product	Prod. no.	GBP
Decorative reflector		
gold	1010127	8.00
copper	1010128	8.00



● black

● black



○ white

● black

○ white

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	1000 lm	20°	19	1009433	
		40°	19	1009436	
		55°	22	1009439	
3000 K	1050 lm	20°	19	1009451	
		40°	19	1009454	
		55°	22	1009457	
4000 K		20°	19	1009469	
		40°	19	1009472	
		55°	22	1009475	
2700 K	1000 lm	20°	19	1009442	
		40°	19	1009445	
		55°	22	1009448	
3000 K	1050 lm	20°	19	1009460	
		40°	19	1009463	
		55°	22	1009466	
4000 K		20°	19	1009478	
		40°	19	1009481	
		55°	22	1009484	
2700 K	1000 lm	20°	19	1009443	
		40°	19	1009446	
		55°	22	1009449	
3000 K	1050 lm	20°	19	1009461	
		40°	19	1009464	
		55°	22	1009467	
4000 K		20°	19	1009479	
		40°	19	1009482	
		55°	22	1009485	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb
		S		
Prod. no.	1010682	1010680	1010681	1010679
GBP	4.00	5.00	5.00	7.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® M
DL



IP20 IK02 50 000 h L90B10 10 cm LED INSIDE CRI 90

350 mA
Power consumption: 12 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All M versions	**74.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010129**	**9.00**
copper	**1010130**	**9.00**



● black

● black



○ white

● black

○ white

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	1700 lm	20°	19	1009595	
		40°	19	1009598	
		55°	22	1009601	
3000 K	1800 lm	20°	19	1009613	
		40°	19	1009616	
		55°	22	1009619	
4000 K	1900 lm	20°	19	1009631	
		40°	19	1009634	
		55°	22	1009637	
2700 K	1700 lm	20°	19	1009604	
		40°	19	1009607	
		55°	22	1009610	
3000 K	1800 lm	20°	19	1009622	
		40°	19	1009625	
		55°	22	1009628	
4000 K	1900 lm	20°	19	1009640	
		40°	19	1009643	
		55°	22	1009646	
2700 K	1700 lm	20°	19	1009605	
		40°	19	1009608	
		55°	22	1009611	
3000 K	1800 lm	20°	19	1009623	
		40°	19	1009626	
		55°	22	1009629	
4000 K	1900 lm	20°	19	1009641	
		40°	19	1009644	
		55°	22	1009647	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
	M			
Prod. no.	**1010686**	**1010684**	**1010685**	**1010683**
GBP	**4.00**	**5.00**	**5.00**	**11.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® L
DL

UPDATE



500 mA
Power consumption: 17 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All L versions	**90.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010131**	**9.00**
copper	**1010132**	**9.00**



● black

● black



○ white

● black

○ white

Note:
You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

				Prod. no.	
2700 K	2400 lm	20°	19	1009757	
		40°	22	1010160	
		55°	22	1009762	
3000 K	2500 lm	20°	19	1009774	
		40°	22	1009777	
		55°	22	1009780	
4000 K	2700 lm	20°	19	1009792	
		40°	22	1009795	
		55°	22	1009798	
2700 K	2400 lm	20°	19	1009765	
		40°	22	1009768	
		55°	22	1009771	
3000 K	2500 lm	20°	19	1009783	
		40°	22	1009786	
		55°	22	1009789	
4000 K	2700 lm	20°	19	1009801	
		40°	22	1009804	
		55°	22	1009807	
2700 K	2400 lm	20°	19	1009766	
		40°	22	1009769	
		55°	22	1009772	
3000 K	2500 lm	20°	19	1009784	
		40°	22	1009787	
		55°	22	1009790	
4000 K	2700 lm	20°	19	1009802	
		40°	22	1009805	
		55°	22	1009808	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
		L		
Prod. no.	**1010690**	**1010688**	**1010689**	**1010687**
GBP	**5.00**	**5.00**	**5.00**	**14.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® XL
DL



700 mA
Power consumption: 24 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All XL versions	**112.00**

⊕

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010133**	**10.00**
copper	**1010134**	**10.00**



● black

● black



○ white

● black

○ white

Note:
You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	3500 lm	20°	19	1009918	
		40°	19	1009921	
		55°	22	1009924	
3000 K	3600 lm	20°	19	1009936	
		40°	19	1009939	
		55°	22	1009942	
4000 K	3800 lm	20°	19	1009954	
		40°	19	1009957	
		55°	22	1009960	
2700 K	3500 lm	20°	19	1009927	
		40°	19	1009930	
		55°	22	1009933	
3000 K	3600 lm	20°	19	1009945	
		40°	19	1009948	
		55°	22	1009951	
4000 K	3800 lm	20°	19	1009963	
		40°	19	1009966	
		55°	22	1009969	
2700 K	3500 lm	20°	19	1009928	
		40°	19	1009931	
		55°	22	1009934	
3000 K	3600 lm	20°	19	1009946	
		40°	19	1009949	
		55°	22	1009952	
4000 K	3800 lm	20°	19	1009964	
		40°	19	1009967	
		55°	22	1009970	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
	XL			
Prod. no.	**1010694**	**1010692**	**1010693**	**1010691**
GBP	**5.00**	**6.00**	**6.00**	**18.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® MOVE XS
DL

UPDATE



200 mA
Power consumption: 6.9 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All XS versions	**71.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010125**	**7.00**
copper	**1010126**	**7.00**



● black

● black



○ white

● black

○ white

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	900 lm	20°	19	1009325	
		40°	22	1009328	
		55°	25	1009331	
3000 K	950 lm	20°	19	1009343	
		40°	22	1009346	
		55°	25	1009349	
4000 K	1000 lm	20°	19	1009361	
		40°	22	1009364	
		55°	25	1009367	
2700 K	900 lm	20°	19	1009334	
		40°	22	1009337	
		55°	25	1009340	
3000 K	950 lm	20°	19	1009352	
		40°	22	1009355	
		55°	25	1009358	
4000 K	1000 lm	20°	19	1009370	
		40°	22	1009373	
		55°	25	1009376	
2700 K	900 lm	20°	19	1009335	
		40°	22	1009338	
		55°	25	1009341	
3000 K	950 lm	20°	19	1009353	
		40°	22	1009356	
		55°	25	1009359	
4000 K	1000 lm	20°	19	1009371	
		40°	22	1009374	
		55°	25	1009377	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
		XS		
Prod. no.	**1005612**	**1005613**	**1005614**	**1005615**
GBP	**4.00**	**5.00**	**5.00**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® MOVE S
DL



200 mA
Power consumption: 6.7 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All S versions	**78.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010127**	**8.00**
copper	**1010128**	**8.00**



● black

● black



○ white

● black

○ white

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	1000 lm	20°	19	1009487	
		40°	19	1009490	
		55°	22	1009493	
3000 K	1050 lm	20°	19	1009505	
		40°	19	1009508	
		55°	22	1009511	
4000 K		20°	19	1009523	
		40°	19	1009526	
		55°	22	1009529	
2700 K	1000 lm	20°	19	1009496	
		40°	19	1009499	
		55°	22	1009502	
3000 K	1050 lm	20°	19	1009514	
		40°	19	1009517	
		55°	22	1009520	
4000 K		20°	19	1009532	
		40°	19	1009535	
		55°	22	1009538	
2700 K	1000 lm	20°	19	1009497	
		40°	19	1009500	
		55°	22	1009503	
3000 K	1050 lm	20°	19	1009515	
		40°	19	1009518	
		55°	22	1009521	
4000 K		20°	19	1009533	
		40°	19	1009536	
		55°	22	1009539	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb
			S	
Prod. no.	1010682	1010680	1010681	1010679
GBP	4.00	5.00	5.00	7.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® MOVE M
DL



350 mA
Power consumption: 12 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All M versions	**87.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010129**	**9.00**
copper	**1010130**	**9.00**



● black

● black



○ white

● black

○ white

Note:
You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

				Prod. no.	
2700 K	1700 lm	20°	19	1009649	
		40°	19	1009652	
		55°	22	1009655	
3000 K	1800 lm	20°	19	1009667	
		40°	19	1009670	
		55°	22	1009673	
4000 K	1900 lm	20°	19	1009685	
		40°	19	1009688	
		55°	22	1009691	
2700 K	1700 lm	20°	19	1009658	
		40°	19	1009661	
		55°	22	1009664	
3000 K	1800 lm	20°	19	1009676	
		40°	19	1009679	
		55°	22	1009682	
4000 K	1900 lm	20°	19	1009694	
		40°	19	1009697	
		55°	22	1009700	
2700 K	1700 lm	20°	19	1009659	
		40°	19	1009662	
		55°	22	1009665	
3000 K	1800 lm	20°	19	1009677	
		40°	19	1009680	
		55°	22	1009683	
4000 K	1900 lm	20°	19	1009695	
		40°	19	1009698	
		55°	22	1009701	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb
	M			
Prod. no.	1010686	1010684	1010685	1010683
GBP	4.00	5.00	5.00	11.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® MOVE L
DL



500 mA
Power consumption: 17 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All L versions	**104.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010131**	**9.00**
copper	**1010132**	**9.00**



● black

● black



○ white

● black

○ white

Note:
You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.
2700 K	2400 lm	20°	19	1009810
		40°	22	1009813
		55°	22	1009816
3000 K	2500 lm	20°	19	1009828
		40°	22	1009831
		55°	22	1009834
4000 K	2700 lm	20°	19	1009846
		40°	22	1009849
		55°	22	1009852
2700 K	2400 lm	20°	19	1009819
		40°	22	1009822
		55°	22	1009825
3000 K	2500 lm	20°	19	1009837
		40°	22	1009840
		55°	22	1009843
4000 K	2700 lm	20°	19	1009855
		40°	22	1009858
		55°	22	1009861
2700 K	2400 lm	20°	19	1009820
		40°	22	1009823
		55°	22	1009826
3000 K	2500 lm	20°	19	1009838
		40°	22	1009841
		55°	22	1009844
4000 K	2700 lm	20°	19	1009856
		40°	22	1009859
		55°	22	1009862

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
		L		
Prod. no.	**1010690**	**1010688**	**1010689**	**1010687**
GBP	**5.00**	**5.00**	**5.00**	**14.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® MOVE XL
DL



700 mA
Power consumption: 24 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All XL versions	**129.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010133**	**10.00**
copper	**1010134**	**10.00**



● black

● black



○ white

● black

○ white

Note:
You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	3500 lm	20°	19	1009972	
		40°	19	1009975	
		55°	22	1009978	
3000 K	3600 lm	20°	19	1009990	
		40°	19	1009993	
		55°	22	1009996	
4000 K	3800 lm	20°	19	1010008	
		40°	19	1010011	
		55°	22	1010014	
2700 K	3500 lm	20°	19	1009981	
		40°	19	1009984	
		55°	22	1009987	
3000 K	3600 lm	20°	19	1009999	
		40°	19	1010002	
		55°	22	1010005	
4000 K	3800 lm	20°	19	1010017	
		40°	19	1010020	
		55°	22	1010023	
2700 K	3500 lm	20°	19	1009982	
		40°	19	1009985	
		55°	22	1009988	
3000 K	3600 lm	20°	19	1010000	
		40°	19	1010003	
		55°	22	1010006	
4000 K	3800 lm	20°	19	1010018	
		40°	19	1010021	
		55°	22	1010024	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb
	XL			
Prod. no.	1010694	1010692	1010693	1010691
GBP	5.00	6.00	6.00	18.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® GIMBLE XS
DL



200 mA
Power consumption: 6 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All XS versions	**78.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010125**	**7.00**
copper	**1010126**	**7.00**



● black

● black



○ white

● black

○ white

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	900 lm	20°	19	1010026	
		40°	22	1010029	
		55°	25	1010032	
3000 K	950 lm	20°	19	1010044	
		40°	22	1010047	
		55°	25	1010050	
4000 K	1000 lm	20°	19	1010062	
		40°	22	1010065	
		55°	25	1010068	
2700 K	900 lm	20°	19	1010035	
		40°	22	1010038	
		55°	25	1010041	
3000 K	950 lm	20°	19	1010053	
		40°	22	1010056	
		55°	25	1010059	
4000 K	1000 lm	20°	19	1010071	
		40°	22	1010074	
		55°	25	1010077	
2700 K	900 lm	20°	19	1010036	
		40°	22	1010039	
		55°	25	1010042	
3000 K	950 lm	20°	19	1010054	
		40°	22	1010057	
		55°	25	1010060	
4000 K	1000 lm	20°	19	1010072	
		40°	22	1010075	
		55°	25	1010078	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
		XS		
Prod. no.	**1005612**	**1005613**	**1005614**	**1005615**
GBP	**4.00**	**5.00**	**5.00**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® GIMBLE S
DL



200 mA
Power consumption: 6.7 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All S versions	87.00

Product	Prod. no.	GBP
Decorative reflector		
gold	1010127	8.00
copper	1010128	8.00



● black

● black



○ white

● black

○ white

Note:
Leaf springs are included with the product and can be replaced.

You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	1000 lm	20°	19	1009379	
		40°	19	1009382	
		55°	22	1009385	
3000 K	1050 lm	20°	19	1009397	
		40°	19	1009400	
		55°	22	1009403	
4000 K		20°	19	1009415	
		40°	19	1009418	
		55°	22	1009421	
2700 K	1000 lm	20°	19	1009388	
		40°	19	1009391	
		55°	22	1009394	
3000 K	1050 lm	20°	19	1009406	
		40°	19	1009409	
		55°	22	1009412	
4000 K		20°	19	1009424	
		40°	19	1009427	
		55°	22	1009430	
2700 K	1000 lm	20°	19	1009389	
		40°	19	1009392	
		55°	22	1009395	
3000 K	1050 lm	20°	19	1009407	
		40°	19	1009410	
		55°	22	1009413	
4000 K		20°	19	1009425	
		40°	19	1009428	
		55°	22	1009431	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
		S		
Prod. no.	**1010682**	**1010680**	**1010681**	**1010679**
GBP	**4.00**	**5.00**	**5.00**	**7.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® GIMBLE M
DL



350 mA
Power consumption: 12 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All M versions	**95.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010129**	**9.00**
copper	**1010130**	**9.00**



● black

● black



○ white

● black

○ white

Note:
You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	1700 lm	20°	19	1009541	
		40°	19	1009544	
		55°	22	1009547	
3000 K	1800 lm	20°	19	1009559	
		40°	19	1009562	
		55°	22	1009565	
4000 K	1900 lm	20°	19	1009577	
		40°	19	1009580	
		55°	22	1009583	
2700 K	1700 lm	20°	19	1009550	
		40°	19	1009553	
		55°	22	1009556	
3000 K	1800 lm	20°	19	1009568	
		40°	19	1009571	
		55°	22	1009574	
4000 K	1900 lm	20°	19	1009586	
		40°	19	1009589	
		55°	22	1009592	
2700 K	1700 lm	20°	19	1009551	
		40°	19	1009554	
		55°	22	1009557	
3000 K	1800 lm	20°	19	1009569	
		40°	19	1009572	
		55°	22	1009575	
4000 K	1900 lm	20°	19	1009587	
		40°	19	1009590	
		55°	22	1009593	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb
	M			
Prod. no.	1010686	1010684	1010685	1010683
GBP	4.00	5.00	5.00	11.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® GIMBLE L
DL

UPDATE



500 mA
Power consumption: 17 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All L versions	**112.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010131**	**9.00**
copper	**1010132**	**9.00**



● black

● black



○ white

● black

○ white

Note:
You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

				Prod. no.	
2700 K	2400 lm	20°	19	1009703	
		40°	22	1009706	
		55°	22	1009709	
3000 K	2500 lm	20°	19	1009721	
		40°	22	1009724	
		55°	22	1009727	
4000 K	2700 lm	20°	19	1009739	
		40°	22	1009742	
		55°	22	1009745	
2700 K	2400 lm	20°	19	1009712	
		40°	22	1009715	
		55°	22	1009718	
3000 K	2500 lm	20°	19	1009730	
		40°	22	1009733	
		55°	22	1009736	
4000 K	2700 lm	20°	19	1009748	
		40°	22	1009751	
		55°	22	1009754	
2700 K	2400 lm	20°	19	1009713	
		40°	22	1009716	
		55°	22	1009719	
3000 K	2500 lm	20°	19	1009731	
		40°	22	1009734	
		55°	22	1009737	
4000 K	2700 lm	20°	19	1009749	
		40°	22	1009752	
		55°	22	1009755	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	**Diffuser prismatic**	**Diffuser frosted**	**Diffuser honeycomb**
		L		
Prod. no.	**1010690**	**1010688**	**1010689**	**1010687**
GBP	**5.00**	**5.00**	**5.00**	**14.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® GIMBLE XL
DL



700 mA
Power consumption: 24 W
Material: aluminium/plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Options	GBP
All XL versions	**132.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010133**	**10.00**
copper	**1010134**	**10.00**



● black

● black



○ white

● black

○ white

Note:
You can find suitable drivers and reducer rings on pages 54-59.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

			UGR	Prod. no.	
2700 K	3500 lm	20°	19	1009864	
		40°	19	1009867	
		55°	22	1009870	
3000 K	3600 lm	20°	19	1009882	
		40°	19	1009885	
		55°	22	1009888	
4000 K	3800 lm	20°	19	1009900	
		40°	19	1009903	
		55°	22	1009906	
2700 K	3500 lm	20°	19	1009873	
		40°	19	1009876	
		55°	22	1009879	
3000 K	3600 lm	20°	19	1009891	
		40°	19	1009894	
		55°	22	1009897	
4000 K	3800 lm	20°	19	1009909	
		40°	19	1009912	
		55°	22	1009915	
2700 K	3500 lm	20°	19	1009874	
		40°	19	1009877	
		55°	22	1009880	
3000 K	3600 lm	20°	19	1009892	
		40°	19	1009895	
		55°	22	1009898	
4000 K	3800 lm	20°	19	1009910	
		40°	19	1009913	
		55°	22	1009916	

Configure further items and colours at slv.com

Diffusers

	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb
			XL	
Prod. no.	1010694	1010692	1010693	1010691
GBP	5.00	6.00	6.00	18.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Driver assignment XS, S

LED DRIVER 21 W | 200 mA	LED DRIVER 10 W | 200 mA dimmable	LED DRIVER 23 W | 200 mA DALI dimmable
XS S		

Material	Polycarbonate (PC)		
Colour	white		
Voltage prim.	220-240 V ~50/60 Hz		
Voltage sec.	15-45 V DC	26-38 V DC	2.5-46V DC
Output current	200 mA		
Number of sec. outputs	1		
Output from	3 W	4.7 W	0.5 W
Ouput up to	9 W	7.6 W	9.2 W
Ambient temp. min	-20°C	-25°C	-20°C
Ambient temp. max.	45°C	50°C	
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	13.8 cm	12.2 cm	13.9 cm
Width	4.4 cm	4.1cm	3 cm
Height	2.3 cm	2.3 cm	2.1 cm
Prod. no.	**1010695**	**1010699**	**1010703**
GBP	**21.00**	**25.00**	**55.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Driver assignment M

LED DRIVER 21 W | 350 mA	LED DRIVER 20 W | 350 mA dimmable	LED DRIVER 23 W | 350 mA DALI dimmable
	M	
	IP20	
Material	Polycarbonate (PC)	
Colour	white	
Voltage prim.	220-240 V ~50/60 Hz	
Voltage sec.	15-45 V DC	26-38 V DC	2.5-46 V DC
Output current	350mA	
Number of sec. outputs	1	
Output from	5.3 W	9.1 W	0.87 W
Ouput up to	15.8 W	13.3 W	16.1 W
Ambient temp. min	-20°C	-25°C	-20°C
Ambient temp. max.	45°C	50°C	
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	19.2 cm	13.8 cm	21 cm
Width	5.9 cm	4 cm	5.7 cm
Height	2.3 cm	3 cm	2.1 cm
Prod. no.	**1010696**	**1010700**	**1010704**
GBP	**21.00**	**30.00**	**55.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Driver assignment L

LED DRIVER 21 W | 500 mA	LED DRIVER 20 W | 500 mA dimmable	LED DRIVER 36 W | 500 mA DALI dimmable
	L	

Material	Polycarbonate (PC)		
Colour	white		
Voltage prim.	220-240 V ~50/60 Hz		
Voltage sec.	15-45 V DC	26-38 V DC	2.5-50 V DC
Output current	700 mA	500 mA	250/350/500/700 mA
Number of sec. outputs	1		
Output from	7.5 W	9.1 W	1.25 W
Ouput up to	22.5 W	19 W	25 W
Ambient temp. min	-20°C	-25°C	-20°C
Ambient temp. max.	45°C	50°C	
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	19.2 cm	13.8 cm	24 cm
Width	5.9 cm	4 cm	5.7 cm
Height	2.3 cm	3 cm	2.1 cm
Prod. no.	**1010697**	**1010701**	**1010705**
GBP	**21.00**	**30.00**	**59.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Driver assignment XL

LED DRIVER 30 W | 700 mA	LED DRIVER 30 W | 700 mA dimmable	LED DRIVER 30 W | 700 mA DALI dimmable
	XL	
	IP20	

Material	Polycarbonate (PC)		
Colour	white		
Voltage prim.	220-240 V ~50/60 Hz		
Voltage sec.	27-45V DC	26-42V DC	2.5-50V DC
Output current	1050 mA	700 mA	1050 mA
Number of sec. outputs	1		
Output from	18.9 W	18.2 W	1.75 W
Ouput up to	31.5 W	29.4 W	35 W
Ambient temp. min	-25°C	-20°C	-25°C
Ambient temp. max.	45°C		50°C
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	19.2 cm	13.8 cm	24 cm
Width	5.9 cm	4 cm	5.7 cm
Height	2.3 cm	3 cm	2.1 cm
Prod. no.	**1010698**	**1010702**	**1010706**
GBP	**23.00**	**33.00**	**59.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

⊕

Reducer ring, round

Material	Steel	Steel	Steel	Steel	Steel
External Ø	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal Ø	7 cm	10 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8.5 - 13 cm	12 - 15 cm	14 - 18 cm	17 - 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006135**	**1006139**	**1006143**	**1006147**	**1006151**
Prod. no. white	**1006136**	**1006140**	**1006144**	**1006148**	**1006152**
GBP	**16.00**	**14.00**	**17.00**	**16.00**	**15.00**

⊕

Reducer ring, square

Material	Steel	Steel	Steel	Steel	Steel
Length	16 cm	16 cm	24 cm	24 cm	24 cm
Width	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal Ø	7 cm	10 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8.5 - 13 cm	12 - 15 cm	14 - 18 cm	17 - 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006137**	**1006141**	**1006145**	**1006149**	**1006153**
Prod. no. white	**1006138**	**1006142**	**1006146**	**1006150**	**1006154**
GBP	**16.00**	**14.00**	**17.00**	**16.00**	**15.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DYSKO
DL, round, PHASE

NEW



220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.4 W
Material: aluminium

- Including external LED driver

LED INSIDE CRI 90

750 lm | 2700 K

Options	Prod. no.	GBP
black/gold	1010353	118.00
white/black	1010354	118.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA® 68
DL, PHASE

1

● black

○ white

2

● black



○ white

1



2



220-240 V ~50/60 Hz | 200 mA
Total wattage: 8.3 W
Material: aluminium

- Material thickness of mounting surface: max. 20mm

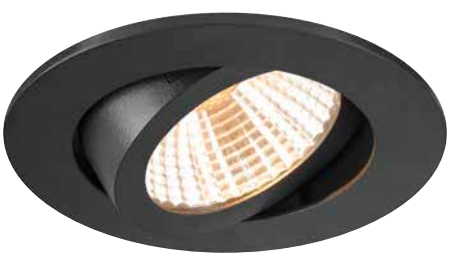

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

IP				Prod. no.	GBP	
IP 20	2700 K	705 lm	38°	**1007386**	**47.00**	
	2700 K	705 lm	60°	**1007388**	**47.00**	
	3000 K	750 lm	38°	**1007390**	**47.00**	
	3000 K	750 lm	60°	**1007392**	**47.00**	
IP 20	2700 K	705 lm	38°	**1007385**	**47.00**	
	2700 K	705 lm	60°	**1007387**	**47.00**	
	3000 K	750 lm	38°	**1007389**	**47.00**	
	3000 K	750 lm	60°	**1007391**	**47.00**	
IP 20	2700 K	705 lm	38°	**1007394**	**47.00**	
	2700 K	705 lm	60°	**1007396**	**47.00**	
	3000 K	750 lm	38°	**1007398**	**47.00**	
	3000 K	750 lm	60°	**1007400**	**47.00**	
IP 20	2700 K	705 lm	38°	**1007393**	**47.00**	
	2700 K	705 lm	60°	**1007395**	**47.00**	
	3000 K	750 lm	38°	**1007397**	**47.00**	
	3000 K	750 lm	60°	**1007399**	**47.00**	

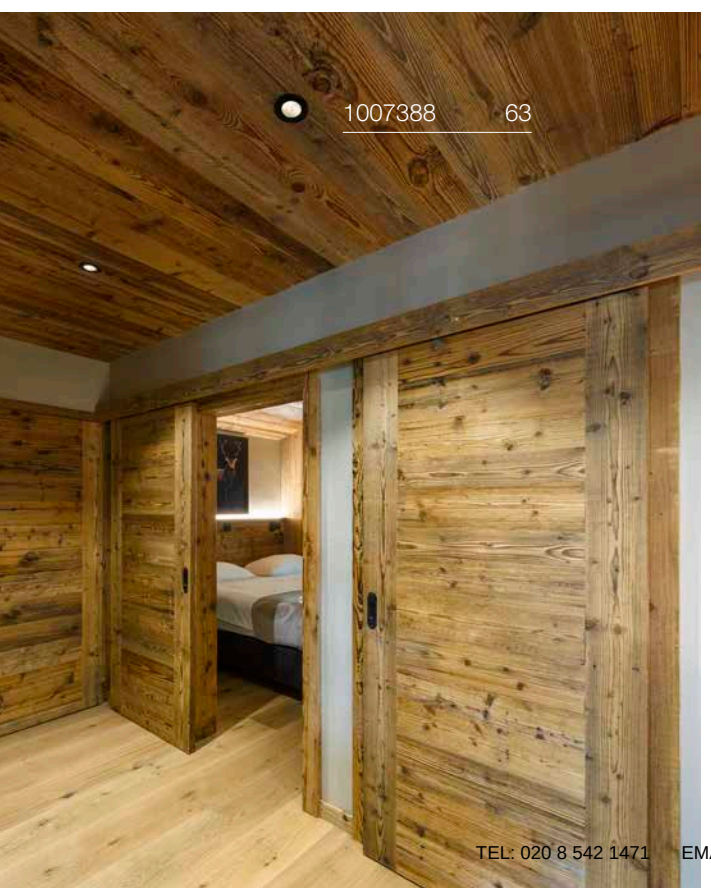

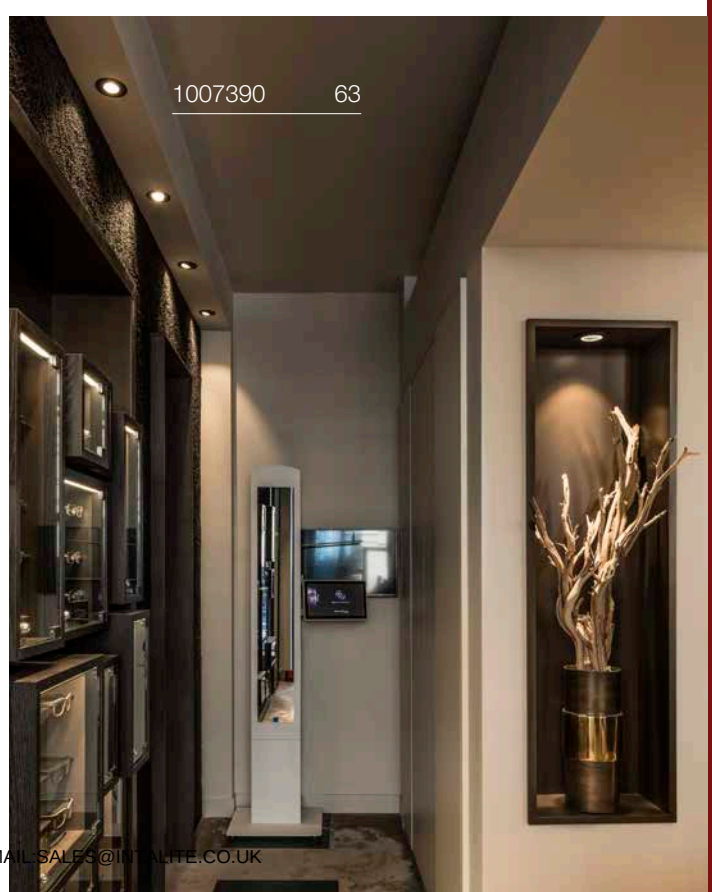

NEW TRIA® 68
DL, PHASE



220-240 V ~50/60Hz | 200mA
Total wattage: 8.3 W
Material: aluminium

- Material thickness of mounting surface: max. 20mm

● black

○ white

NEW TRIA® 75
DL, round, PHASE



220-240 V ~50/60 Hz | 200 mA
Total wattage: 8.3 W
Material: aluminium

- Material thickness of mounting surface: max. 20mm

● black

○ white

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

IP		lm		Prod. no.	GBP	
IP 20/ IP 65*	2700K	460lm	38°	**1007406**	**60.00**	
	3000K	500lm	38°	**1007408**	**59.00**	
IP 20/ IP 65*	2700K	530lm	38°	**1007405**	**60.00**	
	3000K	570lm	38°	**1007407**	**60.00**	

*IP65 room side

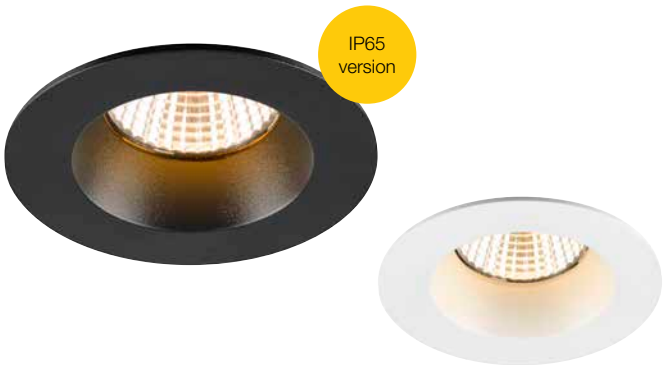

IP		lm		Prod. no.	GBP	
IP 20	2700K	705lm	38°	**1007402**	**55.00**	
	3000K	750lm	38°	**1007404**	**55.00**	
IP 20	2700K	705lm	38°	**1007401**	**55.00**	
	3000K	750lm	38°	**1007403**	**55.00**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA® 68
DL, DTW, PHASE

DIM TO WARM

1

● black

○ white

2

● black



○ white

1



2



220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

- Material thickness of mounting surface: max. 20mm

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	GBP	
IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007424**	**60.00**	
			60°	**1007426**	**60.00**	
IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007423**	**60.00**	
			60°	**1007425**	**60.00**	
IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007428**	**60.00**	
			60°	**1007430**	**60.00**	
IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007427**	**60.00**	
			60°	**1007429**	**60.00**	

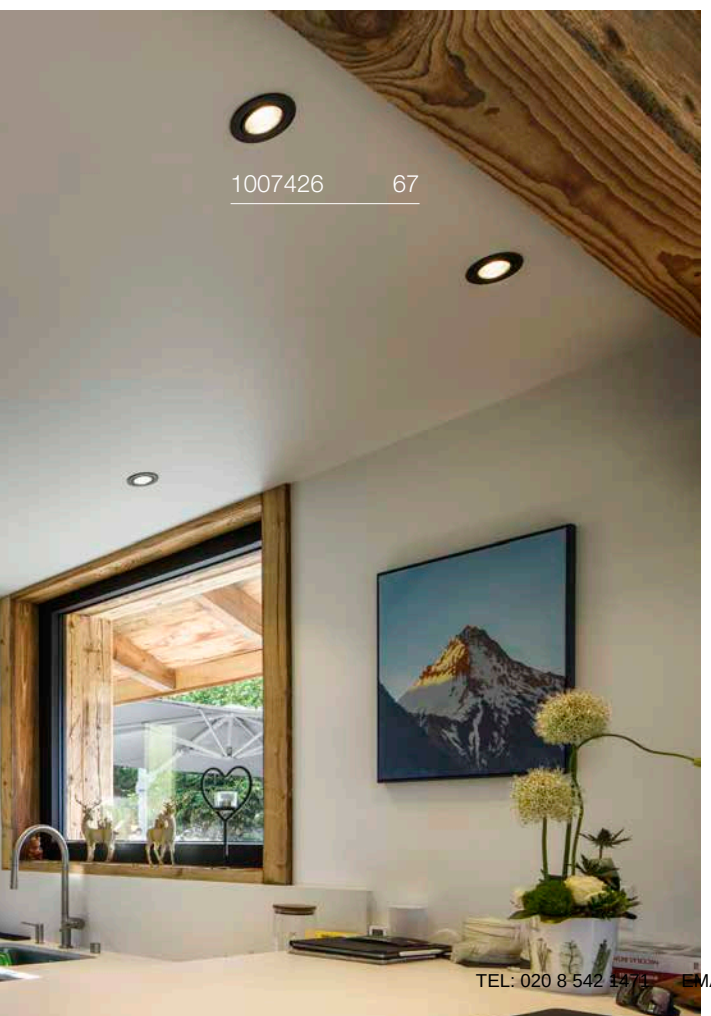

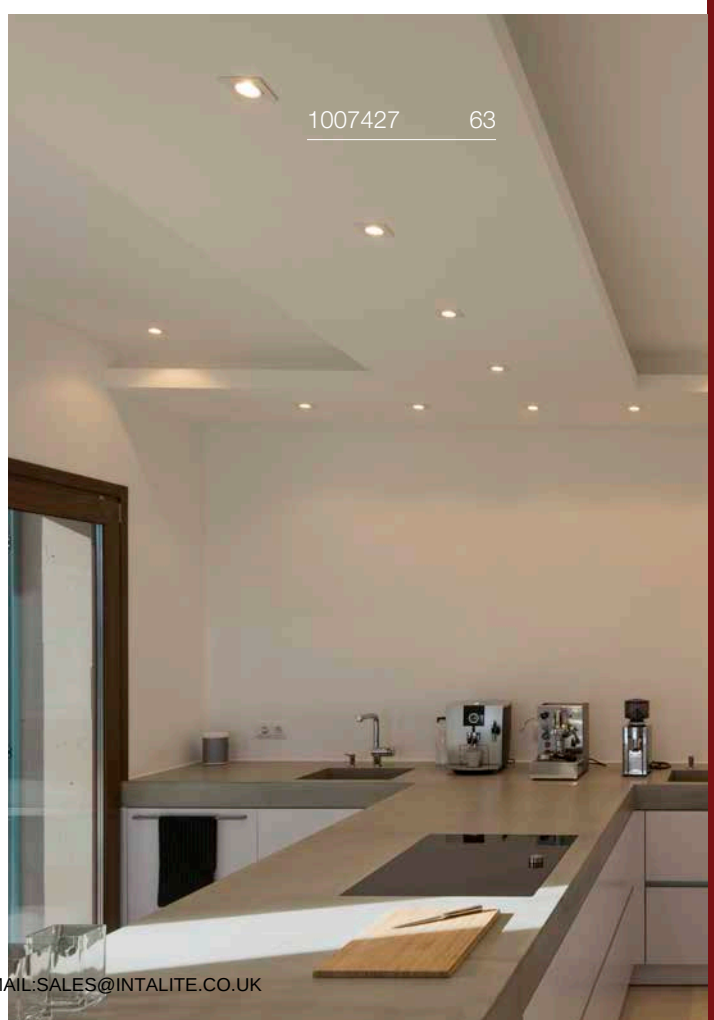

NEW TRIA®
UNIVERSAL 68
DL, PHASE

1



2



3



IP20 50.000h L80B10 INSIDE

220-240 V ~50/60 Hz | 100-180 mA
Total wattage: 8.6 W
Material: aluminium

- Material thickness of mounting surface: max. 20mm

1

● black

○ white

2

● black



○ white

3

● black

○ white

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

	IP				Prod. no.	GBP	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007434**	**77.00**	
				60°	**1007436**	**77.00**	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007433**	**77.00**	
				60°	**1007435**	**77.00**	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007438**	**77.00**	
				60°	**1007440**	**77.00**	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007437**	**77.00**	
				60°	**1007439**	**77.00**	
–	IP 20 IP 65*	2500 K 3000 K 4000 K	370 lm 410 lm 410 lm	38°	**1007442**	**85.00**	
–	IP 20 IP 65*	2500 K 3000 K 4000 K	370 lm 410 lm 410 lm	38°	**1007441**	**85.00**	

*IP65 room side

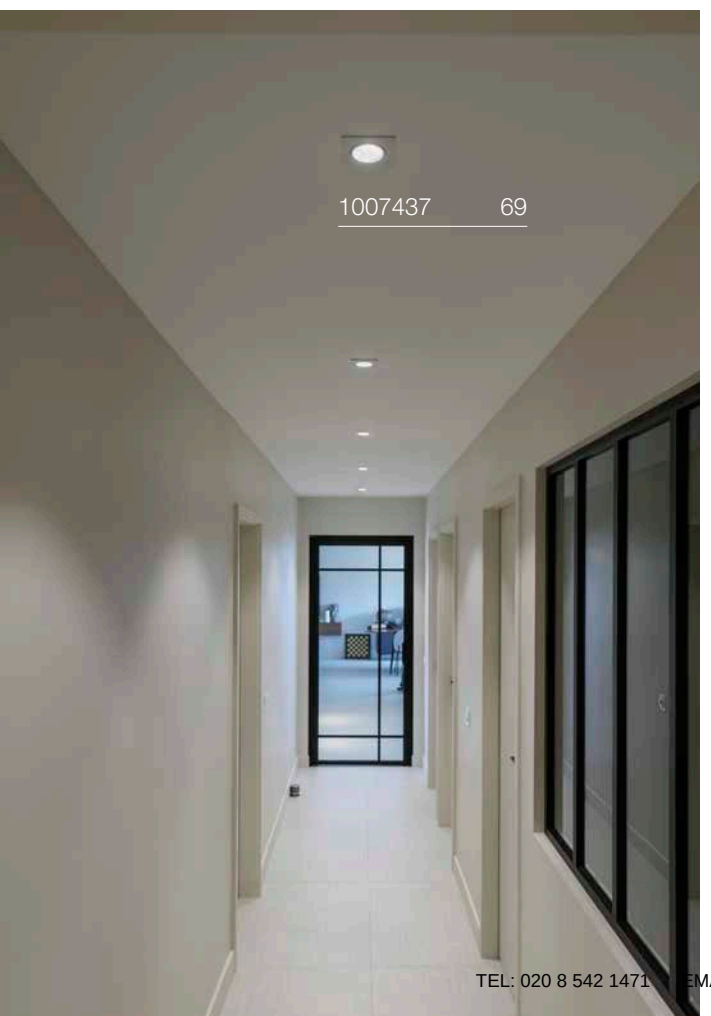

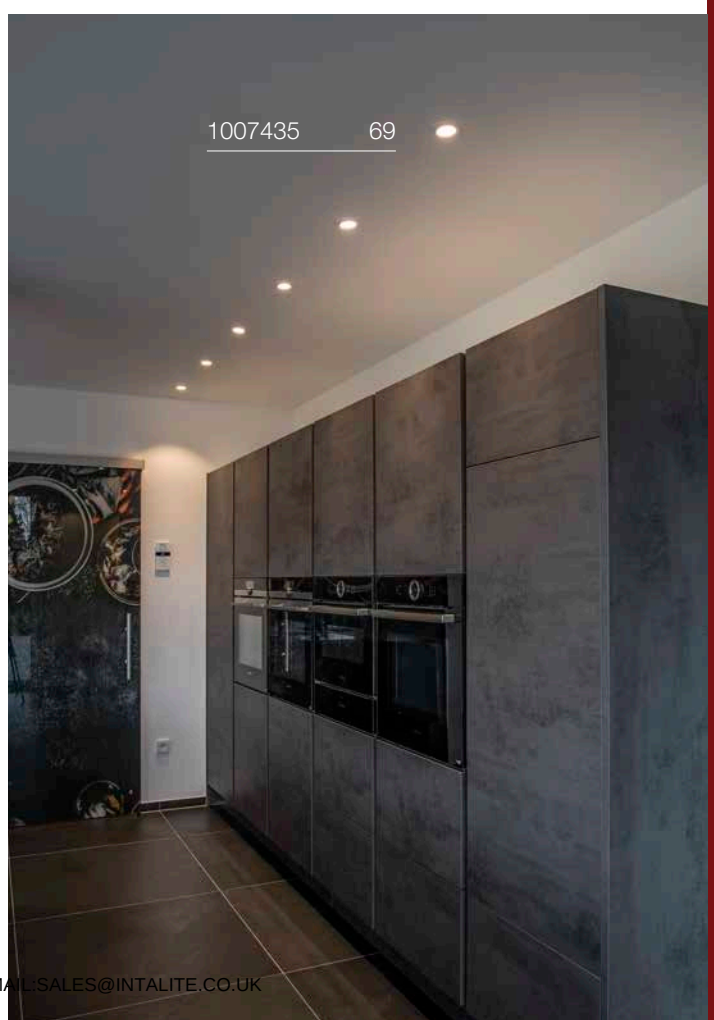

NEW TRIA® 68
DL, PHASE, AIRTIGHT



C,L | IP20/IP23 | IK02 | 20° | L80B10 | UGR 22 | LED INSIDE | CRI 90

220-240 V ~50/60 Hz | 180 mA
Total wattage: 7.5 W
Material: aluminium/PC

• Meets the requirements of RE2020

● black

○ white

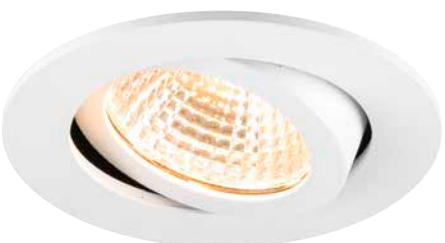

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

						Prod. no.	GBP	
20°	IP 20/IP 23	2700 K	591 lm	36°	22	1009021	46.00	
		3000 K	621 lm			1009023	46.00	
20°	IP 20/IP 23	2700 K	591 lm	36°	22	1009020	46.00	
		3000 K	621 lm			1009022	46.00	

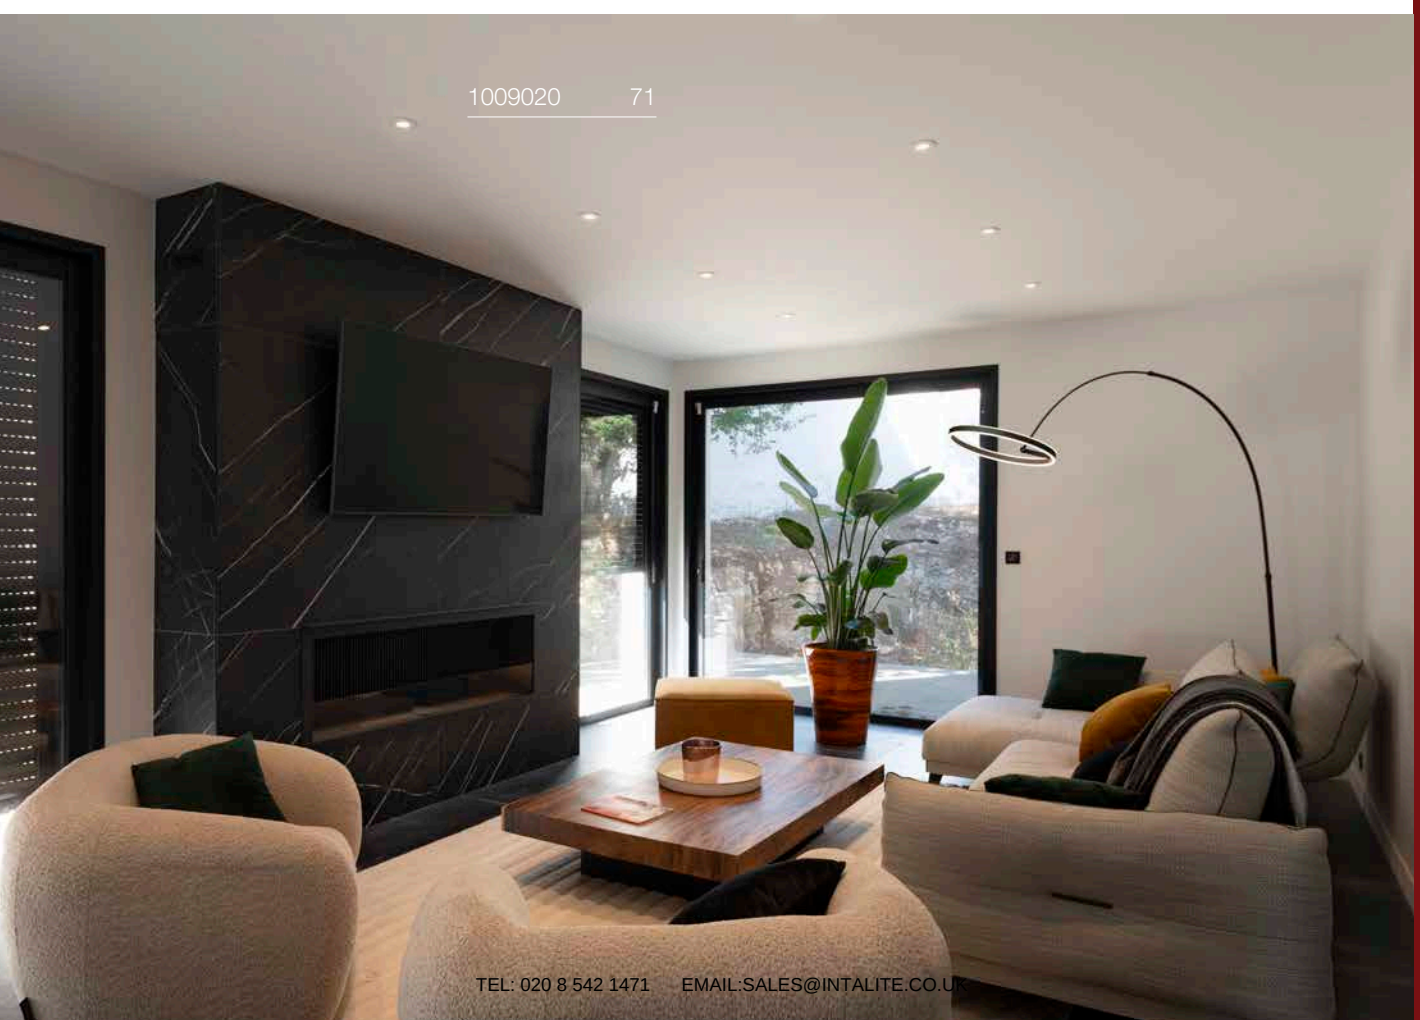

NEW TRIA® 68
DL, QPAR51

1

- black

- white

- aluminium

2

- black



- white

- aluminium

1



2



220-240 V ~50/60 Hz
Material: aluminium

- Material thickness of mounting surface: max. 20mm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

	IP		Prod. no.	GBP	
	IP 20	Base: 1xGU10	**1007369**	**18.00**	
	IP 20	Base: 1xGU10	**1007368**	**18.00**	
	IP 20	Base: 1xGU10	**1007370**	**23.00**	
	IP 20	Base: 1xGU10	**1007372**	**18.00**	
	IP 20	Base: 1xGU10	**1007371**	**18.00**	
	IP 20	Base: 1xGU10	**1007373**	**23.00**	

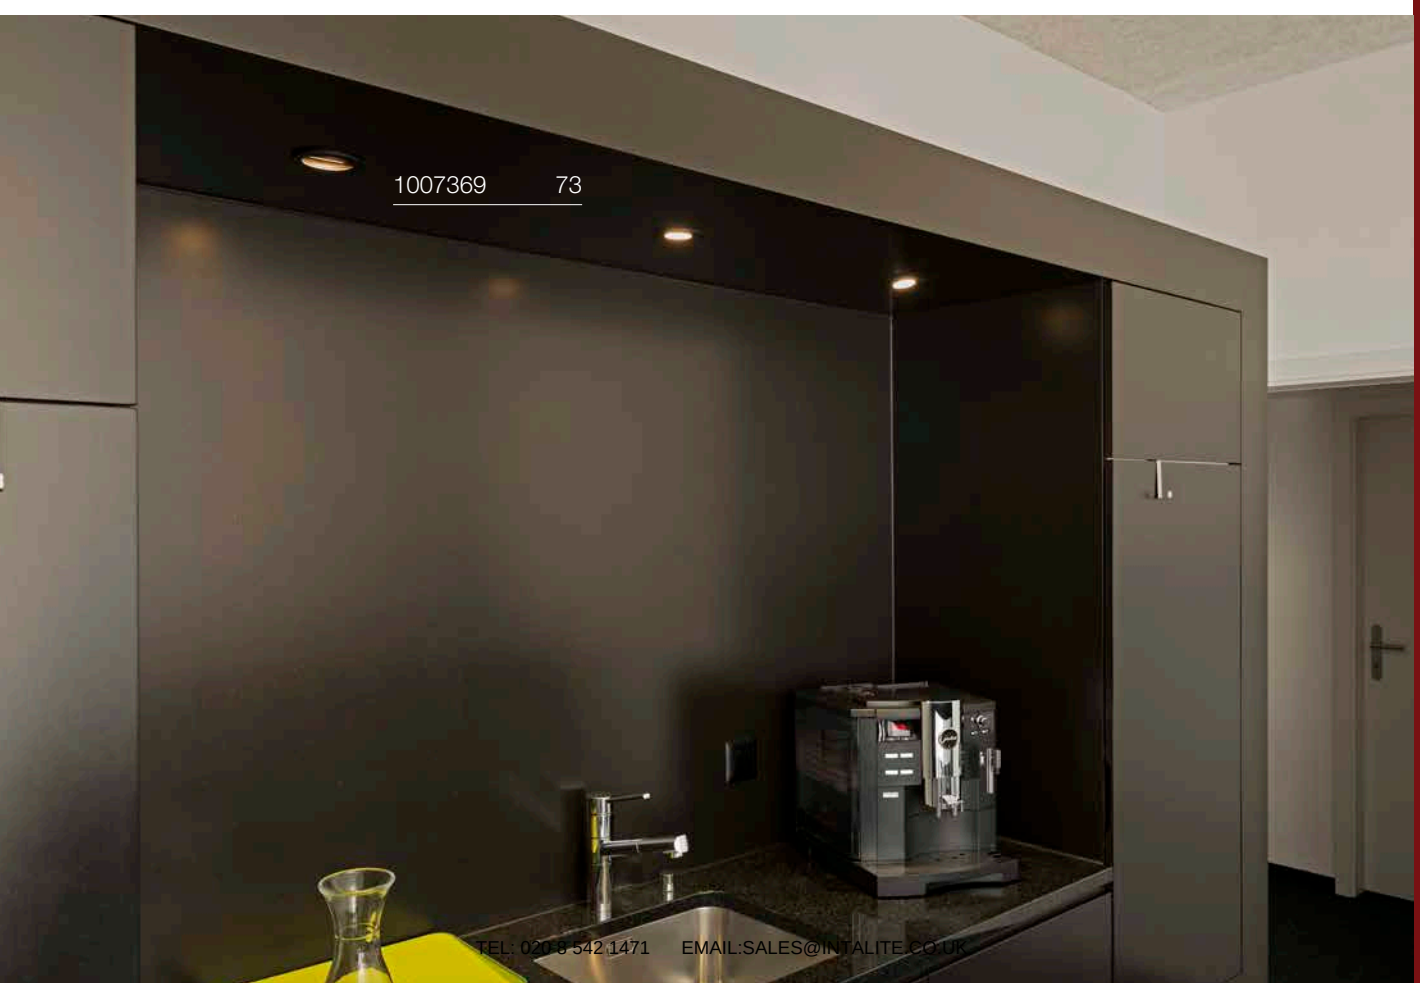

NEW TRIA® 75 / XL
DL, QPAR51

1



2



3



4



220-240 V ~50/60 Hz
Material: aluminium

- Material thickness of mounting surface: max. 20mm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: **1005077** **7.00 GBP**

1

- ● black
- ○ white
- ● aluminium

2

- ● black
- ○ white
- ● aluminium

3

- ● black, XL
- ○ white, XL
- ● aluminium, XL

4

- ● black, XL
- ○ white, XL
- ● aluminium, XL

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

IP		Prod. no.	GBP	
IP 20	Base: 1xGU10	**1007375**	**23.00**	
IP 20	Base: 1xGU10	**1007374**	**23.00**	
IP 20	Base: 1xGU10	**1007376**	**26.00**	
IP 20	Base: 1xGU10	**1007378**	**23.00**	
IP 20	Base: 1xGU10	**1007377**	**23.00**	
IP 20	Base: 1xGU10	**1007379**	**26.00**	

IP 20	Base: 1xGU10	**1007625**	**27.00**	
IP 20	Base: 1xGU10	**1007624**	**27.00**	
IP 20	Base: 1xGU10	**1007626**	**30.00**	
IP 20	Base: 1xGU10	**1007628**	**27.00**	
IP 20	Base: 1xGU10	**1007627**	**27.00**	
IP 20	Base: 1xGU10	**1007629**	**30.00**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA® 45
DL, round

UPDATE



220-240 V ~50/60 Hz | 350 mA
Total wattage: 4 W
Material: aluminium

Down	360 lm	2700 K 3000 K

Options	Prod. no.	GBP
● black 2700 K	1009003	43.00
● black 3000 K	1009005	43.00
○ white 2700 K	1009002	43.00
○ white 3000 K	1009004	43.00

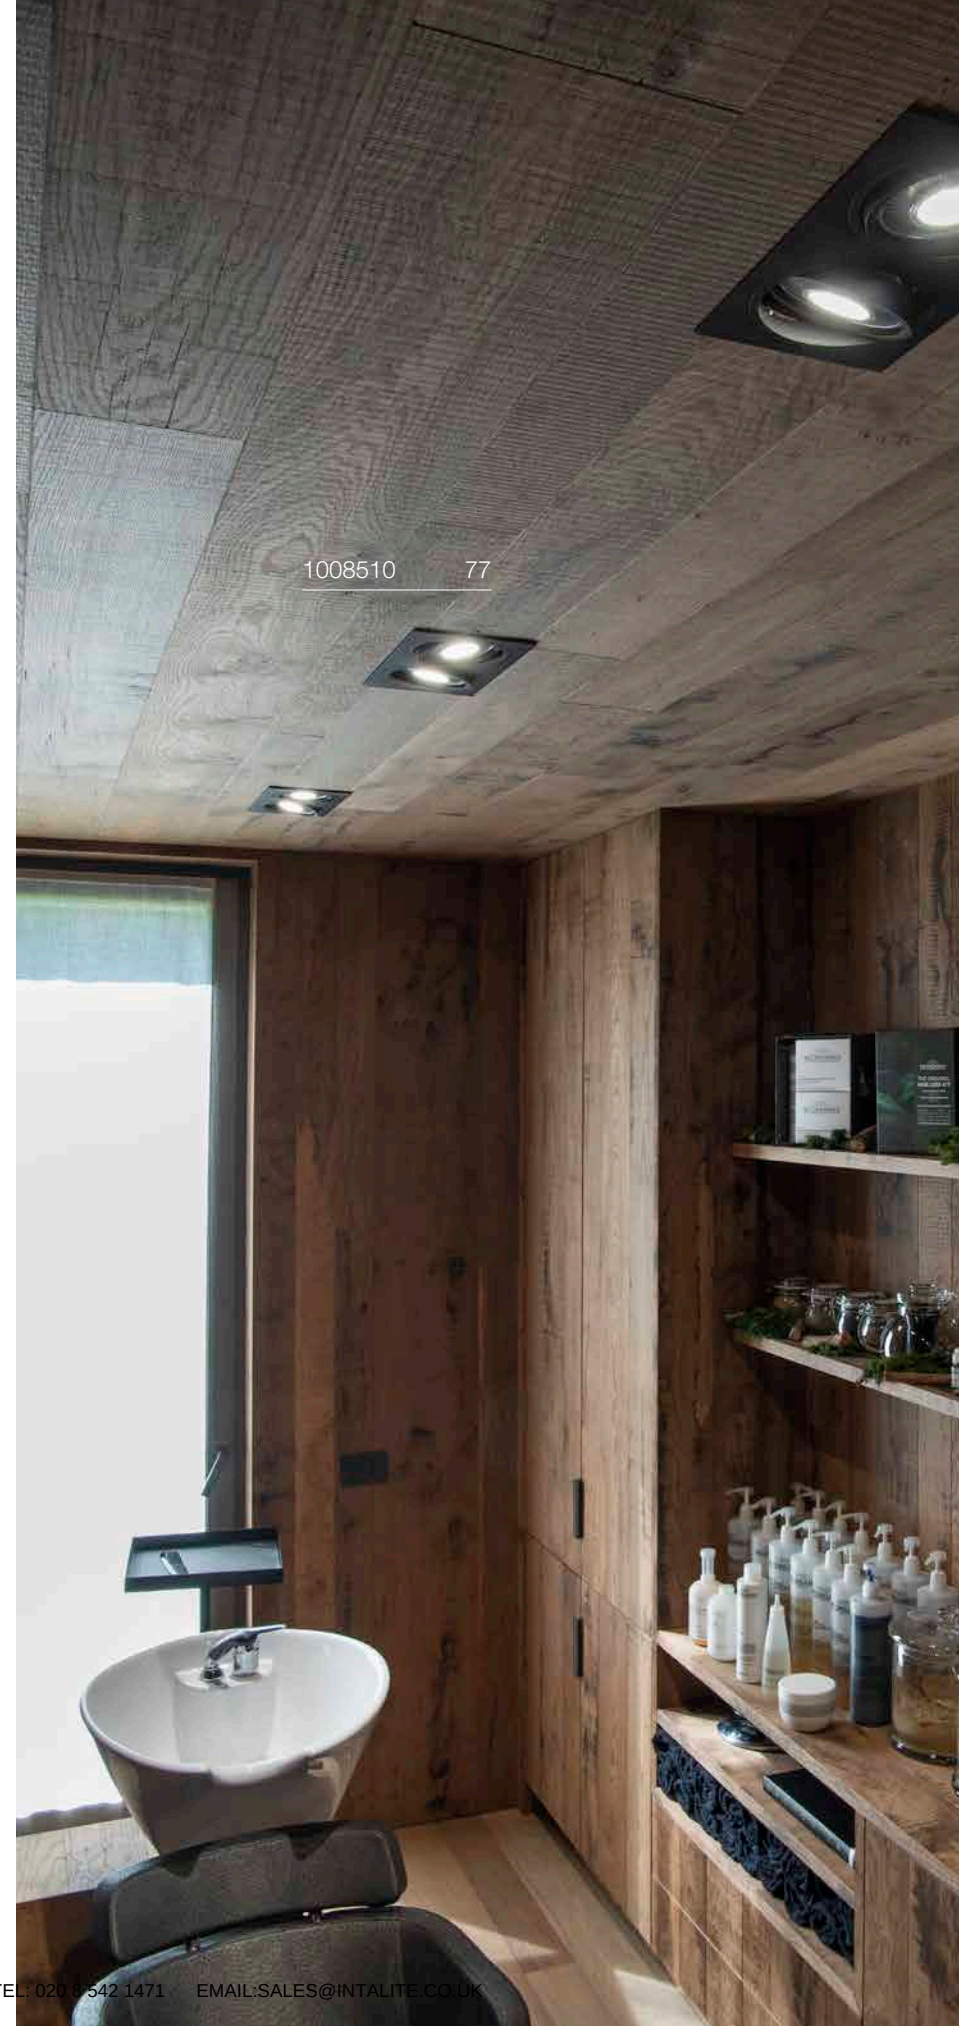

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA® 155
DL, double, QPAR51

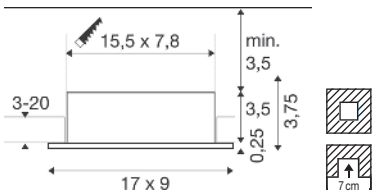

IP20 30°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 2xGU10

Options	Prod. no.	GBP
● black	**1008510**	**40.00**
○ white	**1008509**	**40.00**

NEW TRIA® 155
DL, double

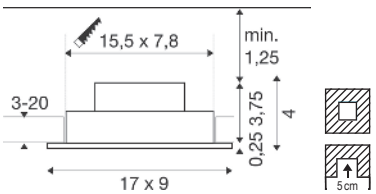

C,L IP20 38° 30° 50000h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 13.6 W
Material: aluminium

LED INSIDE CRI 90

Down	1220 lm	2700 K
	1280 lm	3000 K

Options	Prod. no.	GBP
● black 2700 K	**1008512**	**94.00**
● black 3000 K	**1008514**	**94.00**
○ white 2700 K	**1008511**	**94.00**
○ white 3000 K	**1008513**	**94.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

COMBINE OTHER ITEMS FROM THE FOLLOWING PAGES

GU10 base or LED module

+

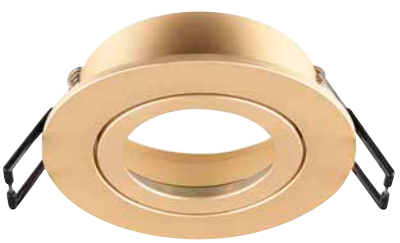

Mounting ring available in black, white, pink gold and aluminium

=

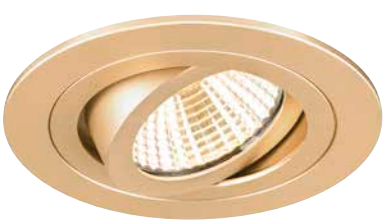

GU10
LED CONNECTION BOX
with base, max. 10 W



IP20

220-240 V ~50/60 Hz
Material: plastic



SOCKET INSIDE 10 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**1007283**	**6.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kWh/1000 h

C,L

Prod. no.: **1005080** **7.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA®
DL, LED module, PHASE

220-240 V ~50/60 Hz | 200 mA
Total wattage: 8.3 W
Material: aluminium



705 lm | 2700 K
750 lm | 3000 K

Options	Prod. no.	GBP
● black 2700 K | 38°	**1007381**	**39.00**
● black 2700 K | 60°	**1007382**	**39.00**
● black 3000 K | 38°	**1007383**	**39.00**
● black 3000 K | 60°	**1007384**	**39.00**

NEW TRIA®
DL, LED module, DTW, PHASE

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium



70 lm | 1800 K – 700 lm | 3000 K

Options	Prod. no.	GBP
● black 38°	**1007421**	**49.00**
● black 60°	**1007422**	**49.00**

NEW TRIA® UNIVERSAL
DL, LED module, PHASE

220-240 V ~50/60 Hz | 100 - 180 mA
Total wattage: 8.6 W
Material: aluminium



540 lm | 2500 K | 600 lm | 3000 K | 600 lm | 4000 K

Options	Prod. no.	GBP
● black 38°	**1007431**	**66.00**
● black 60°	**1007432**	**66.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA® 68
Ring, round, GU10/LED modules

IP20

Ø: 8.2 cm
H: 2.6 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20mm

Options	Prod. no.	GBP
● black	**1007332**	**13.00**
○ white	**1007333**	**13.00**
● aluminium	**1007335**	**18.00**
● pink gold	**1007334**	**22.00**

NEW TRIA® 68
Ring, square, GU10/LED modules

IP20

L: 8.2 cm
W: 8.20 cm
H: 2.6 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Options	Prod. no.	GBP
● black	**1007329**	**13.00**
○ white	**1007328**	**13.00**
● aluminium	**1007330**	**18.00**
● pink gold	**1007331**	**22.00**

NEW TRIA® 68
Ring, round, GU10/LED modules

IP20

Ø: 8.2 cm
H: 4.4 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20mm

Options	Prod. no.	GBP
● black	**1007451**	**14.00**
○ white	**1007453**	**14.00**

NEW TRIA® 68
Ring, round, GU10/LED modules

IP65

Ø: 8.2 cm
H: 3.4 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20mm

Options	Prod. no.	GBP
● black	**1007345**	**22.00**
○ white	**1007346**	**22.00**

NEW TRIA® 68
Ring, square, GU10/LED modules

IP65

L: 8.2 cm
W: 8.20 cm
H: 3.4 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20mm

Options	Prod. no.	GBP
● black	**1007347**	**22.00**
○ white	**1007348**	**22.00**

NEW TRIA® 68
Ring, round, GU10/LED modules

IP65

Ø: 8.3 cm
H: 3.55 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Options	Prod. no.	GBP
● black	**1007336**	**31.00**
○ white	**1007337**	**31.00**

NEW TRIA® 68
Ring, square, GU10/LED modules

IP65

L: 8.3 cm
W: 8.30 cm
H: 3.55 cm
Material: aluminium

- Installation diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Options	Prod. no.	GBP
● black	**1007338**	**31.00**
○ white	**1007339**	**31.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA® 75
Ring, round, GU10/LED modules

IP20

Ø: 9.3 cm
H: 2.6 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20mm

Options	Prod. no.	GBP
● black	**1007343**	**18.00**
○ white	**1007342**	**18.00**
aluminium	**1007351**	**21.00**
pink gold	**1007344**	**25.00**

NEW TRIA® 75
Ring, square, GU10/LED modules

IP20

L: 9 cm
W: 9.00 cm
H: 2.6 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20mm

Options	Prod. no.	GBP
● black	**1007340**	**18.00**
○ white	**1007349**	**18.00**
aluminium	**1007350**	**21.00**
pink gold	**1007341**	**25.00**

NEW TRIA® 75
Ring, round, GU10/LED modules

IP20

Ø: 8.2 cm
H: 4.9 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20mm

Options	Prod. no.	GBP
● black	**1007449**	**17.00**
○ white	**1007450**	**17.00**

NEW TRIA® 75
Ring, round, GU10/LED modules

IP20

Ø: 8.2 cm
H: 4.3 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20mm

Options	Prod. no.	GBP
● black	**1007488**	**13.00**
○ white	**1007489**	**13.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA® 75 XL
Ring, round, GU10/LED modules

IP20

Ø: 11 cm
H: 2.6 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Options	Prod. no.	GBP
● black	**1007631**	**22.00**
○ white	**1007630**	**22.00**
● aluminium	**1007632**	**25.00**
● pink gold	**1007633**	**30.00**

NEW TRIA® 75 XL
Ring, square, GU10/LED modules

IP20

L: 11 cm
W: 11.00 cm
H: 2.6 cm
Material: aluminium

- Installation diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Options	Prod. no.	GBP
● black	**1007635**	**22.00**
○ white	**1007634**	**22.00**
● aluminium	**1007636**	**25.00**
● pink gold	**1007637**	**30.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CREATE YOUR NEW TRIA 95 DOWNLIGHT

LED module

+

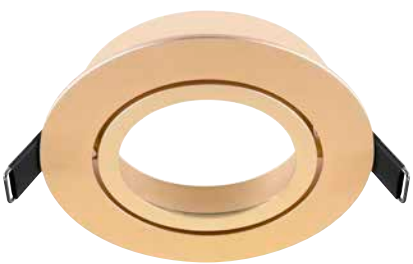

Version-95 mounting rings available in black, white, pink gold and aluminium

=

1007412 + 1007444 82

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA®
DL, LED module, PHASE

C,L IP20 50000h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 13.3 W
Material: aluminium



LED INSIDE CRI 90

1130 lm | 2700 K
1200 lm | 3000 K

Options	Prod. no.	GBP
● black 2700 K | 38°	**1007409**	**81.00**
● black 3000 K | 38°	**1007410**	**81.00**
● black 3000 K | 60°	**1007412**	**82.00**
○ white 2700 K | 60°	**1007411**	**81.00**

NEW TRIA® 95
Ring, round, LED modules

IP20

Ø: 11 cm
H: 2.6 cm
Material: aluminium

- installation diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Options	Prod. no.	GBP
● black	**1007444**	**26.00**
○ white	**1007443**	**26.00**
● aluminium	**1007445**	**30.00**
● pink gold	**1007447**	**35.00**

NEW TRIA® 95
Ring, round, LED modules

IP20

Ø: 10.3 cm
H: 5.5 cm
Material: aluminium

- installation diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Options	Prod. no.	GBP
● black	**1007452**	**26.00**
○ white	**1007454**	**26.00**

NEW TRIA® 95
Ring, square, LED modules

IP20

L: 11 cm
W: 11.00 cm
H: 2.6 cm
Material: aluminium

- installation diameter: 95 mm
- Material thickness of mounting surface: max. 20mm

Options	Prod. no.	GBP
● black	**1007446**	**26.00**
○ white	**1007448**	**26.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA®
DL, double LED module, PHASE

220-240 V ~50/60 Hz | 350 mA
Total wattage: 13.6 W
Material: aluminium



1220 lm | 2700 K | 1280 lm | 3000 K

Options	Prod. no.	GBP
● black 2700 K	**1008005**	**65.00**
● black 3000 K	**1008006**	**65.00**

NEW TRIA® 155
Ring, double, square GU10/LED modules

L: 17 cm
W: 9.00 cm
H: 3.75 cm
Material: aluminium

• Spring clips

Options	Prod. no.	GBP
● black	**1008007**	**32.00**
○ white	**1008008**	**32.00**
◍ aluminium	**1008009**	**32.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CONFIGURE YOUR NEW TRIA®

For greater flexibility, the NEW TRIA® offers the option of configuring customised sets from the modular system in addition to the existing sets. Simply choose the right options and benefit from rapid installation.

CHOOSE YOUR PREFERRED MOUNTING RING ...

1. Installation diameter: 68, 75, 95 mm
2. Pivoting, rotating and pivoting, IP65
3. Colour
   black, white, pink gold or aluminium
4. round or square

CHOOSE YOUR PREFERRED MODULE...

5. Colour temperature
   2700 K or 3000 K, 1800 – 3000 K or CCT 2500 / 3000 / 4000 K
6. Beam angle
   38° / 60°

DONE!

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

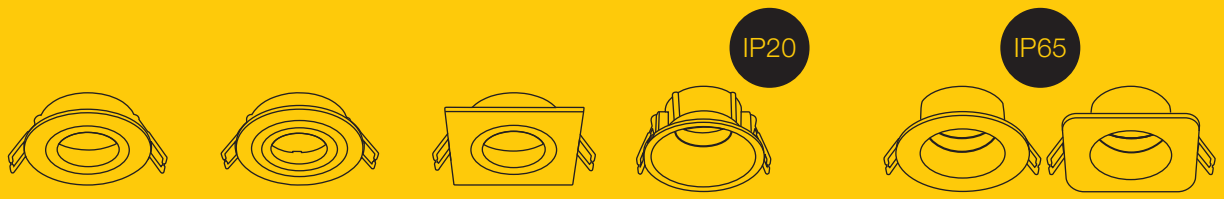

Mounting ring

Available as a pivoting, rotating and pivoting, or IP65 version with 68, 75 or 95 mm installation diameter

Available in black, white, pink gold or aluminium

Available in round or square design

GU10 LED MODULE LED MODULE

NEW TRIA® 68 **NEW TRIA® 75** **NEW TRIA® 95**

Colour temperature
2700 / 3000 K, DTW 1800 – 3000K or multi CCT

Beam angle
38° / 60°

Colour temperature
2700 / 3000 K

Beam angle
38° / 60°

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

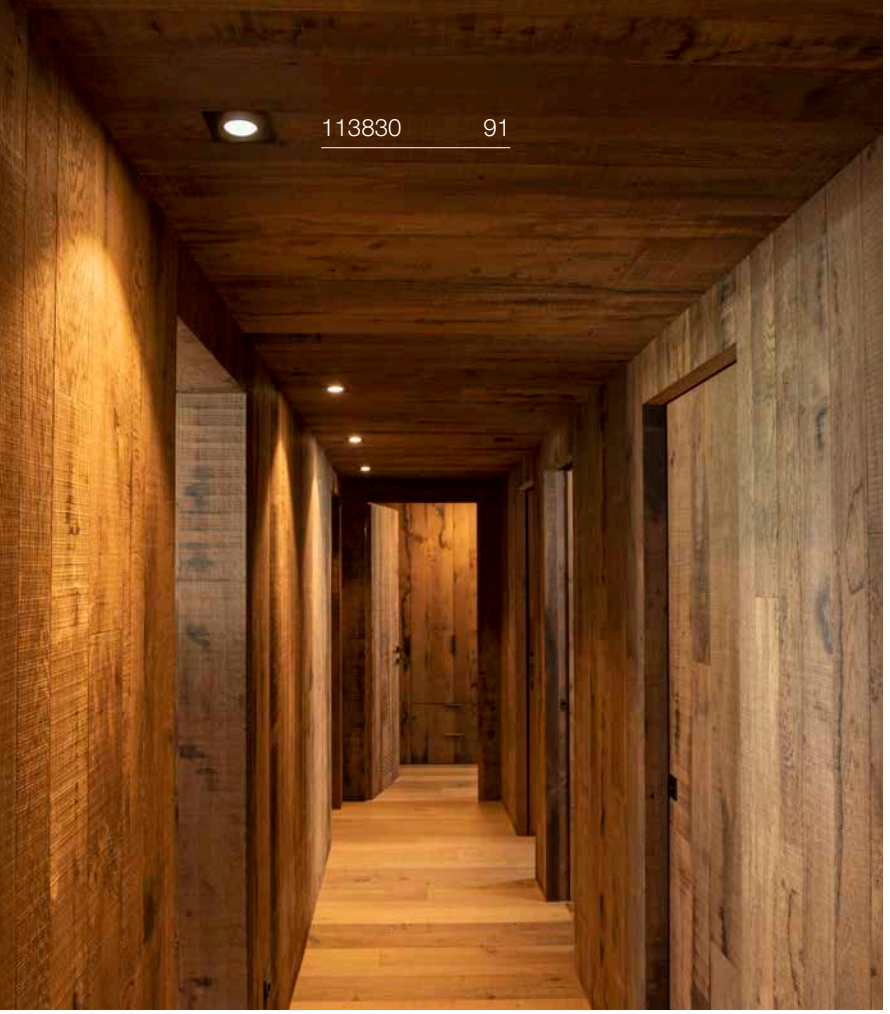

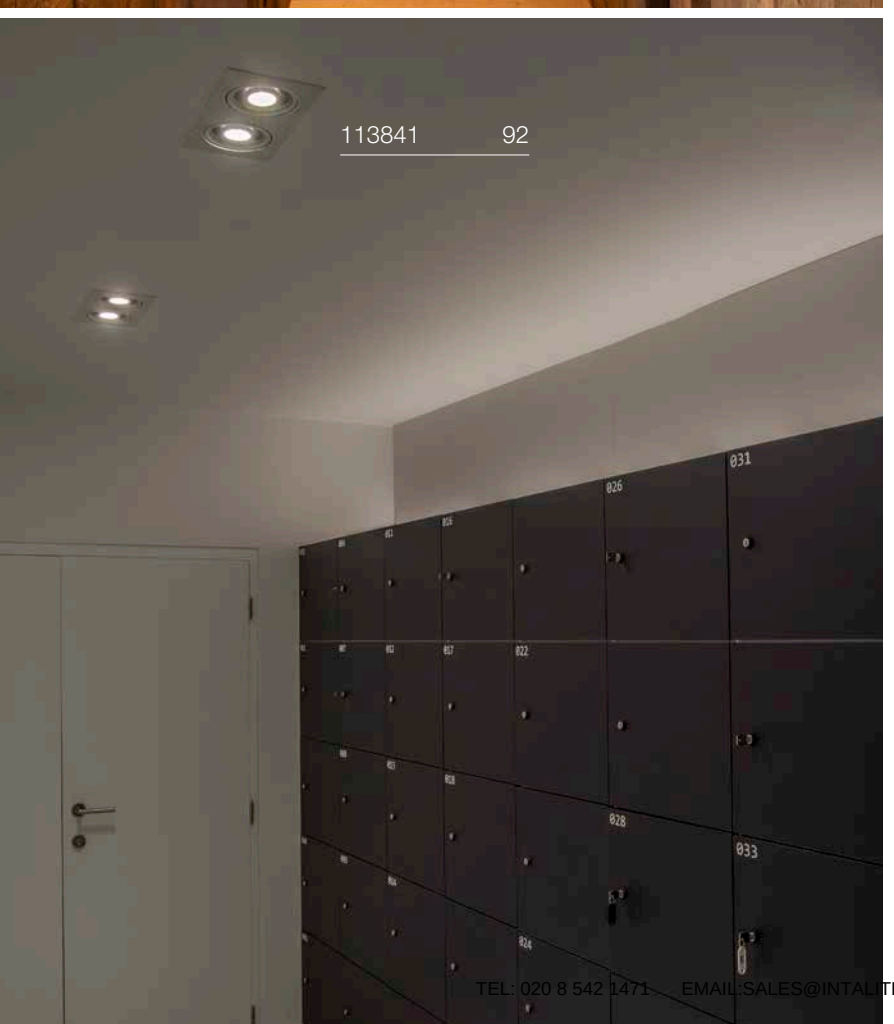

NEW TRIA® 150
DL, round, QPAR111



220-240 V ~50/60 Hz
Material: aluminium

- Leaf springs
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**113550**	**45.00**
○ white	**113540**	**45.00**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G
12 kWh/1000 h

Prod. no.: **1005297** **73.00 GBP**

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: **1010467** **50.00 GBP**

NEW TRIA® 300
DL, square, QPAR111



IP20 360° 30°

220-240 V ~50/60 Hz
Material: aluminium

- Leaf springs
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	113830	45.00
○ white	113541	45.00

GU10 | 8 W | 38°
680 lm | 2700 K | EEC = F
8 kWh/1000 h

C,L

Prod. no.: 1005274 26.00 GBP

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: 1010467 50.00 GBP

NEW TRIA®
DL, Double, QPAR111



IP20 360° 30°

220-240 V ~50/60 Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE 75 W

Base: 2xGU10

Options	Prod. no.	GBP
● black	113840	90.00
○ white	113841	90.00
● aluminium	111382	99.00

GU10 | 13 W | 10°
900 lm | 2700 K | EEC = G
13 kWh/1000 h

C

Prod. no.: 1005275 48.00 GBP

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: 1010467 50.00 GBP

GLENOS® PRO
RL, 1,2 m, DALI, UGR19

NEW



Dali Touch IP20 IK02 75° 50000 h L80B10 UGR 19 30

220-240 V ~0/50/60 Hz | 750 mA
Total wattage: 30 W
Material: aluminium/plastic PC

LED INSIDE CRI 90

3650 lm | 3000 K | 3900 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	1010522	390.00
● black 4000 K	1010524	390.00
◐ white/black 3000 K	1010521	390.00
◐ white/black 4000 K	1010523	390.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® 30
RL, frame

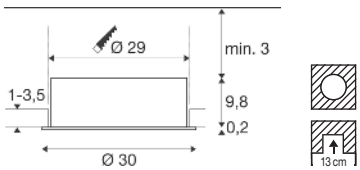

IP20 | 70° | 50 000 h L80B10 | UGR 19

250 mA
Total wattage: 8 W
Material: steel

- BEG-eligible
- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	1150 lm | 3000 K	1200 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1008629**	**137.00**

Product	Prod. no.	GBP
LED driver 10 W | 180-270 mA PHASE		
○ white	**1008660**	**28.00**
LED driver 15 W | 100-700 mA DALI		
○ white	**1008666**	**61.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670** ●	**0.70**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671** ●	**2.00**
Strain relief for DALI dimmable drivers, standard		
○ white	**1008672**	**0.70**
Strain relief for DALI dimmable drivers, through-wirable		
○ white	**1008673**	**2.00**
LED driver 21 W | 150-500 mA		
○ white	**1008699** ●	**20.00**

MEDO® 40
RL, frame

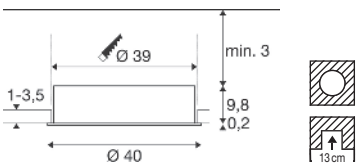

IP20 | 80° | 50 000 h L80B10 | UGR 19

500 mA
Total wattage: 16 W
Material: aluminium

- BEG-eligible
- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	2350 lm | 3000 K	2450 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1008631**	**171.00**

Product	Prod. no.	GBP
LED driver 20 W | 350-500 mA PHASE		
○ white	**1008663**	**40.00**
LED driver 23 W | 100-700 mA DALI		
○ white	**1008667**	**66.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670** ●	**0.70**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671** ●	**2.00**
Strain relief for DALI dimmable drivers, standard		
○ white	**1008672**	**0.70**
Strain relief for DALI dimmable drivers, through-wirable		
○ white	**1008673**	**2.00**
LED driver 21 W | 150-500 mA		
○ white	**1008699** ●	**20.00**

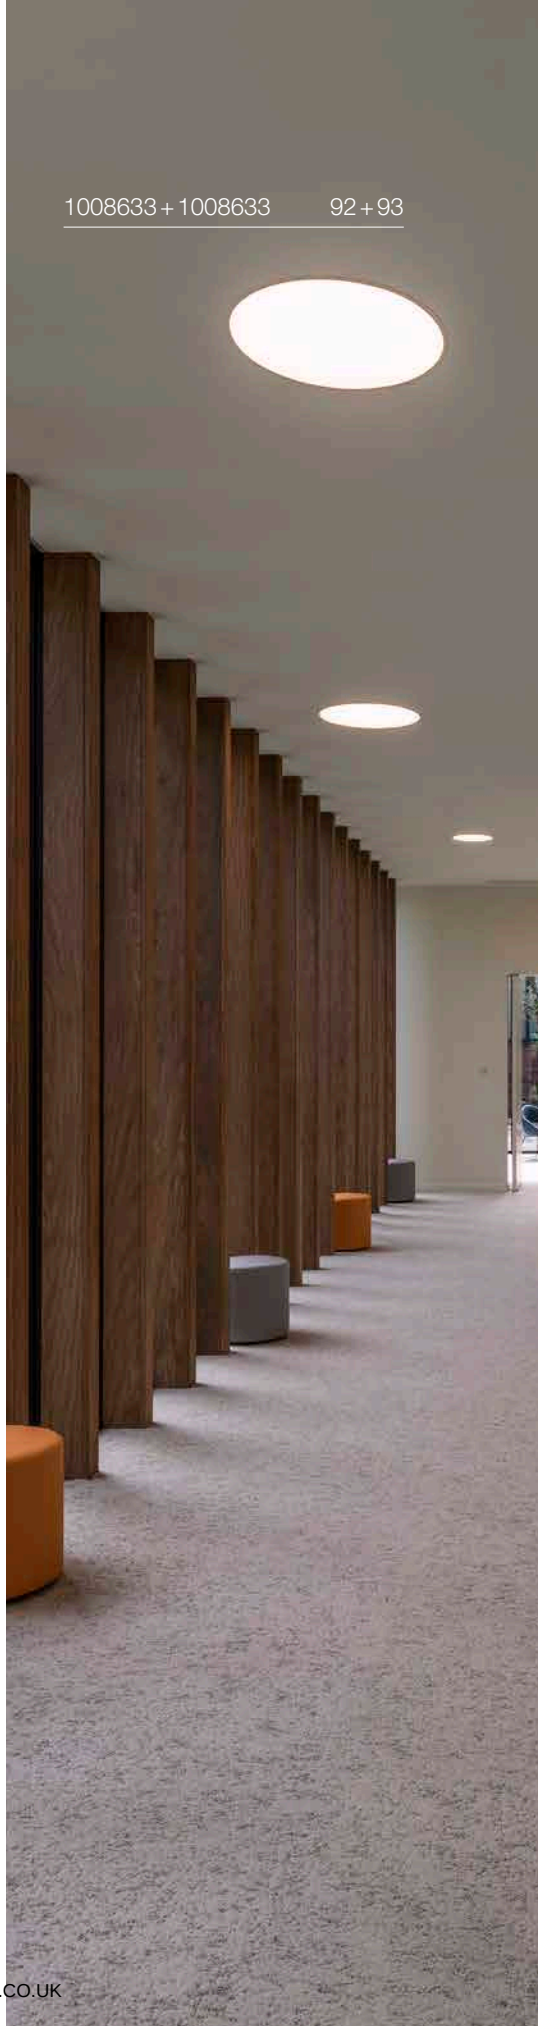

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

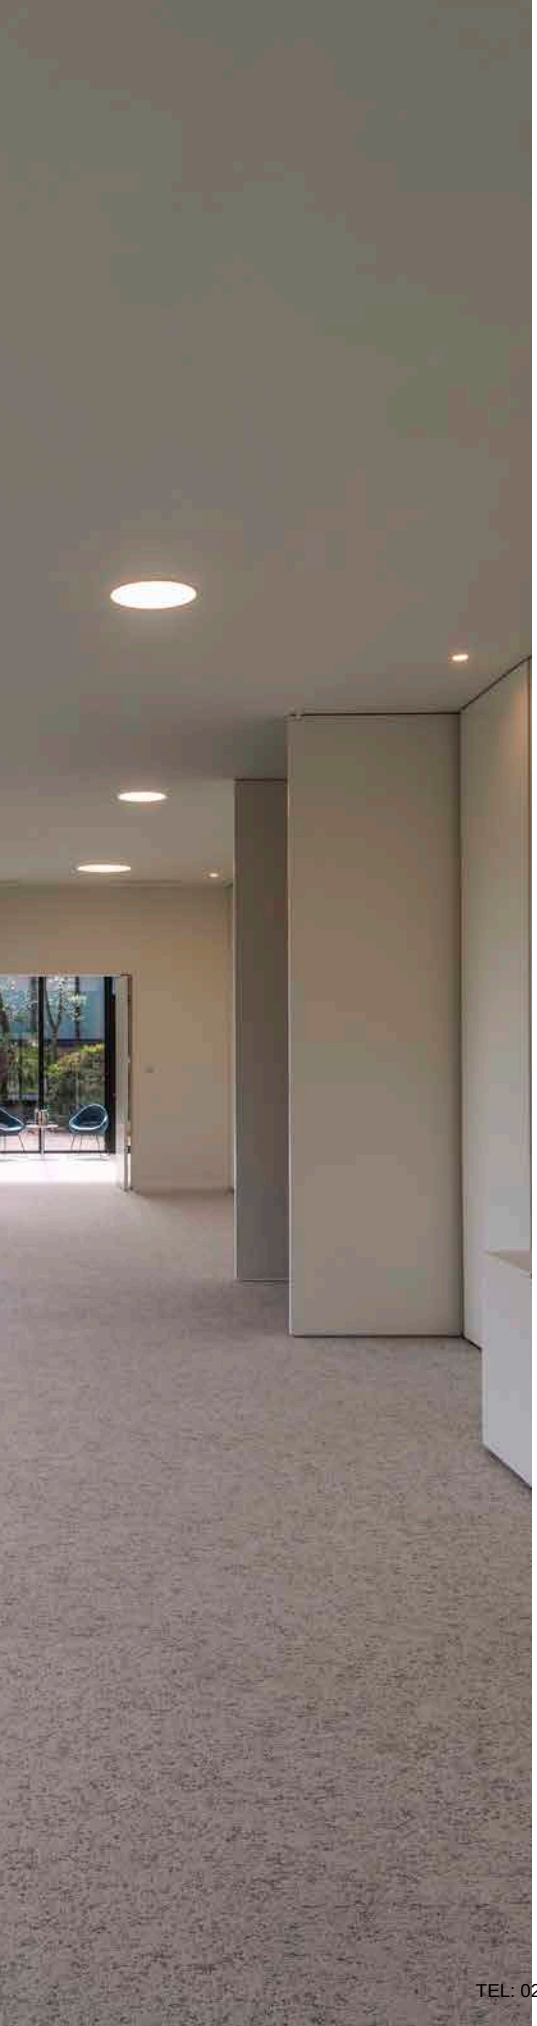

MEDO® 60
RL, frame

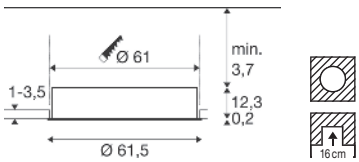

IP20 | 80° | 50000 h L80B10 | UGR 19

1000 mA
Total wattage: 33 W
Material: aluminium

- BEG-eligible
- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	4600 lm	3000 K	4600 lm	4000 K

Options	Prod. no.	GBP
○ white	**1008633**	**386.00**

⊕

Product	Prod. no.	GBP
LED driver 40 W | 700-1050 mA PHASE		
○ white	**1008665**	**49.00**
LED driver 53 W | 650-1400 mA DALI		
○ white	**1008669**	**79.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670** ●	**0.70**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671** ●	**2.00**
Strain relief for DALI dimmable driver 1008669, standard		
○ white	**1008674**	**0.70**
LED driver 44 W | 700-1050 mA		
○ white	**1008701**	**29.00**
Strain relief for DALI dimmable driver 1008669, through-wirable		
○ white	**1008702**	**2.00**

MEDO® 90
RL, frame

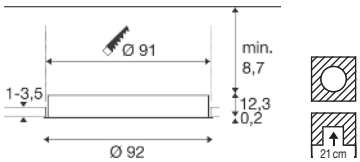

IP20 | 80° | 50000 h L80B10 | UGR 19

2 x 1000 mA
Total wattage: 66 W
Material: aluminium

- BEG-eligible
- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	9200 lm	3000 K	9500 lm	4000 K

Options	Prod. no.	GBP
○ white	**1008635**	**773.00**

⊕

Product	Prod. no.	GBP
LED driver 40 W | 700-1050 mA PHASE		
○ white	**1008665**	**49.00**
LED driver 53 W | 650-1400 mA DALI		
○ white	**1008669**	**79.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670** ●	**0.70**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671** ●	**2.00**
Strain relief for driver 1008669, standard		
○ white	**1008674**	**0.70**
LED driver 44 W | 700-1050 mA		
○ white	**1008701**	**29.00**
Strain relief for driver 1008669, through-wirable		
○ white	**1008702**	**2.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® 30
RL, frameless

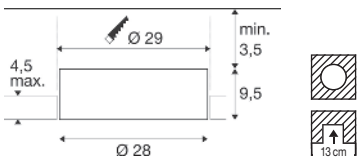

IP20 | 70° | 50 000 h L80B10 | UGR 19

250 mA
Total wattage: 8 W
Material: aluminium

- BEG-eligible
- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	1150 lm	3000 K	1200 lm	4000 K

Options	Prod. no.	GBP
○ white	**1008630**	**137.00**

Product	Prod. no.	GBP
LED driver 10 W | 180-270 mA PHASE		
○ white	**1008660**	**28.00**
LED driver 15 W | 100-700 mA DALI		
○ white	**1008666**	**61.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670** ●	**0.70**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671** ●	**2.00**
Strain relief for DALI dimmable drivers, standard		
○ white	**1008672**	**0.70**
Strain relief for DALI dimmable drivers, through-wirable		
○ white	**1008673**	**2.00**
LED driver 21 W | 150-500 mA		
○ white	**1008699** ●	**20.00**

MEDO® 40
RL, frameless

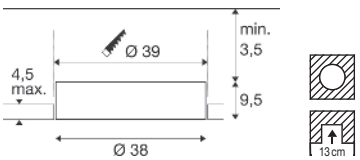

IP20 | 80° | 50 000 h L80B10 | UGR 19

500 mA
Total wattage: 16 W
Material: aluminium

- BEG-eligible
- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	2350 lm	3000 K	2450 lm	4000 K

Options	Prod. no.	GBP
○ white	**1008632**	**171.00**

Product	Prod. no.	GBP
LED driver 20 W | 350-500 mA PHASE		
○ white	**1008663**	**40.00**
LED driver 23 W | 100-700 mA DALI		
○ white	**1008667**	**66.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670** ●	**0.70**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671** ●	**2.00**
Strain relief for DALI dimmable drivers, standard		
○ white	**1008672**	**0.70**
Strain relief for DALI dimmable drivers, through-wirable		
○ white	**1008673**	**2.00**
LED driver 21 W | 150-500 mA		
○ white	**1008699** ●	**20.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

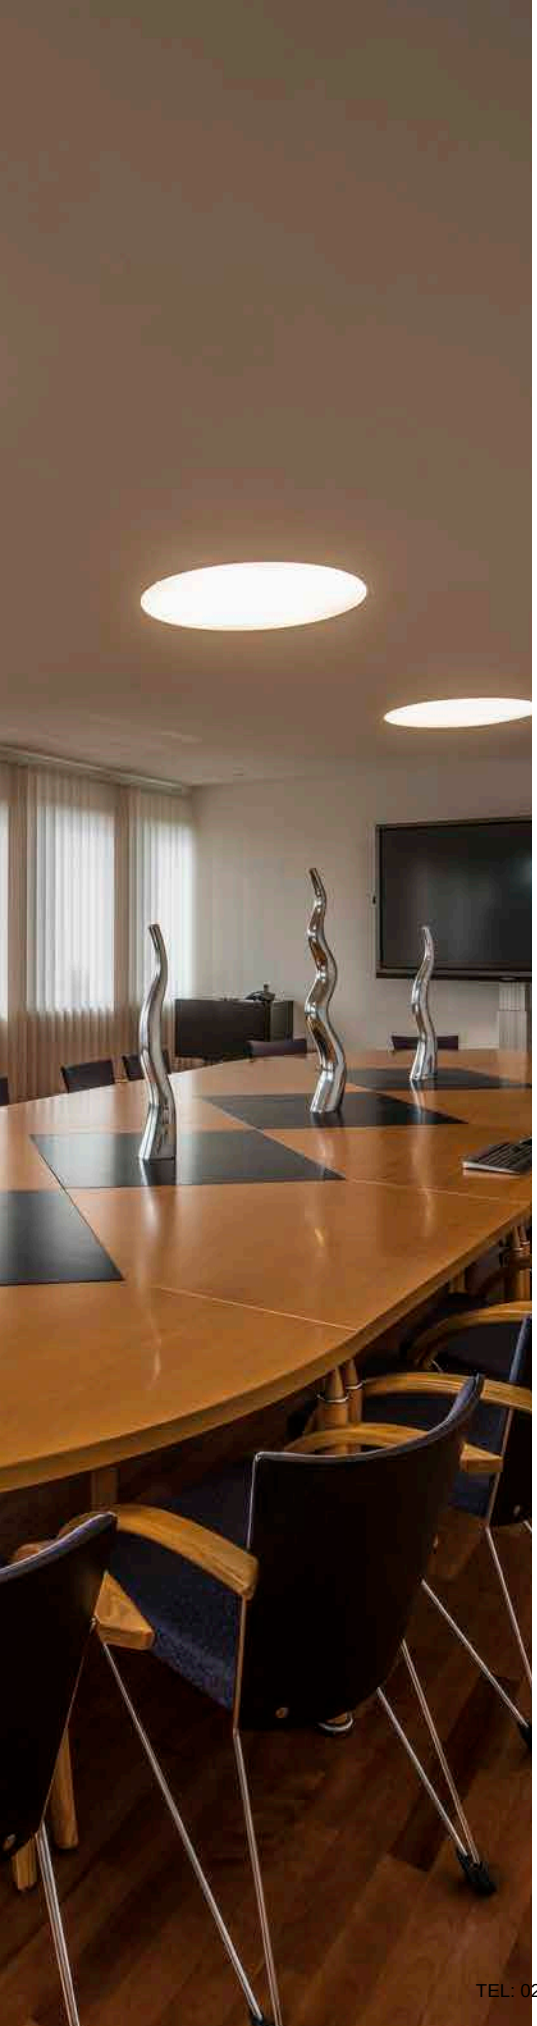

MEDO® 60
RL, frameless

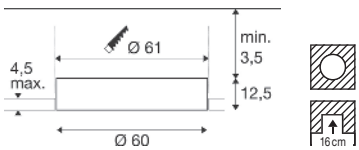

IP20 | 80° | 50000 h L80B10 | UGR 19

1000 mA
Total wattage: 33 W
Material: aluminium

- BEG-eligible
- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	4600 lm	3000 K	4600 lm	4000 K

Options	Prod. no.	GBP
○ white	**1008634**	**386.00**

⊕

Product	Prod. no.	GBP
LED driver 40 W | 700-1050 mA PHASE		
○ white	**1008665**	**49.00**
LED driver 53 W | 650-1400 mA DALI		
○ white	**1008669**	**79.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670** ●	**0.70**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671** ●	**2.00**
Strain relief for DALI dimmable driver 1008669, standard		
○ white	**1008674**	**0.70**
LED driver 44 W | 700-1050 mA		
○ white	**1008701**	**29.00**
Strain relief for DALI dimmable driver 1008669, through-wirable		
○ white	**1008702**	**2.00**

MEDO® 90
RL, frameless

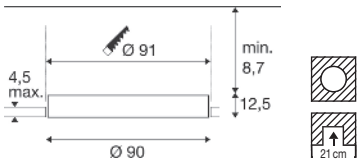

IP20 | 80° | 50000 h L80B10 | UGR 19

2 x 1000 mA
Total wattage: 66 W
Material: aluminium

- BEG-eligible
- Material thickness of mounting surface: max. 45 mm

LED INSIDE | CRI 90

Down	9200 lm	3000 K	9500 lm	4000 K

Options	Prod. no.	GBP
○ white	**1008636**	**773.00**

⊕

Product	Prod. no.	GBP
LED driver 40 W | 700-1050 mA PHASE		
○ white	**1008665**	**49.00**
LED driver 53 W | 650-1400 mA DALI		
○ white	**1008669**	**79.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670** ●	**0.70**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671** ●	**2.00**
Strain relief for driver 1008669, standard		
○ white	**1008674**	**0.70**
LED driver 44 W | 700-1050 mA		
○ white	**1008701**	**29.00**
Strain relief for driver 1008669, through-wirable		
○ white	**1008702**	**2.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

HORN MINI
EL



IP20 · 12° · 30000h L70B50 · UGR 19 · 50

350 mA
Power consumption: 1 W
Material: aluminium/polycarbonate (PC)

- Spring clips
- inc. AMP plug
- Different light colour with golden reflector
- Material thickness of mounting surface: max. 30 mm

LED INSIDE · CRI 90

		70 lm | 2900 K / 3000 K
Options	**Prod. no.**	**GBP**
black/gold 2900 K	**1000917**	**38.00**
black 3000 K	**1000915**	**35.00**
white 3000 K	**1000914**	**35.00**

Product	**Prod. no.**	**GBP**
LED driver 4 W 350 mA		
white	**1008656**	**16.00**

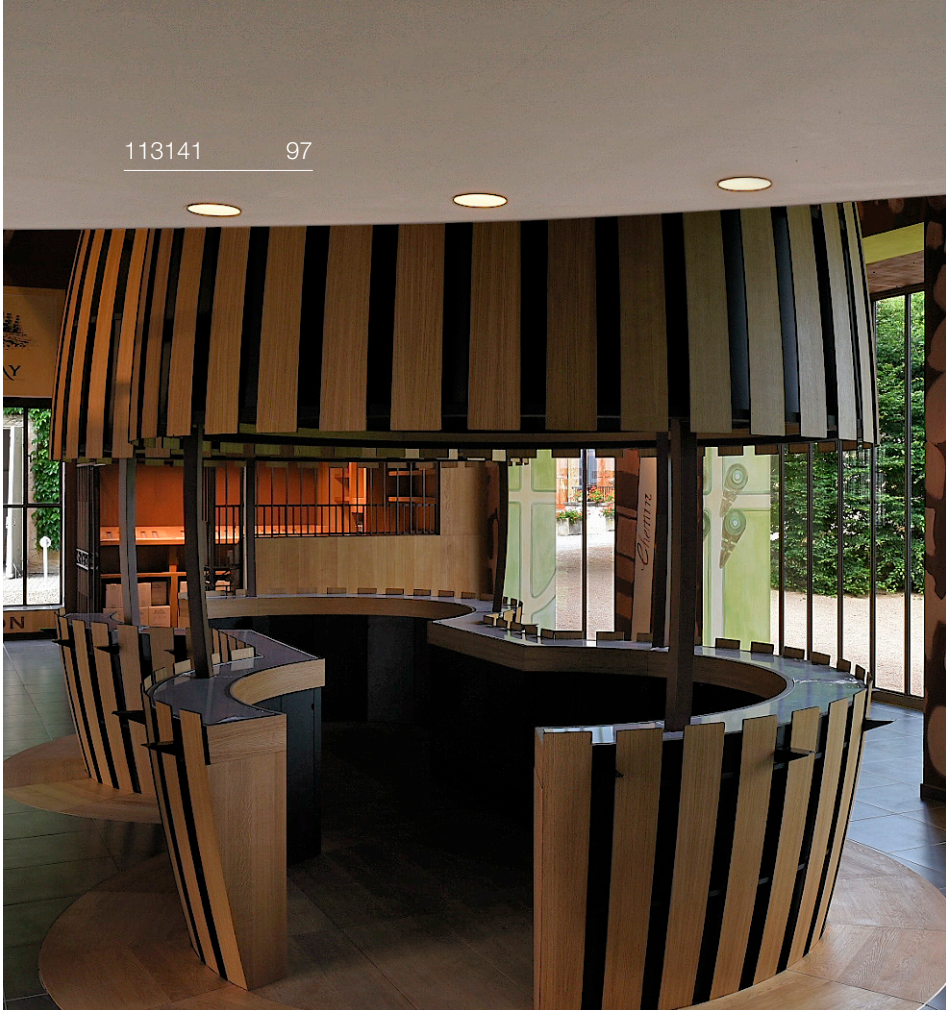

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

HORN
DL, single, QPAR51



IP20 | 30° | 20

220-240 V ~50/60 Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE | 25 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**113140**	**45.00**
○ white	**113141**	**45.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

HORN
DL, double, QPAR51



IP20 | 30° | 20

220-240 V ~50/60 Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE | 25 W

Base: 2xGU10

Options	Prod. no.	GBP
● black	**1006121**	**65.00**
○ white	**1006122**	**65.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

HORN
DL, single, asymmetrical, QPAR51



IP20/ IP44 | IK02 | 20

220-240 V ~50/60 Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE | 25 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**113150**	**49.00**
○ white	**113151**	**49.00**

| 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005076 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

HORN
DL, single, QPAR51



IP20/ IP44 · IK02 · 20

220-240 V ~50/60 Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25 mm

SOCKET INSIDE · 25 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**113160**	**45.00**
○ white	**113161**	**45.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

HORN 1
EL, single, QPAR51



IP20

220-240 V ~50/60 Hz
Material: steel

- Spring clips
- Material thickness of mounting surface: max. 45 mm

SOCKET INSIDE · 50 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.4 cm

Options	Prod. no.	GBP
● black	**112910**	**24.00**
○ white	**112911**	**24.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

HORN
DL, GU10, blower door tested



IP20/ IP44 · IK02

220-240 V ~50/60 Hz
Material: aluminium

- Spring clips
- The downlight meets the RT2012 standards.
- Material thickness of mounting surface: max. 25 mm

SOCKET INSIDE · 25 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**1005435**	**23.00**
○ white	**1005436**	**23.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

HORN T
EL, QPAR111



IP20 15°

220-240 V ~50/60 Hz
Material: steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**113170**	**60.00**
○ white	**113171**	**60.00**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G
12 kWh/1000 h

Prod. no.: **1005297** **73.00 GBP**

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: **1010470** **33.00 GBP**

HORN MAGNA
EL



IP20 25° 30000 h L70B50 3D

500 mA
Power consumption: 9 W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Different light colour with golden reflector
- open cable end
- Material thickness of mounting surface: max. 25 mm

LED INSIDE CRI 80

550 lm | 3000 K

Options	Prod. no.	GBP
●● black/gold 570 lm	**1002594**	**67.00**
● black 445 lm	**1002592**	**65.00**
○ white 550 lm	**1002591**	**65.00**

Product	Prod. no.	GBP
Honeycomb module		
● black	**1002596**	**4.00**
LED driver 21 W 500 mA including strain relief		
○ white	**1007226**	**26.00**
LED driver 20 W 350 mA / 500 mA Phase control dimmable including strain relief		
○ white	**1007227**	**35.00**
LED driver 20 W 150-700 mA DALI dimmable including strain relief		
○ white	**1007229**	**61.00**

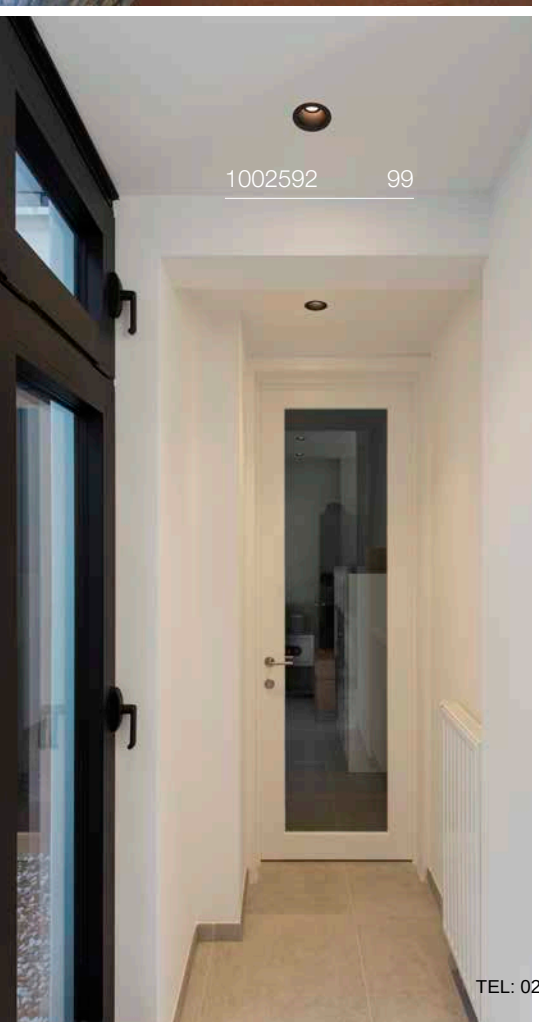

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

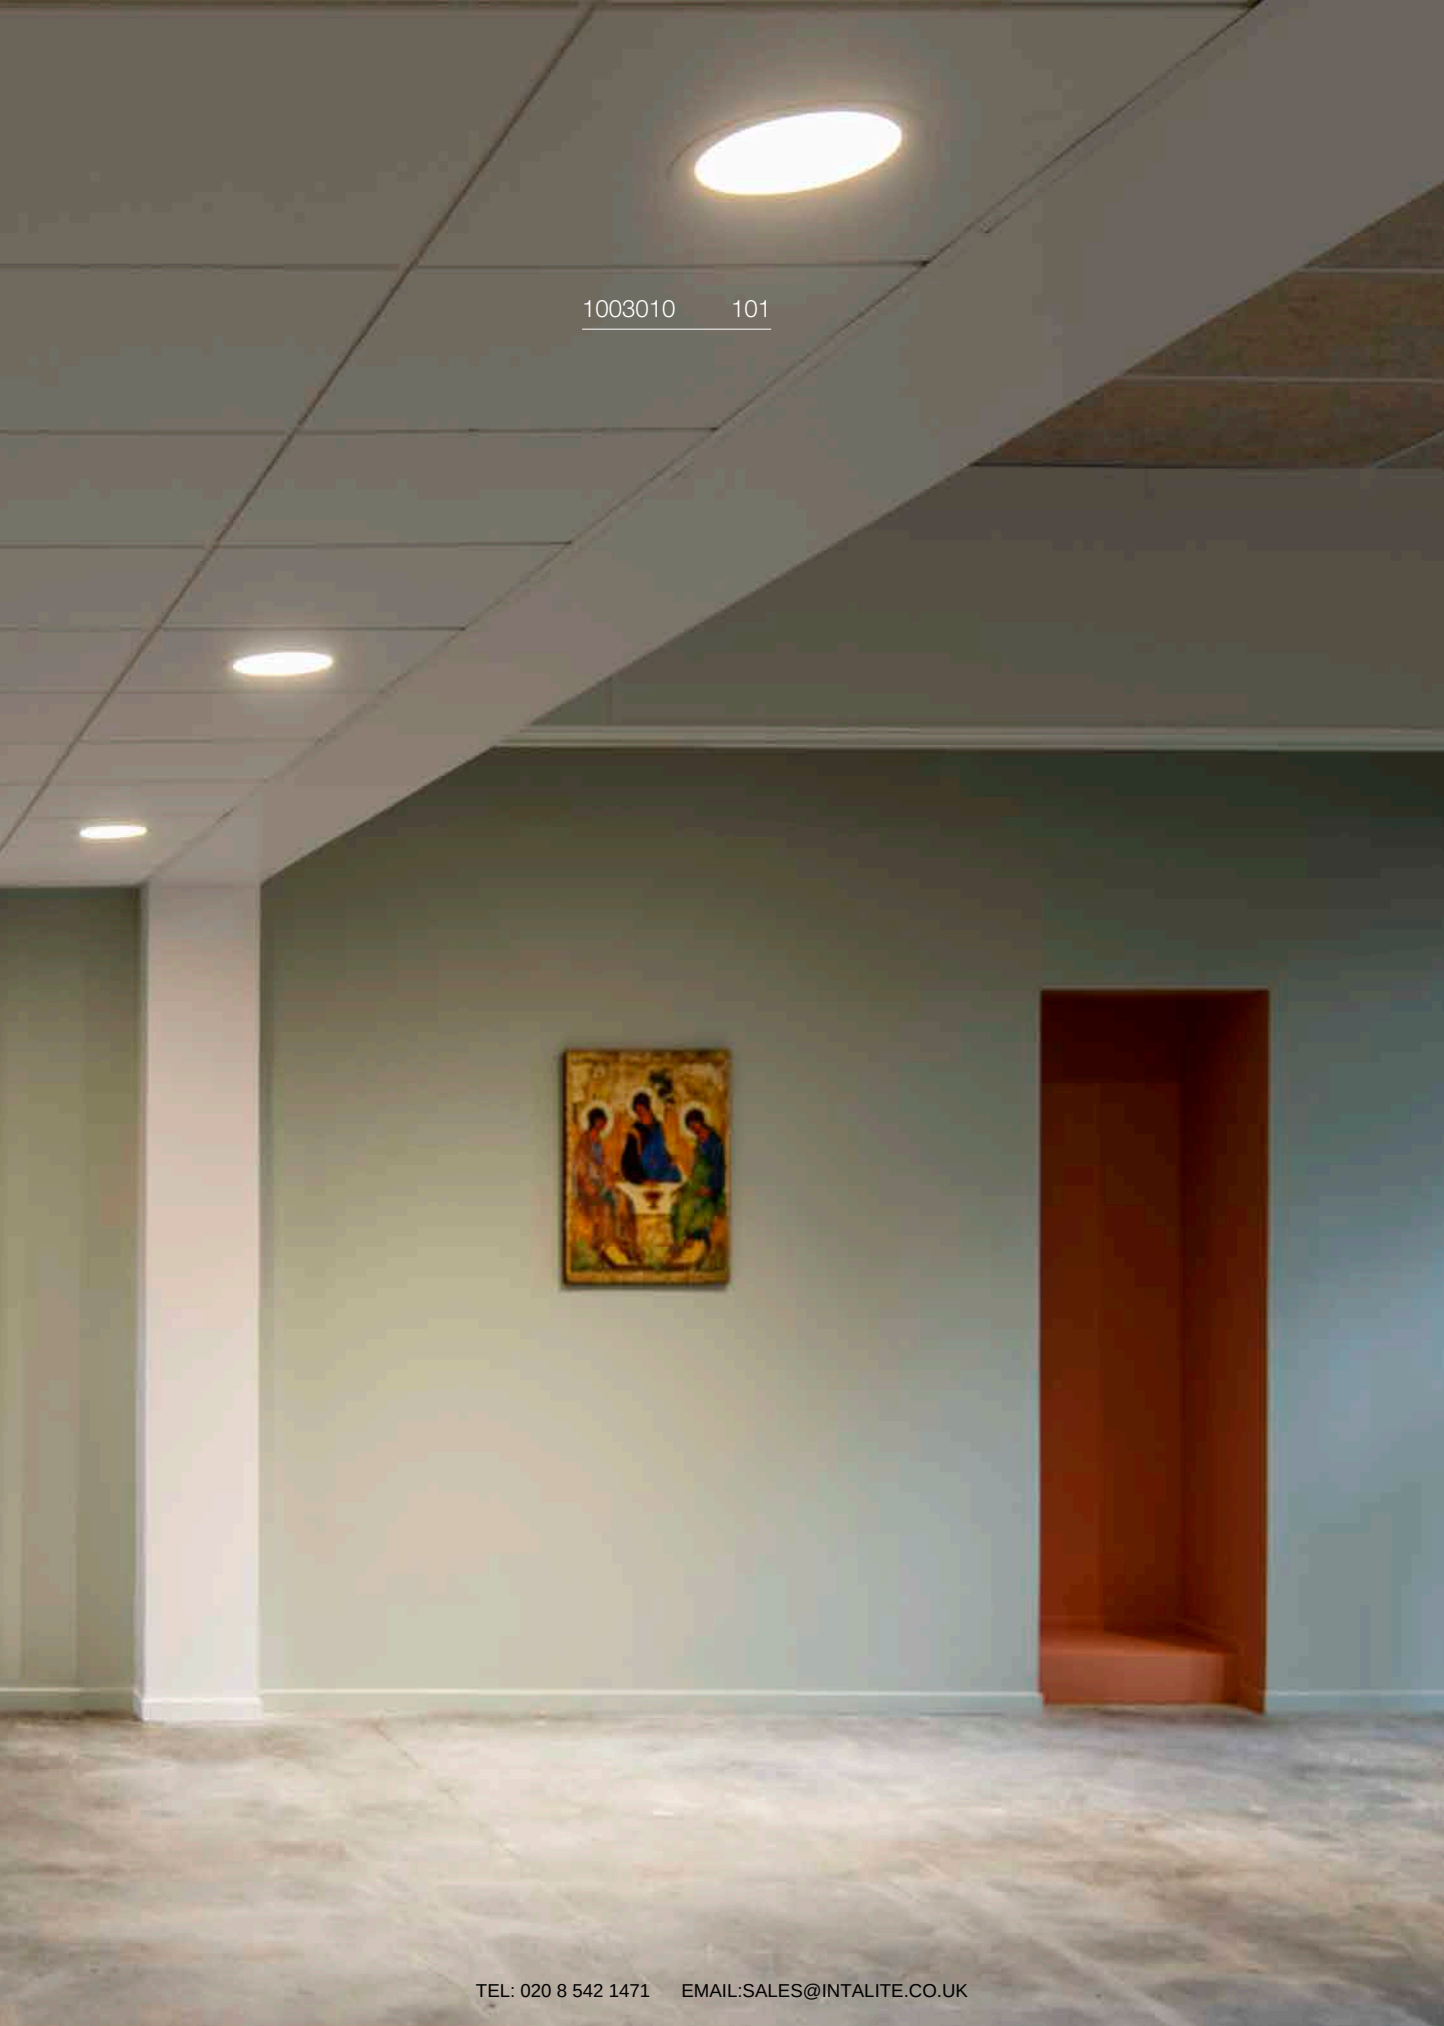

1003010 101

SENSER 12
EL, round



200 mA
Power consumption: 6.5 W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

450 lm | 3000 K	470 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	1003008	26.00
○ white 4000 K	1004694	26.00

⊕

Product	Prod. no.	GBP
LED driver 20 W 150-700 mA DALI dimmable including strain relief		
○ white	1007229	61.00

SENSER 18
EL, round



350 mA
Power consumption: 10 W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

890 lm | 3000 K	990 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	1003009	30.00
○ white 4000 K	1004695	29.00

⊕

Product	Prod. no.	GBP
LED Driver 20 W 350 mA including strain relief		
○ white	1007225	26.00
LED driver 20 W 350 mA Phase control dimmable including strain relief		
○ white	1007228	35.00
LED driver 20 W 150-700 mA DALI dimmable including strain relief		
○ white	1007229	61.00

SENSER 24
EL, round



500 mA
Power consumption: 13 W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

1140 lm | 3000 K	1300 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	1003010	39.00
○ white 4000 K	1004696	39.00

⊕

Product	Prod. no.	GBP
LED driver 21W 500mA including strain relief		
○ white	1007226	26.00
LED driver 20 W 350 mA / 500 mA Phase control dimmable including strain relief		
○ white	1007227	35.00
LED driver 20 W 150-700 mA DALI dimmable including strain relief		
○ white	1007229	61.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1003011 103

SENSER 12
EL, square



IP20 IK02 110° 50000h L70B50 UGR 29

200 mA
Power consumption: 6.5 W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

LED INSIDE CRI 90

420 lm | 3000 K | 440 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	1003011	26.00
○ white 4000 K	1004697	26.00

⊕

Product	Prod. no.	GBP
LED driver 20 W 150-700 mA DALI dimmable including strain relief		
○ white	1007229	61.00

SENSER 18
EL, square



IP20 IK02 110° 50000h L70B50 UGR 27

350 mA
Power consumption: 10 W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

LED INSIDE CRI 90

780 lm | 3000 K | 880 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	1003012	30.00
○ white 4000 K	1004698	30.00

⊕

Product	Prod. no.	GBP
LED Driver 20 W 350 mA including strain relief		
○ white	1007225	26.00
LED driver 20 W 350 mA Phase control dimmable including strain relief		
○ white	1007228	35.00
LED driver 20 W 150-700 mA DALI dimmable including strain relief		
○ white	1007229	61.00

SENSER 24
EL, square



IP20 IK02 110° 50000h L70B50 UGR 26

500 mA
Power consumption: 13 W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

LED INSIDE CRI 90

1140 lm | 3000 K | 1240 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	1003013	39.00
○ white 4000 K	1004699	39.00

⊕

Product	Prod. no.	GBP
LED driver 21 W 500 mA including strain relief		
○ white	1007226	26.00
LED driver 20 W 350 mA / 500 mA Phase control dimmable including strain relief		
○ white	1007227	35.00
LED driver 20 W 150-700 mA DALI dimmable including strain relief		
○ white	1007229	61.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

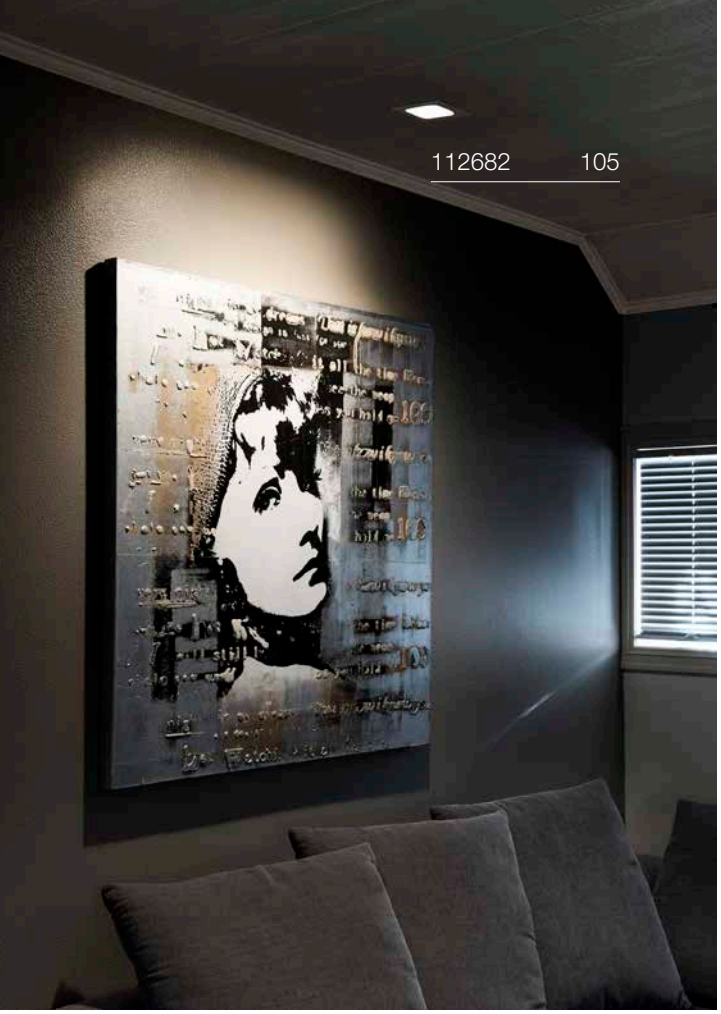
112682 105

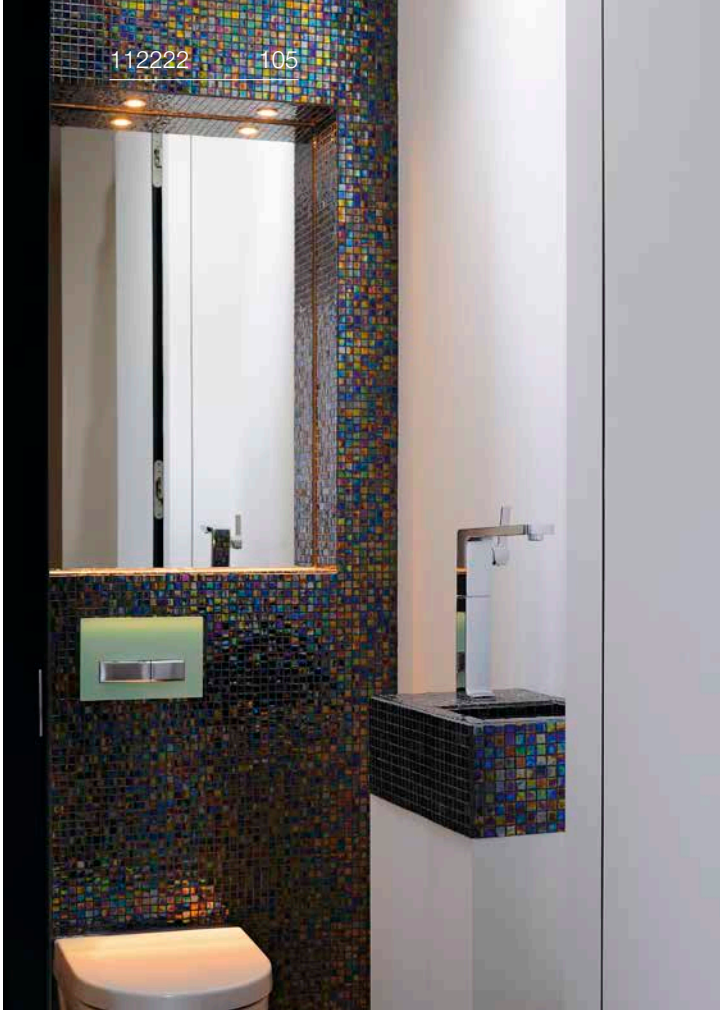
112222 105

112225 105

VERLUX
EL, square, PHASE

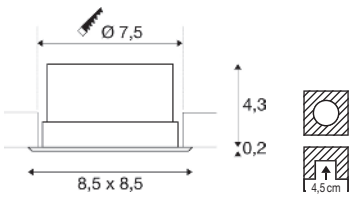

IP20 IK02 80° 35000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 20 mm

INSIDE CRI 80

940 lm | 3000 K

Options	Prod. no.	GBP
○ white	**112682**	**78.00**

VERLUX
EL, square, PHASE

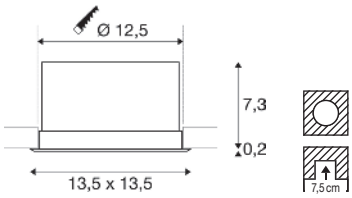

IP20 IK02 80° 35000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 22 W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 20 mm

INSIDE

1800 lm | 3000 K

Options	Prod. no.	GBP
○ white	**112692**	**115.00**

DL 126
EL



IP20 90° 60000h L70B50

12 V
Power consumption: 2.8 W
Material: aluminium/plastic

- Leaf springs

INSIDE CRI 80

170 lm | 3000 K

Options	Prod. no.	GBP
○ white	**112221**	**32.00**
◑ chrome	**112222**	**37.00**
● grey	**112225**	**32.00**

⊕

Product	Prod. no.	GBP
LED power supply 12 V | 24 W, round		
○ white	**1008651**	**23.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PIKA
DL, round, QPAR51, fixed



IP20 50

220-240 V ~50/60 Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

SOCKET INSIDE 10 W

Base: 1xGU10

Options	Prod. no.	GBP
white	1000714	11.00
brass	1000716	16.00
chrome	1000715	16.00
grey	1000717	11.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

PIKA
DL, round, QPAR51, pivoting



IP20 30° 50

220-240 V ~50/60 Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15 mm

SOCKET INSIDE 10 W

Base: 1xGU10

Options	Prod. no.	GBP
white	1000718	16.00
brass	1000720	18.00
chrome	1000719	18.00
grey	1000721	16.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

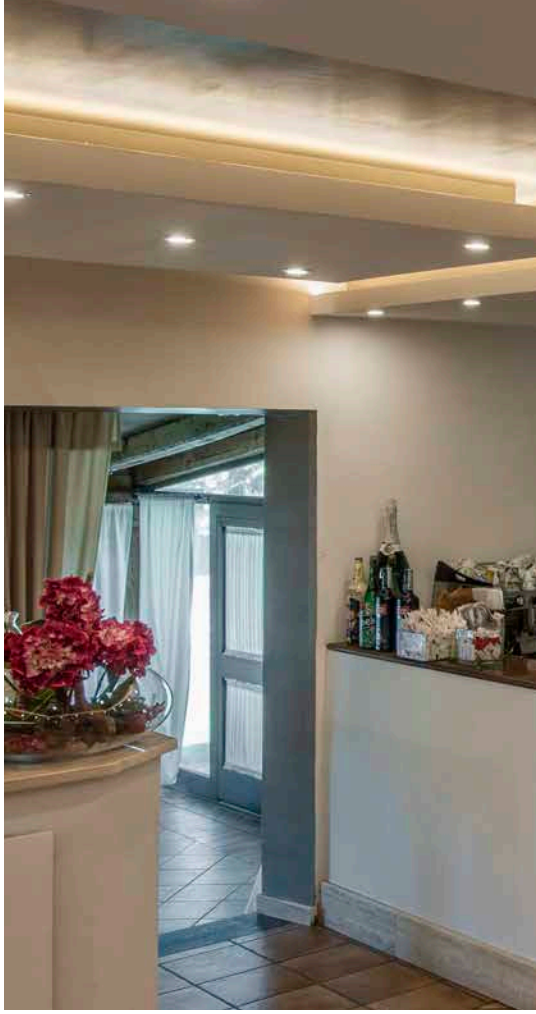

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

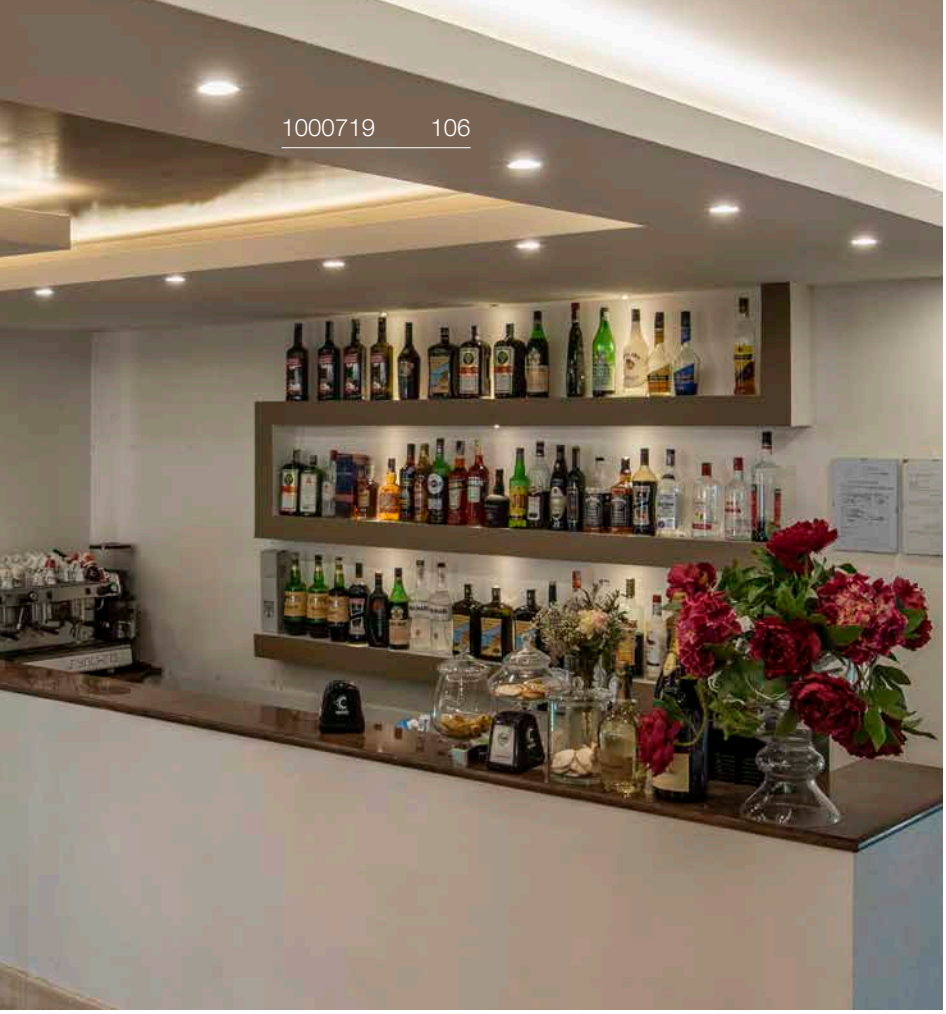

OCULUS
CL, Move, PHASE



220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

- Spring clips
- Additional frosted lens included
- Material thickness of mounting surface: max. 20 mm

36 lm | 2000 K – 780 lm | 3000 K

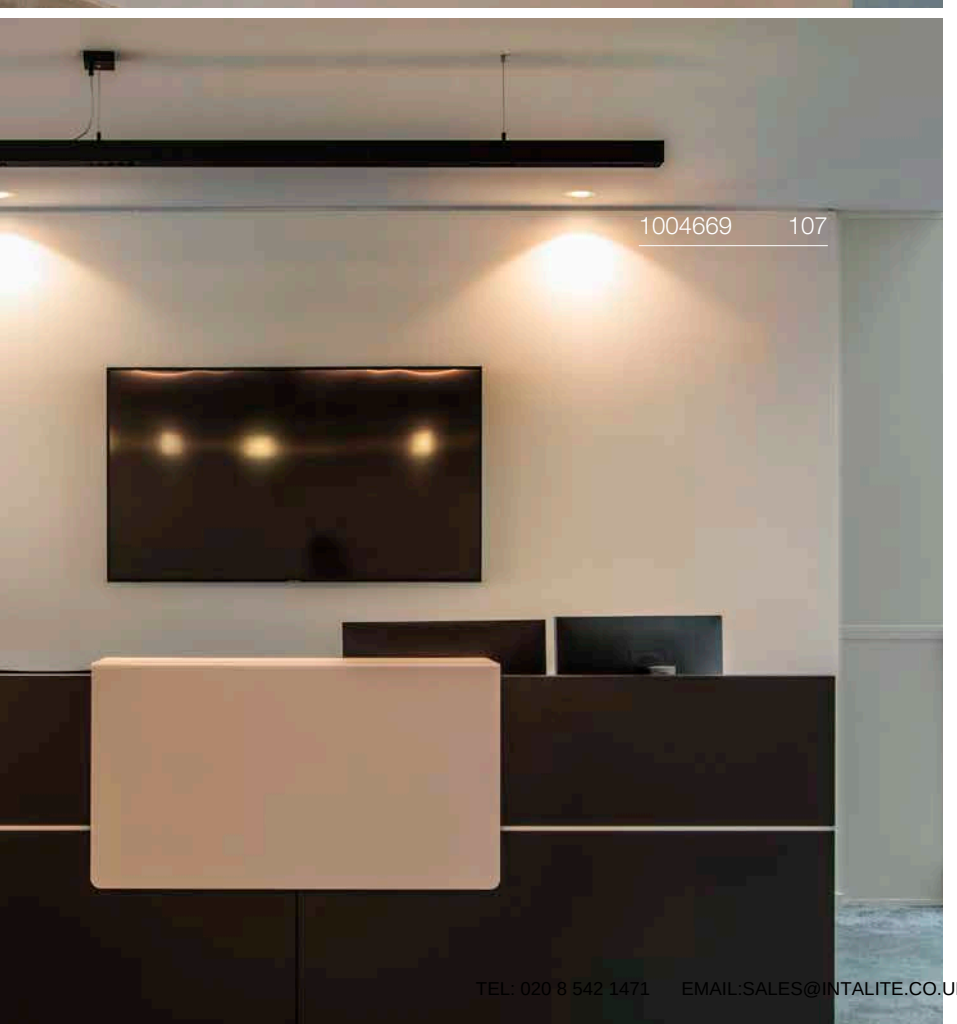

Options	Prod. no.	GBP
● black	**1004668**	**180.00**
○ white	**1004669**	**180.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

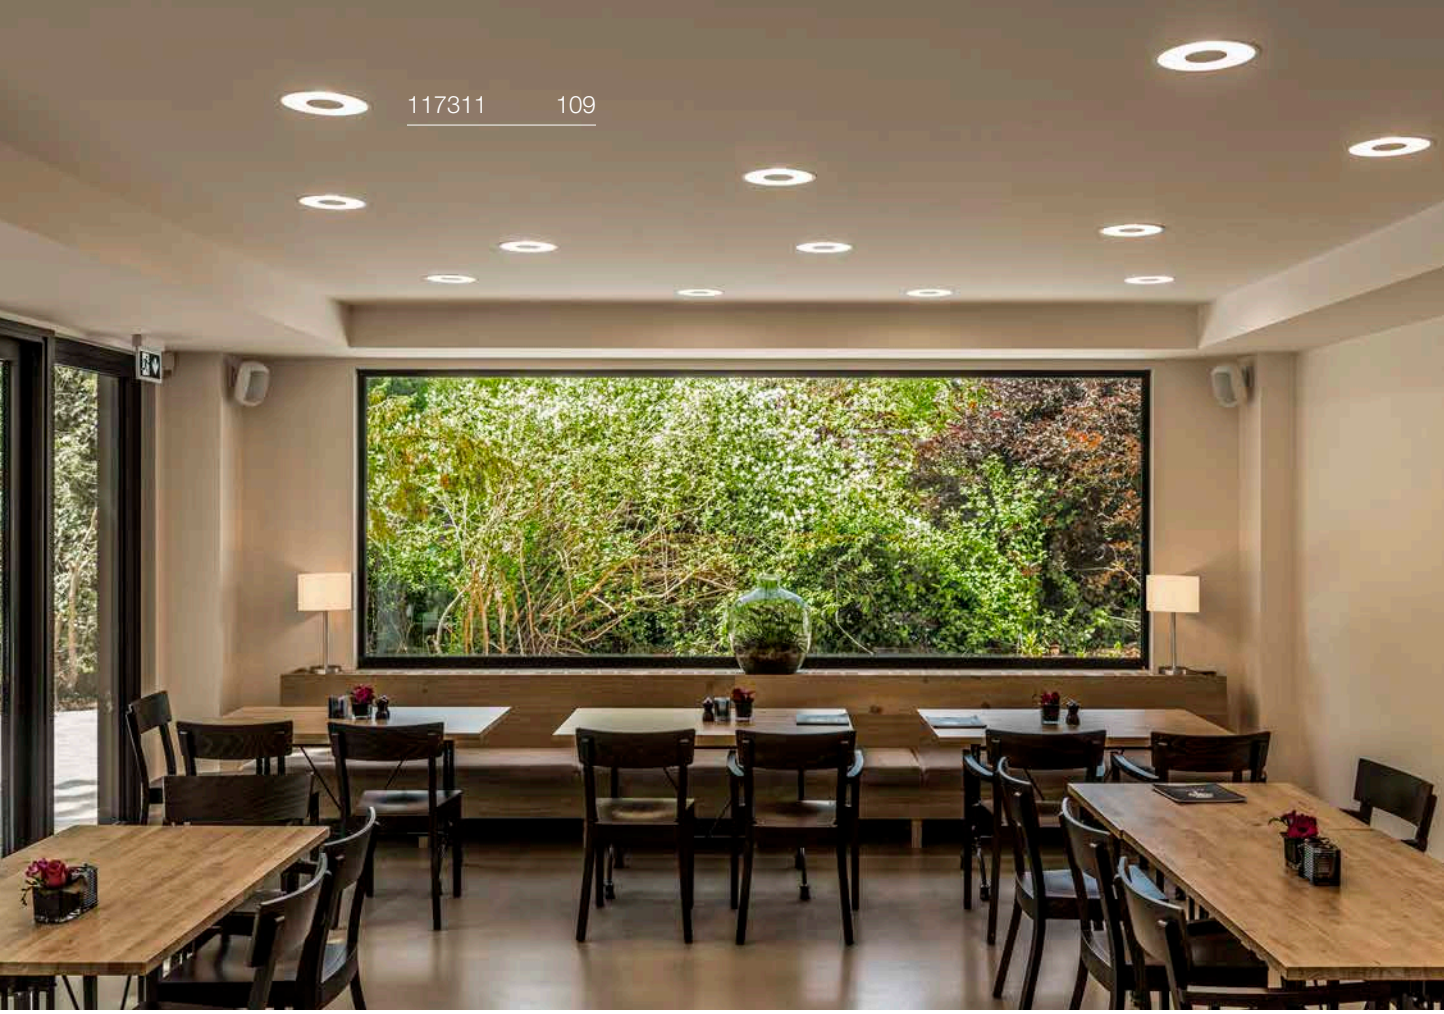
117311 109

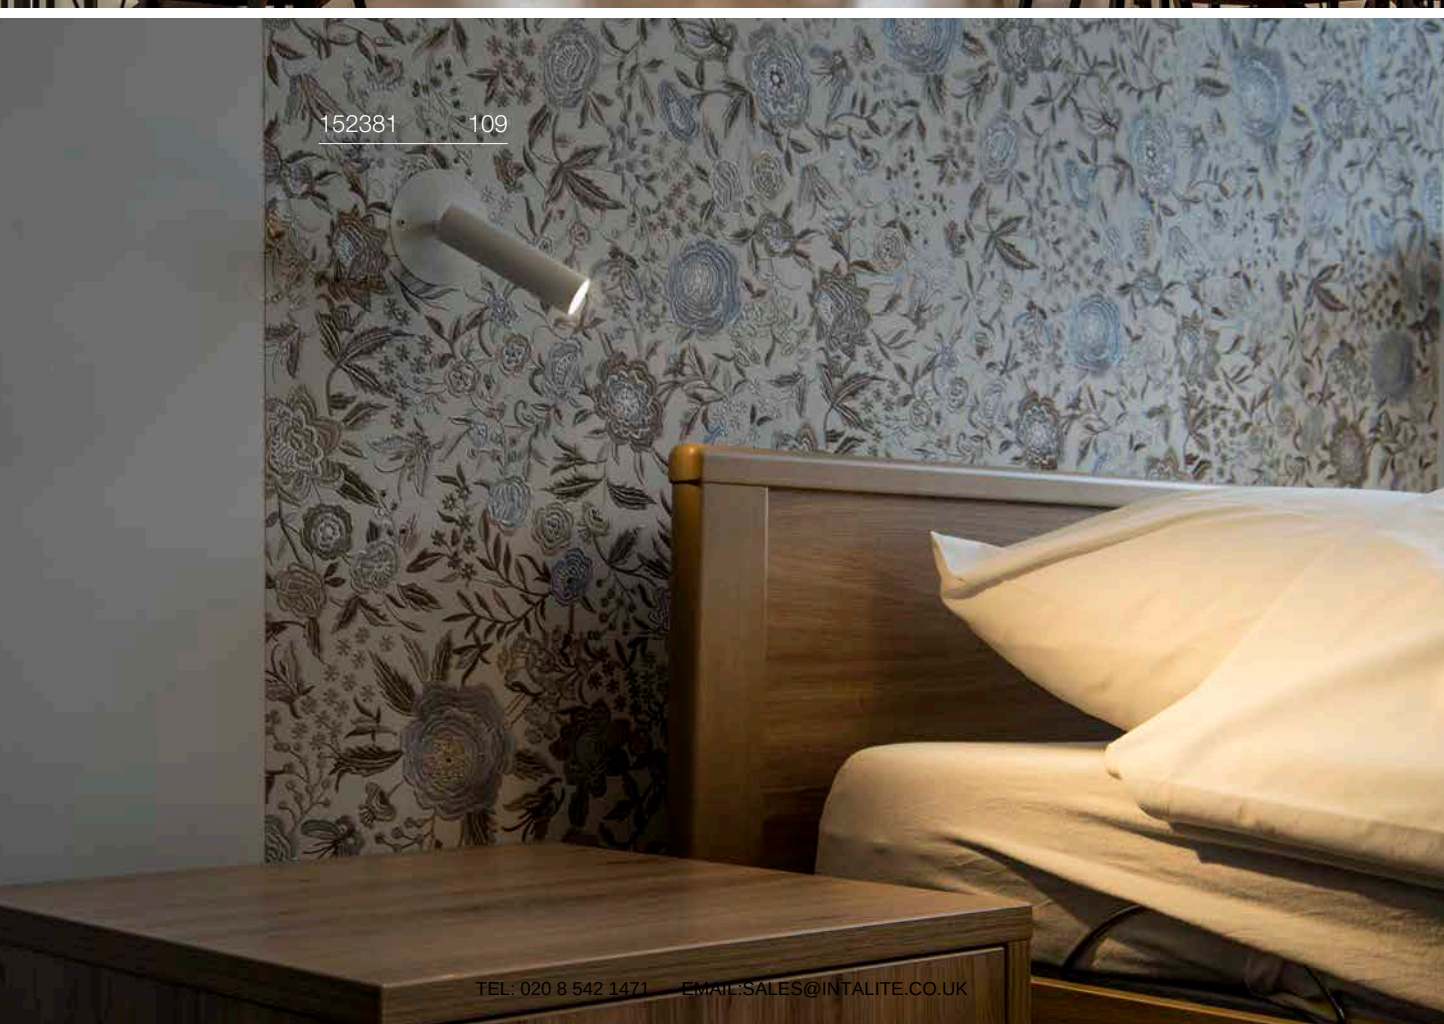
152381 109

OCCULDAS 14
EL, indirect, PHASE

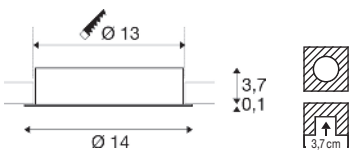

IP20 IK02 120° 25000h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 20mm

LED INSIDE CRI 80

810 lm|3000 K

Options	Prod. no.	GBP
○ white	**117331**	**144.00**

OCCULDAS 23
EL, indirect, PHASE



IP20 IK02 120° 30000h L70B50 UGR 28

220-240 V ~50/60 Hz | 700 mA
Total wattage: 23 W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 20mm

LED INSIDE CRI 80

1500 lm|3000 K

Options	Prod. no.	GBP
○ white	**117311**	**265.00**

KARPO 30
EL



IP20 40° 350° 90° 30000h L70B50

500 mA
Total wattage: 7.5 W
Material: aluminium/steel

- When connecting several lights, make sure they are connected in series!
- AMP plug included
- Spring clips
- Material thickness of mounting surface: max. 12 mm

LED INSIDE CRI 90

450 lm|3000 K

Options	Prod. no.	GBP
● black 450 lm	**152380**	**108.00**
○ white 470 lm	**152381**	**108.00**

⊕

Product	Prod. no.	GBP
LED driver 20 W | 350 mA/500 mA | PHASE		
○ white	**1007227**	**35.00**
LED driver 25 W | 150-700 mA | DALI dimmable		
○ white	**1007229**	**61.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009053 111

GRIP! S
EL, PHASE, Ø 3,0 cm

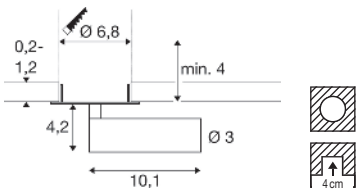

C,L IP20 IK02 29° 340° 90°

50 000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W

- Honeycomb accessories included

LED INSIDE CRI 90

Down	590 lm	2700 K
	620 lm	3000 K

Options	Prod. no.	GBP
black/gold 2700 K	1009054	110.00
black/gold 3000 K	1009055	110.00
white/black 2700 K	1009052	110.00
white/black 3000 K	1009053	110.00
gold/black 2700 K	1009058	110.00
gold/black 3000 K	1009059	110.00
bronze/black 2700 K	1009056	110.00
bronze/black 3000 K	1009057	110.00

⊕

Product	Prod. no.	GBP
GRIP! S decorative ring		
white	1008488	15.00
black	1008489	15.00
nickel	1008490	15.00
gold	1008491	15.00

GRIP! M
EL, PHASE, Ø 4,3 cm

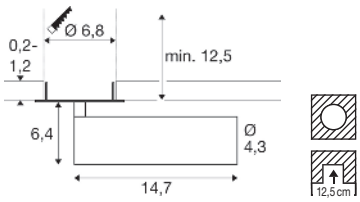

C IP20 IK02 42° 340° 90°

50 000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W

- Honeycomb accessories included

LED INSIDE CRI 90

Down	2010 lm	2700 K
	2110 lm	3000 K

Options	Prod. no.	GBP
black/gold 2700 K	1009086	144.00
black/gold 3000 K	1009087	144.00
white/black 2700 K	1009084	144.00
white/black 3000 K	1009085	144.00
gold/black 2700 K	1009090	144.00
gold/black 3000 K	1009091	144.00
bronze/black 2700 K	1009088	144.00
bronze/black 3000 K	1009089	144.00

⊕

Product	Prod. no.	GBP
GRIP! S decorative ring		
white	1008492	17.00
black	1008493	17.00
nickel	1008494	17.00
gold	1008495	17.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PLASTRA
RL, round, QPAR51



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

- Spring clips
- Material thickness of mounting surface: max. 25 mm

SOCKET INSIDE 35 W

Base: 1xGU10

Options	Prod. no.	GBP
○ white	**148070**	**37.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: **1005076** **7.00 GBP**

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: **1010470** **33.00 GBP**

PLASTRA
RL, square, QPAR51



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

- Spring clips
- Material thickness of mounting surface: max. 25 mm

SOCKET INSIDE 35 W

Base: 1xGU10

Options	Prod. no.	GBP
○ white	**148071**	**37.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: **1005076** **7.00 GBP**

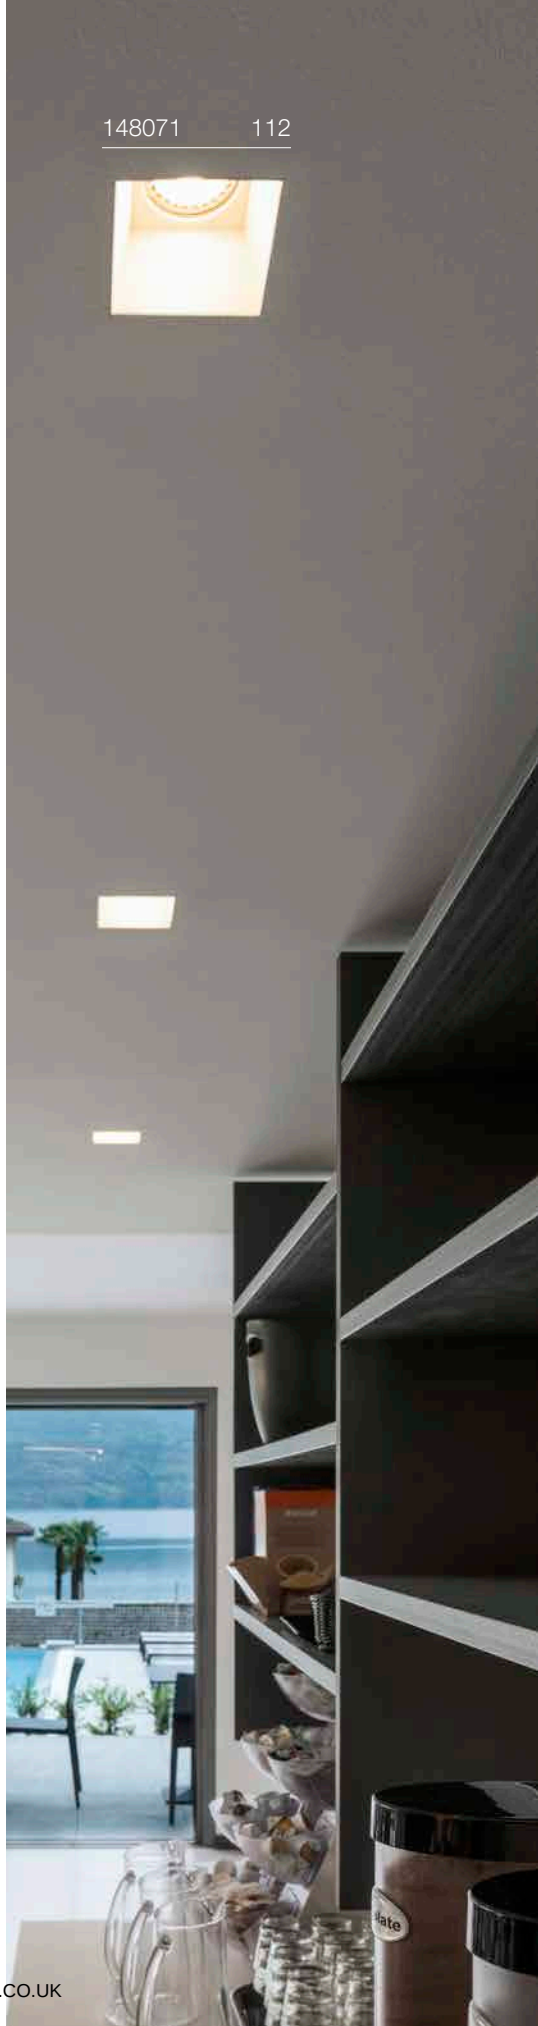

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

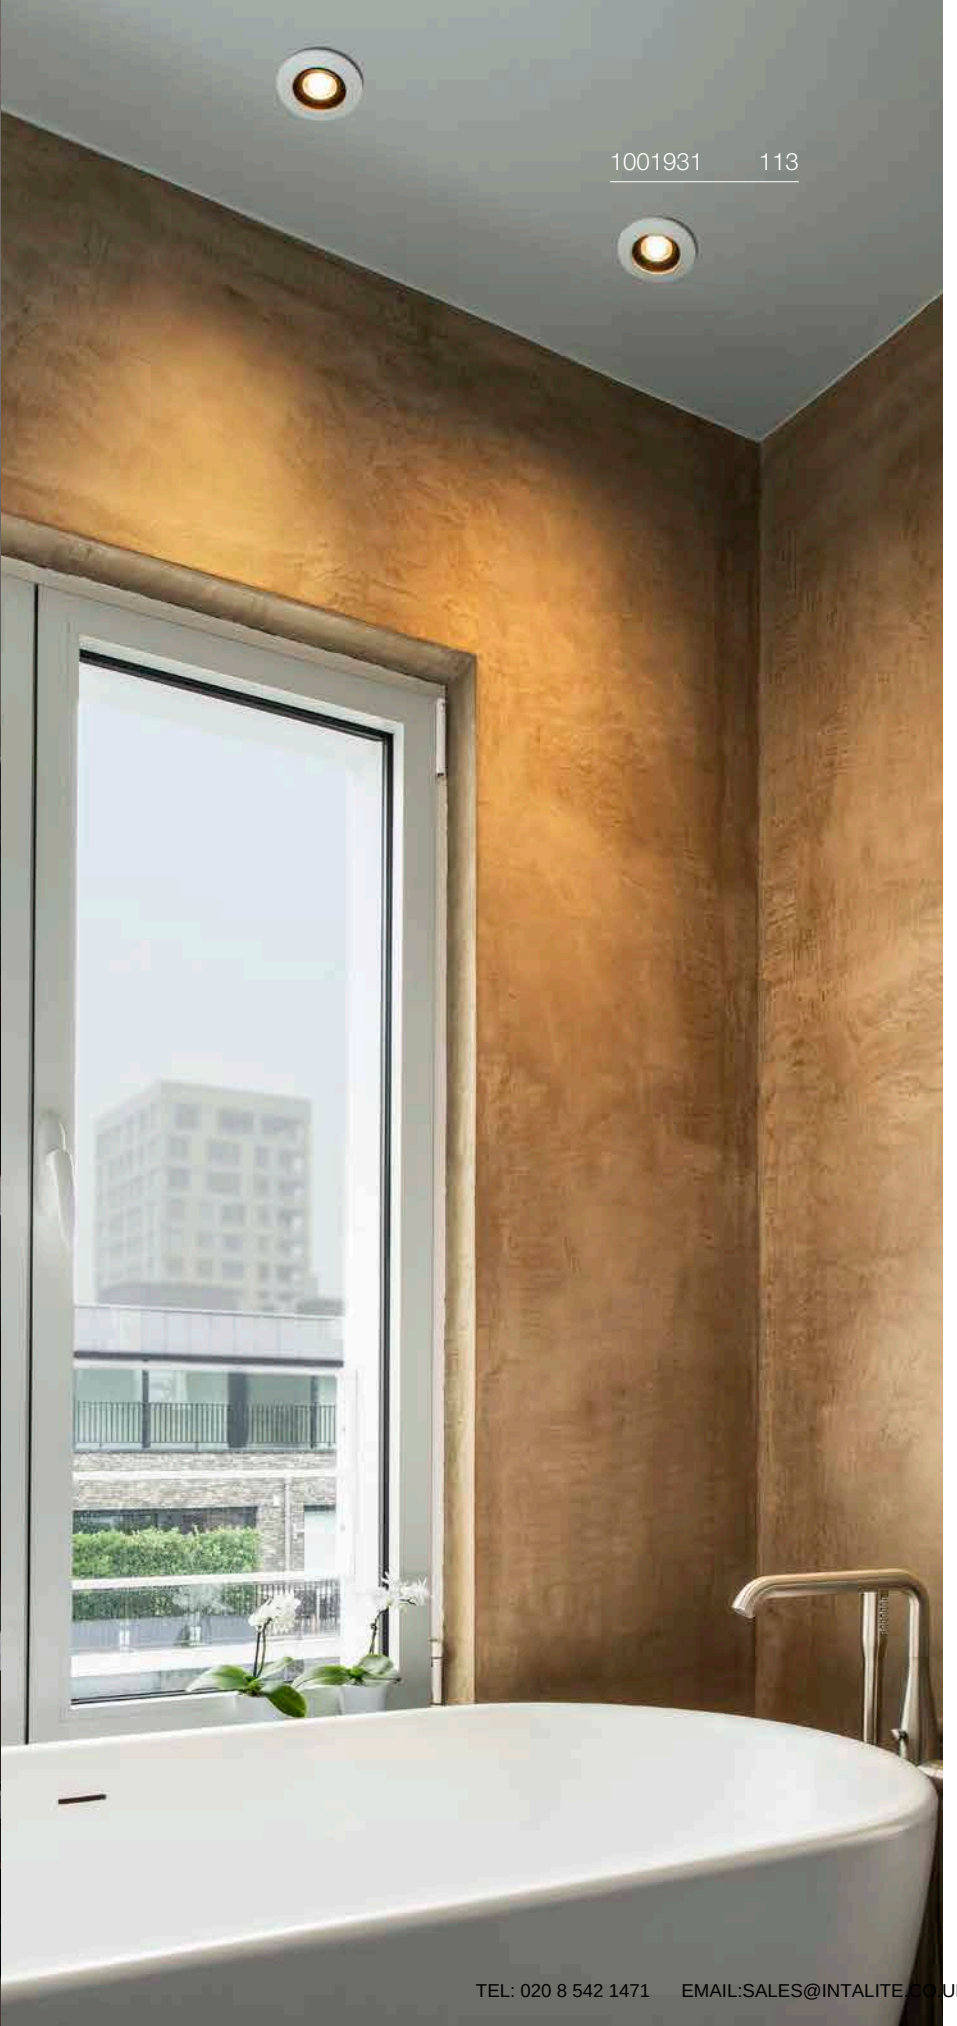

VARU
EL, QPAR51



IP20/ IP65 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 15mm

SOCKET INSIDE 5 W

Base: 1xGU10 max. Ø: 5.1 cm

Options	Prod. no.	GBP
● black	**1001930**	**36.00**
○ white	**1001931**	**36.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

C,L

Prod. no.: **1005077** **7.00 GBP**

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: **1010471** **39.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DOLIX OUT
EL, round, QPAR51



IP65 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20 mm

SOCKET INSIDE 50 W

Base: 1xGU10

Options	Prod. no.	GBP
white	**1001165**	**31.00**
silver	**1001168**	**34.00**
chrome	**1001166**	**34.00**
grey	**1001167**	**31.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

DOLIX OUT
EL, square, QPAR51



IP65 IK02 50

220-240 V ~50/60 Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20 mm

SOCKET INSIDE 10 W

Base: 1xGU10

Options	Prod. no.	GBP
white	**1001169**	**31.00**
silver	**1001172**	**34.00**
grey	**1001171**	**31.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

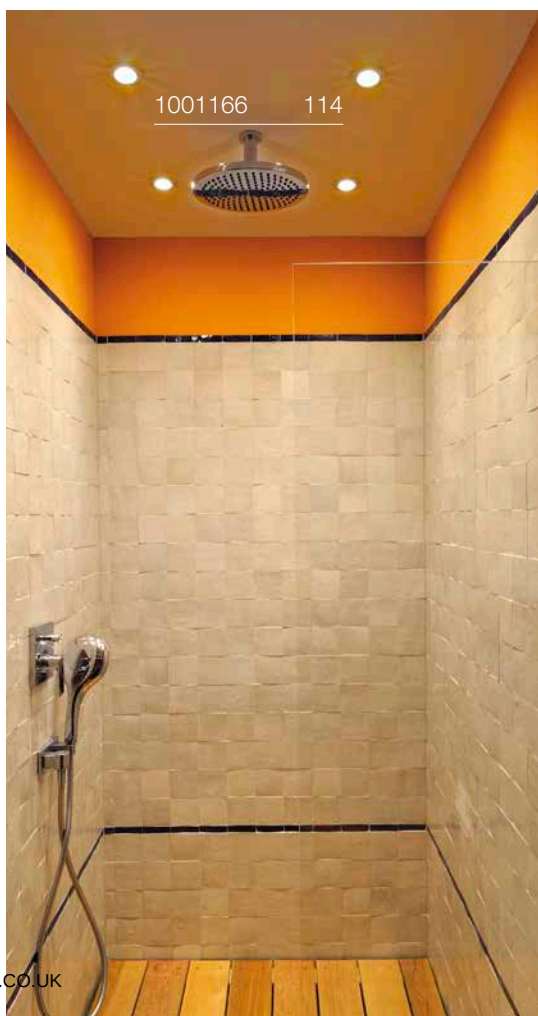

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

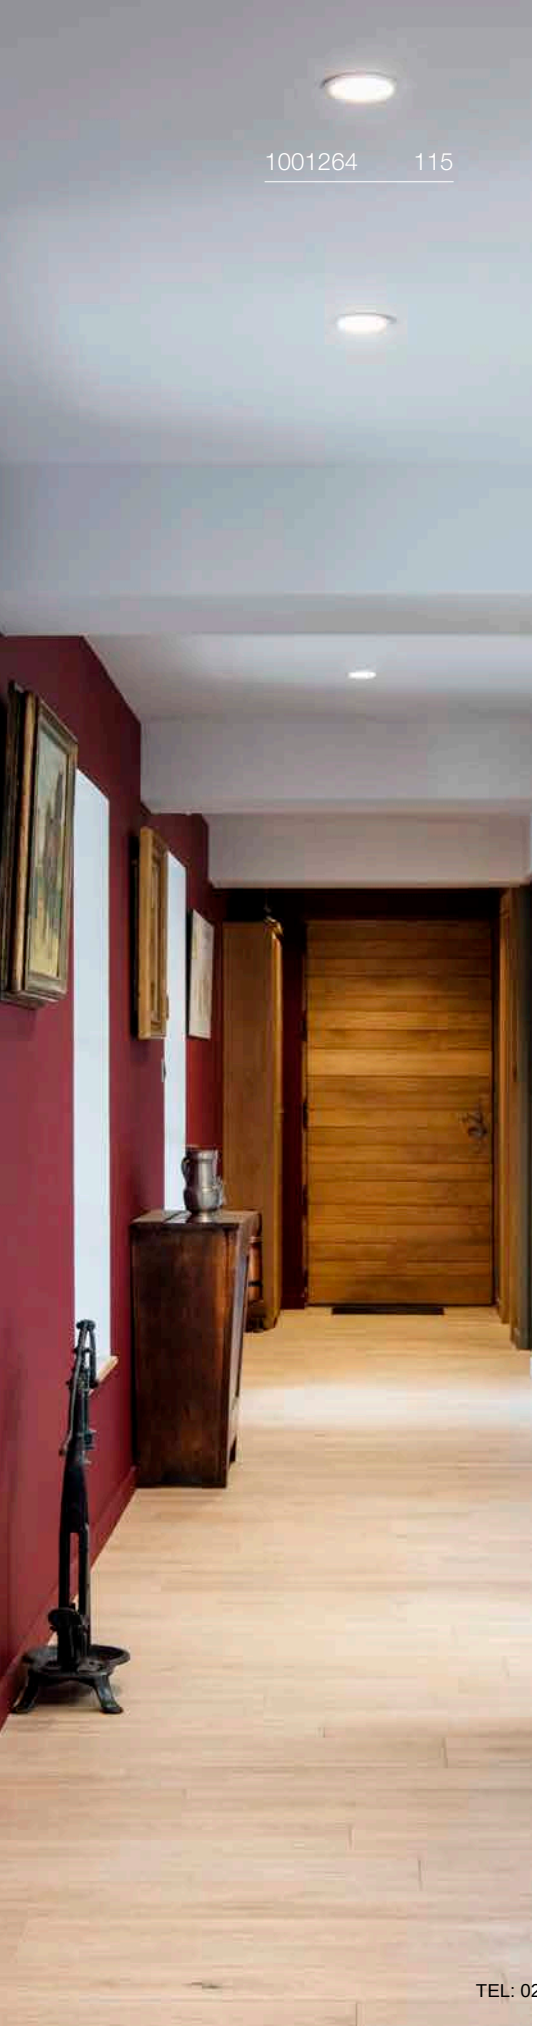

KINI
EL, PHASE



C,L · IP65 · IK02 · 60° · 30000 h L70B50

220-240 V ~50/60 Hz | 260 mA
Total wattage: 12 W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE · CRI 80

850 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1000833**	**89.00**

AKALO D83
EL



C,L · IK02 · 90° · 30000 h L70B50 · UGR 28

220-240 V ~50/60 Hz | 120 mA
Total wattage: 9 W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE · CRI 80

800 lm | 3000 K | 880 lm | 4000 K | 850 lm | 5700 K

Options	Prod. no.	GBP
○ white	**1001264**	**35.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FRAME BASIC
RL



IP20 | 90° | 50000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.3 W
Material: aluminium/acrylic

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 80

600 lm | 3000 K

Options	Prod. no.	GBP
● black	**112720**	**47.00**
○ white	**112721**	**47.00**

FRAME BASIC
RL, HV



IP20 | 60000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 3 W
Material: aluminium

- Leaf springs
- Material thickness of mounting surface: max. 30 mm

LED INSIDE | CRI 90

170 lm | 2700 K

Options	Prod. no.	GBP
○ white	**1000576**	**61.00**
● grey	**1000577**	**61.00**

Product	Prod. no.	GBP
Flush frame		
● gold	**112780**	**6.00**
Wall box		
● black	**112781**	**10.00**

FRAME BASIC
RL



IP20 | 30000 h L70B50

350 mA
Total wattage: 1 W
Material: aluminium/glass

- When connecting several lights, make sure they are connected in series!
- AMP plug included
- Leaf springs
- Material thickness of mounting surface: max. 30 mm

LED INSIDE | CRI 90

40 lm | 3000 K

Options	Prod. no.	GBP
○ white	**113262**	**35.00**
● grey	**111262**	**35.00**

Product	Prod. no.	GBP
Flush frame		
● gold	**112780**	**6.00**
Wall box		
● black	**112781**	**10.00**
LED driver 4 W 350 mA		
○ white	**1008656**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

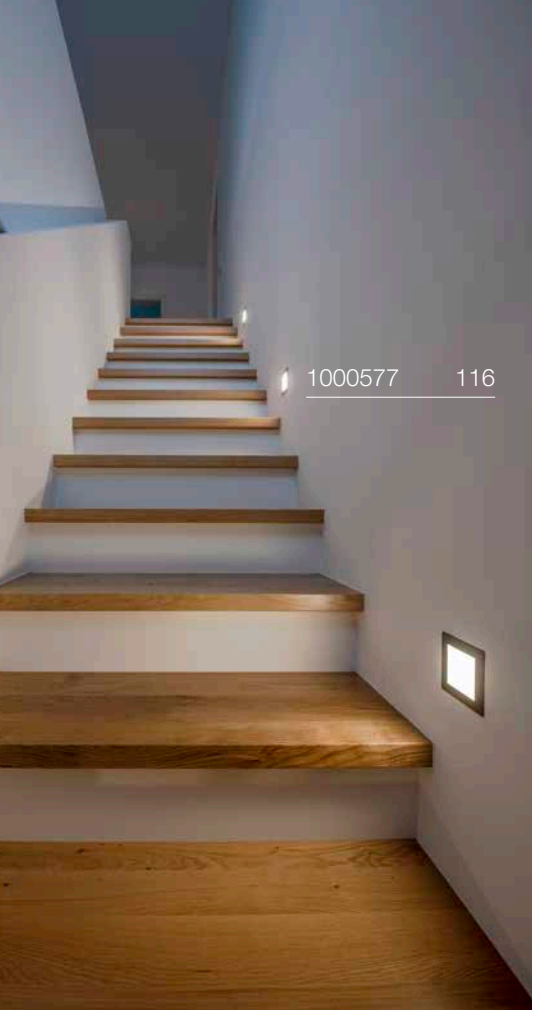

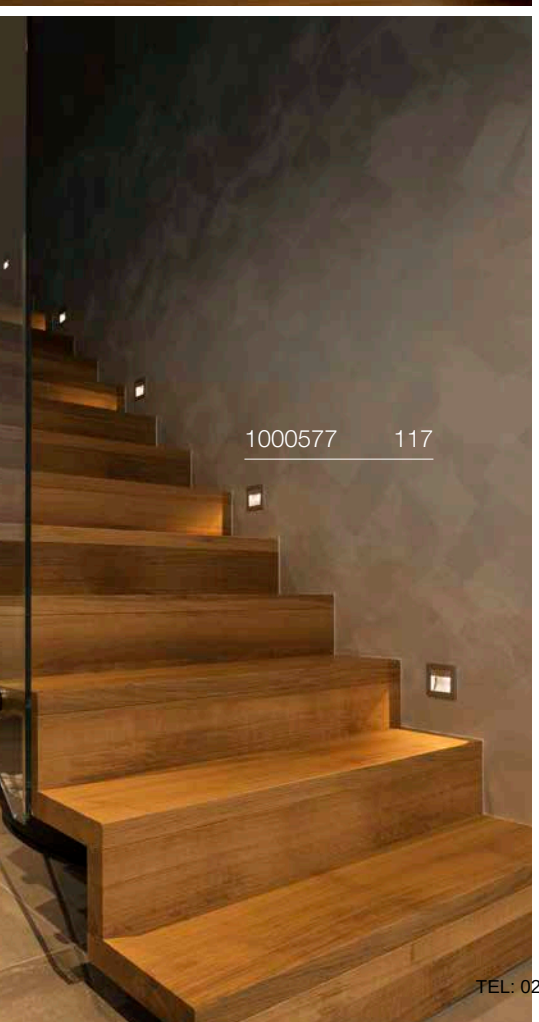

FRAME CURVE
EL



IP20 | 60000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 3 W
Material: aluminium

- Leaf springs
- Material thickness of mounting surface: max. 30 mm

LED INSIDE | CRI 90

140 lm | 2700 K

Options	Prod. no.	GBP
○ white	1000574	67.00
● grey	1000575	67.00

⊕

Product	Prod. no.	GBP
Flush frame		
● gold	112780	6.00
Wall box		
● black	112781	10.00

FRAME CURVE
EL



IP20 | 30000 h L70B50

350 mA
Total wattage: 1 W
Material: aluminium

- When connecting several lights, make sure they are connected in series!
- AMP plug included
- Leaf springs
- Material thickness of mounting surface: max. 25 mm

LED INSIDE | CRI 90

60 lm | 3000 K

Options	Prod. no.	GBP
○ white	113292	47.00
● grey	111292	47.00

⊕

Product	Prod. no.	GBP
Flush frame		
● gold	112780	6.00
Wall box		
● black	112781	10.00
LED driver 4 W 350 mA		
○ white	1008656	16.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1002980 119

NOTAPO S
RL





700 mA
Power consumption: 2.2 W
Material: aluminium

- Leaf springs
- When connecting several lights, make sure they are connected in series!
- open cable end

6 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1002979**	**51.00**

Product	Prod. no.	GBP
NOTAPO | mounting frame		
● black	**1002981**	**21.00**
LED driver 25 W 150-700 mA DALI		
○ white	**1007229**	**61.00**
LED Driver 4 W | 700 mA		
○ white	**1008657**	**16.00**

NOTAPO L
RL





700 mA
Power consumption: 2.2 W
Material: aluminium

- Leaf springs
- When connecting several lights, make sure they are connected in series!
- open cable end

6 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1002980**	**70.00**

Product	Prod. no.	GBP
NOTAPO | mounting frame		
● black	**1002981**	**21.00**
LED driver 25 W 150-700 mA DALI		
○ white	**1007229**	**61.00**
LED Driver 4 W | 700 mA		
○ white	**1008657**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DOWNUNDER PUR 80
EL



IP20 | 30000 h L70B50

350 mA
Total wattage: 3.6 W
Material: aluminium/steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Low-voltage secondary socket

LED INSIDE | CRI 80

Down 180 lm | 3000 K

Options	Prod. no.	GBP
○ white	**151950**	**52.00**

⊕

Product	Prod. no.	GBP
Mounting frame		
● grey	**151960**	**8.00**
LED driver 4 W 350 mA		
○ white	**1008656**	**16.00**

DOWNUNDER PUR 150
EL



IP20 | 30000 h L70B50

500 mA
Total wattage: 5.2 W
Material: aluminium/steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Low-voltage secondary socket

LED INSIDE | CRI 80

Down 230 lm | 3000 K

Options	Prod. no.	GBP
○ white	**151952**	**74.00**

⊕

Product	Prod. no.	GBP
Mounting frame		
● grey	**151962**	**12.00**
LED driver 20 W 350 mA / 500 mA PHASE		
○ white	**1007227**	**35.00**
LED driver 25 W 150-700 mA DALI dimmable		
○ white	**1007229**	**61.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

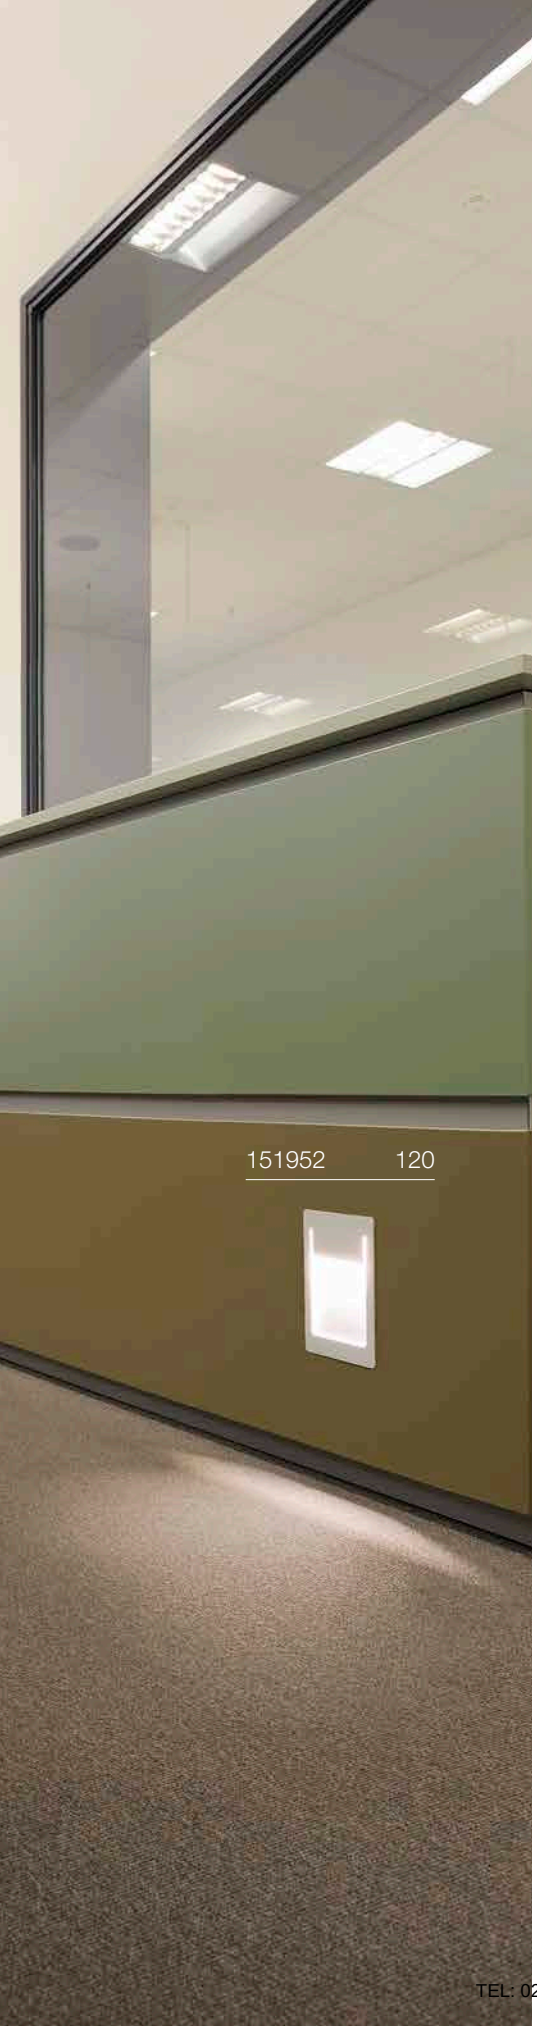

MOBALA
EL



IP20 | 30000h L70B50

100-240 V ~50/60 Hz | 24 V
Total wattage: 1.3W
Material: aluminium

- The mounting frame (1002984) or wall box (1002983) are required for assembly.
- Leaf springs

LED INSIDE | CRI 80

14 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1002982**	**62.00**

⊕

Product	Prod. no.	GBP
MOBALA | wall box		
● black	**1002983**	**12.00**
MOBALA | mounting frame		
● black	**1002984**	**12.00**

WORO
EL



IP20 | 30000h L70B50 | 35

350 mA
Total wattage: 1.2 W
Material: steel

- When connecting several lights, make sure they are connected in series!
- This item is suitable for installation in cavity walls and flush-mounted sockets for switches/sockets.
- Leaf springs
- open cable end

LED INSIDE | CRI 80

50 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1002922**	**61.00**

⊕

Product	Prod. no.	GBP
LED driver 3W | 350W		
○ white	**1005248**	**13.00**
LED driver 4W 350mA		
○ white	**1008656**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PATTA-I
EL, round, PHASE

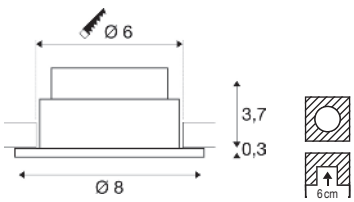

C,L | IP20/IP65 | IK02 | 38° | 30000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.3 W
Material: aluminium/glass

- Spring clips and leaf springs are included with the product
- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 95

44 lm | 1800 K – 440 lm | 3000 K

Options	Prod. no.	GBP
● black	**1002098**	**74.00**
○ white	**1002099**	**74.00**
◍ aluminium	**1002100**	**78.00**

PATTA-I
EL, square, PHASE

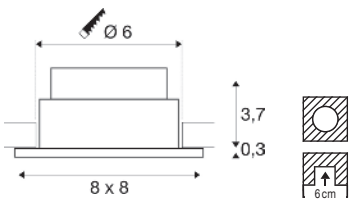

C,L | IP20/IP65 | IK02 | 38° | 30000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.3 W
Material: aluminium/glass

- Spring clips and leaf springs are included with the product
- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 95

44 lm | 1800 K – 440 lm | 3000 K

Options	Prod. no.	GBP
● black	**1002101**	**74.00**
○ white	**1002102**	**74.00**

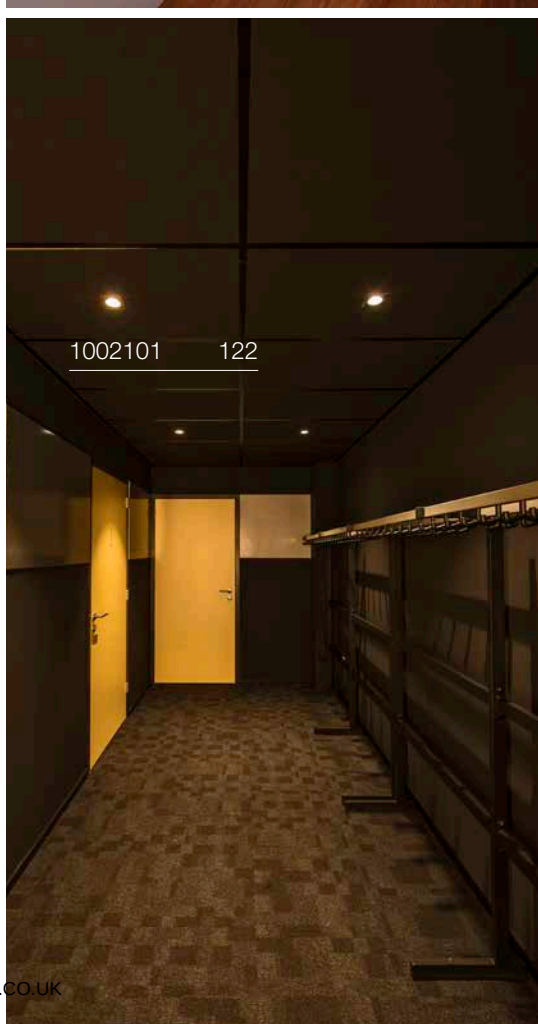

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

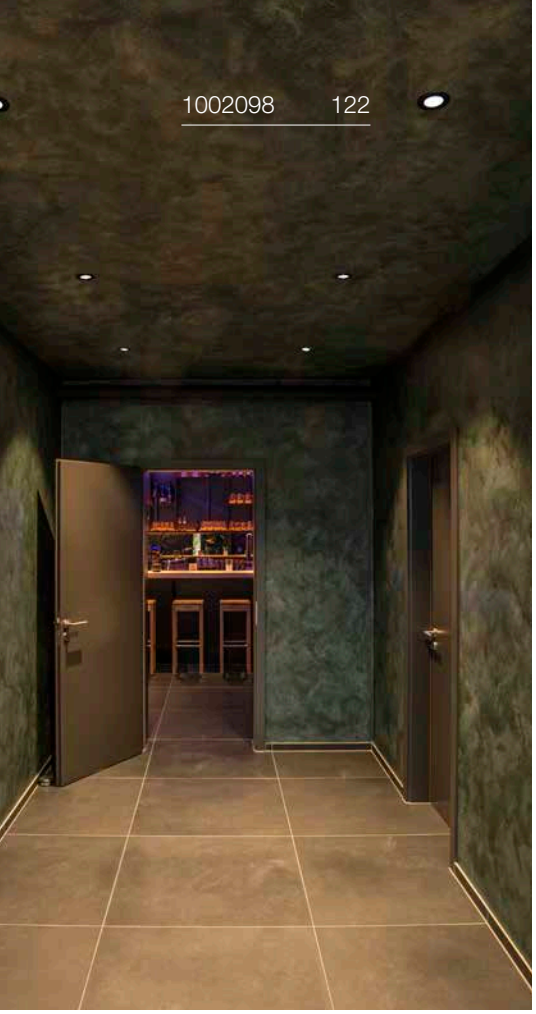

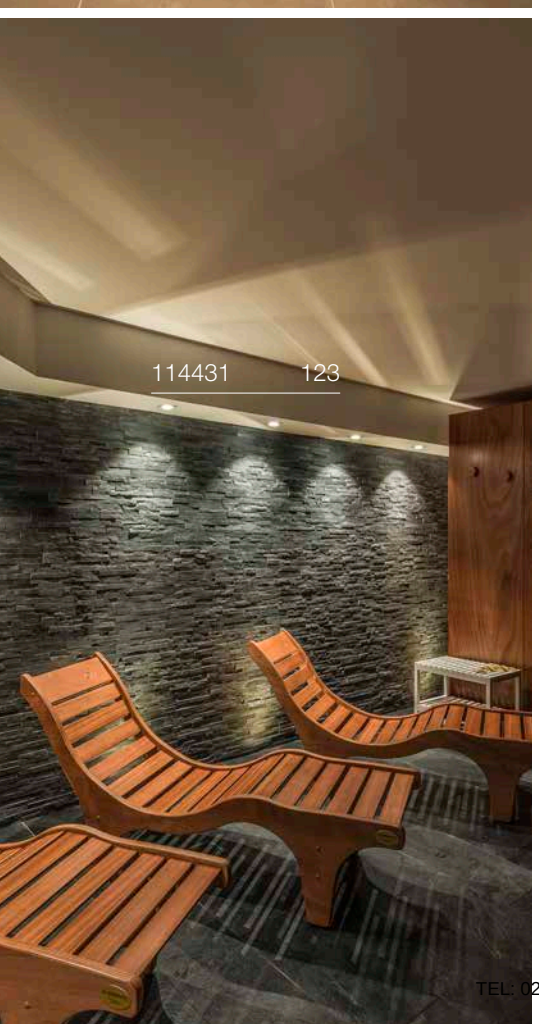

PATTA-I
EL, round, PHASE

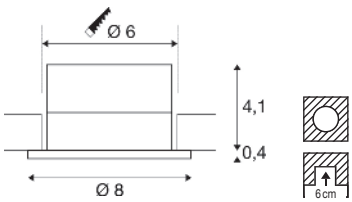

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface:
- max. 25 mm

870 lm|3000 K

Options	Prod. no.	GBP
● black	**114420**	**74.00**
○ white	**114421**	**74.00**
● aluminium	**114426**	**78.00**

PATTA-I
EL, square, PHASE

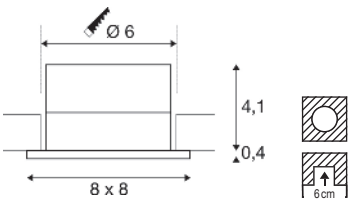

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface:
- max. 25 mm

870 lm|3000 K

Options	Prod. no.	GBP
● black	**114430**	**74.00**
○ white	**114431**	**74.00**
● aluminium	**114436**	**78.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PATTA-F
EL, round, PHASE



C,L | IP20/IP65 | IK02 | 38° | 40000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE | CRI 80

	745 lm 860 lm	3000 K

Options	Prod. no.	GBP
● black 745 lm	**114440**	**84.00**
○ white 860 lm	**114441**	**84.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PATTA-F
EL, square, PHASE



220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20 mm

745 lm
860 lm | 3000 K

Options	Prod. no.	GBP
● black 745 lm	**114450**	**84.00**
○ white 860 lm	**114451**	**84.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009045 147

SOCKET

SUN | 128, 129

SOCKET MIX match

VARYT | 131

LED

TRILEDO | 135

LED

TRILEDO | 135

SOCKET

TRILEDO | 137



SOCKET

TRILEDO | 137

LED

NUMINOS® | 138–144

LED SOCKET

GRIP! | 147–151

LED

OCULUS CL | 153

SOCKET

ENOLA® B | 154

LED

ENOLA® C | 154

ANELA | 155

SOCKET

ASTO TUBE | 157

LED

OCCULDAS | 158

SOCKET

ALTRA DICE | 159

SOCKET

ALTRA DICE | 159

SOCKET

KARDAMOD | 161

SOCKET MIX match

FENDA | 163

SOCKET

TENORA | 164

SOCKET

SOPRANA | 165

SOCKET

PLASTRA | 166

LED

PLASTRA | 167

SOCKET

PLASTRA 105 | 167

SOCKET

PLASTRA 104 | 167

LED

FERA 25 | 168–169

LED

DECONA | 171–177

LED

MARONA | 178

NEW

LED

GLENOS® PRO | 179

LED

PANEL 60 | 181

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SUN 20
CL, E27

UPDATE



IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 12 cm

Options	Prod. no.	GBP
● black	**1008125**	**94.00**
● gold	**1008126**	**99.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kWh/1000 h

C

Prod. no.: **1005289** **9.00 GBP**

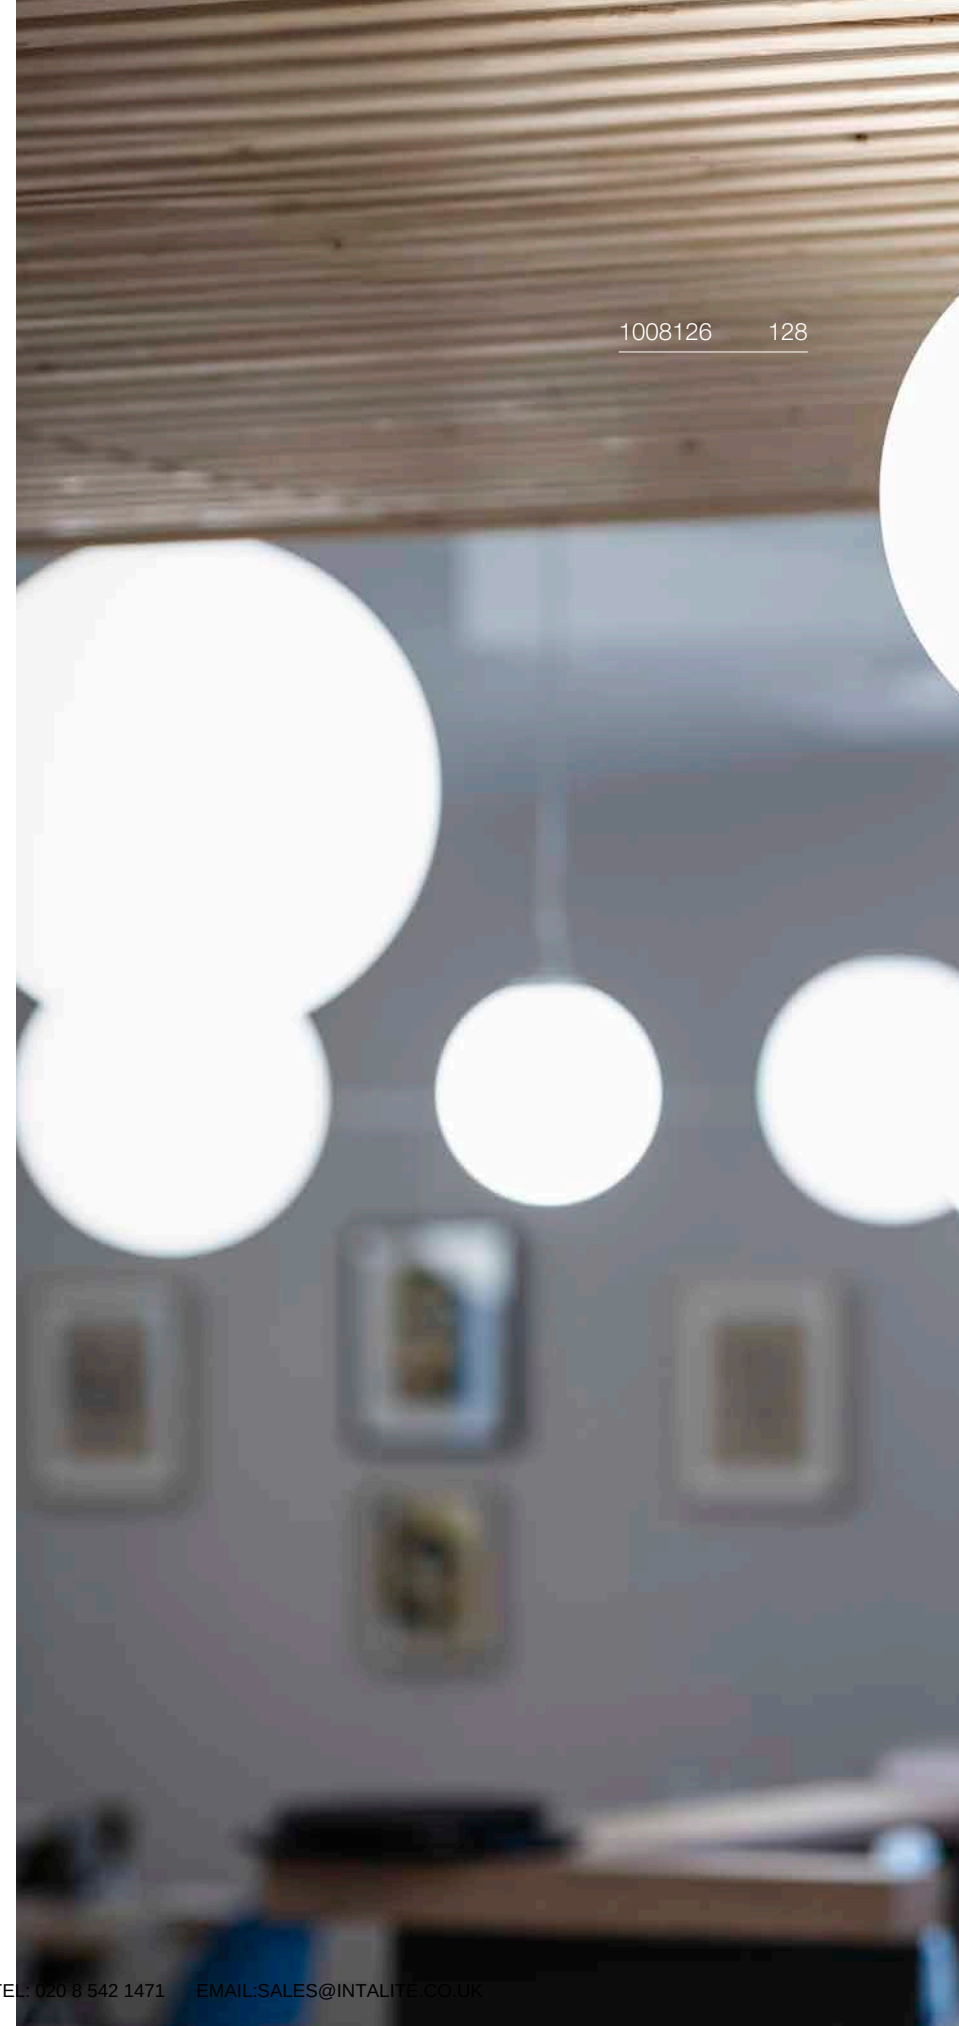

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SUN 30
CL, E27

UPDATE



IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 14 cm

Options	Prod. no.	GBP
● black	1008127	102.00
● gold	1008128	108.00

E27 | 11 W | 330°
1250 lm | 2700 K | EEC = E
11 kWh/1000 h

Prod. no.: 1008162 72.00 GBP

TEL: 020 [illegible] 1471 EMAIL:SALES@INTALITE.CO.UK

VARYT
CL, E14

UPDATE



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium

• IP44 in combination with one of the shades

SOCKET INSIDE 6 W

Base: 1xE14 | max. Ø: 11 cm | L: 3.8 cm

Options	Prod. no.	GBP
● black	1008099	85.00
○ white	1008100	85.00
brass	1008102	111.00
chrome	1008101	102.00
copper	1008103	111.00

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F
5 kWh/1000 h

Prod. no.: 1005284 6.00 GBP

VARYT
Opal glass shade

IK02

Ø: 12 cm
H: 12.8 cm

Options	Prod. no.	GBP
○ white	1008119	51.00

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 12 cm
H: 12.7 cm
Material: glass

Options	Prod. no.	GBP
smoky grey	1007858	69.00
amber	1008023	69.00

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 12 cm
H: 13 cm
Material: glass

Options	Prod. no.	GBP
○ white	1007859	59.00

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 11.5 cm
H: 13.5 cm
Material: glass

Options	Prod. no.	GBP
○ white	1007860	64.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MIX & MATCH VARYT

VARYT PD

Black	*1008114*
White	*1008115*
Brass	*1008117*
Chrome	*1008116*
Copper	*1008118*



VARYT CL

Black	*1008099*
White	*1008100*
Brass	*1008102*
Chrome	*1008101*
Copper	*1008103*

VARYT WL

Black	*1008104*
White	*1008105*
Brass	*1008107*
Chrome	*1008106*
Copper	*1008108*



VARYT TL

Black	*1008743*
White	*1008744*
Brass	*1008746*
Chrome	*1008745*
Copper	*1008747*





VARYT BALL Ø12

White | *1008119*



VARYT LINE Ø12

White | *1007859*

VARYT PLEATED Ø11,5

White | *1007860*

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

IP44

Suitable for all VARYT table, wall, ceiling and pendant lights

IP44

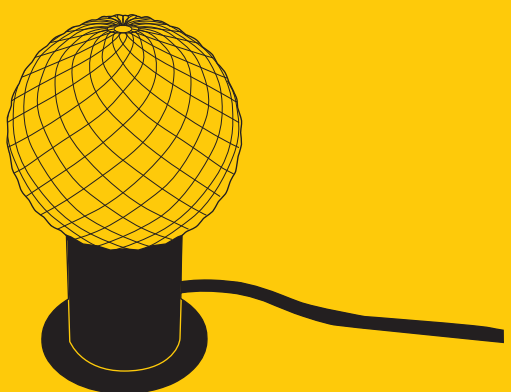

VARYT DIAMOND Ø11

Smoked | *1007858*
Amber | *1008023*

Combine the SLV Mix & Match products to suit your taste. Perfectly coordinated for combinations within the Varyt family. You can recognise SLV Mix & Match products by the following symbol:

MIX match

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

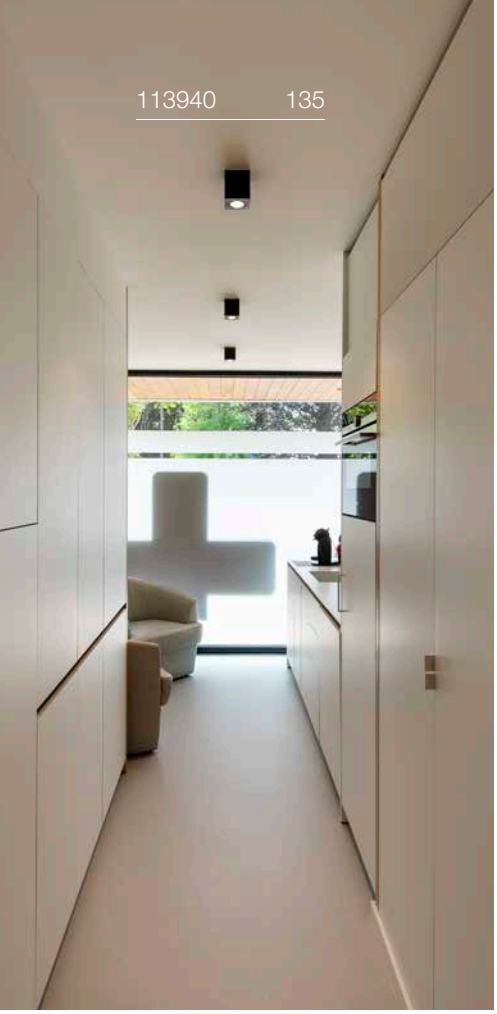

113940 135

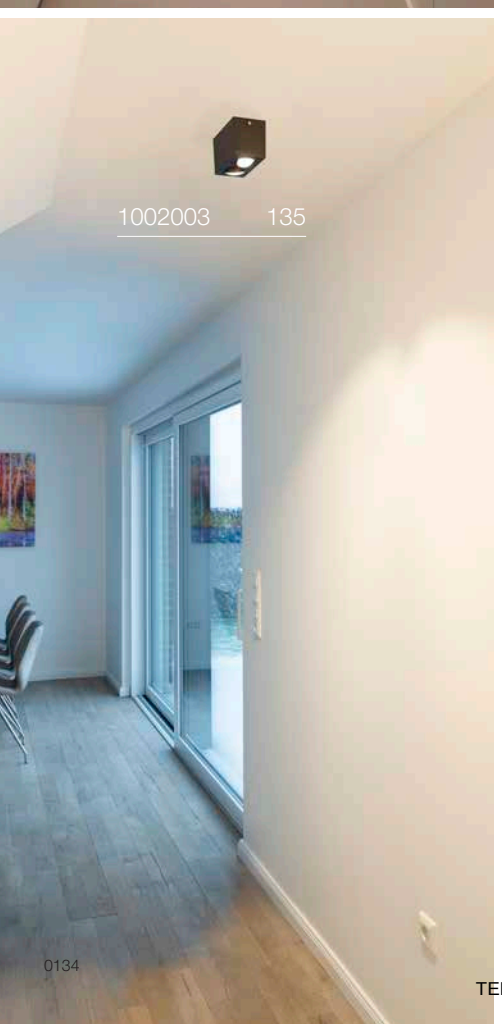

1002003 135

113931 135

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TRILEDO
CL, single, round



IP20 | 38° | 350° | 20° | 50000 h L80B10

220-240 V ~50/60 Hz | 160 mA
Total wattage: 6.4 W
Material: aluminium

LED INSIDE | CRI 90

Down 580 lm | 3000 K

Options	Prod. no.	GBP
● black	**113930**	**101.00**
○ white	**113931**	**101.00**

TRILEDO
CL, single, square



IP20 | 38° | 350° | 20° | 50000 h L80B10

220-240 V ~50/60 Hz | 160 mA
Total wattage: 6.4 W
Material: aluminium

LED INSIDE | CRI 90

Down 580 lm | 3000 K

Options	Prod. no.	GBP
● black	**113940**	**101.00**
○ white	**113941**	**101.00**

TRILEDO
CL, double, square



IP20 | 38° | 350° | 30° | 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium

LED INSIDE | CRI 90

Down 1280 lm | 3000 K

Options	Prod. no.	GBP
● black	**1002003**	**140.00**
○ white	**1002008**	**140.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1002004 137

1002005 137

1002011 137

TRILEDO
CL, single, round, QPAR51



IP20 350° 20°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1002010**	**63.00**
○ white	**1002011**	**63.00**
● aluminium	**1002012**	**67.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kWh/1000 h

Prod. no.: 1005273 9.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

TRILEDO
CL, single, square, QPAR51



IP20 350° 20°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1002013**	**63.00**
○ white	**1002015**	**63.00**
● aluminium	**1002004**	**67.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

TRILEDO
CL, double, square, QPAR51



IP20 350° 20°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1002005**	**92.00**
○ white	**1002006**	**92.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® S
CL, PHASE





220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium

Options	GBP
All S versions	**88.00**
All S DALI versions	**129.00**

Note:
Decorative ring also available in white, gold and copper

● black



○ white

Product	Prod. no.	GBP
Front ring S		
○ white	**1006167**	**2.00**
● copper	**1008140**	**7.00**
● gold	**1008144**	**7.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004122**	
			36°	16	**1004123**	
			60°	19	**1004124**	
	3000 K	1050 lm	24°	16	**1004130**	
			36°	16	**1004131**	
			60°	19	**1004132**	
	4000 K	1100 lm	24°	16	**1004138**	
			36°	16	**1004139**	
			60°	19	**1004140**	
Dali Touch	2700 K	950 lm	24°	16	**1004410**	
			36°	16	**1004411**	
			60°	19	**1004412**	
	3000 K	1050 lm	24°	16	**1004418**	
			36°	16	**1004419**	
			60°	19	**1004420**	
	4000 K	1100 lm	24°	16	**1004426**	
			36°	16	**1004427**	
			60°	19	**1004428**	
C	2700 K	950 lm	24°	16	**1004126**	
			36°	16	**1004127**	
			60°	19	**1004128**	
	3000 K	1050 lm	24°	16	**1004134**	
			36°	16	**1004135**	
			60°	19	**1004136**	
	4000 K	1100 lm	24°	16	**1004142**	
			36°	16	**1004143**	
			60°	19	**1004144**	
Dali Touch	2700 K	950 lm	24°	16	**1004414**	
			36°	16	**1004415**	
			60°	19	**1004416**	
	3000 K	1050 lm	24°	16	**1004422**	
			36°	16	**1004423**	
			60°	19	**1004424**	
	4000 K	1100 lm	24°	16	**1004430**	
			36°	16	**1004431**	
			60°	19	**1004432**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® M
CL, PHASE





220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium

● black



○ white

Options	GBP
All M versions	**109.00**
All M DALI versions	**133.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring M		
○ white	**1006168**	**3.00**
● copper	**1008141**	**8.00**
● gold	**1008145**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004218**	
			36°	16	**1004219**	
			60°	22	**1004220**	
	3000 K	1800 lm	24°	16	**1004226**	
			36°	16	**1004227**	
			60°	22	**1004228**	
	4000 K	1950 lm	24°	16	**1004234**	
			36°	16	**1004235**	
			60°	22	**1004236**	
Dali Touch	2700 K	1750 lm	24°	16	**1004506**	
			36°	16	**1004507**	
			60°	22	**1004508**	
	3000 K	1800 lm	24°	16	**1004514**	
			36°	16	**1004515**	
			60°	22	**1004516**	
	4000 K	1950 lm	24°	16	**1004522**	
			36°	16	**1004523**	
			60°	22	**1004524**	
C	2700 K	1750 lm	24°	16	**1004222**	
			36°	16	**1004223**	
			60°	22	**1004224**	
	3000 K	1800 lm	24°	16	**1004230**	
			36°	16	**1004231**	
			60°	22	**1004232**	
	4000 K	1950 lm	24°	16	**1004238**	
			36°	16	**1004239**	
			60°	22	**1004240**	
Dali Touch	2700 K	1750 lm	24°	16	**1004510**	
			36°	16	**1004511**	
			60°	22	**1004512**	
	3000 K	1800 lm	24°	16	**1004518**	
			36°	16	**1004519**	
			60°	22	**1004520**	
	4000 K	1950 lm	24°	16	**1004526**	
			36°	16	**1004527**	
			60°	22	**1004528**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® L
CL, PHASE





220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium

Options	GBP
All L versions	**126.00**
All L DALI versions	**170.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring L		
○ white	**1006169**	**3.00**
● copper	**1008142**	**9.00**
● gold	**1008146**	**9.00**

● black



○ white

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004314**	
			36°	16	**1004315**	
			60°	19	**1004316**	
	3000 K	2400 lm	24°	16	**1004322**	
			36°	16	**1004323**	
			60°	19	**1004324**	
	4000 K	2600 lm	24°	16	**1004330**	
			36°	16	**1004331**	
			60°	19	**1004332**	
Dali Touch	2700 K	2300 lm	24°	16	**1004602**	
			36°	16	**1004603**	
			60°	19	**1004604**	
	3000 K	2400 lm	24°	16	**1004610**	
			36°	16	**1004611**	
			60°	19	**1004612**	
	4000 K	2600 lm	24°	16	**1004618**	
			36°	16	**1004619**	
			60°	19	**1004620**	
C	2700 K	2300 lm	24°	16	**1004318**	
			36°	16	**1004319**	
			60°	19	**1004320**	
	3000 K	2400 lm	24°	16	**1004326**	
			36°	16	**1004327**	
			60°	19	**1004328**	
	4000 K	2600 lm	24°	16	**1004334**	
			36°	16	**1004335**	
			60°	19	**1004336**	
Dali Touch	2700 K	2300 lm	24°	16	**1004606**	
			36°	16	**1004607**	
			60°	19	**1004608**	
	3000 K	2400 lm	24°	16	**1004614**	
			36°	16	**1004615**	
			60°	19	**1004616**	
	4000 K	2600 lm	24°	16	**1004622**	
			36°	16	**1004623**	
			60°	19	**1004624**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® XL
CL, PHASE



220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: aluminium

● black



○ white

Options	GBP
All XL versions	**150.00**
All XL DALI versions	**202.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring XL		
○ white	**1006170**	**4.00**
● copper	**1008143**	**9.50**
● gold	**1008147**	**9.50**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	3550 lm	24°	16	**1005687**	
			36°	16	**1005688**	
		3150 lm	60°	22	**1005689**	
	3000 K	3550 lm	24°	16	**1005693**	
			36°	16	**1005694**	
		3150 lm	60°	22	**1005695**	
	4000 K	3900 lm	24°	16	**1005699**	
			36°	16	**1005700**	
		3500 lm	60°	22	**1005701**	
Dali Touch	2700 K	3550 lm	24°	16	**1005759**	
			36°	16	**1005760**	
		3150 lm	60°	22	**1005761**	
	3000 K	3550 lm	24°	16	**1005765**	
			36°	16	**1005766**	
		3150 lm	60°	22	**1005767**	
	4000 K	3900 lm	24°	16	**1005771**	
			36°	16	**1005772**	
		3500 lm	60°	22	**1005773**	
C	2700 K	3550 lm	24°	16	**1005690**	
			36°	16	**1005691**	
		3150 lm	60°	22	**1005692**	
	3000 K	3550 lm	24°	16	**1005696**	
			36°	16	**1005697**	
		3150 lm	60°	22	**1005698**	
	4000 K	3900 lm	24°	16	**1005702**	
			36°	16	**1005703**	
		3500 lm	60°	22	**1005704**	
Dali Touch	2700 K	3550 lm	24°	16	**1005762**	
			36°	16	**1005763**	
		3150 lm	60°	22	**1005764**	
	3000 K	3550 lm	24°	16	**1005768**	
			36°	16	**1005769**	
		3150 lm	60°	22	**1005770**	
	4000 K	3900 lm	24°	16	**1005774**	
			36°	16	**1005775**	
		3500 lm	60°	22	**1005776**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRIP! S
CL, single, PHASE, Ø 3 cm

UPDATE



IP20 IK02 29° 340° 90°

50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 260 mA
Total wattage: 11 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE CRI 90

600 lm|2700 K | 650 lm|3000 K

Options	Prod. no.	GBP
white/black 2700 K	1009036	135.00
white/black 3000 K	1009037	135.00
black/gold 2700 K	1009038	135.00
black/gold 3000 K	1009039	135.00
bronze/black 2700 K	1009040	135.00
bronze/black 3000 K	1009041	135.00
gold/black 2700 K	1009042	135.00
gold/black 3000 K	1009043	135.00

⊕

Product	Prod. no.	GBP
GRIP! S decorative ring		
white	1008488	15.00
black	1008489	15.00
nickel	1008490	15.00
gold	1008491	15.00

GRIP! S
CL, double, PHASE, Ø 3 cm

UPDATE



IP20 IK02 29° 340° 90°

50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 260 mA
Total wattage: 21 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE CRI 90

600 lm|2700 K | 650 lm|3000 K

Options	Prod. no.	GBP
white/black 2700 K	1009044	229.00
white/black 3000 K	1009045	229.00
black/gold 2700 K	1009046	229.00
black/gold 3000 K	1009047	229.00
bronze/black 2700 K	1009048	229.00
bronze/black 3000 K	1009049	229.00
gold/black 2700 K	1009050	229.00
gold/black 3000 K	1009051	229.00

⊕

Product	Prod. no.	GBP
GRIP! S decorative ring		
white	1008488	15.00
black	1008489	15.00
nickel	1008490	15.00
gold	1008491	15.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRIP! M
CL, single, PHASE, Ø 4,3 cm

UPDATE



220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium

• Honeycomb accessories included

LED INSIDE CRI 90

Down	1450 lm	2700 K
	1540 lm	3000 K

Options	Prod. no.	GBP
white/black 2700 K	1009068	152.00
white/black 3000 K	1009069	152.00
black/gold 2700 K	1009070	152.00
black/gold 3000 K	1009071	152.00
bronze/black 2700 K	1009072	152.00
bronze/black 3000 K	1009073	152.00
gold/black 2700 K	1009074	152.00
gold/black 3000 K	1009075	152.00

⊕

Product	Prod. no.	GBP
GRIP! M decorative ring		
white	1008492	17.00
black	1008493	17.00
nickel	1008494	17.00
gold	1008495	17.00

TEL: 020 8 542 1471 EMAIL:SALES@NTALITE.CO.UK

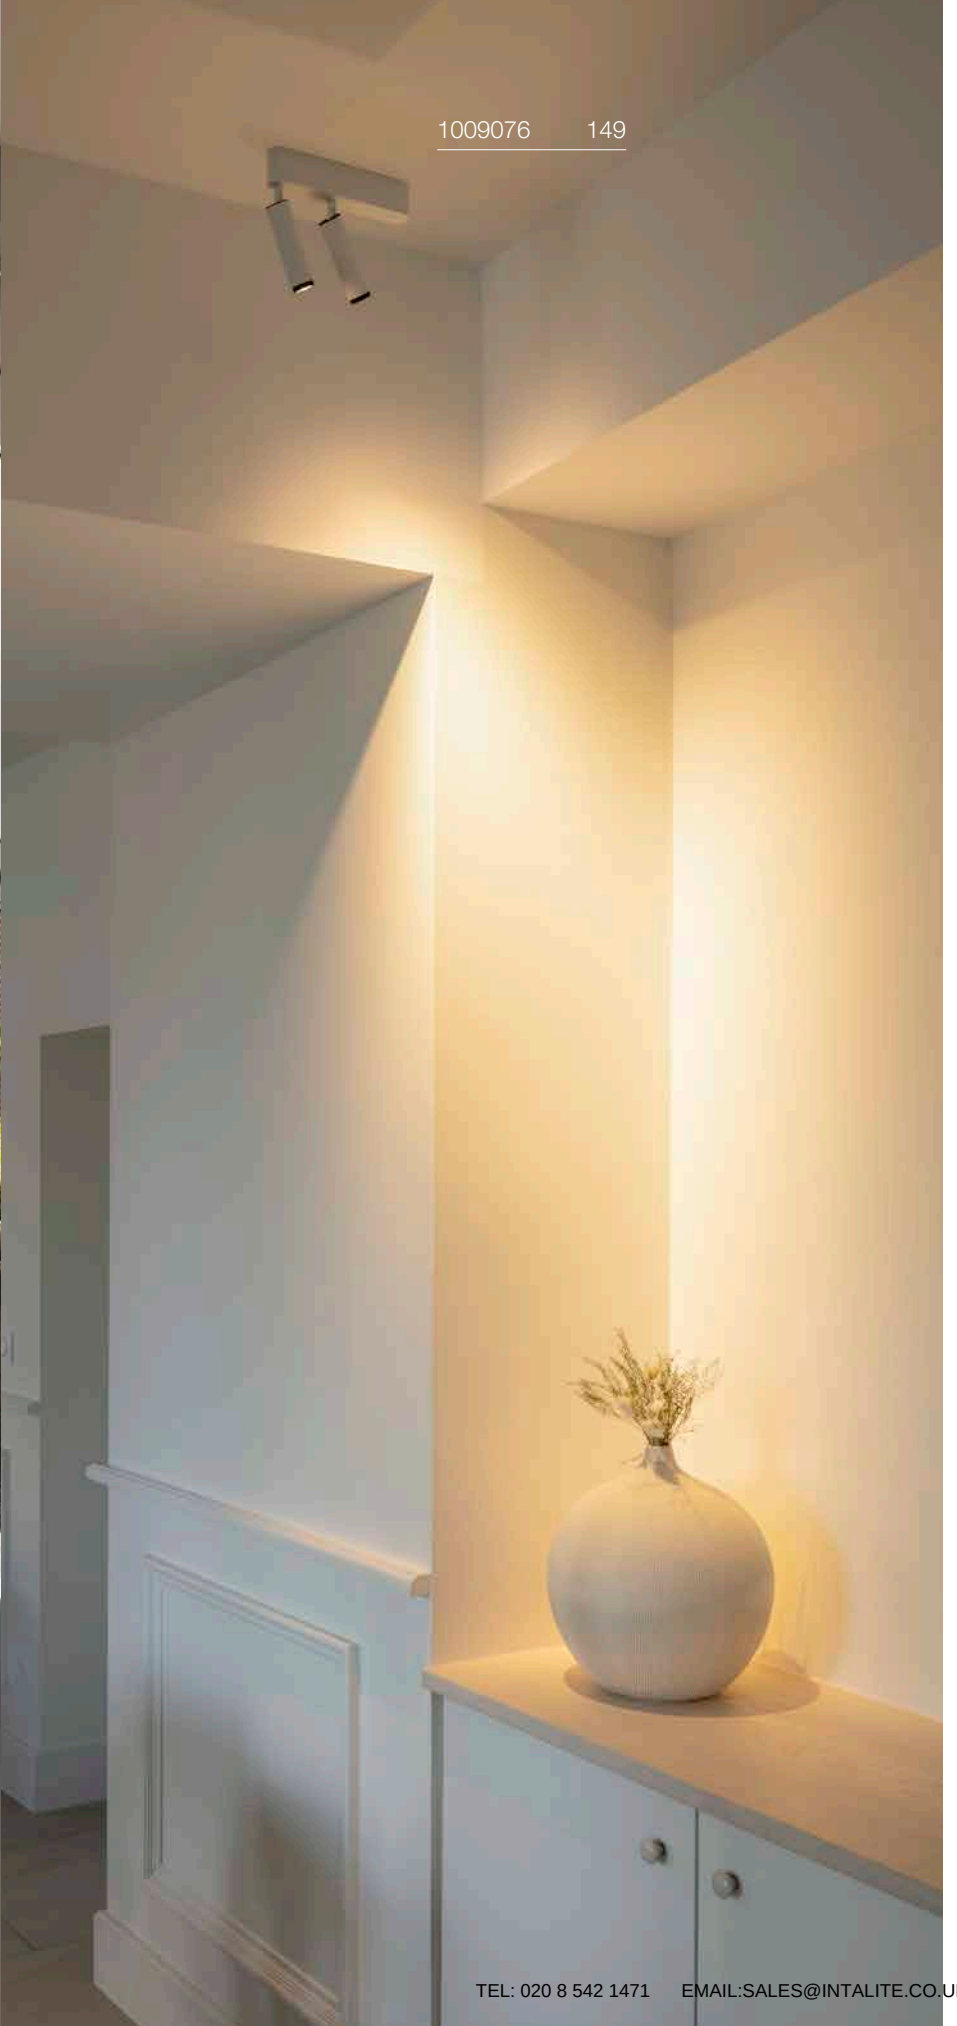

GRIP! M

CL, double, PHASE, Ø 4,3 cm

UPDATE



IP20 IK02 42° 340° 90°

50 000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 28 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE CRI 90

Down	1460 lm	2700 K
	1520 lm	3000 K

Options	Prod. no.	GBP
white/black 2700 K	1009076	254.00
white/black 3000 K	1009077	254.00
black/gold 2700 K	1009078	254.00
black/gold 3000 K	1009079	254.00
bronze/black 2700 K	1009080	254.00
bronze/black 3000 K	1009081	254.00
gold/black 2700 K	1009082	254.00
gold/black 3000 K	1009083	254.00

Product	Prod. no.	GBP
GRIP! M decorative ring		
white	1008492	17.00
black	1008493	17.00
nickel	1008494	17.00
gold	1008495	17.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRIP! L
CL, single, QPAR51 Ø 5,7 cm

UPDATE



IP20 IK02 340° 90°

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
white/black	1009092	84.00
black/gold	1009093	84.00
bronze/black	1009094	84.00
gold/black	1009095	84.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kWh/1000 h

C,L

Prod. no.: 1005079 7.00 GBP

Product	Prod. no.	GBP
Decorative ring Ø 5.4 cm		
white	1008496	20.00
black	1008497	20.00
nickel	1008498	20.00
gold	1008499	20.00

GRIP! L
CL, double, QPAR51 Ø 5,7 cm

UPDATE



IP20 IK02 340° 90°

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
white/black	1009096	144.00
black/gold	1009097	144.00
bronze/black	1009098	144.00
gold/black	1009099	144.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kWh/1000 h

C,L

Prod. no.: 1005079 7.00 GBP

Product	Prod. no.	GBP
Decorative ring Ø 5.4 cm		
white	1008496	20.00
black	1008497	20.00
nickel	1008498	20.00
gold	1008499	20.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

OCULUS CL
DTW, PVD

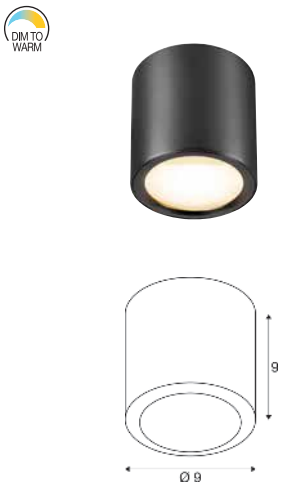

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

INSIDE CRI 90

Down 36 lm|2000 K – 780 lm|3000 K

Options	Prod. no.	GBP
brass	**1008619**	**245.00**
dark bronze	**1008618**	**245.00**
dark copper	**1008620**	**245.00**

OCULUS
CL, PHASE

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

- Additional frosted lens included

INSIDE CRI 90

36 lm|2000 K – 780 lm|3000 K

Options	Prod. no.	GBP
black	**1004666**	**197.00**
white	**1004667**	**197.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ENOLA® B
CL, QPAR51



IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 35 W

Base: 1xGU10 | L: 8.5 cm

Options	Prod. no.	GBP
● black	**151810**	**46.00**
○ white	**151811**	**46.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kWh/1000 h

C,L

Prod. no.: 1005079 7.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

ENOLA® C
CL



IP20 IK02 35° 40 000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium

LED INSIDE CRI 80

1020 lm | 3000 K

Options	Prod. no.	GBP
○ white	**152101**	**170.00**

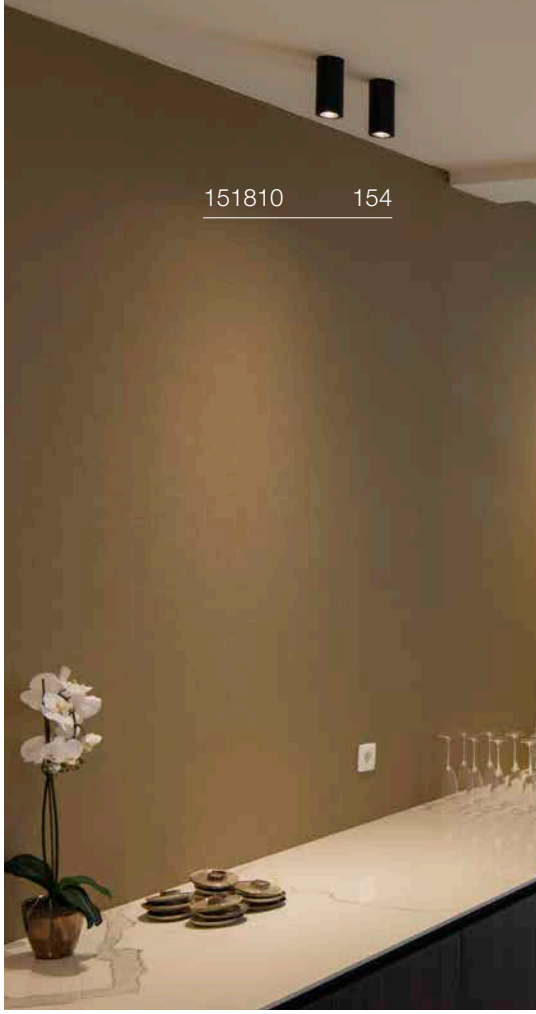

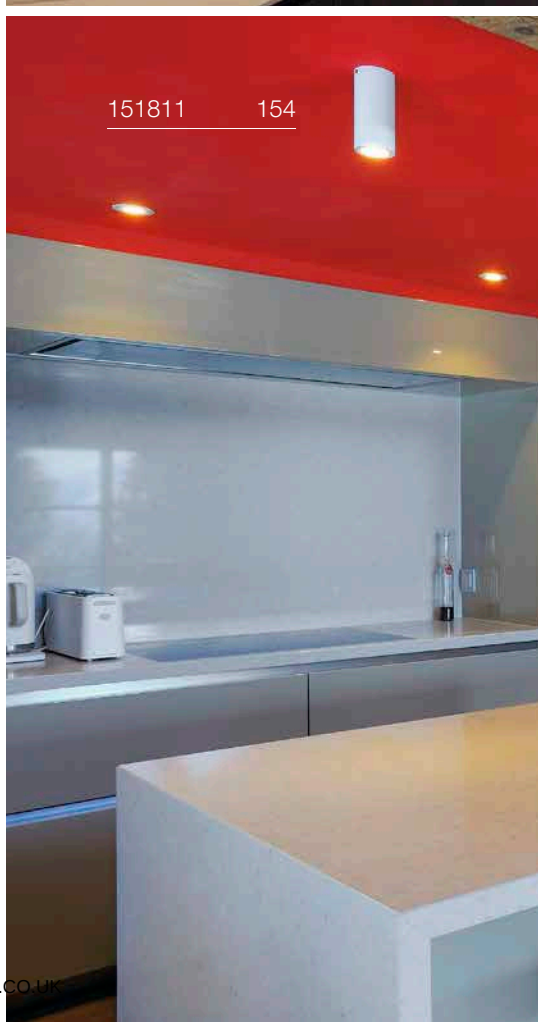

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ANELA
CL, PHASE



IP20 IK02 28° 30000 h L80B20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: aluminium

LED INSIDE CRI 90

240 lm | 3000 K | 820 lm

Options	Prod. no.	GBP
● black	**1000807**	**138.00**

⊕

Product	Prod. no.	GBP
Reflector 28°		
● gold	**1000809**	**17.00**
● grey	**1000810**	**17.00**
● black	**1000811**	**17.00**
○ white	**1000812**	**17.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ASTO TUBE
CL, single, GU10



IP20

220-240 V ~50/60 Hz
Material: aluminium

- Decorative rings available as accessories

SOCKET INSIDE 10 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**1006439**	**43.00**
○ white	**1006440**	**43.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

ASTO TUBE
Decorative reflector

Ø: 6.8 cm
H: 3.95 cm
Material: polycarbonate (PC)

Options	Prod. no.	GBP
black/chrome	**1007190**	**4.00**
gold	**1006450**	**4.00**
chrome	**1006449**	**4.00**
copper	**1006451**	**4.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

OCCULDAS 13
CL, indirect, PHASE



220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium

810 lm|3000 K

Options	Prod. no.	GBP
○ white	**117351**	**174.00**

OCCULDAS 23
CL, indirect, PHASE



220-240 V ~50/60 Hz | 700 mA
Total wattage: 24 W
Material: aluminium/steel

1500 lm|3000 K

Options	Prod. no.	GBP
○ white	**117321**	**286.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ALTRA DICE
CL, QPAR51



IP20

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 35 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**1002216**	**54.00**
○ white	**151511**	**54.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

ALTRA DICE
CW, double, QPAR51



IP20 350° 180°

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 50 W

Base: 2xGU10

Options	Prod. no.	GBP
○ white	**151531**	**97.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kWh/1000 h

C

Prod. no.: 1005273 9.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

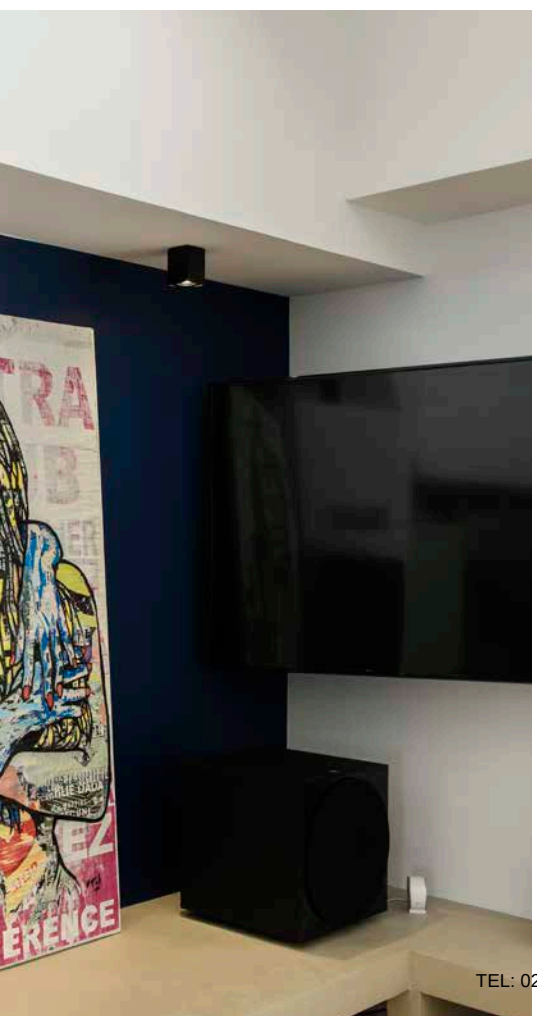

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

117101 161

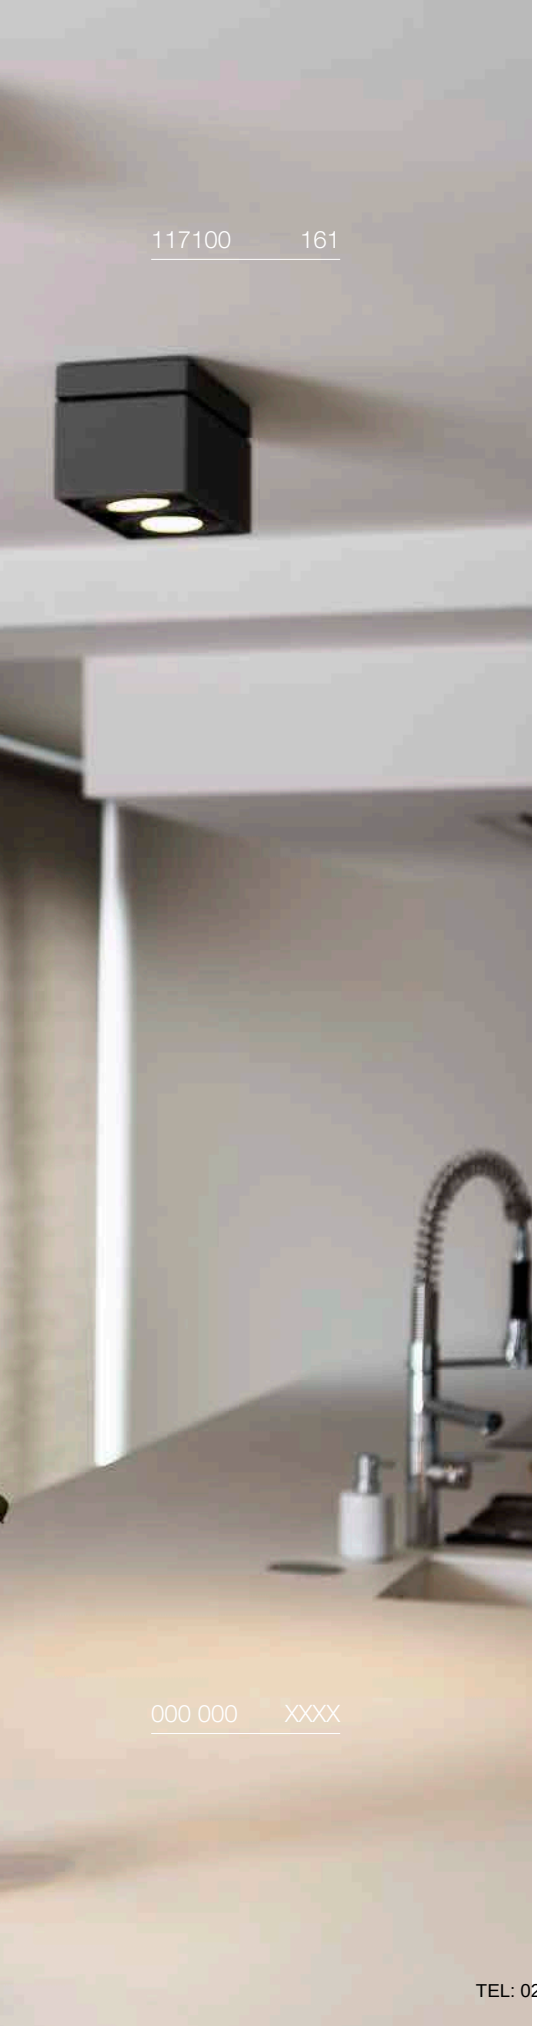

KARDAMOD
CL, single, square, QPAR111



IP20

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**117100**	**121.00**
○ white	**117101**	**121.00**

GU10 | 13 W | 10°
900 lm | 2700 K | EEC = G
13 kWh/1000 h

Prod. no.: 1005275 48.00 GBP

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: 1010467 50.00 GBP

KARDAMOD
CL, double, square, QPAR111



IP20

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 75 W

Base: 2xGU10

Options	Prod. no.	GBP
● black	**117110**	**217.00**
○ white	**117111**	**217.00**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G
12 kWh/1000 h

Prod. no.: 1005297 73.00 GBP

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: 1010467 50.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

OPEN
STEVE McQUEEN
AYRTON SENNA

FENDA
Ceiling rosette, E27



IP20

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 60 W

Base: 1xE27

Options	Prod. no.	GBP
● black	**155550**	**41.00**
○ white	**155551**	**41.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kWh/1000 h

Prod. no.: **1005303** **9.00 GBP**

FENDA
30 cm, round

Ø: 30 cm
H: 20 cm
Material: textile/steel

Options	Prod. no.	GBP
black/copper	**155592**	**61.00**
○ white	**155582**	**46.00**
grey	**1004774**	**46.00**
beige	**155583**	**46.00**

FENDA
45 cm, round

Ø: 45.5 cm
H: 28 cm
Material: textile/steel

Options	Prod. no.	GBP
black/copper	**156122**	**76.00**
○ white	**156111**	**72.00**
grey	**1004775**	**72.00**
beige	**156113**	**72.00**

⊕

Product	Prod. no.	GBP
Acrylic glass cover, for FENDA Ø 45.5 cm		
○ white	**156100**	**39.00**

FENDA
70 cm, round

Ø: 70 cm
H: 36 cm
Material: textile/steel

• Not suitable for Fenda Bow

Options	Prod. no.	GBP
black/copper	**1000580**	**110.00**
○ white	**1000579**	**97.00**

⊕

Product	Prod. no.	GBP
Acrylic glass cover, for FENDA Ø 70 cm		
○ white	**1000957**	**81.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TENORA
CL, E27



IP20

220-240 V ~50/60 Hz
Material: steel/textile

SOCKET INSIDE 23 W

Base: 3XE27	L: 14.8 cm

Options	Prod. no.	GBP
● black	**156050**	**161.00**
○ white	**156051**	**161.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kWh/1000 h

Prod. no.: **1005303** **9.00 GBP**

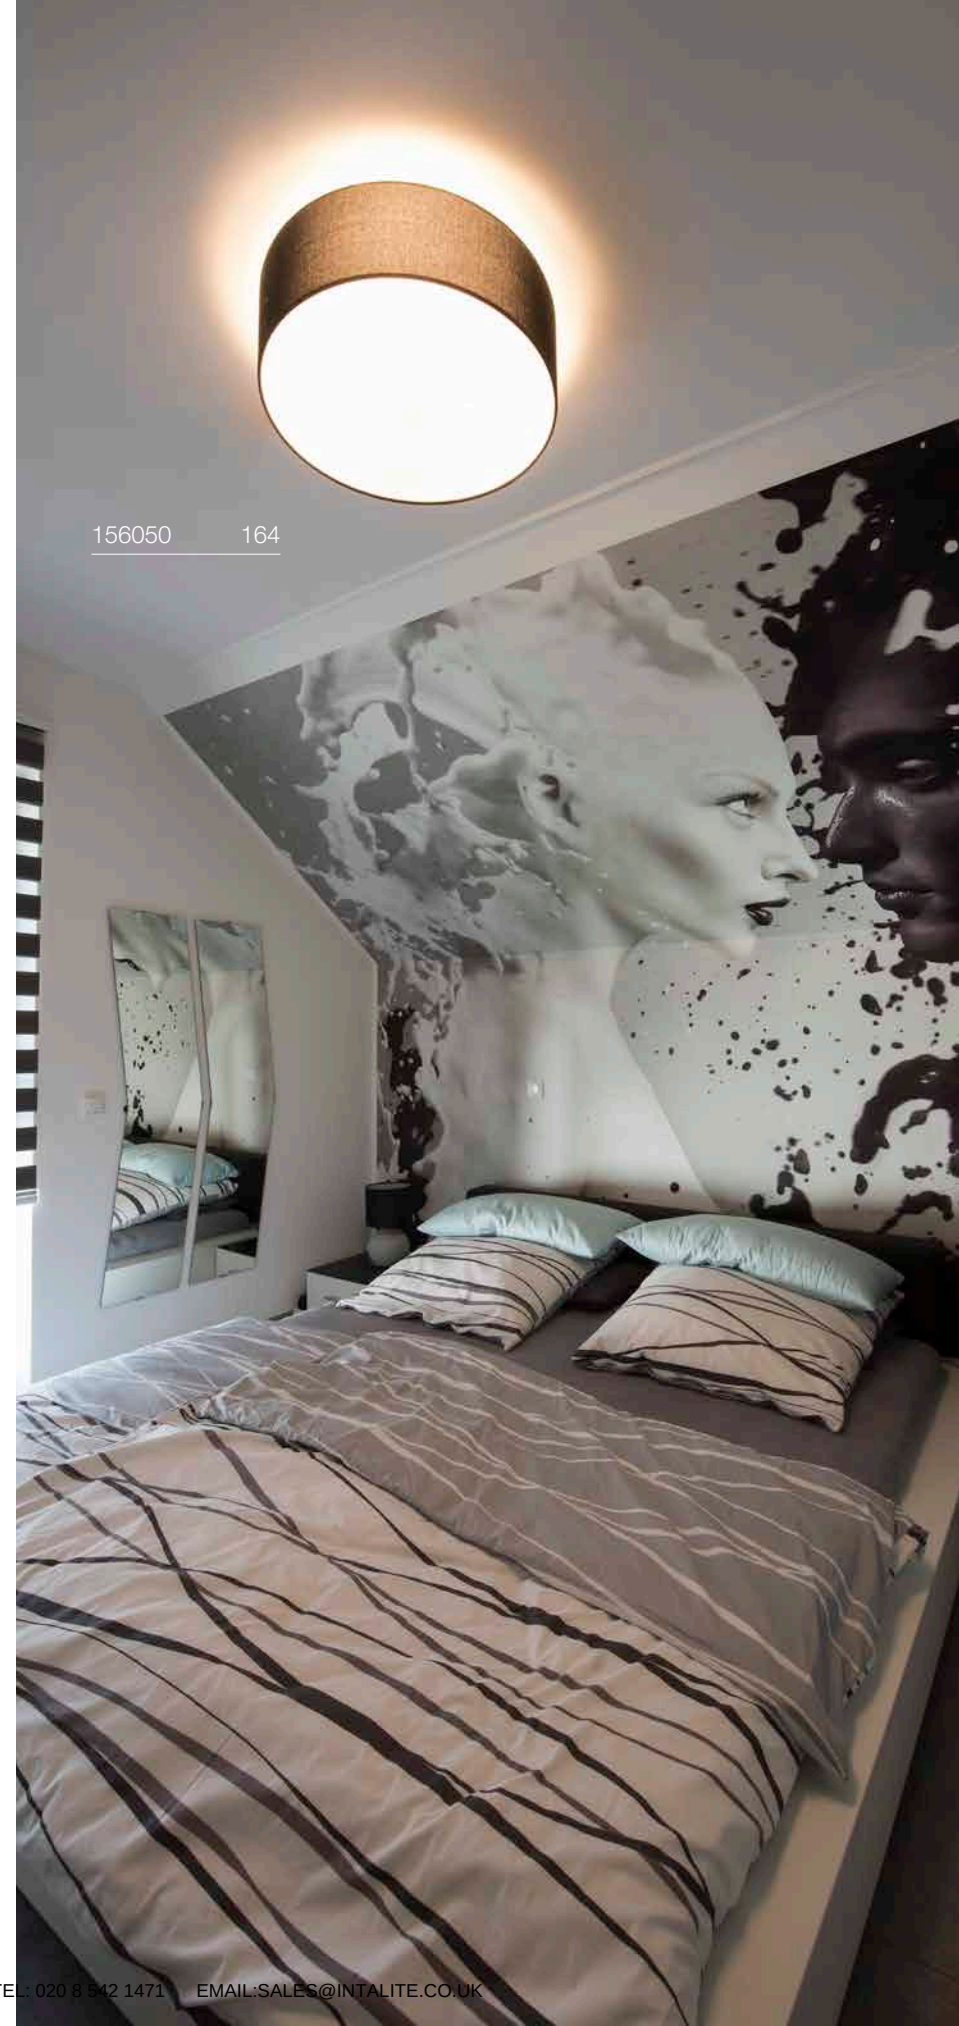

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SOPRANA
CL, E27

155373 165



IP20

220-240 V ~50/60 Hz
Material: steel/textile

SOCKET INSIDE 60 W

Base: 3XE27

Options	Prod. no.	GBP
beige	**155373**	**177.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kWh/1000 h

Prod. no.: 1005302 11.00 GBP

SMART

E27 | 9.5 W | 190°
1100 lm | 2200-6500 K | EEC = F
10 kWh/1000h

Prod. no.: 1010465 30.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

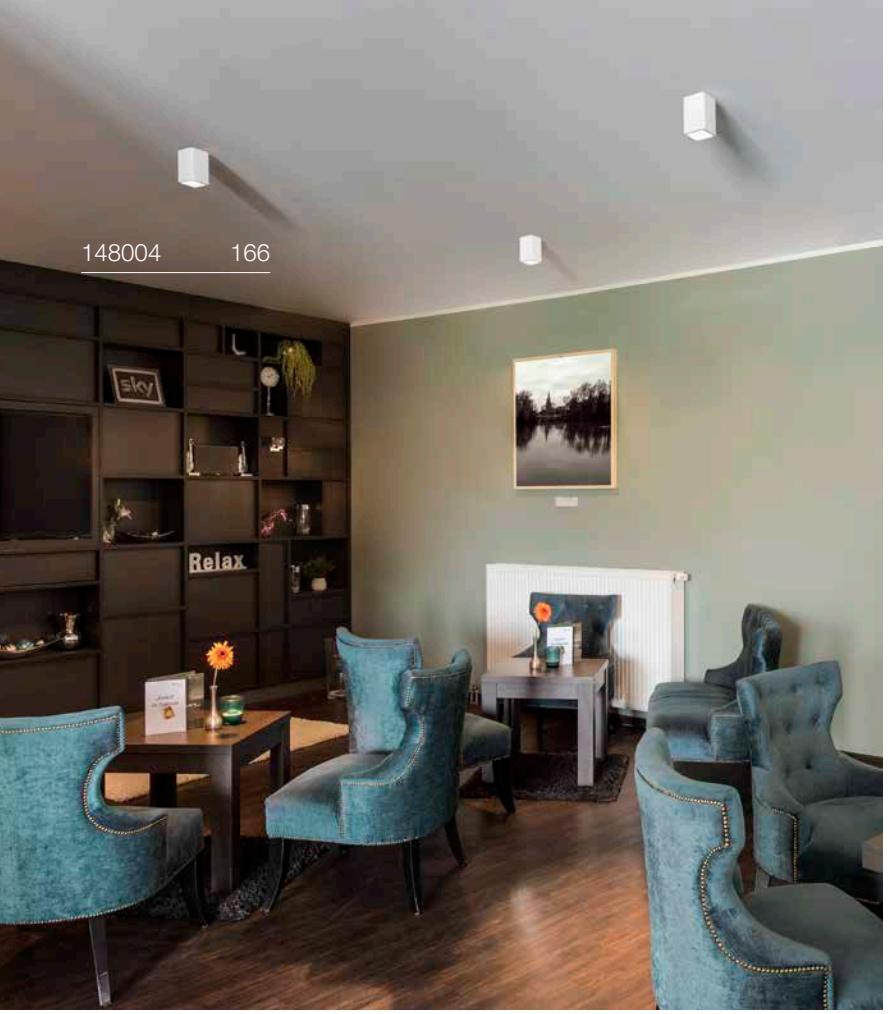

PLASTRA
CL



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE 35 W

Base: 1xGU10

Options	Prod. no.	GBP
○ white	**148004**	**58.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kWh/1000 h

C,L

Prod. no.: **1005076** **7.00 GBP**

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: **1010470** **33.00 GBP**

PLASTRA
CL, PHASE



C,L 110° 30000h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: plaster/glass

- Can be painted over/wallpapered to match wall colour

INSIDE

990 lm | 3000 K

Options	Prod. no.	GBP
○ white	**148005**	**115.00**

PLASTRA 105
CL, E27



IP20

220-240 V ~50/60 Hz
Material: plaster/glass

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE 25 W

Base: 2xE27 | max. Ø: 5.1 cm | L: 14 cm

Options	Prod. no.	GBP
○ white	**148001**	**79.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kWh/1000 h

C

Prod. no.: 1005289 9.00 GBP

PLASTRA 104
CL, E27



IP20

220-240 V ~50/60 Hz
Material: plaster/glass

- Can be painted over/wallpapered to match wall colour

SOCKET INSIDE 25 W

Base: 2xE27 | max. Ø: 5.1 cm | L: 14 cm

Options	Prod. no.	GBP
○ white	**148002**	**73.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kWh/1000 h

C

Prod. no.: 1005289 9.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FERA 25
CL, DALI



220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium

1580 lm | 3000 K	1650 lm | 4000 K

Options	Prod. no.	GBP
● black	**1002968**	**232.00**
○ white	**1002967**	**232.00**

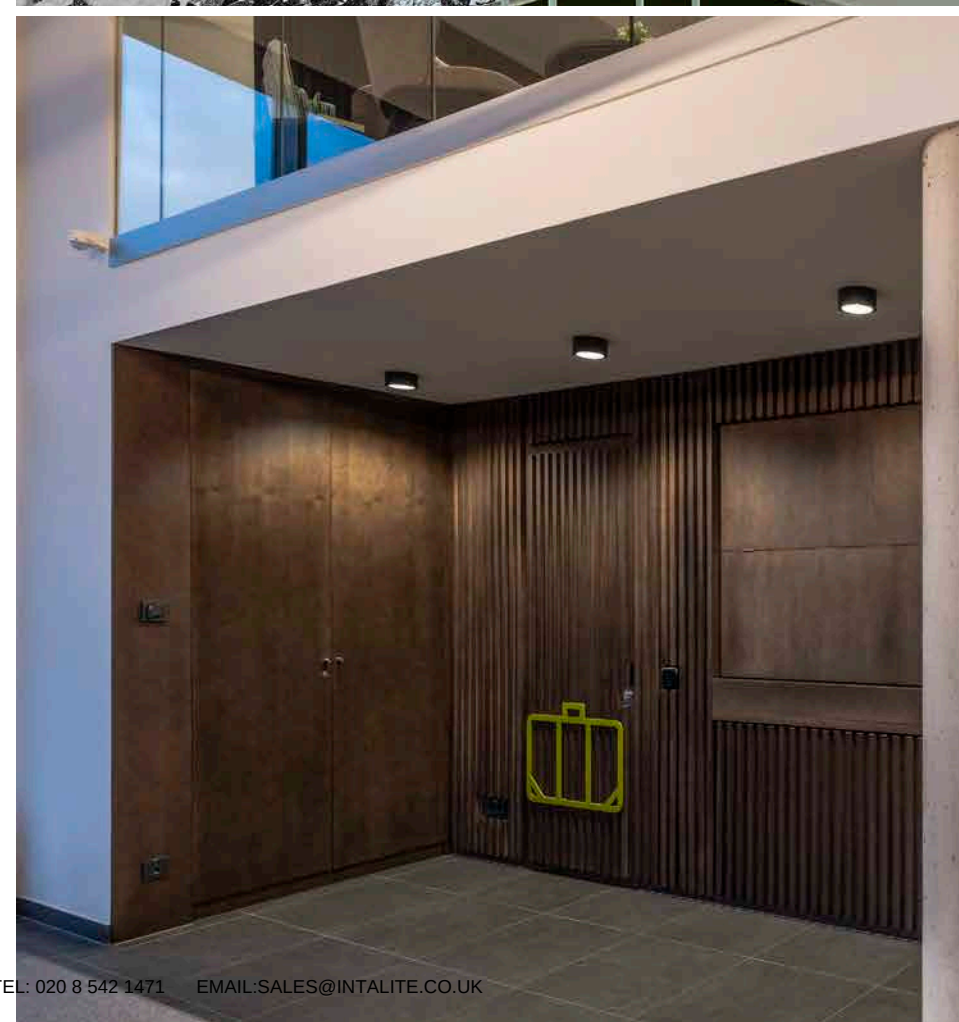

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

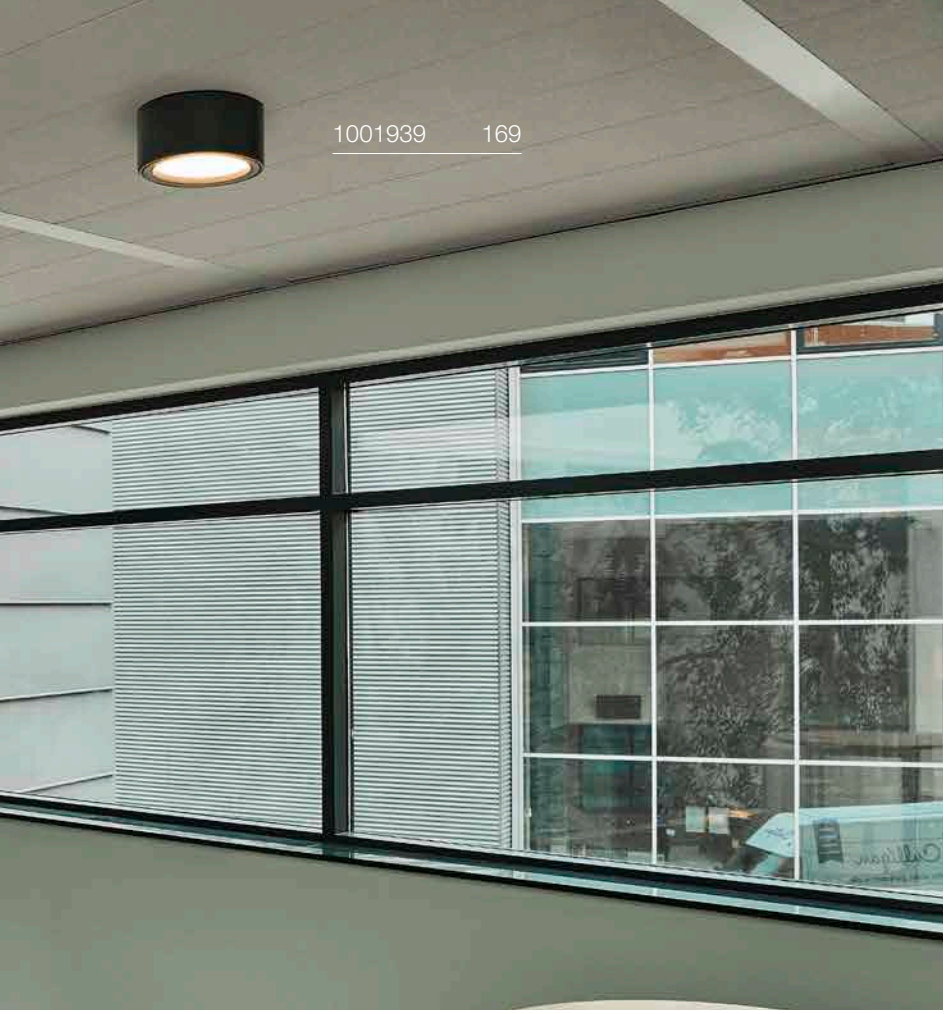

FERA 25
CL



220-240 V ~50/60 Hz | 550 mA
Total wattage: 23 W
Material: aluminium/polystyrene (PS)

1800 lm | 3000 K

Options	Prod. no.	GBP
● black	**1001939**	**173.00**
○ white	**161461**	**173.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008925 171

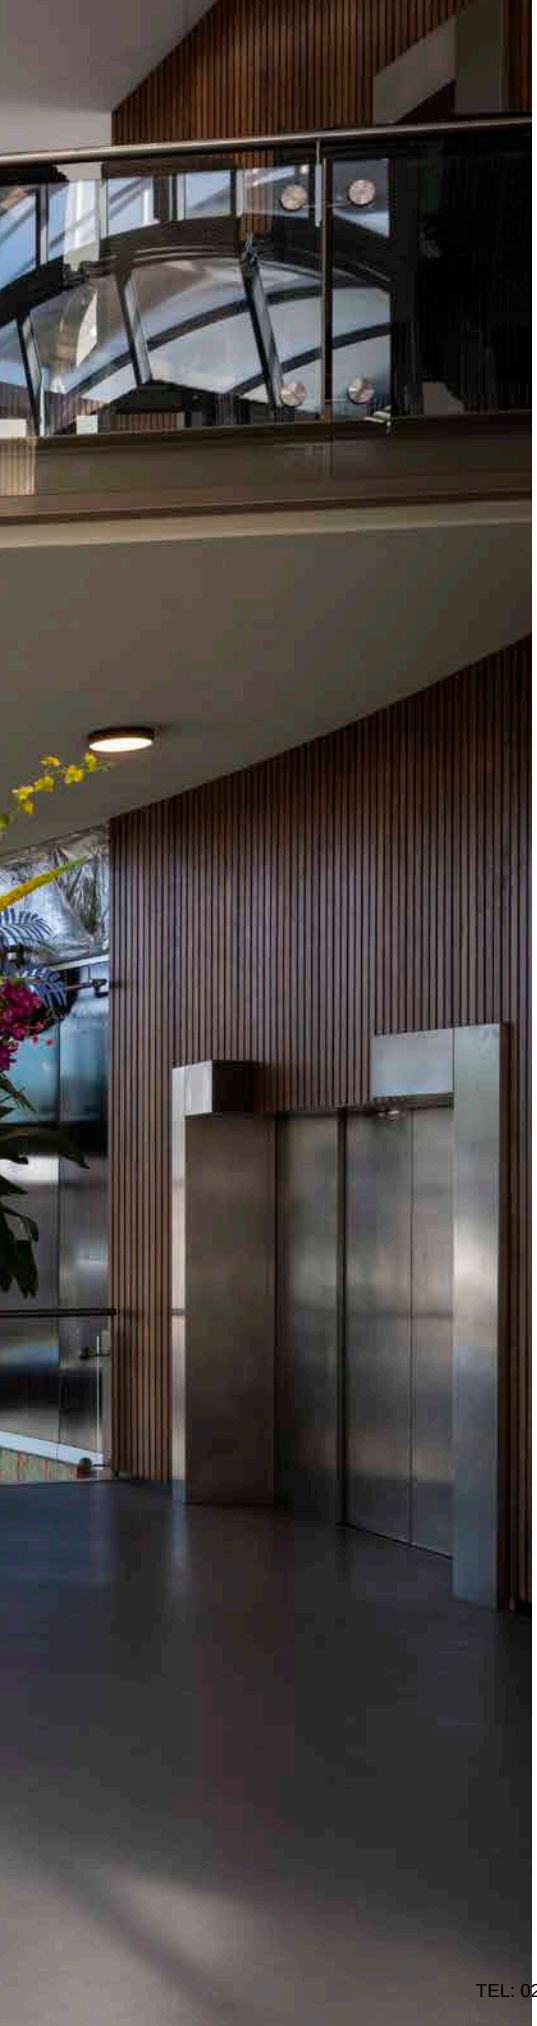

DECONA 30
CL, PHASE



IP44 IK06 50000h L80B50 UGR 25

220-240 V ~50/60 Hz | 230 mA
Total wattage: 18 W
Material: aluminium/PC

LED INSIDE CRI 90

1600 lm | 2700 K	1600 lm | 3000 K

Options	Prod. no.	GBP
black/gold	1008580	102.00
black	1008578	102.00
white/gold	1008579	102.00
white	1008577	102.00

DECONA 30
CL, Sensor

UPDATE

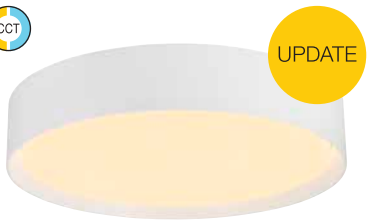



IP44 IK06 50000h L80B50 UGR 25

220-240 V ~50/60 Hz | 220 mA
Total wattage: 17 W
Material: aluminium/PC

LED INSIDE CRI 90

1680 lm | 2700 K	1840 lm | 3000 K

Options	Prod. no.	GBP
white	1008925	119.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

roobol.
Ingang
woonhart
lamp idee
U vindt ons op de 1e etage (boven Roobol)

1008584 173

DECONA 30
CL, PHASE



220-240 V ~50/60 Hz | 230 mA
Total wattage: 17 W
Material: aluminium/PC

1900 lm | 3000 K | 2000 lm | 4000 K

Options	Prod. no.	GBP
black/gold	1008920	102.00
black	1008918	102.00
white/gold	1008919	102.00
white	1008917	102.00

DECONA 30
CL, Sensor



220-240 V ~50/60 Hz | 220 mA
Total wattage: 17 W
Material: aluminium/PC

1880 lm | 3000 K | 1970 lm | 4000 K

Options	Prod. no.	GBP
white	1008926	119.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008580 175

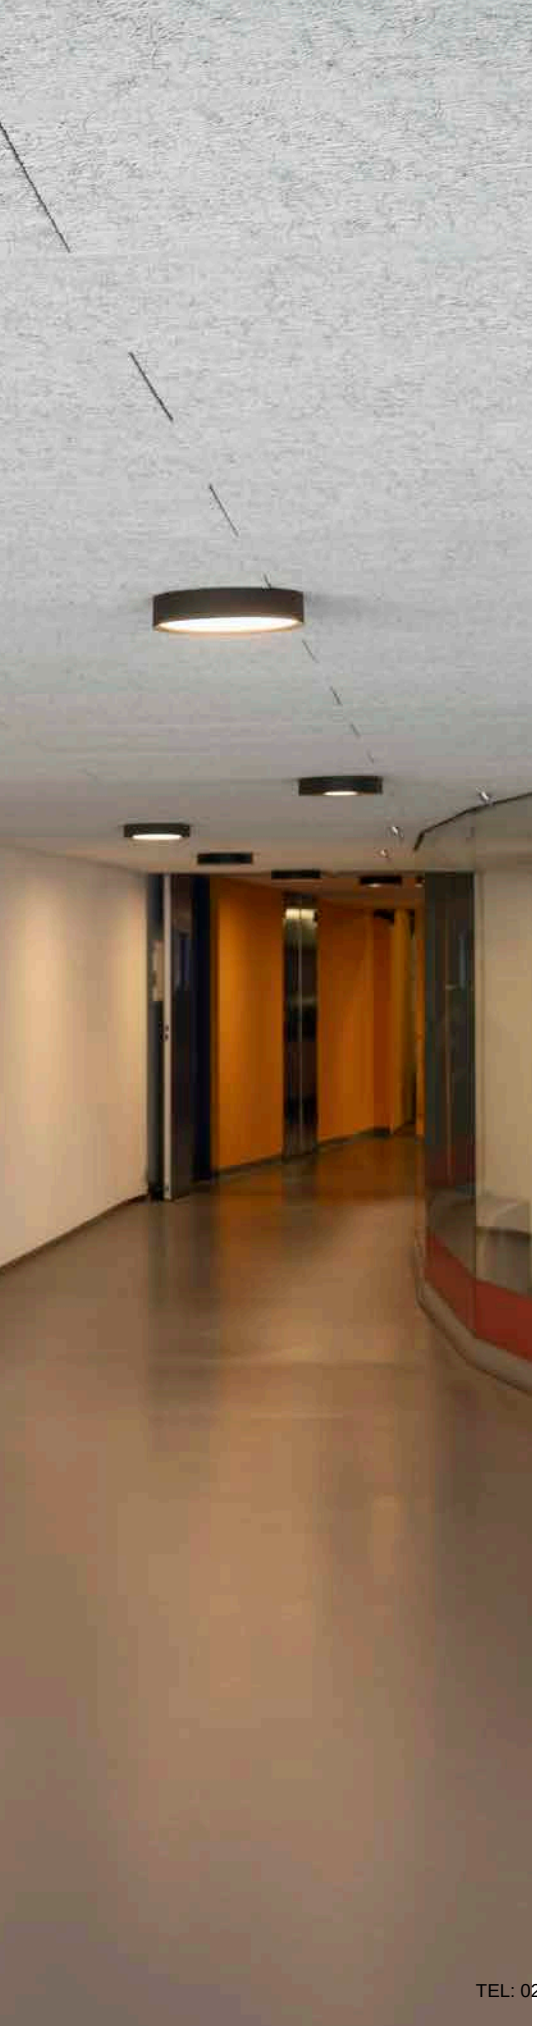

DECONA 42
CL, PHASE



IP44 IK06 50000h L80B50 UGR 25

220-240 V ~50/60 Hz | 300 mA
Total wattage: 23 W
Material: aluminium/PC

LED INSIDE CRI 90

2140 lm | 2700 K	2140 lm | 3000 K

Options	Prod. no.	GBP
black/gold	1008584	128.00
black	1008582	128.00
white/gold	1008583	128.00
white	1008581	128.00

DECONA 42
CL, Sensor

UPDATE



IP44 IK06 50000h L80B50 UGR 25

220-240 V ~50/60 Hz | 305 mA
Total wattage: 23 W
Material: aluminium/PC

LED INSIDE CRI 90

2450 lm | 2700 K	2710 lm | 3000 K

Options	Prod. no.	GBP
white	1008927	144.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DECONA 42
CL, PHASE



220-240 V ~50/60 Hz | 300 mA
Total wattage: 23 W
Material: aluminium/PC

2770 lm | 3000 K	2930 lm | 4000 K

Options	Prod. no.	GBP
black/gold	1008924	127.00
black	1008922	127.00
white/gold	1008923	127.00
white	1008921	127.00

DECONA 42
CL, Sensor



IP44 IK06 50000h L80B50 UGR 25

220-240 V ~50/60 Hz | 305 mA
Total wattage: 23 W
Material: aluminium/PC

LED INSIDE CRI 90

2680 lm | 3000 K	2850 lm | 4000 K

Options	Prod. no.	GBP
○ white	1008928 ●	144.00

DECONA
Mounting frame 310 mm

Ø: 31.3 cm
H: 7.5 cm
Material: aluminium

Options	Prod. no.	GBP
○ white	1008585	51.00

DECONA
Mounting frame 430 mm

Ø: 43.3 cm
H: 7.5 cm
Material: aluminium

Options	Prod. no.	GBP
○ white	1008586	60.00

DECONA
Suspension kit 1.50 m

IK06 150 cm

Material: steel

Options	Prod. no.	GBP
● black	1008587	24.00
○ white	1008588	24.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

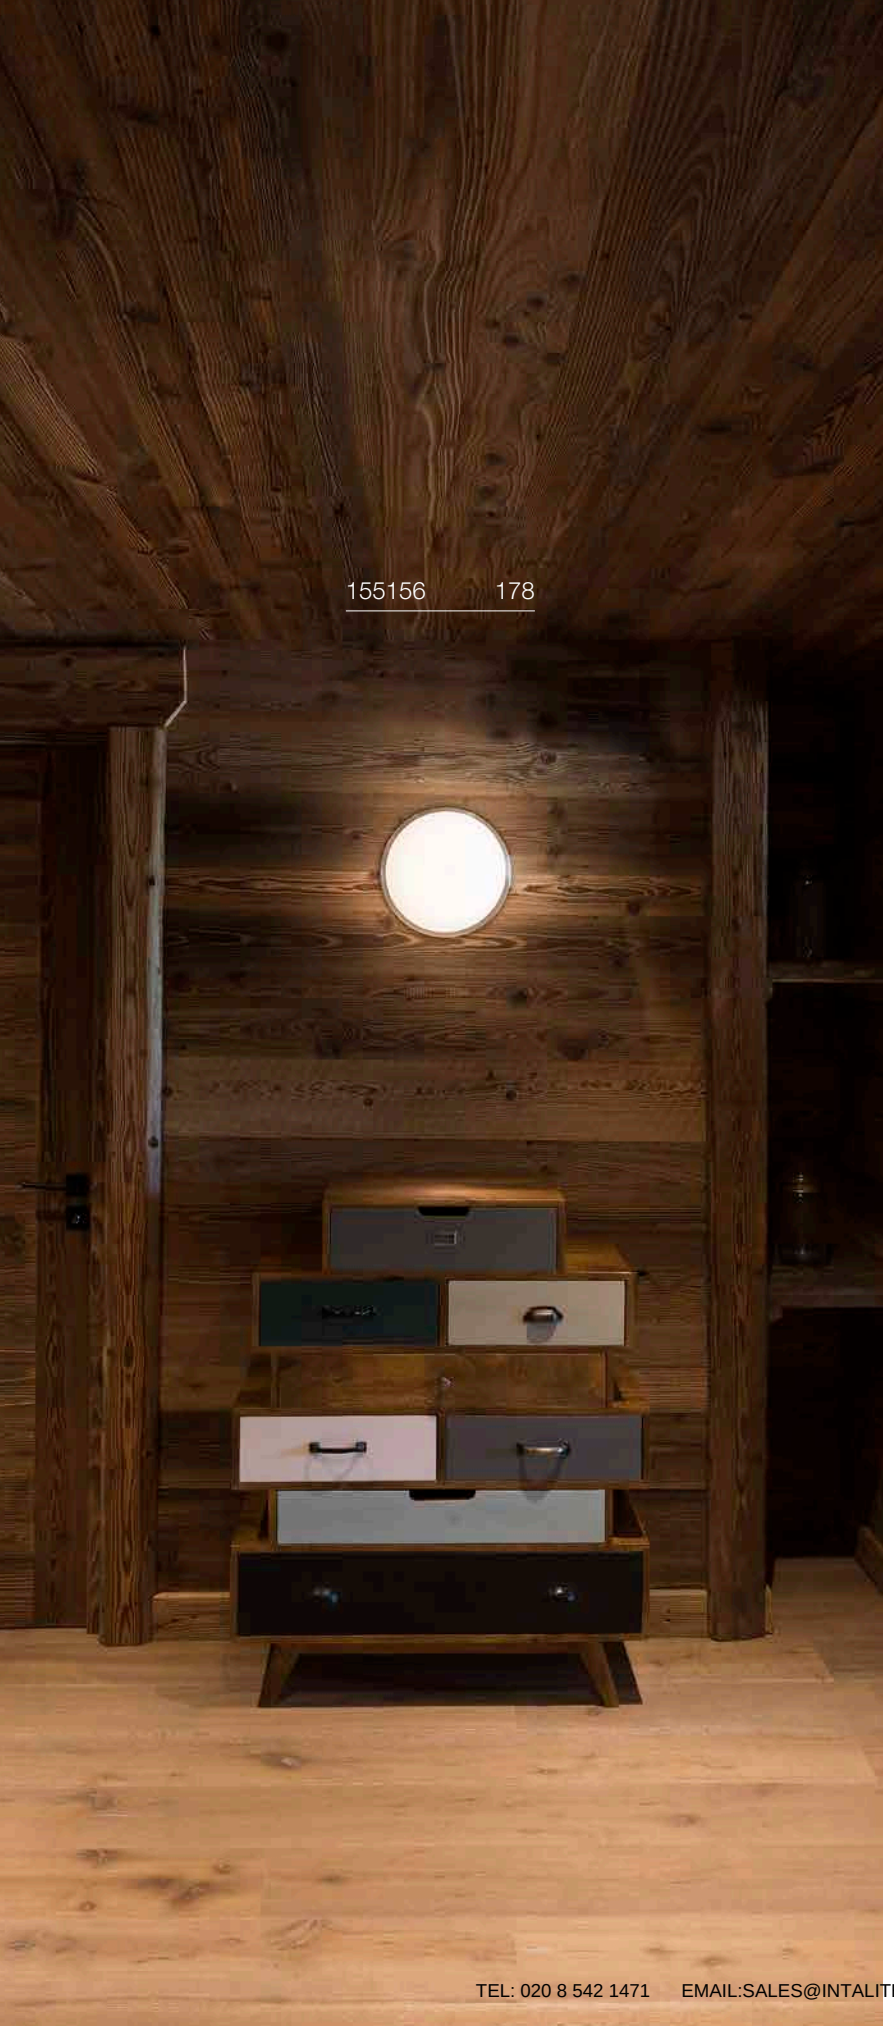

MARONA
CL, PHASE



220-240 V ~50/60 Hz | 430 mA
Total wattage: 15 W
Material: polymethylacrylate (PMMA)/steel

LED INSIDE

1200 lm|3000 K

Options	Prod. no.	GBP
grey	**155156**	**101.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

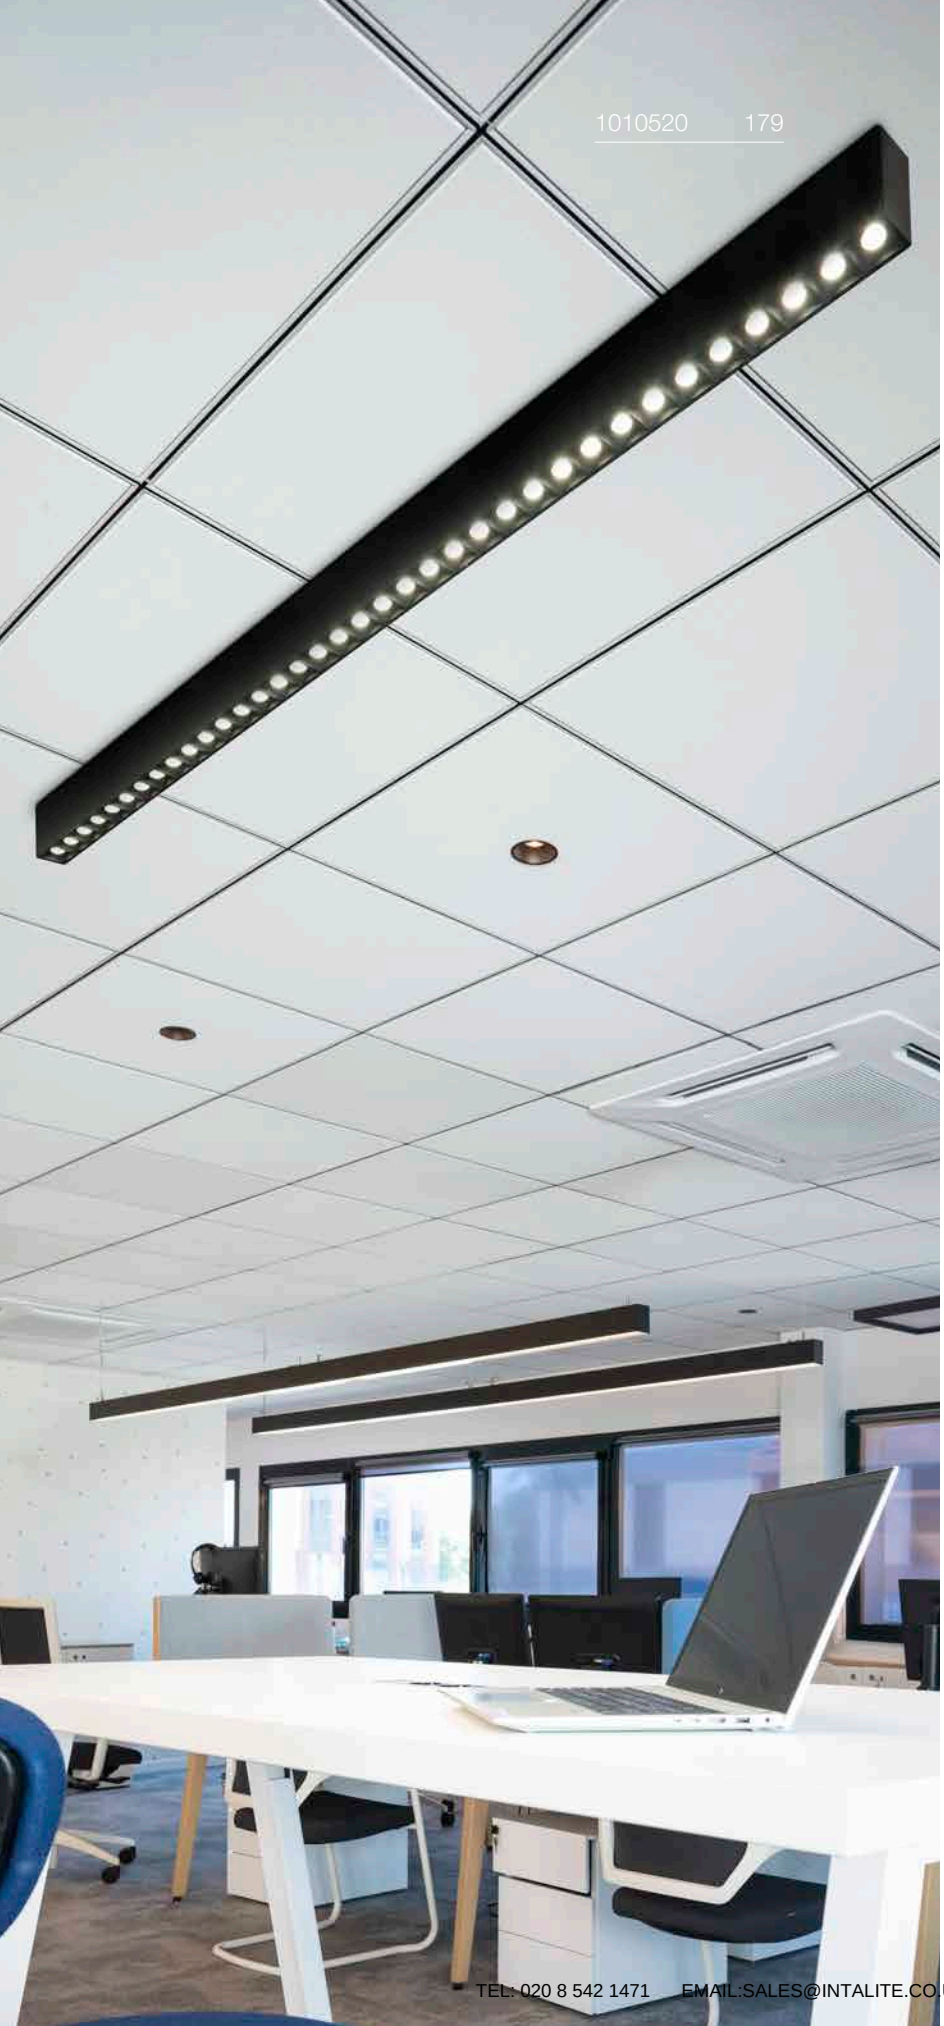

GLENOS® PRO
CL, 1,2 m, DALI, UGR19

NEW



220-240 V ~0/50/60 Hz | 750 mA
Total wattage: 30 W
Material: aluminium/plastic PC

3650 lm | 3000 K | 3900 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	1010518	373.00
● black 4000 K	1010520	373.00
◑ white/black 3000 K	1010517	373.00
◑ white/black 4000 K	1010519	373.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010425 181

PANEL 60
CL, round, PHASE



C,L IP20 IK02 50.000h L80B10 UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel

LED INSIDE

3050 lm | 3000 K	3300 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1010422**	**246.00**
● grey	**1010423**	**246.00**

PANEL 60
CL, round, DALI

DALI



Dali IP20 IK02 50.000h L80B10 UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel

LED INSIDE

3050 lm | 3000 K	3300 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1010424**	**254.00**
● grey	**1010425**	**254.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010791 227

QUIMERA | 187

MIX match

VARYT | 189

WUD | 191

SUN | 192–195

NEW

OLYPSO | 197

MAGICO | 199

NUMINOS® | 200–207

GRIP! S | 209

MEDO® RING | 210–211

MEDO® PRO | 212–219

MEDO® | 220–221

NEW

LALU® SET | 224–229

ONE FLAT | 231

ONE VERTICAL | 233

ONE CUBE | 235

ONE | 237–239

ONE DOUBLE | 240

ONE TRIPLE | 241

ONE LINEAR | 243

PANTILO ROPE | 245

PANTILO OVAL | 247

PANTILO | 247

PANTILO CONVEX | 248–249

LIGHT EYE® | 251

ASTO TUBE | 253

NEW

GLENOS® PRO | 255

WORKLIGHT | 257

WORKLIGHT PRO | 257

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PANEL 60 | 259

GLENOS® | 261

Q–LINE® | 263

GRIP! FLAT | 265

OCULUS | 266–267

FITU | 269

FENDA | 272–273

HELIA | 276–277

ENOLA® B | 279

ENOLA® | 279

ANELA | 279

PARA CONE | 281

PHELIA | 283

FORCHINI | 284–285

ROTOBALL | 287

PARA DOME | 288

PARA 380 | 289

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008033 187

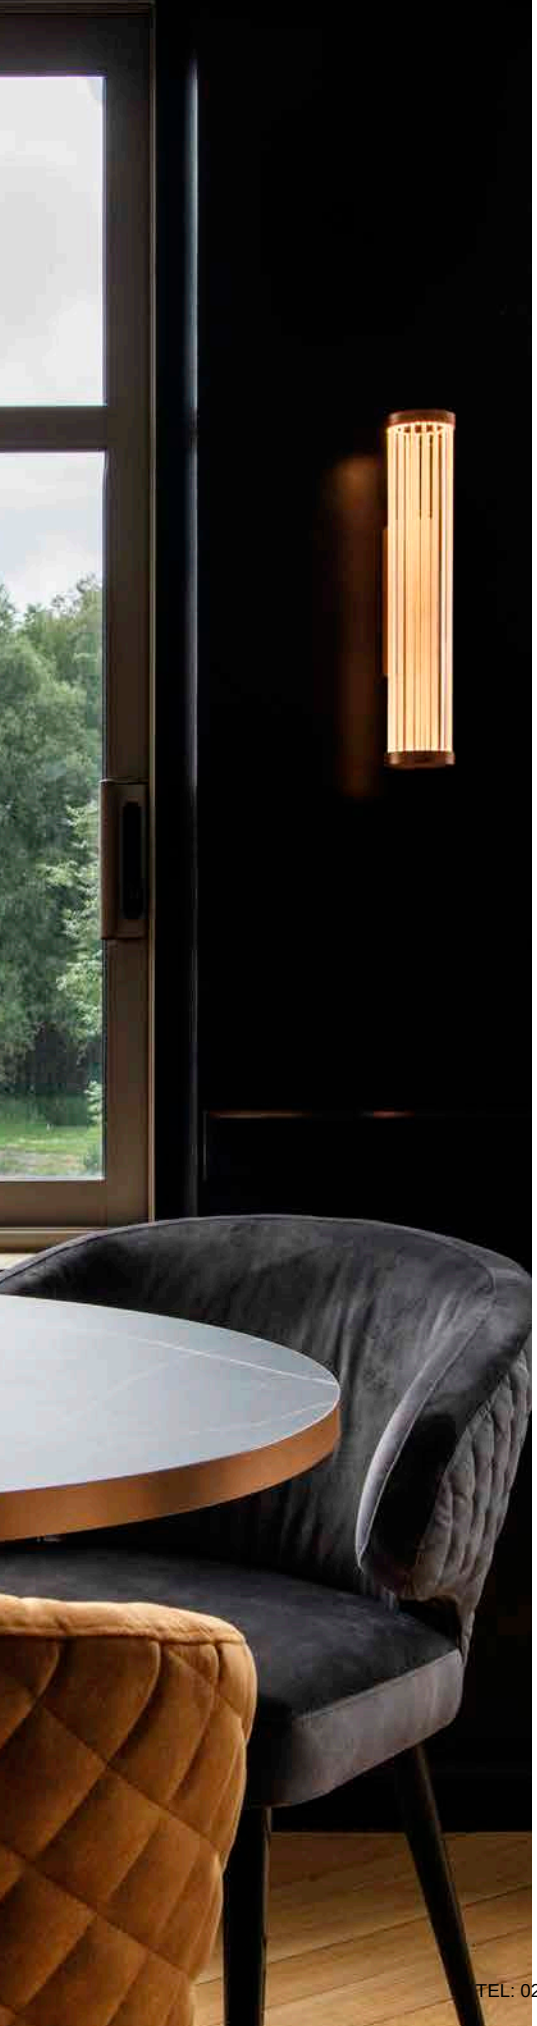

QUIMERA
PD, Phase





220-240 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W
Material: aluminium/glass

Indirect	330 lm | 2700 K	350 lm | 3000 K

Options	Prod. no.	GBP
brass	**1008033**	**317.00**
dark bronze	**1008032**	**317.00**
dark copper	**1008034**	**317.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008115 + 1008119 189

VARYT
PD, E14



IP20 IK02 150 cm

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xE14 | max. Ø: 11 cm | L: 3.8 cm

Options	Prod. no.	GBP
● black	1008114	94.00
○ white	1008115	94.00
● brass	1008117	120.00
◑ chrome	1008116	102.00
● copper	1008118	120.00

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F
5 kW/1000h

Prod. no.: **1005284** **6.00 GBP**

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 12 cm
H: 13 cm
Material: glass

Options	Prod. no.	GBP
○ white	1007859	59.00

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 11.5 cm
H: 13.5 cm
Material: glass

Options	Prod. no.	GBP
○ white	1007860	64.00

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 12 cm
H: 12.7 cm
Material: glass

Options	Prod. no.	GBP
● smoky grey	1007858	69.00
● amber	1008023	69.00

VARYT
Opal glass shade

IK02

Ø: 12 cm
H: 12.8 cm

Options	Prod. no.	GBP
○ white	1008119	51.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008045 191

WUD
PD, E27, half round

220-240 V ~50/60 Hz

- Natural material
- Open cable end
- Matching accessories can be found on page 271

Options	Prod. no.	GBP
natural	**1008045**	**151.00**

E27 | 7 W | 330°
650 lm | 2700 K | EEC = F
7 kW/1000h

Prod. no.: **1008157** **42.00 GBP**

WUD
PD, E27, cylindrical



220-240 V ~50/60 Hz

- Natural material
- Open cable end
- Matching accessories can be found on page 271

Options	Prod. no.	GBP
natural	**1008047**	**125.00**

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F
6 kW/1000h

Prod. no.: **1008152** **55.00 GBP**

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: **1010484** **27.00 GBP**

20 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SUN 20
PD, E27

UPDATE



IP20 400

220-240 V ~50/60 Hz
Material: aluminium

- Open cable end
- Matching accessories can be found on page 271

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 12 cm

Options	Prod. no.	GBP
● black	1008139	85.00
● gold	1008138	82.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: **1005289** **9.00 GBP**

1008139 192

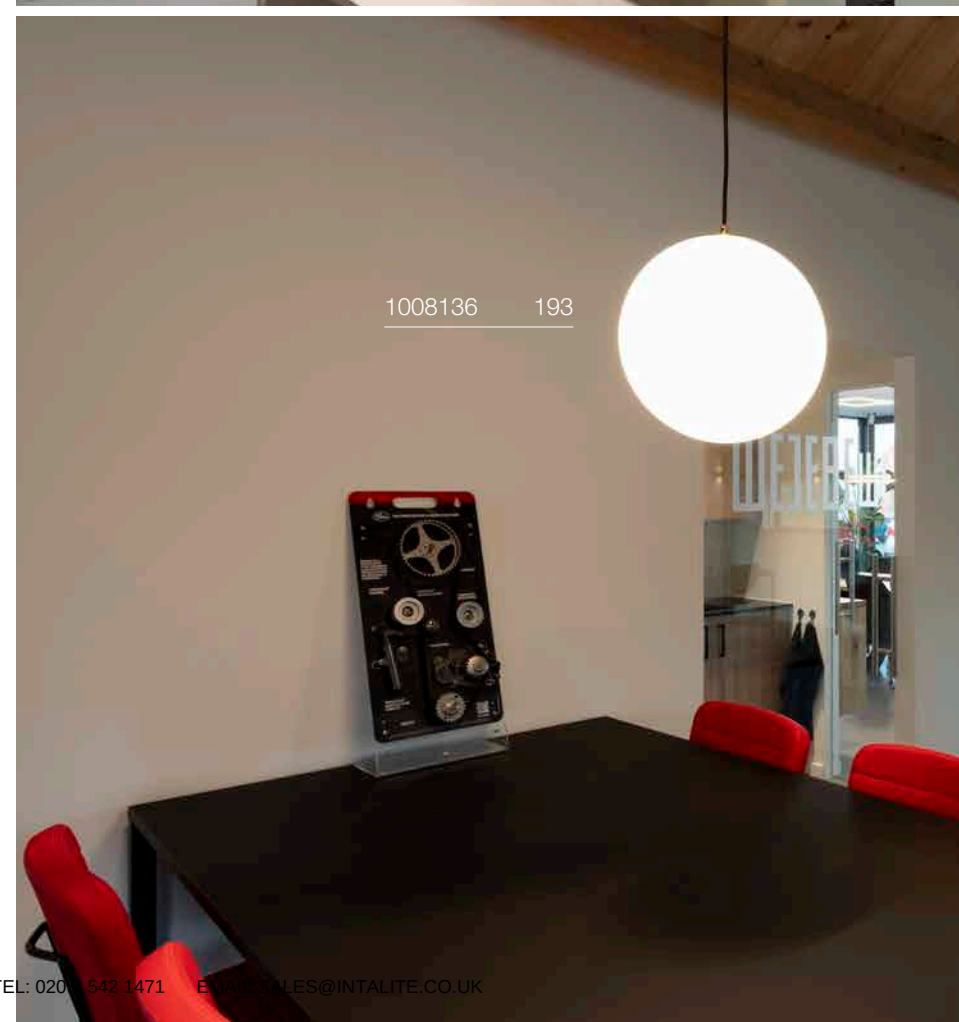

1008136 193

TEL: 020 7542 1471 EMAIL: SALES@INTALITE.CO.UK

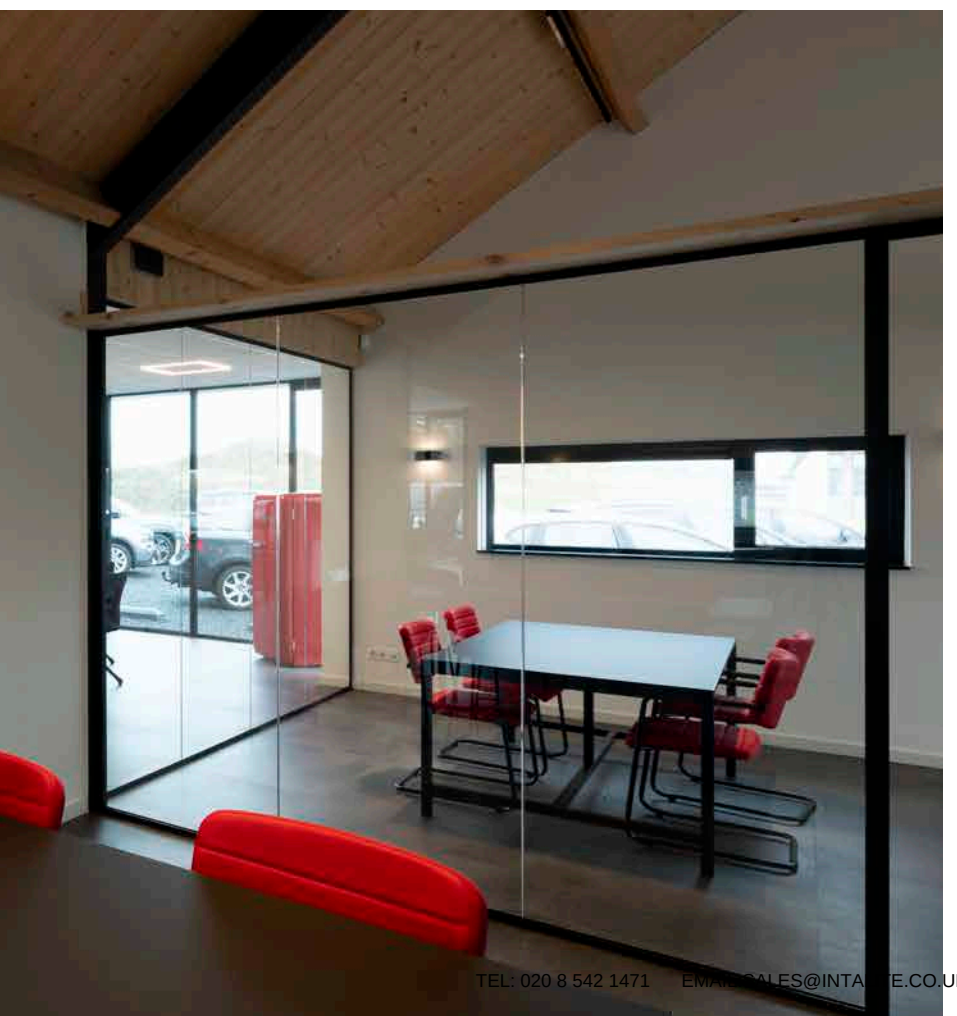

SUN 30
PD, E27

UPDATE



IP20 400

220-240 V ~50/60 Hz
Material: aluminium

- Open cable end
- Matching accessories can be found on page 271

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 22 cm

Options	Prod. no.	GBP
● black	1008137	128.00
● gold	1008136	125.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: **1005289** **9.00 GBP**

TEL: 020 8 542 1471 EMAIL: SALES@INTALITE.CO.UK

1008534 195

SUN 40
PD, E27

UPDATE

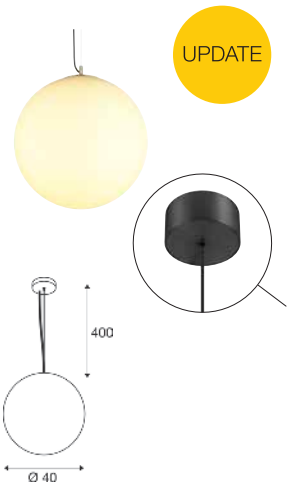

IP20 400 cm

220-240 V ~50/60 Hz

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 22 cm

Options	Prod. no.	GBP
black	1008534	166.00
gold	1008533	166.00

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E
14 kW/1000h

Prod. no.: 1005307 11.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010416 197

OLYPSO 40
PD, E27

IP20 400 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1xE27 max. Ø: 8 cm | L: 12 cm

Options	Prod. no.	GBP
black	1010413	174.00
gold	1010414	178.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

SMART

E27 | 9.5 W | 190°
1100 lm | 2200-6500 K | EEC = F
10 kWh/1000h

Prod. no.: 1010465 30.00 GBP

OLYPSO 50
PD, E27

IP20 400 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1xE27 max. Ø: 12 cm | L: 16 cm

Options	Prod. no.	GBP
black	1010415	217.00
gold	1010416	220.00

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E
14 kW/1000h

Prod. no.: 1005307 11.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008502 + 1008504 + 1008506 199

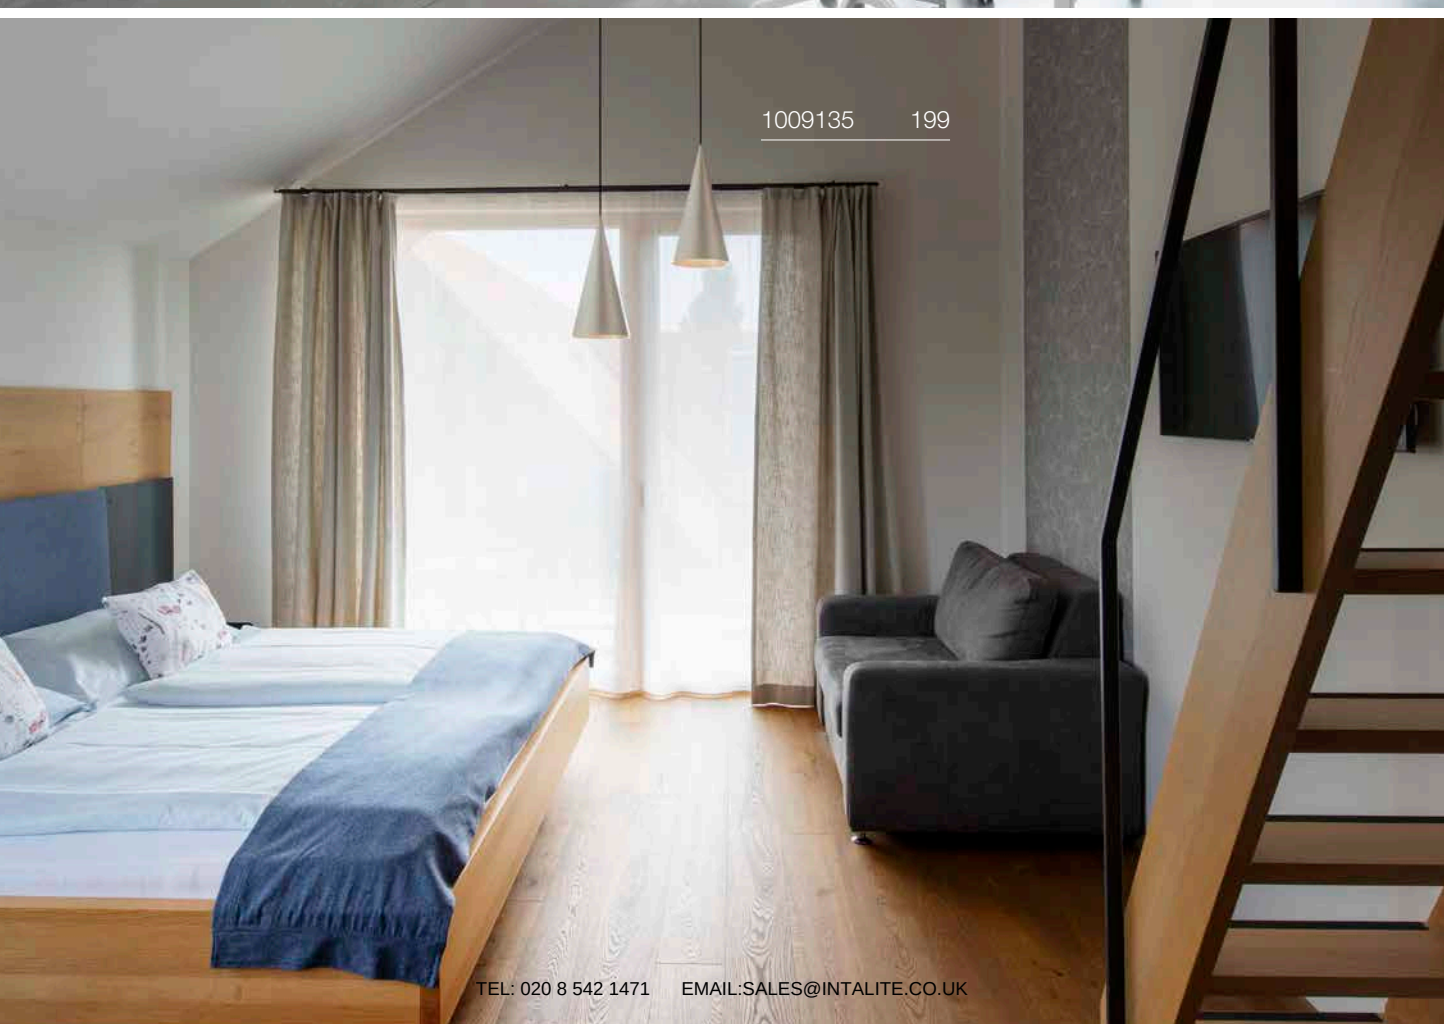

1009135 199

MAGICO 20
PD, E27

UPDATE



IP20 IK02 180 cm

220-240 V ~50/60 Hz
Material: aluminium

- Matching accessories can be found on page 271

SOCKET INSIDE 10 W

Base: 1xE27

Options	Prod. no.	GBP
black/gold	1008502	163.00
black	1008500	163.00
white	1008501	163.00
aluminium	1009135	165.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kW/1000h

Prod. no.: 1005265 23.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kW/1000 h

Prod. no.: 1010484 27.00 GBP

MAGICO 38
PD, E27

UPDATE



IP20 IK02 180 cm

220-240 V ~50/60 Hz
Material: aluminium

- Matching accessories can be found on page 271

SOCKET INSIDE 10 W

Base: 1xE27

Options	Prod. no.	GBP
black/gold	1008505	171.00
black	1008503	171.00
white	1008504	171.00
aluminium	1009136	173.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kW/1000h

Prod. no.: 1005265 23.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kW/1000 h

Prod. no.: 1010484 27.00 GBP

MAGICO 55
PD, E27

UPDATE



IP20 IK02 180 cm

220-240 V ~50/60 Hz
Material: aluminium

- Matching accessories can be found on page 271

SOCKET INSIDE 10 W

Base: 1xE27

Options	Prod. no.	GBP
black/gold	1008508	176.00
black	1008507	176.00
white	1008506	176.00
aluminium	1009137	179.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kW/1000h

Prod. no.: 1005265 23.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kW/1000 h

Prod. no.: 1010484 27.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® S
PD, PHASE



220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium

Options	GBP
All S versions	**121.00**
All S DALI versions	**170.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring S		
○ white	**1006167**	**2.00**
● copper	**1008140**	**7.00**
● gold	**1008144**	**7.00**

● black



○ white

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004146**	
			36°	16	**1004147**	
			60°	19	**1004148**	
	3000 K	1050 lm	24°	16	**1004154**	
			36°	16	**1004155**	
			60°	19	**1004156**	
	4000 K	1100 lm	24°	16	**1004162**	
			36°	16	**1004163**	
			60°	19	**1004164**	
Dali Touch	2700 K	950 lm	24°	16	**1004434**	
			36°	16	**1004435**	
			60°	19	**1004436**	
	3000 K	1050 lm	24°	16	**1004442**	
			36°	16	**1004443**	
			60°	19	**1004444**	
	4000 K	1100 lm	24°	16	**1004450**	
			36°	16	**1004451**	
			60°	19	**1004452**	
C	2700 K	950 lm	24°	16	**1004150**	
			36°	16	**1004151**	
			60°	19	**1004152**	
	3000 K	1050 lm	24°	16	**1004158**	
			36°	16	**1004159**	
			60°	19	**1004160**	
	4000 K	1100 lm	24°	16	**1004166**	
			36°	16	**1004167**	
			60°	19	**1004168**	
Dali Touch	2700 K	950 lm	24°	16	**1004438**	
			36°	16	**1004439**	
			60°	19	**1004440**	
	3000 K	1050 lm	24°	16	**1004446**	
			36°	16	**1004447**	
			60°	19	**1004448**	
	4000 K	1100 lm	24°	16	**1004454**	
			36°	16	**1004455**	
			60°	19	**1004456**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® M
PD, PHASE



220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/PC

Options	GBP
All M versions	**135.00**
All M DALI versions	**181.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring M		
○ white	**1006168**	**3.00**
● copper	**1008141**	**8.00**
● gold	**1008145**	**8.00**

● black



○ white

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004242**	
			36°	16	**1004243**	
			60°	22	**1004244**	
	3000 K	1800 lm	24°	16	**1004250**	
			36°	16	**1004251**	
			60°	22	**1004252**	
	4000 K	1950 lm	24°	16	**1004258**	
			36°	16	**1004259**	
			60°	22	**1004260**	
Dali Touch	2700 K	1750 lm	24°	16	**1004530**	
			36°	16	**1004531**	
			60°	22	**1004532**	
	3000 K	1800 lm	24°	16	**1004538**	
			36°	16	**1004539**	
			60°	22	**1004540**	
	4000 K	1950 lm	24°	16	**1004546**	
			36°	16	**1004547**	
			60°	22	**1004548**	
C	2700 K	1750 lm	24°	16	**1004246**	
			36°	16	**1004247**	
			60°	22	**1004248**	
	3000 K	1800 lm	24°	16	**1004254**	
			36°	16	**1004255**	
			60°	22	**1004256**	
	4000 K	1950 lm	24°	16	**1004262**	
			36°	16	**1004263**	
			60°	22	**1004264**	
Dali Touch	2700 K	1750 lm	24°	16	**1004534**	
			36°	16	**1004535**	
			60°	22	**1004536**	
	3000 K	1800 lm	24°	16	**1004542**	
			36°	16	**1004543**	
			60°	22	**1004544**	
	4000 K	1950 lm	24°	16	**1004550**	
			36°	16	**1004551**	
			60°	22	**1004552**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® L
PD, PHASE



220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/PC

Options	GBP
All L versions	**148.00**
All L DALI versions	**196.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring L		
○ white	**1006169**	**3.00**
● copper	**1008142**	**9.00**
● gold	**1008146**	**9.00**

● black



○ white

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004338**	
			36°	16	**1004339**	
			60°	19	**1004340**	
	3000 K	2400 lm	24°	16	**1004346**	
			36°	16	**1004347**	
			60°	19	**1004348**	
	4000 K	2600 lm	24°	16	**1004354**	
			36°	16	**1004355**	
			60°	19	**1004356**	
Dali Touch	2700 K	2300 lm	24°	16	**1004626**	
			36°	16	**1004627**	
			60°	19	**1004628**	
	3000 K	2400 lm	24°	16	**1004634**	
			36°	16	**1004635**	
			60°	19	**1004636**	
	4000 K	2600 lm	24°	16	**1004642**	
			36°	16	**1004643**	
			60°	19	**1004644**	
C	2700 K	2300 lm	24°	16	**1004342**	
			36°	16	**1004343**	
			60°	19	**1004344**	
	3000 K	2400 lm	24°	16	**1004350**	
			36°	16	**1004351**	
			60°	19	**1004352**	
	4000 K	2600 lm	24°	16	**1004358**	
			36°	16	**1004359**	
			60°	19	**1004360**	
Dali Touch	2700 K	2300 lm	24°	16	**1004630**	
			36°	16	**1004631**	
			60°	19	**1004632**	
	3000 K	2400 lm	24°	16	**1004638**	
			36°	16	**1004639**	
			60°	19	**1004640**	
	4000 K	2600 lm	24°	16	**1004646**	
			36°	16	**1004647**	
			60°	19	**1004648**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® XL
PD, DALI



● black



○ white

IP20 · 50 000 h L90B10 · 250 cm · 58

INSIDE · CRI 90

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/PC

Options	GBP
All XL versions	**170.00**
All XL DALI versions	**218.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring XL		
○ white	**1006170**	**4.00**
● copper	**1008143**	**9.50**
● gold	**1008147**	**9.50**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
Dali Touch	2700 K	3550 lm	24°	16	**1005777**	
			36°	16	**1005778**	
		3150 lm	60°	22	**1005779**	
	3000 K	3550 lm	24°	16	**1005783**	
			36°	16	**1005784**	
		3150 lm	60°	22	**1005785**	
	4000 K	3900 lm	24°	16	**1005789**	
			36°	16	**1005790**	
		3500 lm	60°	22	**1005791**	
C	2700 K	3550 lm	24°	16	**1005705**	
			36°	16	**1005706**	
		3150 lm	60°	22	**1005707**	
	3000 K	3550 lm	24°	16	**1005711**	
			36°	16	**1005712**	
		3150 lm	60°	22	**1005713**	
	4000 K	3900 lm	24°	16	**1005717**	
			36°	16	**1005718**	
		3500 lm	60°	22	**1005719**	
Dali Touch	2700 K	3550 lm	24°	16	**1005780**	
			36°	16	**1005781**	
		3150 lm	60°	22	**1005782**	
	3000 K	3550 lm	24°	16	**1005786**	
			36°	16	**1005787**	
		3150 lm	60°	22	**1005788**	
	4000 K	3900 lm	24°	16	**1005792**	
			36°	16	**1005793**	
		3500 lm	60°	22	**1005794**	
C	2700 K	3550 lm	24°	16	**1005708**	
			36°	16	**1005709**	
		3150 lm	60°	22	**1005710**	
	3000 K	3550 lm	24°	16	**1005714**	
			36°	16	**1005715**	
		3150 lm	60°	22	**1005716**	
	4000 K	3900 lm	24°	16	**1005720**	
			36°	16	**1005721**	
		3500 lm	60°	22	**1005722**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009066 209

GRIP! S
PD, PHASE, Ø 3 cm





220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: steel

- Honeycomb accessories included

590 lm|2700 K | 620 lm|3000 K

Options	Prod. no.	GBP
white/black 2700 K	**1009060**	**135.00**
white/black 3000 K	**1009061**	**135.00**
black/gold 2700 K	**1009062**	**135.00**
black/gold 3000 K	**1009063**	**135.00**
bronze/black 2700 K	**1009064**	**135.00**
bronze/black 3000 K	**1009065**	**135.00**
gold/black 2700 K	**1009066**	**135.00**
gold/black 3000 K	**1009067**	**135.00**

⊕

Product	Prod. no.	GBP
GRIP! S decorative ring		
white	**1008488**	**15.00**
black	**1008489**	**15.00**
nickel	**1008490**	**15.00**
gold	**1008491**	**15.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® RING 60
PD, DALI

220-240 V ~50/60 Hz | 700 mA
Total wattage: 26 W
Material: aluminium/steel

	3750 lm | 3000 K	4000 lm | 4000 K
Down		

Options	Prod. no.	GBP
● black	**1008589**	**670.00**
○ white	**1008590**	**670.00**

MEDO® RING 60
PD, PHASE

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/steel

Down	3750 lm | 3000 K	4000 lm | 4000 K

Options	Prod. no.	GBP
● black	**1008591**	**644.00**
○ white	**1008592**	**644.00**

MEDO® RING 90
PD, DALI

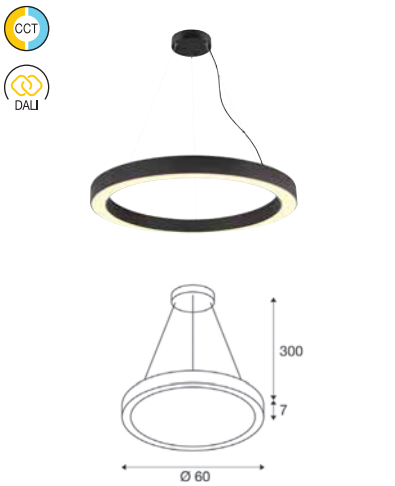

220-240 V ~50/60 Hz | 1200 mA
Total wattage: 42 W
Material: aluminium/steel

Down	5000 lm | 3000 K	5300 lm | 4000 K

Options	Prod. no.	GBP
● black	**1008593**	**839.00**
○ white	**1008594**	**839.00**

MEDO® RING 90
PD, PHASE

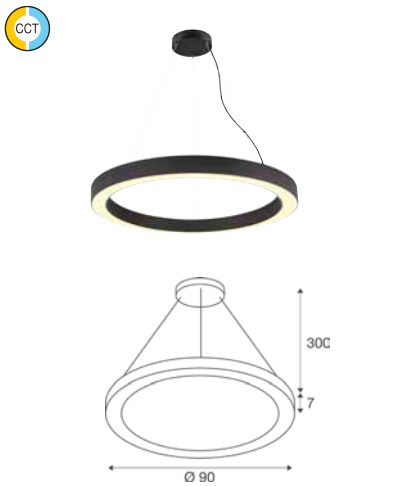

220-240 V ~50/60 Hz | 1200 mA
Total wattage: 43 W
Material: aluminium/steel

Down	5000 lm | 3000 K	5300 lm | 4000 K

Options	Prod. no.	GBP
● black	**1008595**	**808.00**
○ white	**1008596**	**808.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® PRO 30
CW, DALI, UGR<19

Dali Touch IP50 IK02 70° 50000h L80B10 UGR 19 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE CRI 90

Direct	1150 lm	3000 K	1150 lm	4000 K
Indirect	100 lm		100 lm	

Options	Prod. no.	GBP
● black	**1007284**	**283.00**
○ white	**1007285**	**283.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 30
CW, PHASE, UGR<19

CCT IP50 IK02 70° 50000h L80B10 UGR 19 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE CRI 90

Direct	1150 lm	3000 K	1150 lm	4000 K
Indirect	100 lm		100 lm	

Options	Prod. no.	GBP
● black	**1007288**	**257.00**
○ white	**1007289**	**257.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

1007284 212

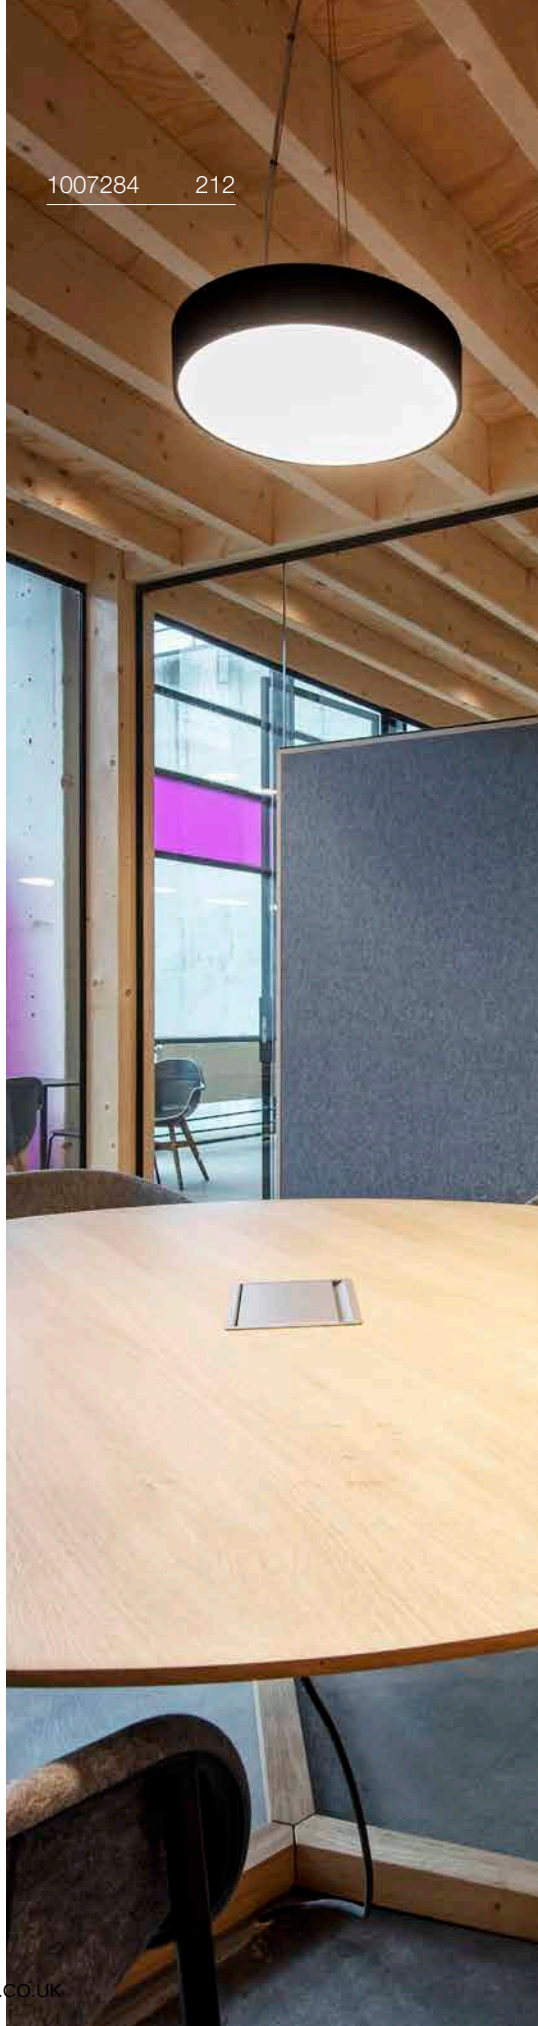

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

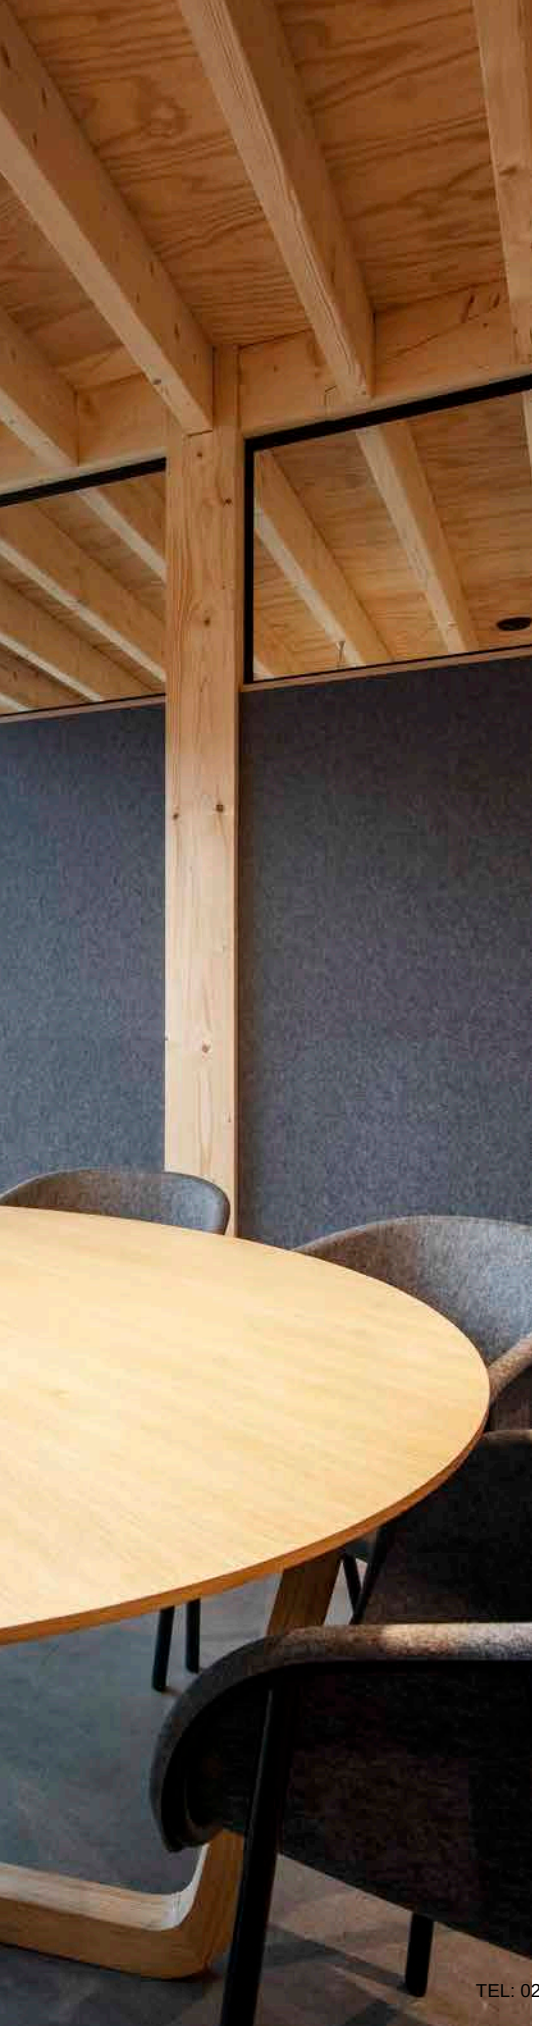

MEDO® PRO 40
CW, DALI, UGR<19

Dali | Touch | IP50 | IK02 | 80° | 50000 h L80B10 | UGR 19 | 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

LED INSIDE | CRI 90

	2200 lm	3000 K	2300 lm	4000 K
Direct	200 lm		200 lm	
Indirect				

Options	Prod. no.	GBP
● black	**1007292**	**343.00**
○ white	**1007293**	**343.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 40
CW, PHASE, UGR<19

C | IP50 | IK02 | 80° | 50000 h L80B10 | UGR 19 | 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

LED INSIDE | CRI 90

	2200 lm	3000 K	2300 lm	4000 K
Direct	200 lm		200 lm	
Indirect				

Options	Prod. no.	GBP
● black	**1007296**	**300.00**
○ white	**1007297**	**300.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® PRO 60
CW, DALI, UGR<19

Dali | Touch | IP50 | IK02 | 80° | 50000 h L80B10 | UGR 19 | 20

220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

LED INSIDE | CRI 90

Direct	4600 lm	3000 K	4700 lm	4000 K
Indirect	400 lm		400 lm	

Options	Prod. no.	GBP
● black	**1007300**	**600.00**
○ white	**1007301**	**600.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 60
CW, PHASE, UGR<19

C | IP50 | IK02 | 80° | 50000 h L80B10 | UGR 19 | 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

LED INSIDE | CRI 90

Direct	4600 lm	3000 K	4700 lm	4000 K
Indirect	400 lm		400 lm	

Options	Prod. no.	GBP
● black	**1007304**	**540.00**
○ white	**1007305**	**540.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® PRO 90
CL, DALI, UGR<19

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

LED INSIDE	CRI 90				
Direct	8800 lm	3000 K	9100 lm	4000 K	
Indirect	600 lm		600 lm		

Options	Prod. no.	GBP
● black	**1007308**	**1,203.00**
○ white	**1007309**	**1,203.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 90
CL, PHASE, UGR<19

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel

LED INSIDE	CRI 90				
Direct	8800 lm	3000 K	9100 lm	4000 K	
Indirect	600 lm		600 lm		

Options	Prod. no.	GBP
● black	**1007312**	**1,072.00**
○ white	**1007313**	**1,072.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® PRO 30
CW, DALI

Dali Touch IP50 IK02 110° 50000h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE CRI 90

	1300 lm / 50 lm	3000 K	1300 lm / 50 lm	4000 K
Direct / Indirect				

Options	Prod. no.	GBP
● black	**1007286**	**274.00**
○ white	**1007287**	**274.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 30
CW, PHASE

C IP50 IK02 110° 50000h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE CRI 90

	1300 lm / 50 lm	3000 K	1300 lm / 50 lm	4000 K
Direct / Indirect				

Options	Prod. no.	GBP
● black	**1007290**	**249.00**
○ white	**1007291**	**249.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

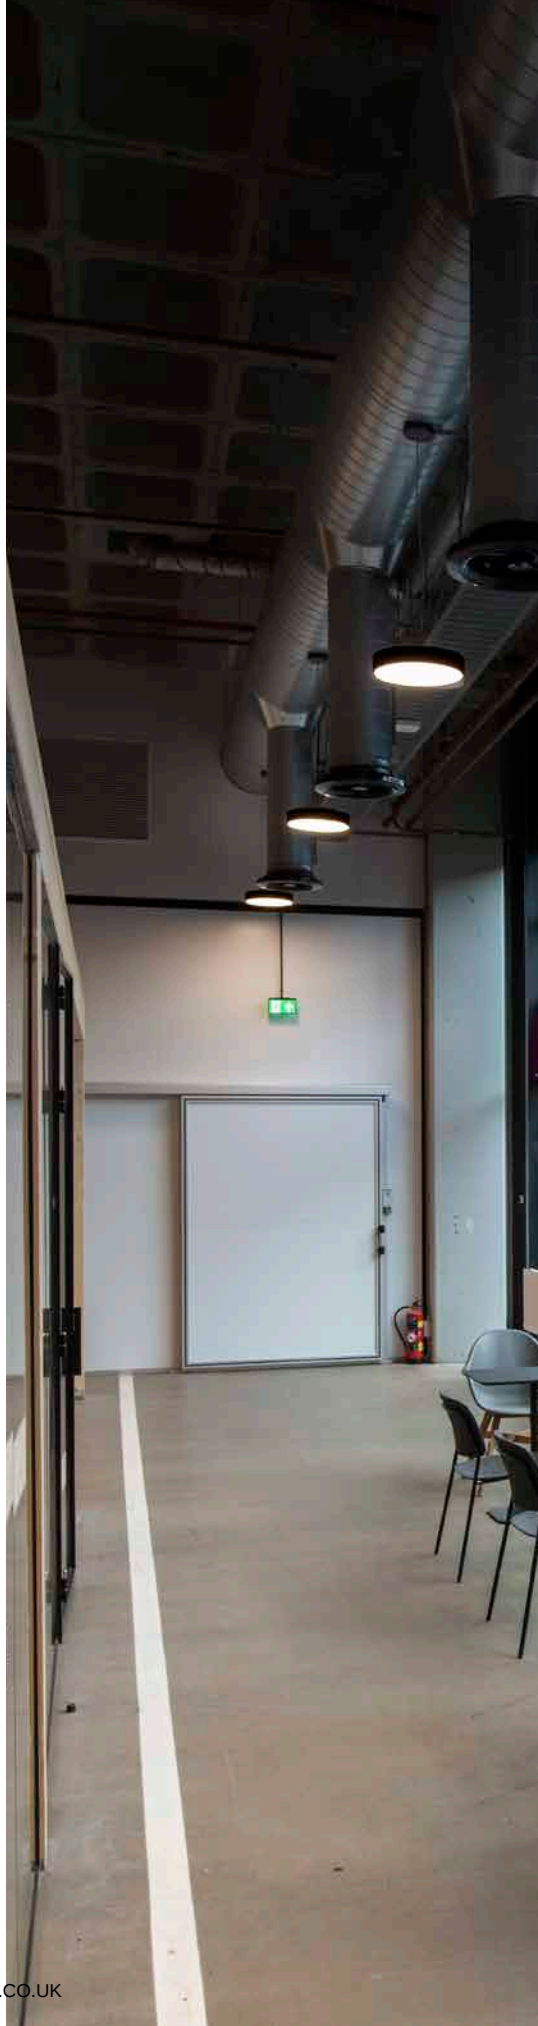

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

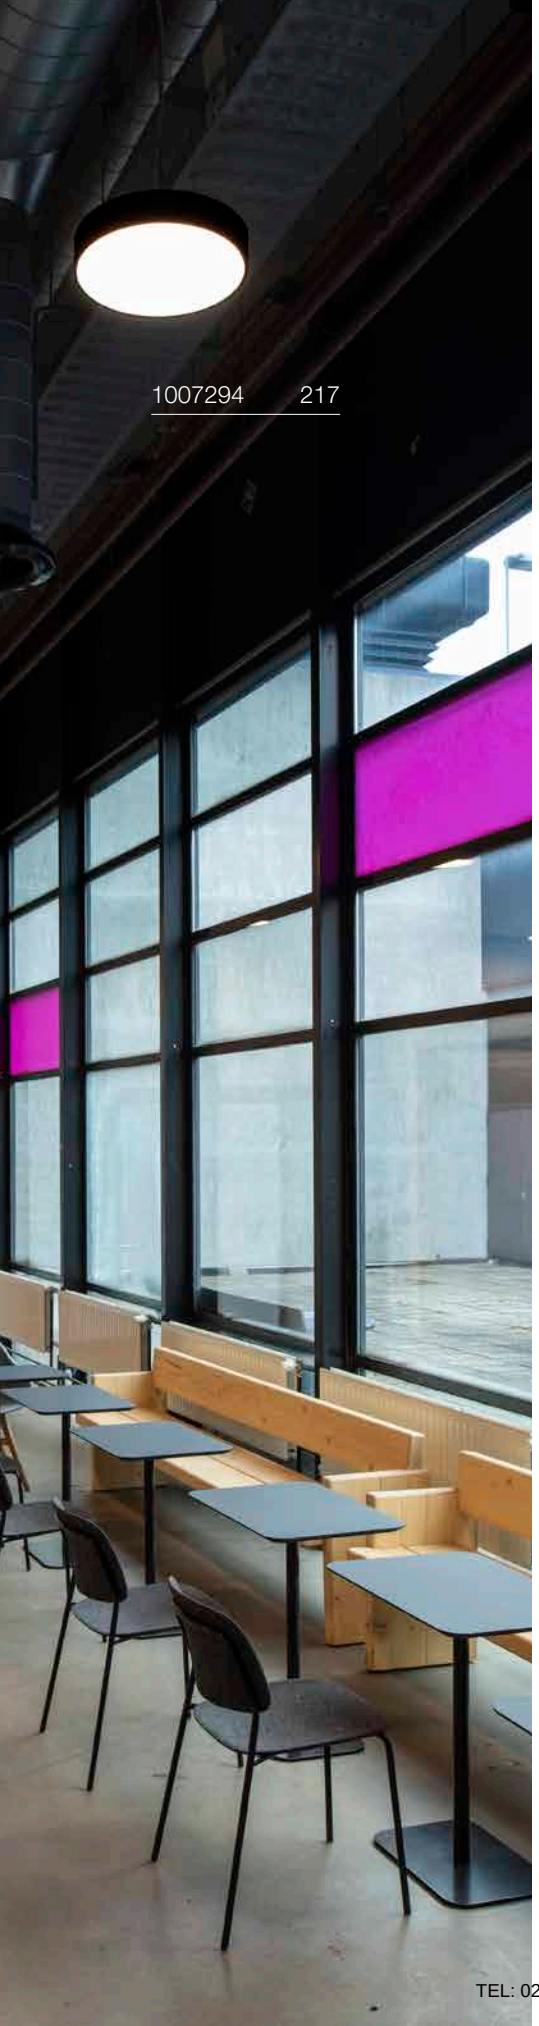

MEDO® PRO 40
CW, DALI

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

Direct	2550 lm	3000 K	2550 lm	4000 K
Indirect	100 lm		100 lm	

Options	Prod. no.	GBP
● black	**1007294**	**335.00**
○ white	**1007295**	**335.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 40
CW, PHASE

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

Direct	2550 lm	3000 K	2550 lm	4000 K
Indirect	100 lm		100 lm	

Options	Prod. no.	GBP
● black	**1007298**	**292.00**
○ white	**1007299**	**292.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® PRO 60
CW, DALI

Dali Touch IP50 IK02 110° 50000h L80B10 UGR 25 20

220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

LED INSIDE CRI 90

Direct	5250 lm	3000 K	5300 lm	4000 K
Indirect	200 lm		200 lm	

Options	Prod. no.	GBP
● black	**1007302**	**584.00**
○ white	**1007303**	**584.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 60
CW, PHASE

C IP50 IK02 110° 50000h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

LED INSIDE CRI 90

Direct	5250 lm	3000 K	5300 lm	4000 K
Indirect	200 lm		200 lm	

Options	Prod. no.	GBP
● black	**1007306**	**524.00**
○ white	**1007307**	**524.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

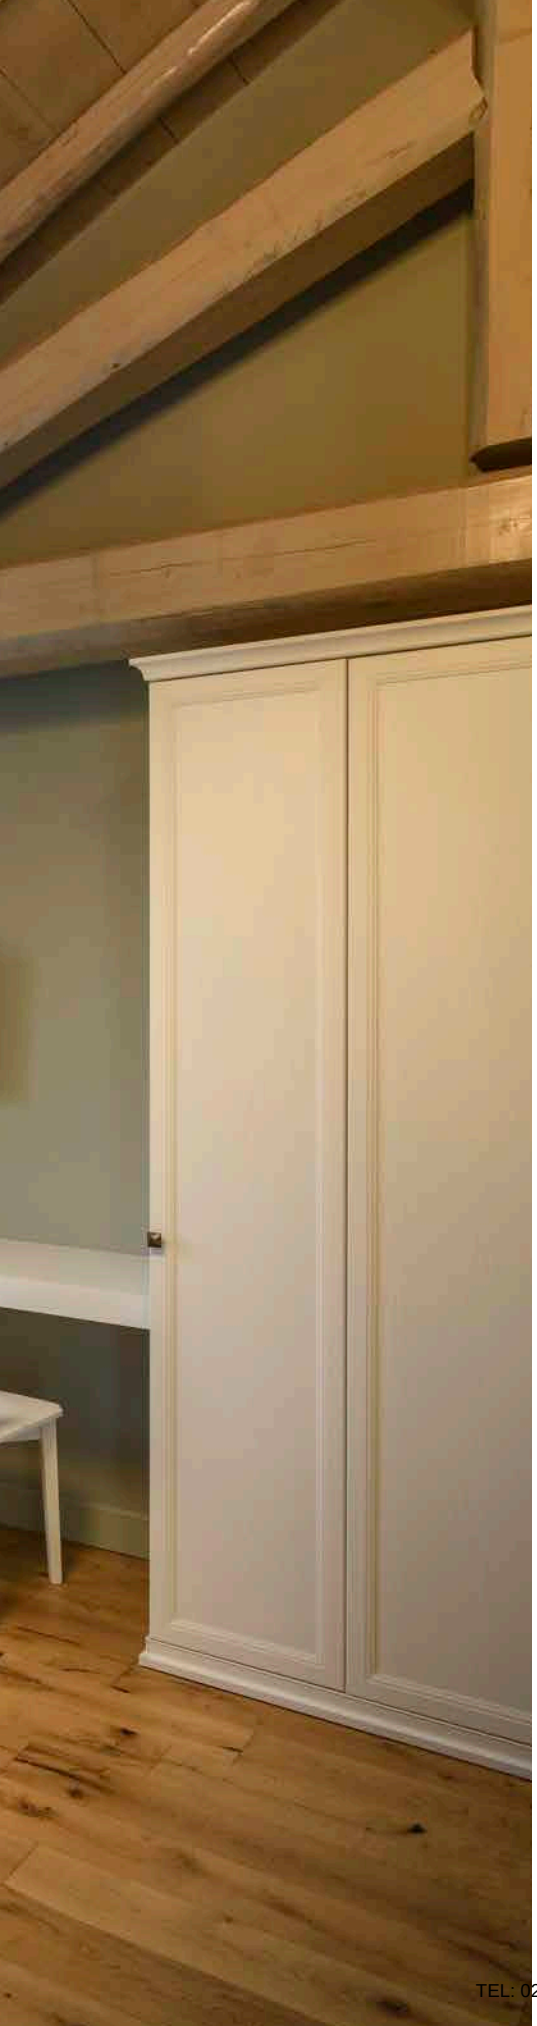

MEDO® PRO 90
CL, DALI

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

	Direct		Indirect	
3000 K	10550 lm	4000 K	10750 lm	450 lm

Options	Prod. no.	GBP
● black	**1007310**	**1,186.00**
○ white	**1007311**	**1,186.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 90
CL, PHASE

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel

	Direct		Indirect	
3000 K	10550 lm	4000 K	10750 lm	450 lm

Options	Prod. no.	GBP
● black	**1007314**	**1,057.00**
○ white	**1007315**	**1,057.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® 30
CW, PHASE

C IP50 IK02 110° 50000h L70B50 UGR 25 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 12 W
Material: aluminium/steel

LED INSIDE CRI 90

1000 lm / 50 lm	2700 K	1050 lm / 50 lm	3000 K	1150 lm / 50 lm	4000 K

Options	Prod. no.	GBP
● black	**1007316**	**214.00**
○ white	**1007317**	**214.00**
● grey	**1007318**	**214.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

MEDO® 40
CW, PHASE

C IP50 IK02 110° 50000h L70B50 UGR 25 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/steel

LED INSIDE CRI 90

2000 lm / 100 lm	2700 K	2100 lm / 100 lm	3000 K	2250 lm / 100 lm	4000 K

Options	Prod. no.	GBP
● black	**1007319**	**240.00**
○ white	**1007320**	**240.00**
● grey	**1007321**	**240.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

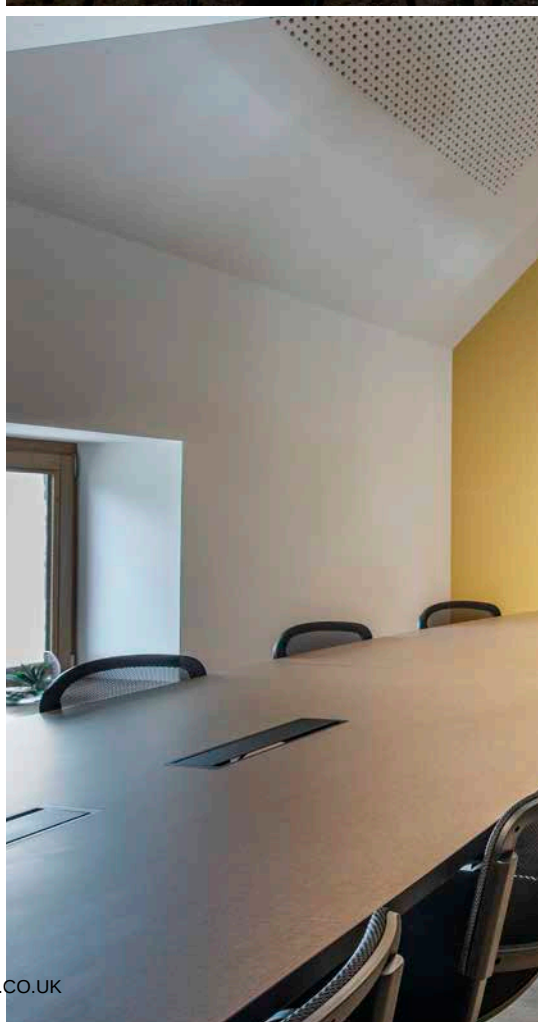

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

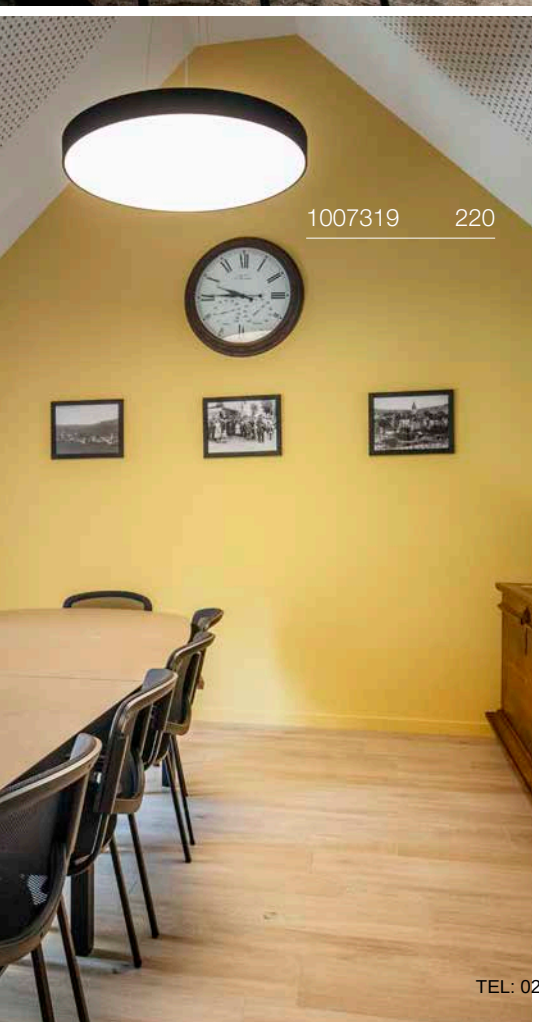

MEDO® 60
CW, PHASE

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

LED INSIDE CRI 90

3850 lm 200 lm	2700 K	4050 lm 200 lm	3000 K	4300 lm 200 lm	4000 K

Options	Prod. no.	GBP
● black	**1007322**	**455.00**
○ white	**1007323**	**455.00**
● grey	**1007324**	**455.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

MEDO® 90
CL, PHASE

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 79 W
Material: aluminium/steel

LED INSIDE CRI 90

8000 lm 300 lm	2700 K	8400 lm 300 lm	3000 K	9000 lm 300 lm	4000 K

Options	Prod. no.	GBP
● black	**1007325**	**902.00**
○ white	**1007326**	**902.00**
● grey	**1007327**	**902.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO®
OVERVIEW







	MEDO® CW	**MEDO® PRO** CW	**MEDO® PRO** CW
Sizes	**30 | 40 | 60 | 90**	**30 | 40 | 60 | 90**	**30 | 40 | 60 | 90**
UGR	22 | 25	19 | 25	19 | 25
Control	Phase	Phase	DALI 2
DC	-	-	✓
CCT switch	2700K **|** 3000K **|** 4000K	3000K **|** 4000K	3000K **|** 4000K
EasyBase	✓	✓	✓
Federal Funding for Efficient Buildings (BEG)	-	✓	✓
Suspension kit	1,5 | 5 m (not included)	1,5 | 5 m (not included)	1,5 | 5 m (not included)

- Faster installation thanks to EasyBase
- Luminous efficacy from 120 lm/W
- Also suitable for demanding workplaces (e.g. offices and classrooms) thanks to prismatic optics

LED drivers are not included and must be ordered separately

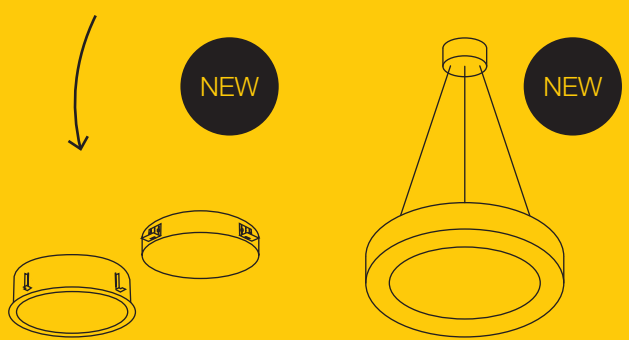

MEDO® RL, FRAMELESS | MOUNTING FRAME	**MEDO® RING** PD
30 | 40 | 60 | 90	**60 | 90**
19	25
*	Phase | DALI 2
*	- | ✓
3000K | 4000K	3000K | 4000K
-	-
✓	✓
-	3 m (included)

*Requires driver

Easy and fast to install thanks to EasyBase

CEILING LIGHTS



Screw EasyBase to the ceiling

Wire EasyBase

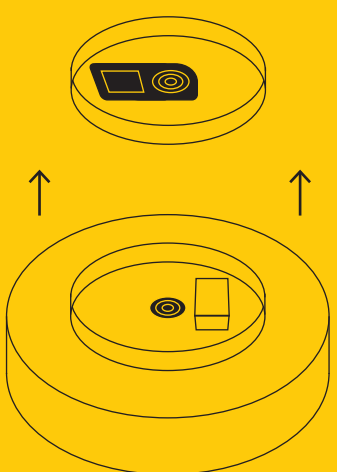

Select the colour temperature using the CCT switch on the light, look for the green markings

MEDO® 60 and MEDO® 90 are also attached using the safety chain provided

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LALU® SET
PD, E27 Base

UPDATE

IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

- incl. E27 lightbulb

SOCKET INSIDE 4 W

Base: 1xE27

Options	Prod. no.	GBP
● black	1010785 ●	137.00

LALU® SET
PD, E27 Base

IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

• incl. E27 lightbulb

SOCKET INSIDE 7.5 W

Base: 1xE27

Options	Prod. no.	GBP
● black	1010786	172.00

LALU® SET
PD, E27 Base

IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

• incl. E27 lightbulb

SOCKET INSIDE 7.5 W

Base: 1xE27

Options	Prod. no.	GBP
● black	1010787	199.00

LALU® SET
PD, E27 Base

IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

• incl. E27 lightbulb

SOCKET INSIDE 7.5 W

Base: 1xE27

Options	Prod. no.	GBP
● black	1010788	170.00

Discover more LALU® colours and shapes at slv.com

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LALU® SET
PD, LED Base, Phase

UPDATE

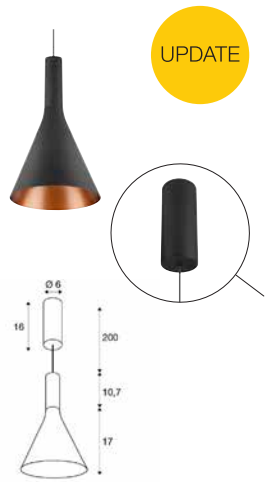

IP20 IK03 40° 50 000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- including colour temperature switch 2700 K / 3000 K

INSIDE CRI 90

Down	550 lm	2700 K	600 lm	3000 K

Options	Prod. no.	GBP
● black	1010789 ●	225.00

LALU® SET
PD, LED Base, Phase

UPDATE

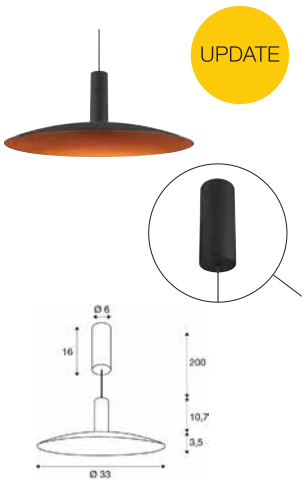

IP20 IK03 40° 50 000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- including colour temperature switch 2700 K / 3000 K

INSIDE CRI 90

Down	650 lm	2700 K	700 lm	3000 K

Options	Prod. no.	GBP
● black	1010790 ●	230.00

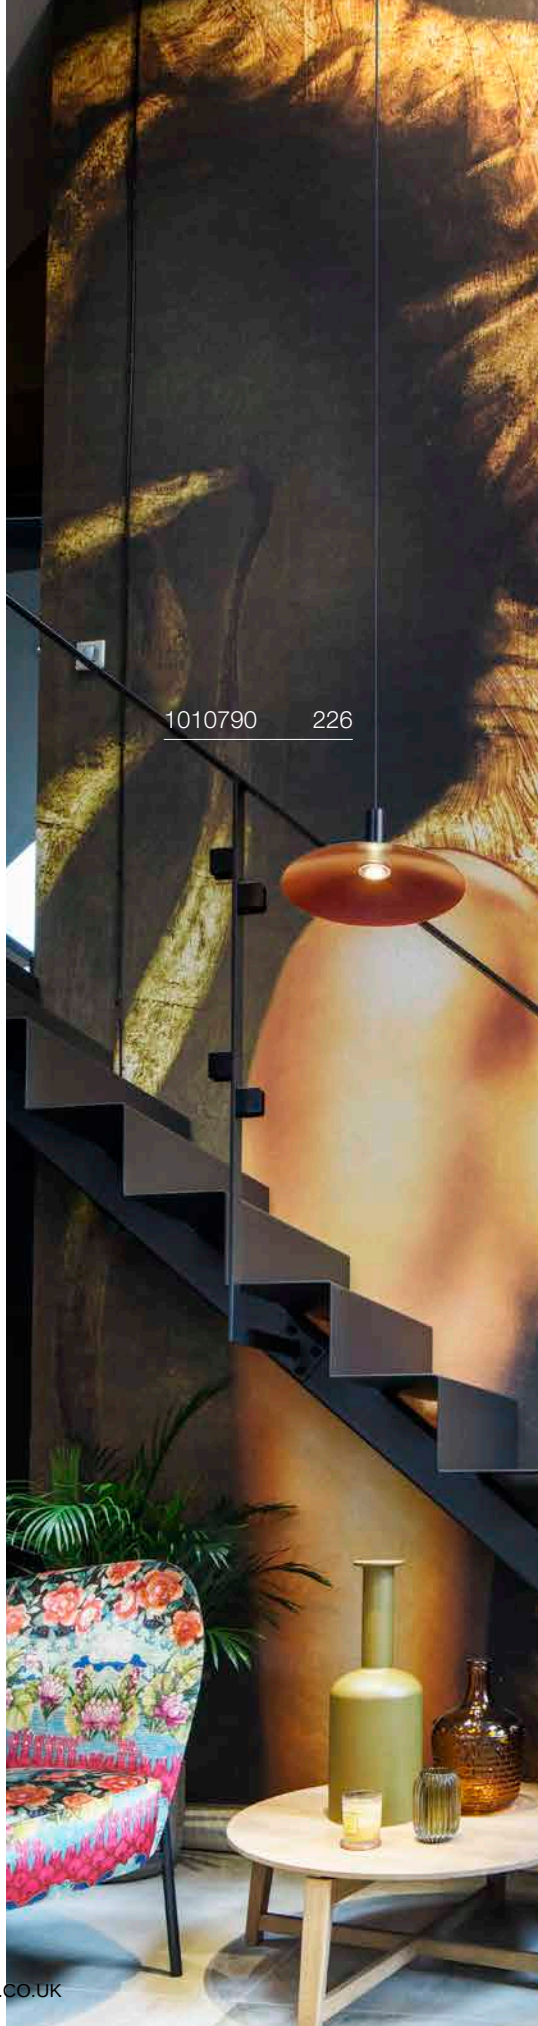

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LALU® SET
PD, LED Base, Phase

UPDATE

IP20 IK03 40° 50 000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- including colour temperature switch 2700 K / 3000 K

LED INSIDE CRI 90

	700 lm | 2700 K	800 lm | 3000 K
Down		

Options	Prod. no.	GBP
● black	1010791 ●	252.00

LALU® SET
PD, LED Base, Phase

UPDATE

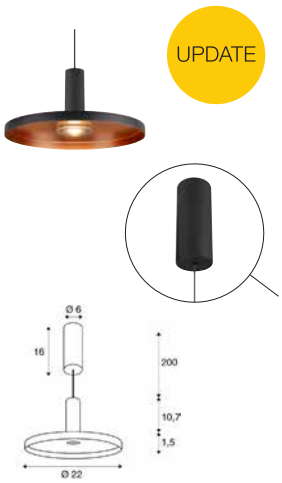

IP20 IK03 40° 50 000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- including colour temperature switch 2700 K / 3000 K

LED INSIDE CRI 90

	700 lm | 2700 K	700 lm | 3000 K
Down		

Options	Prod. no.	GBP
● black	1010792 ●	200.00

Discover more LALU® colours and shapes at slv.com

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LALU® SET

PD, LED Base, Phase, Recessed

UPDATE

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- including colour temperature switch 2700 K / 3000 K

LED INSIDE CRI 90

Down	550 lm	2700 K	600 lm	3000 K

Options	Prod. no.	GBP
● black	**1010793** ●	**216.00**

LALU® SET
PD, LED Base, Phase, Recessed

IP20 IK03 40° 50000h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- including colour temperature switch 2700 K / 3000 K

LED INSIDE CRI 90

Down	650 lm | 2700 K	700 lm | 3000 K

Options	Prod. no.	GBP
● black	1010794	221.00

LALU® SET
PD, LED Base, Phase, Recessed

IP20 IK03 40° 50000h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- including colour temperature switch 2700 K / 3000 K

LED INSIDE CRI 90

Down	700 lm | 2700 K	800 lm | 3000 K

Options	Prod. no.	GBP
● black	1010795	243.00

LALU® SET
PD, LED Base, Phase, Recessed

IP20 IK03 40° 50000h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- including colour temperature switch 2700 K / 3000 K

LED INSIDE CRI 90

Down	700 lm | 2700 K	700 lm | 3000 K

Options	Prod. no.	GBP
● black	1010796	192.00

Discover more LALU® colours and shapes at slv.com

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ONE FLAT
PD, DALI, triple

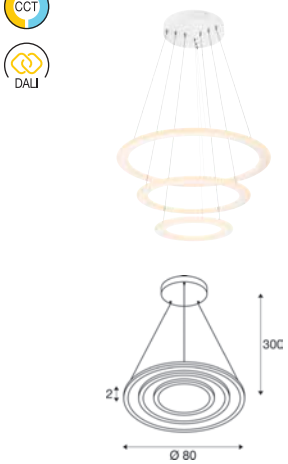

220-240 V ~50/60 Hz | 1700 mA
Total wattage: 58 W
Material: aluminium/steel

Options	Prod. no.	GBP
● black	1007701	986.00
○ white	1007702	986.00
● brass	1007703	986.00

3500 lm | 2700 K | 3700 lm | 3000 K

ONE FLAT
PD, PHASE, single

220-240 V ~50/60 Hz | 600 mA
Total wattage: 23 W
Material: aluminium/steel

Options	Prod. no.	GBP
● black	1007855	417.00
○ white	1007856	417.00
● brass	1007857	417.00

1300 – 1900 lm | 2700 K | 1350 – 2050 lm | 3000 K

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008004 233

ONE VERTICAL
PD, PHASE



220–240 V ~50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel

2400 lm | 2700 K | 2550 lm | 3000 K

Options	Prod. no.	GBP
● black	**1008002**	**416.00**
○ white	**1008003**	**416.00**
● brass	**1008004**	**416.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007665 235

ONE CUBE
PD, DALI

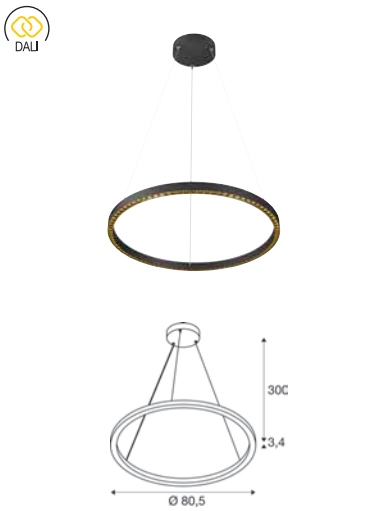

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 54 W
Material: aluminium/steel

4000 lm|3000 K | 4300 lm|4000 K

Options	Prod. no.	GBP
● black 3000 K	1007661	540.00
● black 4000 K	1007663	539.00
○ white 3000 K	1007662	540.00
○ white 4000 K	1007664	539.00

ONE CUBE
PD, DALI, up/down

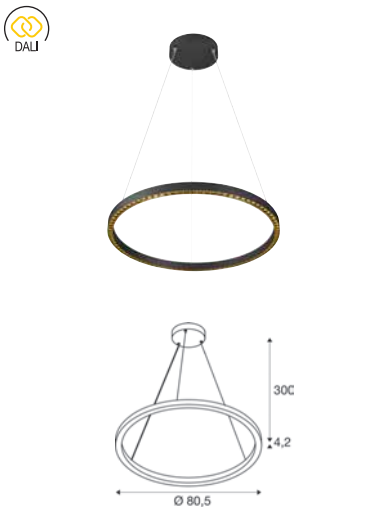



220-240 V ~50/60 Hz | 2100 mA
Total wattage: 80 W
Material: aluminium/steel

4000 lm|3000 K | 4300 lm|4000 K

Options	Prod. no.	GBP
● black 3000 K	1007665	600.00
● black 4000 K	1007671	600.00
○ white 3000 K	1007666	600.00
○ white 4000 K	1007672	600.00

ONE
Felt plate, acoustic felt, for. ONE 80 / ONE CUBE

Ø: 75.5 cm
H: 3.8 cm
Material: felt

- Fits all One light rings with Ø 80 cm

Options	Prod. no.	GBP
● grey	1007746	94.00
● beige	1007891	93.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1005177 237

TEL: 02[illegible]2 1471 EMAIL:SALES@INTALITE.CO.UK

ONE 60
PD, DALI

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel

1480 lm	3000 K	1550 lm	4000 K

Options	Prod. no.	GBP
● black	**1002909**	**363.00**
○ white	**1002910**	**363.00**

ONE 60
PD, DALI, up/down

220-240 V ~50/60 Hz | 600 mA
Total wattage: 25 W
Material: aluminium/steel

Up	400 lm	3000 K	410 lm	4000 K
Down	400 lm		410 lm	

Options	Prod. no.	GBP
● black	**1004761**	**459.00**
○ white	**1004762**	**459.00**

ONE 60
PD, PHASE, up/down

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel

Up	410 lm	2700 K	415 lm	3000 K
Down	410 lm		415 lm	

Options	Prod. no.	GBP
● black	**1004759**	**416.00**
○ white	**1004760**	**416.00**
● brass	**1005177**	**433.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1004763 239

ONE 80
PD, DALI



Dali IP20 130° 30000 h L70B50 300 cm

220-240 V ~50/60 Hz | 800 mA
Total wattage: 32 W
Material: aluminium/steel

LED INSIDE CRI 90

1930 lm | 3000 K	2140 lm | 4000 K

Options	Prod. no.	GBP
● black	1002911	407.00
○ white	1002912	407.00

ONE 80
PD, DALI, up/down

Dali IP20 130° 30000 h L70B50 300 cm

220-240 V ~50/60 Hz | 800 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE CRI 90

Up	615 lm	3000 K	635 lm	4000 K
Down	615 lm		635 lm	

Options	Prod. no.	GBP
● black	1004763	546.00
○ white	1004764	546.00

ONE
Felt plate, acoustic felt,
for ONE 80 / ONE CUBE

Ø: 75.5 cm
H: 3.8 cm
Material: felt

- Fits all One light rings with Ø 80 cm

Options	Prod. no.	GBP
grey	1007746	94.00
beige	1007891	93.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ONE DOUBLE
PD, DALI, up/down

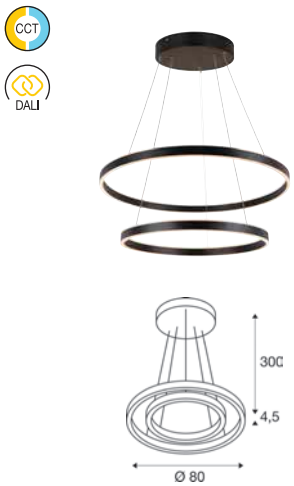

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 55 W
Material: aluminium/steel

Up	1050 lm	3000 K	1060 lm	4000 K
Down	1050 lm		1060 lm	

Options	Prod. no.	GBP
● black	**1004767**	**953.00**
○ white	**1004768**	**953.00**

ONE DOUBLE
PD, PHASE, up/down

220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel

Up	615 lm	2700 K	635 lm	3000 K
Down	615 lm		635 lm	

Options	Prod. no.	GBP
● black	**1004765**	**710.00**
○ white	**1004766**	**710.00**
● brass	**1005178**	**728.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ONE TRIPLE
PD, DALI

1005178 240



220-240 V ~50/60 Hz | 1700 mA
Total wattage: 64 W
Material: aluminium/steel

4040 lm | 3000 K	4200 lm | 4000 K

Options	Prod. no.	GBP
● black	**1002913**	**953.00**
○ white	**1002914**	**953.00**

TEL:020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006188 243

ONE LINEAR 100
PD, PHASE, up/down

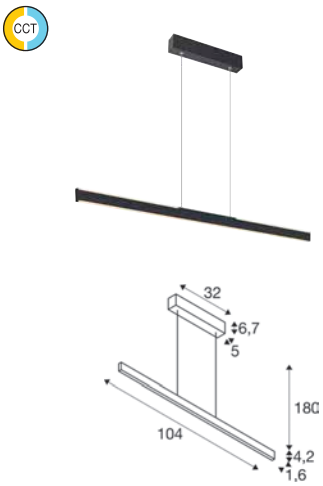

180 cm 20

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel

Up	550 lm	2700 K	580 lm	3000 K

Options	Prod. no.	GBP
● black	**1006185**	**268.00**

ONE LINEAR 140
PD, PHASE, up/down

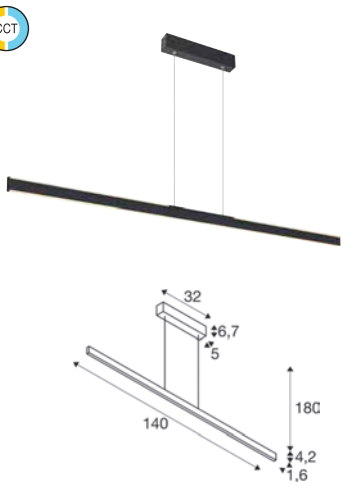

180 cm 20

220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel

Up	830 lm	2700 K	860 lm	3000 K
Down	980 lm		1015 lm	

Options	Prod. no.	GBP
● black	**1006188**	**316.00**
○ white	**1006189**	**316.00**
● brass	**1006190**	**333.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007588 245

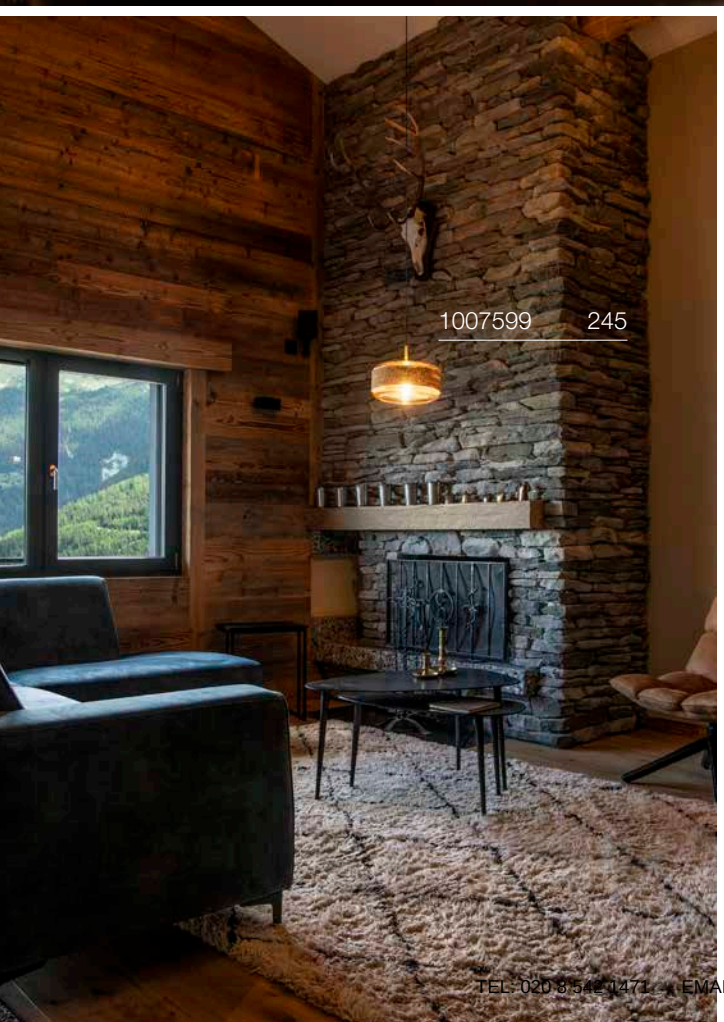
1007599 245

1007597 245

PANTILO ROPE 19
PD, E27

IP20 250 cm 250 cm

220-240 V ~50/60 Hz
Material: glass

- Open cable end
- Matching accessories can be found on page 271

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 10 cm | L: 11 cm

Options	Prod. no.	GBP
gold	1007597	171.00
silver	1007596	171.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

PANTILO ROPE 20
PD, E27



IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 10 cm | L: 18 cm

Options	Prod. no.	GBP
gold	1007589	205.00
silver	1007588	205.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

PANTILO ROPE 27
PD, E27



IP20 250 cm

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 15 cm | L: 11 cm

Options	Prod. no.	GBP
gold	1007599	221.00
silver	1007598	221.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006402 247
1006403 247
1006400 247
1006398 247

PANTILO OVAL
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: aluminium

- Open cable end
- Matching accessories can be found on page 271

SOCKET INSIDE 15 W

Base: 1xE27

Options	Prod. no.	GBP
white	1006402	133.00
gold	1006403	151.00
chrome	1006398	151.00
copper	1006400	151.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

PANTILO
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: glass

- Open cable end
- Matching accessories can be found on page 271

SOCKET INSIDE 15 W

Base: 1xE27

Options	Prod. no.	GBP
white	1006396	133.00
gold	1006395	151.00
chrome	1003004	151.00
copper	1003005	151.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

PANTILO 28
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: glass

- Open cable end
- Matching accessories can be found on page 271

SOCKET INSIDE 15 W

Base: 1xE27

Options	Prod. no.	GBP
white	1006399	164.00
gold	1006397	181.00
chrome	1003006	181.00
copper	1003007	181.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PANTILO CONVEX 29
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: glass/steel

- Open cable end
- Matching accessories can be found on page 271

SOCKET INSIDE 40 W

Base: E27 | max. Ø: 10 cm | L: 20 cm

Options	Prod. no.	GBP
white	**1007881**	**195.00**
gold	**1007880**	**212.00**
chrome	**1003443**	**212.00**
copper	**1007879**	**212.00**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kW/1000h

Prod. no.: **1005265** **23.00 GBP**

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: **1010486** **24.00 GBP**

1007877 249

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PANTILO CONVEX 40
PD, E27



IP20 150 cm

220-240 V ~50/60 Hz
Material: glass/steel

SOCKET INSIDE 40 W

Base: E27 | max. Ø: 15 cm | L: 30 cm

Options	Prod. no.	GBP
white	1007878	294.00
gold	1007877	311.00
chrome	1003444	303.00
copper	1007876	311.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kW/1000h

Prod. no.: 1005265 **23.00 GBP**

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010484 **27.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008178 +1008192 251

LIGHT EYE® 90
PD, QPAR51



IP20 150 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.35 cm

Options	Prod. no.	GBP
● black	**1008172**	**72.00**
○ white	**1008173**	**72.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

LIGHT EYE® 150
PD, QPAR111



IP20 150 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Options	Prod. no.	GBP
● black	**1008178**	**114.00**
○ white	**1008179**	**114.00**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G
12 kW/1000h

C

Prod. no.: 1005297 73.00 GBP

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: 1010467 50.00 GBP

LIGHT EYE® 90
Decorative ring Ø 5,7 cm

Ø: 5.9 cm
H: 1.4 cm
Material: steel

Options	Prod. no.	GBP
● black	**1008186**	**8.00**
○ white	**1008187**	**8.00**
● gold	**1008188**	**12.00**
◑ chrome	**151049**	**12.00**

LIGHT EYE® 150
Decorative ring Ø 13,6 cm

Ø: 13.6 cm
H: 2.3 cm
Material: steel

Options	Prod. no.	GBP
● black	**1008189**	**30.00**
○ white	**1008190**	**30.00**
● gold	**1008192**	**39.00**
◑ chrome	**1008191**	**39.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006438 253

ASTO TUBE
PD, GU10

IP20 250 cm

220-240 V ~50/60 Hz
Material: aluminium

• Decorative rings available as accessories

SOCKET INSIDE 10 W

Base: 1-4xGU10

Options	Prod. no.	GBP
● black	**1006431**	**52.00**
○ white	**1006432**	**52.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

ASTO TUBE
PD, single, GU10



Options	Prod. no.	GBP
● black	**1006431**	**52.00**
○ white	**1006432**	**52.00**

ASTO TUBE
PD, double, GU10

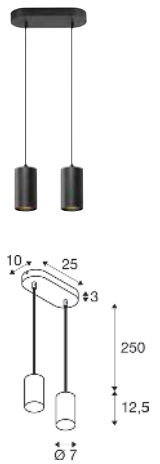

Options	Prod. no.	GBP
● black	**1006433**	**95.00**
○ white	**1006434**	**95.00**

ASTO TUBE
Decorative reflector

Ø: 6.8 cm
H: 3.95 cm
Material: polycarbonate (PC)

Options	Prod. no.	GBP
● black/chrome	**1007190**	**4.00**
● gold	**1006450**	**4.00**
● chrome	**1006449**	**4.00**
● copper	**1006451**	**4.00**

ASTO TUBE
PD, triple, GU10

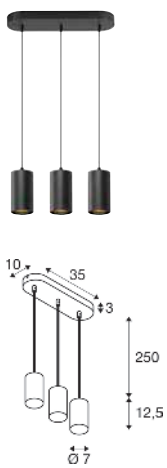

Options	Prod. no.	GBP
● black	**1006435**	**138.00**
○ white	**1006436**	**138.00**

ASTO TUBE
PD, quadruple, GU10

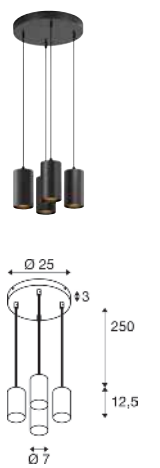

Options	Prod. no.	GBP
● black	**1006437**	**168.00**
○ white	**1006438**	**168.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010516 255

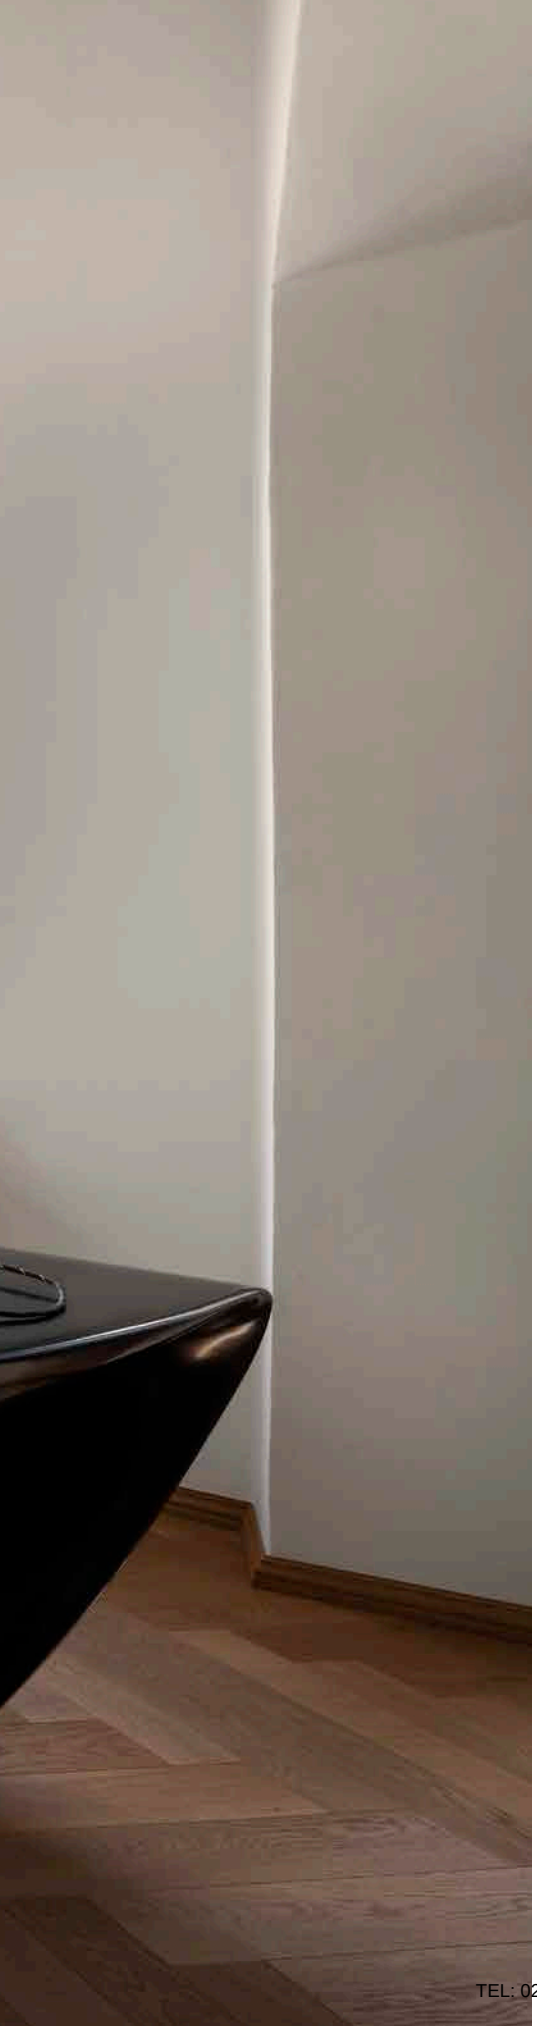

GLENOS® PRO
PD, 1,2 m, DALI, UGR16

NEW

Dali Touch IP20 IK02 140° 75°
50000h L80B10 210 cm UGR 16 15

220-240 V ~0/50/60 Hz | 1600 mA
Total wattage: 60 W
Material: aluminium/plastic PC

LED INSIDE CRI 90

Up	3700 lm	3000 K
Down	3200 lm	
Up	4000 lm	4000 K
Down	4400 lm	

Options	Prod. no.	GBP
● black 6900 lm | 3000 K	**1010510**	**390.00**
● black 7400 lm | 4000 K	**1010512**	**390.00**
◑ white/black 7500 lm | 3000 K	**1010509**	**390.00**
◑ white/black 7800 lm | 4000 K	**1010511**	**390.00**

GLENOS® PRO
PD, 1,5 m, DALI, UGR16

NEW

Dali Touch IP20 IK02 140° 75°
50000h L80B10 210 cm UGR 16 13

220-240 V ~0/50/60 Hz | 1850 mA
Total wattage: 70 W
Material: aluminium/plastic PC

LED INSIDE CRI 90

Up	4350 lm	3000 K
Down	3600 lm	
Up	4600 lm	4000 K
Down	5550 lm	

Options	Prod. no.	GBP
● black 7950 lm | 3000 K	**1010514**	**424.00**
● black 8450 lm | 4000 K	**1010516**	**424.00**
◑ white/black 8500 lm | 3000 K	**1010513**	**424.00**
◑ white/black 9400 lm | 4000 K	**1010515**	**424.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006345 257

WORKLIGHT
PD, DALI

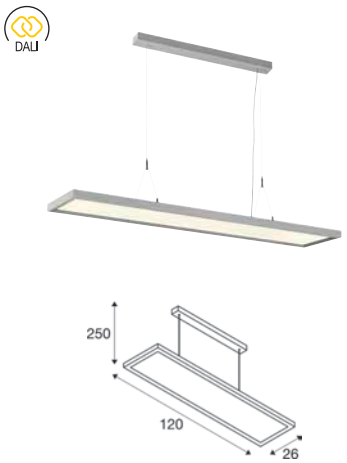

220-240 V ~50/60 Hz | 1550 mA
Total wattage: 57 W
Material: aluminium

• Safety plug

INSIDE CRI 80

Down	3000 lm	4000 K
Up	2000 lm	

Options	Prod. no.	GBP
● black	**1005395**	**403.00**
○ white	**1005396**	**403.00**
◎ silver	**1006345**	**399.00**

WORKLIGHT PRO 120
PD, DALI

220-240 V ~50/60 Hz | 1200 mA
Total wattage: 50 W
Material: aluminium/steel

INSIDE

Down	3300 lm	4000 K
Up	2800 lm	

Options	Prod. no.	GBP
● black	**1007468**	**428.00**
○ white	**1007469**	**428.00**
● grey	**1007470**	**428.00**

WORKLIGHT PRO 150
PD, DALI

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 59 W
Material: aluminium/steel

INSIDE CRI 80

Down	3900 lm	4000 K
Up	3300 lm	

Options	Prod. no.	GBP
● black	**1007471**	**514.00**
○ white	**1007472**	**510.00**
● grey	**1007473**	**510.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010429 259

PANEL 60
PD, round, PHASE





C,L IP20 IK02 L80B10 200 cm UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel

INSIDE

3050 lm | 3000 K	3300 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1010426**	**268.00**
● grey	**1010427**	**268.00**

PANEL 60
PD, round, DALI





Dali Touch IP20 IK02 L80B10 200 cm UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel

INSIDE

3050 lm | 3000 K	3300 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1010428**	**276.00**
● grey	**1010429**	**276.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1001403 261

GLENOS®
PD, 1 m, 1-10 V

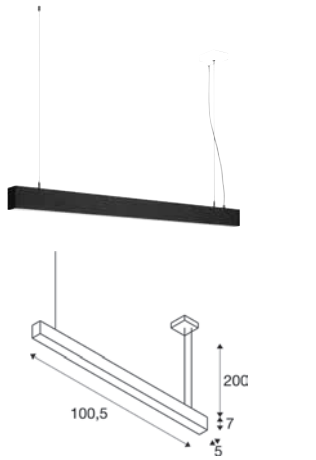



220-240 V ~50/60 Hz | 1000 mA
Total wattage: 43 W
Material: aluminium/plastic

2850 lm | 3000 K | 3300 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	**1001400**	**338.00**
● black 4000 K	**1001403**	**338.00**

GLENOS®
PD, 2 m, 1-10 V

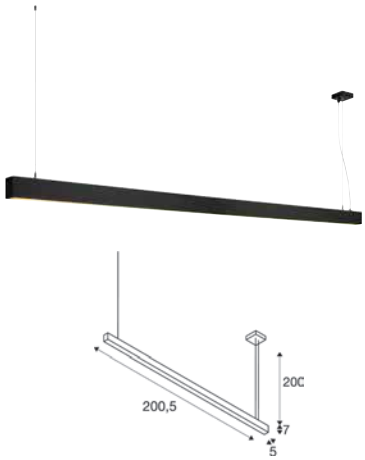



220-240 V ~50/60 Hz | 1000 mA
Total wattage: 85 W
Material: aluminium/plastic

5700 lm | 3000 K | 6600 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	**1001406**	**464.00**
● black 4000 K	**1001409**	**464.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1001309 263

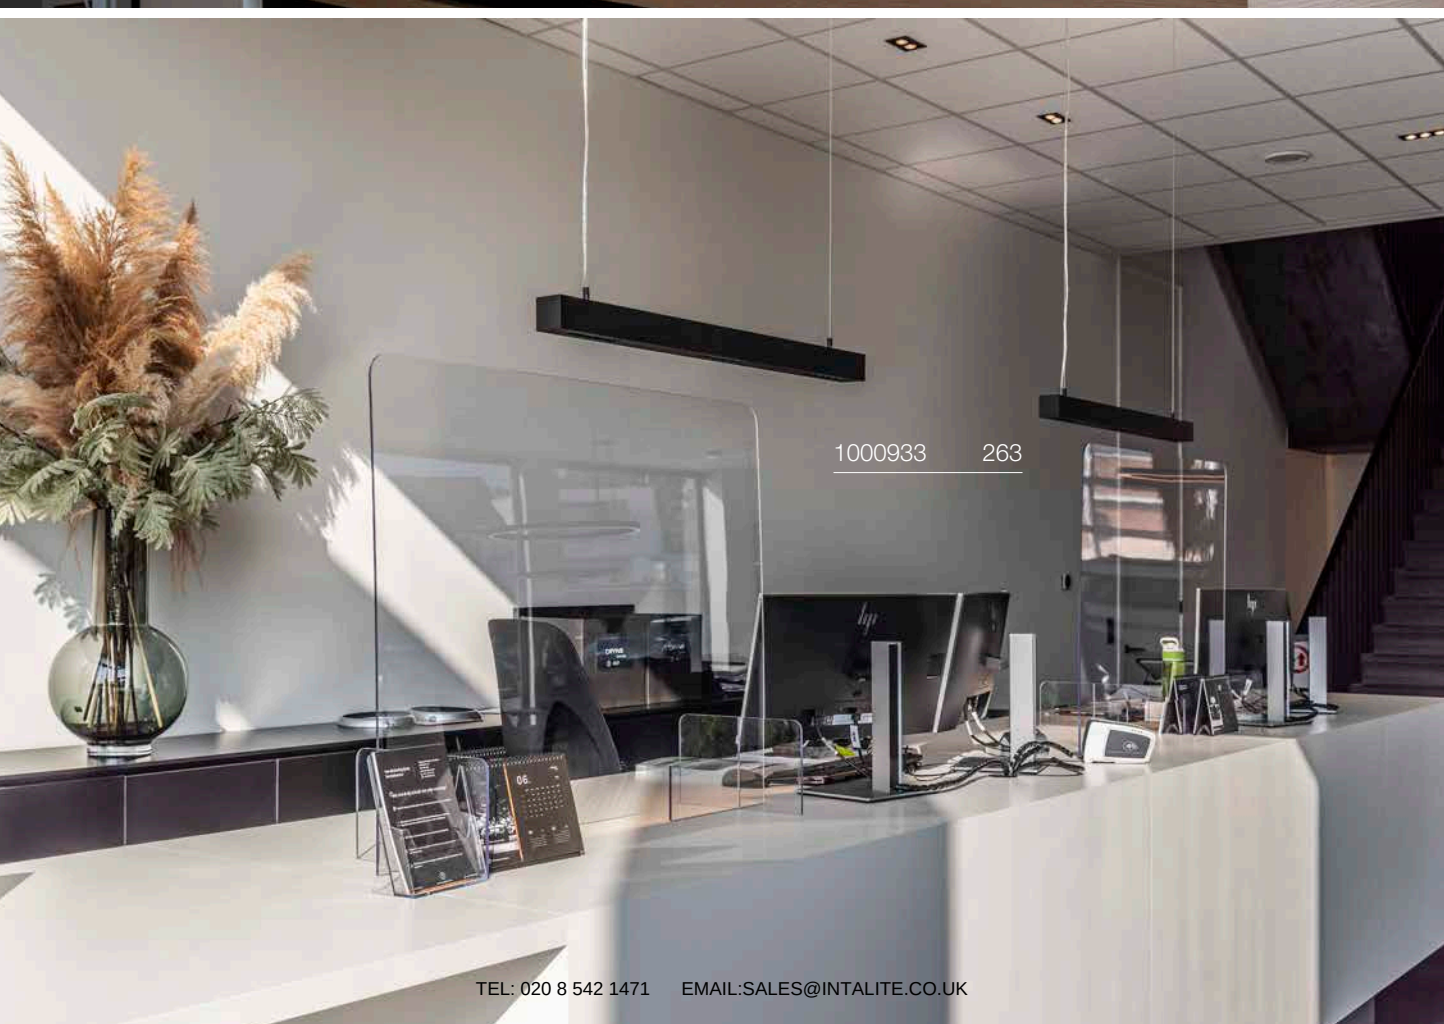
1000933 263

Q-LINE®
PD, 1 m, BAP, PHASE

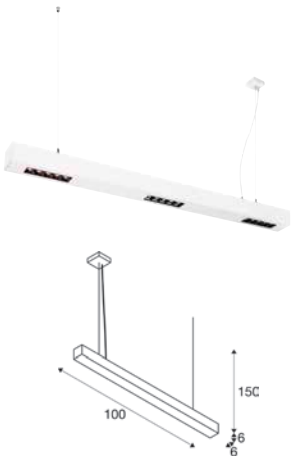

IP20 | 30° | 25000 h L70B50 | 150 cm | UGR 10

220-240 V ~50/60 Hz | 900 mA
Total wattage: 46 W
Material: aluminium/plastic

LED INSIDE | CRI 90

2100 lm | 3000 K | 2300 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	**1000927**	**416.00**
● black 4000 K	**1000933**	**416.00**
○ white 3000 K	**1000926**	**416.00**
○ white 4000 K	**1000932**	**412.00**

Q-LINE®
PD, 2 m, BAP, PHASE

IP20 | 30° | 25000 h L70B50 | 150 cm | UGR 10

220-240 V ~50/60 Hz | 900 mA
Total wattage: 93 W
Material: aluminium/plastic

LED INSIDE | CRI 90

4200 lm | 3000 K | 4600 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	**1000930**	**623.00**
● black 4000 K	**1000936**	**623.00**
○ white 3000 K	**1000929**	**623.00**
○ white 4000 K	**1000935**	**623.00**

Q-LINE®
PD

DALI

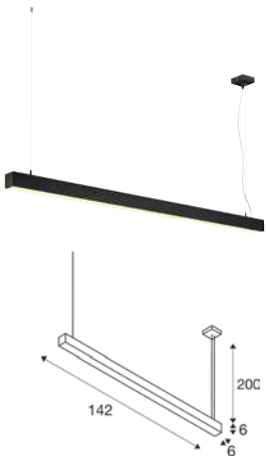

Dali | Touch | IP20 | 120° | 50000 h L80B10 | 200 cm | UGR 28

Total wattage: 46 W
Material: aluminium/plastic PC

LED INSIDE | CRI 80

Down | 4100 lm | 3000 K

Options	Prod. no.	GBP
● black	**1001309**	**498.00**
○ white	**1001310**	**498.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009015 265

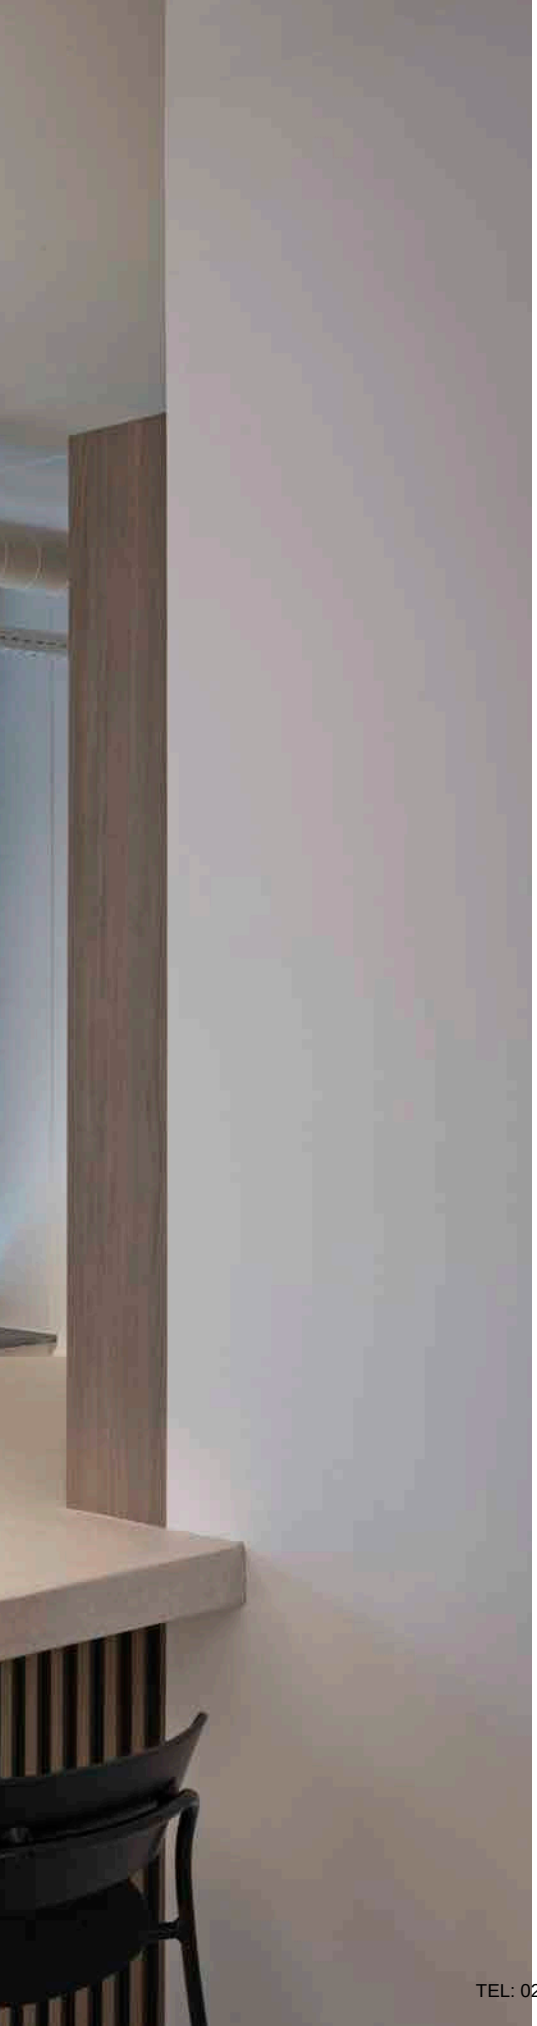

GRIP! FLAT
PD, PHASE

UPDATE



C,L | IP20 | L70B50 | 200 cm | UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 16 W

- Including colour temperature switch 2700 K / 3000 K
- Honeycomb included

LED INSIDE | CRI 90

Down	400 lm | 2700 K	430 lm | 3000 K

Options	Prod. no.	GBP
black/gold	1009014	246.00
white/black	1009015	246.00

⊕

Product	Prod. no.	GBP
GRIP! FLAT decorative ring		
black	1009102	27.00
white	1009103	27.00
gold	1009104	27.00
Felt shade A		
black	1010403	118.00
grey	1010404	118.00
ochre	1010405	118.00
Felt shade B		
black	1010406	84.00
grey	1010407	84.00
ochre	1010408	84.00

GRIP! FLAT
Felt shade Ø 50 cm x 6,2 cm

UPDATE

Ø: 50 cm
H: 6.2 cm

Options	Prod. no.	GBP
black	1010403	118.00
grey	1010404	118.00
ochre	1010405	118.00

GRIP! FLAT
Felt shade Ø 50 cm x 0,6 cm

UPDATE



Ø: 50 cm
H: 0.6 cm

Options	Prod. no.	GBP
black	1010406	84.00
grey	1010407	84.00
ochre	1010408	84.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

OCULUS
PD, single, PHASE



IP20 | 100° | 25000 h L70B50 | 250

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

- Additional frosted lens included
- Matching accessories can be found on page 271
- Open cable end

LED INSIDE | CRI 90

36 lm|2000 K – 780 lm|3000 K

Options	Prod. no.	GBP
● black	**1004672**	**180.00**
○ white	**1004673**	**180.00**

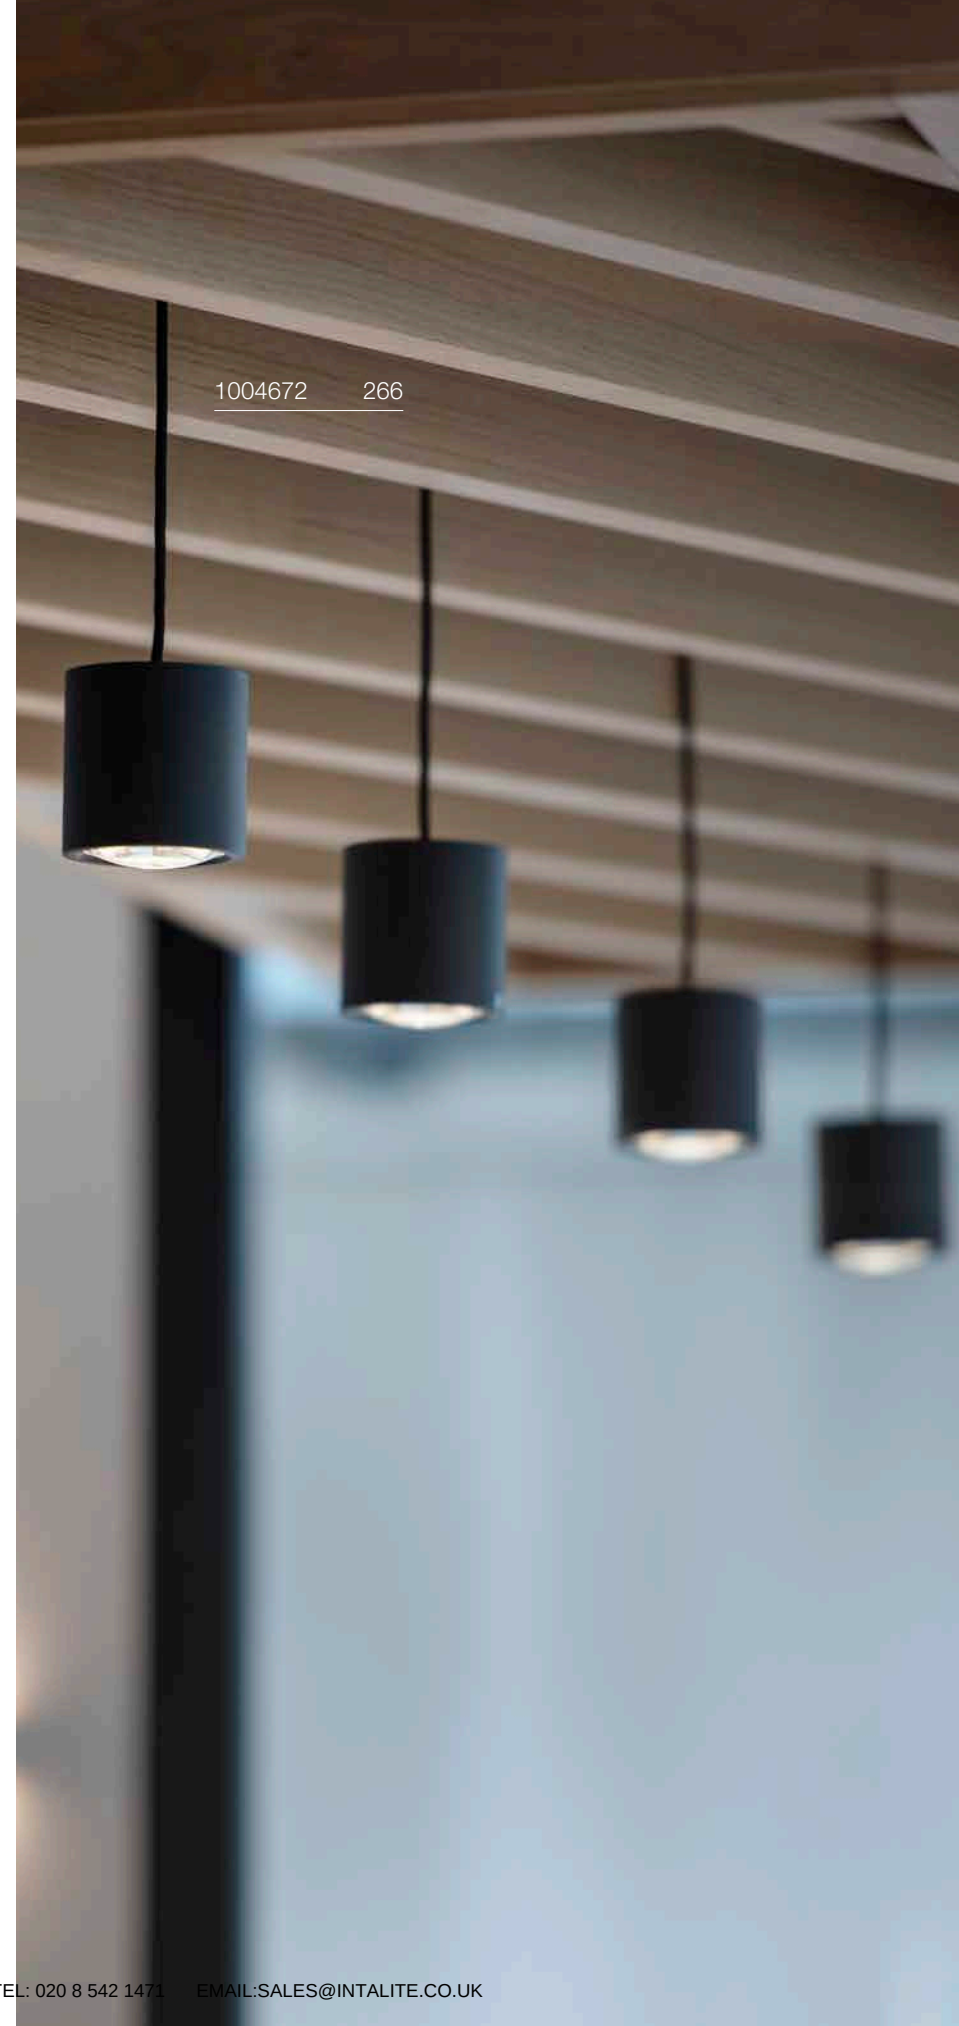

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

OCULUS
PD, DTW, PVD

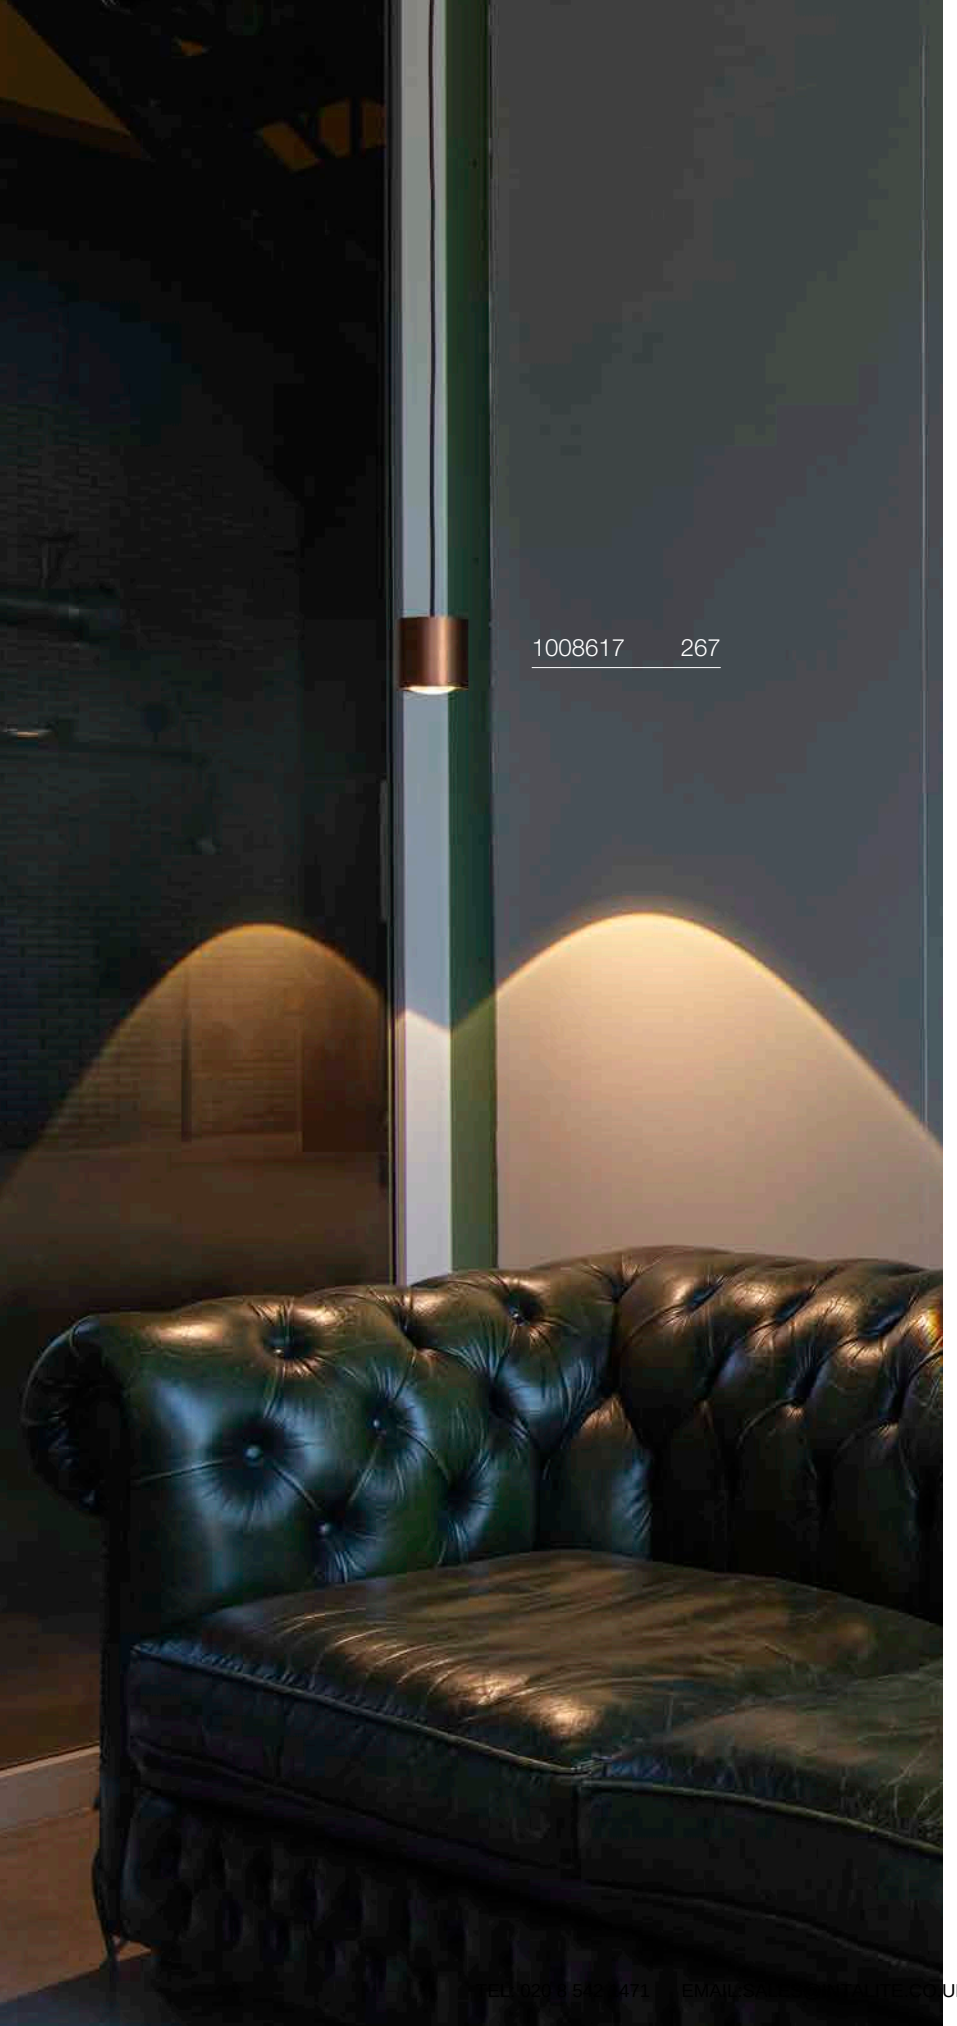

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

Down 36 lm|2000 K – 780 lm|3000 K

Options	Prod. no.	GBP
brass	1008616	254.00
dark bronze	1008615	254.00
dark copper	1008617	254.00

1010419+1008159 269+1004

FITU
PD, E27



IP20 500

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable
- Matching accessories can be found on page 271
- Open cable end

SOCKET INSIDE 60 W

Base: 1xE27

Options	Prod. no.	GBP
● black	132690	52.00
○ white	132691	52.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

FITU
PD, E27, stone

NEW



IP20 500 cm

220-240 V ~50/60 Hz
Material: stone

- Open cable end

SOCKET INSIDE 15 W

Base: 1xE27

Options	Prod. no.	GBP
● black	1010417	71.00
● grey	1010419	71.00
● beige	1010418	71.00

E27 | 6 W | 330°
260 lm | 1900 K |
6 kW/1000h

Prod. no.: 1008163 72.00 GBP

FITU
PD, E27, ribbed

NEW



IP20 500 cm

220-240 V ~50/60 Hz
Material: aluminium

- Open cable end

SOCKET INSIDE 15 W

Base: 1xE27

Options	Prod. no.	GBP
● black	1010420	50.00
● gold	1010421	50.00

E27 | 4 W | 325°
250 lm | 1800 K | EEC = G
4 kW/1000h

Prod. no.: 1008645 5.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

132690 269
INSTALLATIE
ALLES KEURIG
GERUIMD.
stof op de kozijnen
AFGEDAAN
SAMAN
SAMEN IN TECHNIEK
VOOR MIJ IS HET
BELANGRIJK
dat ik een
KLIK
MET HET BEDRIJF HEB.
EN DAT HAD IK METEEN MET
SAMAN Groep
» VAN ZONNEPANEEL TOT LAADPAAL
» VAN DAKGOOT TOT CV-KETEL
» VAN STOPCONTACT TOT DATANETWERK
» VAN ROOSTERVLOER TOT HEKWERK
ik ben zeer tevreden
over de
NETTE, PROFESSIONELE
& klantvriendelijke
WERKWIJZE

FITU | Single ceiling rosette

16A max.
H: 3.9 cm
Material: steel
including strain relief

Options	Prod. no.	GBP
● black	132600	23.00
○ white	132601	23.00
● gold	1002163	25.00
◑ chrome	132605	25.00

FITU | Triple ceiling rosette

16A max.
H: 5.4 cm
Material: steel
including strain relief

Options	Prod. no.	GBP
● black	132610	55.00
○ white	132611	55.00

FITU | Surface-mounted ceiling rosette

16A max.
H: 2.6 cm
Ø: 9 cm
Material: steel

Options	Prod. no.	GBP
● black	1004744	30.00
○ white	1004745	30.00
● gold	1006377	32.00

FITU | Recessed ceiling rosette

16A max.
H: 3.3 cm
Material: steel/
polyamide 66 (PA)

Options	Prod. no.	GBP
● black	1004674	20.00
○ white	1004675	20.00
● gold	1006378	24.00

FITU | Ceiling hook

L: 4.6 cm
Material: aluminium

Options	Prod. no.	GBP
● black	132670	17.00
○ white	132671	17.00

1-phase light adapter

6A max.
H: 3.2 cm
L: 8.5 cm
W: 3.5 cm
Material: polycarbonate (PC)

Options	Prod. no.	GBP
● black	143120	13.00
○ white	143121	13.00
● grey	143124	13.00

3-phase light adapter

16A max.
H: 4.5 cm
L: 9.6 cm
W: 3.5 cm
Material: plastic

Options	Prod. no.	GBP
● black	145990	17.00
○ white	1001542	17.00
● grey	145994	17.00

FITU | Cable clamp

L: 3.1 cm
Material: aluminium

Options	Prod. no.	GBP
● black	132680	11.00
○ white	132681	11.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FENDA
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: steel/plastic

- Open cable end
- Matching accessories can be found on page 271

SOCKET INSIDE 60 W

Base: 1xE27

Options	Prod. no.	GBP
● black	**132660**	**26.00**
○ white	**132661**	**26.00**
◑ chrome	**132662**	**29.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: **1005303** **9.00 GBP**

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: **1010486** **24.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FENDA
Ø 45 cm, round

Ø: 45.5 cm
H: 28 cm
Material: textile/steel

Options	Prod. no.	GBP
black/copper	156122	76.00
white	156111	72.00
grey	1004775	72.00
beige	156113	72.00

Product	Prod. no.	GBP
Acrylic glass cover		
white	156100	39.00

FENDA
Ø 70 cm, round

Ø: 70 cm
H: 36 cm
Material: textile/steel

- Not suitable for Fenda Bow

Options	Prod. no.	GBP
black/copper	1000580	110.00
white	1000579	97.00

Product	Prod. no.	GBP
Acrylic glass cover		
white	1000957	81.00

FENDA
Ø 30 cm, round

Ø: 30 cm
H: 20 cm
Material: textile/steel

Options	Prod. no.	GBP
black/copper	155592	61.00
white	155582	46.00
grey	1004774	46.00
beige	155583	46.00

Product	Prod. no.	GBP
Acrylic glass cover		
white	155570	25.00

FENDA
Glass shade 12.5 cm, round

Ø: 12.5 cm
H: 20 cm
Material: glass

Options	Prod. no.	GBP
brown	1000773	56.00

FENDA
15 cm, round

Ø: 15 cm
H: 40 cm
Material: textile/steel

Options	Prod. no.	GBP
grey	1004773	39.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MIX & MATCH FENDA

FENDA TL

Black | *155780*

FENDA FL

Black | *155790*

FENDA TL

Black | *155540*

FENDA FL

Black | *155490*

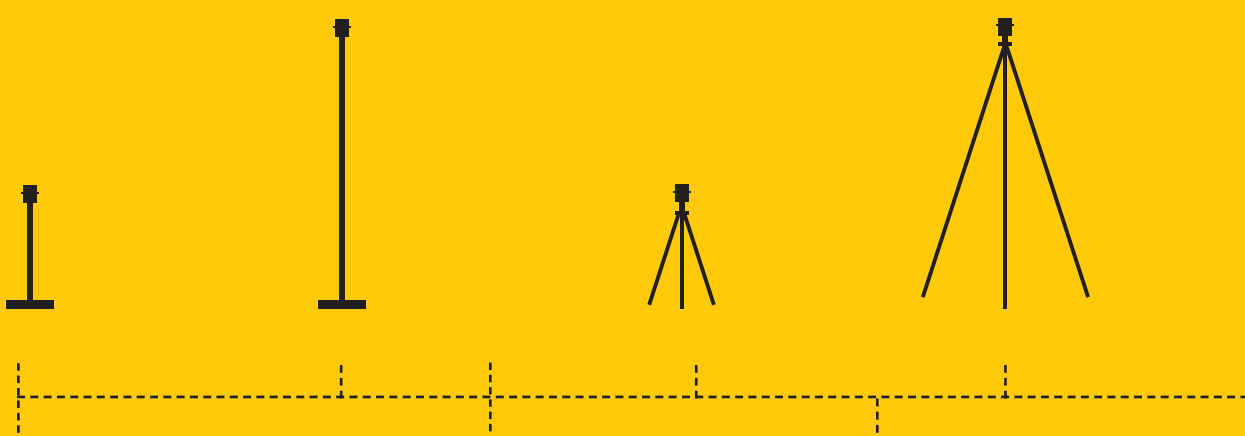

FENDA Ø15

Black | *156152*
White | *156141*
Beige | *156143*
Grey | *1004773*

FENDA Ø30

Black | *155592*
White | *155582*
Beige | *155583*
Grey | *1004774*

FENDA Ø45

Black | *156122*
White | *156111*
Beige | *156113*
Grey | *1004775*

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FITU PD

Black | *132690*
White | *132691*

Stone

Black | *1010417*
Beige | *1010418*
Grey | *1010419*

Metal

Black | *1010420*
Gold | *1010421*

FENDA PD

Black | *132660*
White | *132661*
Chrome | *132662*

FENDA CL

Black | *155550*
White | *155551*

FITU CRANE BASE

Black | *1004682*



FENDA Ø70

Black | *1000580*
White | *1000579*

FENDA Ø12,5

Glass Shade

Brown | *1000773*

The FITU CRANE BASE can also be combined with the FENDA PD and FENDA lampshades

Combine the SLV Mix & Match products to suit your taste. Designed to work perfectly together, you can mix and match within the FENDA family or even combine the FENDA and FITU product families. You can recognise SLV Mix & Match products by the following symbol:

MIX match

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

HELIA 30
PD, PHASE





220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.2 W
Material: aluminium

INSIDE

590 lm | 3000 K

Options	Prod. no.	GBP
● black	**152360**	**188.00**

HELIA 30
PD





500 mA
Total wattage: 7.5 W
Material: aluminium

- The product is equipped with a ceiling rosette
- Material thickness of mounting surface max. 12 mm

INSIDE

500 lm | 3000 K

Options	Prod. no.	GBP
● black	**158400**	**154.00**

⊕

Product	Prod. no.	GBP
LED driver 21 W 500 mA including strain relief		
○ white	**1007226**	**26.00**
LED driver 20 W 350 mA / 500 mA Phase control dimmable including strain relief		
○ white	**1007227**	**35.00**
LED driver 25 W 150-700 mA DALI dimmable including strain relief		
○ white	**1007229**	**61.00**

152360 + 152370 276 + 277

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

HELIA 40
PD, PHASE

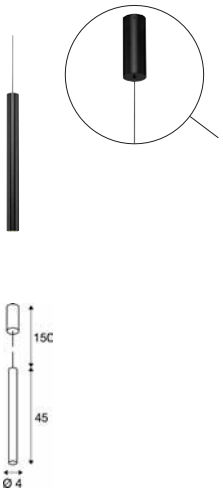

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: aluminium

750 lm | 3000 K

Options	Prod. no.	GBP
● black	**152370**	**214.00**

HELIA 40
PD

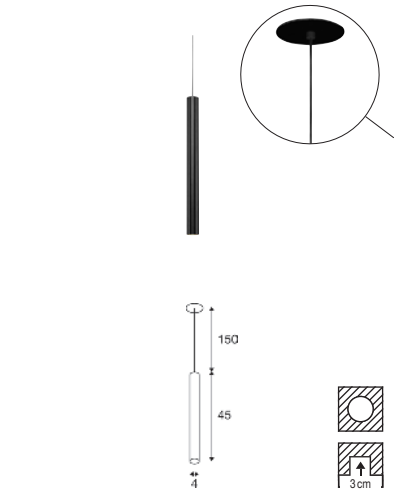

500 mA
Total wattage: 9 W
Material: aluminium

- The product is equipped with a ceiling rosette
- Material thickness of mounting surface: max. 12 mm

750 lm | 3000 K

Options	Prod. no.	GBP
● black	**158410**	**171.00**

⊕

Product	Prod. no.	GBP
LED driver 21 W 500 mA including strain relief		
○ white	**1007226**	**26.00**
LED driver 20 W 350 mA / 500 mA Phase control dimmable including strain relief		
○ white	**1007227**	**35.00**
LED driver 25 W 150-700 mA DALI dimmable including strain relief		
○ white	**1007229**	**61.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008134 279

ENOLA® B
PD, QPAR51

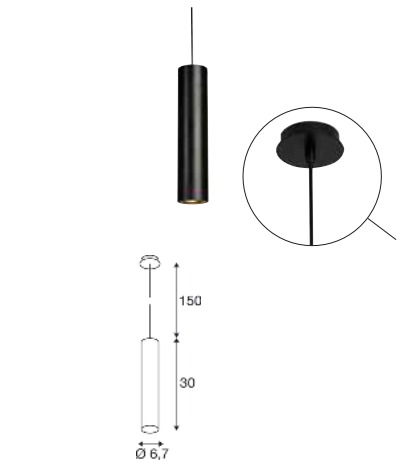

IP20 | 150 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE | 50 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**151850**	**95.00**
○ white	**151851**	**95.00**
● gold	**151853**	**99.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

ENOLA®
PD, E27

UPDATE

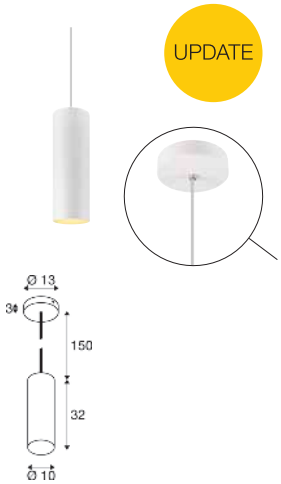

IP20 | 150 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE | 50 W

Base: 1xE27 max. Ø: 9 cm | L: 18 cm

Options	Prod. no.	GBP
● black	**1008135** ●	**70.00**
○ white	**1008133** ●	**70.00**
● gold	**1008134** ●	**81.00**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A
4 kW/1000h

Prod. no.: 1008641 6.50 GBP

ANELA
PD, PHASE

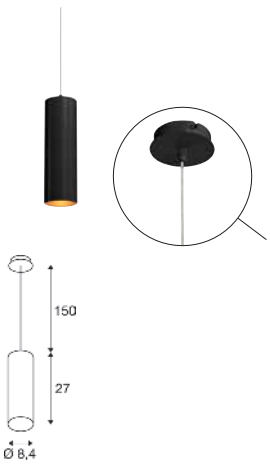

C | IP20 | 28° | 30000 h L80B20 | 150 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: aluminium

- Reflector not included
- Luminous flux with reflector 1000809 = 500 lm/ luminous flux with reflector 1000810 = 620 lm/ luminous flux with reflector 1000811 = 200 lm/ luminous flux with reflector 1000812 = 600 lm

LED INSIDE | CRI 90

240 lm | 3000 K | 820 lm

Options	Prod. no.	GBP
● black	**1000813**	**168.00**

Product	Prod. no.	GBP
Reflector 28°		
● gold	**1000809**	**17.00**
● grey	**1000810**	**17.00**
● black	**1000811**	**17.00**
○ white	**1000812**	**17.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008131 281

PARA CONE 20
PD, E27

UPDATE

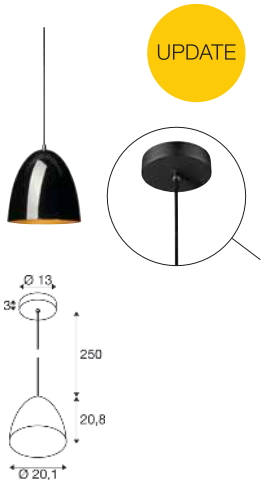

IP20 250 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 60 W

Base: 1xE27

Options	Prod. no.	GBP
gold/black	1008129	100.00
copper/white	1008130	140.00

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F
6 kW/1000h

Prod. no.: 1008153 46.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

PARA CONE 30
PD, E27

UPDATE

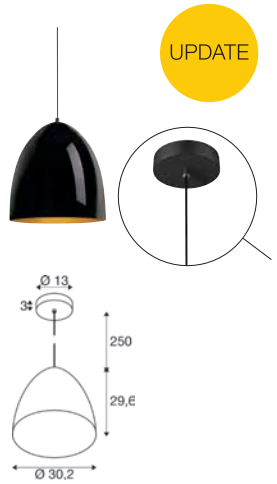

IP20 250 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 60 W

Base: 1xE27

Options	Prod. no.	GBP
black/gold	1008131	170.00
copper/white	1008132	191.00

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F
6 kW/1000h

Prod. no.: 1008153 46.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010484 27.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PHELIA 10
PD, E27



IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable

SOCKET INSIDE 23 W

Base: 1xE27

Options	Prod. no.	GBP
black/gold	1002951	113.00

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005305 17.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

PHELIA 20
PD, E27



IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable

SOCKET INSIDE 23 W

Base: 1xE27

Options	Prod. no.	GBP
black/gold	1002949	139.00

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005305 17.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

PHELIA 30
PD, E27



IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable

SOCKET INSIDE 23 W

Base: 1xE27

Options	Prod. no.	GBP
black/gold	1002950	161.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kW/1000h

Prod. no.: 1005265 23.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FORCHINI 50
PD, E27



IP20 150 cm

220-240 V ~50/60 Hz
Material: GRP

SOCKET INSIDE 40 W

Base: 1xE27	L: 20 cm

Options	Prod. no.	GBP
black/gold	**1008535**	**196.00**

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F
6 kW/1000h

Prod. no.: **1008153** **46.00 GBP**

FORCHINI 70
PD, E27



IP20 150 cm

220-240 V ~50/60 Hz
Material: GRP

SOCKET INSIDE 40 W

Base: 1xE27	L: 20 cm

Options	Prod. no.	GBP
black/gold	**1008538**	**347.00**

E27 | 6 W | 330°
570 lm | 2200 K |
6 kW/1000h

Prod. no.: **1008156** **46.00 GBP**

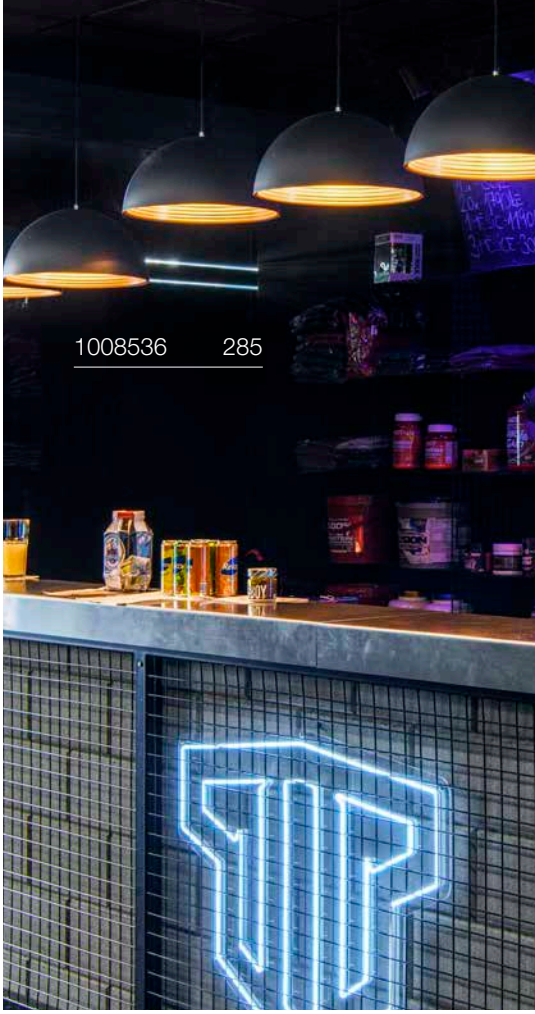

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

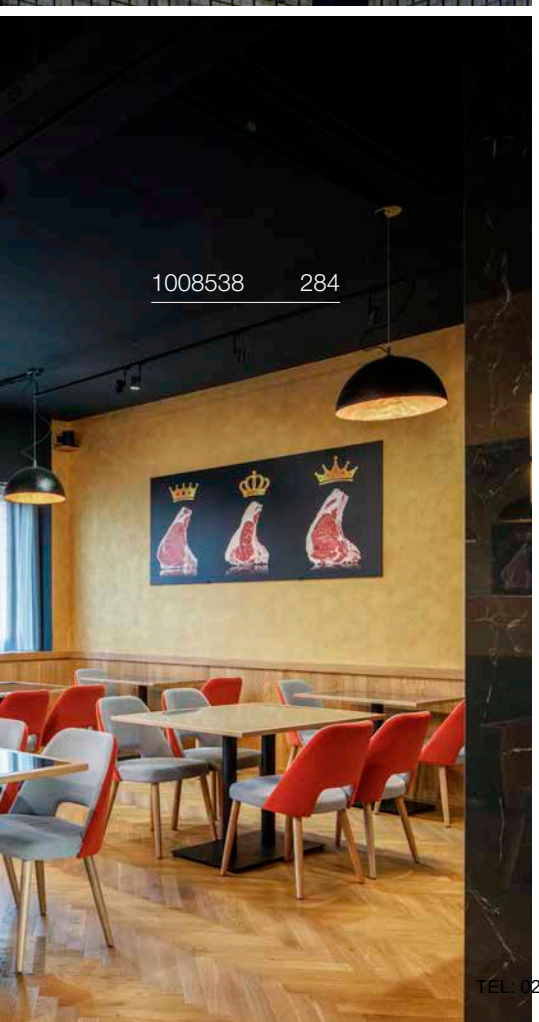

FORCHINI M 40
PD, E27



IP20 150 cm

220-240 V ~50/60 Hz
Material: steel/aluminium

SOCKET INSIDE 40 W

Base: 1xE27 | L: 15.2 cm

Options	Prod. no.	GBP
black/gold	**1008536**	**196.00**

E27 | 6 W | 330°
570 lm | 2200 K |
6 kW/1000h

Prod. no.: 1008156 46.00 GBP

FORCHINI M 50
PD, E27



IP20 150 cm

220-240 V ~50/60 Hz
Material: steel/aluminium

SOCKET INSIDE 40 W

Base: 1xE27 | L: 18 cm

Options	Prod. no.	GBP
black/gold	**1008537**	**216.00**

E27 | 8 W | 330°
400 lm | 1900 K |
8 kW/1000h

Prod. no.: 1008159 77.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

165410 287

165400 287

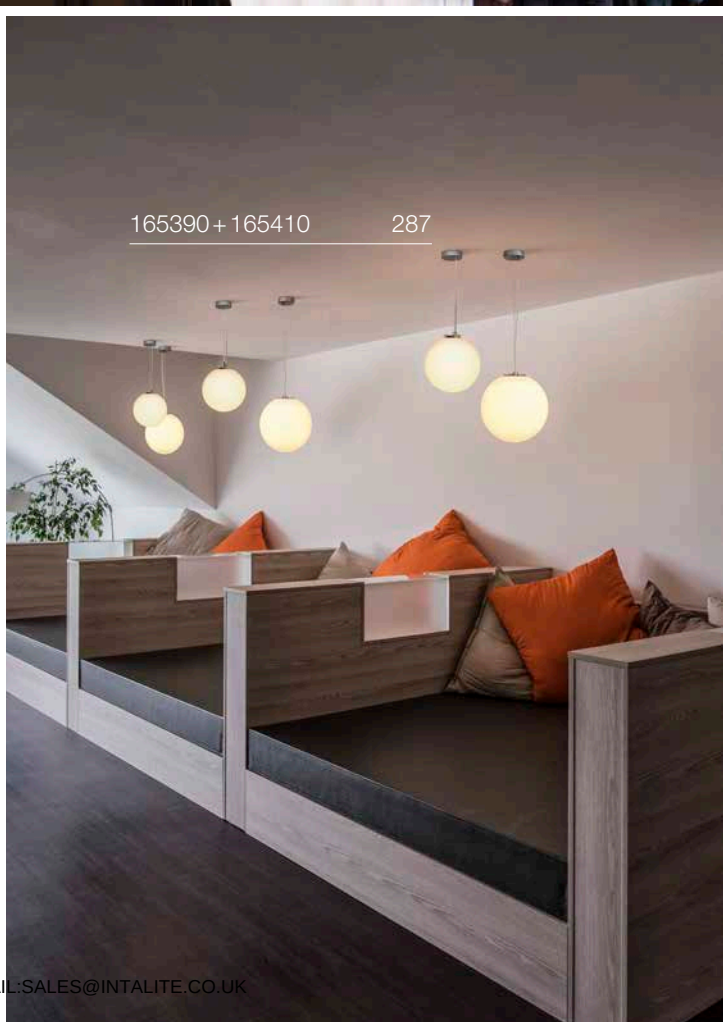
165390 + 165410 287

ROTOBALL 25
PD, E27



IP20 200 cm

220-240 V ~50/60 Hz
Material: steel/polyethylene (PE)

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 7 cm

Options	Prod. no.	GBP
○ white	165390	139.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

ROTOBALL 40
PD, E27



IP20 200 cm

220-240 V ~50/60 Hz
Material: steel/polyethylene (PE)

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 9.5 cm

Options	Prod. no.	GBP
○ white	165410	156.00

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kW/1000h

Prod. no.: 1005302 11.00 GBP

ROTOBALL 50
PD, E27



IP20 200 cm

220-240 V ~50/60 Hz
Material: steel/polyethylene (PE)

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 9.5 cm

Options	Prod. no.	GBP
○ white	165400	191.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

SMART

E27 | 9.5 W | 190°
1100 lm | 2200-6500 K | EEC = F
10 kWh/1000h

Prod. no.: 1010465 30.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PARA DOME
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: aluminium

• Open cable end

SOCKET INSIDE 150 W

Base: 1xE27 max. Ø: 7 cm

Options	Prod. no.	GBP
● black	**1005214**	**71.00**
● grey	**1005215**	**71.00**

E27 | 11 W | 330°
1250 lm | 2700 K | EEC = E
11 kW/1000h

Prod. no.: 1008162 72.00 GBP

SMART

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A
4 kW/1000h

Prod. no.: 1008641 6.50 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
● black	**132600**	**23.00**
1-phase light adapter		
● black	**143120**	**13.00**
3-phase light adapter		
● black	**145990**	**17.00**
Ceiling rosette		
● black	**210060**	**28.00**
Recessed ceiling rosette		
● black	**1004674**	**20.00**
Surface-mounted ceiling rosette		
● black	**1004744**	**30.00**

PARA DOME
Shade

IP20

Ø: 30.8 cm
H: 20.6 cm
Material: aluminium

Options	Prod. no.	GBP
● black/gold	**1006410**	**86.00**
● black	**1005216**	**86.00**
● grey	**1005217**	**86.00**

PARA DOME
Shade

IP20

Ø: 31.5 cm
H: 20 cm
Material: polycarbonate (PC)

Options	Prod. no.	GBP
○ Transparent	**1005218**	**86.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PARA 380
PD, E27

IP20 150 cm

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 20 W

Base: 1xE27

Options	Prod. no.	GBP
● black	**165359**	**142.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kW/1000 h

Prod. no.: **1005302** **11.00 GBP**

SMART

E27 | 9.5 W | 190°
1100 lm | 2200-6500 K | EEC = F
10 kWh/1000 h

Prod. no.: **1010465** **30.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010301 306

QUIMERA | 295

LYGANT | 297

NEW

SUN MIRROR | 299

NEW

MIX match

VARYT | 301

NEW

SUN | 302–305

NEW

DYSKO | 306–307

NUMINOS® | 308–315

MEDO® PRO | 316–323

MEDO® | 234–325

ONE | 326–327

ONE LINEAR | 328–329

ONE | 331

TRUKKO | 332

TRUKKO | 332–333

TRUKKO | 333

SEDO | 334

ARLINA | 335

WL 106 | 336

MIBO UP/DOWN | 337

MAGANDA | 337

DORISA | 339

GLENOS® 60 | 339

Q–LINE® | 340

L–LINE | 341

PANTILO ROPE | 345

ASTO TUBE | 347

MIX match

MANA | 349–351

OCULUS | 353

PLASTRA | 354

PLASTRA | 355

PLASTRA | 355

PLASTRA | 357

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PLASTRA | 357

PLASTRA 101 | 359

PLASTRA | 359

PLASTRA 104 | 359

NEW

WUD WL | 361

LOGS IN | 362

LOGS IN L | 363

QUAD FRAME | 365

WL 149 | 367

SHELL 30 | 367

ASSO 300 | 368–369

OSSA | 369

CARISO | 370

CHROMBO | 371

DIRETO 60 | 373

DENA 30 | 373

BASKET | 373

FITU | 375

THEO UP/DOWN | 375

SOLID CUBE | 375

ENOLA® B | 377

FENDA | 378

KENKUA SPOT | 379

COUPA | 379

KARPO MAGN | 380

KARPO GOOSE | 380

KARPO 30 | 381

KARPO | 381

SOMNILA SPOT | 382–383

SOMNILA FLEX | 383

DIO FLEX PLATE | 385

DISPLAY ADL 50 | 385

PHELIA | 386

MERADO FLOOD | 386

KARPO 30 | 387

PURI 2.0 TUBE | 388–389

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SOCKET

PURI 2.0 CONE | 390–391

SOCKET

PURI 2.0 DOME | 392–393

SOCKET

PURI | 397

LED

NOBLO® | 399–401

NEW

LED

KALU 2.0 | 403

NEW

LED

KALU 2.0 | 403

SOCKET

PANTILO ROPE | 405

NEW

LED

CYFT | 406–409

SOCKET

ASTO TUBE | 411

SOCKET

ASTO TUBE | 411

SOCKET

KALU | 413

NEW

LED

GRIP! FLAT | 415

SOCKET

ENOLA® B | 417

SOCKET

ALTRA DICE | 418

SOCKET

SPOT 79 | 419

LED

SENSER | 421–423

SOCKET

MELAN | 424

LED

SIMA | 425

LED

LIPSY® | 426–429

LED

BATTEN | 431

LED

SIGHT 115 | 431

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008036 295

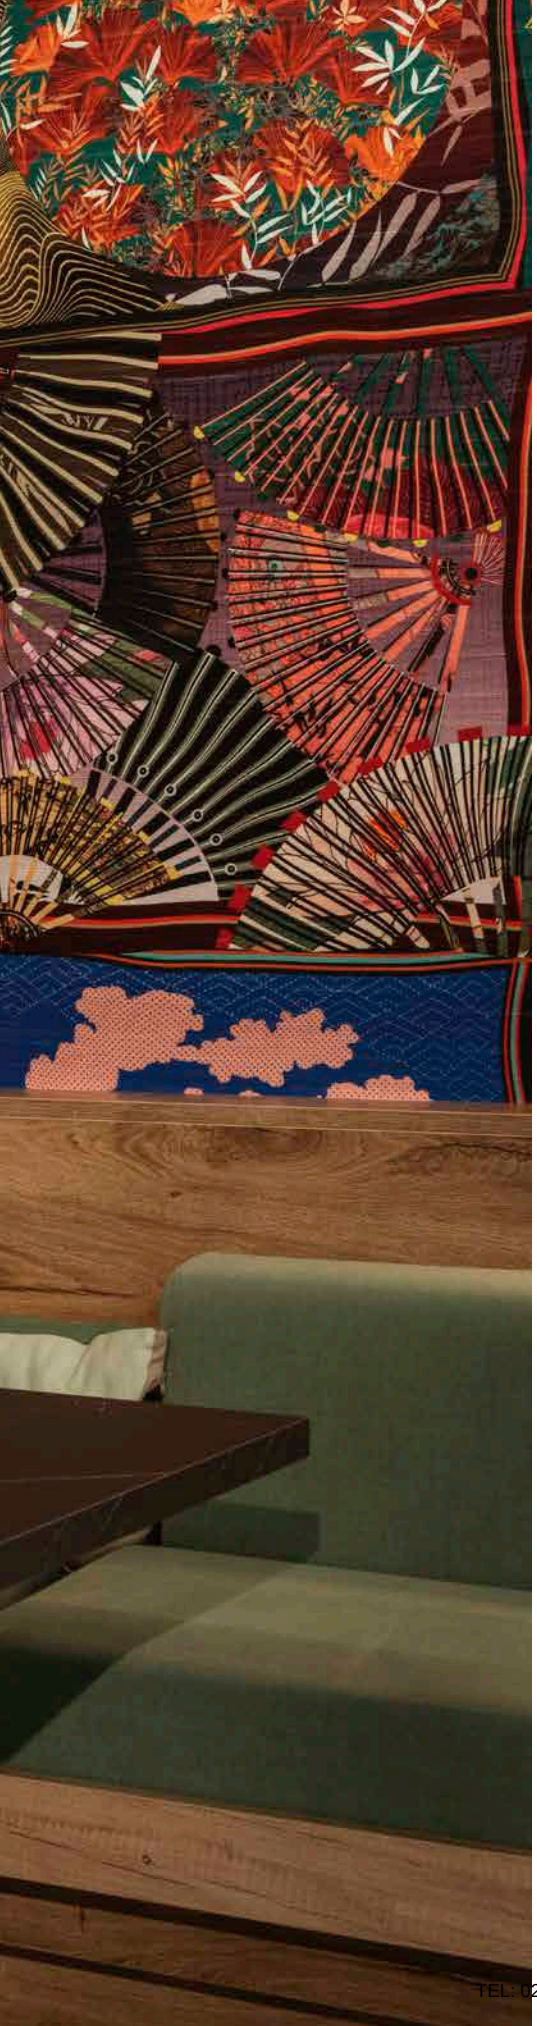

QUIMERA
WL, Phase



IP20 IK03 350° 50000 h L80B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W
Material: aluminium

LED INSIDE CRI 90

Indirect	330 lm | 2700 K	350 lm | 3000 K

Options	Prod. no.	GBP
brass	1008036	309.00
dark bronze	1008035	309.00
dark copper	1008037	309.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007618 297

LYGANT
WL, single



IP44 | 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8 W
Material: aluminium

LED INSIDE | CRI 90

560 lm | 3000 K

Options	Prod. no.	GBP
black	**1007614**	**214.00**
brass	**1007612**	**240.00**
chrome	**1007615**	**238.00**

LYGANT
WL, double



IP44 | 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium

LED INSIDE | CRI 90

800 lm | 3000 K

Options	Prod. no.	GBP
black	**1007618**	**308.00**
brass	**1007616**	**331.00**
chrome	**1007619**	**331.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SUN Mirror
WL, triple

NEW



IP44 IK02 L70B50

220-240 V ~50/60 Hz | 450 mA
Total wattage: 13 W
Material: steel

INSIDE

900 lm | 2700 K	950 lm | 3000 K	1000 lm | 4000 K

Options	Prod. no.	GBP
● black	1010194	203.00

SUN Mirror
WL, quad

NEW



IP44 IK02 L70B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 18 W
Material: steel

INSIDE

1200 lm | 2700 K	1300 lm | 3000 K	1400 lm | 4000 K

Options	Prod. no.	GBP
● black	1010193	237.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008107 + 1007859 301

1008107 + 1007860 301

VARYT
WL, E14

NEW



IP44 IK02

220-240 V ~50/60 Hz
Material: stainless steel

• IP44 in combination with one of the shades

SOCKET INSIDE 6 W

Base: 1xE14 | max. Ø: 11 cm | L: 3.8 cm

Options	Prod. no.	GBP
● black	1008104	77.00
○ white	1008105	77.00
brass	1008107	102.00
chrome	1008106	85.00
copper	1008108	102.00

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F
5 kW/1000h

Prod. no.: **1005284** **6.00 GBP**

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 12 cm
H: 13 cm
Material: glass

Options	Prod. no.	GBP
○ white	1007859	59.00

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 11.5 cm
H: 13.5 cm
Material: glass

Options	Prod. no.	GBP
○ white	1007860	64.00

VARYT
Opal glass shade

IK02

Ø: 12 cm
H: 12.8 cm

Options	Prod. no.	GBP
○ white	1008119	51.00

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 12 cm
H: 12.7 cm
Material: glass

Options	Prod. no.	GBP
smoky grey	1007858	69.00
amber	1008023	69.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SUN
WL, G9, square

NEW



IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1xG9 | max. Ø: 1.9 cm | L: 6 cm

Options	Prod. no.	GBP
● black	**1008123** ●	**94.00**

G9 | 4 W | 300°
450 lm | 2700 K | EEC = E
4 kW/1000h

Prod. no.: **1007455** **8.00 GBP**

1008123 302

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SUN
WL, G9, rounded

NEW

1008124 303



IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1xG9 | max. Ø: 1.9 cm | L: 6 cm

Options	Prod. no.	GBP
● black	**1008124**	**94.00**

G9 | 4 W | 300°
450 lm | 2700 K | EEC = E
4 kW/1000h

Prod. no.: **1007455** **8.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SUN
WL, UP, G9, square

NEW



IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 5 W

Base: 1xG9 | max. Ø: 1.9 cm | L: 6 cm

Options	Prod. no.	GBP
● black	**1009144**	**93.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kW/1000h

Prod. no.: **1005286** **8.00 GBP**

SUN
WL, double, G9, square

NEW



IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 5 W

Base: 2xG9 | max. Ø: 1.9 cm | L: 6 cm

Options	Prod. no.	GBP
● black	**1009145**	**110.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kW/1000h

Prod. no.: **1005286** **8.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DYSKO
CW, Single, PHASE

1010306 307

NEW



220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: aluminium

750 lm | 2700 K

Options	Prod. no.	GBP
black/gold	1010300	127.00
white/black	1010301	127.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DYSKO
CW, Double, PHASE

NEW



IP20 | 36° | 360° | 90° | 50000h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 13 W
Material: aluminium

LED INSIDE | CRI 90

Spot 1	750 lm	2700 K
Spot 2	750 lm	

Options	Prod. no.	GBP
black/gold	1010306	229.00
white/black	1010307	229.00

DYSKO
CW, Switch, Single, PHASE

NEW



IP20 | 36° | 360° | 90° | 50000h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: aluminium

LED INSIDE | CRI 90

	750 lm	2700 K

Options	Prod. no.	GBP
black/gold	1010312	132.00
white/black	1010313	132.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® S
CW, PHASE





● black

220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium/PC



○ white

Options	GBP
All S versions	**99.00**
All S DALI versions	**142.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring S		
○ white	**1006167**	**2.00**
● copper	**1008140**	**7.00**
● gold	**1008144**	**7.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004098**	
			36°	16	**1004099**	
			60°	19	**1004100**	
	3000 K	1050 lm	24°	16	**1004106**	
			36°	16	**1004107**	
			60°	19	**1004108**	
	4000 K	1100 lm	24°	16	**1004114**	
			36°	16	**1004115**	
			60°	19	**1004116**	
Dali Touch	2700 K	950 lm	24°	16	**1004386**	
			36°	16	**1004387**	
			60°	19	**1004388**	
	3000 K	1050 lm	24°	16	**1004394**	
			36°	16	**1004395**	
			60°	19	**1004396**	
	4000 K	1100 lm	24°	16	**1004402**	
			36°	16	**1004403**	
			60°	19	**1004404**	
C	2700 K	950 lm	24°	16	**1004102**	
			36°	16	**1004103**	
			60°	19	**1004104**	
	3000 K	1050 lm	24°	16	**1004110**	
			36°	16	**1004111**	
			60°	19	**1004112**	
	4000 K	1100 lm	24°	16	**1004118**	
			36°	16	**1004119**	
			60°	19	**1004120**	
Dali Touch	2700 K	950 lm	24°	16	**1004390**	
			36°	16	**1004391**	
			60°	19	**1004392**	
	3000 K	1050 lm	24°	16	**1004398**	
			36°	16	**1004399**	
			60°	19	**1004400**	
	4000 K	1100 lm	24°	16	**1004406**	
			36°	16	**1004407**	
			60°	19	**1004408**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® M
CL, PHASE





● black

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/PC



○ white

Options	GBP
All M versions	**125.00**
All M DALI versions	**169.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring M		
○ white	**1006168**	**3.00**
● copper	**1008141**	**8.00**
● gold	**1008145**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

	2700 K	1750 lm	24°	16	**1004194**	
			36°	16	**1004195**	
			60°	22	**1004196**	
C	3000 K	1800 lm	24°	16	**1004202**	
			36°	16	**1004203**	
			60°	22	**1004204**	
	4000 K	1950 lm	24°	16	**1004210**	
			36°	16	**1004211**	
			60°	22	**1004212**	
	2700 K	1750 lm	24°	16	**1004482**	
			36°	16	**1004483**	
			60°	22	**1004484**	
Dali Touch	3000 K	1800 lm	24°	16	**1004490**	
			36°	16	**1004491**	
			60°	22	**1004492**	
	4000 K	1950 lm	24°	16	**1004498**	
			36°	16	**1004499**	
			60°	22	**1004500**	
	2700 K	1750 lm	24°	16	**1004198**	
			36°	16	**1004199**	
			60°	22	**1004200**	
C	3000 K	1800 lm	24°	16	**1004206**	
			36°	16	**1004207**	
			60°	22	**1004208**	
	4000 K	1950 lm	24°	16	**1004214**	
			36°	16	**1004215**	
			60°	22	**1004216**	
	2700 K	1750 lm	24°	16	**1004486**	
			36°	16	**1004487**	
			60°	22	**1004488**	
Dali Touch	3000 K	1800 lm	24°	16	**1004494**	
			36°	16	**1004495**	
			60°	22	**1004496**	
	4000 K	1950 lm	24°	16	**1004502**	
			36°	16	**1004503**	
			60°	22	**1004504**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® L
CL, PHASE





● black

IP20 350° 90° 50000h L90B10 78

INSIDE CRI 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/PC



○ white

Options	GBP
All L versions	**133.00**
All L DALI versions	**185.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring L		
○ white	**1006169**	**3.00**
● copper	**1008142**	**9.00**
● gold	**1008146**	**9.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004290**	
			36°	16	**1004291**	
			60°	19	**1004292**	
	3000 K	2400 lm	24°	16	**1004298**	
			36°	16	**1004299**	
			60°	19	**1004300**	
	4000 K	2600 lm	24°	16	**1004306**	
			36°	16	**1004307**	
			60°	19	**1004308**	
Dali Touch	2700 K	2300 lm	24°	16	**1004578**	
			36°	16	**1004579**	
			60°	19	**1004580**	
	3000 K	2400 lm	24°	16	**1004586**	
			36°	16	**1004587**	
			60°	19	**1004588**	
	4000 K	2600 lm	24°	16	**1004594**	
			36°	16	**1004595**	
			60°	19	**1004596**	
C	2700 K	2300 lm	24°	16	**1004294**	
			36°	16	**1004295**	
			60°	19	**1004296**	
	3000 K	2400 lm	24°	16	**1004302**	
			36°	16	**1004303**	
			60°	19	**1004304**	
	4000 K	2600 lm	24°	16	**1004310**	
			36°	16	**1004311**	
			60°	19	**1004312**	
Dali Touch	2700 K	2300 lm	24°	16	**1004582**	
			36°	16	**1004583**	
			60°	19	**1004584**	
	3000 K	2400 lm	24°	16	**1004590**	
			36°	16	**1004591**	
			60°	19	**1004592**	
	4000 K	2600 lm	24°	16	**1004598**	
			36°	16	**1004599**	
			60°	19	**1004600**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® XL
CL, PHASE

DALI





● black

IP20 350° 90° 50000h L90B10 58

INSIDE CRI 90

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/PC



○ white

Options	GBP
All XL versions	142.00
All XL DALI versions	202.00

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring XL		
○ white	1006170	4.00
● copper	1008143	9.50
● gold	1008147	9.50

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
Dali Touch	2700 K	3550 lm	24°	16	**1005741**	
			36°	16	**1005742**	
		3150 lm	60°	22	**1005743**	
	3000 K	3550 lm	24°	16	**1005747**	
			36°	16	**1005748**	
		3150 lm	60°	22	**1005749**	
	4000 K	3900 lm	24°	16	**1005753**	
			36°	16	**1005754**	
		3500 lm	60°	22	**1005755**	
C	2700 K	3550 lm	24°	16	**1006083**	
			36°	16	**1006084**	
		3150 lm	60°	22	**1006085**	
	3000 K	3550 lm	24°	16	**1006089**	
			36°	16	**1006090**	
		3150 lm	60°	22	**1006091**	
	4000 K	3900 lm	24°	16	**1006095**	
			36°	16	**1006096**	
		3500 lm	60°	22	**1006097**	
Dali Touch	2700 K	3550 lm	24°	16	**1005744**	
			36°	16	**1005745**	
		3150 lm	60°	22	**1005746**	
	3000 K	3550 lm	24°	16	**1005750**	
			36°	16	**1005751**	
		3150 lm	60°	22	**1005752**	
	4000 K	3900 lm	24°	16	**1005756**	
			36°	16	**1005757**	
		3500 lm	60°	22	**1005758**	
C	2700 K	3550 lm	24°	16	**1006086**	
			36°	16	**1006087**	
		3150 lm	60°	22	**1006088**	
	3000 K	3550 lm	24°	16	**1006092**	
			36°	16	**1006093**	
		3150 lm	60°	22	**1006094**	
	4000 K	3900 lm	24°	16	**1006098**	
			36°	16	**1006099**	
		3500 lm	60°	22	**1006100**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® PRO 30
CW, DALI, UGR<19

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

	1150 lm	3000 K	1150 lm	4000 K
Direct	100 lm		100 lm	
Indirect				

Options	Prod. no.	GBP
● black	1007284	283.00
○ white	1007285	283.00

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	135250	39.00
○ white	135251	39.00
● grey	135254	39.00
Suspension kit 5 m		
○ white	1001950	85.00
● grey	1001951	85.00
● black	1001952	85.00

MEDO® PRO 30
CW, PHASE, UGR<19

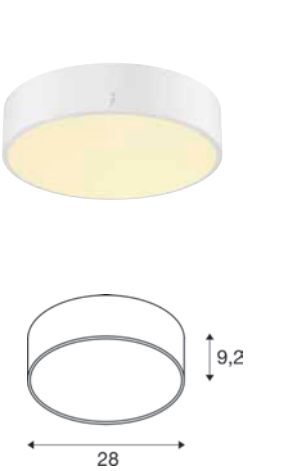

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

	1150 lm	3000 K	1150 lm	4000 K
Direct	100 lm		100 lm	
Indirect				

Options	Prod. no.	GBP
● black	1007288	257.00
○ white	1007289	257.00

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	135250	39.00
○ white	135251	39.00
● grey	135254	39.00
Suspension kit 5 m		
○ white	1001950	85.00
● grey	1001951	85.00
● black	1001952	85.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

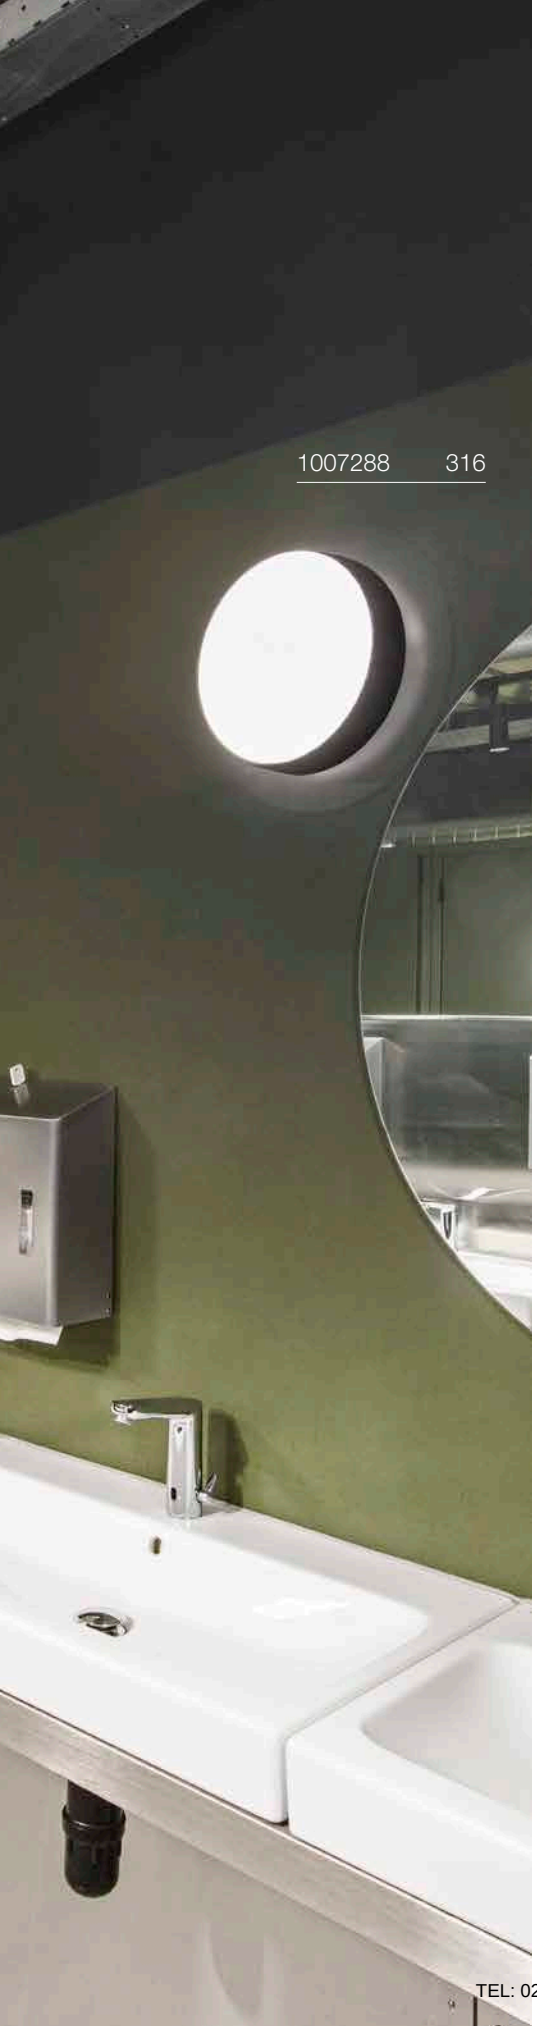

1007288 316

MEDO® PRO 40
CW, DALI, UGR<19



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

Direct	2200 lm	3000 K	2300 lm	4000 K
Indirect	200 lm		200 lm	

Options	Prod. no.	GBP
● black	1007292	343.00
○ white	1007293	343.00

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	135250	39.00
○ white	135251	39.00
● grey	135254	39.00
Suspension kit 5 m		
○ white	1001950	85.00
● grey	1001951	85.00
● black	1001952	85.00

MEDO® PRO 40
CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

Direct	2200 lm	3000 K	2300 lm	4000 K
Indirect	200 lm		200 lm	

Options	Prod. no.	GBP
● black	1007296	300.00
○ white	1007297	300.00

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	135250	39.00
○ white	135251	39.00
● grey	135254	39.00
Suspension kit 5 m		
○ white	1001950	85.00
● grey	1001951	85.00
● black	1001952	85.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® PRO 60
CW, DALI, UGR<19

220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

Direct	4600 lm	3000 K	4700 lm	4000 K
Indirect	400 lm		400 lm	

Options	Prod. no.	GBP
● black	**1007300**	**600.00**
○ white	**1007301**	**600.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 60
CW, PHASE, UGR<19

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

Direct	4600 lm	3000 K	4700 lm	4000 K
Indirect	400 lm		400 lm	

Options	Prod. no.	GBP
● black	**1007304**	**540.00**
○ white	**1007305**	**540.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

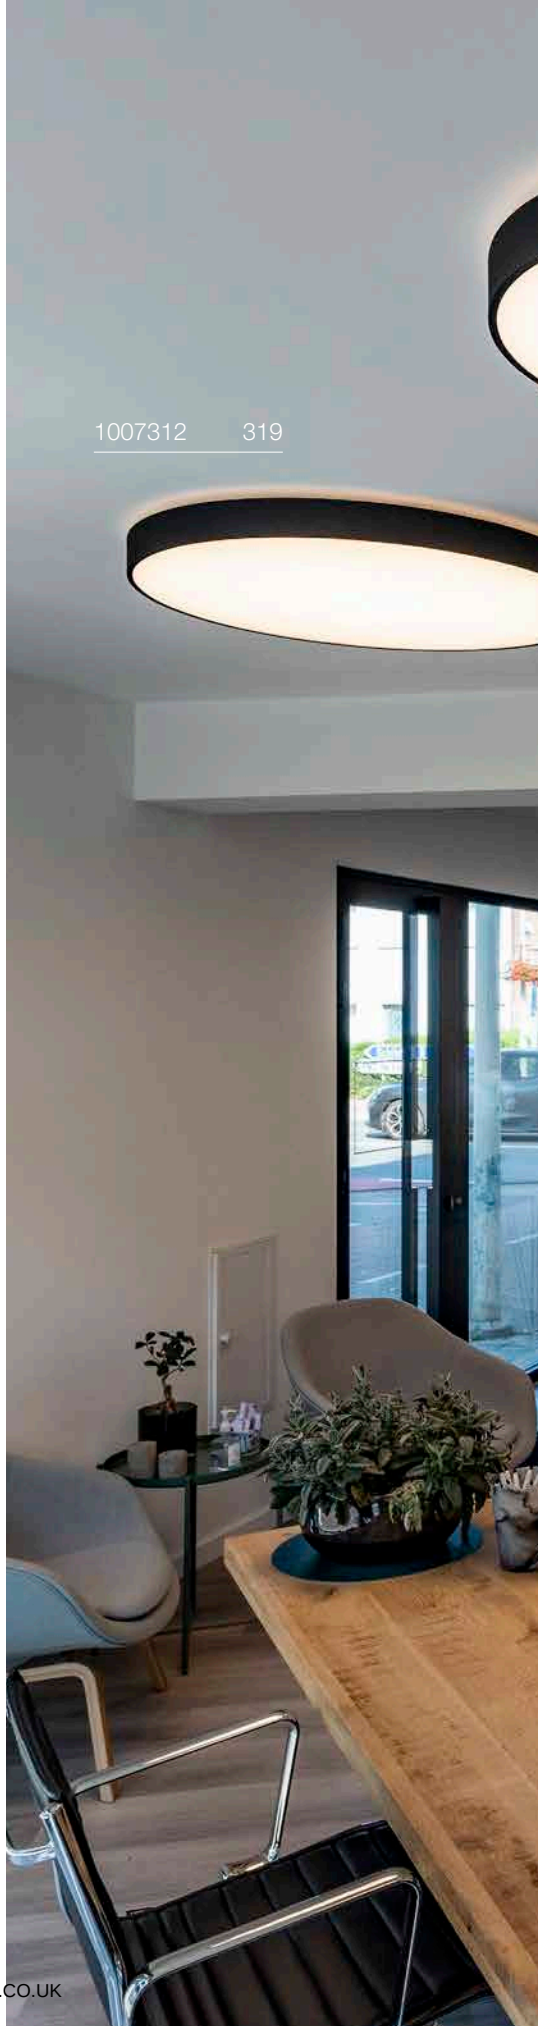

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

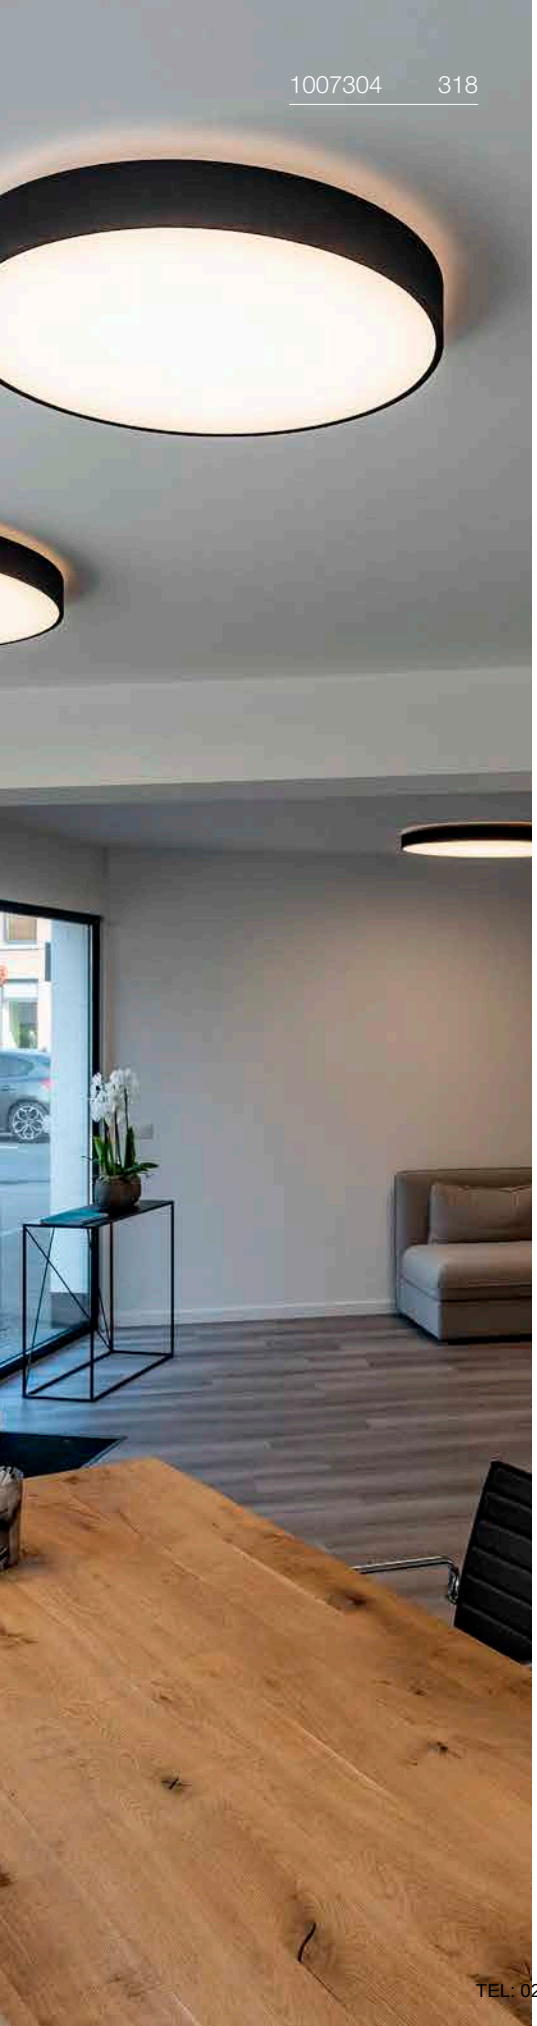

MEDO® PRO 90
CL, DALI, UGR<19



220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

Direct	8800 lm	3000 K	9100 lm	4000 K
Indirect	600 lm		600 lm	

Options	Prod. no.	GBP
● black	1007308	1,203.00
○ white	1007309	1,203.00

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	135250	39.00
○ white	135251	39.00
● grey	135254	39.00
Suspension kit 5 m		
○ white	1001950	85.00
● grey	1001951	85.00
● black	1001952	85.00

MEDO® PRO 90
CL, PHASE, UGR<19



220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel

Direct	8800 lm	3000 K	9100 lm	4000 K
Indirect	600 lm		600 lm	

Options	Prod. no.	GBP
● black	1007312	1,072.00
○ white	1007313	1,072.00

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	135250	39.00
○ white	135251	39.00
● grey	135254	39.00
Suspension kit 5 m		
○ white	1001950	85.00
● grey	1001951	85.00
● black	1001952	85.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® PRO 30
CW, DALI

Dali | Touch | IP50 | IK02 | 110° | 50000h L80B10 | UGR 25 | 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

INSIDE | CRI 90

Direct	1300 lm	3000 K	1300 lm	4000 K
Indirect	50 lm		50 lm	

Options	Prod. no.	GBP
● black	**1007286**	**274.00**
○ white	**1007287**	**274.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 30
CW, PHASE

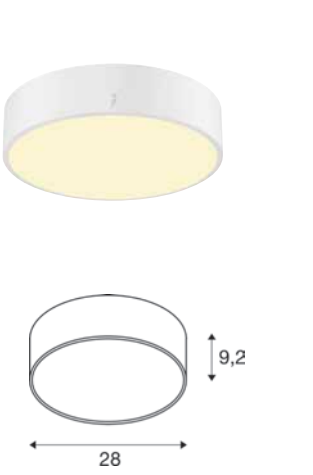

CCT | C | IP50 | IK02 | 110° | 50000h L80B10 | UGR 25 | 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

INSIDE | CRI 90

Direct	1300 lm	3000 K	1300 lm	4000 K
Indirect	50 lm		50 lm	

Options	Prod. no.	GBP
● black	**1007290**	**249.00**
○ white	**1007291**	**249.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1007952**	**85.00**

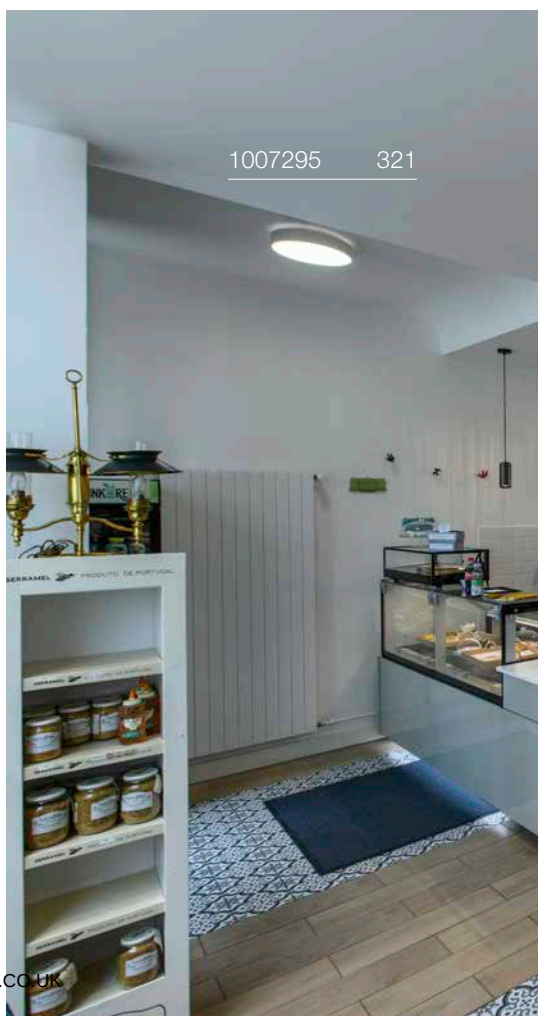

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

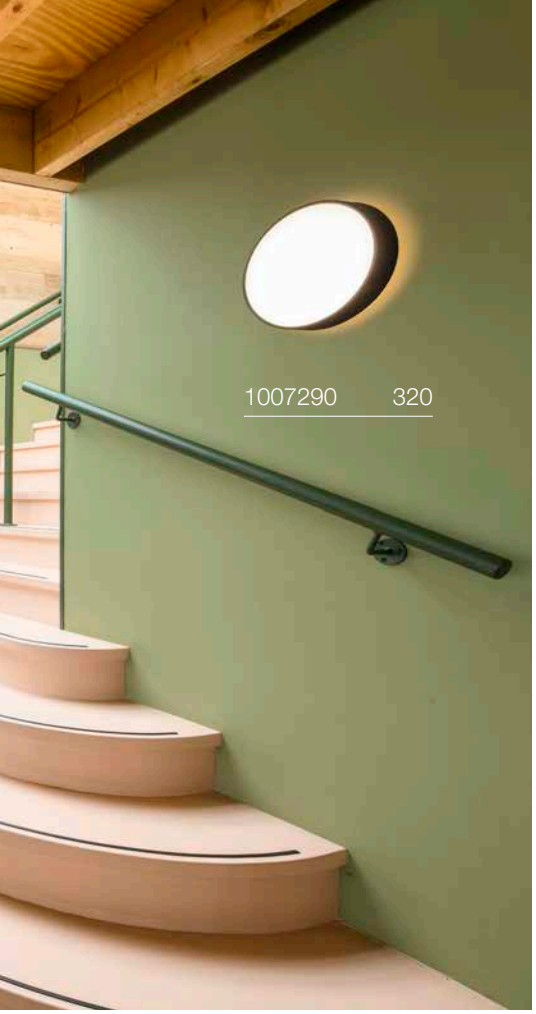

MEDO® PRO 40
CW, DALI



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

Direct	2550 lm	3000 K	2550 lm	4000 K
Indirect	100 lm		100 lm	

Options	Prod. no.	GBP
● black	**1007294**	**335.00**
○ white	**1007295**	**335.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 40
CW, PHASE



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

Direct	2550 lm	3000 K	2550 lm	4000 K
Indirect	100 lm		100 lm	

Options	Prod. no.	GBP
● black	**1007298**	**292.00**
○ white	**1007299**	**292.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® PRO 60
CW, DALI

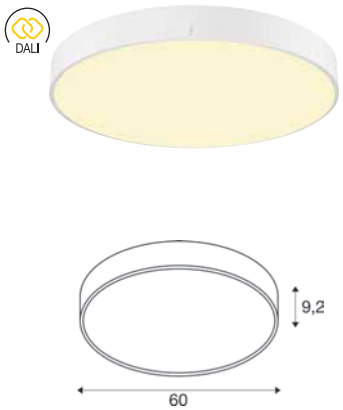

Dali Touch IP50 IK02 110° 50000h L80B10 UGR 25 20

220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

LED INSIDE CRI 90

Direct	5250 lm	3000 K	5300 lm	4000 K
Indirect	200 lm		200 lm	

Options	Prod. no.	GBP
● black	**1007302**	**584.00**
○ white	**1007303**	**584.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 60
CW, PHASE

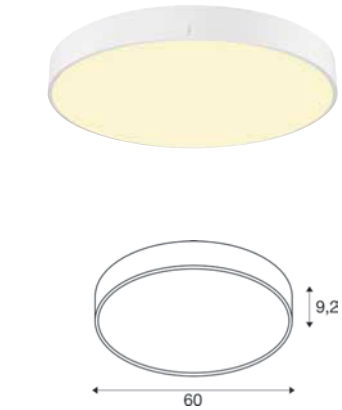

C IP50 IK02 110° 50000h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

LED INSIDE CRI 90

Direct	5250 lm	3000 K	5300 lm	4000 K
Indirect	200 lm		200 lm	

Options	Prod. no.	GBP
● black	**1007306**	**524.00**
○ white	**1007307**	**524.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1007952**	**85.00**

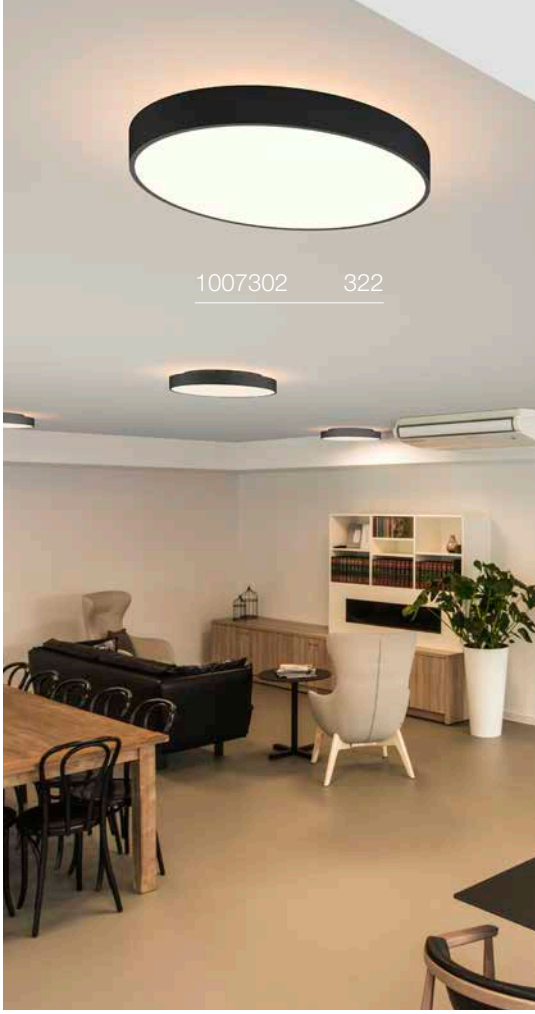

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

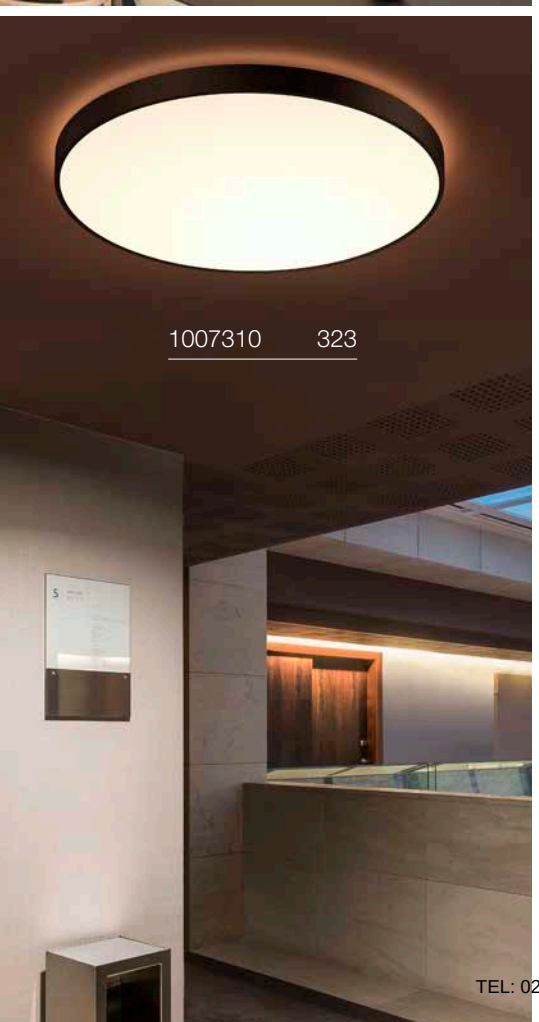

MEDO® PRO 90
CL, DALI

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

LED INSIDE	CRI 90

Direct	10550 lm	3000 K	10750 lm	4000 K
Indirect	450 lm		450 lm	

Options	Prod. no.	GBP
● black	**1007310**	**1,186.00**
○ white	**1007311**	**1,186.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

MEDO® PRO 90
CL, PHASE

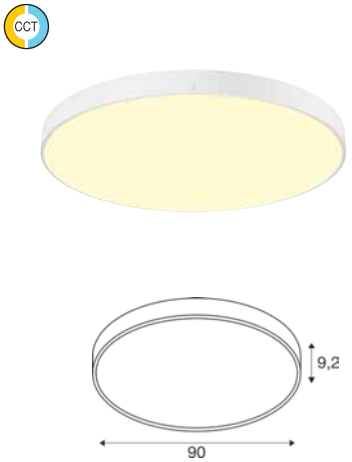

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel

LED INSIDE	CRI 90

Direct	10550 lm	3000 K	10750 lm	4000 K
Indirect	450 lm		450 lm	

Options	Prod. no.	GBP
● black	**1007314**	**1,057.00**
○ white	**1007315**	**1,057.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MEDO® 30
CW, PHASE

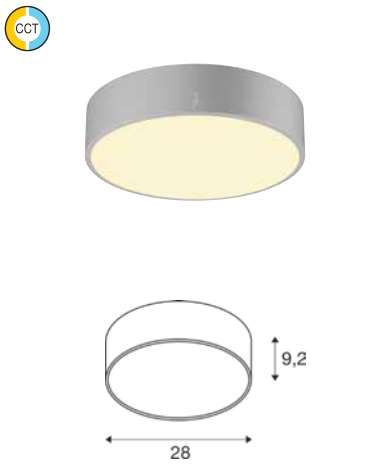

IP50 IK02 110° 50000h L70B50 UGR 25 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 12 W
Material: aluminium/steel

INSIDE CRI 90

1000 lm 50 lm	2700 K	1050 lm 50 lm	3000 K	1150 lm 50 lm	4000 K

Options	Prod. no.	GBP
● black	**1007316**	**214.00**
○ white	**1007317**	**214.00**
● grey	**1007318**	**214.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

MEDO® 40
CW, PHASE

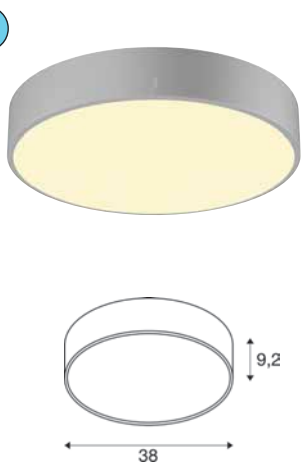

IP50 IK02 110° 50000h L70B50 UGR 25 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/steel

INSIDE CRI 90

2000 lm 100 lm	2700 K	2100 lm 100 lm	3000 K	2250 lm 100 lm	4000 K

Options	Prod. no.	GBP
● black	**1007319**	**240.00**
○ white	**1007320**	**240.00**
● grey	**1007321**	**240.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

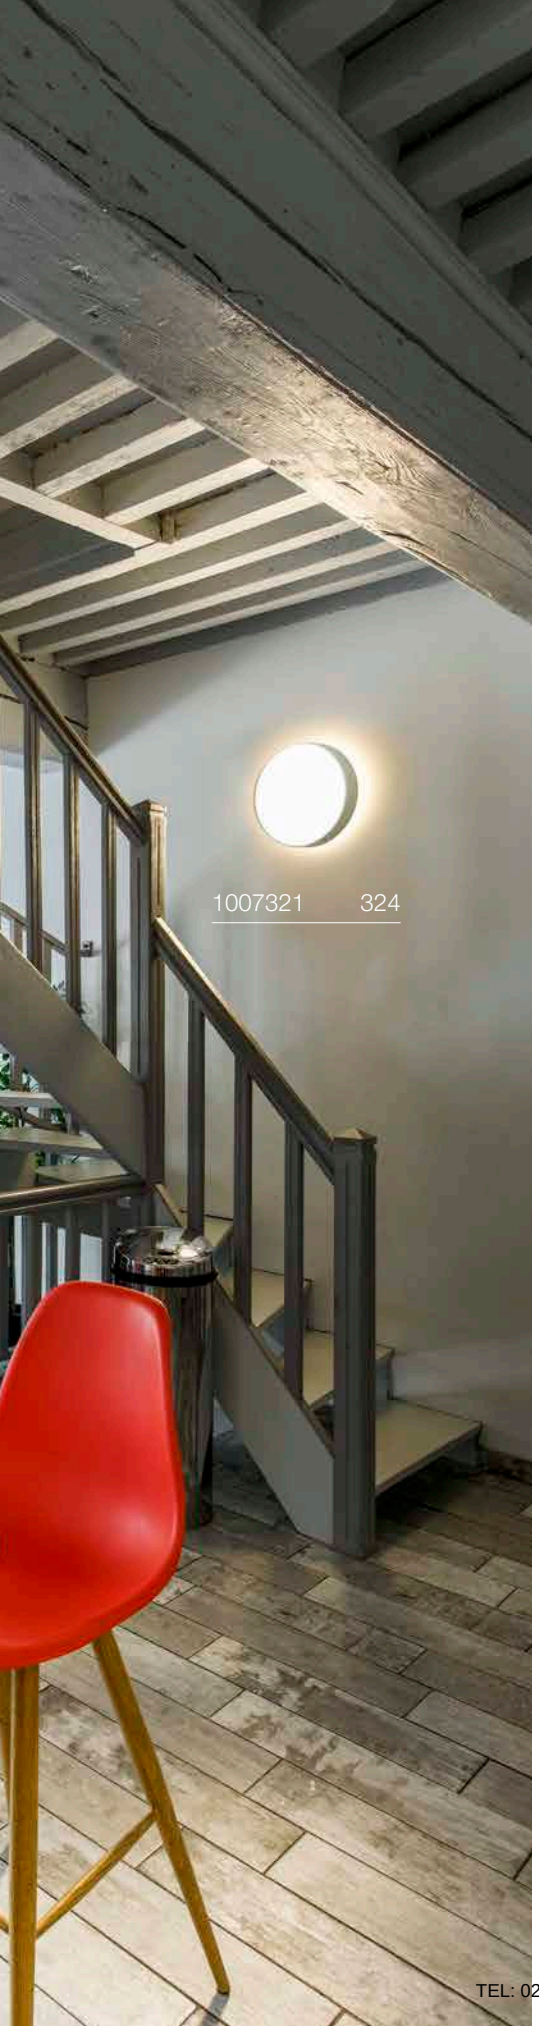

MEDO® 60
CW, PHASE

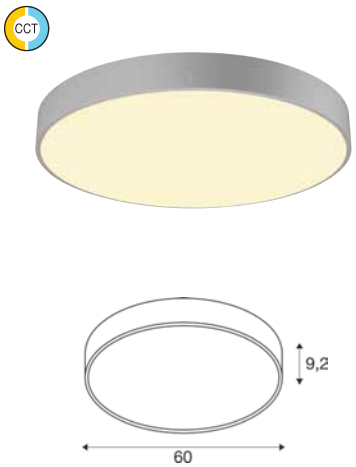

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

LED INSIDE CRI 90

3850 lm 200 lm	2700 K	4050 lm 200 lm	3000 K	4300 lm 200 lm	4000 K

Options	Prod. no.	GBP
● black	**1007322**	**455.00**
○ white	**1007323**	**455.00**
● grey	**1007324**	**455.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

MEDO® 90
CL, PHASE

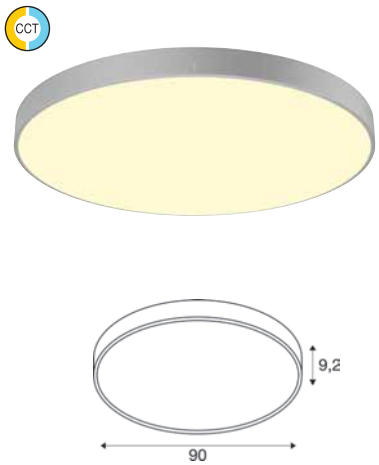

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 79 W
Material: aluminium/steel

LED INSIDE CRI 90

8000 lm 300 lm	2700 K	8400 lm 300 lm	3000 K	9000 lm 300 lm	4000 K

Options	Prod. no.	GBP
● black	**1007325**	**902.00**
○ white	**1007326**	**902.00**
● grey	**1007327**	**902.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**39.00**
○ white	**135251**	**39.00**
● grey	**135254**	**39.00**
Suspension kit 5 m		
○ white	**1001950**	**85.00**
● grey	**1001951**	**85.00**
● black	**1001952**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ONE 40
CW, Phase, up/down



IP20 | 130° | 50000 h L80B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/steel

LED INSIDE | CRI 90

Up	450 lm	2700 K	450 lm	3000 K
Down	450 lm		450 lm	

Options	Prod. no.	GBP
● black	**1008547**	**283.00**
○ white	**1008546**	**283.00**
● brass	**1008545**	**283.00**

ONE 60
CW, Phase, up/down



IP20 | 130° | 50000 h L80B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 23 W
Material: aluminium/steel

LED INSIDE | CRI 90

Up	750 lm	2700 K	800 lm	3000 K
Down	750 lm		800 lm	

Options	Prod. no.	GBP
● black	**1008550**	**335.00**
○ white	**1008549**	**335.00**
● brass	**1008548**	**335.00**

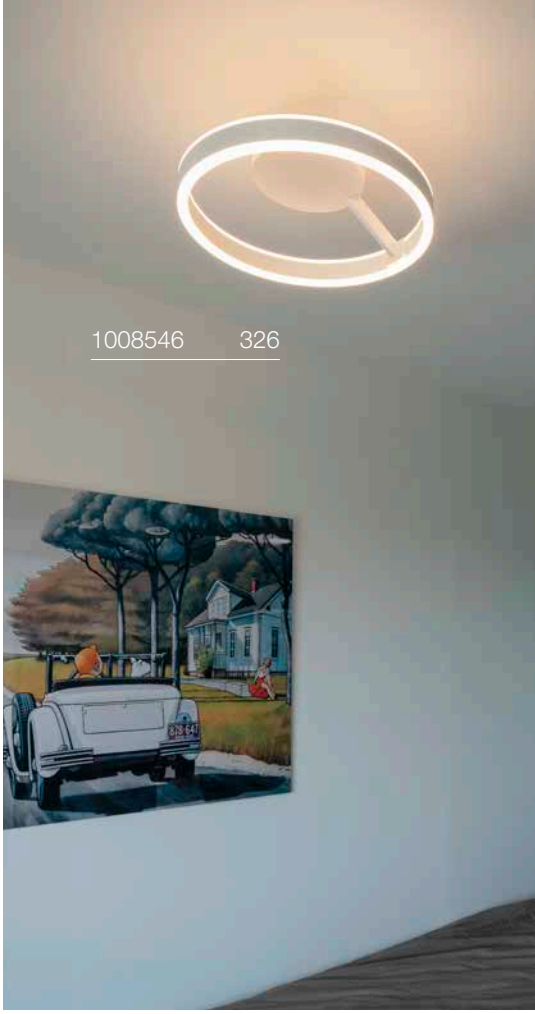

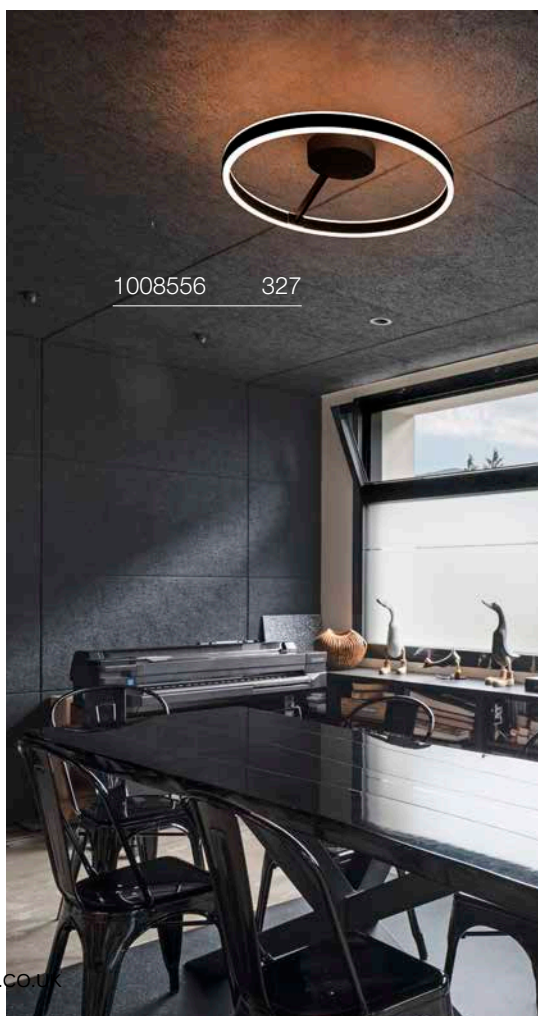

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ONE 40
CW, DALI, up/down



220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/steel

Up	450 lm	2700 K	450 lm	3000 K
Down	450 lm		450 lm	

Options	Prod. no.	GBP
● black	1008553	343.00
○ white	1008552	343.00
● brass	1008551	343.00

ONE 60
CW, DALI, up/down



220-240 V ~50/60 Hz | 600 mA
Total wattage: 23 W
Material: aluminium/steel

Up	750 lm	2700 K	850 lm	3000 K
Down	750 lm		800 lm	

Options	Prod. no.	GBP
● black	1008556	403.00
○ white	1008555	403.00
● brass	1008554	403.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ONE LINEAR 50
WL, PHASE, up/down



220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/acrylic

Up	365 lm	2700 K	405 lm	3000 K
Down	450 lm		500 lm	

Options	Prod. no.	GBP
white/black 365 lm	**1008084**	**172.00**
white 450 lm	**1008085**	**172.00**
white/brass 450 lm	**1008086**	**172.00**

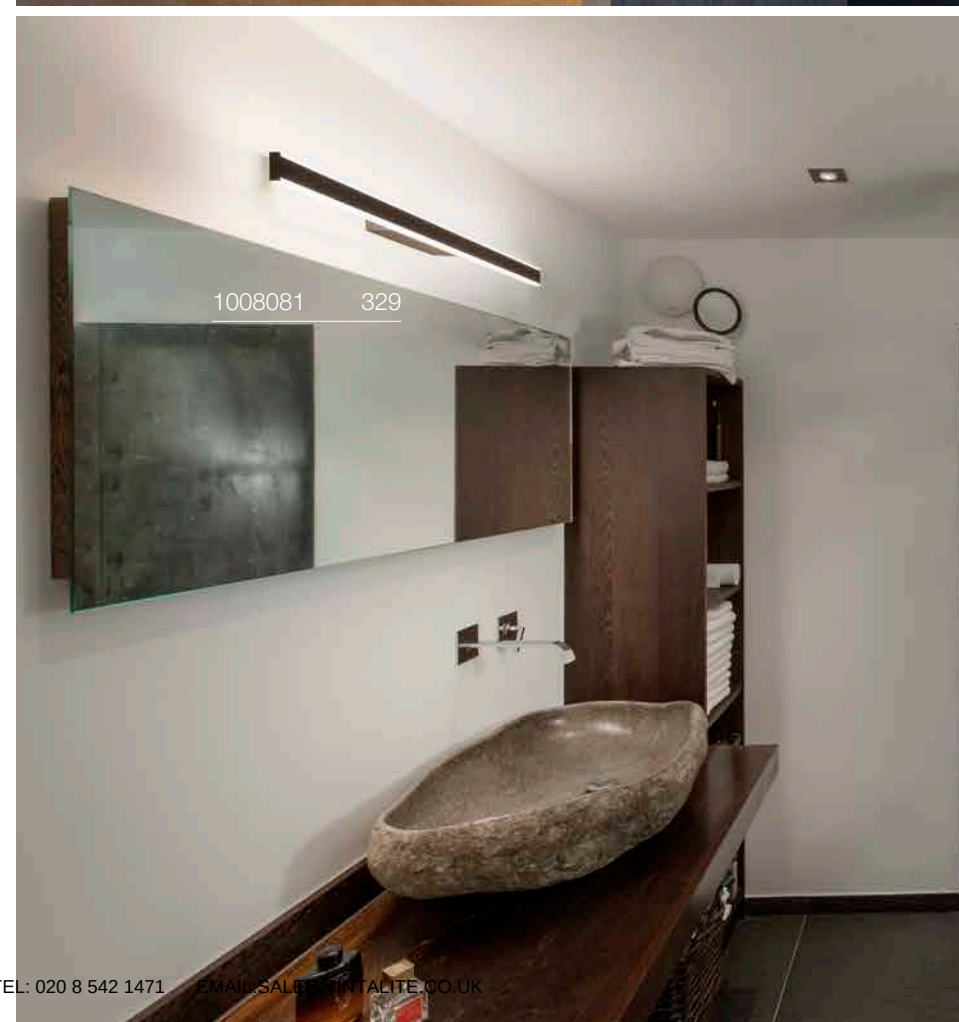

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ONE LINEAR 70
WL, PHASE, up/down



220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/acrylic

Up	495 lm	2700 K	550 lm	3000 K
Down	625 lm		675 lm	

Options	Prod. no.	GBP
white/black 495 lm	1008081	206.00
white 625 lm	1008082	206.00
white/brass 625 lm	1008083	206.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1002915 331

ONE 40
CW, DALI



Dali IP20 130° 30000h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/steel

LED INSIDE CRI 90

700 lm | 3000 K	730 lm | 4000 K

Options	Prod. no.	GBP
● black	**1002915**	**295.00**
○ white	**1002917**	**295.00**

ONE 60
CW, DALI





Dali IP20 130° 30000h L70B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel

LED INSIDE CRI 90

1350 lm | 3000 K	1430 lm | 4000 K

Options	Prod. no.	GBP
● black	**1002918**	**355.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TRUKKO
WL,rectangular



220-240 V ~50/60 Hz | 24 V
Total wattage: 25 W
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function

1080 lm	3000 K	1290 lm	4000 K	1250 lm	6500 K

Options	Prod. no.	GBP
transparent/milky	**1004730**	**329.00**

TRUKKO
WL, round

220-240 V ~50/60 Hz | 24 V
Total wattage: 25 W
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function

1270 lm	3000 K	1260 lm	4000 K	1260 lm	6500 K

Options	Prod. no.	GBP
transparent/milky 1270 lm	**1004731**	**343.00**
transparent/black 730 lm	**1007201**	**343.00**

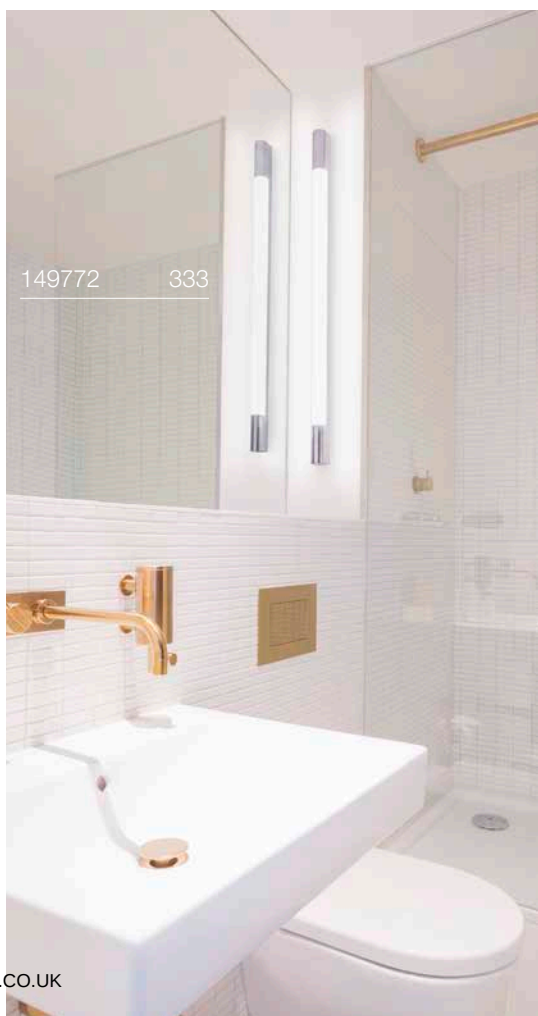

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TRUKKO 80
WL, round

CCT

Touch IP44 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 23 W
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function

INSIDE CRI 90

1100 lm|3000 K | 1130 lm|4000 K | 1210 lm|6500 K

Options	Prod. no.	GBP
transparent/milky 1100 lm	**1007200**	**481.00**
transparent/black 730 lm	**1007202**	**481.00**

TRUKKO 60
WL



IP44 IK03 120° 50000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.2 W
Material: aluminium/plastic

INSIDE CRI 90

750 lm|3000 K

Options	Prod. no.	GBP
transparent/milky	**149762**	**139.00**

TRUKKO 90
WL



IP44 IK03 120° 50000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 12 W
Material: aluminium/plastic

INSIDE CRI 90

1040 lm|3000 K

Options	Prod. no.	GBP
transparent/milky	**149772**	**164.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SEDO 14
WL



IP20 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium/glass

LED INSIDE CRI 80

1300 lm | 3000 K

Options	Prod. no.	GBP
○ white	**151781**	**208.00**
● aluminium	**151786**	**217.00**

SEDO 21
WL



IP20 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 30 W
Material: aluminium/glass

LED INSIDE CRI 80

2500 lm | 3000 K

Options	Prod. no.	GBP
○ white	**151791**	**251.00**
● aluminium	**151796**	**254.00**

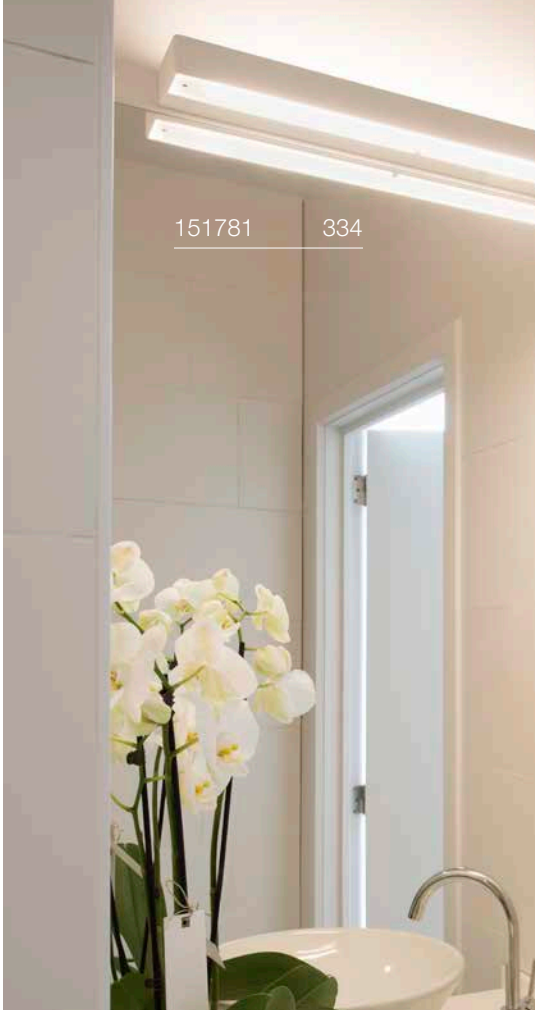

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

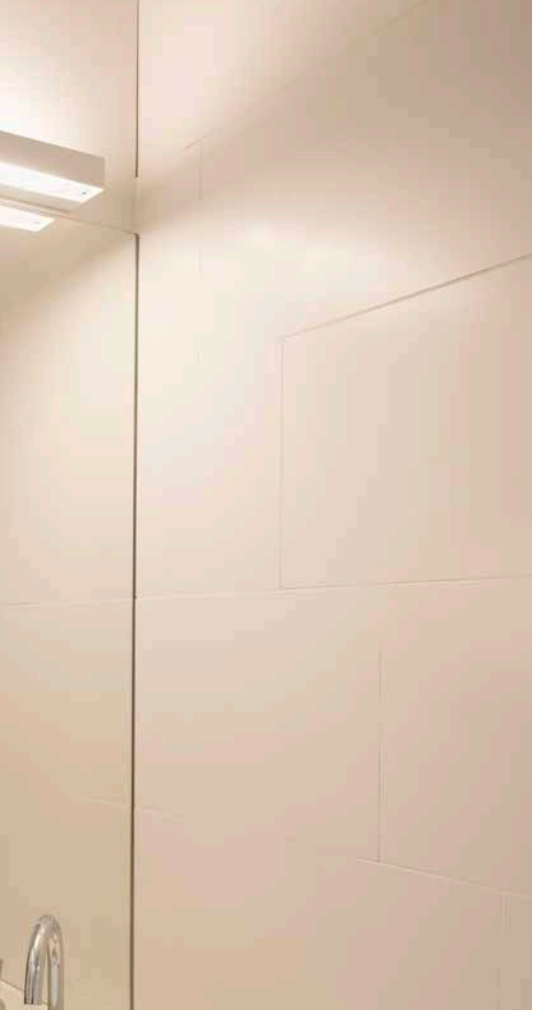

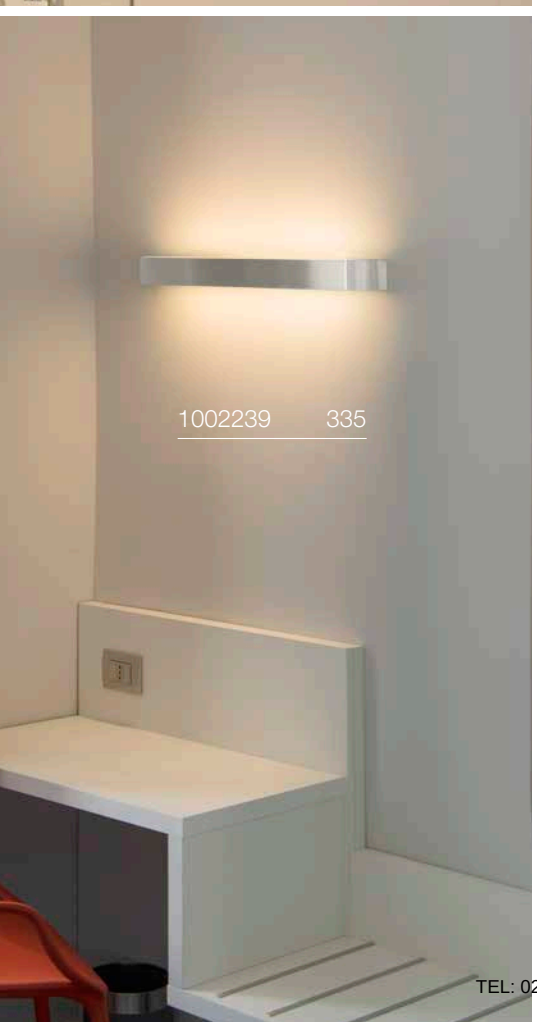

ARLINA 60
WL



IP20 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 23 W
Material: aluminium/glass

LED INSIDE CRI 80

1550 lm | 3000 K

Options	Prod. no.	GBP
aluminium	**1002239**	**220.00**

ARLINA 130
WL



IP20 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: aluminium/glass

LED INSIDE CRI 80

2400 lm | 3000 K

Options	Prod. no.	GBP
aluminium	**1002240**	**283.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

WL 106
E14



IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 40 W

Base: 1xE14 | max. Ø: 3.6 cm | L: 11 cm

Options	Prod. no.	GBP
chrome/white	**1002228**	**78.00**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G
5 kW/1000h

Prod. no.: **1005285** **8.00 GBP**

WL 106
E14



IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 40 W

Base: 2xE14 | max. Ø: 3.6 cm | L: 11 cm

Options	Prod. no.	GBP
chrome/white	**1002229**	**139.00**

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F
5 kW/1000h

Prod. no.: **1005284** **6.00 GBP**

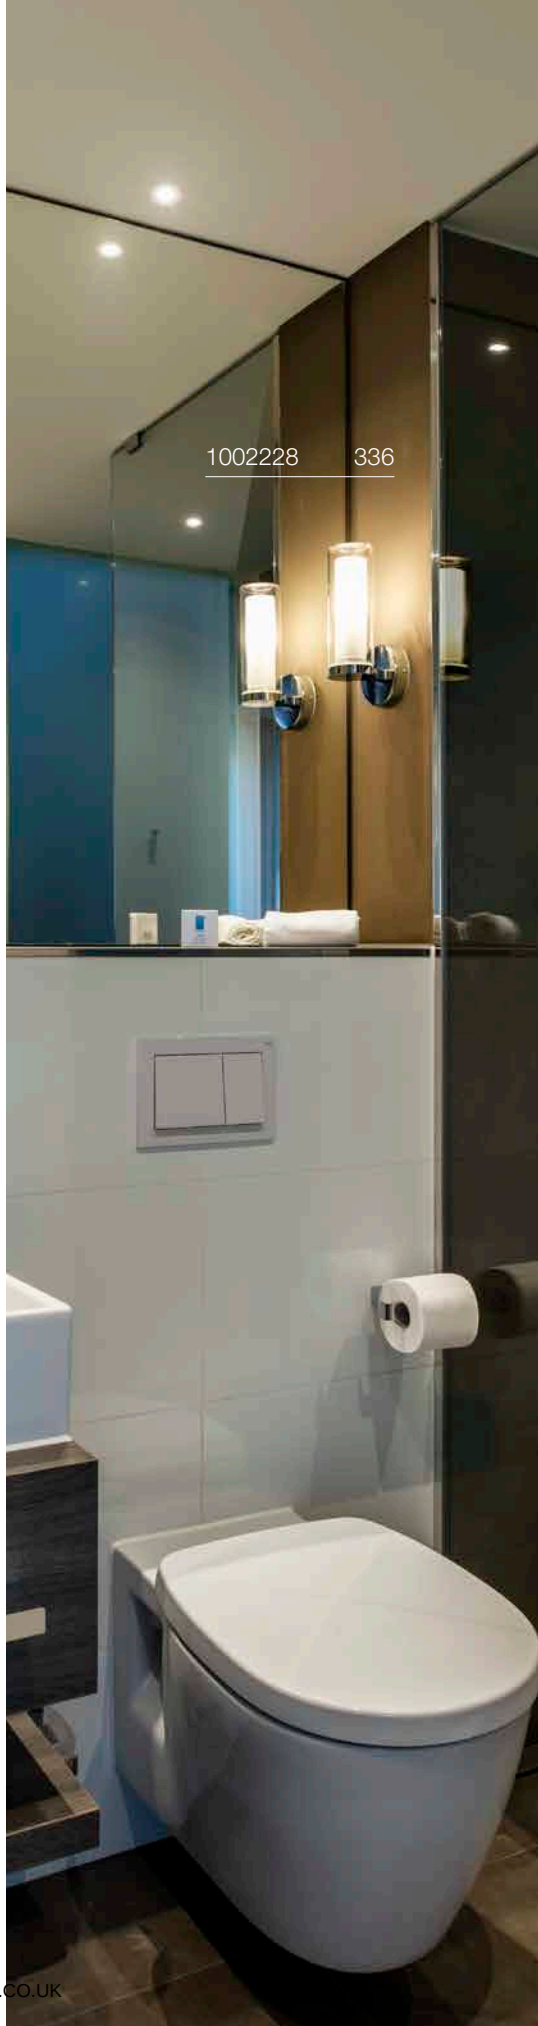

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

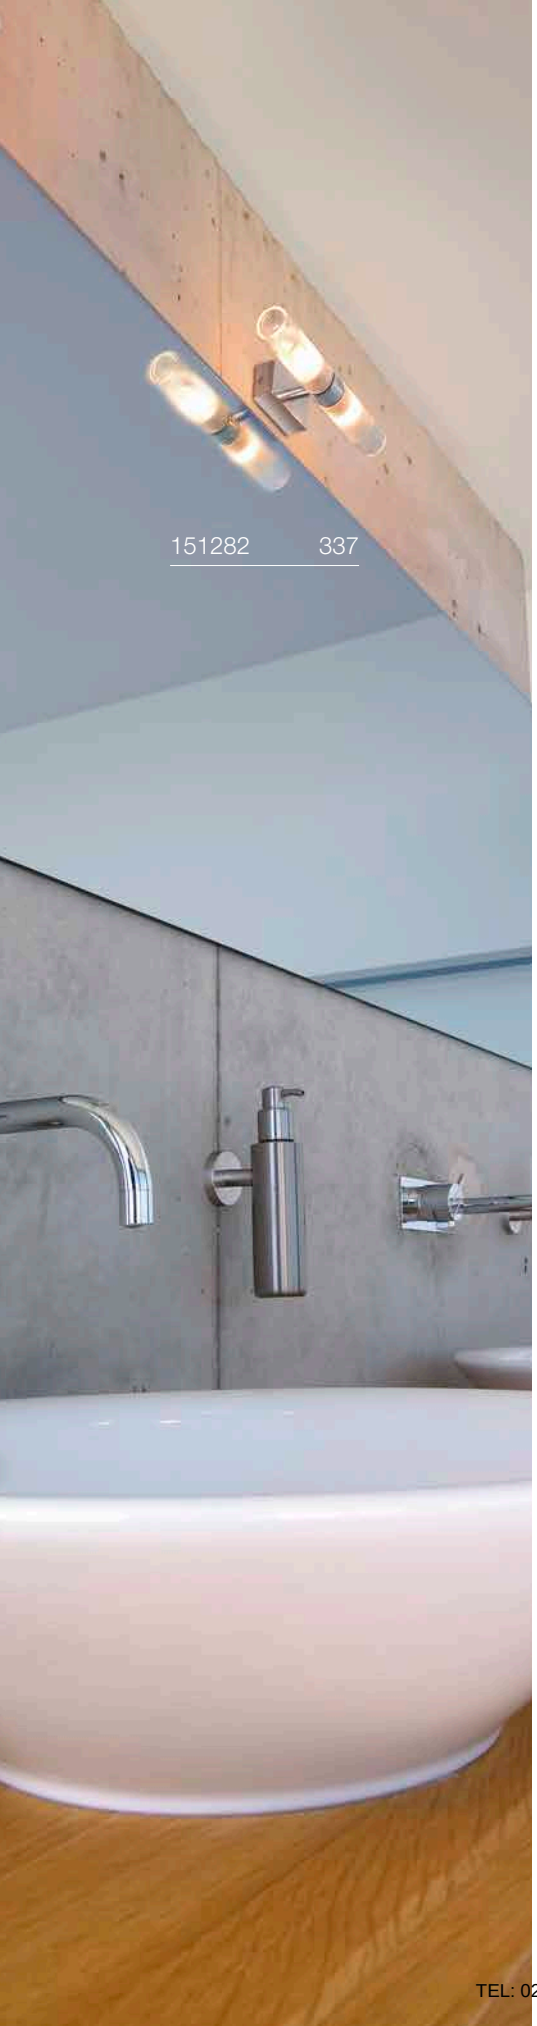

MIBO UP/DOWN
WL, QT14



IP21

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 25 W

Base: 2xG9

Options	Prod. no.	GBP
chrome	**151282**	**79.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kW/1000h

Prod. no.: **1005286** **8.00 GBP**

MAGANDA
WL



IP44 IK02 90° 30000 h L70B50

100-240 V ~50/60 Hz | 12 V
Total wattage: 4.8 W
Material: steel/glass

- Light colour can be adjusted via the housing switch

LED INSIDE CRI 90

45 lm | 2700 K	48 lm | 3000 K	51 lm | 4000 K

Options	Prod. no.	GBP
chrome	**1004971**	**171.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1003507 339

DORISA 30
WL



IP44 | 110° | 30000 h L70B50

220-240 V ~50/60 Hz | 340 mA
Total wattage: 5.2 W
Material: aluminium/plastic

- Clamping range: 0-6 mm
- Can be converted to a mirror light by removing the bracket

LED INSIDE | CRI 80

300 lm | 4000 K

Options	Prod. no.	GBP
chrome	**1000777**	**99.00**

DORISA 50
WL



IP44 | 110° | 30000 h L70B50

220-240 V ~50/60 Hz | 340 mA
Total wattage: 6.6 W
Material: aluminium/plastic

- Clamping range: 0-6 mm
- Can be converted to a mirror light by removing the bracket

LED INSIDE | CRI 80

370 lm | 4000 K

Options	Prod. no.	GBP
chrome	**1000780**	**109.00**

GLENOS® 60
WL

CCT



IP20 | 120° | 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 12 W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

1170 lm | 3000 K | 4000 K

Options	Prod. no.	GBP
● black	**1003506**	**156.00**
○ white	**1003507**	**156.00**
● grey	**1003508**	**156.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Q-LINE®
WL



220-240 V ~50/60 Hz | 700 mA
Total wattage: 45 W
Material: aluminium/acrylic

3800 lm | 3000 K

Options	Prod. no.	GBP
● black	**1000669**	**398.00**
○ white	**1000668**	**398.00**
● grey	**1000670**	**398.00**

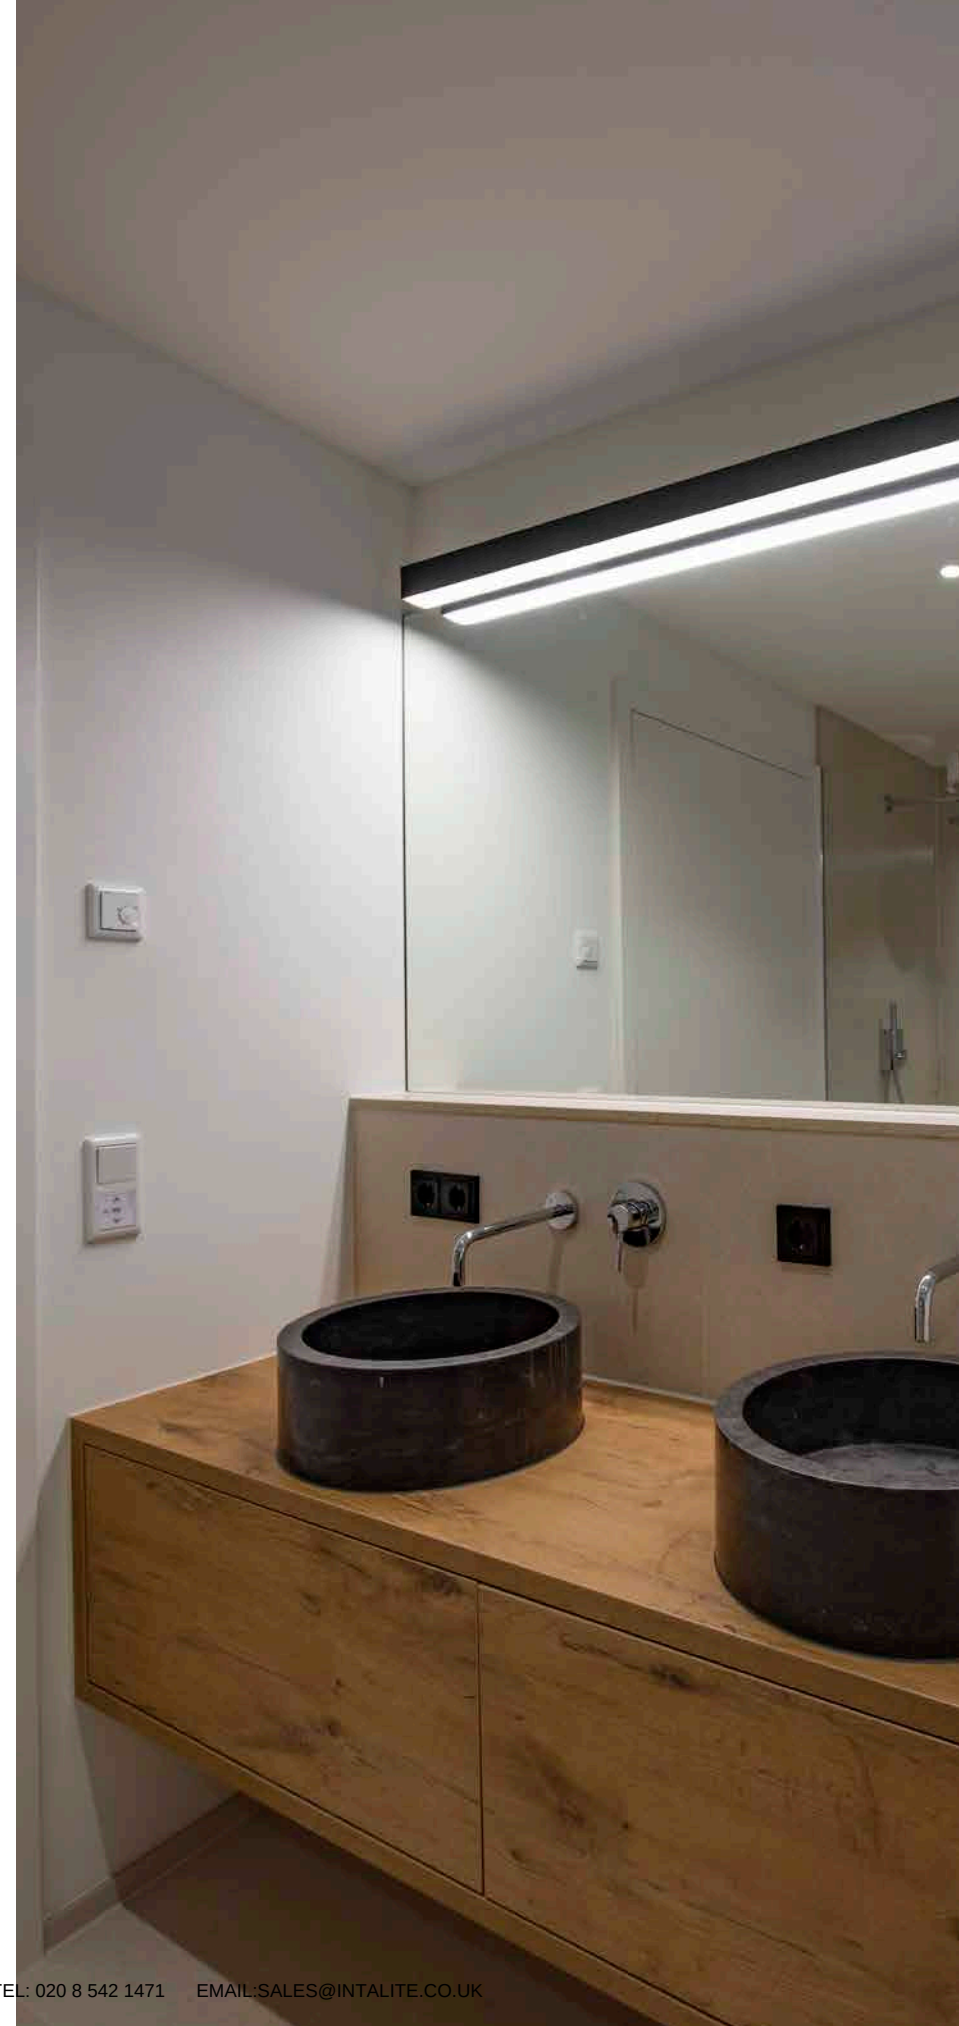

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

L-LINE 60
WL



220-240 V ~50/60 Hz | 350 mA
Total wattage: 10 W
Material: aluminium/polycarbonate (PC)

820 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1001299**	**205.00**
◍ silver	**1001300**	**205.00**

L-LINE 120
WL



220-240 V ~50/60 Hz | 350 mA
Total wattage: 18.5 W
Material: aluminium/polycarbonate (PC)

1650 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1001303**	**284.00**
◍ silver	**1001304**	**284.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PROTECTED AREA IN THE BATHROOM

Corresponding protected areas are defined for safe lighting in the bathroom. For areas outside these protection zones, i.e. wherever it is unlikely that the bathroom light will come into contact with water, such as the ceiling in the bathroom, no protection rating is prescribed.

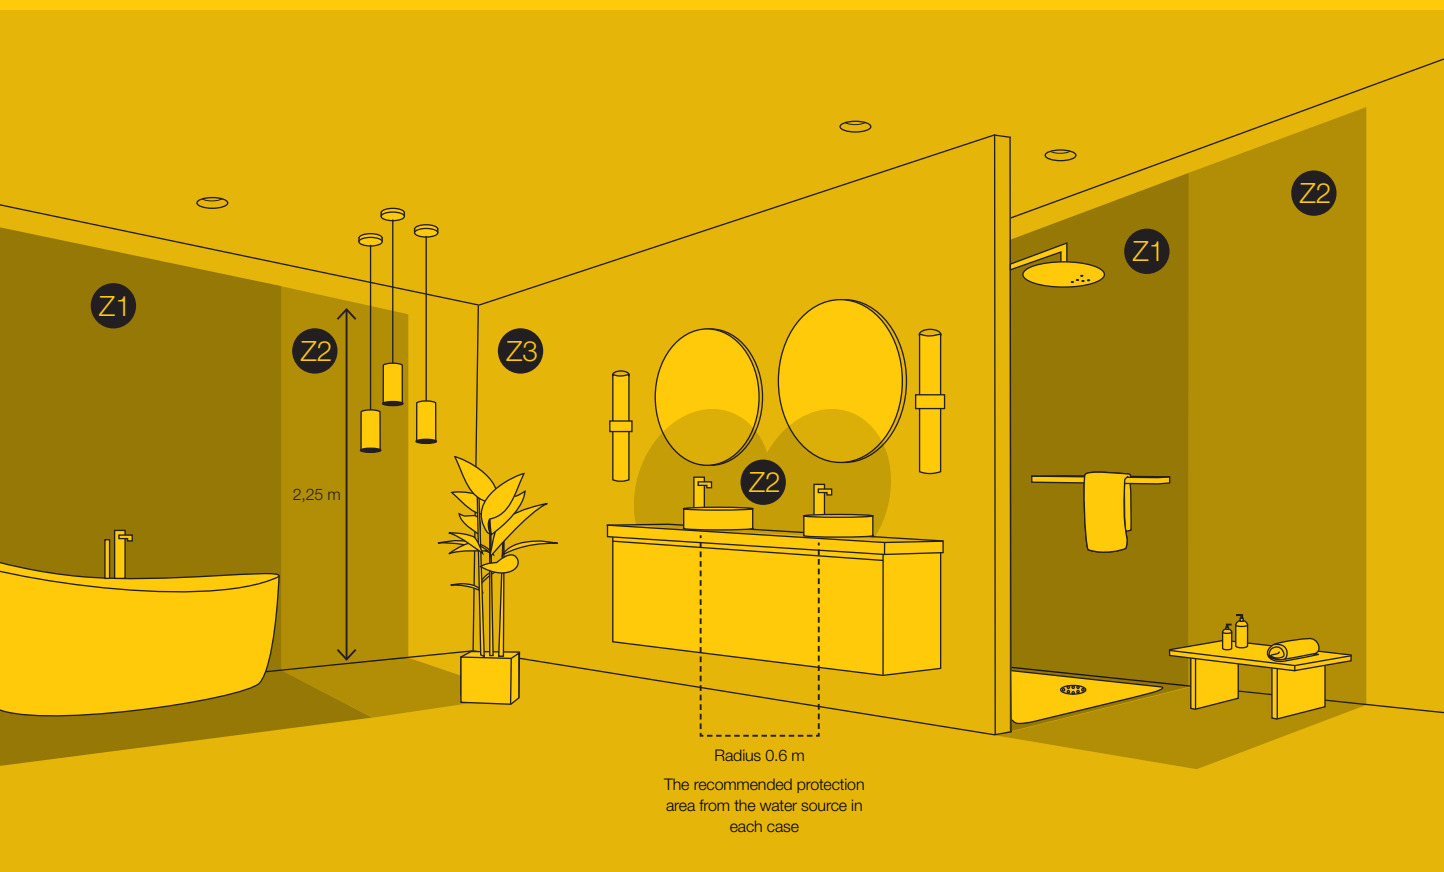

Z1 ZONE 1

Minimum IP65

Z2 ZONE 2

Minimum IP44

Z3 ZONE 3

Minimum IP21

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Lighting in a modern feel-good environment should be functional, restorative and safe, so it is vital to choose the right IP rating depending on where the light will be used.

The abbreviation IP stands for Ingress Protection. The first digit in these standardised IP codes indicates the protection against solid objects, the second digit indicates protection against moisture. It is the latter that is particularly important for bathrooms and outdoor areas.

FOREIGN OBJECTS		WATER	
No protection	0	0	No protection
Protection against larger solid foreign bodies from a diameter of 50 mm	1	1	Protection against vertically falling water droplets
Protection against medium solid foreign bodies from a diameter of 12.5 mm	2	2	Protection against falling water droplets if the housing is tilted up to 15°
Protection against smaller solid foreign bodies from a diameter of 2.5 mm	3	3	Protection against spraying water falling at up to 60° from the vertical
Protection against very small solid foreign objects from a diameter of 1 mm	4	4	Protection against water splashing from all sides
Protection against dust in large, harmful quantities	5	5	Protection against water jets (from a nozzle) from any angle
Completely dust-tight	6	6	Protection against powerful water jets
		7	Protection against temporary immersion
		8	Protection against continuous immersion

EXAMPLE IP65:
The product has maximum dust protection at level 6 and high protection against water jets at level 5. It can therefore be classified as dust-tight and water-resistant.

1007595 345

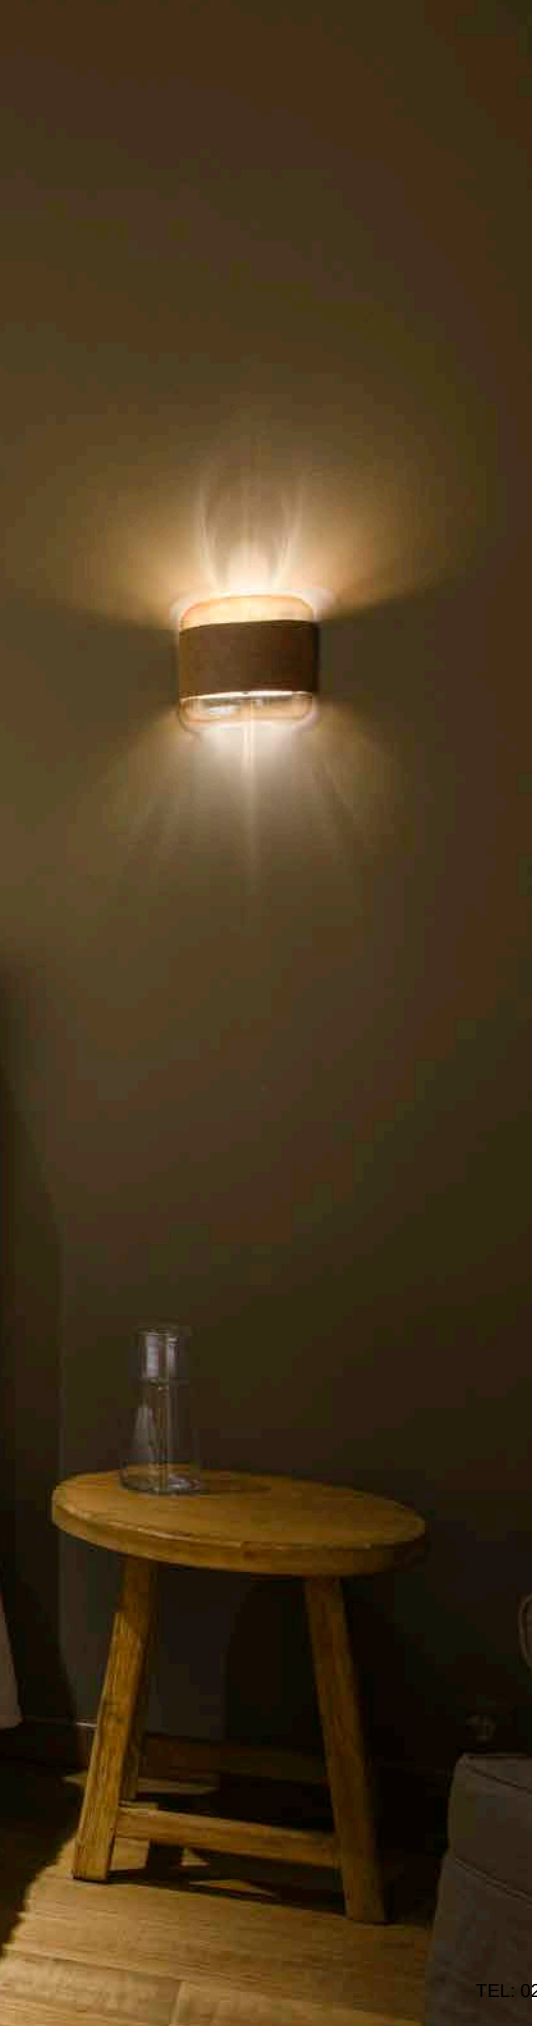

PANTILO ROPE
WL, G9



IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1xG9 | max. Ø: 3 cm | L: 6 cm

Options	Prod. no.	GBP
anthracite/silver	**1007594**	**154.00**
amber/gold	**1007595**	**154.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kW/1000 h

Prod. no.: **1005286** **8.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006441 346

ASTO TUBE
WL, GU10



IP20

220-240 V ~50/60 Hz
Material: aluminium

- Including decorative reflector in product colour made of recycled plastic
- Other coloured decorative reflectors available if desired

SOCKET INSIDE 10 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**1006441**	**52.00**
○ white	**1006442**	**52.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000h

Prod. no.: 1005273 9.00 GBP

ASTO TUBE
WL, up/down, GU10



IP20

220-240 V ~50/60 Hz
Material: aluminium

- Including decorative reflector in product colour made of recycled plastic
- Other coloured decorative reflectors available if desired

SOCKET INSIDE 10 W

Base: 2xGU10

Options	Prod. no.	GBP
● black	**1006443**	**69.00**
○ white	**1006444**	**69.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000h

Prod. no.: 1005273 9.00 GBP

ASTO TUBE
Decorative reflector

Ø: 6.8 cm
H: 3.95 cm
Material: polycarbonate (PC)

Options	Prod. no.	GBP
black/chrome	**1007190**	**4.00**
gold	**1006450**	**4.00**
chrome	**1006449**	**4.00**
copper	**1006451**	**4.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008204 351
1008201 351
1008205 351

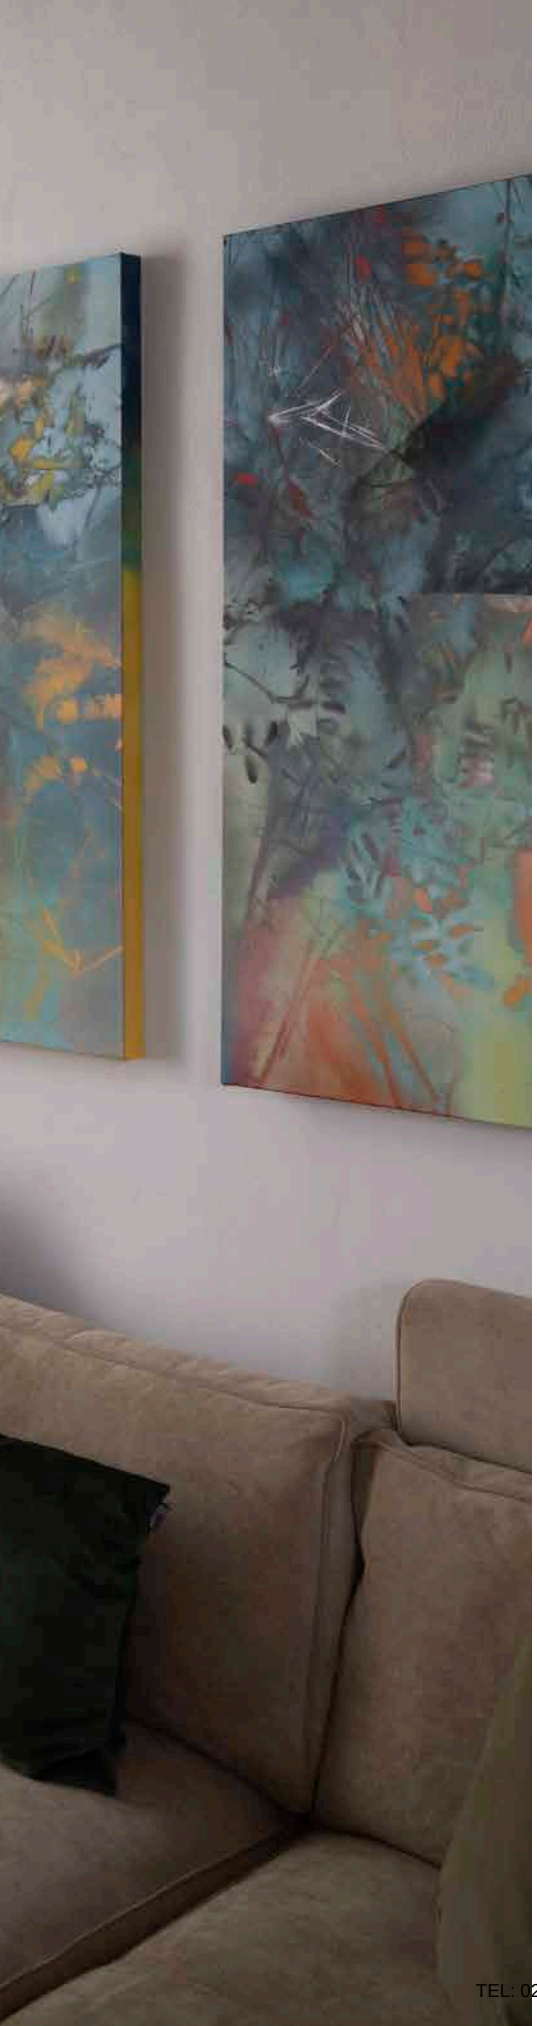

MANA BASE
WL, round, PHASE



IP65 | 50000 h L80B50 | 68

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 90

1070 lm | 2700 K	1100 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1006319**	**163.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

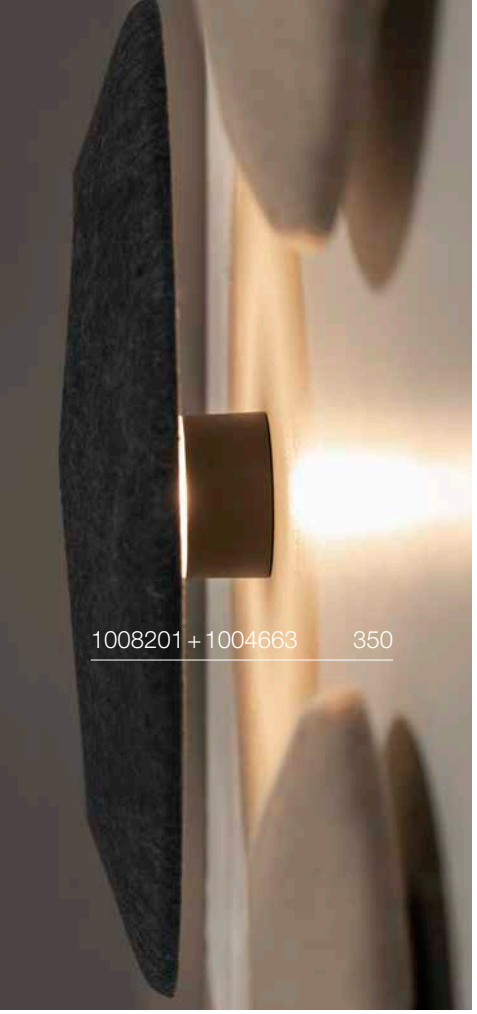

MANA BASE
round



Material: aluminium/polycarbonate (PC)

- Non-illuminated base for round shades in the MANA series

Options	Prod. no.	GBP
anthracite	**1004969**	**23.00**

MANA 40
Shade, round, acoustic felt

IP20

Ø: 40 cm
H: 6 cm
Material: felt/aluminium

Options	Prod. no.	GBP
grey	**1004661**	**85.00**
beige	**1004660**	**85.00**

MANA 60
Shade, round, acoustic felt

IP20

Ø: 60 cm
H: 6 cm
Material: felt/aluminium

Options	Prod. no.	GBP
grey	**1004663**	**125.00**
beige	**1004662**	**125.00**

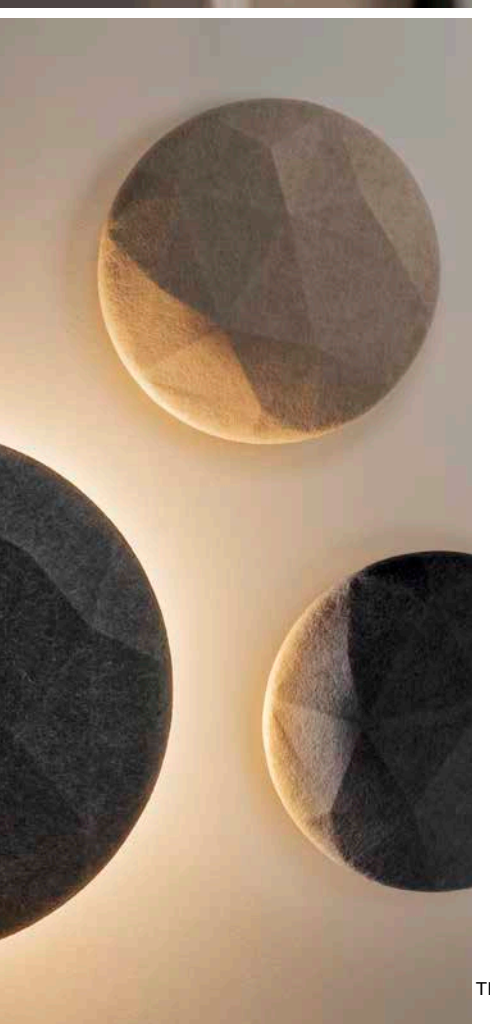

MANA 40
Shade, round

IP20

Ø: 40 cm
H: 2.2 cm
Material: steel

Options	Prod. no.	GBP
● black	**1008201**	**68.00**

MANA 40
Shade, round

IP20

Ø: 40 cm
H: 2.2 cm
Material: steel

Options	Prod. no.	GBP
○ white	**1008203**	**68.00**

MANA 40
Shade, round, moon structure

IP20

Ø: 40 cm
H: 2.2 cm
Material: steel

Options	Prod. no.	GBP
● gold	**1008205**	**85.00**

MANA 60
Shade, round

IP20

Ø: 60 cm
H: 4.2 cm
Material: steel

Options	Prod. no.	GBP
● black	**1008202**	**108.00**

MANA 60
Shade, round

IP20

Ø: 60 cm
H: 4.2 cm
Material: steel

Options	Prod. no.	GBP
○ white	**1008204**	**108.00**

MANA 60
Shade, round, moon structure

IP20

Ø: 60 cm
H: 4.2 cm
Material: steel

Options	Prod. no.	GBP
● gold	**1008206**	**125.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1004670 353

OCULUS
WL, single, PHASE

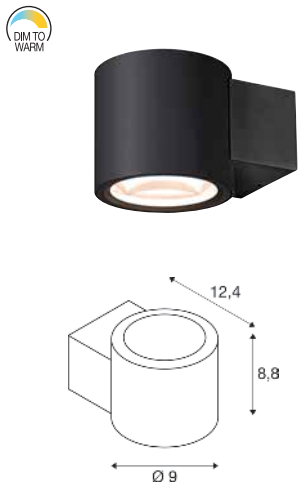

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.5 W
Material: aluminium

57 lm|2000 K – 570 lm|3000 K

Options	Prod. no.	GBP
● black	1006307	197.00
○ white	1006308	197.00

OCULUS UP/DOWN
WL, PHASE

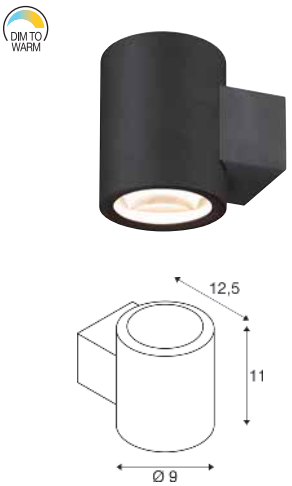

220-240 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: aluminium

• Additional frosted lens included

Up 22 lm|2000 K – 555 lm|3000 K

Options	Prod. no.	GBP
● black	1004670	214.00
○ white	1004671	214.00

OCULUS UP/DOWN
WL, DTW, PVD

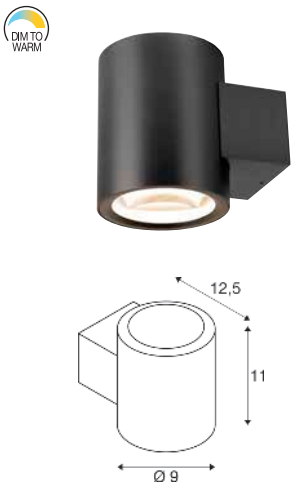

220-240 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: aluminium

Up 22 lm|2000 K – 555 lm|3000 K

Options	Prod. no.	GBP
● brass	1008613	318.00
● dark bronze	1008612	318.00
● dark copper	1008614	318.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PLASTRA
WL, Cube, QT14





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 42 W

Base: 1xG9

Options	Prod. no.	GBP
○ white	**148018**	**47.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kW/1000h

Prod. no.: **1005286** **8.00 GBP**

PLASTRA
WL, rectangular, QT-DE12



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 20 W

Base: 1xR7s 118mm

Options	Prod. no.	GBP
○ white	**1002238**	**68.00**

R7s 118mm | 15 W | 330°
2000 lm | 3000 K | EEC = E
15 kW/1000h

Prod. no.: **1005288** **25.00 GBP**

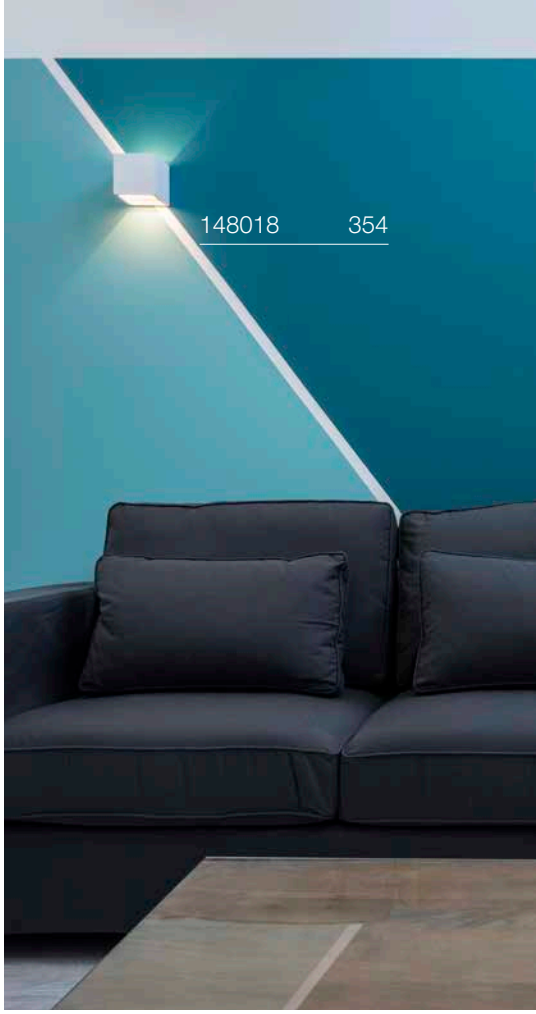

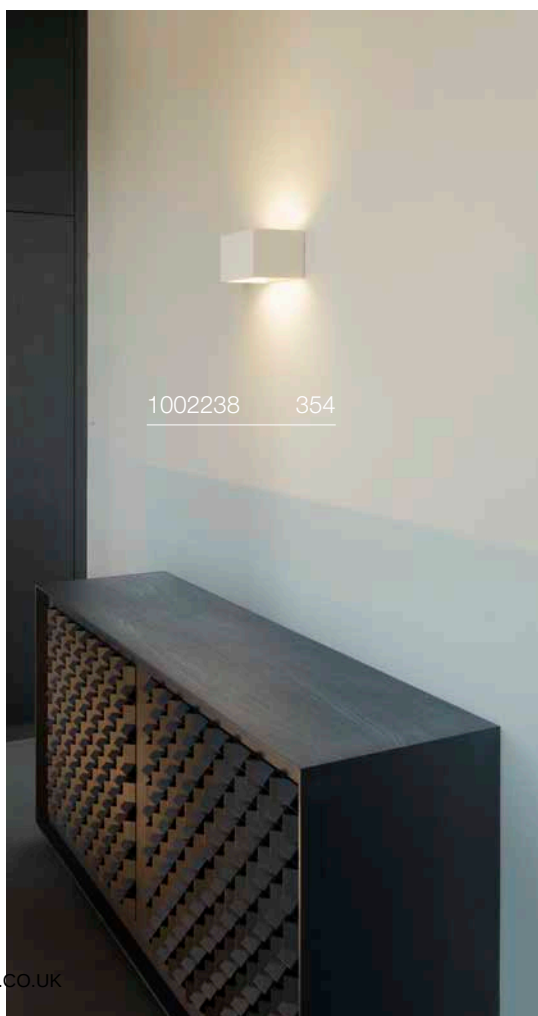

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

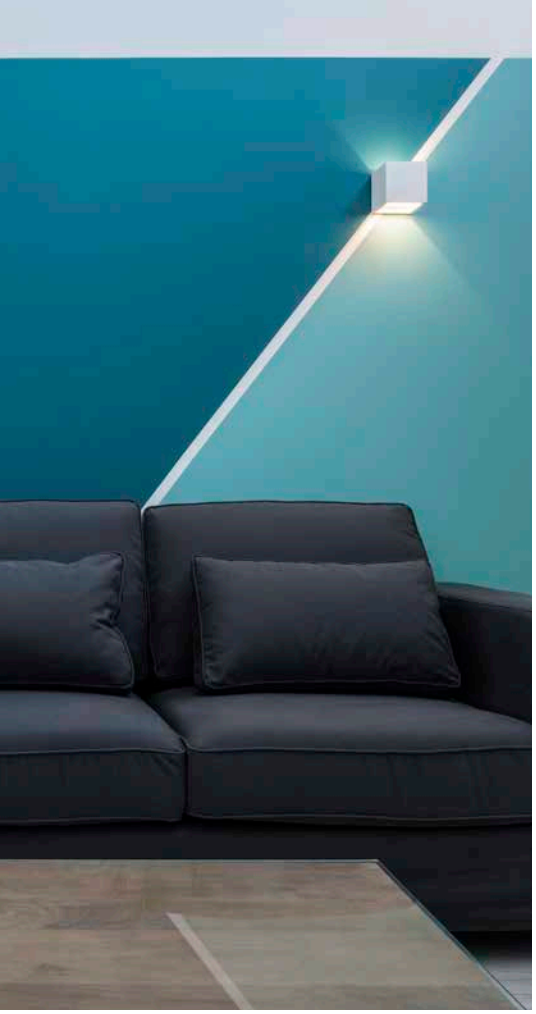

148010 355

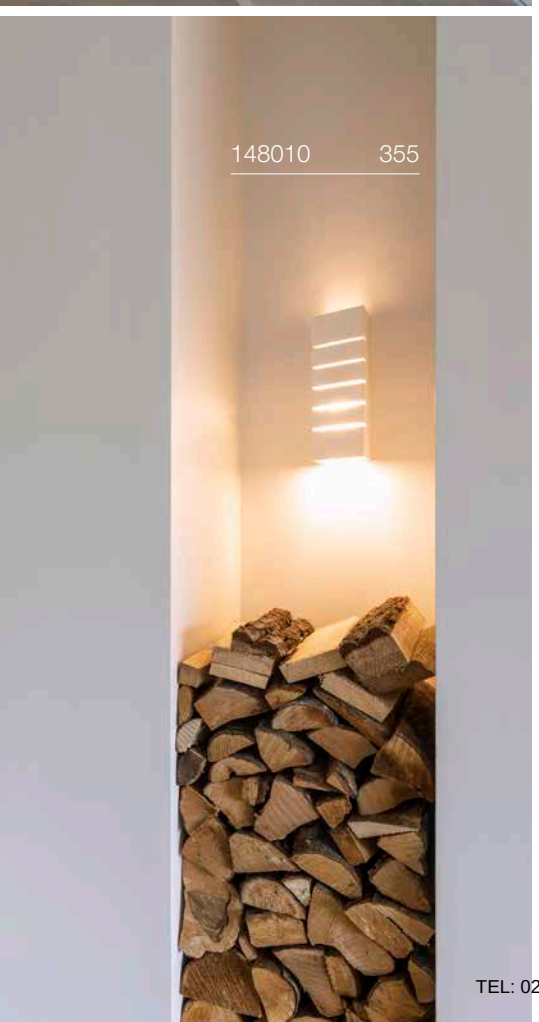

PLASTRA
WL, E14



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 40 W

Base: 1xE14

Options	Prod. no.	GBP
○ white	**148010**	**45.00**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G
5 kW/1000h

Prod. no.: **1005285** **8.00 GBP**

PLASTRA
WL, semicircular



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 20 W

Base: 1xR7s
118 mm

max. Ø: 2 cm | L: 11.8 cm

Options	Prod. no.	GBP
○ white	**1004732**	**63.00**

R7s 118mm | 15 W | 330°
2000 lm | 3000 K | EEC = E
15 kW/1000h

Prod. no.: **1005288** **25.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

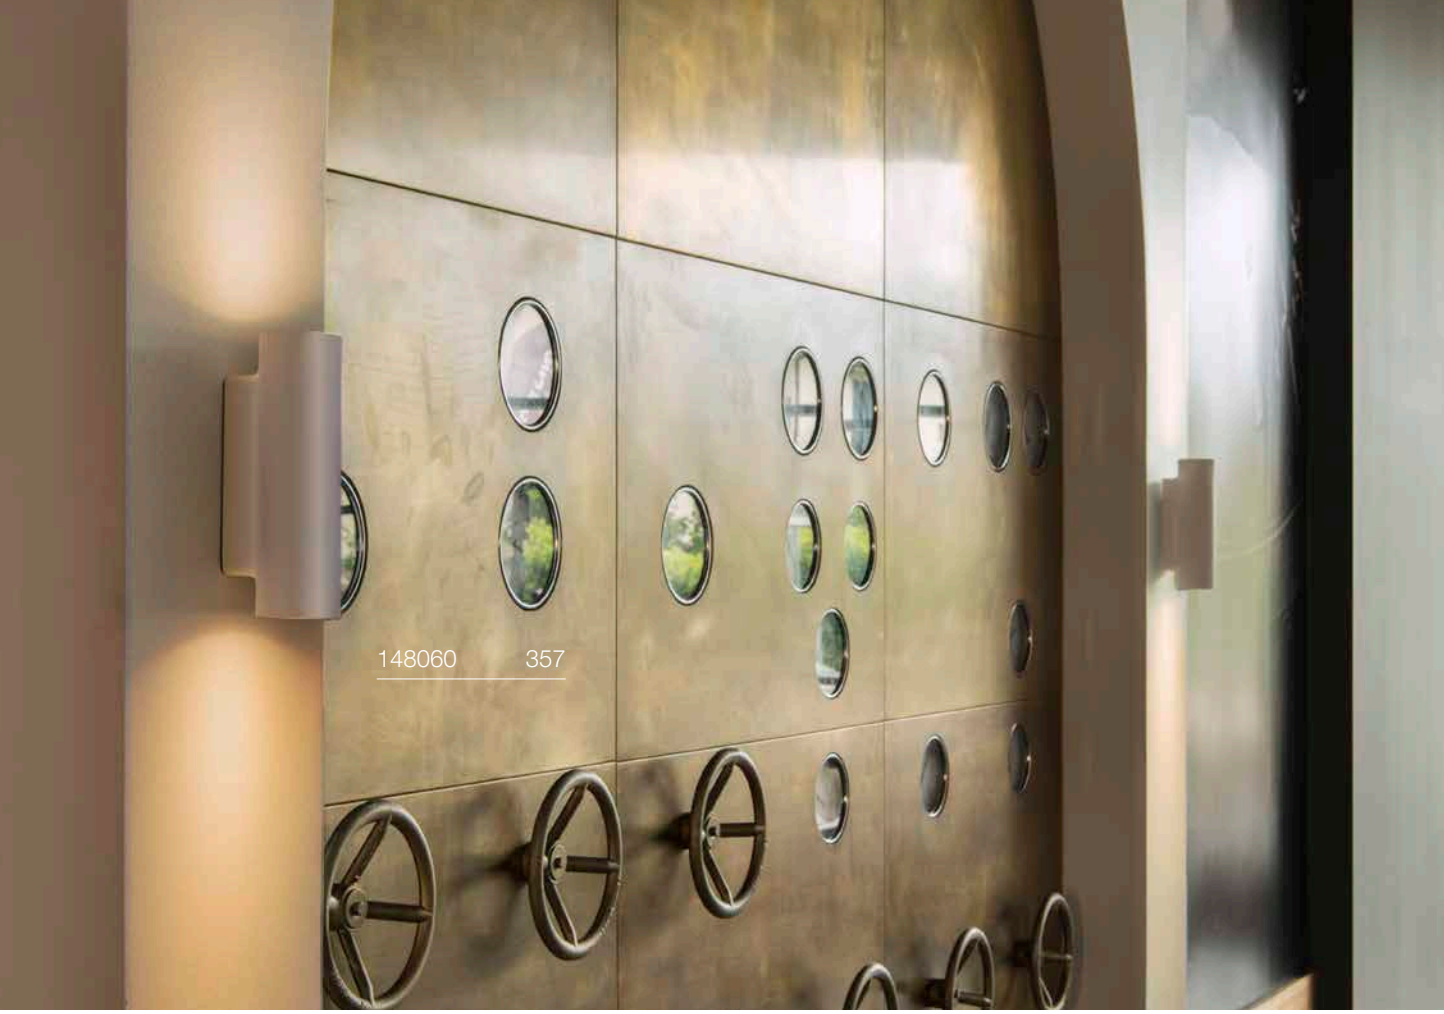
148060 357

148091 357

PLASTRA
WL, round shield



100-240 V ~50/60 Hz | 12 V
Total wattage: 6.5 W
Material: plaster/steel

LED INSIDE CRI 80

375 lm|3000 K

Options	Prod. no.	GBP
○ white	**148091**	**145.00**

PLASTRA
WL, square



100-240 V ~50/60 Hz | 12 V
Total wattage: 10.5 W
Material: plaster/steel

LED INSIDE CRI 80

650 lm|3000 K

Options	Prod. no.	GBP
○ white	**148019**	**186.00**

PLASTRA
WL, QPAR51



220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 35 W

Base: 2xGU10

Options	Prod. no.	GBP
○ white	**148060**	**58.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: **1005076** **7.00 GBP**

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: **1010470** **33.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

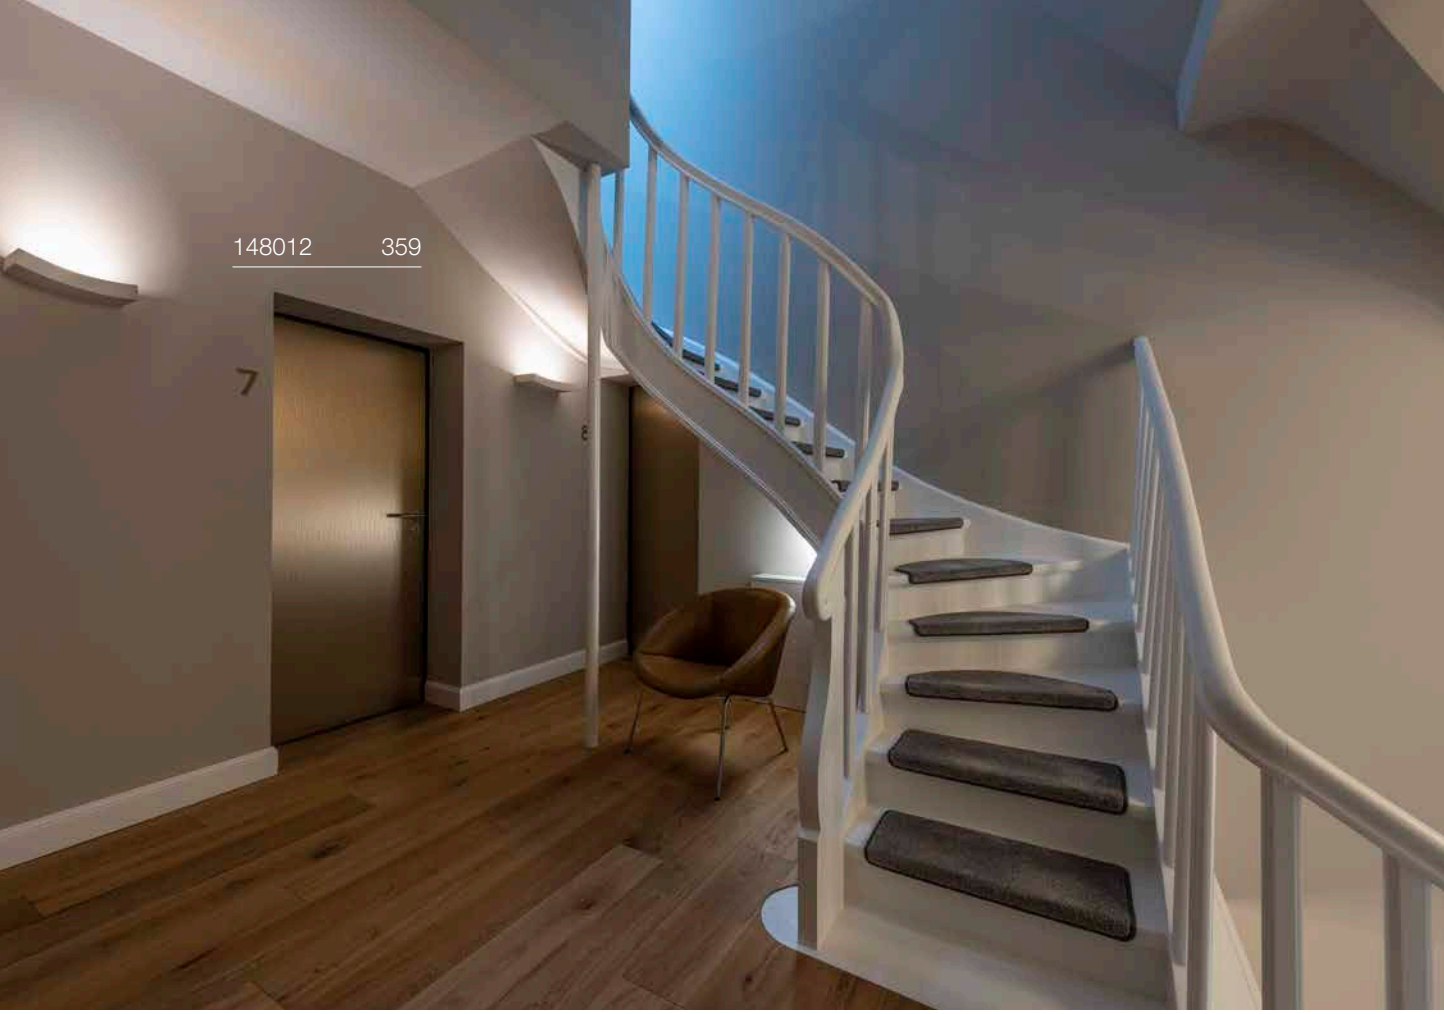
148012 359

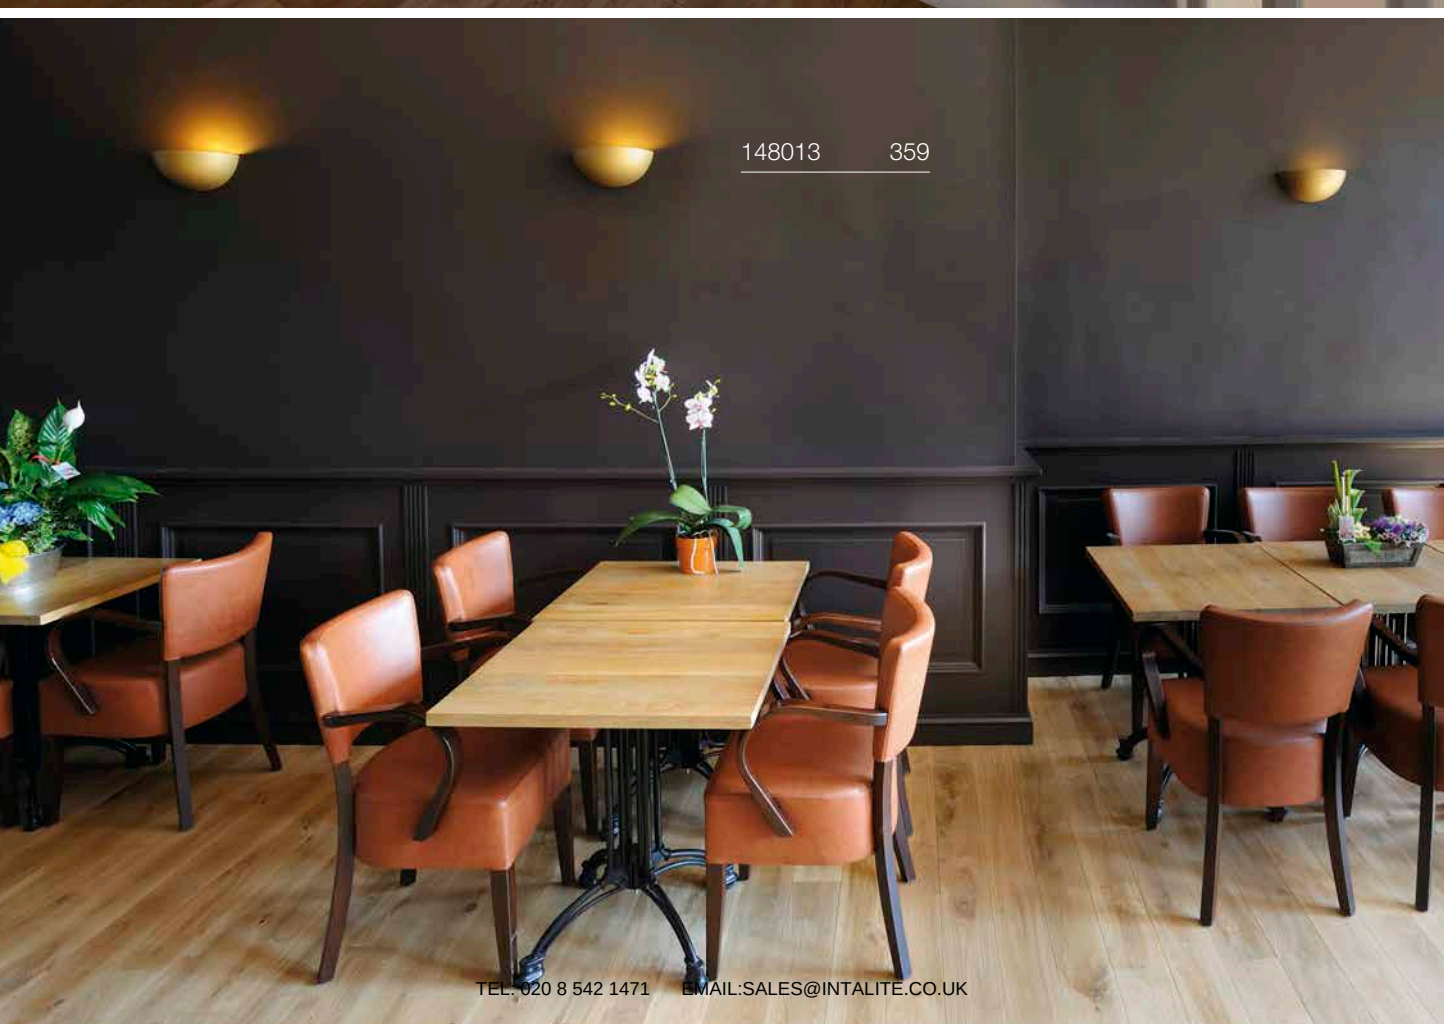
148013 359

PLASTRA 101
WL, E14



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 40 W

Base: 1xE14 max. Ø: 4.5 cm | L: 11 cm

Options	Prod. no.	GBP
○ white	**148013**	**47.00**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G
5 kW/1000 h

Prod. no.: 1005285 8.00 GBP

PLASTRA
WL, Curve, QT-DE12



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 100 W

Base: 1xR7s 78 mm

Options	Prod. no.	GBP
○ white	**148012**	**63.00**

R7s 78mm | 9 W | 330°
1050 lm | 3000 K | EEC = E
9 kW/1000 h

Prod. no.: 1005287 21.00 GBP

PLASTRA 104
WL, QT14



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 42 W

Base: 1xG9

Options	Prod. no.	GBP
○ white	**148016**	**47.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kW/1000 h

Prod. no.: 1005286 8.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

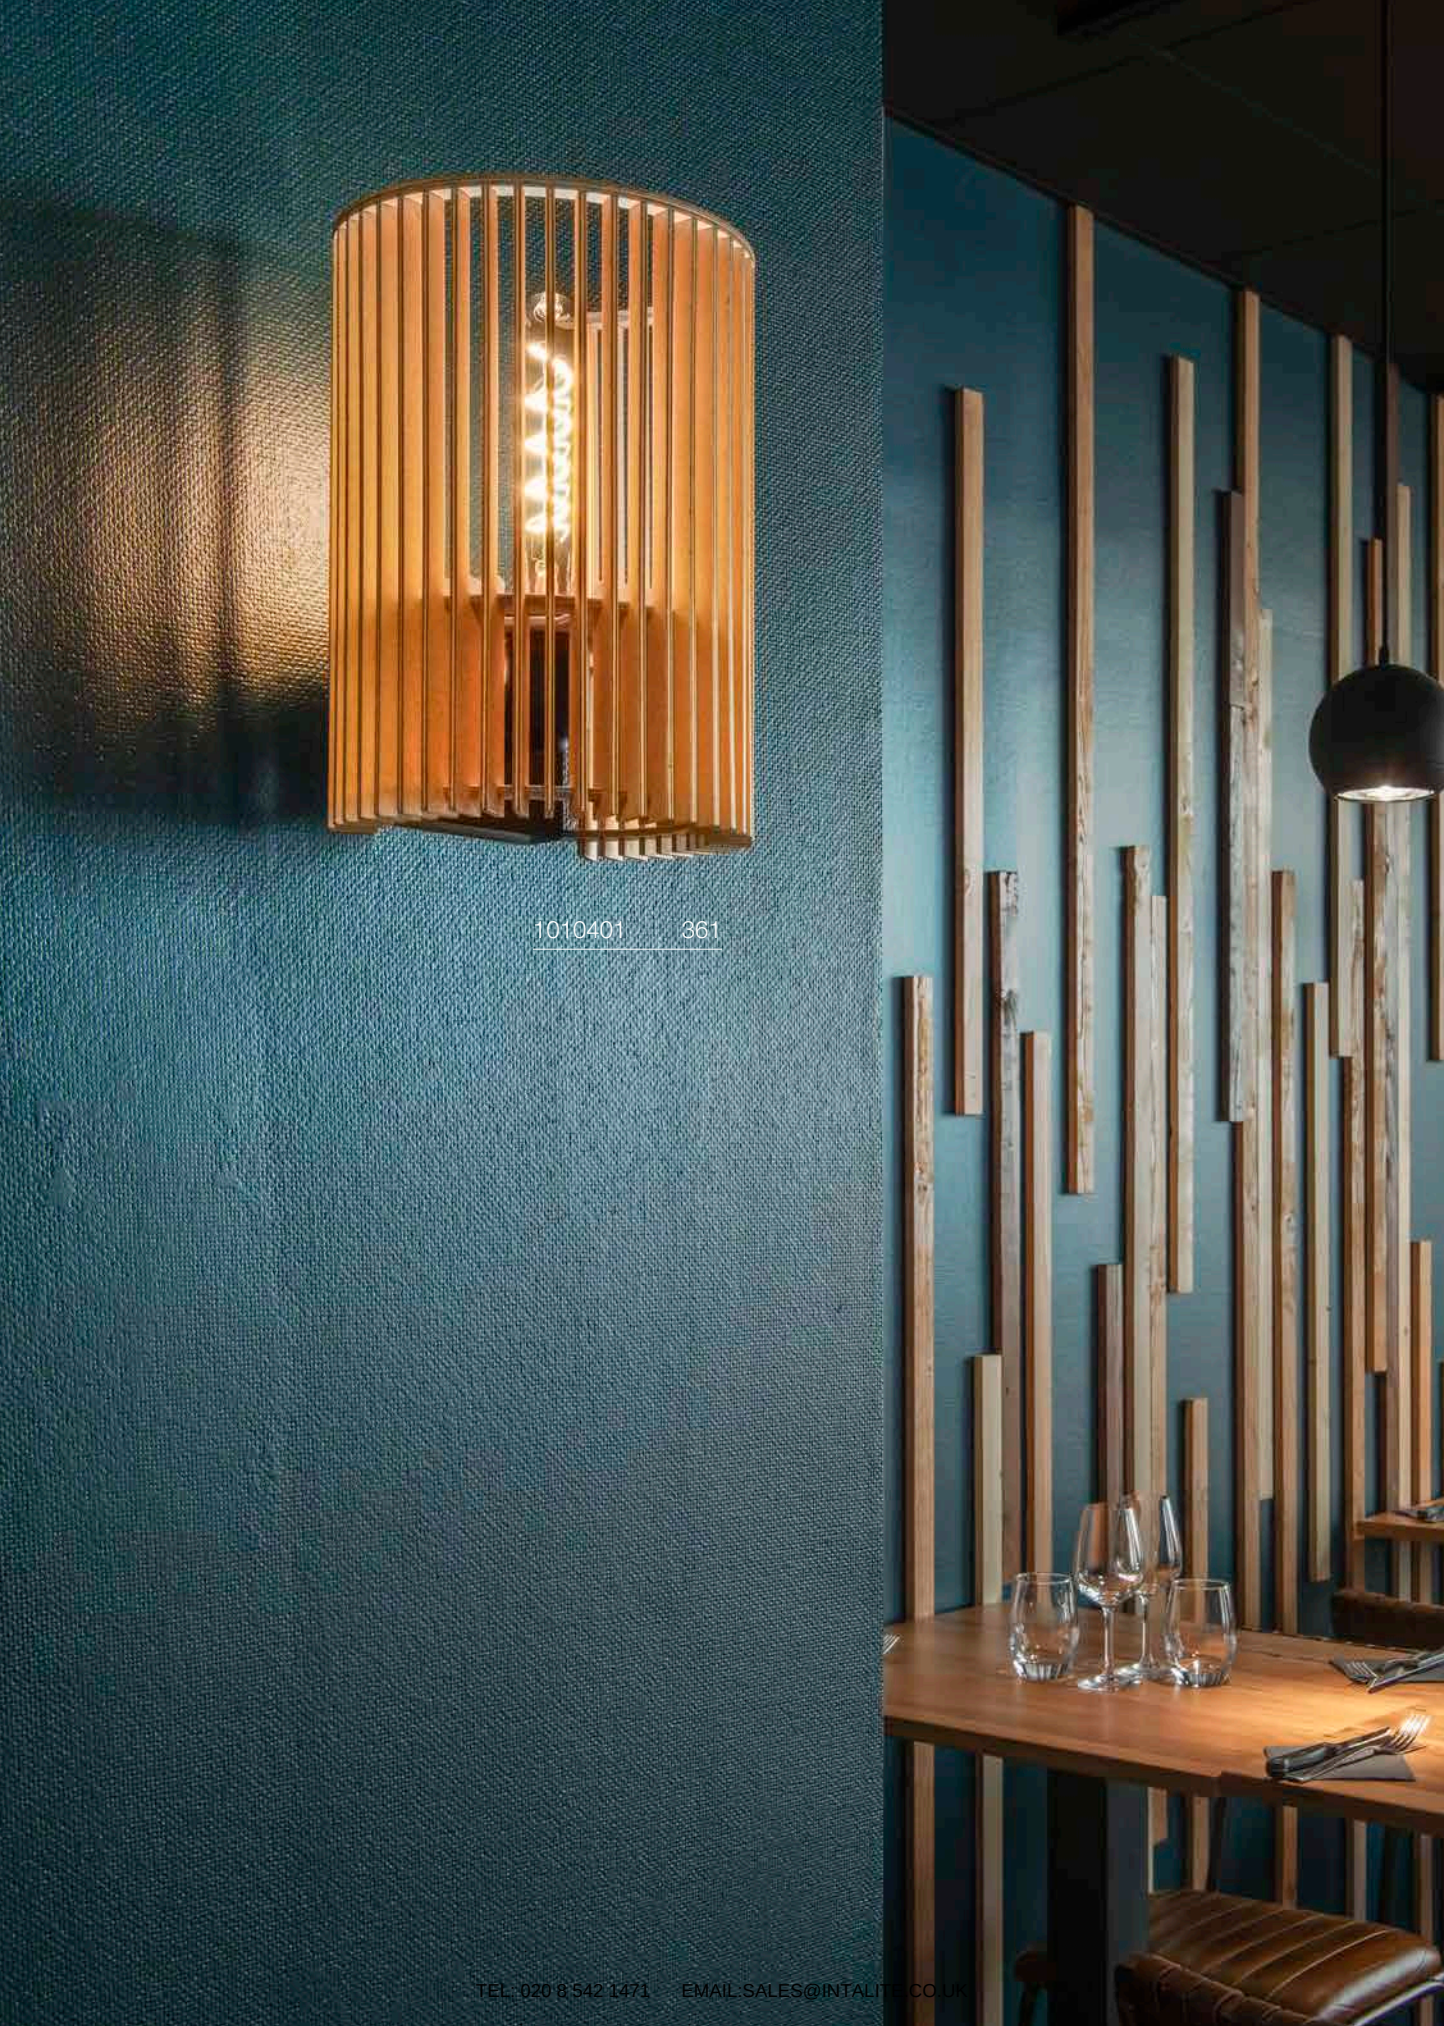

1010401 361

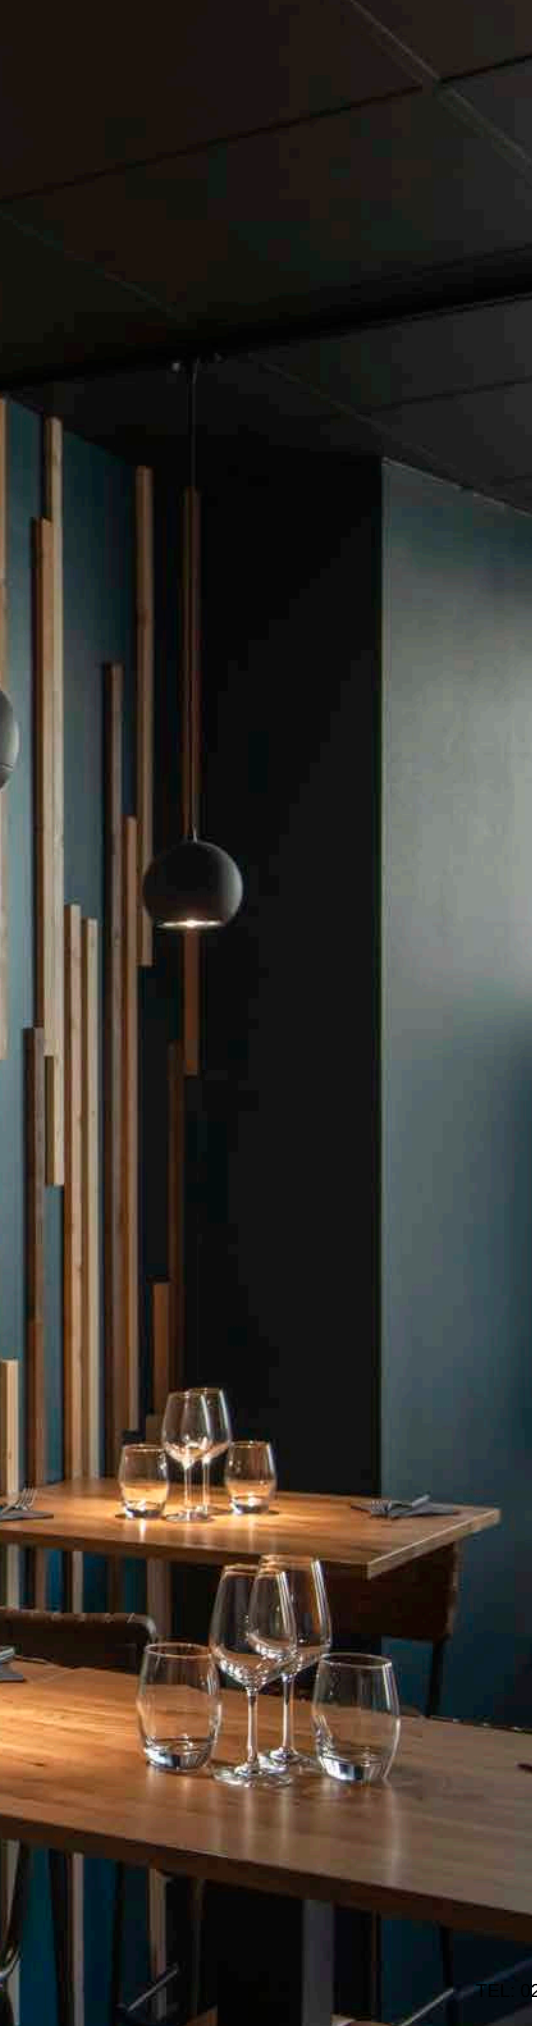

WUD
WL, EL27, cylindrical

NEW



IP20 IK02

220-240 V ~50/60 Hz
Material: wood/steel

- Natural material

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 12 cm | L: 18 cm

Options	Prod. no.	GBP
brown	**1010401**	**106.00**

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F
6 kW/1000 h

Prod. no.: **1008152** **55.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

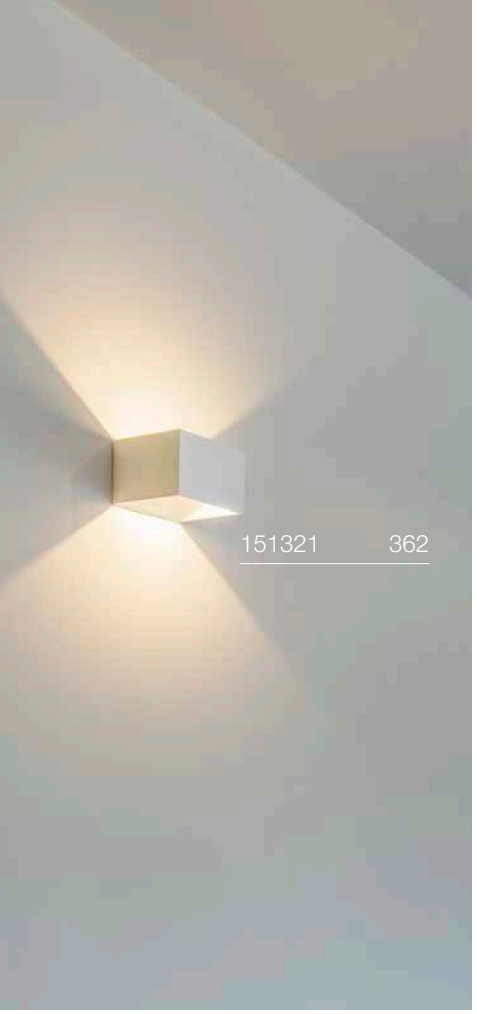

LOGS IN
WL





IP20 30000 h L70B50

100-240 V ~50/60 Hz | 500 mA
Total wattage: 6 W
Material: aluminium

INSIDE CRI 90

300 lm	3000 K	470 lm	3000 K

Options	Prod. no.	GBP
black/gold 300 lm	**151320**	**102.00**
white 470 lm	**151321**	**102.00**

LOGS IN
WL, PHASE

DIM TO WARM



C IP20 30000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

INSIDE CRI 90

43 lm / 69 lm	2000 K	–	430 lm / 690 lm	3000 K

Options	Prod. no.	GBP
black/gold 43 lm	**1000638**	**137.00**
white 69 lm	**1000639**	**137.00**

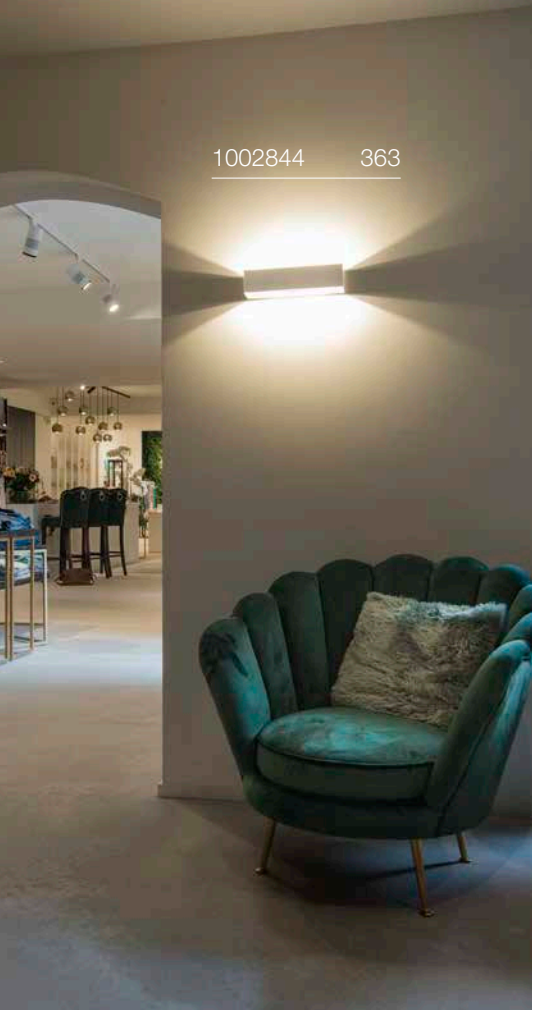

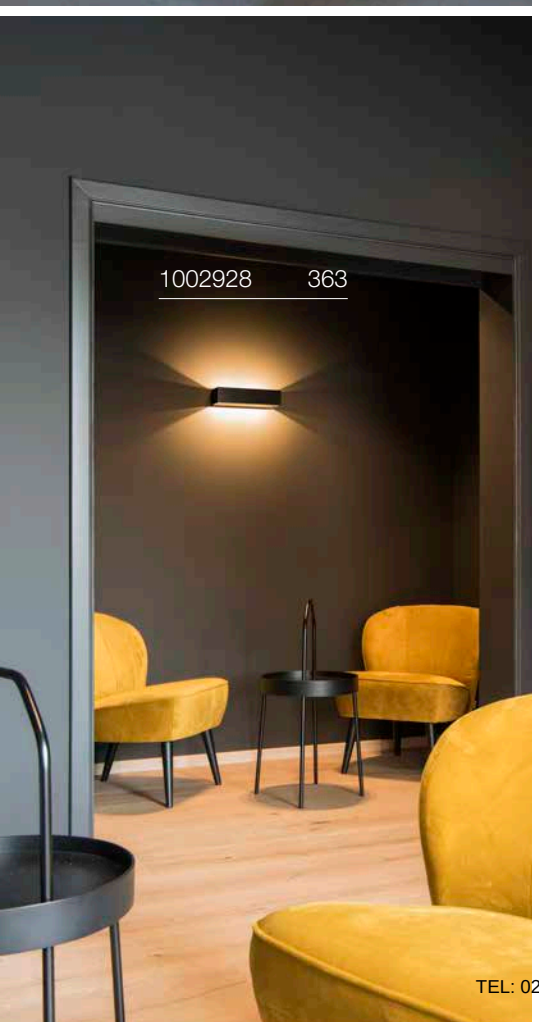

LOGS IN L
WL, PHASE



C,L IP20 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium

LED INSIDE CRI 90

1100 lm | 3000 K	1600 lm | 3000 K

Options	Prod. no.	GBP
● black/gold 1100 lm	**1002842**	**176.00**
○ white 1600 lm	**1002844**	**176.00**

LOGS IN L
WL, PHASE

DIM TO WARM



C,L IP20 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium

LED INSIDE CRI 90

100 lm / 140 lm | 2000 K – 1000 lm / 1390 lm | 3000 K

Options	Prod. no.	GBP
● black/gold 100 lm	**1002928**	**236.00**
○ white 140 lm	**1002929**	**236.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

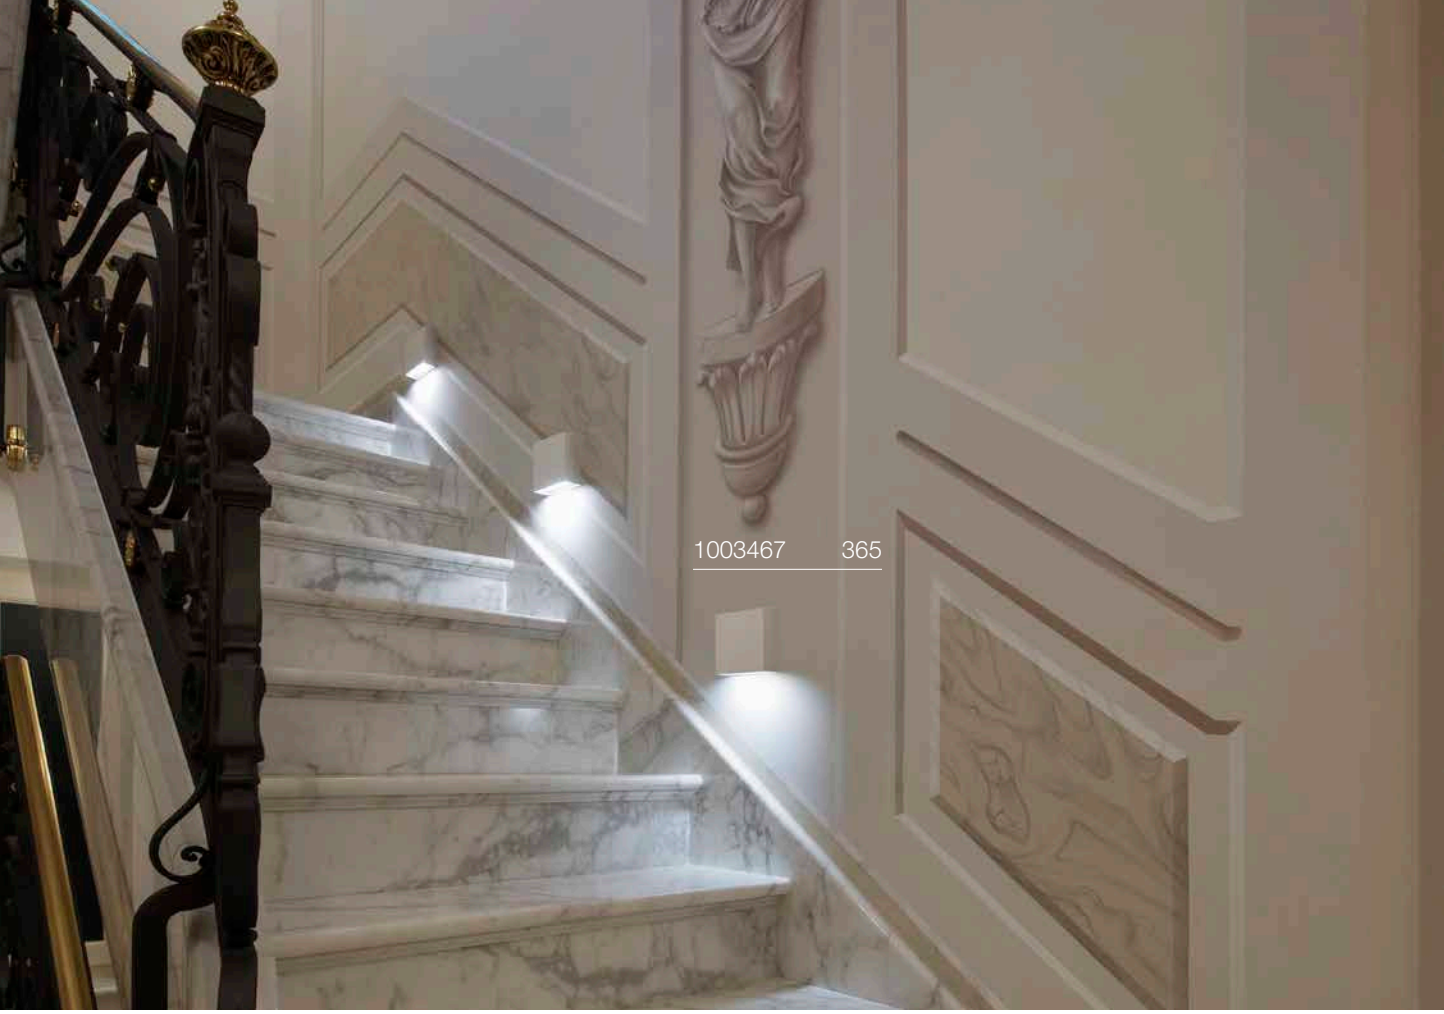

1003467 365

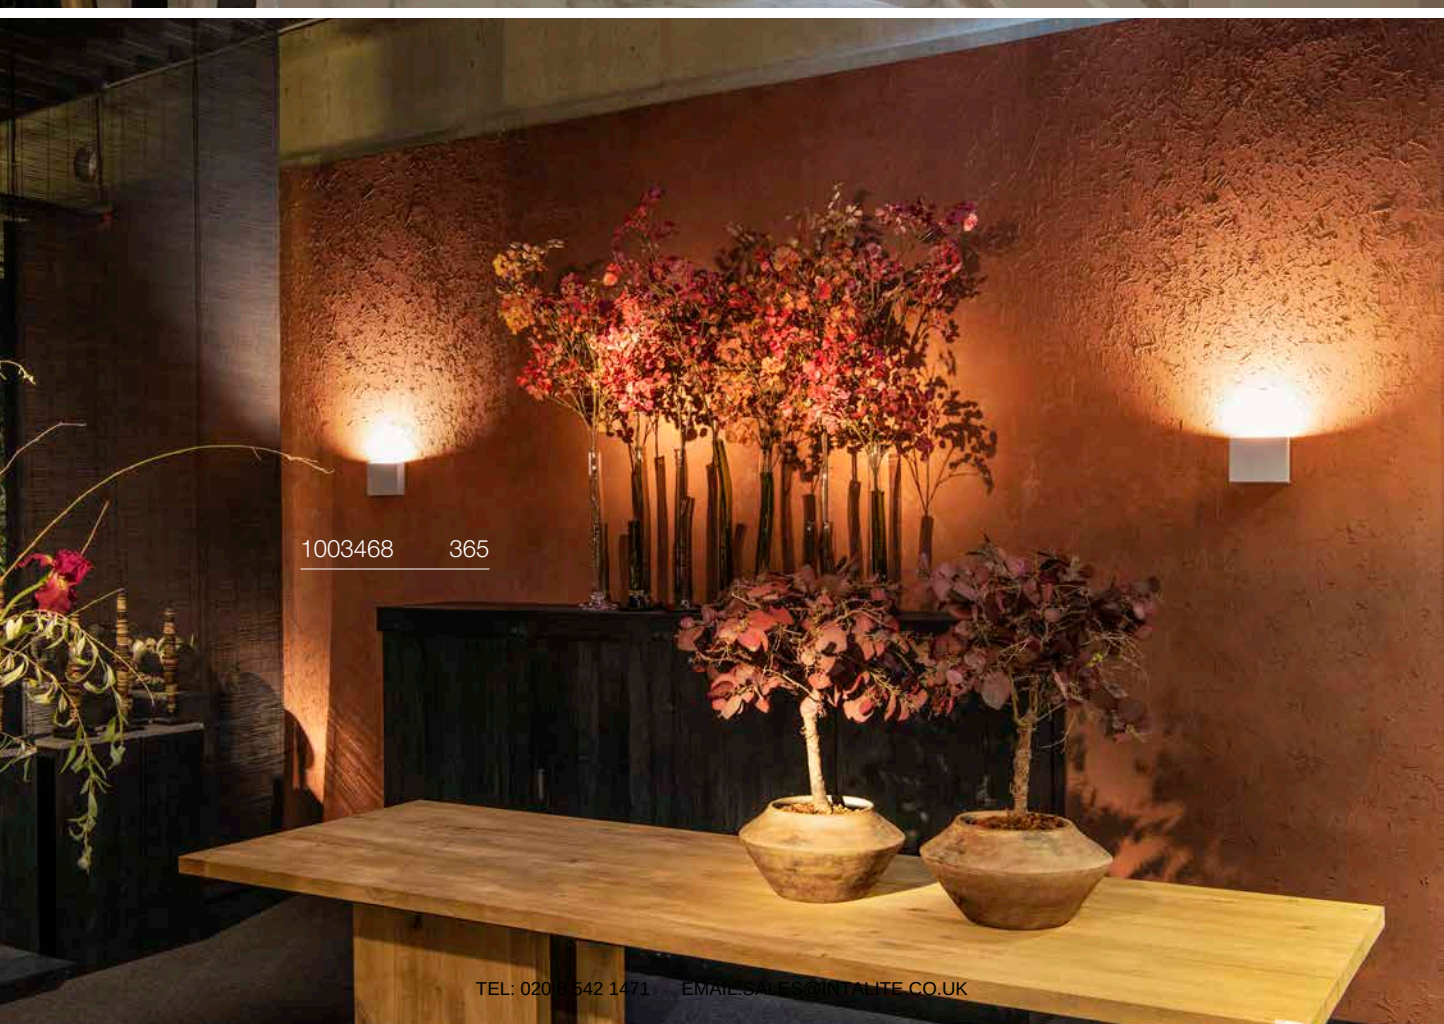

1003468 365

QUAD FRAME 14
WL



IP20 | 95° | 30000h L70B50 | 10

100-240 V ~50/60 Hz | 350 mA
Total wattage: 4.4 W
Material: aluminium

LED INSIDE | CRI 90

165 lm | 2700 K | 175 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1003467**	**85.00**

QUAD FRAME 19
WL



IP20 | 100° | 30000h L70B50 | 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium

LED INSIDE | CRI 90

580 lm | 2700 K | 640 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1003468**	**103.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

149511 367

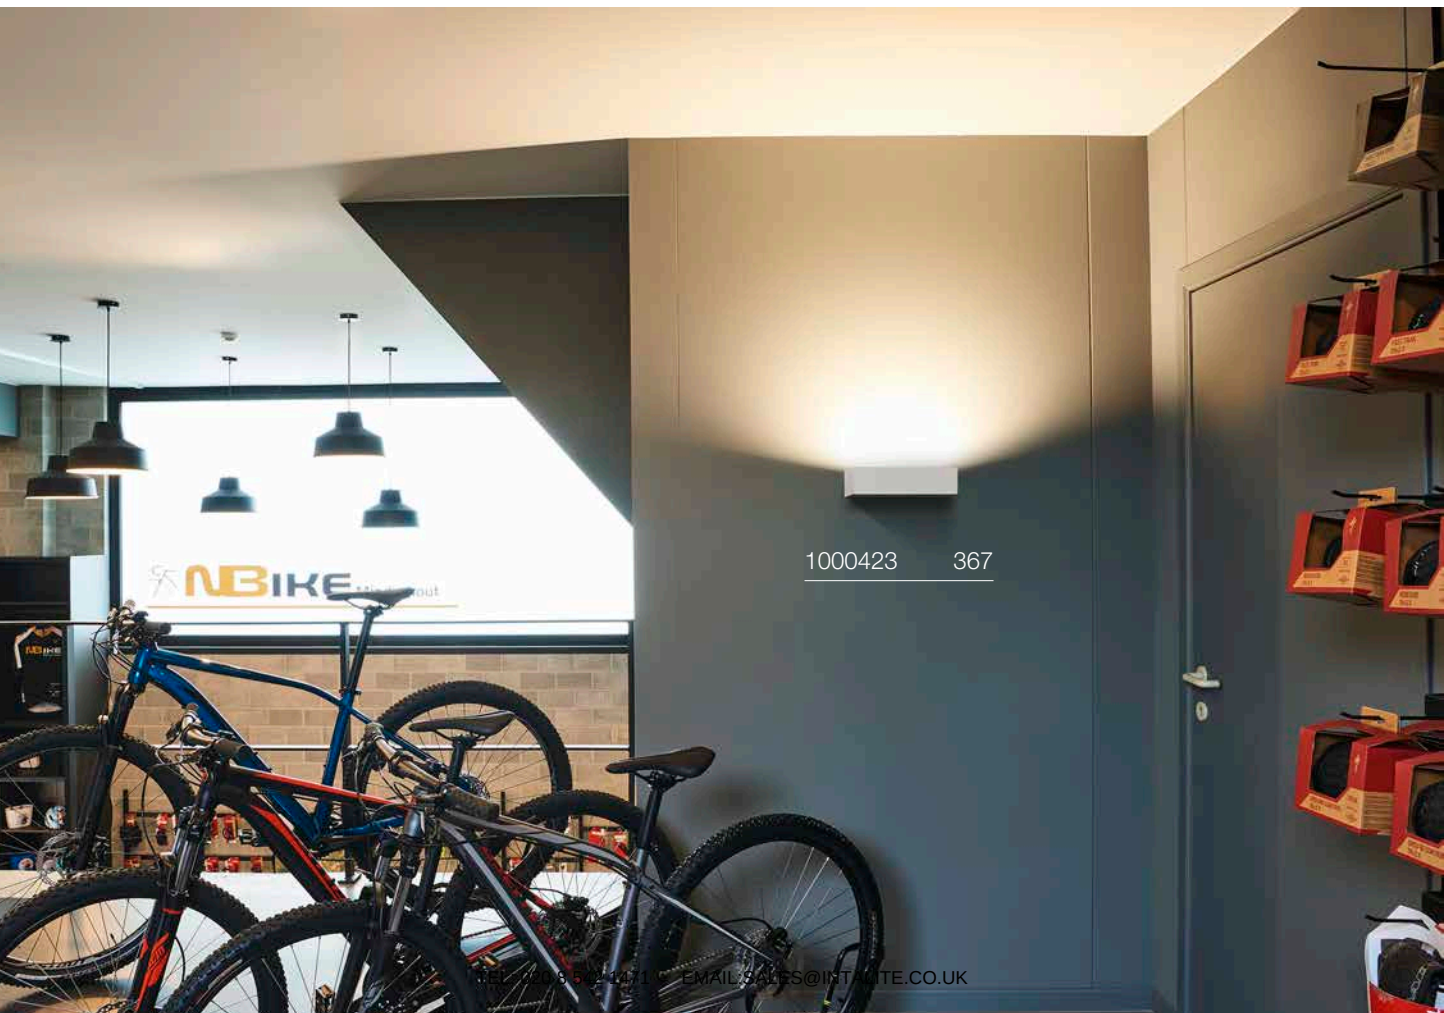

1000423 367

WL 149
WL, PHASE



IP20 | 50000h L70B50

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: steel/glass

LED INSIDE | CRI 90

1080 lm | 3000 K

Options	Prod. no.	GBP
○ white	**149511**	**130.00**

WL 149
WL, QT-DE12



IP20

220-240 V ~50/60 Hz
Material: steel/glass

SOCKET INSIDE | 60 W

Base: R7s 78mm

Options	Prod. no.	GBP
○ white/frosted	**149471**	**61.00**

R7s 78mm | 9 W | 330°
1050 lm | 3000 K | EEC = E
9 kW/1000h

Prod. no.: 1005287 21.00 GBP

SHELL 30
WL, PHASE



IP20 | IK02 | 120° | L70B50

220-240 V ~50/60 Hz | 1300 mA
Total wattage: 50 W
Material: aluminium/acrylic

LED INSIDE

5650 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1000423**	**327.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ASSO 300
WL, PHASE



220-240 V ~50/60 Hz | 500 mA
Total wattage: 12 W
Material: aluminium/steel

975 lm | 3000 K

Options	Prod. no.	GBP
○ white	**151271**	**186.00**
◐ aluminium/white	**151275**	**195.00**

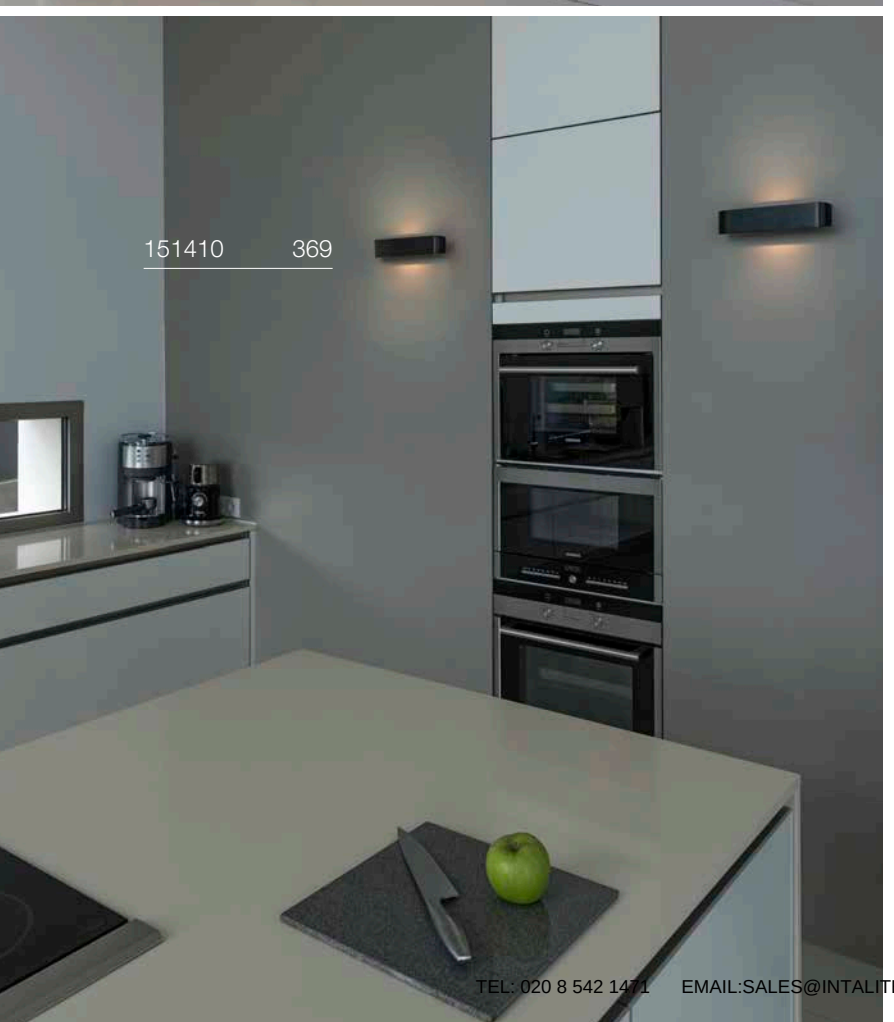

ASSO 300
WL, PHASE



220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium/steel

LED INSIDE CRI 90

135 lm|2000 K – 1340 lm|3000 K

Options	Prod. no.	GBP
○ white	**1000634**	**217.00**

OSSA 180
WL, QT-DE12



220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 100 W

Base: 1xR7s 78 mm

Options	Prod. no.	GBP
● black	**151450**	**83.00**
○ white	**151451**	**83.00**

R7s 78 mm | 9 W | 330°
1050 lm | 3000 K | EEC = E
9 kW/1000 h

Prod. no.: **1005287** **21.00 GBP**

OSSA 300
WL, QT-DE12



220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 120 W

Base: 1xR7s 118 mm

Options	Prod. no.	GBP
● black	**151410**	**101.00**
○ white	**151411**	**101.00**

R7s 118 mm | 15 W | 330°
2000 lm | 3000 K | EEC = E
15 kW/1000 h

Prod. no.: **1005288** **25.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CARISO
WL, PHASE



C IP20 30000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.2 W
Material: aluminium/steel

LED INSIDE CRI 80

250 lm	2700 K	460 lm	3000 K

Options	Prod. no.	GBP
black/gold 2700 K	**151710**	**148.00**
white 3000 K	**151711**	**144.00**

CARISO
WL, PHASE

DIM TO WARM



C,L IP20 30000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium/steel

LED INSIDE CRI 90

100 lm	2000 K	–	1030 lm	3000 K
58 lm	1700 K		580 lm	2700 K

Options	Prod. no.	GBP
black/gold 1700 K	**151740**	**254.00**
white 2000 K	**151741**	**246.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CHROMBO
WL, PHASE



220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: steel/glass

790 lm | 3000 K

Options	Prod. no.	GBP
● black	**1008071**	**147.00**
○ white	**1003316**	**147.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1004740 372

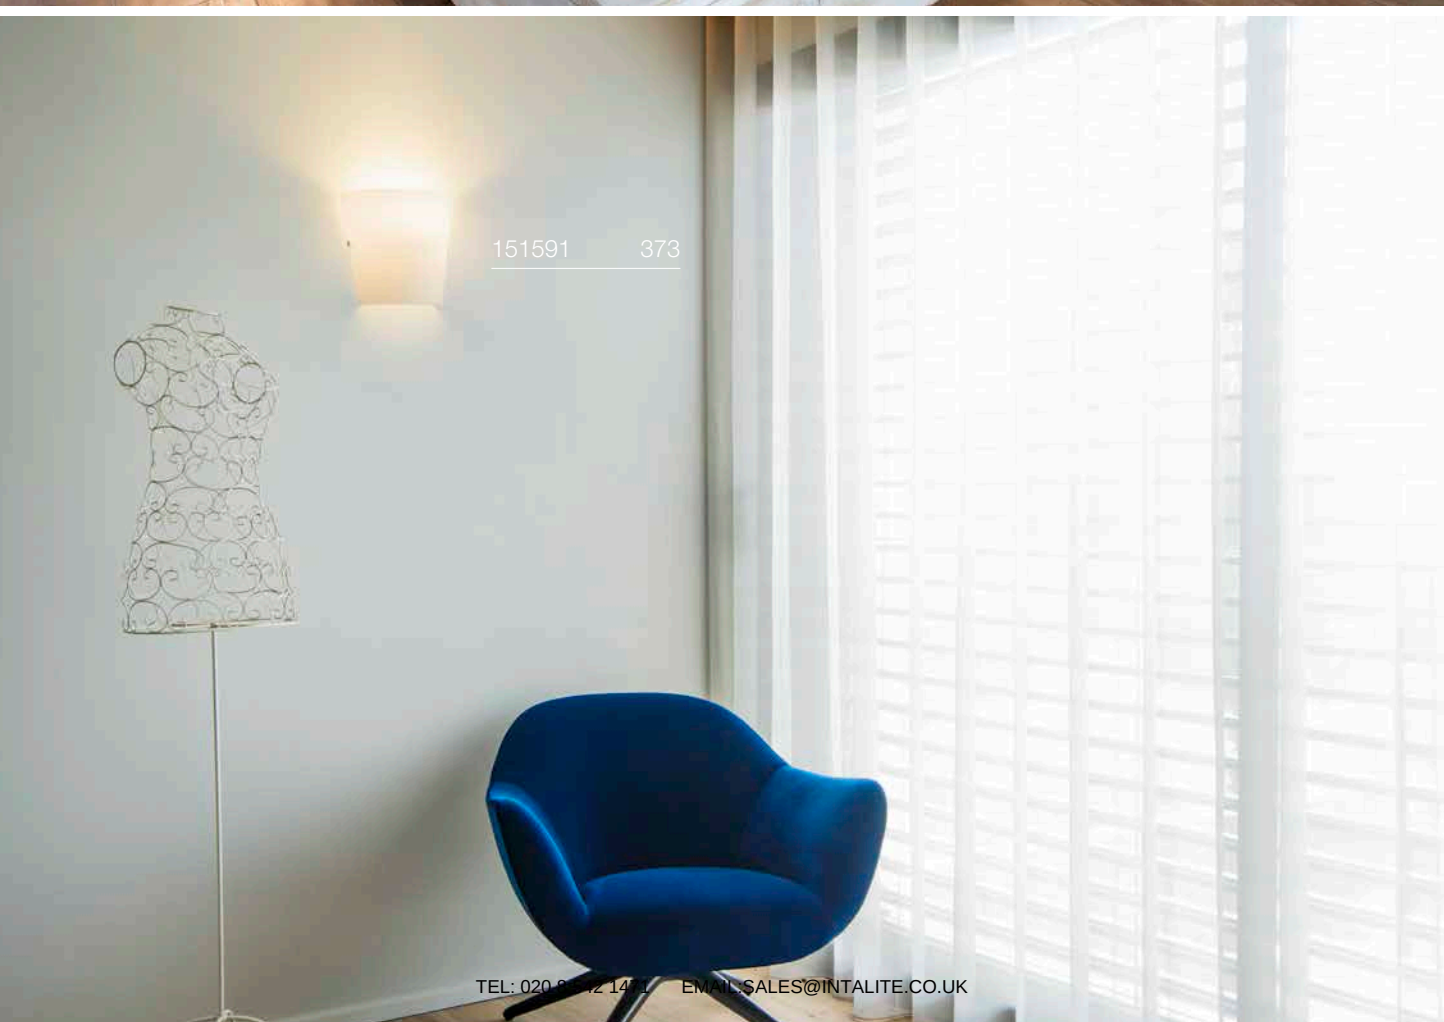

151591 373

DIRETO 60
WL, PHASE



IP20 | 180° | 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 14 W
Material: aluminium

LED INSIDE | CRI 90

Up	590 lm	2700 K	625 lm	3000 K
Down	590 lm		625 lm	

Options	Prod. no.	GBP
● black	**1004740**	**178.00**
○ white	**1004741**	**178.00**

DENA 30
WL, E14



IP20

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE | 40 W

Base: 2xE14 | max. Ø: 5.1 cm | L: 9.6 cm

Options	Prod. no.	GBP
● aluminium	**147529**	**89.00**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G
5 kW/1000 h

Prod. no.: 1005285 8.00 GBP

BASKET
WL, E27



IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE | 60 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 15.2 cm

Options	Prod. no.	GBP
○ white	**151591**	**84.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

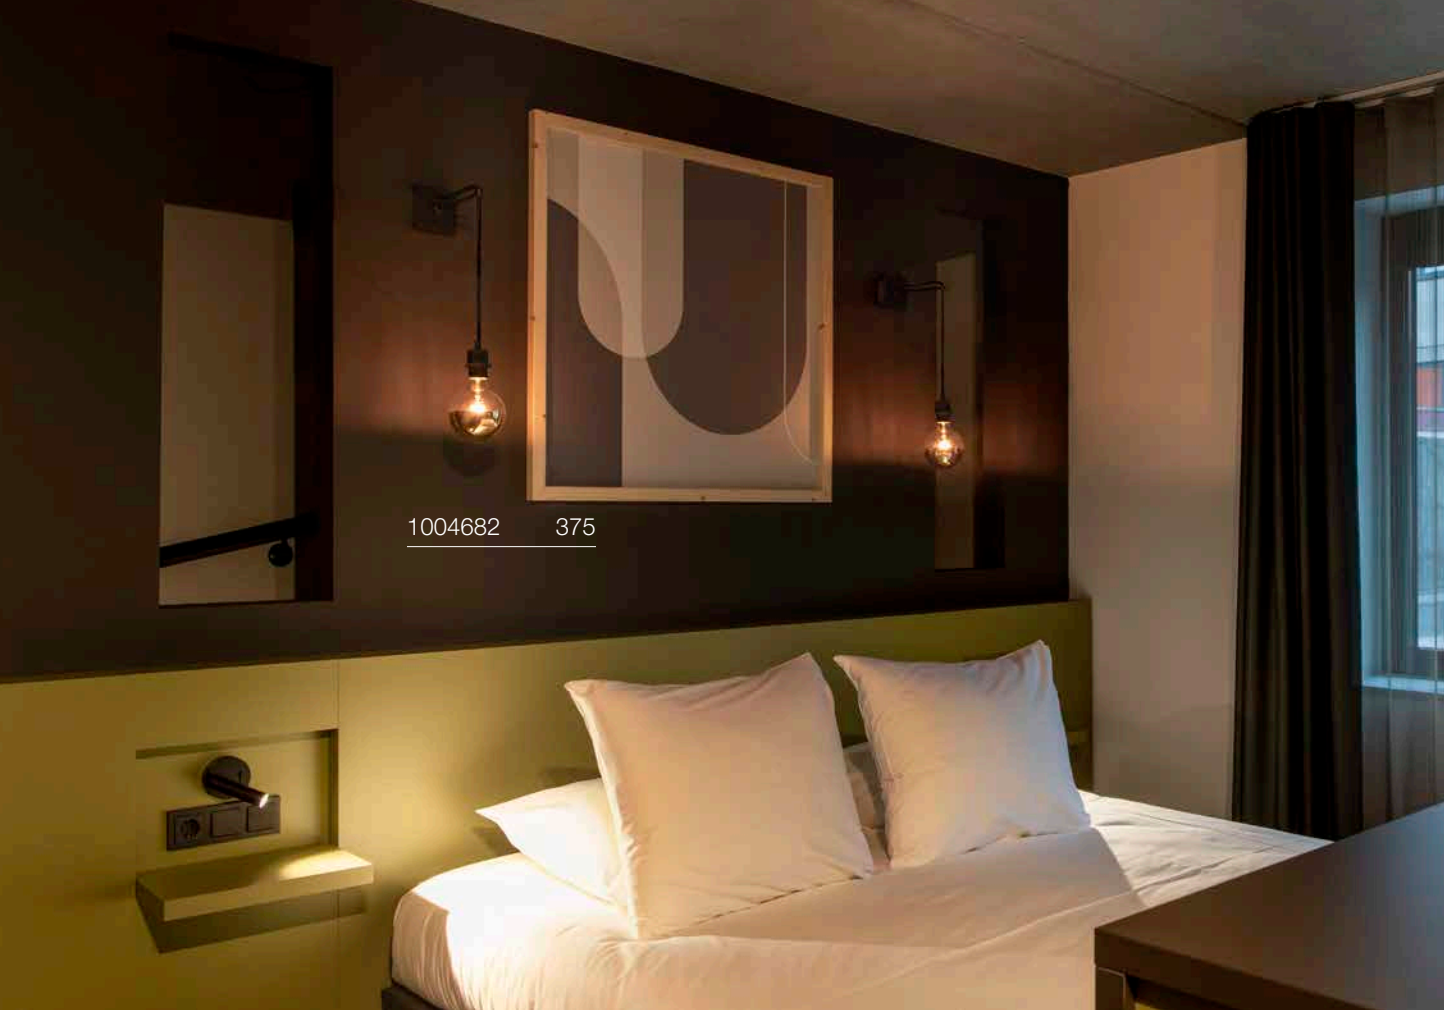
1004682 375

1000327 375

1000911 375

FITU
Wall bracket

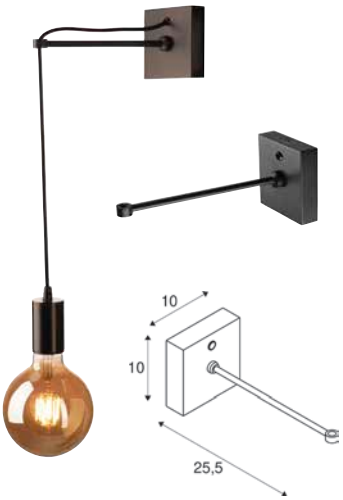

IP20

Material: steel

• See page 268 for matching pendant lights

Options	Prod. no.	GBP
● black	1004682	55.00

THEO UP/DOWN
WL, QPAR51

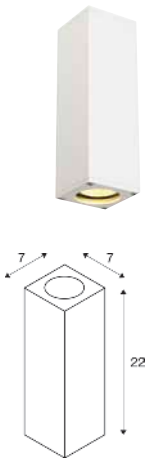

IP20

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 50 W

Base: 2xGU10

Options	Prod. no.	GBP
● anthracite	1000330	94.00
○ white	1000327	93.00
● aluminium	1000329	102.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

SOLID CUBE
WL, QT14

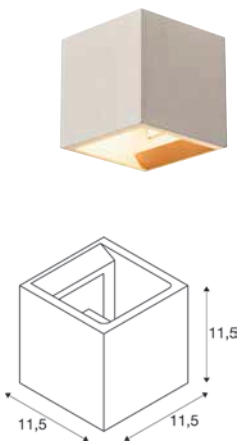

IP20

220-240 V ~50/60 Hz
Material: concrete

SOCKET INSIDE 25 W

Base: 1xG9

Options	Prod. no.	GBP
● grey	1000910	84.00
● black sandstone	1000911	84.00

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kW/1000 h

Prod. no.: 1005286 8.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

151803 377

ENOLA® B
WL, QPAR51



IP20 350° 90°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Switch on light housing

SOCKET INSIDE 50 W

Base: 1xGU10 | L: 6 cm

Options	Prod. no.	GBP
● black	**1000729**	**70.00**
○ white	**1000730**	**70.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000 h

Prod. no.: 1005273 9.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

ENOLA® B
WL, QPAR51



IP20

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 50 W

Base: 2xGU10 | L: 8.5 cm

Options	Prod. no.	GBP
● black	**151800**	**81.00**
○ white	**151801**	**81.00**
● gold	**151803**	**90.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FENDA
WL, Base, E27



IP20

220-240 V ~50/60 Hz
Material: steel/plastic

SOCKET INSIDE 40 W

Base: 1xE27	max. Ø: 5.1 cm	L: 20 cm

Options	Prod. no.	GBP
○ white	**1001272**	**45.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: **1005289** **9.00 GBP**

FENDA
Half shade

W: 23 cm
H: 30 cm
Material: textile/steel

Options	Prod. no.	GBP
●● black/copper	**1001274**	**39.00**
● black	**1001273**	**34.00**
○ white	**1001275**	**34.00**
● beige	**1001276**	**34.00**

⊕

Product	Prod. no.	GBP
Base		
○ white	**1001272**	**45.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.

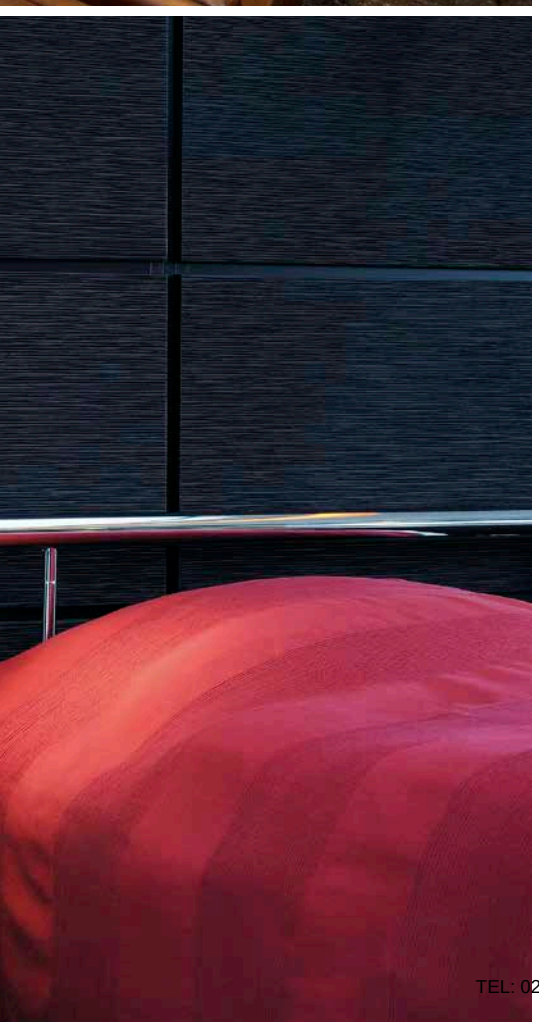

KENKUA SPOT
WL, E27



IP20 | 25° | 180° | 180° | 30000 h L70B50

100-240 V ~50/60 Hz | 700 mA
Total wattage: 2 W
Material: steel/glass

- Light sources can be switched on/off separately at the light

LED INSIDE | SOCKET INSIDE | CRI 80 | 40 W

Base: 1xE27	max. Ø: 6.5 cm	L: 12 cm

Spot	200 lm	3000 K

Options	Prod. no.	GBP
chrome	**1002855**	**179.00**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A
4 kW/1000 h

Prod. no.: **1008641** **6.50 GBP**

SMART

E27 | 9.5 W | 190°
1100 lm | 2200-6500 K | EEC = F
10 kWh/1000 h

Prod. no.: **1010465** **30.00 GBP**

COUPA
WL



IP20 | 50000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 3.4 W
Material: steel/glass

- Light sources can be switched on/off separately at the light

LED INSIDE | SOCKET INSIDE | CRI 80 | 42 W

Base: 1xG9	L: 9 cm

Spot	240 lm	3000 K

Options	Prod. no.	GBP
chrome/opaque	**149452**	**178.00**

G9 | 4 W | 300°
450 lm | 2700 K | EEC = E
4 kW/1000 h

Prod. no.: **1007455** **8.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

KARPO MAGN
CW, single, PHASE



C IP20 38° 25000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.2 W
Material: steel/aluminium

- Light head position can be adjusted via the magnetic bracket

LED INSIDE CRI 90

350 lm | 3000 K

Options	Prod. no.	GBP
● black	**1004706**	**169.00**

KARPO GOOSE
WL



Switch IP20 40° 50000 h L70B50

220-240 V ~50/60 Hz | 12 V
Total wattage: 6 W
Material: aluminium/steel

- Light can be dimmed via switch on the light head

LED INSIDE CRI 90

420 lm
380 lm | 3000 K

Options	Prod. no.	GBP
● black 380 lm	**1006162**	**154.00**
○ white 420 lm	**1006161**	**154.00**

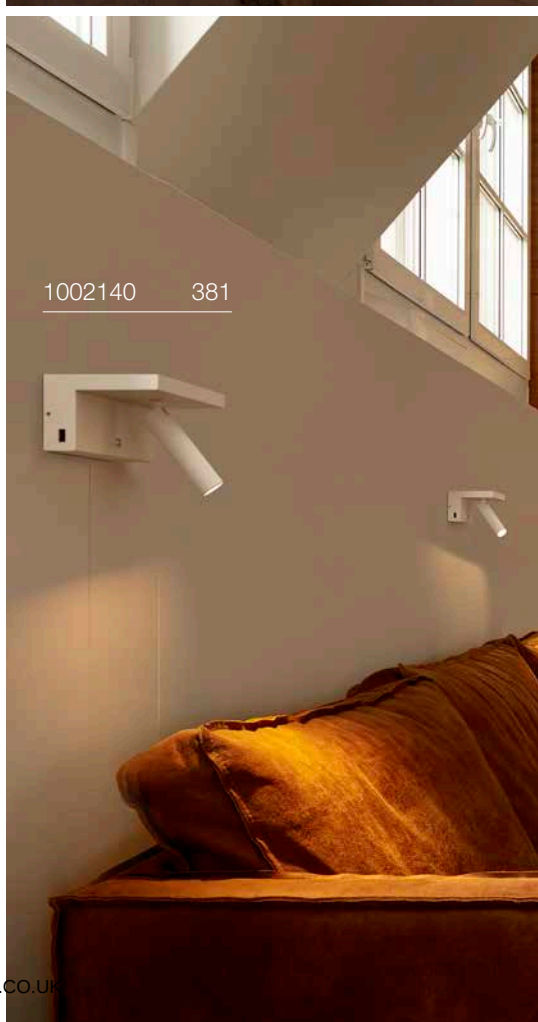

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

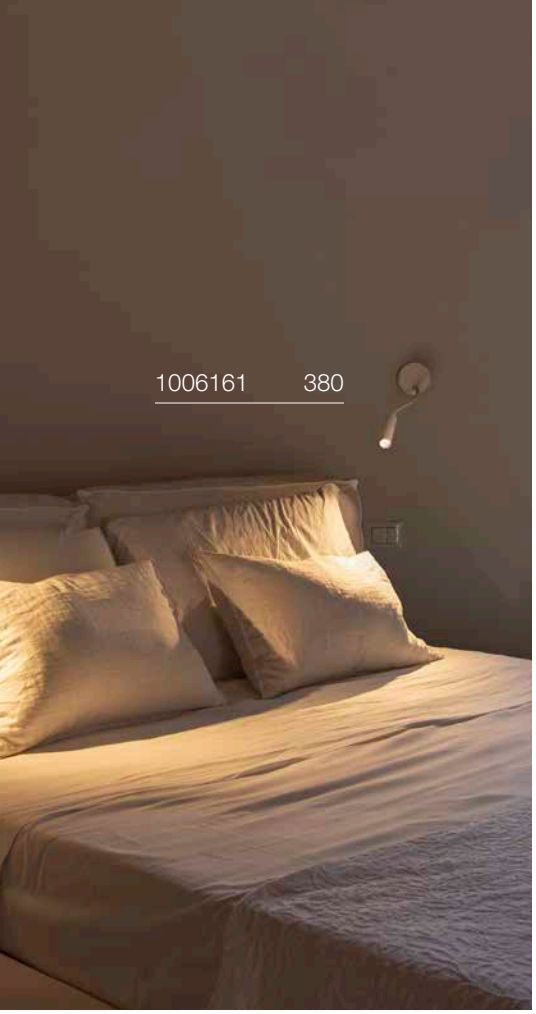

KARPO 30
WL, single



IP20 | 40° | 350° | 90° | 30000 h L70B50

100-240 V ~50/60 Hz | 500 mA
Total wattage: 6 W
Material: aluminium/steel

- Switch on light housing

LED INSIDE | CRI 90

370 lm | 400 lm | 3000 K

Options	Prod. no.	GBP
● black 370 lm	**152340**	**108.00**
○ white 400 lm	**152341**	**108.00**

KARPO
WL



Switch | IP20 | 40° | 180° | 90° | 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.8 W
Material: aluminium

- 2 USB connections max. 1.5 A
- 3 dimming levels via switch on base

LED INSIDE | CRI 90

390 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1002140**	**208.00**

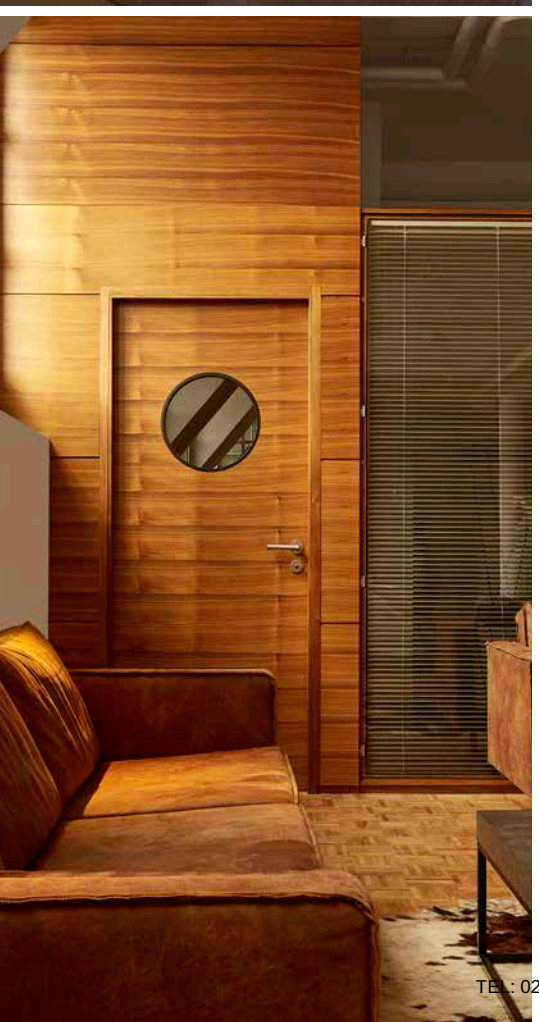

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

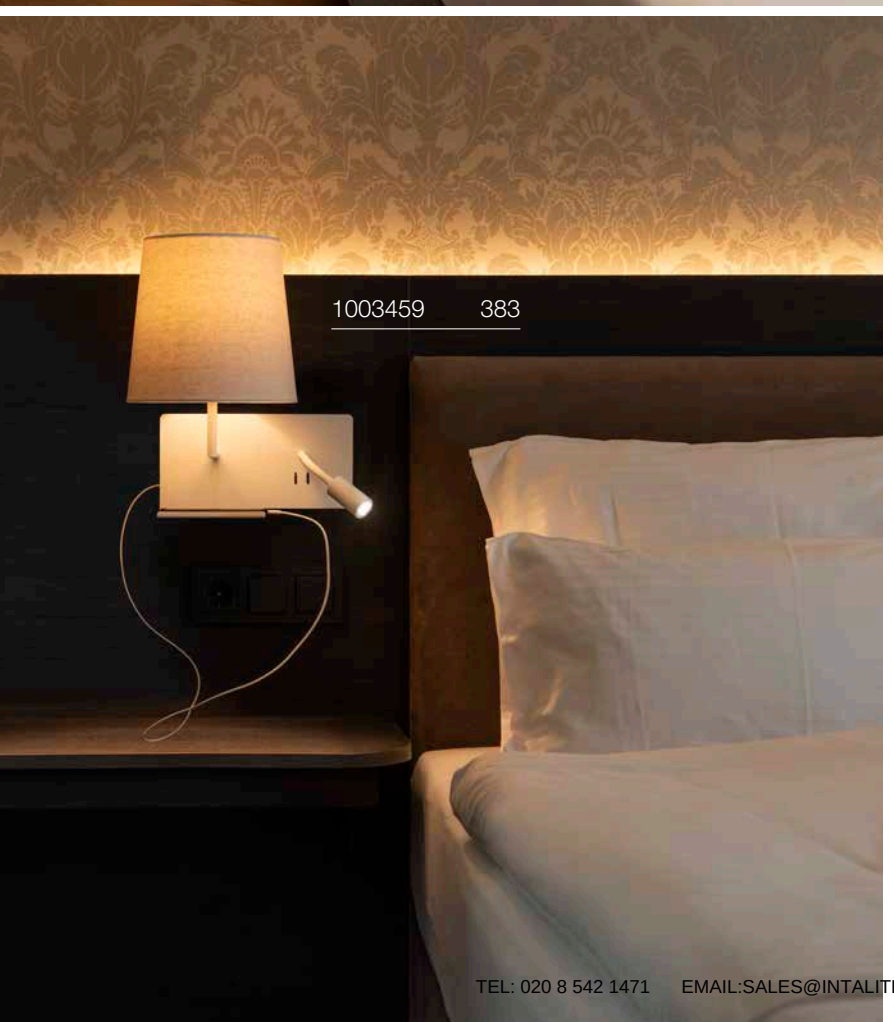

SOMNILA SPOT
WL, left



100-240 V ~50/60 Hz | 12 V
Total wattage: 15 W
Material: aluminium/steel

- 1 USB connection | 5V 2.0A
- Light sources can be switched on/off separately on the housing

Spot	120 lm	3000 K
Indirect	650 lm	

Options	Prod. no.	GBP
● black 120 lm	**1003455**	**199.00**
○ white 120 lm	**1003457**	**199.00**

SOMNILA SPOT
WL, right



IP20 | 340° | 110° | 36000h L70B50

100-240 V ~50/60 Hz | 12 V
Total wattage: 15 W
Material: aluminium/steel

- 1 USB connection | 5V 2.0A
- Light sources can be switched on/off separately on the housing

LED INSIDE | CRI 90

Spot	120 lm	3000 K
Indirect	650 lm	

Options	Prod. no.	GBP
● black 120 lm	**1003456**	**199.00**
○ white 120 lm	**1003458**	**199.00**

SOMNILA FLEX
WL, left



IP20 | 110° | 36000h L70B50

100-240 V ~50/60 Hz | 12 V
Material: aluminium

- Light sources can be switched on/off separately on the housing

LED INSIDE | CRI 90

Spot	120 lm	3000 K

Options	Prod. no.	GBP
○ white	**1003459**	**208.00**

SOMNILA FLEX
WL, right



IP20 | 110° | 36000h L70B50

100-240 V ~50/60 Hz | 12 V
Material: aluminium

- Light sources can be switched on/off separately on the housing

LED INSIDE | CRI 90

Spot	120 lm	3000 K

Options	Prod. no.	GBP
○ white	**1003460**	**208.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

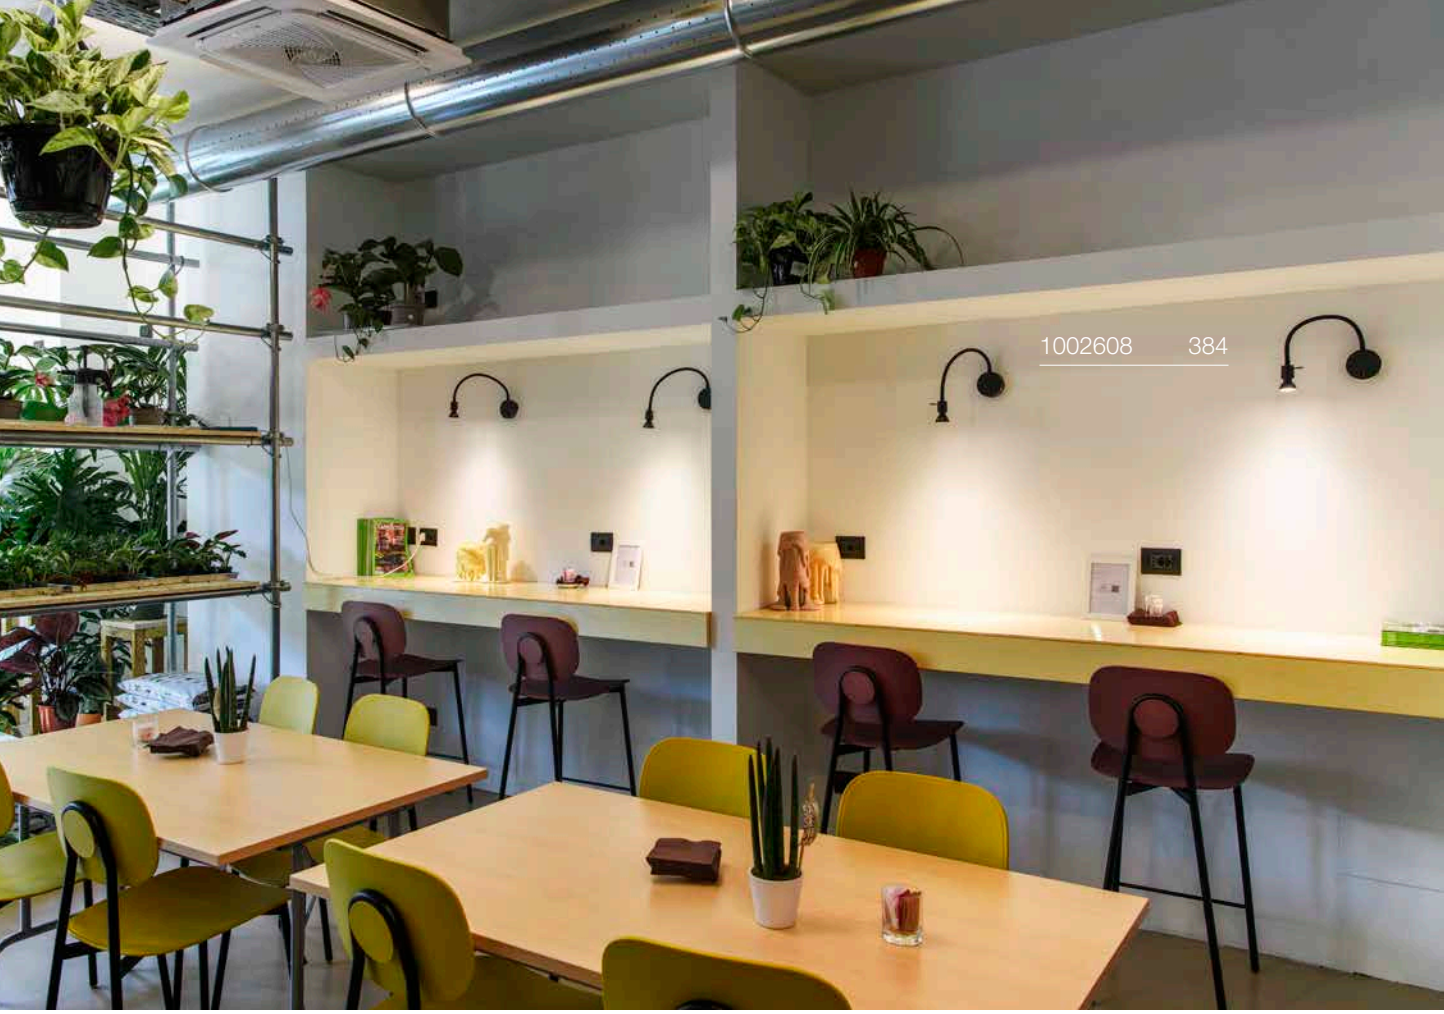

1002608 384

146682 385

DIO FLEX PLATE
WL QPAR51



IP20

220-240 V ~50/60 Hz
Material: aluminium

- Switch on light housing

SOCKET INSIDE 50 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**1002608**	**49.00**
○ white	**1002607**	**49.00**
◑ chrome	**146692**	**57.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005076 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

DIO FLEX PLATE
WL



IP20 45° 30000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 1.9 W
Material: aluminium

- Switch on light housing

LED INSIDE CRI 80

100 lm | 2700 K | 3000 K

Options	Prod. no.	GBP
● black 2700 K	**1002430**	**86.00**
● black 3000 K	**1002431**	**86.00**
○ white 3000 K	**1002118**	**86.00**
◑ chrome 3000 K	**146682**	**91.00**

DISPLAY ADL 50
QPAR51



IP20 200° 90° 30

220-240 V ~50/60 Hz
Material: aluminium/brass

- open cable end

SOCKET INSIDE 50 W

Base: 1xGU10

Options	Prod. no.	GBP
○ white	**1002860**	**42.00**
◑ chrome	**146332**	**54.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005079 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PHELIA
WL, QPAR51



IP20 | 350° | 90°

220-240 V ~50/60 Hz
Material: aluminium/steel

• Switch on light body

SOCKET INSIDE | 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 10.5 cm

Options	Prod. no.	GBP
● black	**148540**	**113.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

MERADO FLOOD
WL, PHASE





C | IP20 | 360° | 90° | 40000h L70B50 | 200°

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 40 W
Material: aluminium

LED INSIDE | CRI 80

3000 lm | 3000 K | 3200 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	**1001468**	**212.00**
○ white 4000 K	**1001472**	**212.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

KARPO 30
CW, single



220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.3 W
Material: aluminium/steel

560 lm
680 lm | 3000 K

Options	Prod. no.	GBP
● black 560 lm	**152330**	**111.00**
○ white 680 lm	**152331**	**111.00**

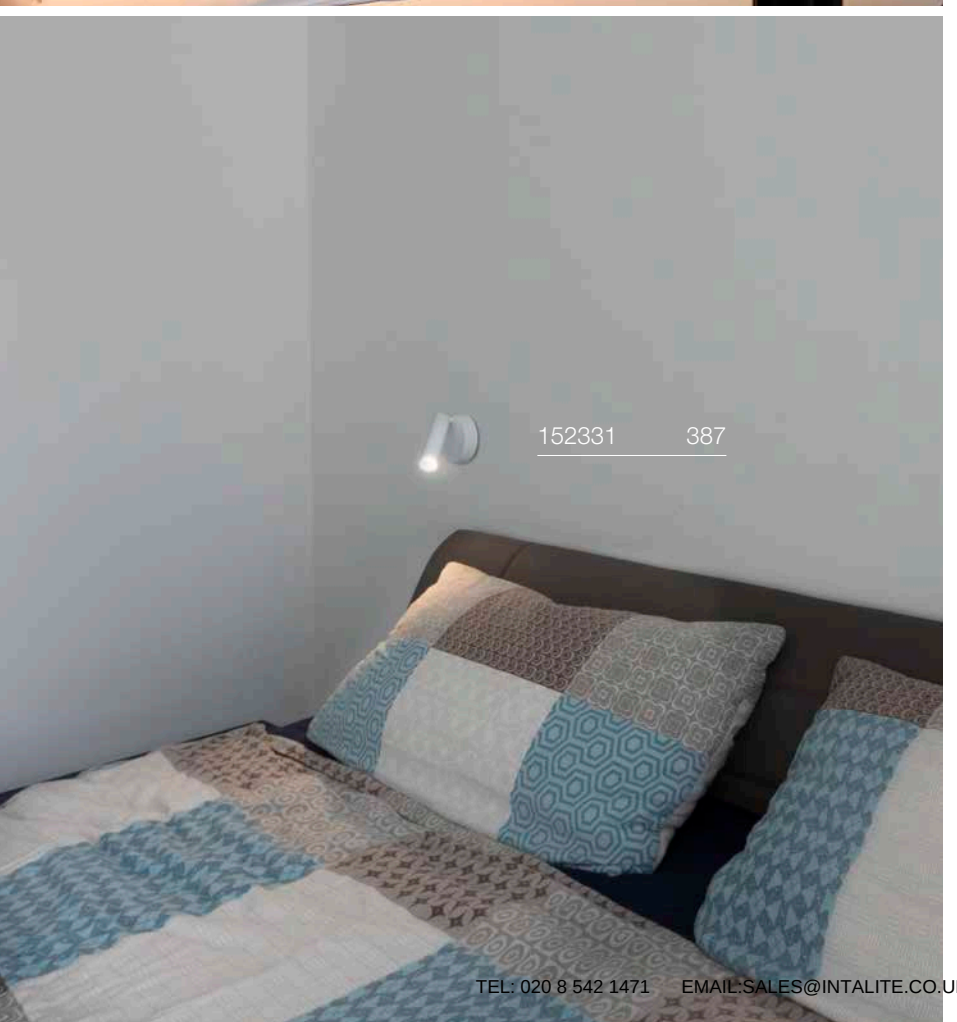

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

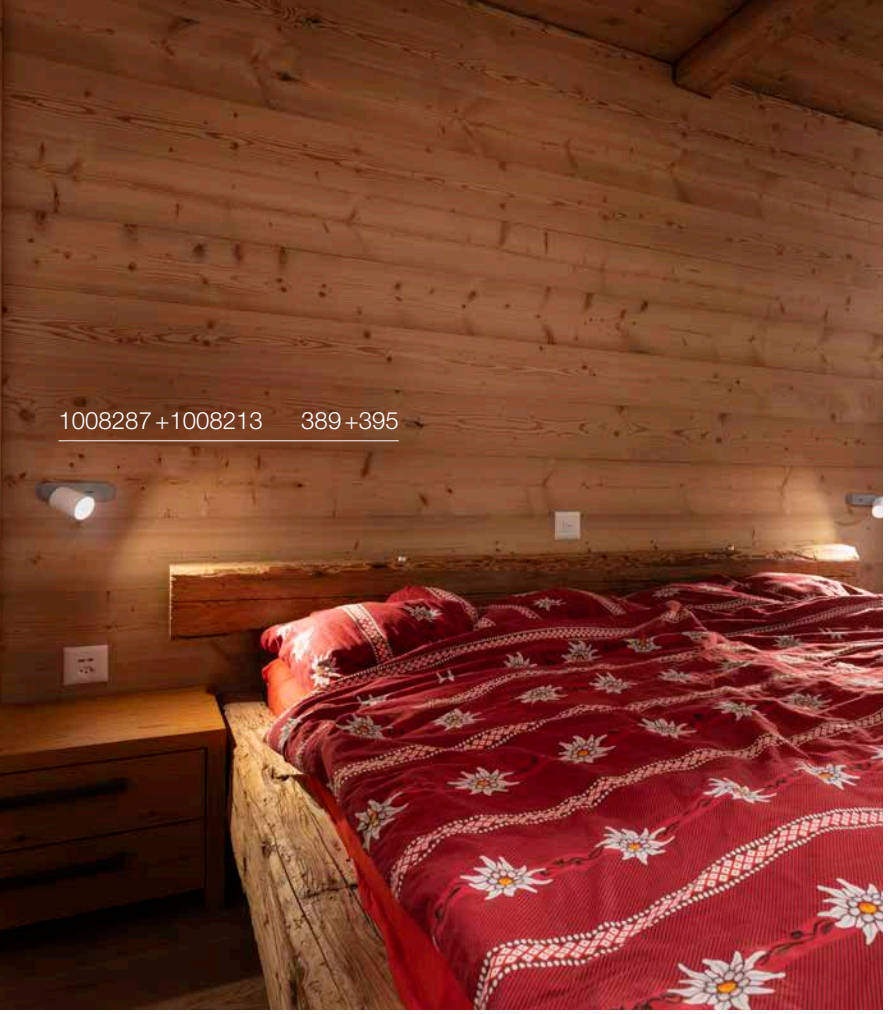

1008287 +1008213 389 +395

PURI 2.0 Tube
CW, QPAR51

IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4xGU10 max. Ø: 5.1 cm | L: 5.5 cm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

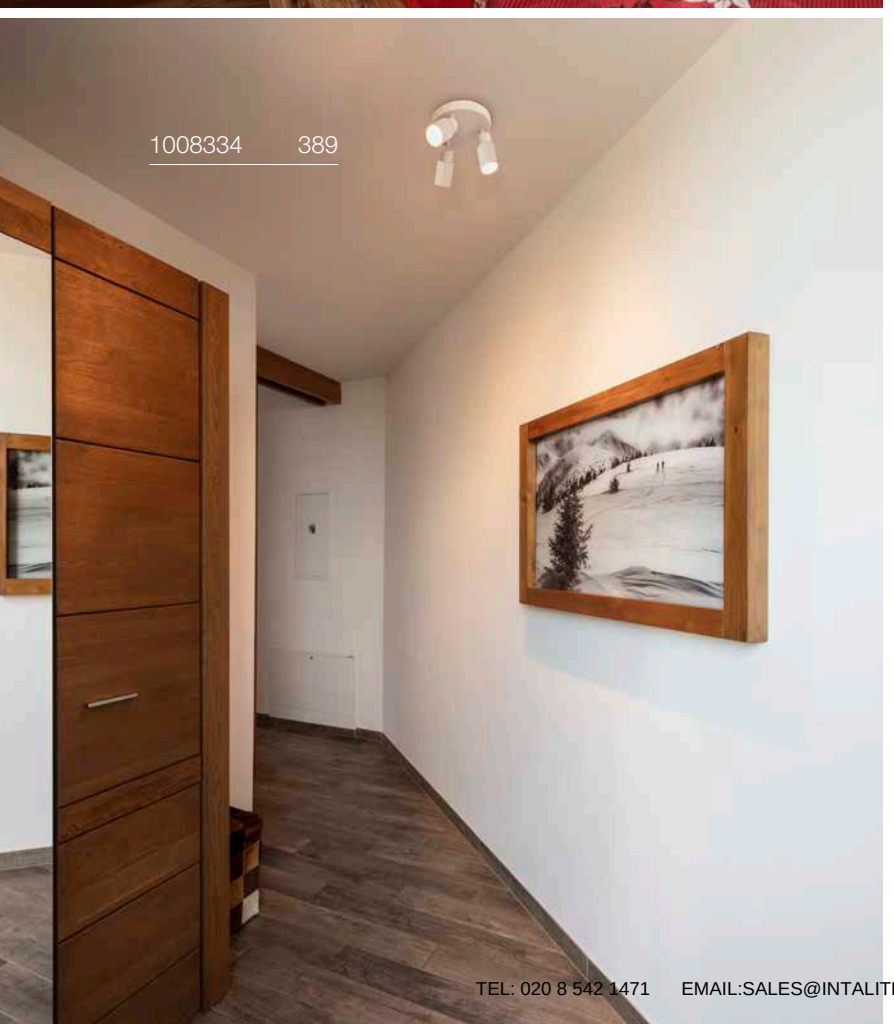

1008334 389

PURI 2.0 Tube
CW, Double Long, QPAR51



Options	Prod. no.	GBP
black	1008361	68.00
black/gold	1008362	68.00
white	1008363	68.00
grey	1008364	68.00

PURI 2.0 Tube
CW, Single, QPAR51



Options	Prod. no.	GBP
black	1008284	39.00
black/gold	1008285	39.00
white	1008286	39.00
grey	1008287	39.00

PURI 2.0 Tube
CW, Switch, Single, QPAR51



Options	Prod. no.	GBP
black	1008296	47.00
black/gold	1008297	47.00
white	1008298	47.00
grey	1008299	47.00

PURI 2.0 Tube
CW, Double Asym., QPAR51



Options	Prod. no.	GBP
black	1008308	81.00
black/gold	1008309	81.00
white	1008310	81.00
grey	1008311	81.00

PURI 2.0 Tube
CW, Triple Long, QPAR51



Options	Prod. no.	GBP
black	1008320	102.00
black/gold	1008321	102.00
white	1008322	102.00
grey	1008323	102.00

PURI 2.0 Tube
CW, Triple Round, QPAR51



Options	Prod. no.	GBP
black	1008332	120.00
black/gold	1008333	120.00
white	1008334	120.00
grey	1008335	120.00

PURI 2.0 Tube
CW, Quadruple Long, QPAR51



Options	Prod. no.	GBP
black	1008344	145.00
black/gold	1008345	145.00
white	1008346	145.00
grey	1008347	145.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PURI 2.0 Cone
CW, QPAR51

IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: **1005077** **7.00 GBP**

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: **1010470** **33.00 GBP**

PURI 2.0 Cone
CW, Double Long, QPAR51



Options	Prod. no.	GBP
black	1008365	68.00
black/gold	1008366	68.00
white	1008367	68.00
grey	1008368	68.00

PURI 2.0 Cone
CW, Single, QPAR51



Options	Prod. no.	GBP
black	1008288	39.00
black/gold	1008289	39.00
white	1008290	39.00
grey	1008291	39.00

PURI 2.0 Cone
CW, Switch, Single, QPAR51



Options	Prod. no.	GBP
black	1008300	47.00
black/gold	1008301	47.00
white	1008302	47.00
grey	1008303	47.00

PURI 2.0 Cone
CW, Double Asym., QPAR51



Options	Prod. no.	GBP
black	1008312	81.00
black/gold	1008313	81.00
white	1008314	81.00
grey	1008315	81.00

PURI 2.0 Cone
CW, Triple Long, QPAR51



Options	Prod. no.	GBP
black	1008324	102.00
black/gold	1008325	102.00
white	1008326	102.00
grey	1008327	102.00

PURI 2.0 Cone
CW, Triple Round, QPAR51



Options	Prod. no.	GBP
black	1008336	120.00
black/gold	1008337	120.00
white	1008338	120.00
grey	1008339	120.00

PURI 2.0 Cone
CW, Quadruple Long, QPAR51



Options	Prod. no.	GBP
black	1008348	145.00
black/gold	1008349	145.00
white	1008350	145.00
grey	1008351	145.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PURI 2.0 Dome
CW, QPAR51

IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4xGU10	max. Ø: 5.1 cm	L: 5.5 cm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: **1005077** **7.00 GBP**

PURI 2.0 Dome
CW, Double Long, QPAR51



Options	Prod. no.	GBP
black	**1008369**	**68.00**
black/gold	**1008370**	**68.00**
white	**1008371**	**68.00**
grey	**1008372**	**68.00**

PURI 2.0 Dome
CW, Single, QPAR51



Options	Prod. no.	GBP
black	1008292	39.00
black/gold	1008293	39.00
white	1008294	39.00
grey	1008295	39.00

PURI 2.0 Dome
CW, Switch, Single, QPAR51



Options	Prod. no.	GBP
black	1008304	47.00
black/gold	1008305	47.00
white	1008306	47.00
grey	1008307	47.00

PURI 2.0 Dome
CW, Double Asym., QPAR51



Options	Prod. no.	GBP
black	1008316	81.00
black/gold	1008317	81.00
white	1008318	81.00
grey	1008319	81.00

PURI 2.0 Dome
CW, Triple Long, QPAR51



Options	Prod. no.	GBP
black	1008328	102.00
black/gold	1008329	102.00
white	1008330	102.00
grey	1008331	102.00

PURI 2.0 Dome
CW, Triple Round, QPAR51



Options	Prod. no.	GBP
black	1008340	120.00
black/gold	1008341	120.00
white	1008342	120.00
grey	1008343	120.00

PURI 2.0 Dome
CW, Quadruple Long, QPAR51



Options	Prod. no.	GBP
black	1008352	145.00
black/gold	1008353	145.00
white	1008354	145.00
grey	1008355	145.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

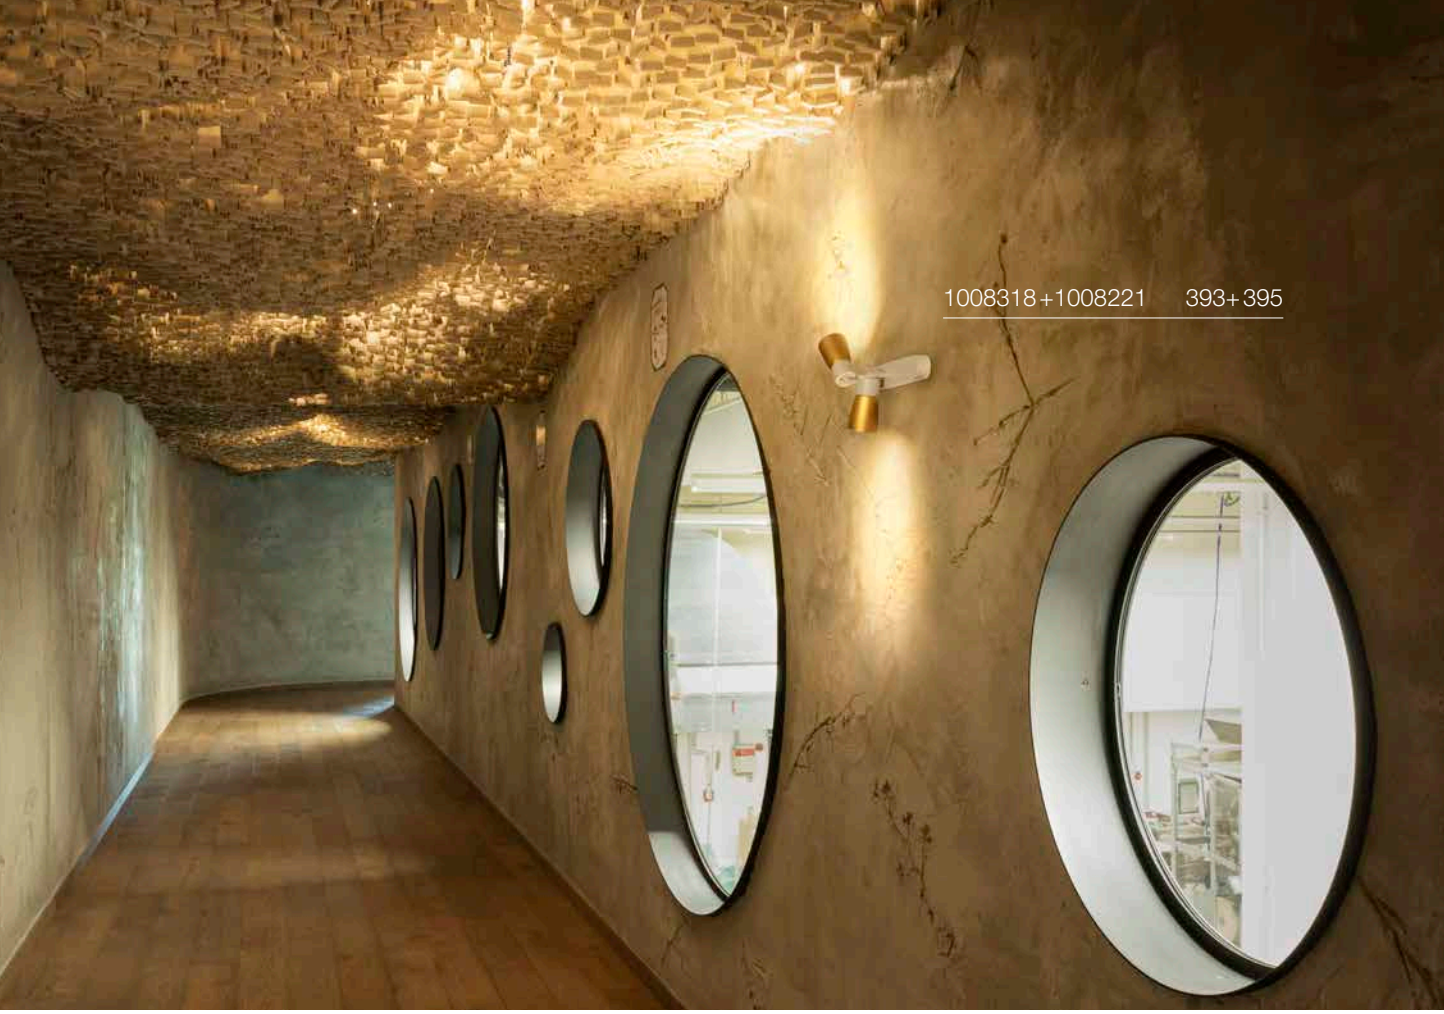

1008318+1008221 393+395

1008354+1008219 393+395

1008354+1008219 393+395

PURI 2.0 Tube
Shade

Ø: 5.5 cm
H: 6.5 cm
Material: aluminium

Options	Prod. no.	GBP
black	1008214	8.00
white	1008213	8.00
gold	1008216	8.00
grey	1008215	8.00
bronze	1008217	8.00
aluminium	1008376	8.00

PURI 2.0 Cone
Shade

Ø: 5.5 cm
H: 6.5 cm
Material: aluminium

Options	Prod. no.	GBP
black	1008219	8.00
white	1008218	8.00
gold	1008221	8.00
grey	1008220	8.00
bronze	1008222	8.00
aluminium	1008377	8.00

PURI 2.0 Dome
Shade

Ø: 5.5 cm
H: 6.5 cm
Material: aluminium

Options	Prod. no.	GBP
black	1008224	8.00
white	1008223	8.00
gold	1008226	8.00
grey	1008225	8.00
bronze	1008227	8.00
aluminium	1008378	8.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

147380 397

PURI
CW, QPAR51

IP20 350° 85°

220-240 V ~50/60 Hz
Material: aluminium/steel

• Decorative ring included

SOCKET INSIDE 50 W

Base: 1-4xGU10

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000h

Prod. no.: **1005273** **9.00 GBP**

PURI
CW, single, QPAR51



Options	Prod. no.	GBP
● black	**147360**	**34.00**
○ white	**147361**	**34.00**

PURI
CW, double, QPAR51



Options	Prod. no.	GBP
● black	**147370**	**68.00**
○ white	**147371**	**68.00**

PURI
CW, triple, QPAR51



Options	Prod. no.	GBP
● black	**147380**	**94.00**
○ white	**147381**	**94.00**

PURI
CW, quad, QPAR51



Options	Prod. no.	GBP
● black	**1002029**	**136.00**
○ white	**1002030**	**137.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NOBLO®
CW, single, PHASE, DTW



220-240 V ~50/60 Hz | 350 mA
Total wattage: 8 W
Material: aluminium/steel

LED INSIDE CRI 90

Down 10 lm|2000 K – 450 lm|3000 K

Options	Prod. no.	GBP
● black	1008706	102.00
○ white	1008703	102.00

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	5.00
○ white	1008483	5.00
● gold	1008484	5.00
● grey	1008485	5.00
● bronze	1008486	5.00
● copper	1008487	5.00

NOBLO®
CW, double, PHASE, DTW



220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium/steel

LED INSIDE CRI 90

Down 10 lm|2000 K – 940 lm|3000 K

Options	Prod. no.	GBP
● black	1008707	163.00
○ white	1008704	163.00

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	5.00
○ white	1008483	5.00
● gold	1008484	5.00
● grey	1008485	5.00
● bronze	1008486	5.00
● copper	1008487	5.00

NOBLO®
CW, triple, PHASE, DTW



220-240 V ~50/60 Hz | 350 mA
Total wattage: 22 W
Material: aluminium/steel

LED INSIDE CRI 90

Down 10 lm|2000 K – 1360 lm|3000 K

Options	Prod. no.	GBP
● black	1008708	240.00
○ white	1008705	240.00

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	5.00
○ white	1008483	5.00
● gold	1008484	5.00
● grey	1008485	5.00
● bronze	1008486	5.00
● copper	1008487	5.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008711 401

NOBLO®
CW, single, PHASE



C IP20 32° 355° 90° 50000h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: aluminium/steel

LED INSIDE CRI 90

Down	740 lm	2700 K
	750 lm	3000 K

Options	Prod. no.	GBP
● black 3000 K	1008712	102.00
● black 2700 K	1008718	102.00
○ white 3000 K	1008709	102.00
○ white 2700 K	1008715	102.00

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	5.00
○ white	1008483	5.00
● gold	1008484	5.00
● grey	1008485	5.00
● bronze	1008486	5.00
● copper	1008487	5.00

NOBLO®
CW, double, PHASE



C,L IP20 32° 355° 90° 50000h L80B10

220-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: aluminium/steel

LED INSIDE CRI 90

Down	1450 lm	2700 K
	1460 lm	3000 K

Options	Prod. no.	GBP
● black 3000 K	1008713	163.00
● black 2700 K	1008719	163.00
○ white 3000 K	1008710	163.00
○ white 2700 K	1008716	163.00

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	5.00
○ white	1008483	5.00
● gold	1008484	5.00
● grey	1008485	5.00
● bronze	1008486	5.00
● copper	1008487	5.00

NOBLO®
CW, triple, PHASE



C,L IP20 32° 355° 90° 50000h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

LED INSIDE CRI 90

Down	2350 lm	2700 K
	2360 lm	3000 K

Options	Prod. no.	GBP
● black 3000 K	1008714	240.00
● black 2700 K	1008720	240.00
○ white 3000 K	1008711	240.00
○ white 2700 K	1008717	240.00

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	5.00
○ white	1008483	5.00
● gold	1008484	5.00
● grey	1008485	5.00
● bronze	1008486	5.00
● copper	1008487	5.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

KALU 2.0
CW, PHASE

NEW



IP20 IK02 36° 270° 90° 50 000 h L90B10 UGR 19

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium

LED INSIDE CRI 90

1400 lm | 2700 K | 1450 lm | 3000 K

Options	Prod. no.	GBP
● black 2700 K	1010258	101.00
● black 3000 K	1010261	101.00
○ white 2700 K	1010260	101.00
○ white 3000 K	1010263	101.00

⊕

Product	Prod. no.	GBP
Decorative ring		
○ white	1010135	8.00
● black	1010136	8.00
● gold	1010138	8.00
● copper	1010139	8.00
Lens		
○ transparent, 15°	1010140	16.00
○ transparent, 24°	1010141	16.00
○ transparent, 36°	1010142	16.00
○ transparent, 60°	1010143	16.00

KALU 2.0
CW, PHASE

NEW



IP20 IK02 36° 270° 90° 50 000 h L90B10 UGR 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium

LED INSIDE CRI 90

2x 1350 lm | 2700 K | 1400 lm | 3000 K

Options	Prod. no.	GBP
● black 2700 K	1010264	178.00
● black 3000 K	1010267	178.00
○ white 2700 K	1010266	178.00
○ white 3000 K	1010269	178.00

⊕

Product	Prod. no.	GBP
Decorative ring		
○ white	1010135	8.00
● black	1010136	8.00
● gold	1010138	8.00
● copper	1010139	8.00
Lens		
○ transparent, 15°	1010140	16.00
○ transparent, 24°	1010141	16.00
○ transparent, 36°	1010142	16.00
○ transparent, 60°	1010143	16.00

KALU 2.0
CW, PHASE

NEW



IP20 IK02 270° 90° L90B10 UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 28 W
Material: aluminium

LED INSIDE CRI 90

3x 1350 lm | 2700 K | 1400 lm | 3000 K

Options	Prod. no.	GBP
● black 2700 K	1010270	254.00
● black 3000 K	1010273	254.00
○ white 2700 K	1010272	254.00
○ white 3000 K	1010275	254.00

⊕

Product	Prod. no.	GBP
Decorative ring		
○ white	1010135	8.00
● black	1010136	8.00
● gold	1010138	8.00
● copper	1010139	8.00
Lens		
○ transparent, 15°	1010140	16.00
○ transparent, 24°	1010141	16.00
○ transparent, 36°	1010142	16.00
○ transparent, 60°	1010143	16.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007591 405

PANTILO ROPE 19
CW, E27



IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 10 cm | L: 11 cm

Options	Prod. no.	GBP
gold	**1007592**	**137.00**
silver	**1007593**	**137.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005303 9.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

PANTILO ROPE 27
CW, E27



IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 15 cm | L: 11 cm

Options	Prod. no.	GBP
gold	**1007591**	**171.00**
silver	**1007590**	**171.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005303 9.00 GBP

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: 1010486 24.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CYFT WAVE
CW, PHASE



220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium/acrylic

- Suitable for outdoor use

240 lm / 230 lm	2700 K	260 lm / 250 lm	3000 K	280 lm / 250 lm	4000 K

Options	Prod. no.	GBP
● black 240 lm	**1008024**	**170.00**
● black 230 lm	**1008941**	**169.00**

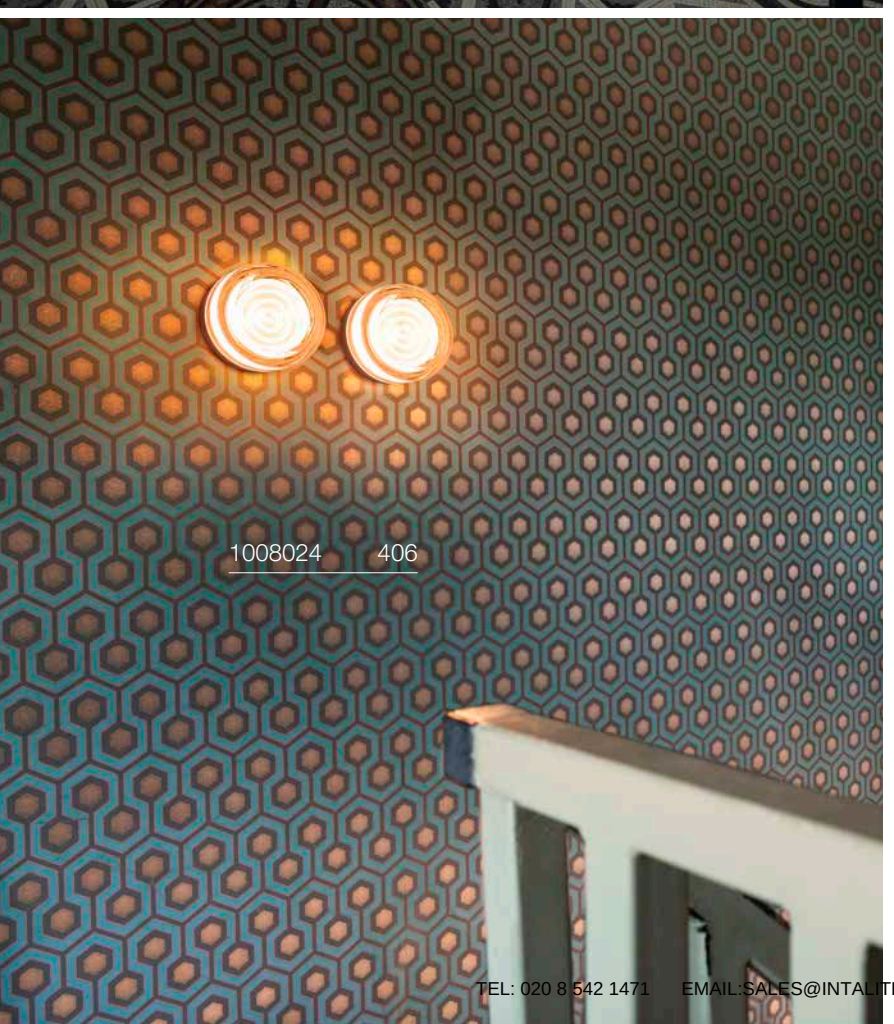

CYFT
CW, PHASE



IP44 IK05 50000h L70B50 UGR 22 200

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium/acrylic

INSIDE CRI 90

330 lm | 2700 K	350 lm | 3000 K	380 lm | 4000 K

Options	Prod. no.	GBP
● black	1007608	171.00

CYFT DOME
CW, PHASE

NEW



C IP65 IK02 50000h L70B50 200

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium/glass

• Suitable for outdoor use

INSIDE

290 lm | 2700 K	310 lm | 3000 K	310 lm | 4000 K

Options	Prod. no.	GBP
● black/opaque	1008944 ●	169.00

CYFT
Decorative ring

Ø: 13.1 cm
H: 2.45 cm
Material: steel

• Grate ring suitable for outdoor use

Options	Prod. no.	GBP
○ white	1007611	15.00
● brass	1007610	26.00
◑ chrome	1007609	21.00
● bronze	1008025	25.00
● rust	1008943 ●	25.00
● nickel	1008026	22.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

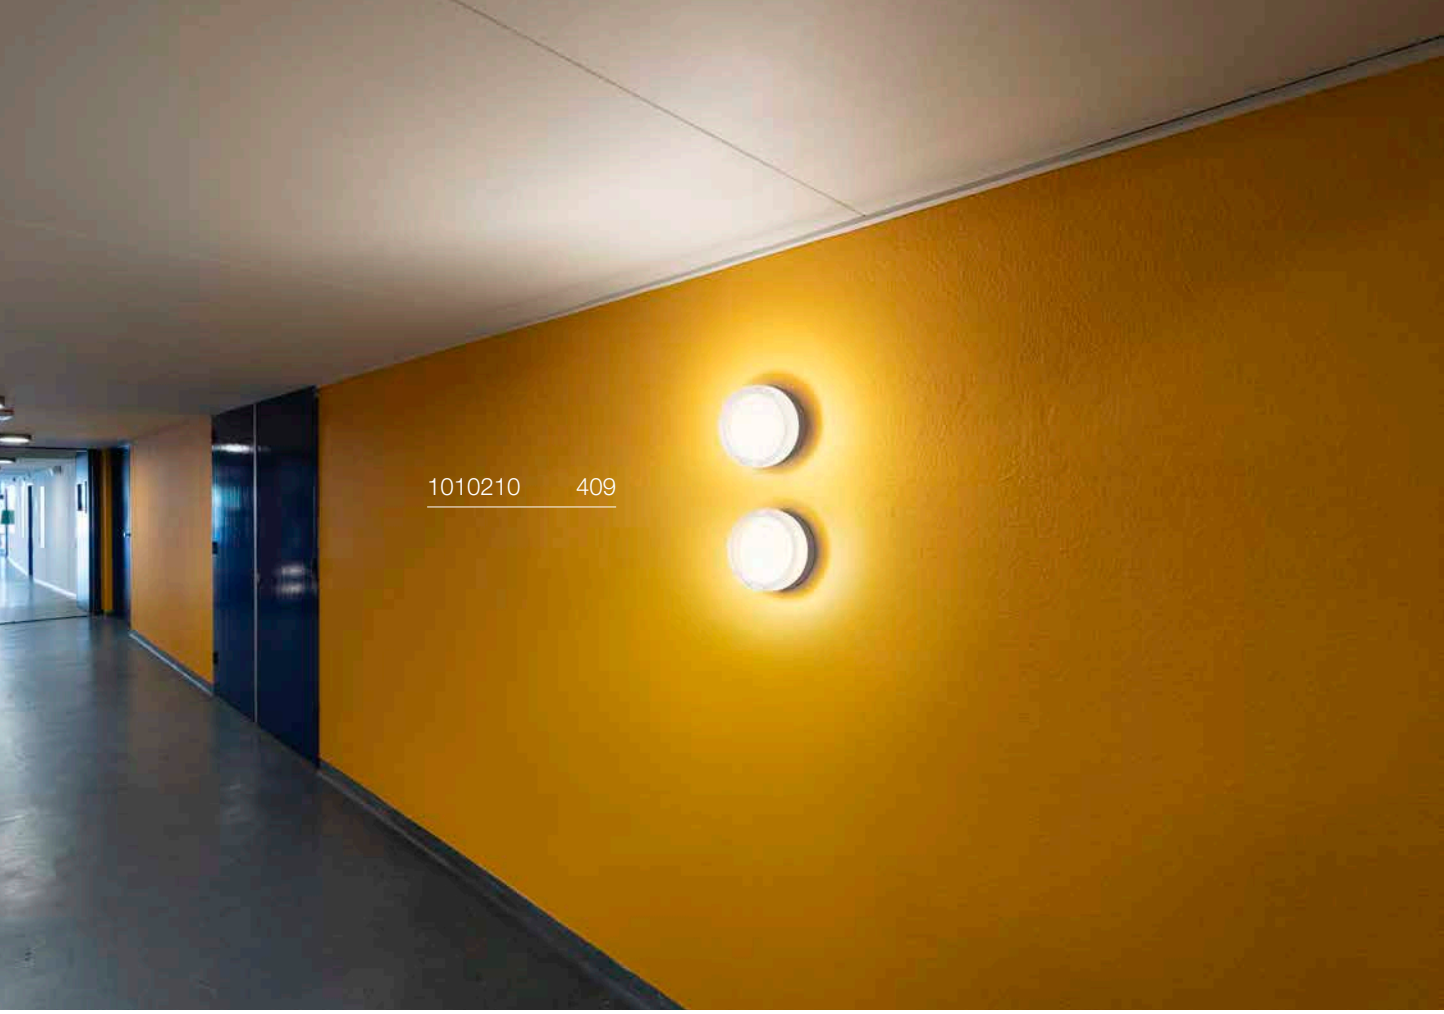
1010210 409

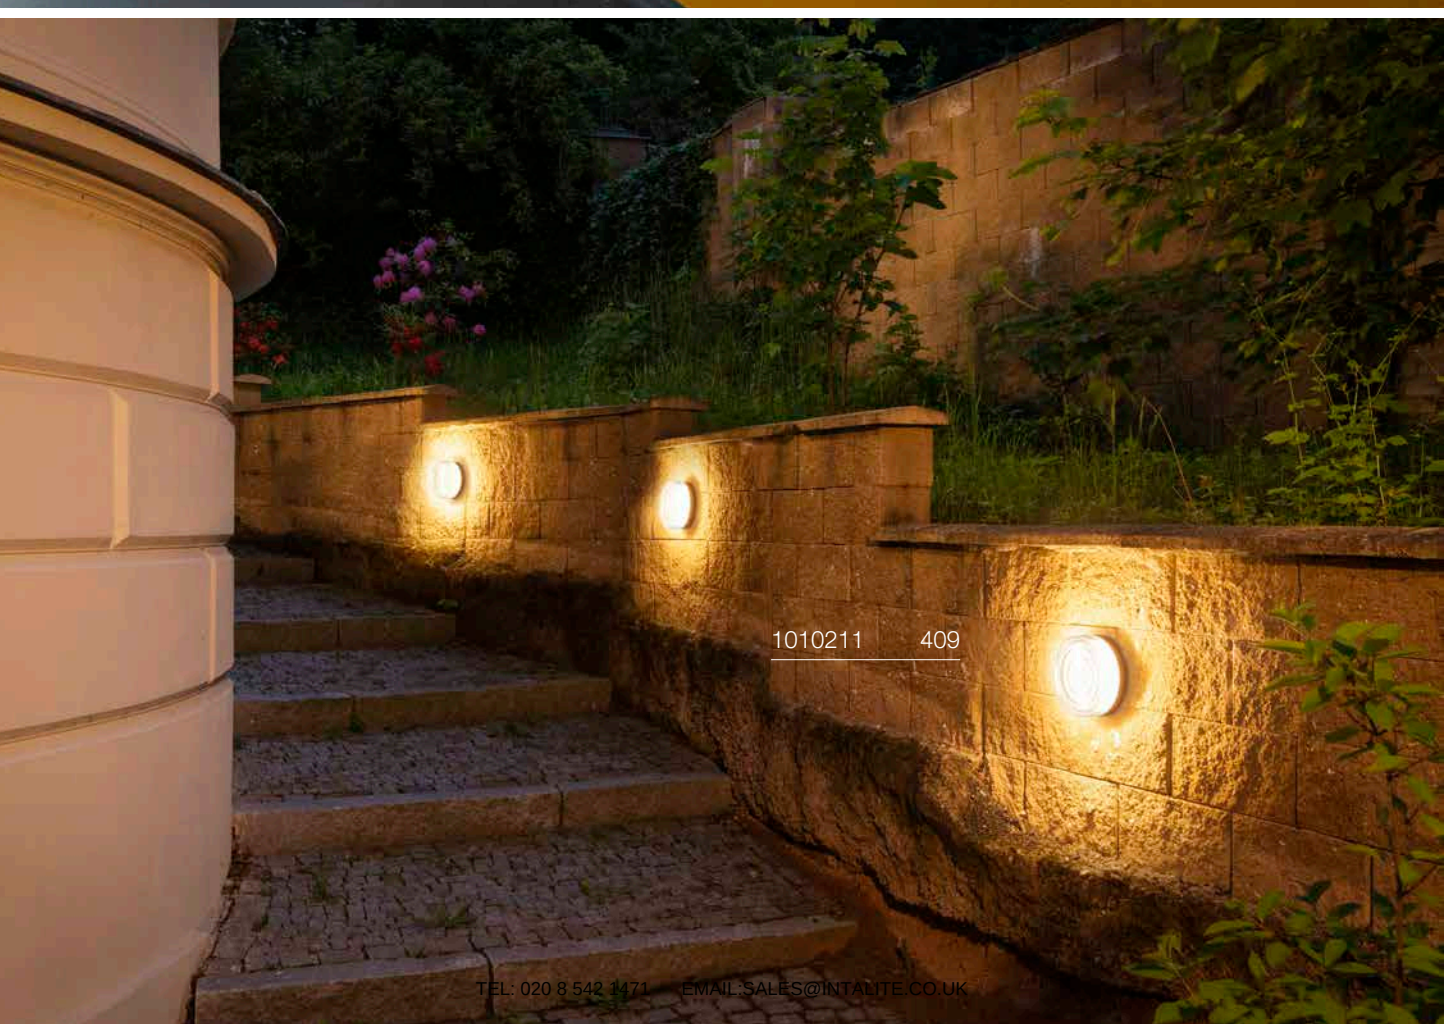
1010211 409

CYFT XL
CW, PHASE



IP65 IK05 L70B50 50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium/glass

• Suitable for outdoor use

INSIDE

810 lm | 2700 K	920 lm | 3000 K	930 lm | 4000 K

Options	Prod. no.	GBP
● black	1010210	212.00

CYFT WAVE XL
CW, PHASE



IP65 IK05 L70B50 50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium/glass

• Suitable for outdoor use

INSIDE

850 lm | 2700 K	950 lm | 3000 K	960 lm | 4000 K

Options	Prod. no.	GBP
● black	1010211	212.00

CYFT XL
Decorative ring

Ø: 20 cm
H: 2.4 cm
Material: aluminium

• Grate ring suitable for outdoor use

Options	Prod. no.	GBP
rust	1010212	33.00
white	1010213	33.00
brass	1010214	33.00
chrome	1010215	33.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

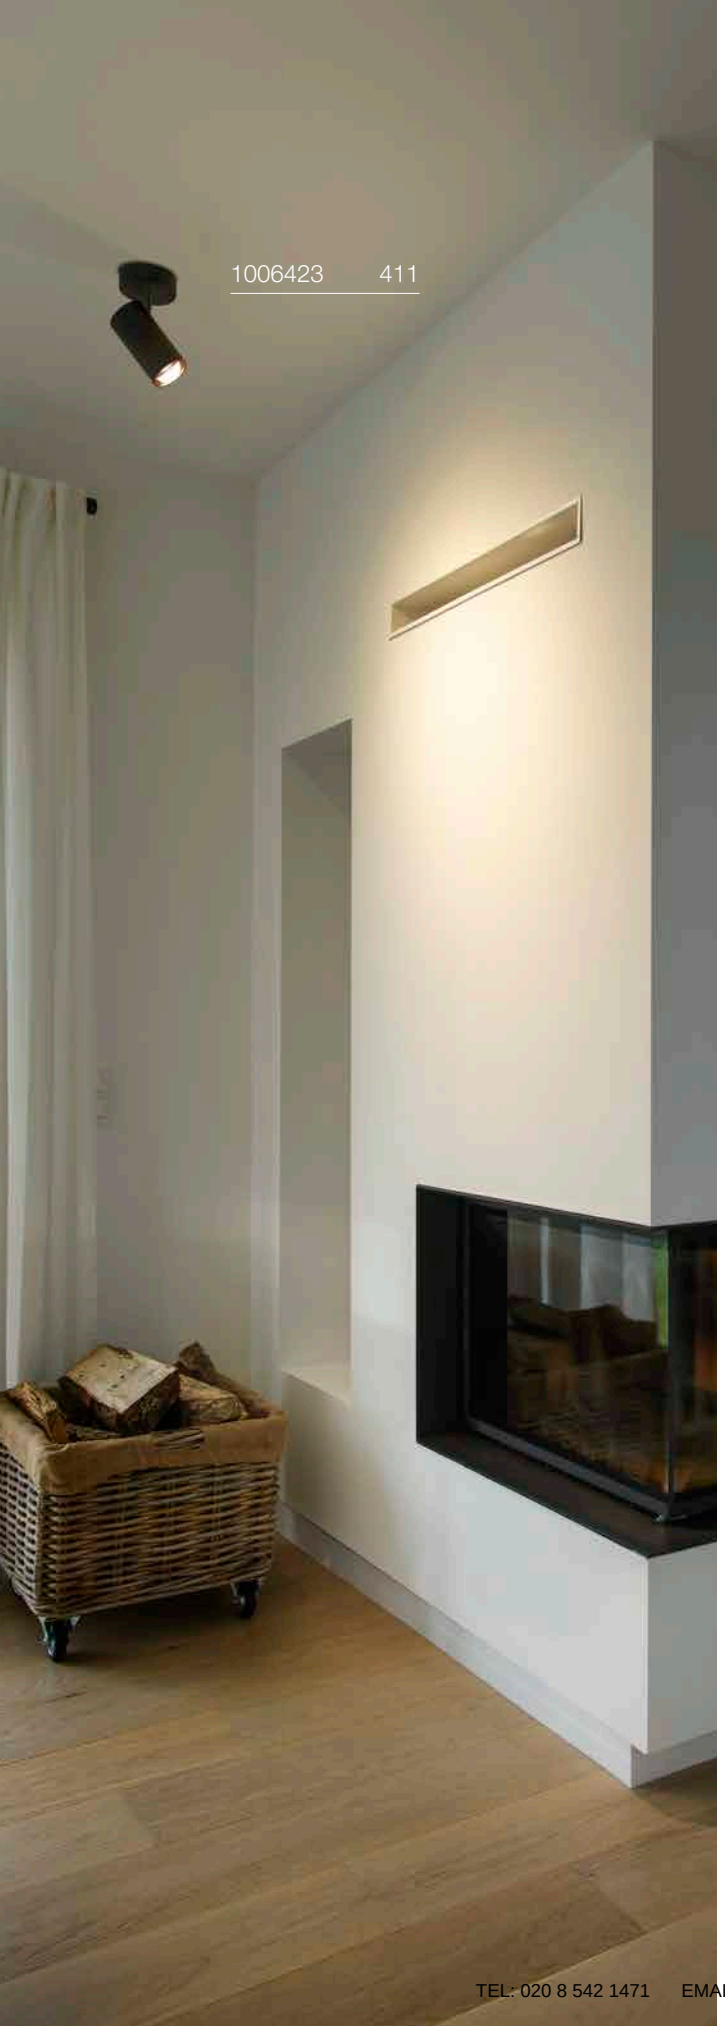

1006423 411

1006428 411

ASTO TUBE
CW, GU10

IP20 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

• Decorative rings available as accessories

SOCKET INSIDE 10 W

Base: 1-4xGU10

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: **1005077** **7.00 GBP**

ASTO TUBE
CW, single, GU10



Options	Prod. no.	GBP
● black	**1006423**	**43.00**
○ white	**1006424**	**43.00**

ASTO TUBE
CW, double, GU10



Options	Prod. no.	GBP
● black	**1006425**	**82.00**
○ white	**1006426**	**82.00**

ASTO TUBE
Decorative reflector

Ø: 6.8 cm
H: 3.95 cm
Material: polycarbonate (PC)

Options	Prod. no.	GBP
black/chrome	**1007190**	**4.00**
gold	**1006450**	**4.00**
chrome	**1006449**	**4.00**
copper	**1006451**	**4.00**

ASTO TUBE
CW, triple, GU10



Options	Prod. no.	GBP
● black	**1006427**	**116.00**
○ white	**1006428**	**116.00**

ASTO TUBE
CW, quadruple, GU10



Options	Prod. no.	GBP
● black	**1006429**	**142.00**
○ white	**1006430**	**142.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

007

KALU
CW, QPAR111

IP20 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 75 W

Base: 1-4xGU10

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G
12 kW/1000 h

Prod. no.: **1005297** **73.00 GBP**

KALU
CW, single, QPAR111



Options	Prod. no.	GBP
● black	**1000702**	**65.00**
○ white	**147301**	**65.00**
● aluminium	**147306**	**67.00**

KALU
CW, double, QPAR111



Options	Prod. no.	GBP
● black	**1000703**	**128.00**
○ white	**147311**	**128.00**
● aluminium	**147316**	**137.00**

KALU
CW, triple, QPAR111



Options	Prod. no.	GBP
● black	**1000704**	**177.00**
○ white	**147321**	**177.00**
● aluminium	**147326**	**187.00**

KALU
CW, quad, QPAR111



Options	Prod. no.	GBP
● black	**1002023**	**246.00**
○ white	**1002024**	**246.00**
● aluminium	**1002025**	**255.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009100 415

GRIP! FLAT
CL, PHASE

NEW



IP20 L70B50 UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium

LED INSIDE

Down	400 lm | 2700 K	430 lm | 3000 K

Options	Prod. no.	GBP
● black	1009100	212.00
○ white	1009101	212.00

⊕

Product	Prod. no.	GBP
GRIP! FLAT decorative ring		
● black	1009102	27.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

152010 417

ENOLA® B
CW, single, QPAR51



IP20 350° 100°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Decorative ring in light colour included
- Optional black decorative ring available as an accessory

SOCKET INSIDE 50 W

Base: 1xGU10 | L: 6.7 cm

Options	Prod. no.	GBP
● black	**152010**	**63.00**
○ white	**152011**	**63.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

ENOLA® B
CW, double, QPAR51



IP20 350° 100°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Decorative ring in light colour included
- Optional black decorative ring available as an accessory

SOCKET INSIDE 50 W

Base: 2xGU10 | L: 6.7 cm

Options	Prod. no.	GBP
● black	**152020**	**108.00**
○ white	**152021**	**108.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000 h

Prod. no.: 1005273 9.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

ENOLA® B
CW, double, QPAR51



IP20 350° 180°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Decorative ring in light colour included
- Optional black decorative ring available as an accessory

SOCKET INSIDE 50 W

Base: 2xGU10 | L: 8 cm

Options	Prod. no.	GBP
● black	**151830**	**134.00**
○ white	**151831**	**134.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

Product	Prod. no.	GBP
Decorative ring		
● black	**151840**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ALTRA DICE
CW, double, QPAR51



220-240 V ~50/60 Hz
Material: aluminium/steel

Base: 2xGU10

Options	Prod. no.	GBP
○ white	**151531**	**97.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000h

Prod. no.: **1005273** **9.00 GBP**

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: **1010470** **33.00 GBP**

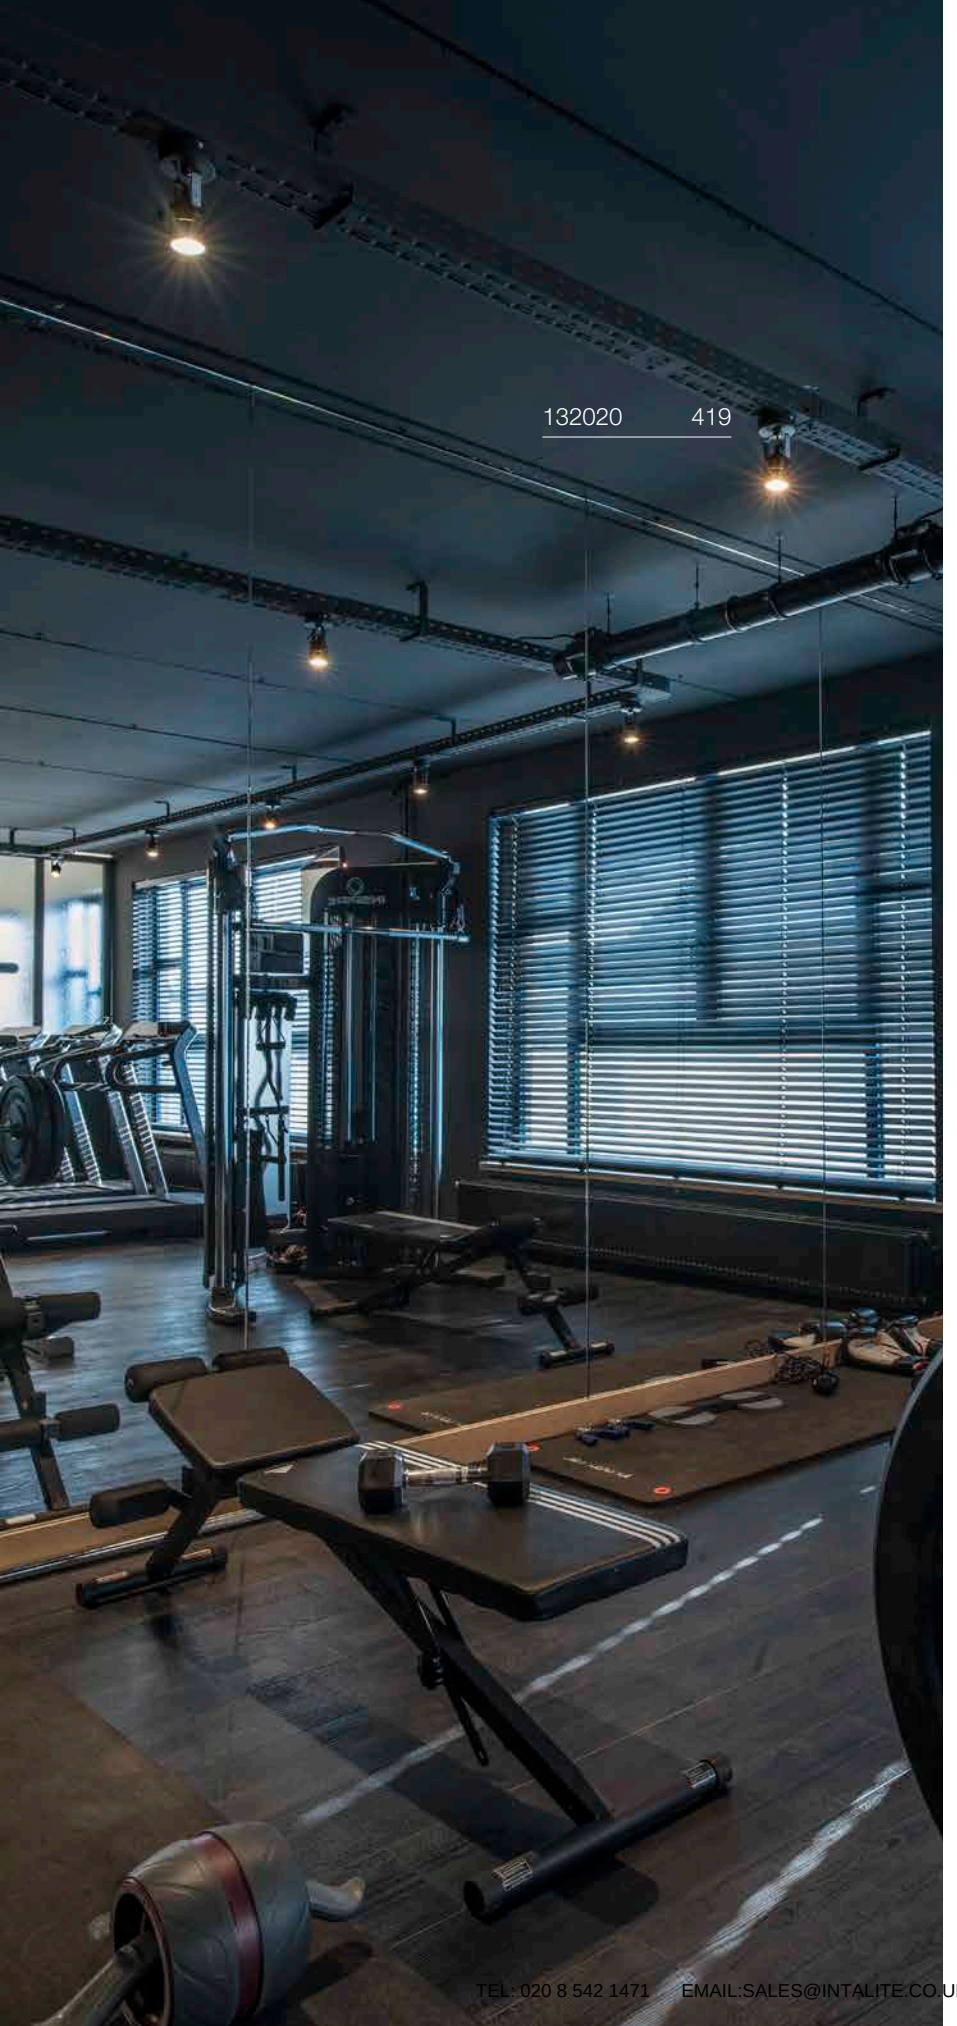

SPOT 79
CW, QPAR51



220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 50 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Options	Prod. no.	GBP
● black	**132020**	**29.00**
○ white	**132021**	**29.00**
● grey	**132024**	**29.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: **1005077** **7.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SENSER 12
CW, square, PHASE



IP20 IK02 110° 48000h L70B50 UGR 29

220-240 V ~50/60 Hz | 200 mA
Total wattage: 8.4 W
Material: aluminium

LED INSIDE CRI 90

460 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1003017**	**64.00**

SENSER 18
CW, square, PHASE



IP20 IK02 110° 48000h L70B50 UGR 27

220-240 V ~50/60 Hz | 350 mA
Total wattage: 13 W
Material: aluminium

LED INSIDE CRI 90

840 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1003018**	**68.00**

SENSER 24
CW, square, PHASE



IP20 IK02 110° 48000h L70B50 UGR 26

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium

LED INSIDE CRI 90

1240 lm | 3000 K | 1140 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	**1003019**	**73.00**
○ white 4000 K	**1004705**	**73.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SENSER 12
CW, round, PHASE



IP20 IK02 110° 48000h L70B50 UGR 30

220-240 V ~50/60 Hz | 200 mA
Total wattage: 8.4 W
Material: aluminium

LED INSIDE CRI 90

460 lm | 3000 K | 470 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	**1003014**	**64.00**
○ white 4000 K	**1004700**	**64.00**

SENSER 18
CW, round, PHASE



IP20 IK02 110° 48000h L70B50 UGR 29

220-240 V ~50/60 Hz | 350 mA
Total wattage: 13 W
Material: aluminium

LED INSIDE CRI 90

830 lm | 3000 K | 990 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	**1003015**	**68.00**
○ white 4000 K	**1004701**	**68.00**

SENSER 24
CW, round, PHASE



IP20 IK02 110° 48000h L70B50 UGR 27

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium

LED INSIDE CRI 90

1140 lm | 3000 K | 1300 lm | 4000 K

Options	Prod. no.	GBP
○ white 3000 K	**1003016**	**73.00**
○ white 4000 K	**1004702**	**73.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MELAN
CW, E27



IP20

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 60 W

Base: 1xE27	max. Ø: 7 cm	L: 16 cm

Options	Prod. no.	GBP
aluminium	**155236**	**105.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: **1005303** **9.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1005088 425

SIMA
CW, square, sensor



IP44 IK02 120° 30000 h L70B50 12

220-240 V ~50/60 Hz | 320 mA
Total wattage: 24 W
Material: polycarbonate (PC)

LED INSIDE CRI 90

2200 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1005088**	**156.00**

SIMA
CW, square, PHASE



C IP44 IK02 120° 30000 h L70B50 12

220-240 V ~50/60 Hz | 320 mA
Total wattage: 24 W
Material: polycarbonate (PC)

LED INSIDE CRI 90

2200 lm | 3000 K

Options	Prod. no.	GBP
○ white	**1005087**	**135.00**

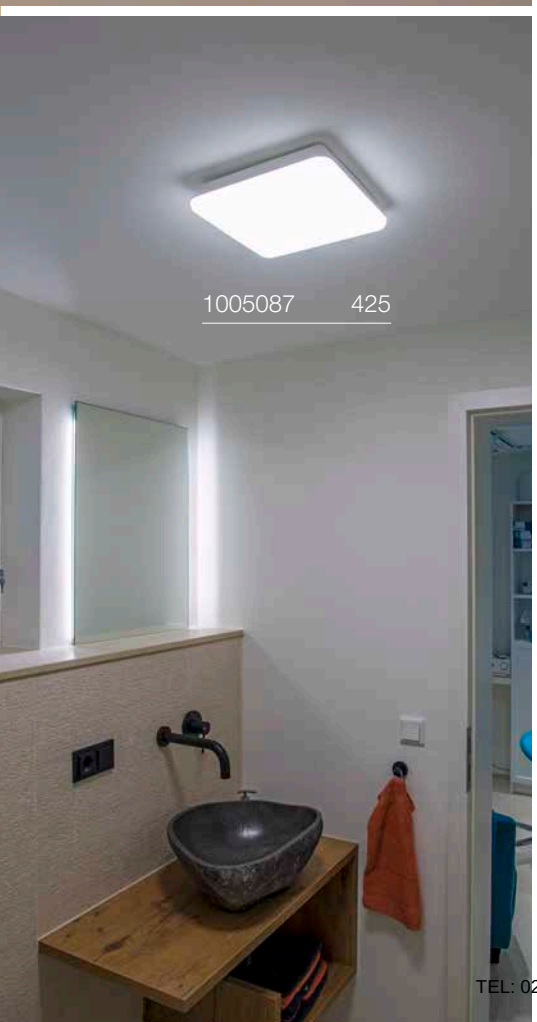

1005087 425

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LIPSY® 30
CW, Dome

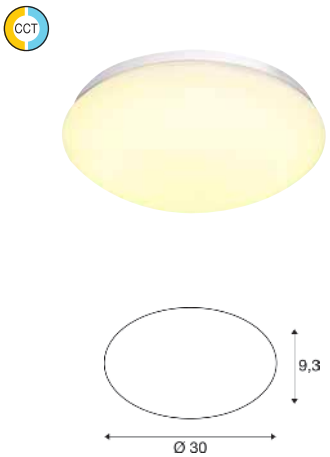

IP44 IK02 120° 50 000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 13.5 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

1550 lm | 3000 K	1600 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1002020**	**78.00**

LIPSY® 40
CW, Dome

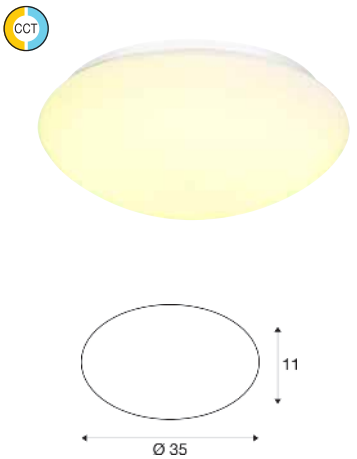

IP44 IK02 120° 50 000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 17.5 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

2050 lm | 3000 K	2200 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1002021**	**97.00**

LIPSY® 50
CW, Dome

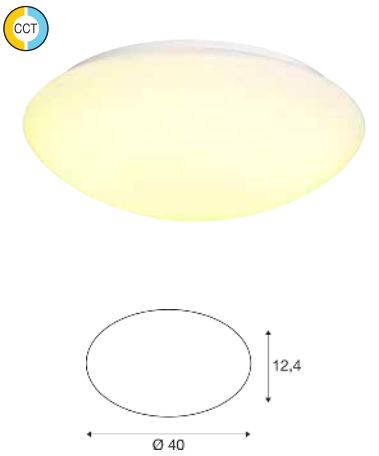

IP44 IK02 120° 50 000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

2500 lm | 3000 K	2700 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1002022**	**105.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LIPSY® 30
CW, Drum

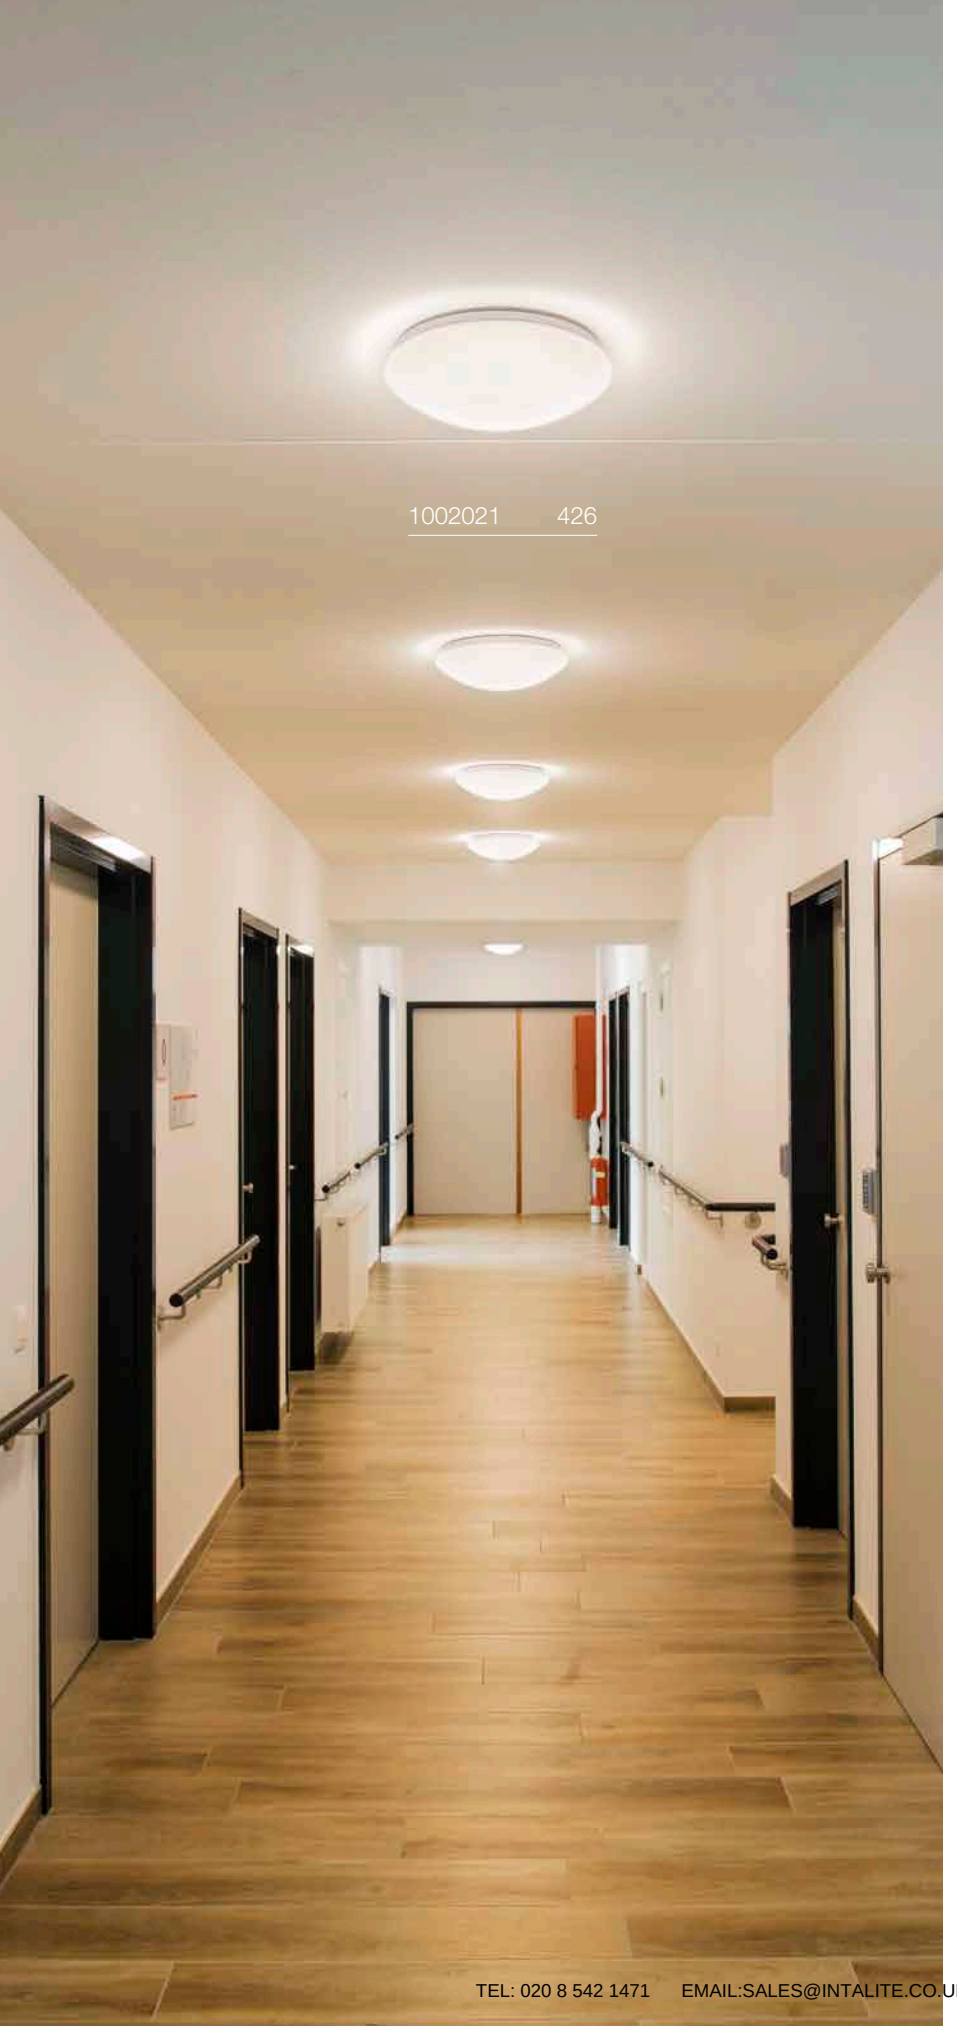



IP44 IK02 120° 50000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 13.5 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

1600 lm | 3000 K	1650 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1002075**	**87.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LIPSY® 40
CW, Drum



IP44 IK02 120° 50000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 17.5 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

2100 lm | 3000 K	2300 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1002076**	**97.00**

LIPSY® 50
CW, Drum



IP44 IK02 120° 50000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

2450 lm | 3000 K	2600 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1002077**	**105.00**

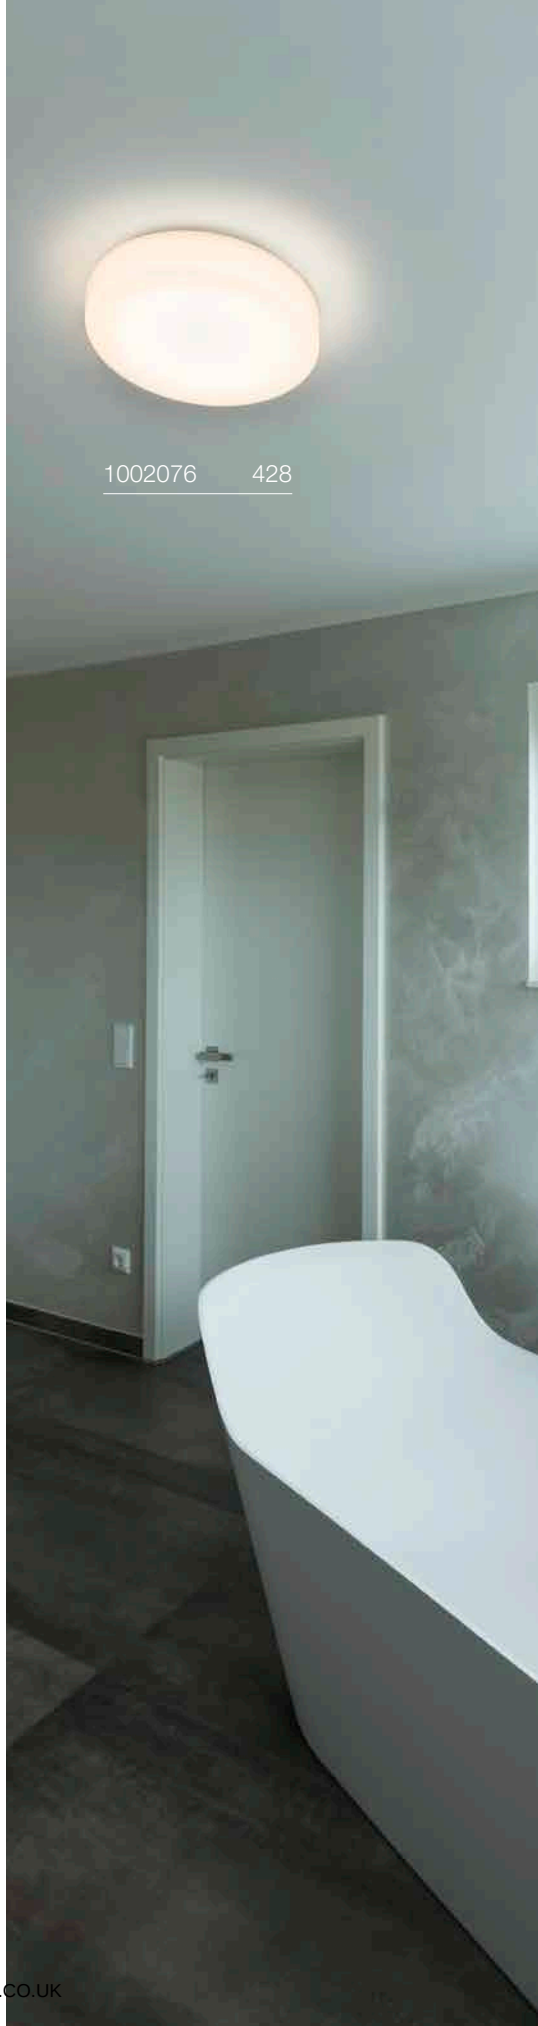

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

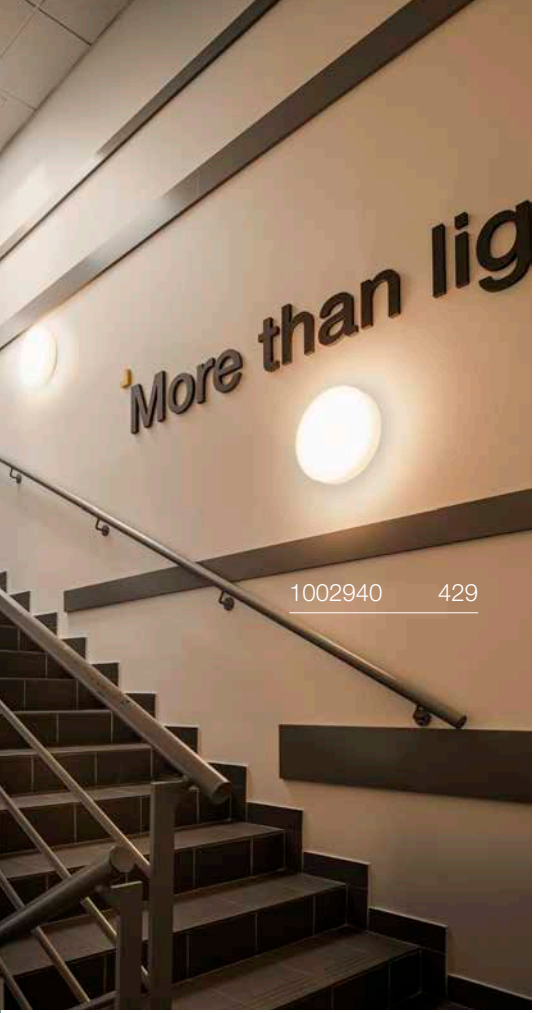

1002940 429

LIPSY® 40
CW, Drum, DALI



Dali IP44 IK02 120° 30000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

2100 lm | 3000 K	2300 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1002940**	**175.00**

LIPSY® 50
CW, Drum, DALI



Dali IP44 IK02 120° 30000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

2450 lm | 3000 K	2600 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1002941**	**184.00**

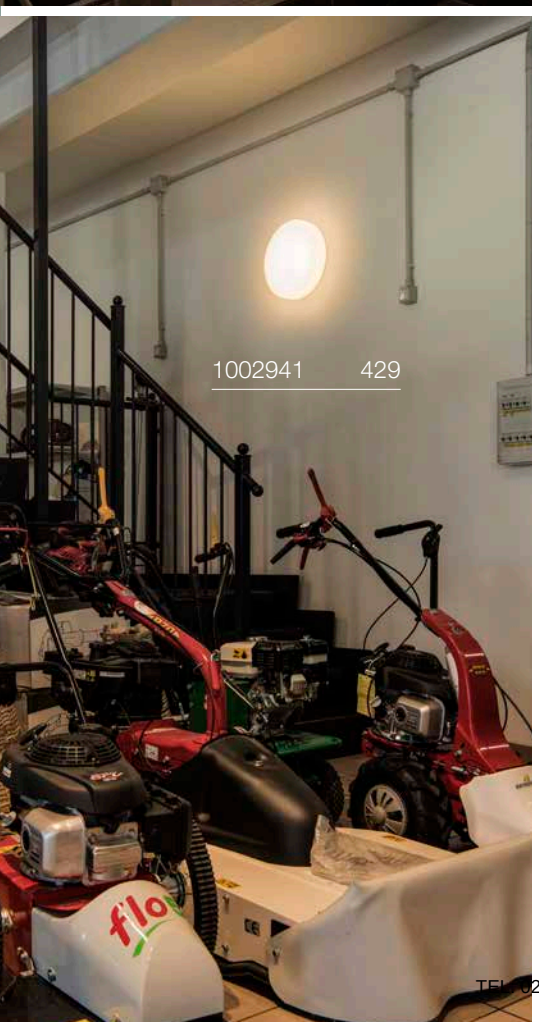

1002941 429

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1001286 431

1006124 431

BATTEN 60
CW

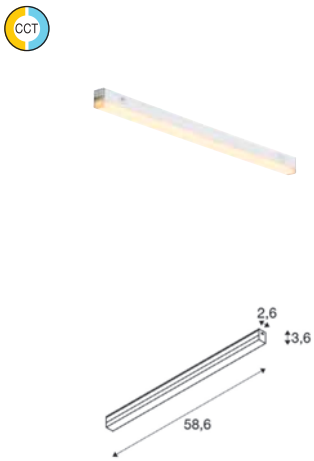

IP20 IK02 30 000 h L70B50 10

220-240 V ~50/60 Hz | 110 mA
Total wattage: 9 W
Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included

LED INSIDE CRI 90

940 lm|3000 K | 980 lm|4000 K

Options	Prod. no.	GBP
○ white	**1006123**	**46.00**

Product	Prod. no.	GBP
Feed-in		
○ white	**1006125**	**9.00**
Mounting brackets		
○ white	**1006126**	**2.00**
Connector		
○ white	**1006127**	**5.00**
Direct connector		
○ white	**1006128**	**3.00**

BATTEN 120
CW

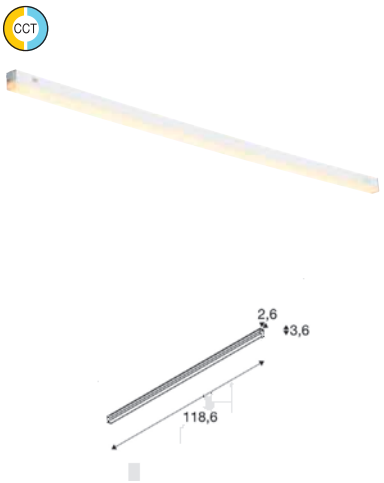

IP20 IK02 30 000 h L70B50 5

220-240 V ~50/60 Hz | 220 mA
Total wattage: 18 W
Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included

LED INSIDE CRI 90

1900 lm|3000 K | 1960 lm|4000 K

Options	Prod. no.	GBP
○ white	**1006124**	**57.00**

Product	Prod. no.	GBP
Feed-in		
○ white	**1006125**	**9.00**
Mounting brackets		
○ white	**1006126**	**2.00**
Connector		
○ white	**1006127**	**5.00**
Direct connector		
○ white	**1006128**	**3.00**

SIGHT 115
CW

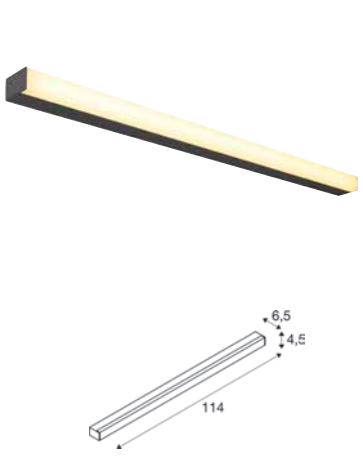

IP20 IK02 120° 30 000 h L70B50 UGR 28

220-240 V ~50/60 Hz | 700 mA
Total wattage: 38 W
Material: aluminium/acrylic

LED INSIDE CRI 80

3100 lm|3000 K

Options	Prod. no.	GBP
● black	**1001286**	**278.00**
○ white	**1001287**	**278.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SOCKET

WUD TL | 435

SOCKET

VARYT | 436–437

LED

QUIMERA | 439

LED

ONE STRAIGHT | 441

LED

ONE BOW | 441

LED

VINOLINA ONE | 443

LED

VINOLINA | 443

LED

VINOLINA TWO | 445

LED

TAHA | 447

SOCKET

SUN | 449

SOCKET

TINY SUN | 451

SOCKET

PANTILO | 453–455



SOCKET

PANTILO | 453

SOCKET

PANTILO ROPE | 454–455

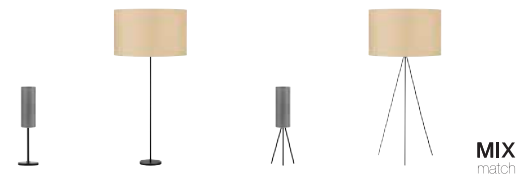

SOCKET

FENDA | 457–459

LED

KARPO | 460

SOCKET

PHELIA | 461

LED

WORKLIGHT EASY | 463

LED

WORKLIGHT PRO | 463

LED

WORKLIGHT | 465

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010402 435

WUD
TL, E27, cylindrical

NEW



IP20 IK02

220-240 V ~50/60 Hz
Material: wood

- Natural material
- Euro plug and switch

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 12 cm | L: 18 cm

Options	Prod. no.	GBP
beige	1010402	118.00

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F
6 kWh/1000 h

Prod. no.: **1008152** **55.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

VARYT
TL, E14



IP20 IK02 200

220-240 V ~50/60 Hz
Material: aluminium

• Euro plug with switch in the supply cable

SOCKET INSIDE 6 W

Base: 1xE14 | max. Ø: 3.8 cm | L: 11 cm

Options	Prod. no.	GBP
black	**1008743**	**77.00**
white	**1008744**	**77.00**
brass	**1008746**	**102.00**
chrome	**1008745**	**85.00**
copper	**1008747**	**102.00**

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F
5 kWh/1000 h

Prod. no.: 1005284 6.00 GBP

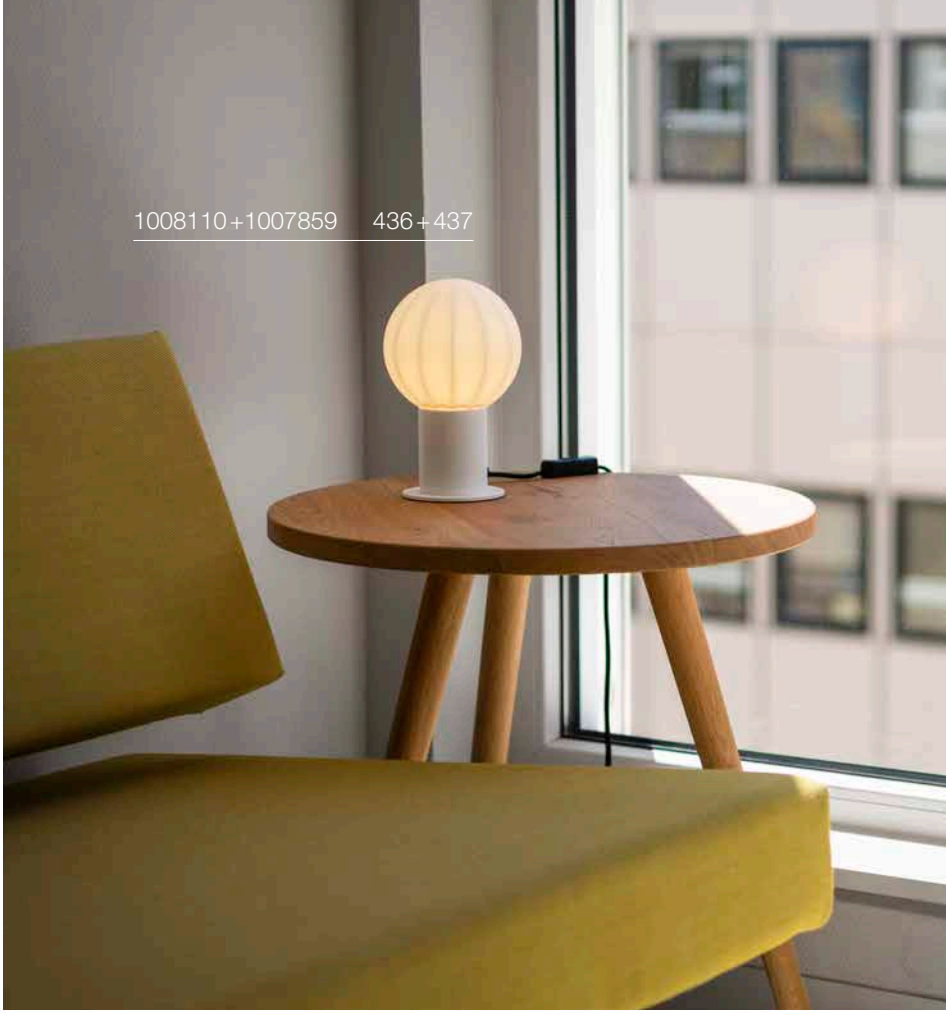

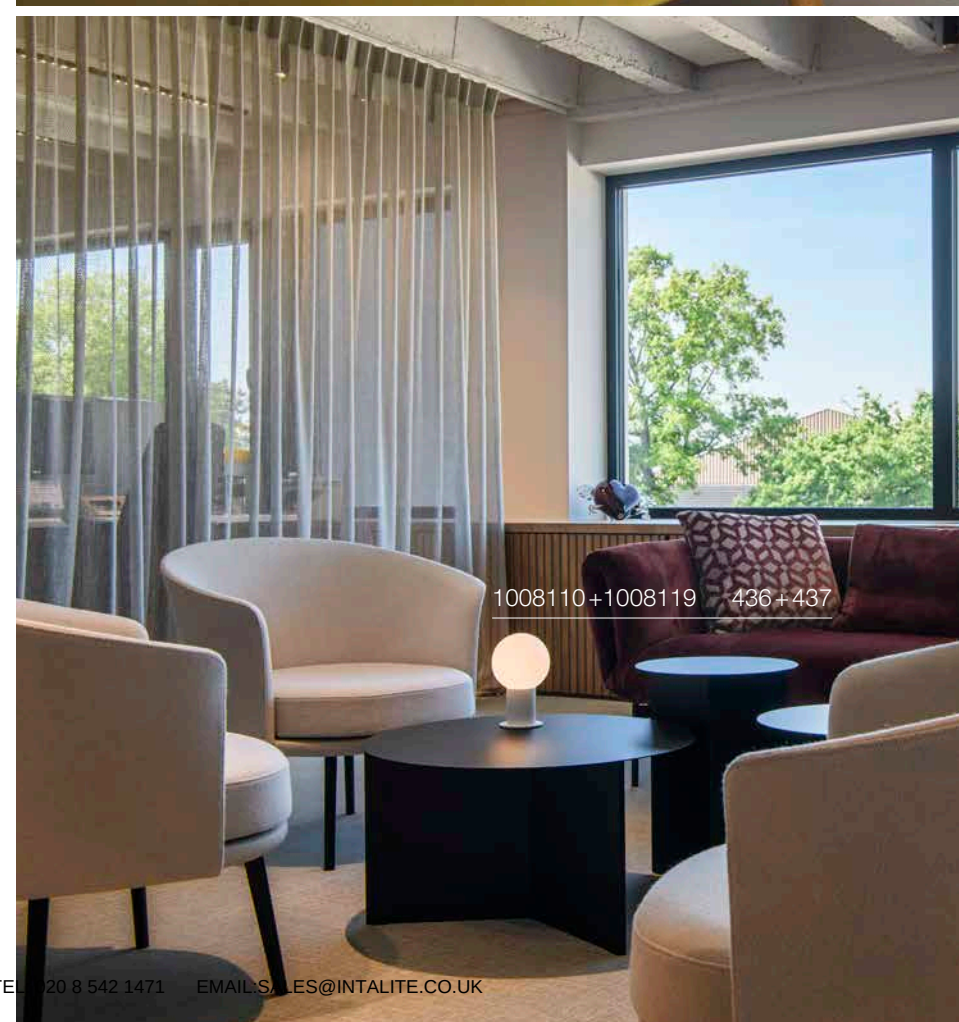

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

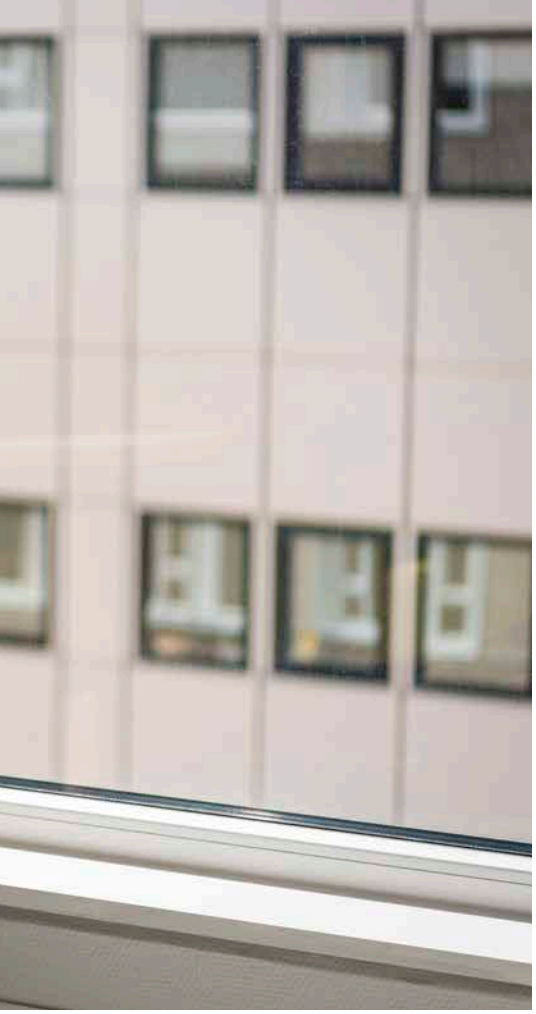

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 11.5 cm
H: 13.5 cm
Material: glass

Options	Prod. no.	GBP
○ white	1007860	64.00

VARYT
Glass shade for PD, WL, CL, TL

IK02

Ø: 12 cm
H: 13 cm
Material: glass

Options	Prod. no.	GBP
○ white	1007859	59.00

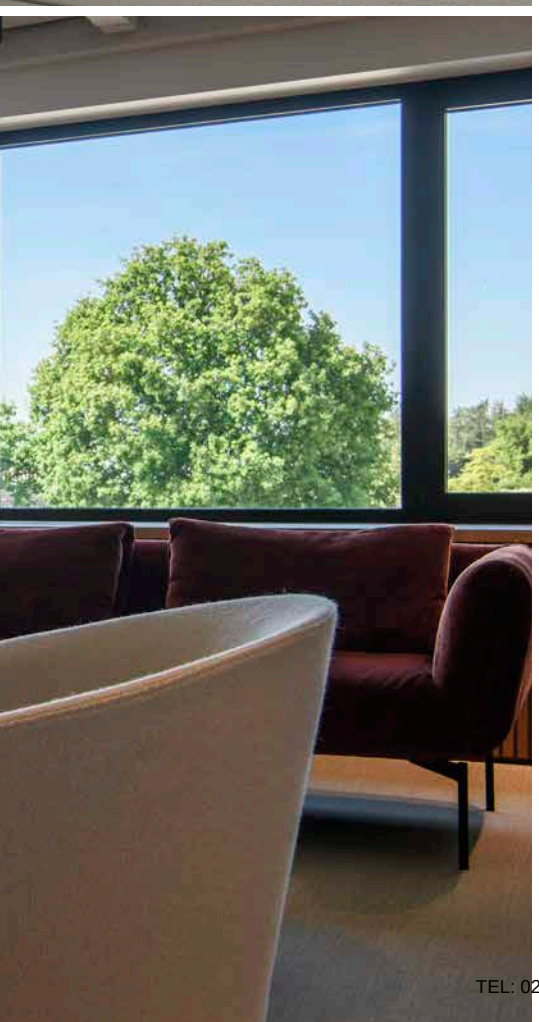

VARYT
Shade opal glass

IK02

Ø: 12 cm
H: 12.8 cm

Options	Prod. no.	GBP
○ white	1008119	51.00

VARYT
Glass shade for PD, WL, CL, TL



IK02

Ø: 12 cm
H: 12.7 cm
Material: glass

Options	Prod. no.	GBP
● smoky grey	1007858	69.00
● amber	1008023	69.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008033 187
1008033 439

QUIMERA
TL

CCT



IP20 IK04 360° 50000h L80B50 260

220-240 V ~50/60 Hz | 350 mA
Total wattage: 4 W
Material: aluminium/glass

- Plug-in power supply included

LED INSIDE CRI 90

Indirect	150 lm | 2700 K	160 lm | 3000 K

Options	Prod. no.	GBP
brass	**1008741**	**283.00**
dark bronze	**1008740**	**283.00**
dark copper	**1008742**	**283.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006354 441

1006350 441

ONE STRAIGHT
FL



220-240 V ~50/60 Hz | 24 V
Total wattage: 22 W
Material: steel/polycarbonate (PC)

• Euro plug

Up	600 lm	2700 K	600 lm	3000 K
Down	600 lm		600 lm	

Options	Prod. no.	GBP
● black	**1007966**	**729.00**
◐ black/brass	**1007964**	**729.00**
○ white	**1007965**	**729.00**

ONE BOW
FL







220-240 V ~50/60 Hz | 24 V
Total wattage: 22 W
Material: steel/polycarbonate (PC)

• Euro plug

Up	600 lm	2700 K	600 lm	3000 K
Down	600 lm		600 lm	

Options	Prod. no.	GBP
● black	**1007963**	**1,072.00**
◐ black/brass	**1007961**	**1,072.00**
○ white	**1007962**	**1,072.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007357 443

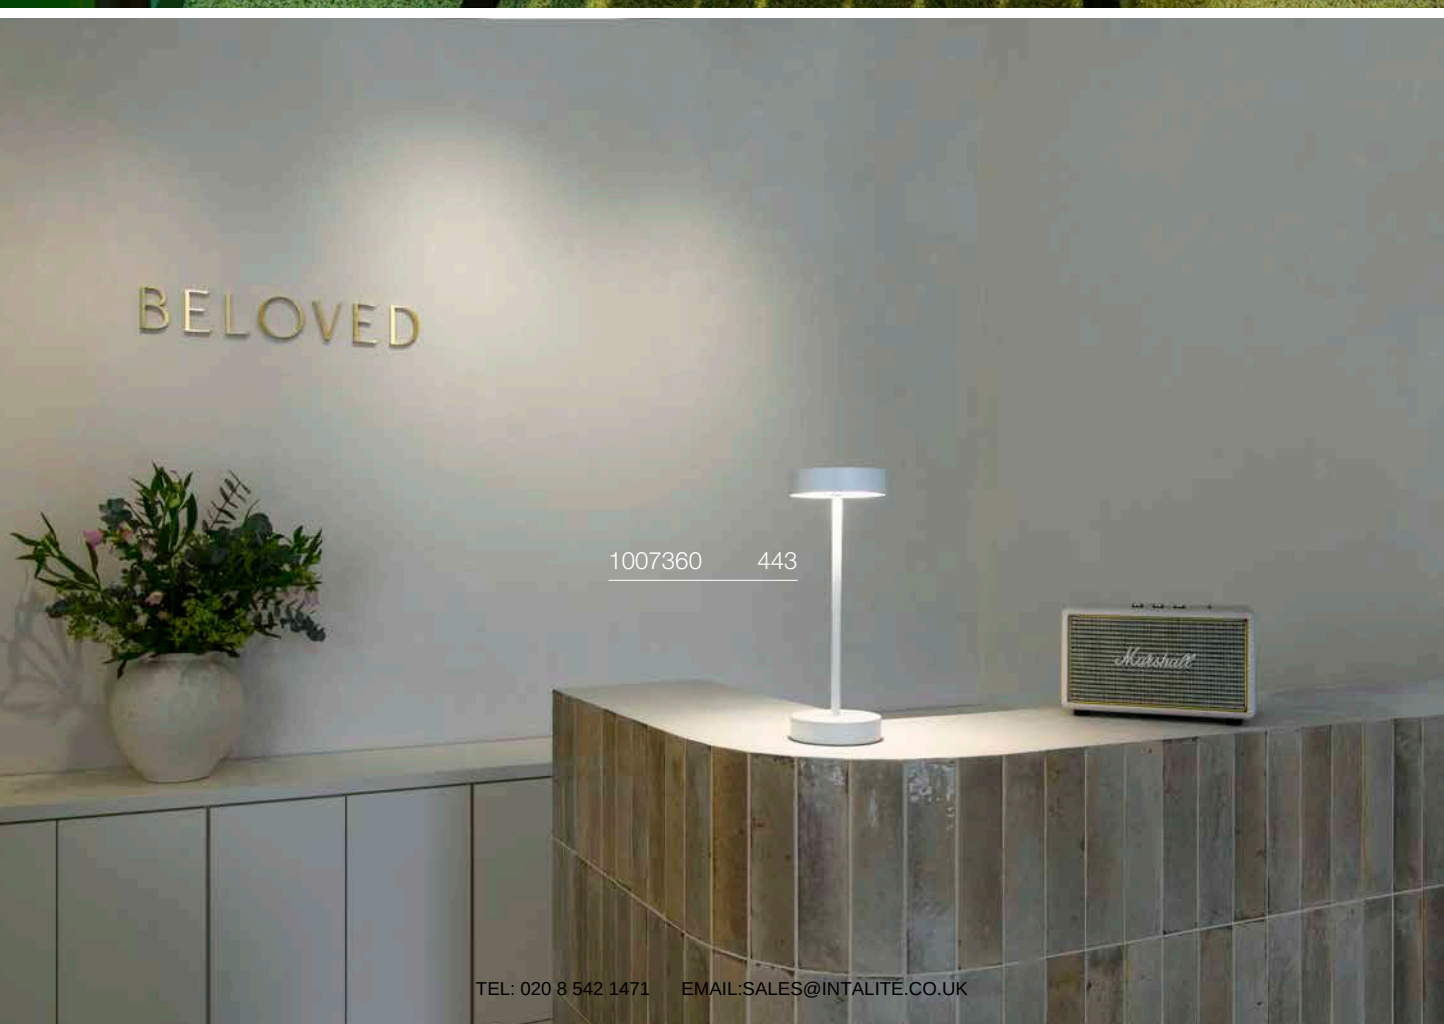

1007360 443

VINOLINA ONE
TL, Battery



Touch IP54 50000 h L80B10

5 V
Total wattage: 2.5 W
Material: aluminium

- Running time 12 h
- Charging time 7 h
- charging plate included
- power adapter not included
- USB-A

LED INSIDE CRI 80

125 lm | 2700 K

Options	Prod. no.	GBP
● black	**1007359**	**85.00**
○ white	**1007357**	**85.00**
● rust	**1007358**	**85.00**

VINOLINA
TL, Battery

CCT



Touch IP54 50000 h L80B10

5 V
Total wattage: 2.2 W
Material: aluminium

- Running time 12 h
- Charging time 7 h
- charging plate included
- power adapter not included
- USB-A

LED INSIDE CRI 80

130 lm | 2700 K | 130 lm | 3000 K

Options	Prod. no.	GBP
● black	**1007362**	**85.00**
○ white	**1007360**	**85.00**
● rust	**1007361**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007692 445

VINOLINA TWO
TL, Battery, DTW



5 V
Total wattage: 2 W
Material: aluminium/plastic

- Running time 10 h
- Charging time 5 h
- Charging station for one light included
- USB-A

140 lm | 2200 K	170 lm | 2700 K	190 lm | 3000 K

Options	Prod. no.	GBP
● black	**1007693**	**85.00**
○ white	**1007692**	**85.00**
● sand	**1007697**	**85.00**
● rust	**1007695**	**85.00**
● red	**1007694**	**85.00**
● sage green	**1007696**	**85.00**

VINOLINA TWO
Charging base

IP20 IK04

L: 46.2 cm
W: 32.60 cm
H: 5 cm
Material: plastic

- Charging base for max. 6
- Connection cable available separately

Options	Prod. no.	GBP
● black	**1007698**	**120.00**

VINOLINA TWO
IEC connection cable with safety plug

IP20

220-240 V 50/60 Hz
L: 180 cm

Options	Prod. no.	GBP
● black	**1008029**	**13.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007380 447

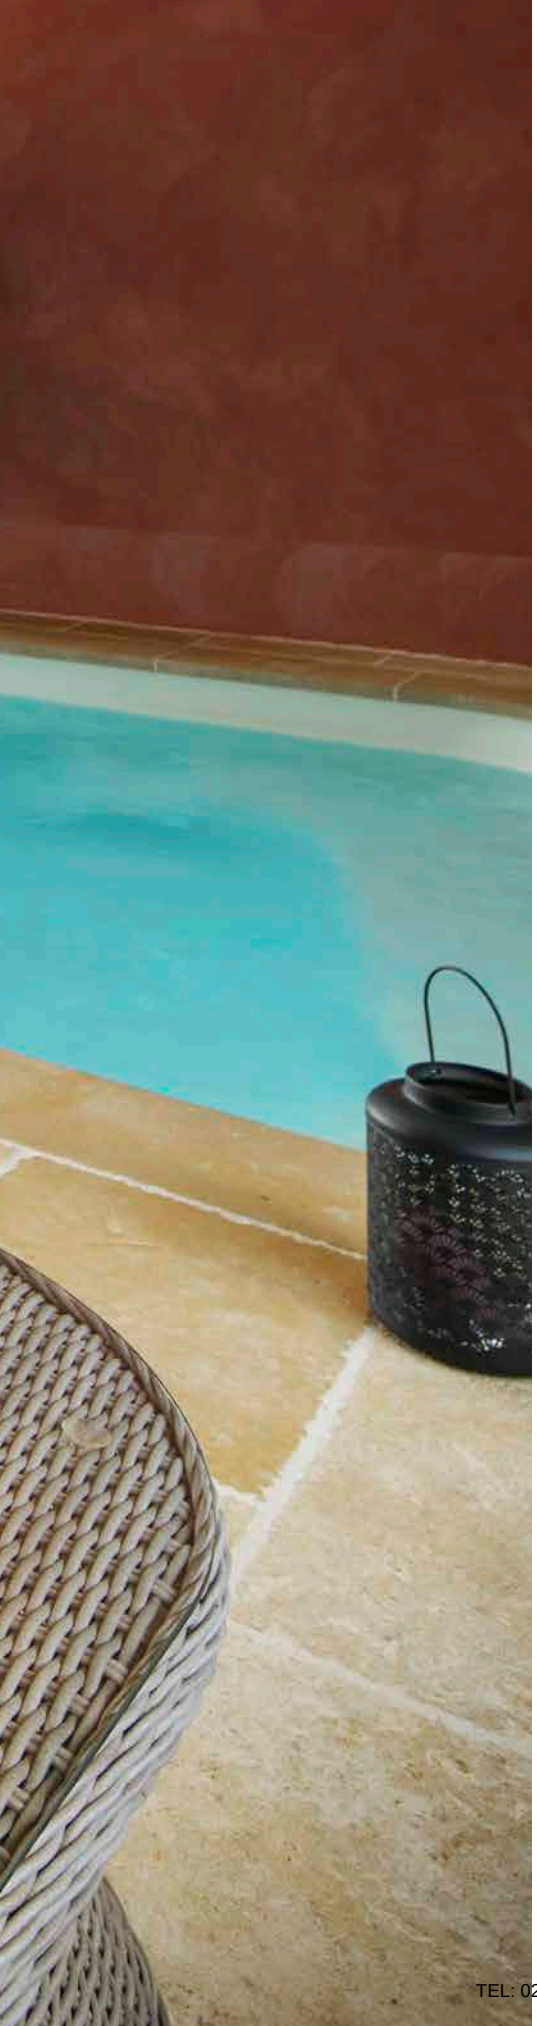

TAHA
Light set, battery-powered



100-240 V ~50/60 Hz | 5 V
Total wattage: 5 W
Material: aluminium/plastic

- In addition to the light, the light set includes two different lampshades, an extension tube, USB-C charging cable, ground spike and a loop for hanging temporarily on branches and beams.
- 3 dimming levels
- IP44 plug-in power supply
- Power adapter

200 lm | 2700 K

Options	Prod. no.	GBP
● black	**1007980**	**142.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009142 449

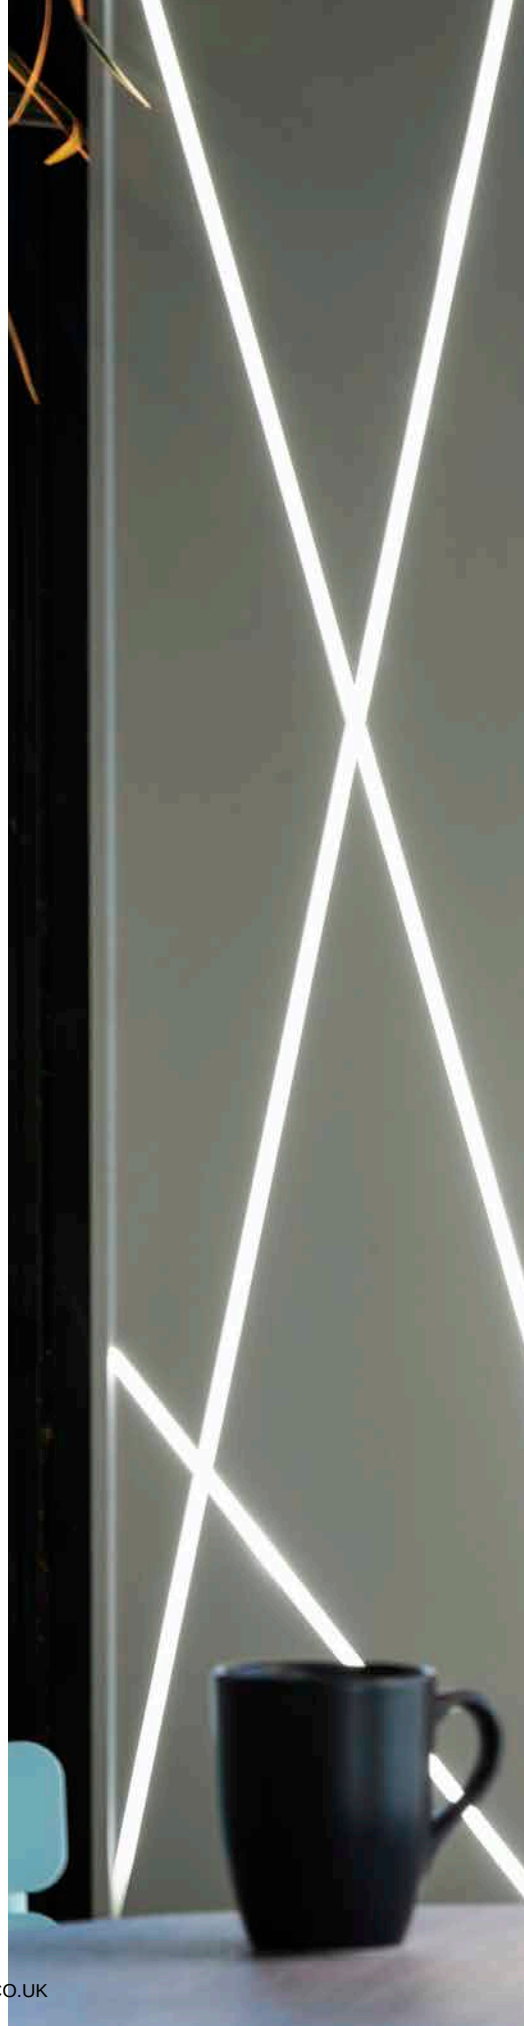

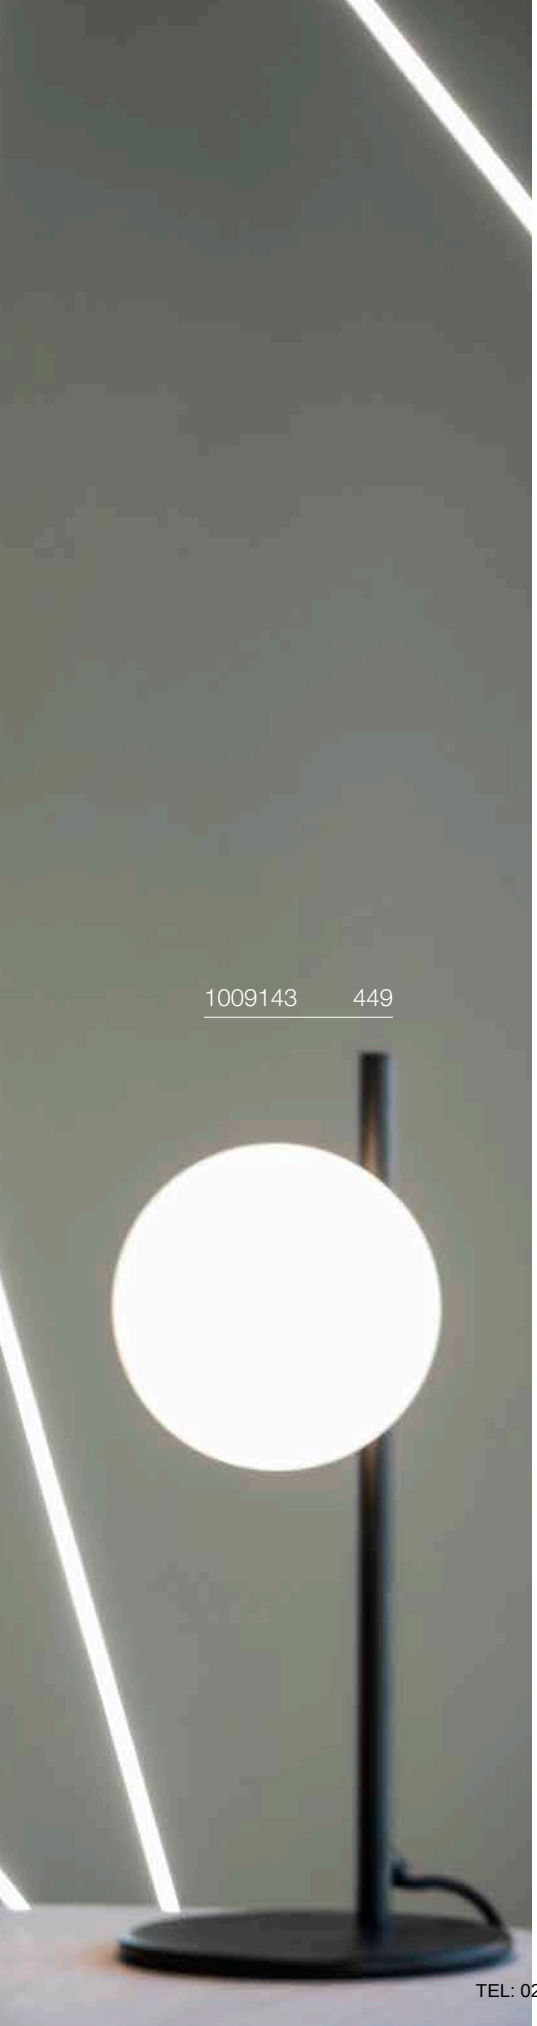

1009143 449

SUN
FL, G9

UPDATE



IP20 IK02 250

220-240 V ~50/60 Hz
Material: steel

- Euro plug with switch in the supply cable

SOCKET INSIDE 5 W

Base: 1xG9 max. Ø: 1.9 cm | L: 6 cm

Options	Prod. no.	GBP
● black	**1009142**	**169.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kWh/1000 h

Prod. no.: **1005286** **8.00 GBP**

SUN
TL, G9

UPDATE



IP20 IK02 180

220-240 V ~50/60 Hz
Material: steel

- Euro plug with switch in the supply cable

SOCKET INSIDE 5 W

Base: 1xG9 max. Ø: 1.9 cm | L: 6 cm

Options	Prod. no.	GBP
● black	**1009143**	**101.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kWh/1000 h

Prod. no.: **1005286** **8.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007364 451

TINY SUN
TL



IP20 180

220-240 V ~50/60 Hz
Material: steel

- Euro plug with switch in the supply cable

SOCKET INSIDE 3.6 W

Base: 1xG9	max. Ø: 1.9 cm	L: 6 cm

Options	Prod. no.	GBP
copper	**1007983**	**85.00**
bronze	**1007982**	**85.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kWh/1000 h

Prod. no.: **1005286** **8.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010347 453

1010352 453

PANTILO SLIM
TL, E27

NEW



IP20 IK02 186

220-240 V ~50/60 Hz
Material: steel

- Euro plug with switch in the supply cable
- Infinitely dimmable via the switch in the supply cable

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 4.7 cm | L: 24 cm

Options	Prod. no.	GBP
chrome	1010345	127.00
copper	1010346	127.00
gold	1010347	127.00
white	1010348	127.00

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F
6 kWh/1000 h

Prod. no.: 1008152 **55.00 GBP**

PANTILO
TL, E27

NEW



IP20 IK02 186

220-240 V ~50/60 Hz
Material: steel

- Euro plug with switch in the supply cable
- Infinitely dimmable via the switch in the supply cable

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.8 cm | L: 14 cm

Options	Prod. no.	GBP
chrome	1010349	127.00
copper	1010350	127.00
gold	1010351	127.00
white	1010352	127.00

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F
6 kWh/1000 h

Prod. no.: 1008153 **46.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PANTILO ROPE 19
TL, E27

UPDATE



IP20 IK02 186

220-240 V ~50/60 Hz
Material: steel

• Euro plug with switch in the supply cable

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.8 cm | L: 12 cm

Options	Prod. no.	GBP
gold	1010208	135.00
silver	1010209	135.00

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A
4 kWh/1000 h

Prod. no.: **1008641** **6.50 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PANTILO ROPE 27
FL, E27

UPDATE

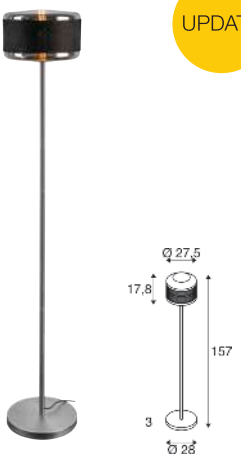

IP20 IK02 210

220-240 V ~50/60 Hz
Material: steel

- Euro plug with switch in the supply cable

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.8 cm | L: 12 cm

Options	Prod. no.	GBP
gold	1010206	254.00
silver	1010207	254.00

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A
4 kWh/1000 h

Prod. no.: **1008641** **6.50 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

132660 + 1000580 272 + 459
155780 + 155592 457 + 459
155790 + 155592 457 + 459

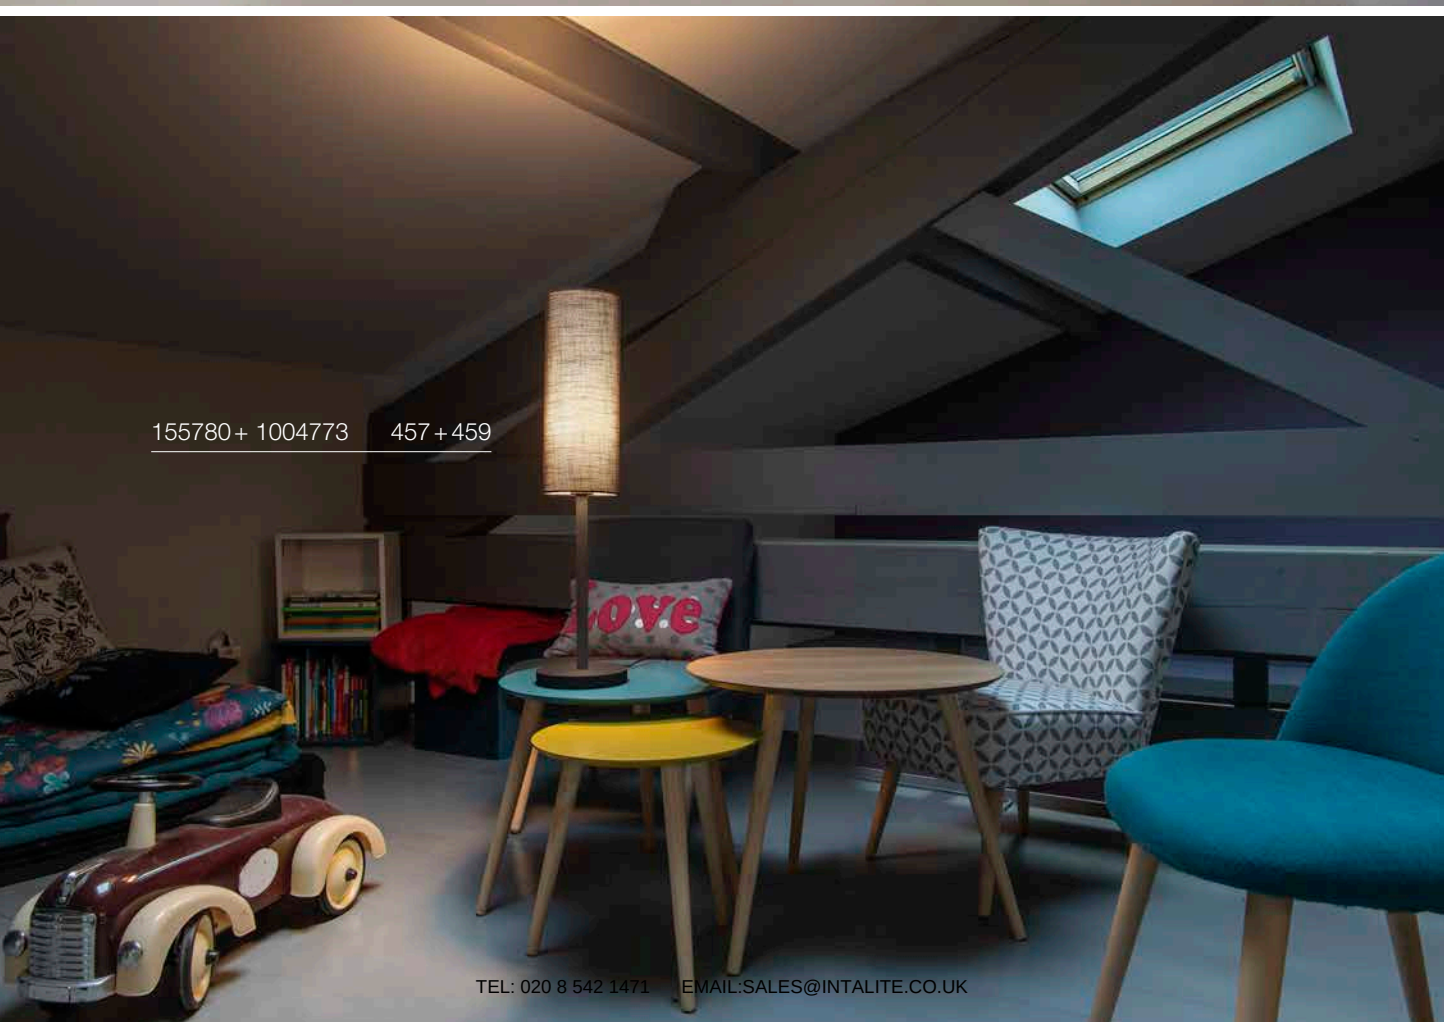
155780 + 1004773 457 + 459

FENDA
TL, E27



IP20 IK03 200

220-240 V ~50/60 Hz
Material: steel/plastic

- Euro plug and switch

SOCKET INSIDE 60 W

Base: 1xE27

Options	Prod. no.	GBP
● black	**1007938**	**69.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kWh/1000 h

Prod. no.: **1005303** **9.00 GBP**

FENDA
FL, E27

IP20 IK03 200

220-240 V ~50/60 Hz
Material: steel/plastic

- Euro plug and switch

SOCKET INSIDE 60 W

Base: 1xE27

Options	Prod. no.	GBP
● black	**1007939**	**120.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kWh/1000 h

Prod. no.: **1005303** **9.00 GBP**

FENDA
TL, E27

IP20 IK03 180

220-240 V ~50/60 Hz
Material: aluminium/plastic

- Euro plug and switch

SOCKET INSIDE 40 W

Base: 1xE27

Options	Prod. no.	GBP
● black	**1007937**	**69.00**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kWh/1000 h

Prod. no.: **1005265** **23.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1004773 + 1004775 459

FENDA
FL, E27

IP20 IK03 330

220-240 V ~50/60 Hz
Material: aluminium/plastic

- Switch on light body
- Euro plug

SOCKET INSIDE 40 W

Base: 1xE27

Options	Prod. no.	GBP
● black	**1007936**	**114.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kWh/1000 h

Prod. no.: **1005302** **11.00 GBP**

FENDA
15 cm, round

Ø: 15 cm
H: 40 cm
Material: textile/steel

Options	Prod. no.	GBP
● grey	**1004773**	**39.00**

FENDA
30 cm, round

Ø: 30 cm
H: 20 cm
Material: textile/steel

Options	Prod. no.	GBP
◐ black/copper	**155592**	**61.00**
○ white	**155582**	**46.00**
● grey	**1004774**	**46.00**
● beige	**155583**	**46.00**

FENDA
Ø 45 cm, round

Ø: 45.5 cm
H: 28 cm
Material: textile/steel

Options	Prod. no.	GBP
◐ black/copper	**156122**	**76.00**
○ white	**156111**	**72.00**
● grey	**1004775**	**72.00**
● beige	**156113**	**72.00**

⊕

Product	Prod. no.	GBP
Acrylic glass cover Ø 45.5 cm		
○ white	**156100**	**39.00**

FENDA
70 cm, round

IP20

Ø: 70 cm
H: 36 cm
Material: textile/steel

- Not suitable for Fenda Bow

Options	Prod. no.	GBP
◐ black/copper	**1000580**	**110.00**
○ white	**1000579**	**97.00**

⊕

Product	Prod. no.	GBP
Acrylic glass cover Ø 70 cm		
○ white	**1000957**	**81.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

KARPO
TL



220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.2 W
Material: aluminium

- Switch on light body
- Power adapter

430 lm|3000 K

Options	Prod. no.	GBP
● black 360 lm	**1007946**	**160.00**
○ white 430 lm	**1007945**	**160.00**

KARPO
FL



220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.2 W
Material: aluminium

- Switch on light body
- Power adapter

360 lm|3000 K

Options	Prod. no.	GBP
● black	**1007948**	**208.00**

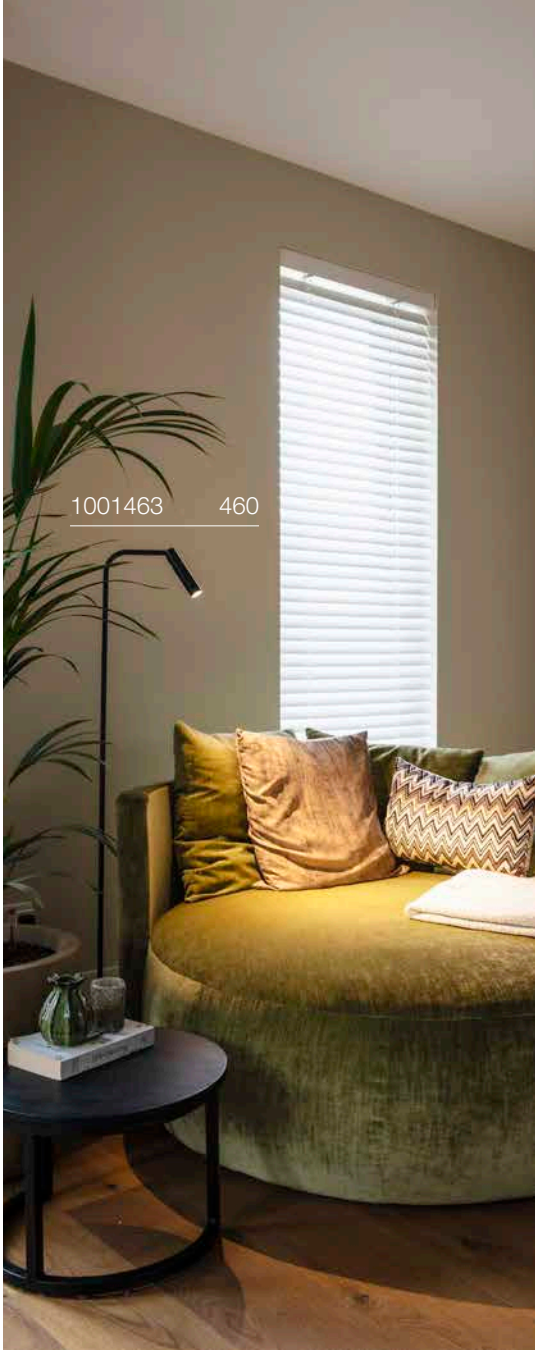

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PHELIA
FL, E27

146010 461

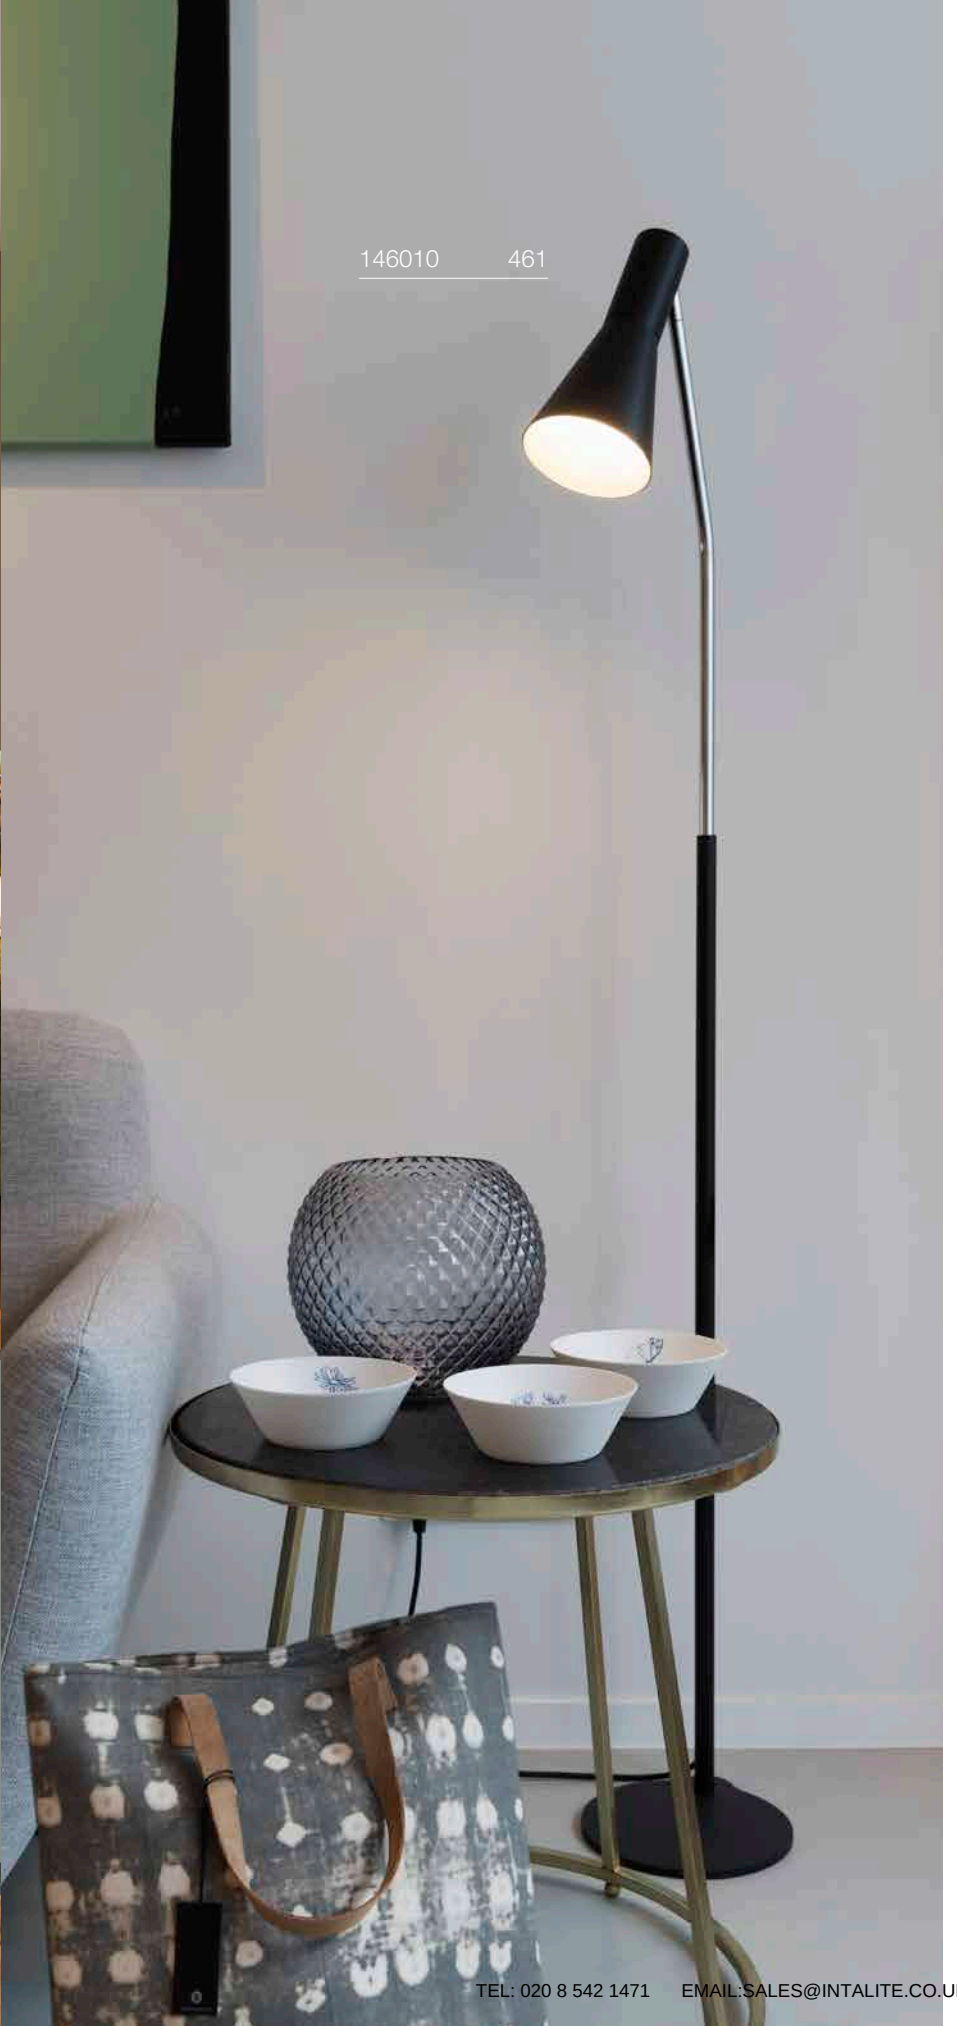

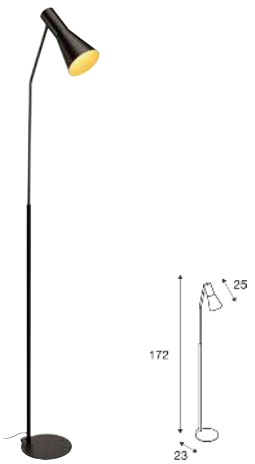

220-240 V ~50/60 Hz
Material: aluminium/steel

- Switch on light body
- Safety plug and switch

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 5.3 cm | L: 18 cm

Options	Prod. no.	GBP
● black	**1007967**	**208.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kWh/1000 h

Prod. no.: **1005303** **9.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

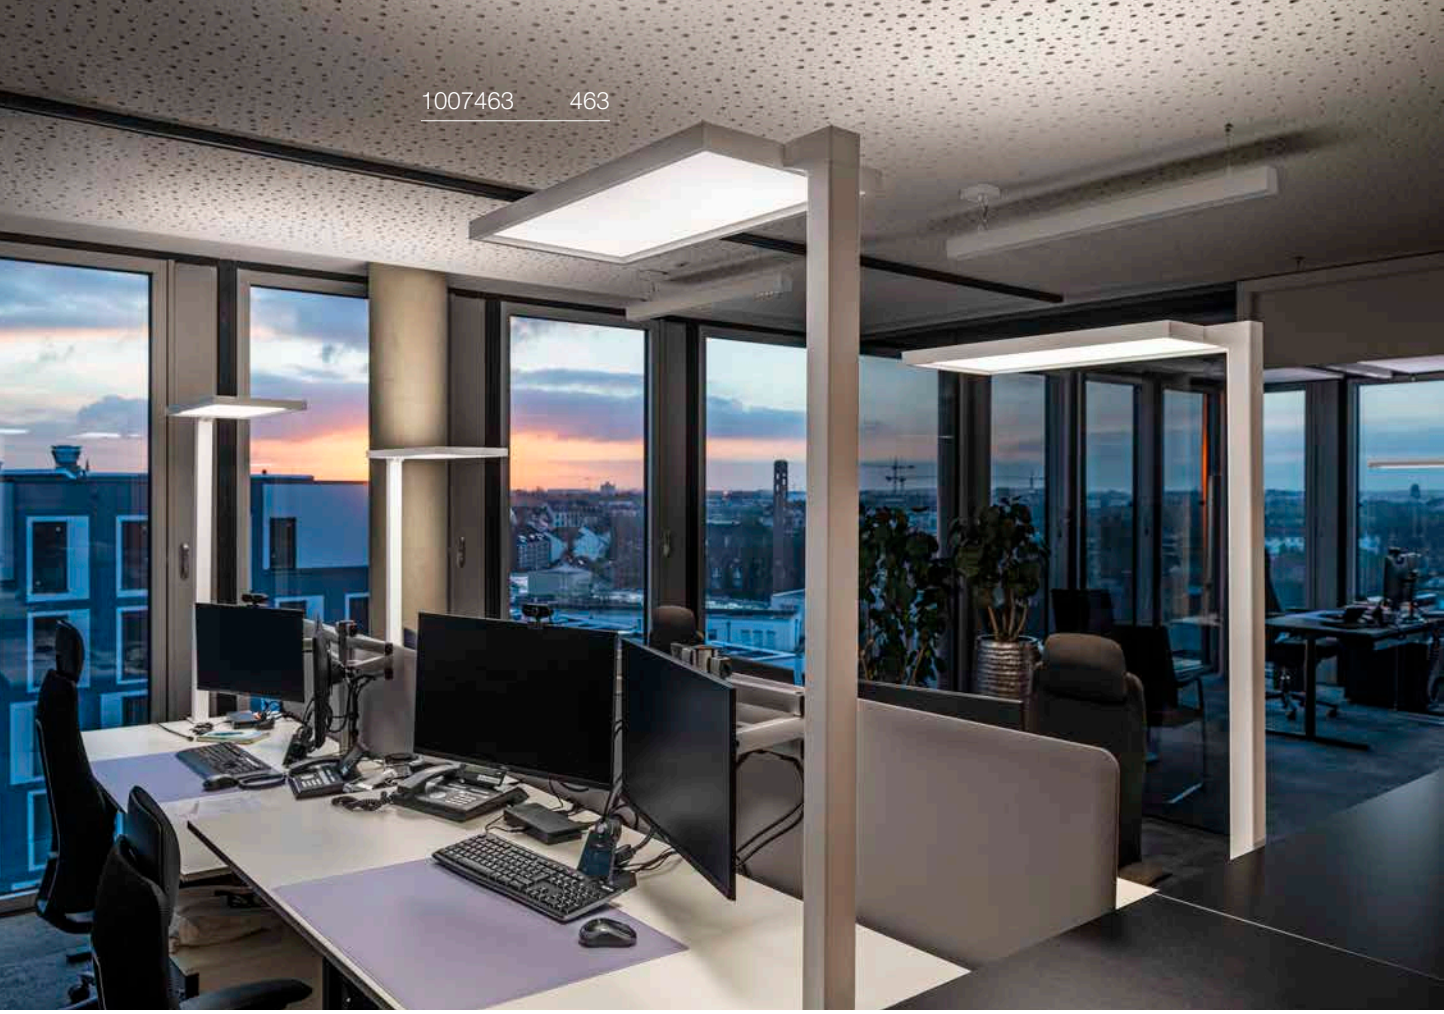
1007463 463

1007466 463

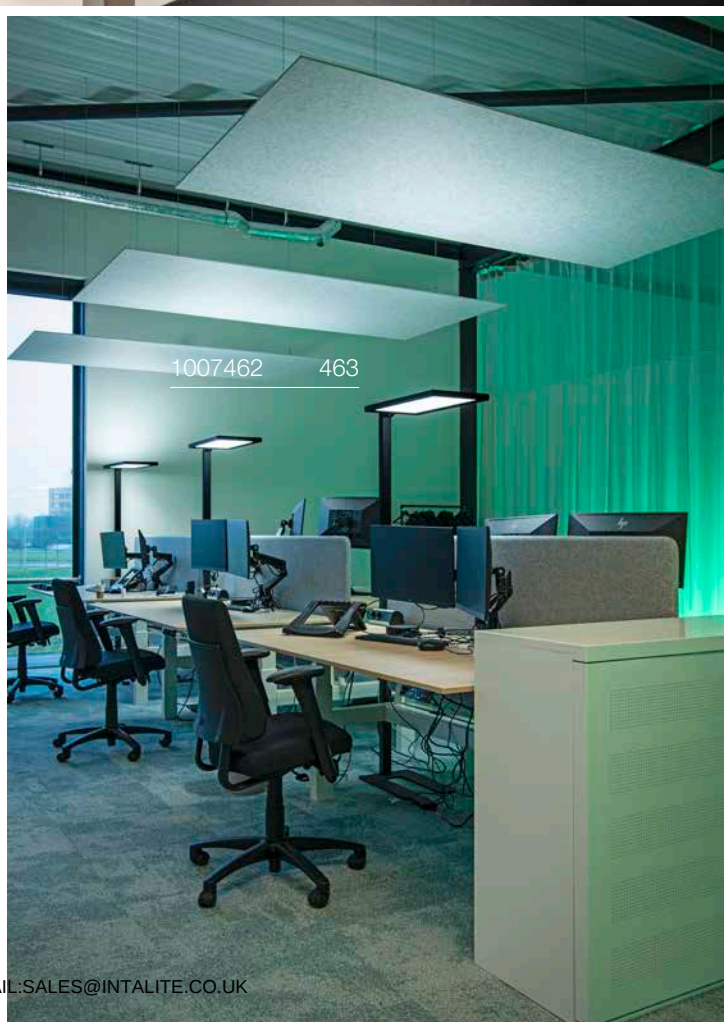
1007462 463

WORKLIGHT EASY
FL 940

Switch · IP20 · IK03 · 115° · 80° · 50.000h L80B10 · 250 · UGR 19

220-240 V ~0/50/60 Hz | 1500 mA
Total wattage: 60 W
Material: aluminium/steel

- Safety plug

LED INSIDE · CRI 90

Up	4230 lm	4000 K
Down	2920 lm	

Options	Prod. no.	GBP
● black	1010393	467.00
○ white	1010394	467.00

WORKLIGHT PRO FL
single

IP20 · IK03 · 115° · 75° · 50.000h L80B10 · 250 · UGR 14

220-240 V ~50/60 Hz | 48 V
Total wattage: 100 W
Material: aluminium/steel

- Safety plug

LED INSIDE · CRI 80

Down	2300 lm	4000 K
Indirect	10700 lm	

Options	Prod. no.	GBP
● black	1007462	815.00
○ white	1007463	815.00
● grey	1007464	815.00

WORKLIGHT PRO FL
double

Touch · IP20 · IK03 · 115° · 75° · 50.000h L80B10 · 250 · UGR 16

220-240 V ~50/60 Hz | 48 V
Total wattage: 150 W
Material: aluminium/steel

- Safety plug

LED INSIDE · CRI 80

Down	4400 lm	4000 K
Indirect	15600 lm	

Options	Prod. no.	GBP
● black	1007465	1,487.00
○ white	1007466	1,487.00
● grey	1007467	1,487.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1005394 465
1005392 465

WORKLIGHT
FL

Touch · IP20 · IK02 · 110° · 80° · 50000h L80B10 · 250 · UGR 19

220-240 V ~50/60 Hz | 2000 mA
Total wattage: 79 W
Material: aluminium

- Safety plug

LED INSIDE · CRI 80

Down	3800 lm	4000 K
Up	3800 lm	

Options	Prod. no.	GBP
● black	**1005390**	**686.00**
○ white	**1005391**	**686.00**
◍ silver	**1006343**	**680.00**

WORKLIGHT
TL

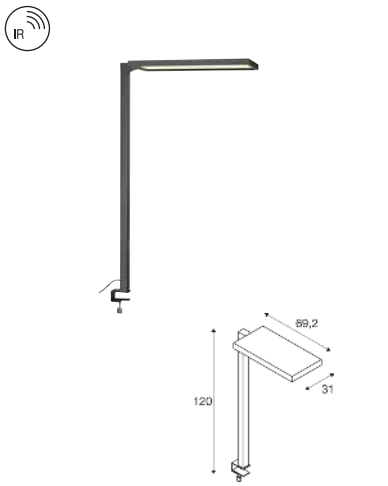

Touch · IP20 · IK02 · 110° · 80° · 50000h L80B10 · 250 · UGR 19

220-240 V ~50/60 Hz | 2000 mA
Total wattage: 79 W
Material: aluminium

- Clamping range of 6-40 mm
- Safety plug

LED INSIDE · CRI 80

Down	3800 lm	4000 K
Up	3800 lm	

Options	Prod. no.	GBP
● black	**1005392**	**600.00**
○ white	**1005394**	**600.00**
◍ silver	**1006344**	**595.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010336 483

KALU 2.0 | 480

LIGHT EYE® 2.0 | 481

DYSKO | 483

GRIP! FLAT | 485

GRIP! FLAT | 485

NUMINOS® | 486–493

IN–LINE | 495–499

FIX–IT! | 501–505

GRIP! S | 506–509

LALU® SET | 510–511

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006617 + 1006623 495 +497

48V SYSTEM TRACK
Surface-mounted track, DALI

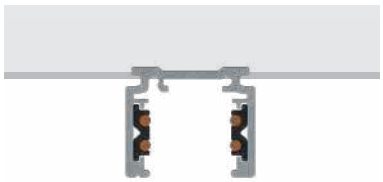

	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 x 2.62 x 2.26	100 x 2.62 x 2.26	200 x 2.62 x 2.26	200 x 2.62 x 2.26
Prod. no.	**1006541**	**1006542**	**1006543**	**1006544**
GBP	**43.00**	**43.00**	**73.00**	**73.00**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 x 2.62 x 2.26	300 x 2.62 x 2.26	400 x 2.62 x 2.26	400 x 2.62 x 2.26
Prod. no.	**1006545**	**1006546**	**1006547**	**1006548**
GBP	**114.00**	**114.00**	**155.00**	**155.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

48V TRACK

DALI surface-mounted track
Planning assistance and accessories at a glance

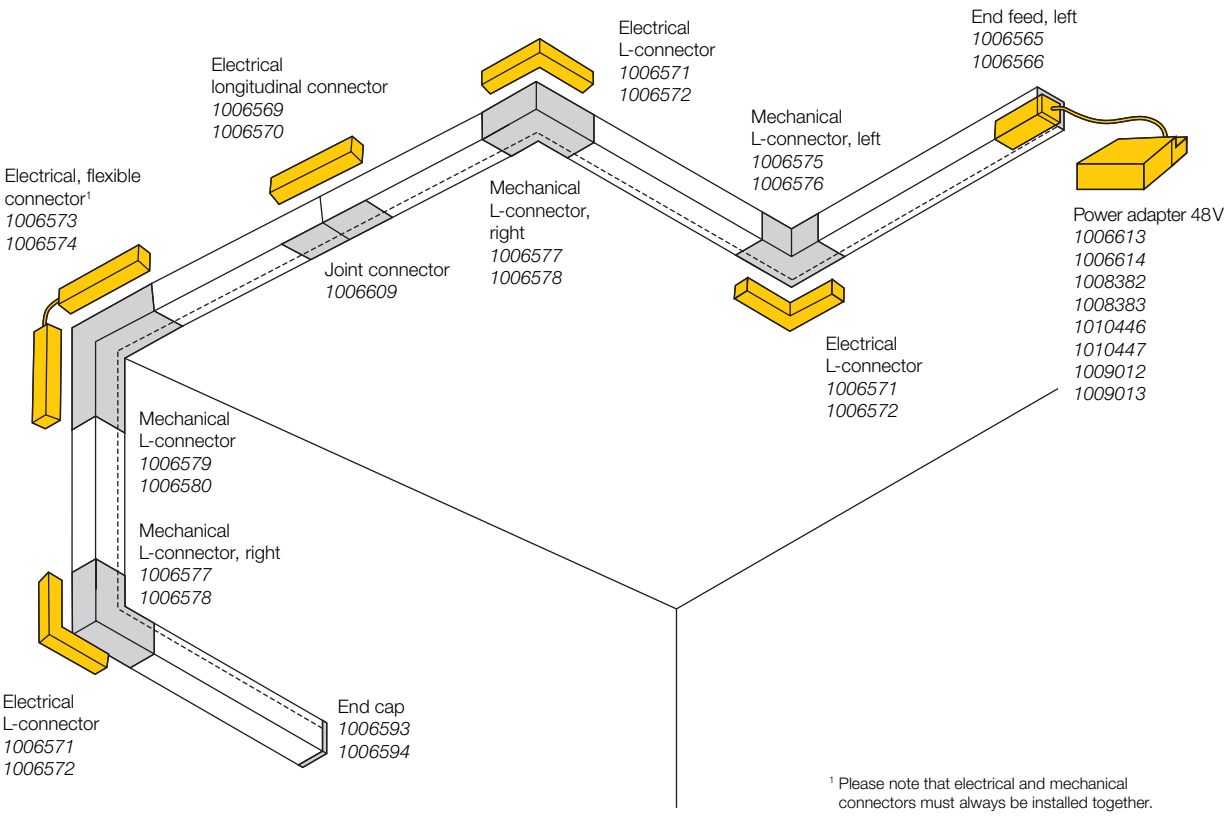

[1] Please note that electrical and mechanical connectors must always be installed together.

End feed, left

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006565**	**13.00 GBP**
○ white	Prod. no.	**1006566**	**13.00 GBP**

End feed, right

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006567**	**13.00 GBP**
○ white	Prod. no.	**1006568**	**13.00 GBP**

L-connector mechanical, for standard surface-mounted track, left (for ceiling installation)

7.1 cm | Aluminium
L: 7.1 cm, B: 7.1 cm, H: 2.19 cm

● black	Prod. no.	**1006575**	**19.00 GBP**
○ white	Prod. no.	**1006576**	**19.00 GBP**

L-connector mechanical, for standard surface-mounted track, right (for ceiling installation)

7.1 cm | Aluminium
L: 7.1 cm, B: 7.1 cm, H: 2.19 cm

● black	Prod. no.	**1006577**	**19.00 GBP**
○ white	Prod. no.	**1006578**	**19.00 GBP**

L-connector mechanical, for surface-mounted track, standard, stereo, (wall/ceiling)

8.4 cm | Aluminium
L: 8.4 cm, W: 2.62 cm, H: 8.4 cm

● black	Prod. no.	**1006579**	**19.00 GBP**
○ white	Prod. no.	**1006580**	**19.00 GBP**

Electric L-connector, DALI

11.4 cm | Polycarbonate (PC)
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm

● black	Prod. no.	**1006571**	**24.00 GBP**
○ white	Prod. no.	**1006572**	**24.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Electric longitudinal connector, DALI

14.4 cm | Polycarbonate (PC)
L: 14.4 cm, W: 1.6 cm, H: 1.9 cm

● black	Prod. no.	**1006569**	**19.00 GBP**
○ white	Prod. no.	**1006570**	**19.00 GBP**

Flexible connector, electrical, DALI

23 cm | Polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006573**	**25.00 GBP**
○ white	Prod. no.	**1006574**	**25.00 GBP**

Cover, 20 mm for standard track assembly, 2 m

200 mm, Aluminium/Polycarbonate (PC)
L: 200 cm, W: 2 cm, H: 0.6 cm

● black	Prod. no.	**1006611**	**9.00 GBP**
○ white	Prod. no.	**1006612**	**9.00 GBP**

End cap for surface-mounted track, standard

2.6 cm | Polycarbonate (PC)
L: 2.6 cm, W: 0.2 cm, H: 2.2 cm

● black	Prod. no.	**1006593**	**4.00 GBP**
○ white	Prod. no.	**1006594**	**4.00 GBP**

Track reinforcement plate for surface-mounted track

5 cm | Steel
L: 5 cm, W: 1.32 cm, H: 0.25 cm

● grey	Prod. no.	**1006609**	**8.00 GBP**

Track reinforcement plate with mounting set, 3 m wire rope

12 cm | Steel
L: 12 cm, W: 2.7 cm

● black	Prod. no.	**1006603**	**19.00 GBP**
○ white	Prod. no.	**1006604**	**19.00 GBP**

Track reinforcement plate with mounting set, 1 m rod

12 cm | Steel
L: 12 cm, W: 2.7 cm

● black	Prod. no.	**1006601**	**19.00 GBP**
○ white	Prod. no.	**1006602**	**19.00 GBP**

Pendant suspension, 1 m rod

Steel
W: 2.9 cm

● black	Prod. no.	**1006605**	**16.00 GBP**
○ white	Prod. no.	**1006606**	**16.00 GBP**

Pendant suspension, 3 m wire rope

Steel
W: 2.9 cm

● black	Prod. no.	**1006607**	**16.00 GBP**
○ white	Prod. no.	**1006608**	**16.00 GBP**

Mounting bracket

3 cm | Aluminium
L: 3 cm | W: 2.72 cm | H: 1.05 cm

● black	Prod. no.	**1006599**	**7.00 GBP**
○ white	Prod. no.	**1006600**	**7.00 GBP**

External power adapter 48 V | 60 W

18 cm | Polycarbonate (PC)
L: 18 cm W: 4.5 cm H: 2.7 cm

○ white	Prod. no.	**1006613**	**51.00 GBP**

External power adapter 48 V | 150 W

19.1 cm | Metal/Polycarbonate (PC)
L: 19.1 cm | W: 8.8 cm | H: 3.55 cm

● black	Prod. no.	**1006614**	**111.00 GBP**

48 V feeder including integrated Casambi to Dali converter

28 cm | Plastic PC
L: 28 cm | W: 2.30 cm | H: 4.4 cm

● black	Prod. no.	**1008382**	**343.00 GBP**
○ white	Prod. no.	**1008383**	**343.00 GBP**

Intrack LED driver, 48 VDC, 200 W, On/Off

28 cm | Plastic PC
L: 28 cm | W: 2.30 cm | H: 4.4 cm

● black	Prod. no.	**1007874**	**163.00 GBP**
○ white	Prod. no.	**1007875**	**163.00 GBP**

48 V SYSTEM Intrack LED driver 48 VDC, 100 W 3 m, incl. DALI through-wireable

29.8 cm | Plastic PC
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1010446**	**93.00 GBP**
○ white	Prod. no.	**1010447**	**93.00 GBP**

48 V SYSTEM Intrack LED driver 48 VDC, 250 W, incl. DALI through-wirable

26.8 cm | Polycarbonate (PC)
L: 26.8 cm, W: 2.2 cm, H: 4.35 cm

● black	Prod. no.	**1009012**	**119.00 GBP**
○ white	Prod. no.	**1009001**	**119.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006617 495
1006623 497
1006723 489

48V SYSTEM TRACK
Surface-mounted track, deep, DALI

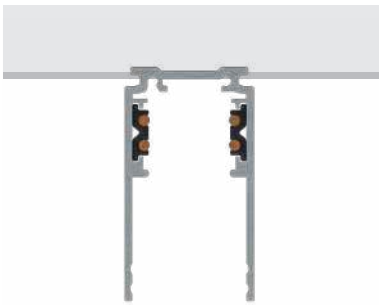

	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 x 2.62 x 4.72	100 x 2.62 x 4.72	200 x 2.62 x 4.72	200 x 2.62 x 4.72
Prod. no.	**1006549**	**1006550**	**1006551**	**1006552**
GBP	**51.00**	**51.00**	**99.00**	**99.00**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 x 2.62 x 4.72	300 x 2.62 x 4.72	400 x 2.62 x 4.72	400 x 2.62 x 4.72
Prod. no.	**1006553**	**1006554**	**1006555**	**1006556**
GBP	**146.00**	**146.00**	**196.00**	**196.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

48 V TRACK

DALI surface-mounted track, deep
Planning assistance and accessories at a glance

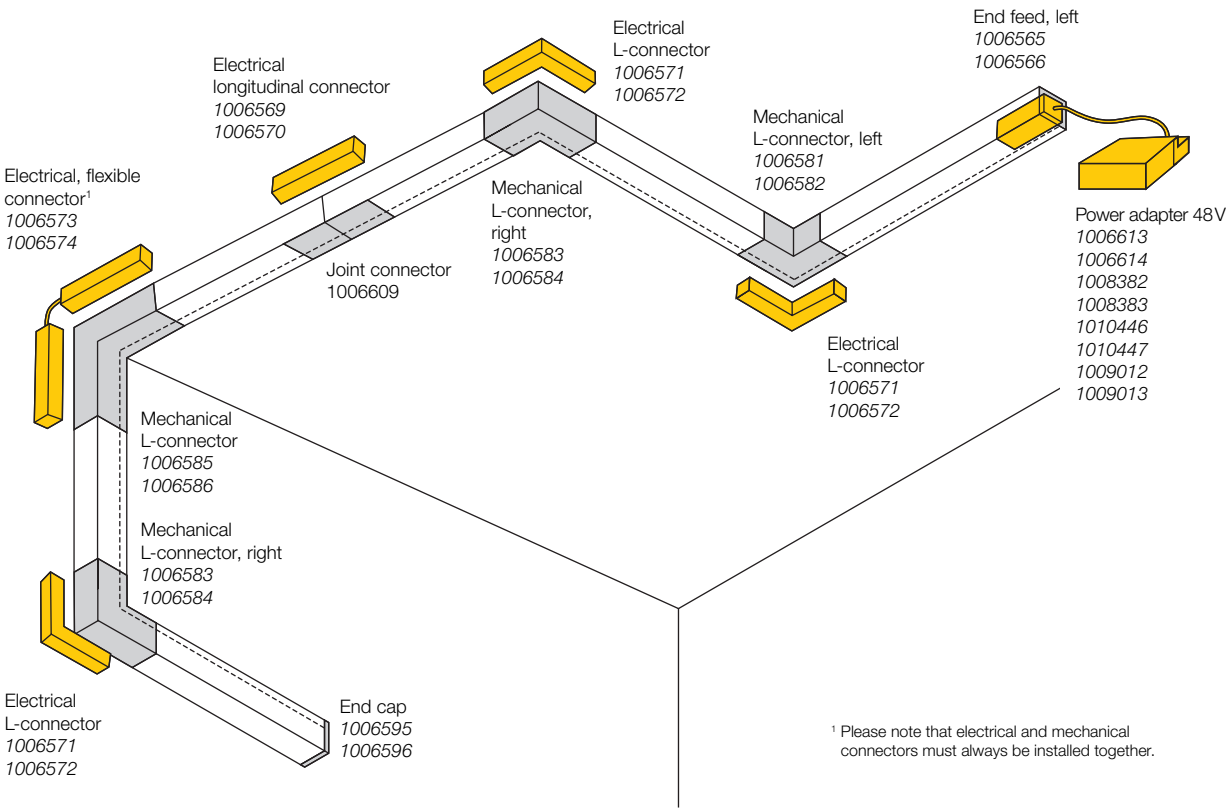

[1] Please note that electrical and mechanical connectors must always be installed together.

End feed, left

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006565**	**13.00 GBP**
○ white	Prod. no.	**1006566**	**13.00 GBP**

End feed, right

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006567**	**13.00 GBP**
○ white	Prod. no.	**1006568**	**13.00 GBP**

L-connector mechanical, for surface-mounted track, deep, left (for ceiling installation)

7.1 cm | Aluminium
L: 7.1 cm, W: 7.1 cm, H: 4.7 cm

● black	Prod. no.	**1006581**	**25.00 GBP**
○ white	Prod. no.	**1006582**	**25.00 GBP**

L-connector mechanical, for surface-mounted track, deep, right (for ceiling installation)

7.1 cm | Aluminium
L: 7.1 cm, W: 7.1 cm, H: 4.7 cm

● black	Prod. no.	**1006583**	**25.00 GBP**
○ white	Prod. no.	**1006584**	**25.00 GBP**

L-connector mechanical, for surface-mounted track, deep, stereo (wall/ceiling)

8.4 cm | Aluminium
L: 8.4 cm, W: 8.4 cm, H: 4.7 cm

● black	Prod. no.	**1006585**	**25.00 GBP**
○ white	Prod. no.	**1006586**	**25.00 GBP**

Electric L-connector, DALI

11.4 cm | Polycarbonate (PC)
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm

● black	Prod. no.	**1006571**	**24.00 GBP**
○ white	Prod. no.	**1006572**	**24.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Electric longitudinal connector, DALI

14.4 cm | Polycarbonate (PC)
L: 14.4 cm, W: 1.6 cm, H: 1.9 cm

● black	Prod. no.	**1006569**	**19.00 GBP**
○ white	Prod. no.	**1006570**	**19.00 GBP**

Flexible connector, electrical, DALI

23 cm | Polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006573**	**25.00 GBP**
○ white	Prod. no.	**1006574**	**25.00 GBP**

Track cover, 26 mm, for surface-mounted track deep and recessed track, 2 m

200 cm | Polycarbonate (PC)
L: 200 cm | W: 26 cm | H: 6 cm

● black	Prod. no.	**1007188**	**11.00 GBP**
○ white	Prod. no.	**1007189**	**11.00 GBP**

End cap for surface-mounted track, deep

2.6 cm | Polycarbonate (PC)
L: 2.6 cm, W: 0.2 cm, H: 4.7 cm

● black	Prod. no.	**1006595**	**6.00 GBP**
○ white	Prod. no.	**1006596**	**6.00 GBP**

Track reinforcement plate for surface-mounted track

5 cm | Steel
L: 5 cm, W: 1.32 cm, H: 0.25 cm

● grey	Prod. no.	**1006609**	**8.00 GBP**

Track reinforcement plate with mounting set, 3 m wire rope

12 cm | Steel
L: 12 cm, W: 2.7 cm

● black	Prod. no.	**1006603**	**19.00 GBP**
○ white	Prod. no.	**1006604**	**19.00 GBP**

Track reinforcement plate with mounting set, 1 m rod

12 cm | Steel
L: 12 cm, W: 2.7 cm

● black	Prod. no.	**1006601**	**19.00 GBP**
○ white	Prod. no.	**1006602**	**19.00 GBP**

Pendant suspension, 1 m rod

Steel
W: 2.9 cm

● black	Prod. no.	**1006605**	**16.00 GBP**
○ white	Prod. no.	**1006606**	**16.00 GBP**

Pendant suspension, 3 m wire rope

Steel
W: 2.9 cm

● black	Prod. no.	**1006607**	**16.00 GBP**
○ white	Prod. no.	**1006608**	**16.00 GBP**

Mounting bracket

3 cm | Aluminium
L: 3 cm | W: 2.72 cm | H: 1.05 cm

● black	Prod. no.	**1006599**	**7.00 GBP**
○ white	Prod. no.	**1006600**	**7.00 GBP**

External power adapter 48 V | 60 W

18 cm | Polycarbonate (PC)
L: 18 cm W: 4.5 cm H: 2.7 cm

○ white	Prod. no.	**1006613**	**51.00 GBP**

External power adapter 48 V | 150 W

19.1 cm | Metal/Polycarbonate (PC)
L: 19.1 cm | W: 8.8 cm | H: 3.55 cm

● black	Prod. no.	**1006614**	**111.00 GBP**

48 V feeder including integrated Casambi to Dali converter

28 cm | Plastic PC
L: 28 cm | W: 2.30 cm | H: 4.4 cm

● black	Prod. no.	**1008382**	**343.00 GBP**
○ white	Prod. no.	**1008383**	**343.00 GBP**

Intrack LED driver, 48 VDC, 200 W, On/Off

28 cm | Plastic PC
L: 28 cm | W: 2.30 cm | H: 4.4 cm

● black	Prod. no.	**1007874**	**163.00 GBP**
○ white	Prod. no.	**1007875**	**163.00 GBP**

48 V SYSTEM Intrack LED driver 48 VDC, 100 W 3 m, incl. DALI through-wireable

29.8 cm | Plastic PC
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1010446**	**93.00 GBP**
○ white	Prod. no.	**1010447**	**93.00 GBP**

48 V SYSTEM Intrack LED driver 48 VDC, 250 W, incl. DALI through-wirable

26.8 cm | Polycarbonate (PC)
L: 26.8 cm, W: 2.2 cm, H: 4.35 cm

● black	Prod. no.	**1009012**	**119.00 GBP**
○ white	Prod. no.	**1009001**	**119.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006757 489

48V SYSTEM TRACK
1 m, Recessed track, DALI

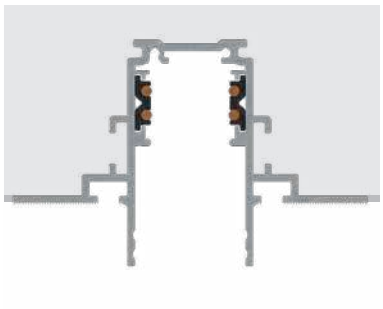

	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 x 7.4 x 4.7	100 x 7.4 x 4.7	200 x 7.4 x 4.7	200 x 7.4 x 4.7
Prod. no.	**1006557**	**1006558**	**1006559**	**1006560**
GBP	**68.00**	**68.00**	**119.00**	**119.00**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 x 7.4 x 4.7	300 x 7.4 x 4.7	400 x 7.4 x 4.7	400 x 7.4 x 4.7
Prod. no.	**1006561**	**1006562**	**1006563**	**1006564**
GBP	**153.00**	**153.00**	**220.00**	**220.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

48 V TRACK

DALI recessed track
Planning assistance and accessories at a glance

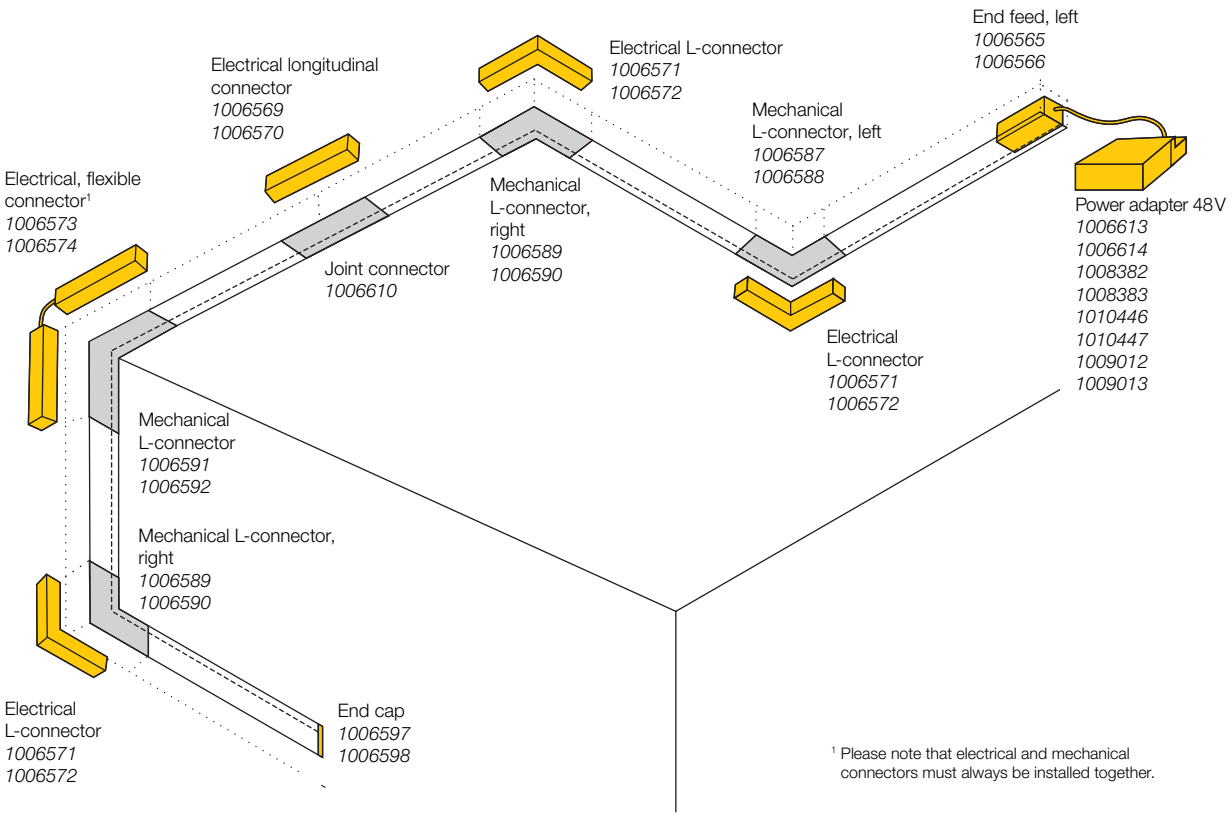

[1] Please note that electrical and mechanical connectors must always be installed together.

End feed, left

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006565**	**13.00 GBP**
○ white	Prod. no.	**1006566**	**13.00 GBP**

End feed, right

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006567**	**13.00 GBP**
○ white	Prod. no.	**1006568**	**13.00 GBP**

L-connector mechanical, for recessed track, deep, left (for ceiling installation)

9.5 cm | Aluminium
L: 9.5 cm, W: 9.5 cm, H: 4.69 cm

● black	Prod. no.	**1006587**	**28.00 GBP**
○ white	Prod. no.	**1006588**	**28.00 GBP**

L-connector mechanical, for recessed track, deep, right (for ceiling installation)

9.5 cm | Aluminium
L: 9.5 cm, W: 9.5 cm, H: 4.69 cm

● black	Prod. no.	**1006589**	**28.00 GBP**
○ white	Prod. no.	**1006590**	**28.00 GBP**

L-connector mechanical, for recessed track, deep, stereo, (wall/ceiling)

8.1 cm | Aluminium
L: 8.1 cm, W: 7.4 cm, H: 8.1 cm

● black	Prod. no.	**1006591**	**28.00 GBP**
○ white	Prod. no.	**1006592**	**28.00 GBP**

Electric L-connector, DALI

11.4 cm | Polycarbonate (PC)
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm

● black	Prod. no.	**1006571**	**24.00 GBP**
○ white	Prod. no.	**1006572**	**24.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Electric longitudinal connector, DALI

14.4 cm | Polycarbonate (PC)
L: 14.4 cm, W: 1.6 cm, H: 1.9 cm

● black	Prod. no.	**1006569**	**19.00 GBP**
○ white	Prod. no.	**1006570**	**19.00 GBP**

Flexible connector, electrical, DALI

23 cm | Polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006573**	**25.00 GBP**
○ white	Prod. no.	**1006574**	**25.00 GBP**

Track cover, 26 mm, for surface-mounted track deep and recessed track, 2 m

200 cm | Polycarbonate (PC)
L: 200 cm | W: 26 cm | H: 6 cm

● black	Prod. no.	**1007188**	**11.00 GBP**
○ white	Prod. no.	**1007189**	**11.00 GBP**

End cap for recessed track

3.4 cm | Polycarbonate (PC)
L: 3.4 cm, W: 0.2 cm, H: 4.7 cm

● black	Prod. no.	**1006597**	**4.00 GBP**
○ white	Prod. no.	**1006598**	**4.00 GBP**

Track reinforcement plate for surface-mounted track

6.3 cm | Steel
L: 6.3 cm, W: 0.76 cm, H: 0.25 cm

● grey	Prod. no.	**1006610**	**8.00 GBP**

Track reinforcement plate with mounting set, 3 m wire rope

12 cm | Steel
L: 12 cm, W: 2.7 cm

● black	Prod. no.	**1006603**	**19.00 GBP**
○ white	Prod. no.	**1006604**	**19.00 GBP**

Track reinforcement plate with mounting set, 1 m rod

12 cm | Steel
L: 12 cm, W: 2.7 cm

● black	Prod. no.	**1006601**	**19.00 GBP**
○ white	Prod. no.	**1006602**	**19.00 GBP**

Pendant suspension, 1 m rod

Steel
W: 2.9 cm

● black	Prod. no.	**1006605**	**16.00 GBP**
○ white	Prod. no.	**1006606**	**16.00 GBP**

Pendant suspension, 3m wire rope

Steel
W: 2.9 cm

● black	Prod. no.	**1006607**	**16.00 GBP**
○ white	Prod. no.	**1006608**	**16.00 GBP**

Mounting bracket

3 cm | Aluminium
L: 3 cm | W: 2.72 cm | H: 1.05 cm

● black	Prod. no.	**1006599**	**7.00 GBP**
○ white	Prod. no.	**1006600**	**7.00 GBP**

external power adapter 48 V | 60 W

18 cm | Polycarbonate (PC)
L: 18 cm W: 4.5 cm H: 2.7 cm

○ white	Prod. no.	**1006613**	**51.00 GBP**

external power adapter 48 V | 150 W

19.1 cm | Metal/Polycarbonate (PC)
L: 19.1 cm | W: 8.8 cm | H: 3.55 cm

● black	Prod. no.	**1006614**	**111.00 GBP**

48 V feeder including integrated Casambi to Dali converter.

28 cm | Plastic PC
L: 28 cm | W: 2.30 cm | H: 4.4 cm

● black	Prod. no.	**1008382**	**343.00 GBP**
○ white	Prod. no.	**1008383**	**343.00 GBP**

Intrack LED driver, 48 VDC, 200 W, On/Off

28 cm | Plastic PC
L: 28 cm | W: 2.30 cm | H: 4.4 cm

● black	Prod. no.	**1007874**	**163.00 GBP**
○ white	Prod. no.	**1007875**	**163.00 GBP**

48 V SYSTEM Intrack LED driver 48 VDC, 100 W 3 m, incl. DALI through-wireable

29.8 cm | Plastic PC
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1010446**	**93.00 GBP**
○ white	Prod. no.	**1010447**	**93.00 GBP**

48 V SYSTEM Intrack LED driver 48 VDC | 250 W, incl. DALI through-wirable

26.8 cm | Polycarbonate (PC)
L: 26.8 cm, W: 2.2 cm, H: 4.35 cm

● black	Prod. no.	**1009012**	**119.00 GBP**
○ white	Prod. no.	**1009001**	**119.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

KALU 2.0
48 V, DALI



48 V | 250 mA
Total wattage: 9 W
Material: Aluminium

- Compatible only with the standard 48 V surface-mounted track

Down	1400 lm	2700 K	1450 lm	3000 K

Options	Prod. no.	GBP
● black 2700 K	**1010252**	**144.00**
● black 3000 K	**1010255**	**144.00**
○ white 2700 K	**1010254**	**144.00**
○ white 3000 K	**1010257**	**144.00**

Product	Prod. no.	GBP
Decorative ring		
○ white	**1010135**	**8.00**
● black	**1010136**	**8.00**
● gold	**1010138**	**8.00**
● copper	**1010139**	**8.00**
Lens		
○ transparent, 15°	**1010140**	**16.00**
○ transparent, 24°	**1010141**	**16.00**
○ transparent, 36°	**1010142**	**16.00**
○ transparent, 60°	**1010143**	**16.00**

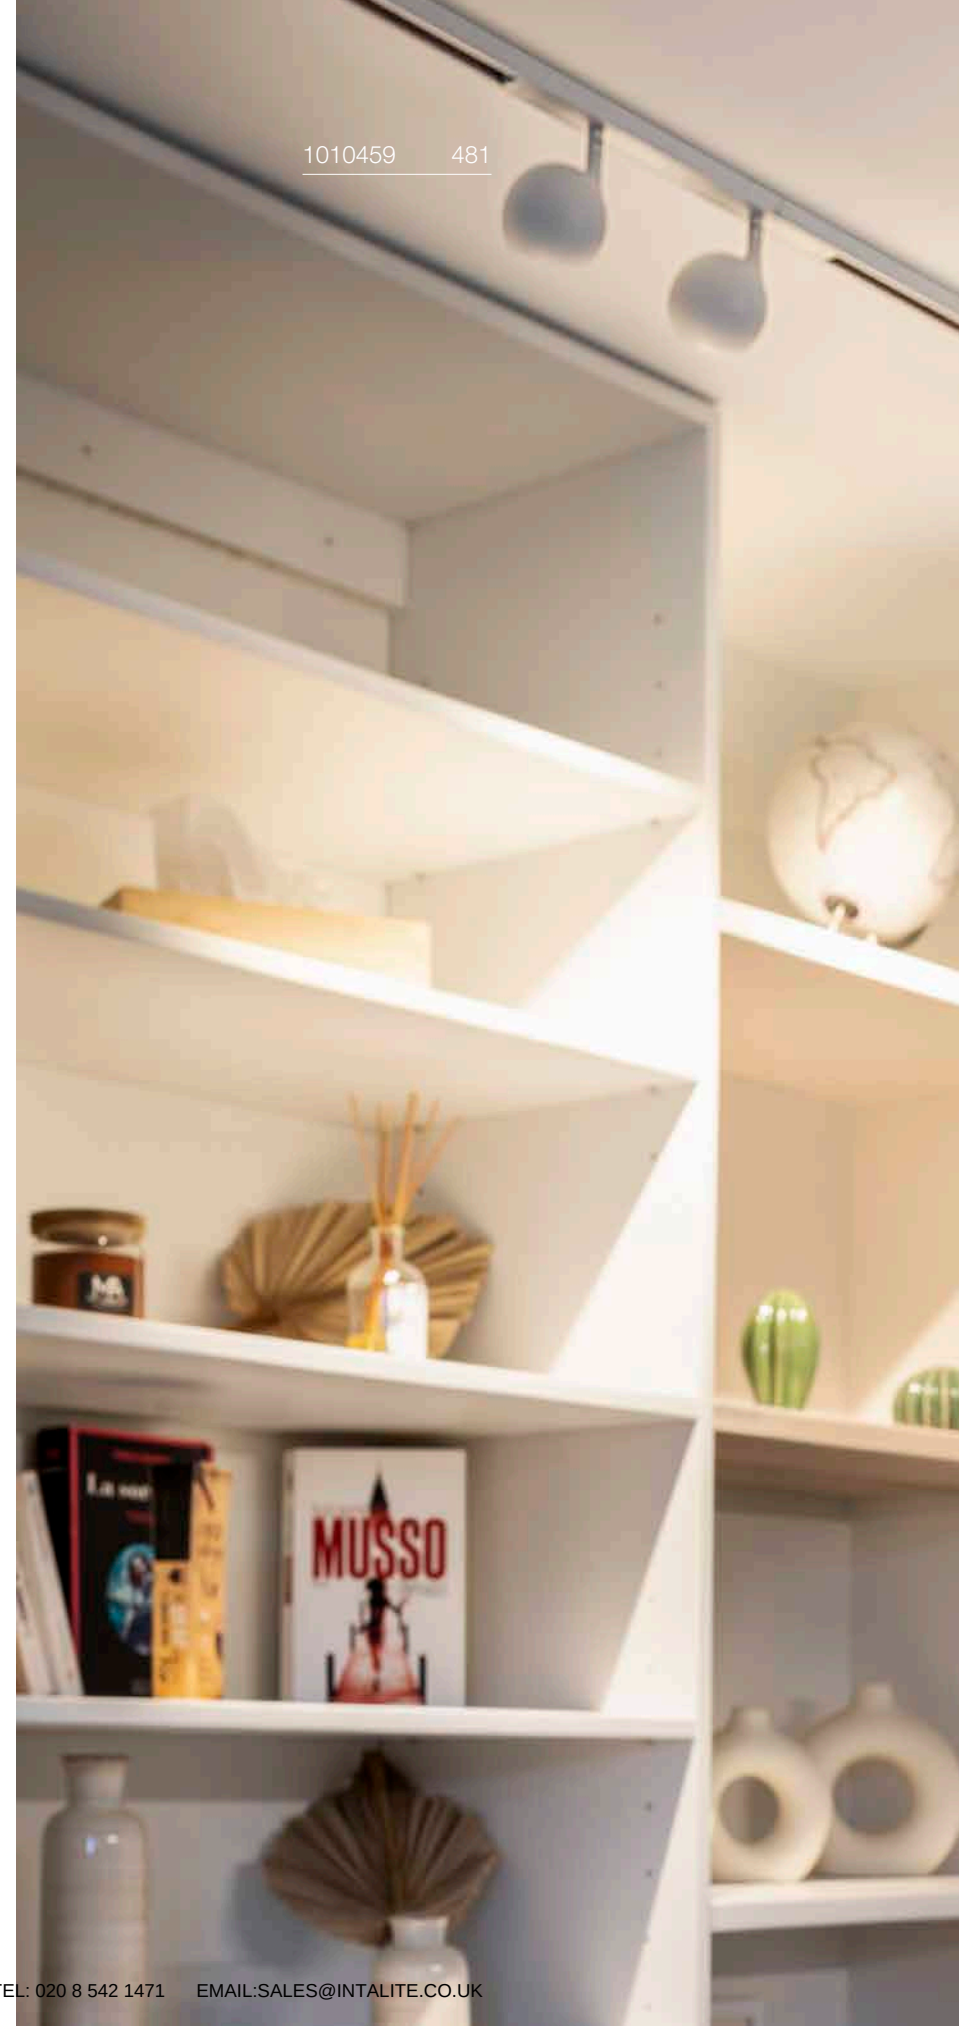

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LIGHT EYE® 2.0
48 V, DALI, Ø 7,5 cm



48 V | 250 mA
Total wattage: 10 W
Material: Aluminium

LED INSIDE CRI 90

Down	1150 lm | 2700 K	1200 lm | 3000 K

Options	Prod. no.	GBP
● black 2700 K	1010456	132.00
● black 3000 K	1010458	132.00
◐ white/black 2700 K	1010457	132.00
◐ white/black 3000 K	1010459	132.00

LIGHT EYE® 2.0
48 V, PD, DALI, Ø 7,5 cm



48 V | 250 mA
Total wattage: 10 W
Material: Aluminium

LED INSIDE CRI 90

Down	1150 lm | 2700 K	1200 lm | 3000 K

Options	Prod. no.	GBP
● black 2700 K	1010460	144.00
● black 3000 K	1010462	144.00
◐ white/black 2700 K	1010461	144.00
◐ white/black 3000 K	1010463	144.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010336 483

DYSKO
48 V, DALI



48 V | 150 mA
Total wattage: 5.6 W
Material: Plastic PC/Aluminium

- Compatible only with the standard 48 V surface-mounted track

750 lm|2700 K

Options	Prod. no.	GBP
black/gold	1010330	161.00
white/black	1010331	161.00

DYSKO
48 V, DALI



48 V | 150 mA
Total wattage: 5.6 W
Material: Plastic PC/Aluminium

750 lm|2700 K

Options	Prod. no.	GBP
black/gold	1010375	161.00
white/black	1010376	161.00

DYSKO
48 V, PD, DALI

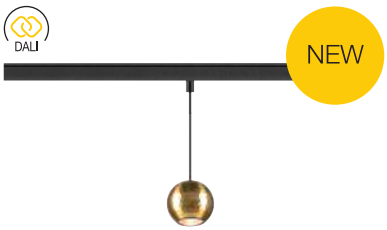



48 V | 150 mA
Total wattage: 5.6 W
Material: Plastic PC/Aluminium

750 lm|2700 K

Options	Prod. no.	GBP
black/gold	1010336	169.00
white/black	1010337	169.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRIP! FLAT
48 V, DALI

Dali IP20 340° 90° L70B50 UGR 15

48 V | 500 mA
Total wattage: 14.5 W
Material: Aluminium

INSIDE

Down	400 lm | 2700 K	430 lm | 3000 K

Options	Prod. no.	GBP
● black	1009016	237.00
◐ white/black	1009017	237.00

Product	Prod. no.	GBP
GRIP! FLAT decorative ring		
● black	1009102	27.00

GRIP! FLAT
48 V, PD, DALI

Dali IP20 L70B50 200 cm UGR 15

48 V | 500 mA
Total wattage: 14.5 W
Material: Aluminium

INSIDE

Down	400 lm | 2700 K	430 lm | 3000 K

Options	Prod. no.	GBP
● black	1009018	246.00
◐ white/black	1009019	246.00

Product	Prod. no.	GBP
GRIP! FLAT decorative ring		
● black	1009102	27.00

GRIP! FLAT
Felt shade Ø 50 cm x 6,2 cm



Ø: 50 cm
H: 6.2 cm

Options	Prod. no.	GBP
● black	1010403	118.00
● grey	1010404	118.00
● ochre	1010405	118.00

GRIP! FLAT
Felt shade Ø 50 cm x 0,6 cm

Ø: 50 cm
H: 0.6 cm

Options	Prod. no.	GBP
● black	1010406	84.00
● grey	1010407	84.00
● ochre	1010408	84.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® XS
48 V, DALI



48 V | 200 mA
Total wattage: 8.7 W
Material: Aluminium/Polycarbonate (PC)



● black

● black

○ white

◑ chrome

Options	GBP
All XS versions	**151.00**



○ white

● black

○ white

◑ chrome

Product	Prod. no.	GBP
Elliptical diffuser		
○ transparent	**1005612**	**4.00**
Prismatic diffuser		
○ transparent	**1005613**	**5.00**
Frosted diffuser		
○ frosted	**1005614**	**5.00**
Honeycomb diffuser		
● black	**1005615**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
Dali	2700 K	640	20°	16	**1006651**	
		620	40°	22	**1006654**	
		640	55°	25	**1006657**	
	3000 K	700	20°	16	**1006669**	
		670	40°	22	**1006672**	
		690	55°	25	**1006675**	
	4000 K	720	20°	16	**1006687**	
		700	40°	22	**1006690**	
		710	55°	25	**1006693**	
Dali	2700 K	670	20°	16	**1006652**	
		650	40°	22	**1006655**	
		670	55°	25	**1006658**	
	3000 K	730	20°	16	**1006670**	
		700	40°	22	**1006673**	
		720	55°	25	**1006676**	
	4000 K	750	20°	16	**1006688**	
		730	40°	22	**1006691**	
		740	55°	25	**1006694**	
Dali	2700 K	670	20°	16	**1006653**	
		650	40°	22	**1006656**	
		670	55°	25	**1006659**	
	3000 K	730	20°	16	**1006671**	
		700	40°	22	**1006674**	
		720	55°	25	**1006677**	
	4000 K	750	20°	16	**1006689**	
		730	40°	22	**1006692**	
		740	55°	25	**1006695**	
Dali	2700 K	640	20°	16	**1006660**	
		620	40°	22	**1006663**	
		640	55°	25	**1006666**	
	3000 K	700	20°	16	**1006678**	
		670	40°	22	**1006681**	
		690	55°	25	**1006684**	
	4000 K	720	20°	16	**1006696**	
		700	40°	22	**1006699**	
		710	55°	25	**1006702**	
Dali	2700 K	670	20°	16	**1006661**	
		650	40°	22	**1006664**	
		670	55°	25	**1006667**	
	3000 K	730	20°	16	**1006679**	
		700	40°	22	**1006682**	
		720	55°	25	**1006685**	
	4000 K	750	20°	16	**1006697**	
		730	40°	22	**1006700**	
		740	55°	25	**1006703**	
Dali	2700 K	670	20°	16	**1006662**	
		650	40°	22	**1006665**	
		670	55°	25	**1006668**	
	3000 K	730	20°	16	**1006680**	
		700	40°	22	**1006683**	
		720	55°	25	**1006686**	
	4000 K	750	20°	16	**1006698**	
		730	40°	22	**1006701**	
		740	55°	25	**1006704**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® S
48 V, DALI



48 V | 350 mA
Total wattage: 16 W
Material: Aluminium/Polycarbonate (PC)

Options	GBP
All S versions	**159.00**

⊕

Product	Prod. no.	GBP
Elliptical diffuser		
○ transparent	**1004786**	**4.00**
Prismatic diffuser		
○ transparent	**1004787**	**5.00**
Frosted diffuser		
○ frosted	**1004788**	**5.00**
Honeycomb diffuser		
● black	**1004789**	**8.00**



● black



○ white

● black

○ white

◑ chrome

● black

○ white

◑ chrome

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

		1000	20°	19	**1006705**	
	2700 K	970	40°	16	**1006708**	
		960	55°	19	**1006711**	
		1060	20°	19	**1006723**	
Dali	3000 K	1030	40°	19	**1006726**	
		1030	55°	22	**1006729**	
		1280	20°	22	**1006741**	
	4000 K	1150	40°	19	**1006744**	
		1130	55°	19	**1006747**	
		1020	20°	19	**1006706**	
	2700 K	1050	40°	19	**1006709**	
		1030	55°	22	**1006712**	
		1120	20°	19	**1006724**	
Dali	3000 K	1120	40°	19	**1006727**	
		1120	55°	22	**1006730**	
		1350	20°	22	**1006742**	
	4000 K	1230	40°	19	**1006745**	
		1220	55°	22	**1006748**	
		960	20°	19	**1006707**	
	2700 K	1000	40°	16	**1006710**	
		980	55°	19	**1006713**	
		1050	20°	19	**1006725**	
Dali	3000 K	1050	40°	19	**1006728**	
		1050	55°	22	**1006731**	
		1350	20°	22	**1006743**	
	4000 K	1200	40°	19	**1006746**	
		1170	55°	22	**1006749**	
		1000	20°	19	**1006714**	
	2700 K	970	40°	16	**1006717**	
		960	55°	19	**1006720**	
		1060	20°	19	**1006732**	
Dali	3000 K	1030	40°	19	**1006735**	
		1030	55°	22	**1006738**	
		1280	20°	22	**1006750**	
	4000 K	1150	40°	19	**1006753**	
		1130	55°	19	**1006756**	
		1020	20°	19	**1006715**	
	2700 K	1050	40°	19	**1006718**	
		1030	55°	22	**1006721**	
		1120	20°	19	**1006733**	
Dali	3000 K	1120	40°	19	**1006736**	
		1120	55°	22	**1006739**	
		1350	20°	22	**1006751**	
	4000 K	1230	40°	19	**1006754**	
		1220	55°	22	**1006757**	
		960	20°	19	**1006716**	
	2700 K	1000	40°	16	**1006719**	
		980	55°	19	**1006722**	
		1050	20°	19	**1006734**	
Dali	3000 K	1050	40°	19	**1006737**	
		1050	55°	22	**1006740**	
		1350	20°	22	**1006752**	
	4000 K	1200	40°	19	**1006755**	
		1170	55°	22	**1006758**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® XS
48 V, DALI

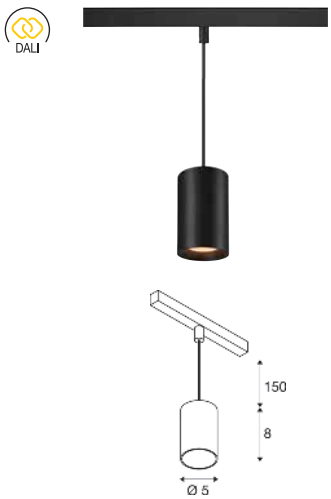

48 V | 200 mA
Total wattage: 8.7 W
Material: Aluminium/Polycarbonate (PC)

Options	GBP
All XS versions	168.00

● black

● black

○ white

◑ chrome

● black



○ white

○ white

◑ chrome

Product	Prod. no.	GBP
Elliptical diffuser		
○ transparent	1005612	4.00
Prismatic diffuser		
○ transparent	1005613	5.00
Frosted diffuser		
○ frosted	1005614	5.00
Honeycomb diffuser		
● black	1005615	8.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

		640	20°	16	**1006759**	
	2700 K	620	40°	22	**1006762**	
		640	55°	25	**1006765**	
		700	20°	16	**1006777**	
Dali	3000 K	670	40°	22	**1006780**	
		690	55°	25	**1006783**	
		720	20°	16	**1006795**	
	4000 K	700	40°	22	**1006798**	
		710	55°	25	**1006801**	
		670	20°	16	**1006760**	
	2700 K	650	40°	22	**1006763**	
		670	55°	25	**1006766**	
		730	20°	16	**1006778**	
Dali	3000 K	700	40°	22	**1006781**	
		720	55°	25	**1006784**	
		750	20°	16	**1006796**	
	4000 K	730	40°	22	**1006799**	
		740	55°	25	**1006802**	
		670	20°	16	**1006761**	
	2700 K	650	40°	22	**1006764**	
		670	55°	25	**1006767**	
		730	20°	16	**1006779**	
Dali	3000 K	700	40°	22	**1006782**	
		720	55°	25	**1006785**	
		750	20°	16	**1006797**	
	4000 K	730	40°	22	**1006800**	
		740	55°	25	**1006803**	
		640	20°	16	**1006768**	
	2700 K	620	40°	22	**1006771**	
		640	55°	25	**1006774**	
		700	20°	16	**1006786**	
Dali	3000 K	670	40°	22	**1006789**	
		690	55°	25	**1006792**	
		720	20°	16	**1006804**	
	4000 K	700	40°	22	**1006807**	
		710	55°	25	**1006810**	
		670	20°	16	**1006769**	
	2700 K	650	40°	22	**1006772**	
		670	55°	25	**1006775**	
		730	20°	16	**1006787**	
Dali	3000 K	700	40°	22	**1006790**	
		720	55°	25	**1006793**	
		750	20°	16	**1006805**	
	4000 K	730	40°	22	**1006808**	
		740	55°	25	**1006811**	
		670	20°	16	**1006770**	
	2700 K	650	40°	22	**1006773**	
		670	55°	25	**1006776**	
		730	20°	16	**1006788**	
Dali	3000 K	700	40°	22	**1006791**	
		720	55°	25	**1006794**	
		750	20°	16	**1006806**	
	4000 K	730	40°	22	**1006809**	
		740	55°	25	**1006812**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® S
48 V, DALI

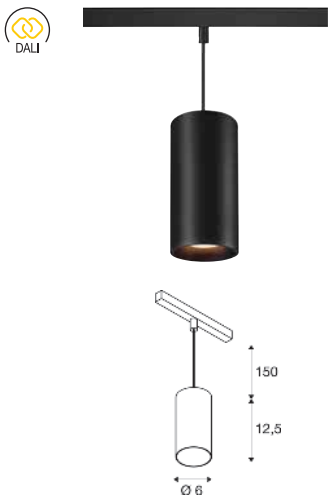

48 V | 350 mA
Total wattage: 16 W
Material: Aluminium/Polycarbonate (PC)

Options	GBP
All S versions	176.00

● black

● black

○ white

◑ chrome

⊕

Product	Prod. no.	GBP
Elliptical diffuser		
○ transparent	1004786	4.00
Prismatic diffuser		
○ transparent	1004787	5.00
Frosted diffuser		
○ frosted	1004788	5.00
Honeycomb diffuser		
● black	1004789	8.00



○ white

● black

○ white

◑ chrome

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
Dali	2700 K	1000	20°	19	**1006813**	
		970	40°	16	**1006816**	
		960	55°	19	**1006819**	
	3000 K	1060	20°	19	**1006831**	
		1030	40°	19	**1006834**	
		1030	55°	22	**1006837**	
	4000 K	1280	20°	22	**1006849**	
		1150	40°	19	**1006852**	
		1130	55°	19	**1006855**	
Dali	2700 K	1020	20°	19	**1006814**	
		1050	40°	19	**1006817**	
		1030	55°	22	**1006820**	
	3000 K	1120	20°	19	**1006832**	
		1120	40°	19	**1006835**	
		1120	55°	22	**1006838**	
	4000 K	1350	20°	22	**1006850**	
		1230	40°	19	**1006853**	
		1220	55°	22	**1006856**	
Dali	2700 K	960	20°	19	**1006815**	
		1000	40°	16	**1006818**	
		980	55°	19	**1006821**	
	3000 K	1050	20°	19	**1006833**	
		1050	40°	19	**1006836**	
		1050	55°	22	**1006839**	
	4000 K	1350	20°	22	**1006851**	
		1200	40°	19	**1006854**	
		1170	55°	22	**1006857**	
Dali	2700 K	1000	20°	19	**1006822**	
		970	40°	16	**1006825**	
		960	55°	19	**1006828**	
	3000 K	1060	20°	19	**1006840**	
		1030	40°	19	**1006843**	
		1030	55°	22	**1006846**	
	4000 K	1280	20°	22	**1006858**	
		1150	40°	19	**1006861**	
		1130	55°	19	**1006864**	
Dali	2700 K	1020	20°	19	**1006823**	
		1050	40°	19	**1006826**	
		1030	55°	22	**1006829**	
	3000 K	1120	20°	19	**1006841**	
		1120	40°	19	**1006844**	
		1120	55°	22	**1006847**	
	4000 K	1350	20°	22	**1006859**	
		1230	40°	19	**1006862**	
		1220	55°	22	**1006865**	
Dali	2700 K	960	20°	19	**1006824**	
		1000	40°	16	**1006827**	
		980	55°	19	**1006830**	
	3000 K	1050	20°	19	**1006842**	
		1050	40°	19	**1006845**	
		1050	55°	22	**1006848**	
	4000 K	1350	20°	22	**1006860**	
		1200	40°	19	**1006863**	
		1170	55°	22	**1006866**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006633 497
1006654 487
1006627 495

IN-LINE 22
48 V, opal, DALI

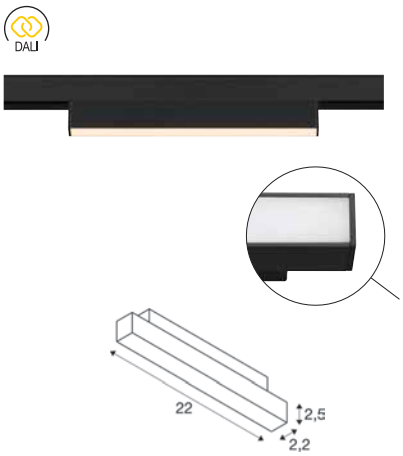

48 V | 350 mA
Total wattage: 7.3 W
Material: Aluminium

LED INSIDE

540 lm | 2700 K	570 lm | 3000 K	680 lm | 4000 K

Options	Prod. no.	GBP
● black 2700 K	1006615	108.00
● black 3000 K	1006617	108.00
● black 4000 K	1006619	108.00
○ white 2700 K	1006616	108.00
○ white 3000 K	1006618	108.00
○ white 4000 K	1006620	108.00

IN-LINE 22
48 V, Darklight Reflector, DALI

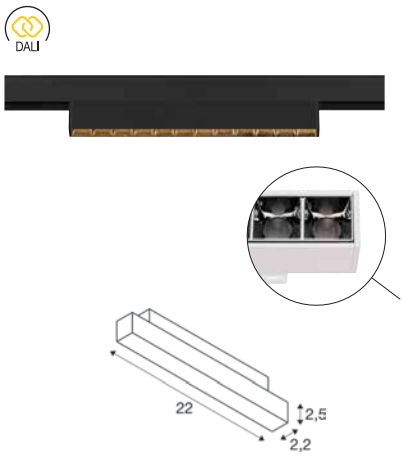

48 V | 350 mA
Total wattage: 7.3 W
Material: Aluminium/Polycarbonate (PC)

LED INSIDE

580 lm | 2700 K	610 lm | 3000 K	650 lm | 4000 K

Options	Prod. no.	GBP
● black 2700 K	1006627	121.00
● black 3000 K	1006629	121.00
● black 4000 K	1006631	120.00
○ white 2700 K	1006628	121.00
○ white 3000 K	1006630	121.00
○ white 4000 K	1006632	120.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006633 497
1006654 487

IN-LINE 44
48 V, opal, DALI

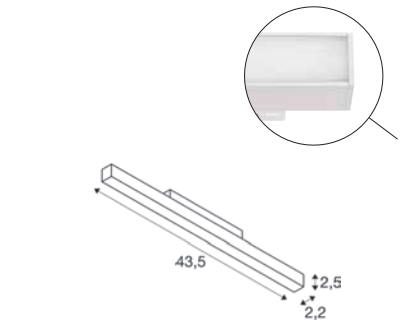

Dali | IP20 | IK02 | 95° | 50000 h L80B50 | UGR 28

48 V | 350 mA
Total wattage: 14 W
Material: Aluminium/Polycarbonate (PC)

INSIDE

1140 lm	2700 K	1180 lm	3000 K	1450 lm	4000 K

Options	Prod. no.	GBP
● black 2700 K	1006621	158.00
● black 3000 K	1006623	158.00
● black 14000 K	1006625	158.00
○ white 2700 K	1006622	158.00
○ white 4000 K	1006626	158.00
○ white 3000 K	1006624	158.00

IN-LINE 44
48 V, Darklight Reflector, DALI

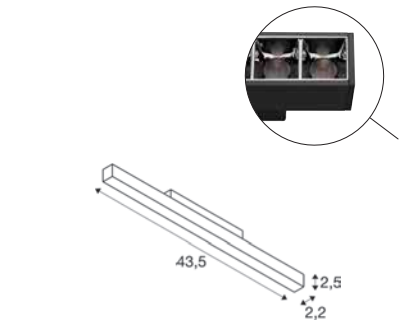

Dali | IP20 | IK02 | 35° | 50000 h L80B50 | UGR 16

48 V | 350 mA
Total wattage: 14 W
Material: Aluminium

INSIDE

1180 lm	2700 K	1230 lm	3000 K	1250 lm	4000 K

Options	Prod. no.	GBP
● black 2700 K	1006633	171.00
● black 3000 K	1006635	171.00
● black 4000 K	1006637	171.00
○ white 2700 K	1006634	171.00
○ white 3000 K	1006636	171.00
○ white 4000 K	1006638	171.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006682 487
1006648 499

IN-LINE 24
48 V, Move, Darklight Reflector, DALI

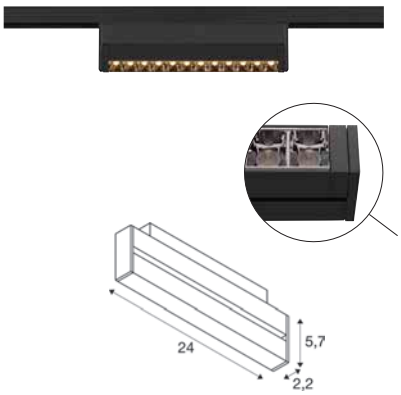

48 V | 350 mA
Total wattage: 7.3 W
Material: Aluminium

LED INSIDE CRI 90

580 lm | 2700 K | 610 lm | 3000 K | 650 lm | 4000 K

Options	Prod. no.	GBP
● black 2700 K	1006639	129.00
● black 3000 K	1006641	129.00
● black 4000 K	1006643	129.00
○ white 2700 K	1006640	129.00
○ white 3000 K	1006642	129.00
○ white 4000 K	1006644	129.00

IN-LINE 46
48 V, Move, Darklight Reflector, DALI

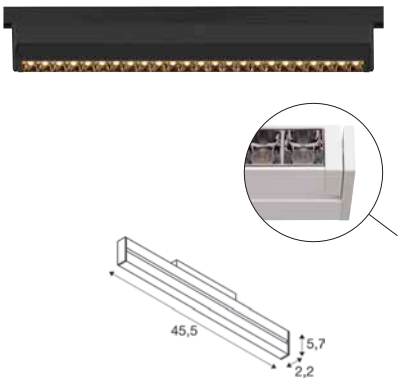

48 V | 350 mA
Total wattage: 14 W
Material: Aluminium

LED INSIDE CRI 90

1180 lm | 2700 K | 1230 lm | 3000 K | 1250 lm | 4000 K

Options	Prod. no.	GBP
● black 2700 K	1006645	180.00
● black 3000 K	1006647	180.00
● black 4000 K	1006649	180.00
○ white 2700 K	1006646	180.00
○ white 3000 K	1006648	180.00
○ white 4000 K	1006650	180.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008960 501

FIX-IT!
48 V, DALI, Round,
standard surface-mounted track





48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

Down	800 lm | 2700 K	850 lm | 3000 K

Options	Prod. no.	GBP
black 2700 K	1008946	94.00
black 3000 K	1008950	94.00
white/black 2700 K	1008945	94.00
white/black 3000 K	1008949	94.00
gold/black 2700 K	1008947	94.00
gold/black 3000 K	1008951	94.00
bronze/black 2700 K	1008948	94.00
bronze/black 3000 K	1008952	94.00

Product	Prod. no.	GBP
Round inlay		
white	1008993	26.00
black	1008994	26.00
gold	1008995	26.00
bronze	1008996	26.00

FIX-IT!
48 V, DALI, Round,
standard surface-mounted track





48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

Down	3 lm | 2000 K – 480 lm | 3000 K

Options	Prod. no.	GBP
black	1008954	94.00
white/black	1008953	94.00
gold/black	1008955	94.00
bronze/black	1008956	94.00

Product	Prod. no.	GBP
Round inlay		
white	1008993	26.00
black	1008994	26.00
gold	1008995	26.00
bronze	1008996	26.00

FIX-IT!
48 V, DALI, Round,
deep surface-mounted track



48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

Down	800 lm | 2700 K	850 lm | 3000 K

Options	Prod. no.	GBP
black 2700 K	1008958	94.00
black 3000 K	1008962	94.00
white/black 2700 K	1008957	94.00
white/black 3000 K	1008961	94.00
gold/black 2700 K	1008959	94.00
gold/black 83000 K	1008963	94.00
bronze/black 2700 K	1008960	94.00
bronze/black 3000 K	1008964	94.00

Product	Prod. no.	GBP
Round inlay		
white	1008993	26.00
black	1008994	26.00
gold	1008995	26.00
bronze	1008996	26.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FIX-IT!
48 V, DALI, Round,
deep surface-mounted track



Dali | IP20 | 36° | 50000 h L80B20 | UGR 19

48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

LED INSIDE | CRI 90

Down 3 lm|2000 K – 480 lm|3000 K

Options	Prod. no.	GBP
black	1008966	94.00
white/black	1008965	94.00
gold/black	1008967	94.00
bronze/black	1008968	94.00

Product	Prod. no.	GBP
Round inlay		
white	1008993	26.00
black	1008994	26.00
gold	1008995	26.00
bronze	1008996	26.00

FIX-IT!
48 V, DALI, Square,
standard surface-mounted track



Dali | IP20 | 36° | 50000 h L80B20 | UGR 16

48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

LED INSIDE | CRI 90

Down 800 lm|2700 K | 865 lm|3000 K

Options	Prod. no.	GBP
black 2700 K	1008970	94.00
black 3000 K	1008974	94.00
white/black 2700 K	1008969	94.00
white/black 3000 K	1008973	94.00
gold/black 2700 K	1008971	94.00
gold/black 3000 K	1008975	94.00
bronze/black 700 K	1008972	94.00
bronze/black 3000 K	1008976	94.00

Product	Prod. no.	GBP
Square inlay		
white	1008997	26.00
black	1008998	26.00
gold	1008999	26.00
bronze	1009000	26.00

FIX-IT!
48 V, DALI, Square,
standard surface-mounted track



Dali | IP20 | 36° | 50000 h L80B20 | UGR 19

48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

LED INSIDE | CRI 90

Down 3 lm|2000 K – 495 lm|3000 K

Options	Prod. no.	GBP
black	1008978	94.00
white/black	1008977	94.00
gold/black	1008979	94.00
bronze/black	1008980	94.00

Product	Prod. no.	GBP
Square inlay		
white	1008997	26.00
black	1008998	26.00
gold	1008999	26.00
bronze	1009000	26.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FIX-IT!
48 V, DALI, Square, deep surface-mounted track

DALI

NEW



Dali | IP20 | 36° | 50000 h L80B20 | UGR 16

48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard

LED INSIDE | CRI 90

Down	800 lm | 2700 K	865 lm | 3000 K

Options	Prod. no.	GBP
black 2700 K	1008982	94.00
black 3000 K	1008986	94.00
white/black 2700 K	1008981	94.00
white/black 3000 K	1008985	94.00
gold/black 2700 K	1008983	94.00
gold/black 3000 K	1008987	94.00
bronze/black 2700 K	1008984	94.00
bronze/black 3000 K	1008988	94.00

Product	Prod. no.	GBP
Square inlay		
white	1008997	26.00
black	1008998	26.00
gold	1008999	26.00
bronze	1009000	26.00

FIX-IT!
48 V, DALI, Square, deep surface-mounted track

DIM TO WARM | DALI

NEW



Dali | IP20 | 36° | 50000 h L80B20 | UGR 19

48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard

LED INSIDE | CRI 90

Down	3 lm | 2000 K	–	495 lm | 3000 K

Options	Prod. no.	GBP
black	1008990	94.00
white/black	1008989	94.00
gold/black	1008991	94.00
bronze/black	1008992	94.00

Product	Prod. no.	GBP
Square inlay		
white	1008997	26.00
black	1008998	26.00
gold	1008999	26.00
bronze	1009000	26.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRIP! S

48 V, DALI, standard track,
Ø 3 cm



48 V | 250 mA
Total wattage: 9.8 W
Material: Aluminium

- Compatible only with the standard 48 V surface-mounted track
- Honeycomb accessories included

Down	530 lm | 2700 K	610 lm | 3000 K

Options	Prod. no.	GBP
black/gold 530 lm | 2700 K	1008407	145.00
black/gold 610 lm | 3000 K	1008412	145.00
white/black 530 lm | 2700 K	1008405	145.00
white/black 610 lm | 3000 K	1008410	145.00
gold/black 530 lm | 2700 K	1008409	145.00
gold/black 610 lm | 3000 K	1008414	145.00
bronze/black 530 lm | 2700 K	1008408	145.00
bronze/black 610 lm | 3000 K	1008413	145.00

Product	Prod. no.	GBP
Decorative ring		
white	1008488	15.00
black	1008489	15.00
nickel	1008490	15.00
gold	1008491	15.00

GRIP! S
48 V, DALI, standard track,
Ø 3 cm



Dali IP20 IK02 29° 330° 90°
50 000 h L80B20 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: Aluminium

- Compatible only with the standard 48 V surface-mounted track
- Honeycomb accessories included

INSIDE CRI 90

Down 350 lm | 2000 K – 3000 K

Options	Prod. no.	GBP
black/gold	1008417	145.00
white/black	1008415	145.00
gold/black	1008419	145.00
bronze/black	1008418	145.00

⊕

Product	Prod. no.	GBP
Decorative ring		
white	1008488	15.00
black	1008489	15.00
nickel	1008490	15.00
gold	1008491	15.00

GRIP! S
48 V, DALI, deep & recessed track,
Ø 3 cm

NEW



Dali IP20 IK02 29° 340° 90°
50 000 h L80B10 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: Aluminium

- Honeycomb accessories included

INSIDE CRI 90

Down 590 lm | 2700 K | 620 lm | 3000 K

Options	Prod. no.	GBP
black/gold 590 lm | 2700 K	1009026	144.00
black/gold 620 lm | 3000 K	1009027	144.00
white/black 590 lm | 2700 K	1009024	144.00
white/black 620 lm | 3000 K	1009025	144.00
gold/black 590 lm | 2700 K	1009030	144.00
gold/black 620 lm | 3000 K	1009031	144.00
bronze/black 590 lm | 2700 K	1009028	144.00
bronze/black 620 lm | 3000 K	1009029	144.00

⊕

Product	Prod. no.	GBP
Decorative ring		
white	1008488	15.00
black	1008489	15.00
nickel	1008490	15.00
gold	1008491	15.00

GRIP! S
48 V, DALI, deep & recessed track,
Ø 3 cm

NEW



Dali IP20 IK02 29° 340° 90°
50 000 h L80B20 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: Aluminium

- Honeycomb accessories included

INSIDE CRI 90

Down 350 lm | 2000 K – 3000 K

Options	Prod. no.	GBP
black/gold	1009033	144.00
white/black	1009032	144.00
gold/black	1009035	144.00
bronze/black	1009034	144.00

⊕

Product	Prod. no.	GBP
Decorative ring		
white	1008488	15.00
black	1008489	15.00
nickel	1008490	15.00
gold	1008491	15.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008456 509

GRIP! S

48 V, DALI, deep & recessed track, Ø 3 cm

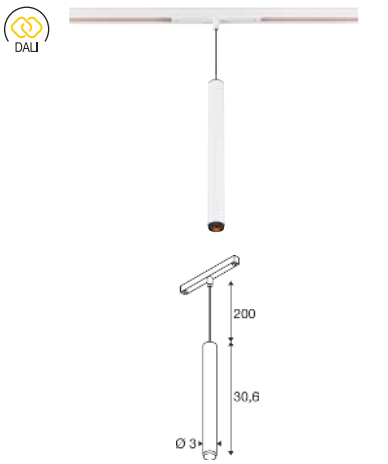

48 V | 250 mA
Total wattage: 9.8 W
Material: Aluminium

- Honeycomb accessories included

Down	530 lm	2700 K	610 lm	3000 K

Options	Prod. no.	GBP
black/gold 530 lm | 2700 K	1008456	171.00
black/gold 610 lm | 3000 K	1008461	171.00
white/black 530 lm | 2700 K	1008454	171.00
white/black 610 lm | 3000 K	1008459	171.00
gold/black 530 lm | 2700 K	1008458	171.00
gold/black 610 lm | 3000 K	1008463	170.00
bronze/black 530 lm | 2700 K	1008457	171.00
bronze/black 610 lm | 3000 K	1008462	170.00

Product	Prod. no.	GBP
Decorative ring		
white	1008488	15.00
black	1008489	15.00
nickel	1008490	15.00
gold	1008491	15.00

GRIP! L

48 V, PD, DALI, Ø 3 cm

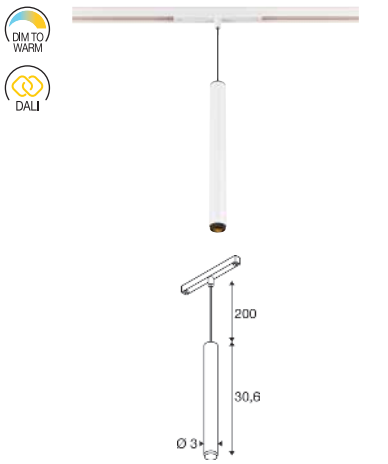

48 V | 250 mA
Total wattage: 9.8 W
Material: Aluminium

- Honeycomb accessories included

Down	350 lm	2000 K	3000 K

Options	Prod. no.	GBP
black/gold	1008466	171.00
white/black	1008464	171.00
gold/black	1008468	171.00
bronze/black	1008467	171.00

Product	Prod. no.	GBP
Decorative ring		
white	1008488	15.00
black	1008489	15.00
nickel	1008490	15.00
gold	1008491	15.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LALU® SET
48 V, PD, LED base, DALI

48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- including colour temperature switch 2700 K/3000 K
- with black adapter

LED INSIDE CRI 90

Down	500 lm | 2700 K	550 lm | 3000 K

Options	Prod. no.	GBP
● black	**1010801**	**218.00**

LALU® SET
48 V, PD, LED base, DALI

48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- including colour temperature switch 2700 K/3000 K
- with black adapter

Down	600 lm | 2700 K	650 lm | 3000 K

Options	Prod. no.	GBP
● black	1010802	200.00

LALU® SET
48 V, PD, LED base, DALI



48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- including colour temperature switch 2700 K/3000 K
- with black adapter

Down	650 lm | 2700 K	700 lm | 3000 K

Options	Prod. no.	GBP
● black	1010803	216.00

LALU® SET
48 V, PD, LED base, DALI



48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- including colour temperature switch 2700 K/3000 K
- with black adapter

Down	600 lm | 2700 K	650 lm | 3000 K

Options	Prod. no.	GBP
● black	1010804	205.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DESIGN YOUR 48 V SYSTEM

The SLV 48 V system is a unique 3D low-voltage track system that can be mounted on both ceilings and walls – for maximum design freedom. Select your track version in the appropriate length, desired colour and preferred installation type. Choose the recessed version or one of the two surface-mounted versions. Specially designed for the SLV 48 V system: the NUMINOS®, IN-LINE and GRIP! spots or LALU® Pendant lights are particularly flexible and provide the perfect setting for your surroundings.

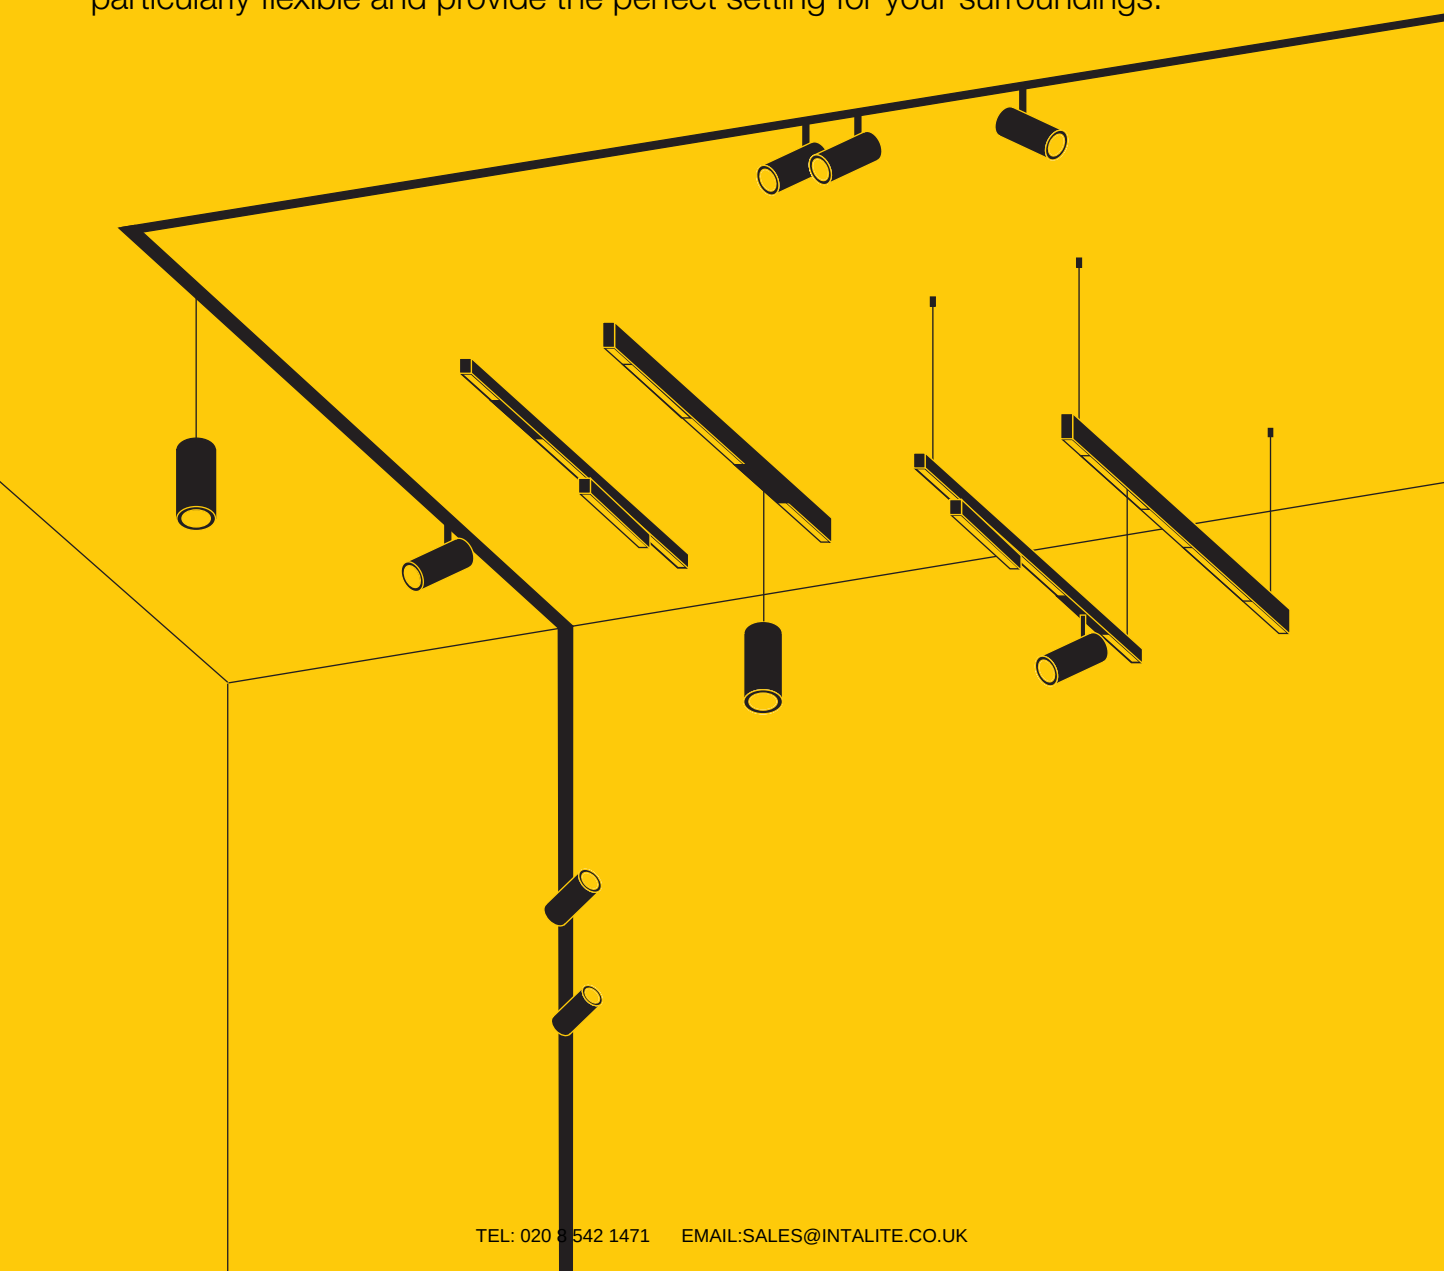

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CHOOSE YOUR PREFERRED INSTALLATION

SURFACE-MOUNTED

RECESSED



CHOOSE YOUR TRACK

SURFACE-MOUNTED TRACK STANDARD

SURFACE-MOUNTED TRACK DEEP



RECESSED TRACK FOR PLASTER CEILINGS



CHOOSE YOUR ACCESSORIES

VARIOUS CONNECTORS, COVERS, SUSPENSIONS, POWER ADAPTERS, ETC.

CHOOSE YOUR LIGHTS

E.G. NUMINOS® SPOT AND PENDANT LIGHT

E.G. IN-LINE, IN-LINE DARKLIGHT REFLECTOR AND IN-LINE MOVE

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1002695 523

SOCKET

ASMARA | 520

SOCKET

TELESKOP | 520

SOCKET

COSMIC | 521

LED

DURNO | 523

LED

NOBLO® SPOT | 523

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TENSEO
Low-voltage cable 4 mmA²

	1000 cm	1000 cm	1000 cm
Max. current (A)	25 A max.	25 A max.	25 A max.
Colour	● black	○ white	○ Transparent
Material	Copper/Plastic	Copper/Plastic	Copper/Plastic
L (cm)	1000	1000	1000
Prod. no.	**1002602**	**1002603**	**1002604**
GBP	**26.00**	**26.00**	**26.00**

	2000 cm	2000 cm	2000 cm
Max. current (A)	25 A max.	25 A max.	25 A max.
Colour	● black	○ white	○ Transparent
Material	Copper/Plastic	Copper/Plastic	Copper/Plastic
L (cm)	2000	2000	2000
Prod. no.	**139030**	**139031**	**139024**
GBP	**42.00**	**42.00**	**42.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TENSEO
Low-voltage cable 6 mmA²

	2000 cm	2000 cm	2000 cm
Max. current (A)	25 A max.	25 A max.	25 A max.
Colour	● black	○ white	○ Transparent
Material	Copper/Plastic	Copper/Plastic	Copper/Plastic
L (cm)	2000	2000	2000
Prod. no.	**139050**	**139051**	**139026**
GBP	**50.00**	**50.00**	**50.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

12V AC | 50VA conventional

Steel/Brass
H: 11 cm

● black	Prod. no.	**1002691**	**96.00 GBP**
○ white	Prod. no.	**1002692**	**96.00 GBP**
◑ chrome	Prod. no.	**1002693**	**99.00 GBP**

12V AC | 105VA conventional

Brass/Glass
H: 11 cm

○ white	Prod. no.	**138981**	**116.00 GBP**
◑ chrome	Prod. no.	**138982**	**127.00 GBP**

12V AC | 210VA conventional

Steel/Brass
H: 11 cm

○ white	Prod. no.	**138991**	**175.00 GBP**
◑ chrome	Prod. no.	**138992**	**183.00 GBP**

Cable tensioner

Brass
H: 11 cm

● black	Prod. no.	**181530**	**25.00 GBP**
○ white	Prod. no.	**181531**	**25.00 GBP**
◑ chrome	Prod. no.	**181532**	**27.00 GBP**

Wall bracket

3 cm | Steel/Brass
L: 3 cm

● black	Prod. no.	**186300**	**25.00 GBP**
○ white	Prod. no.	**186301**	**25.00 GBP**
◑ chrome	Prod. no.	**186302**	**27.00 GBP**

Diverter 6 cm

Steel/Brass
H: 6 cm

● black	Prod. no.	**186330**	**22.00 GBP**
○ white	Prod. no.	**186331**	**22.00 GBP**
◑ chrome	Prod. no.	**186332**	**25.00 GBP**

Diverter

Steel/Brass
H: 16 cm

● black	Prod. no.	**186340**	**25.00 GBP**
○ white	Prod. no.	**186341**	**25.00 GBP**
◑ chrome	Prod. no.	**186342**	**27.00 GBP**

Wall bracket 10 cm

Steel/Brass
H: 11.5 cm
With clamping device

● black	Prod. no.	**186310**	**35.00 GBP**
○ white	Prod. no.	**186311**	**35.00 GBP**
◑ chrome	Prod. no.	**186312**	**37.00 GBP**

Ceiling diverter

Steel/Brass
H: 16 cm

● black	Prod. no.	**186640**	**79.00 GBP**
○ white	Prod. no.	**186641**	**79.00 GBP**
◑ chrome	Prod. no.	**186642**	**85.00 GBP**

Feed-in

Brass
H: 1.8 cm
max. 25 A

● black	Prod. no.	**186350**	**11.00 GBP**
○ white	Prod. no.	**186351**	**11.00 GBP**
◑ chrome	Prod. no.	**186352**	**12.00 GBP**

Insulating connector

6.4 cm | Aluminium/Plastic
L: 6.4 cm

● black	Prod. no.	**186360**	**20.00 GBP**
○ white	Prod. no.	**186361**	**20.00 GBP**
◑ chrome	Prod. no.	**186362**	**22.00 GBP**

Electrical spacer

Brass
H: 9 cm

● black	Prod. no.	**1002700**	**40.00 GBP**
○ white	Prod. no.	**1002701**	**40.00 GBP**
◑ chrome	Prod. no.	**1002702**	**49.00 GBP**

Spacer

Aluminium
W: 9.00 cm

● black	Prod. no.	**1002703**	**49.00 GBP**
○ white	Prod. no.	**1002704**	**49.00 GBP**
◑ chrome	Prod. no.	**1002705**	**54.00 GBP**

Suspension set 2m

Steel/Aluminium
W: 18.60 cm

● black	Prod. no.	**1002697**	**35.00 GBP**
○ white	Prod. no.	**1002698**	**35.00 GBP**
◑ chrome	Prod. no.	**1002699**	**37.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ASMARA
LV, QR-C51

IP20 90°

12V AC
Material: Stainless steel

SOCKET INSIDE 35 W

Base: 1xGX5.5

Options	Prod. no.	GBP
● black	**139070**	**25.00**
○ white	**139071**	**25.00**
◑ chrome	**139072**	**27.00**

GU5.3 | 6 W | 36°
460 lm | 3000 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1001575 30.00 GBP

TELESKOP
LV, QR-C51

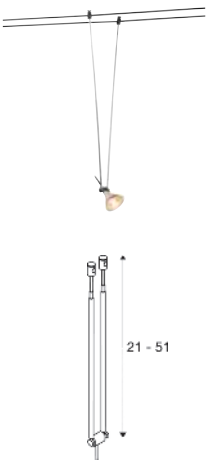

IP20 90°

12V AC
Material: Steel/Brass

- Telescope adjustable from 21-51 cm

SOCKET INSIDE 20 W

Base: 1xGX5.5

Options	Prod. no.	GBP
● black	**139080**	**29.00**
○ white	**139081**	**29.00**
◑ chrome	**139082**	**32.00**

GU5.3 | 6 W | 36°
450 lm | 2700 K | EEC = G
6 kW/1000h

Prod. no.: 1001574 30.00 GBP

COSMIC
LV, QR-C51

139090 521



12V AC
Material: Steel/Brass

Base: 1xGX5.3

Options	Prod. no.	GBP
● black	**139090**	**35.00**
○ white	**139091**	**35.00**
◑ chrome	**139092**	**37.00**

GU5.3 | 6 W | 36°
450 lm | 2700 K | EEC = G
6 kW/1000h

Prod. no.: **1001574** **30.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1002862 523

DURNO
LV



12V AC
Total wattage: 6 W
Material: Aluminium/Stainless steel

LED INSIDE CRI 80

360 lm | 2700 K

Options	Prod. no.	GBP
● black	**1002861**	**71.00**
○ white	**1002862**	**71.00**
◑ Chrome/Stainless steel	**1002863**	**75.00**

NOBLO® SPOT
LV, Rope Track



12V AC
Total wattage: 8.5 W
Material: Aluminium

LED INSIDE CRI 80

420 lm
450 lm | 2700 K

Options	Prod. no.	GBP
● black 420 lm	**1002694**	**69.00**
○ white 450 lm	**1002695**	**69.00**
◑ chrome 450 lm	**1002696**	**73.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010318 557
KEES

QUIMERA | 533

FORCHINI M 40 TRACK | 535

LALU® SET | 537–539

PURI 2.0 TUBE | 541–543

PURI 2.0 CONE | 541–543

PURI 2.0 DOME | 541–543

PURI 2.0 | 544

PURI TRACK | 547

GRIP! | 549–553

DYSKO | 557

LIGHT EYE® | 558–561

LIGHT EYE® 2.0 | 562–563

KALU 2.0 | 565

KALU TRACK | 565

GRIP! FLAT | 567

NOBLO® SPOT | 568–569

ASTO TUBE | 570–571

PARA CONE GL | 573

PARA CONE 14 | 573

HELIA 50 TRACK | 575

PANEL TRACK | 575

ENOLA® C TRACK | 576

ENOLA® B TRACK | 577

ENOLA® B | 577

BIMA | 579

EURO SPOT TRACK | 580

ALTRA DICE TRACK | 581

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

WACHTEL

1-phase
Surface-mounted track

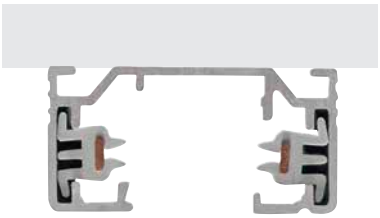

	100 cm	100 cm	100 cm
Nominal voltage (V)	220-240 V ~50/60Hz	220-240 V ~50/60Hz	220-240 V ~50/60Hz
Max. current (A)	16	16	16
Colour	● black	○ white	● grey
Material	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 x 3.5 x 1.8	100 x 3.5 x 1.8	100 x 3.5 x 1.8
Prod. no.	**143010**	**143011**	**143012**
GBP	**31.00**	**31.00**	**31.00**

	200 cm	200 cm	200 cm
Nominal voltage (V)	220-240 V ~50/60Hz	220-240 V ~50/60Hz	220-240 V ~50/60Hz
Max. current (A)	16	16	16
Colour	● black	○ white	● grey
Material	Aluminium	Aluminium	Aluminium
L x W x H (cm)	200 x 3.5 x 1.8	200 x 3.5 x 1.8	200 x 3.5 x 1.8
Prod. no.	**143020**	**143021**	**143022**
GBP	**58.00**	**58.00**	**58.00**

	300 cm	300 cm	300 cm
Nominal voltage (V)	220-240 V ~50/60Hz	220-240 V ~50/60Hz	220-240 V ~50/60Hz
Max. current (A)	16	16	16
Colour	● black	○ white	● grey
Material	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 x 3.5 x 1.8	300 x 3.5 x 1.8	300 x 3.5 x 1.8
Prod. no.	**1002151**	**1002152**	**1002153**
GBP	**86.00**	**86.00**	**86.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1-PHASE

Surface-mounted track
Planning assistance and accessories at a glance

View of components from above
on the installation side

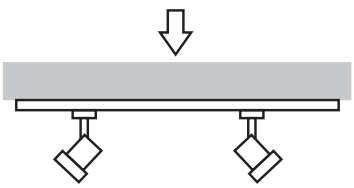

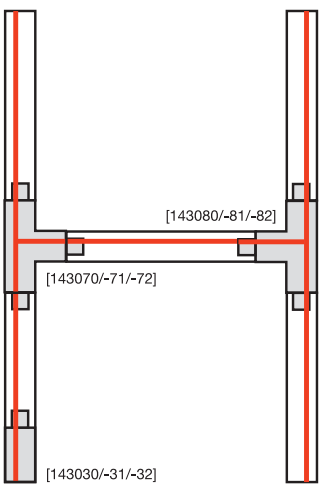

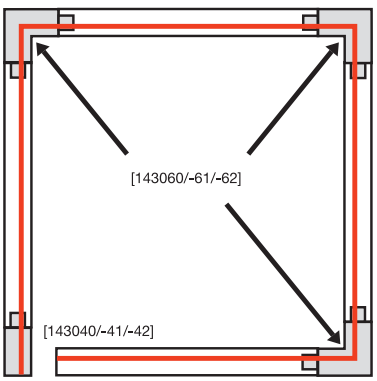

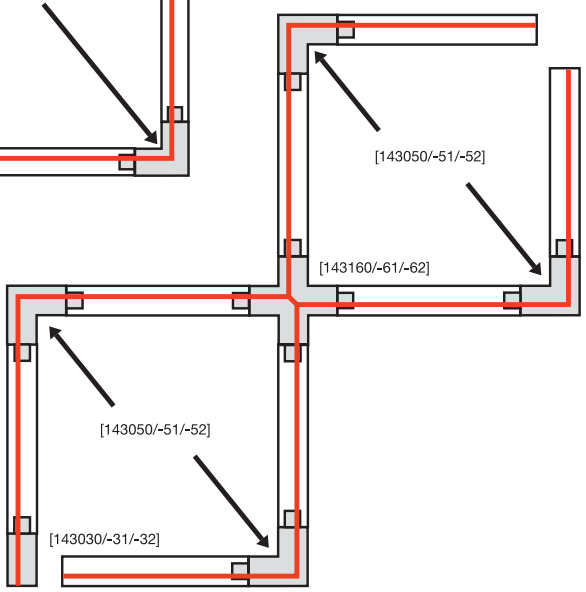

1-phase adapter

6 A max. | Polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

● black	Prod. no.	**143120**	**13.00 GBP**
○ white	Prod. no.	**143121**	**13.00 GBP**
● grey	Prod. no.	**143124**	**13.00 GBP**

1-phase adaptor with hook

6 A max. | Polycarbonate (PC)
L: 8.5 cm W: 3.5 cm H: 7.4 cm
For pendant lights that feature additional mechanical suspension.

● black	Prod. no.	**143170**	**13.00 GBP**
○ white	Prod. no.	**143171**	**13.00 GBP**
● grey	Prod. no.	**143172**	**13.00 GBP**

1-phase feed-in, earth left

16 A max. | Polycarbonate (PC)
L: 6.5 cm W: 3.5 cm H: 1.8 cm

● black	Prod. no.	**143030**	**9.00 GBP**
○ white	Prod. no.	**143031**	**9.00 GBP**
● grey	Prod. no.	**143032**	**9.00 GBP**

1-phase feed-in, earth right

16 A max. | Polycarbonate (PC)
L: 6.5 cm W: 3.5 cm H: 1.8 cm

● black	Prod. no.	**143040**	**9.00 GBP**
○ white	Prod. no.	**143041**	**9.00 GBP**
● grey	Prod. no.	**143042**	**9.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1-phase Longitudinal connector with feed capacity

16 A max. | Polycarbonate (PC)
L: 17.2 cm W: 3.5 cm H: 1.8 cm

● black	Prod. no.	**143100**	**16.00 GBP**
○ white	Prod. no.	**143101**	**16.00 GBP**
● grey	Prod. no.	**143102**	**16.00 GBP**

1-phase, longitudinal connector, electrical

16 A max. | Polycarbonate (PC)
L: 6.4 cm W: 3.5 cm H: 1.8 cm

● black	Prod. no.	**143090**	**7.00 GBP**
○ white	Prod. no.	**143091**	**7.00 GBP**
● grey	Prod. no.	**143092**	**7.00 GBP**

1-phase, corner connector, internal earth

16 A max. | Polycarbonate (PC)
L: 10.4 cm W: 10.4 cm H: 1.8 cm

● black	Prod. no.	**143060**	**15.00 GBP**
○ white	Prod. no.	**143061**	**15.00 GBP**
● grey	Prod. no.	**143062**	**15.00 GBP**

1-phase, corner connector, external earth

16 A max. | Polycarbonate (PC)
L: 10.4 cm W: 10.4 cm H: 1.8 cm

● black	Prod. no.	**143050**	**15.00 GBP**
○ white	Prod. no.	**143051**	**15.00 GBP**
● grey	Prod. no.	**143052**	**15.00 GBP**

1-phase, T-connector, external earth, left

16 A max. | Polycarbonate (PC)
L: 17.2 cm W: 10.4 cm H: 1.8 cm

● black	Prod. no.	**143070**	**18.00 GBP**
○ white	Prod. no.	**143071**	**18.00 GBP**
● grey	Prod. no.	**143072**	**18.00 GBP**

1-phase, T-connector, external earth, right

16 A max. | Polycarbonate (PC)
L: 17.2 cm W: 10.4 cm H: 1.8 cm

● black	Prod. no.	**143080**	**18.00 GBP**
○ white	Prod. no.	**143081**	**18.00 GBP**
● grey	Prod. no.	**143082**	**18.00 GBP**

1-phase, X-connector

16 A max. | Polycarbonate (PC)
L: 9.5 cm W: 17.2 cm H: 1.8 cm

● black	Prod. no.	**143160**	**27.00 GBP**
○ white	Prod. no.	**143161**	**27.00 GBP**
● grey	Prod. no.	**143162**	**27.00 GBP**

1-phase, flex connector

16 A max. | Polycarbonate (PC)
L: 6.4 cm W: 3.5 cm H: 1.8 cm

● black	Prod. no.	**143110**	**16.00 GBP**
○ white	Prod. no.	**143111**	**16.00 GBP**
● grey	Prod. no.	**143112**	**16.00 GBP**

1-phase, stabiliser, longitudinal connector

Steel
L: 19.7 cm W: 3.2 cm H: 1.3 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)

● nickel	Prod. no.	**143151**	**7.00 GBP**

1-phase, stabiliser, corner connector long

Steel
L: 11.5 cm W: 11.5 cm H: 0.5 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)

● nickel	Prod. no.	**143152**	**8.00 GBP**

1-phase, stabilising X-connector

Steel
L: 19.7 cm W: 19.7 cm H: 0.5 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845),

● nickel	Prod. no.	**143169**	**11.00 GBP**

2m cover for 1-phase track

Polycarbonate (PC)
L: 200cm W: 1.8cm H: 0.75cm

● black	Prod. no.	**1004783**	**19.00 GBP**
○ white	Prod. no.	**1004785**	**19.00 GBP**
● grey	Prod. no.	**1004784**	**19.00 GBP**

1-phase, end caps (2 pieces)

Polycarbonate (PC)
L: 0.4 cm W: 3.5 cm H: 1.8 cm

● black	Prod. no.	**143130**	**4.00 GBP**
○ white	Prod. no.	**143131**	**4.00 GBP**
● grey	Prod. no.	**143132**	**4.00 GBP**

1-phase, ceiling rosette 2.0

6 A max. | Polycarbonate (PC)
H: 2.5 cm | Ø: 11.5 cm

● black	Prod. no.	**1007926**	**18.00 GBP**
○ white	Prod. no.	**1007927**	**18.00 GBP**
● grey	Prod. no.	**1007928**	**18.00 GBP**

EUTRACK®, S-TRACK and 1-phase tracks, 5 m, set of two

Stainless steel/Brass
L: 500 cm

● nickel	Prod. no.	**1002845**	**36.00 GBP**

1-phase,

Steel
L: 10 cm | W: 10 cm | H: 0.04 cm

● black	Prod. no.	**1008149**	**12.90 GBP**
○ white	Prod. no.	**1008148**	**12.90 GBP**
● grey	Prod. no.	**1008150**	**12.90 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

143580 575

1-phase
Recessed track

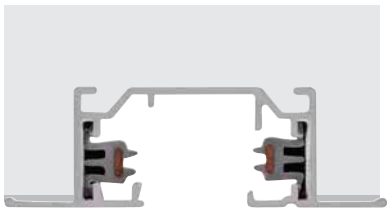

	200 cm
Nominal voltage (V)	220-240 V ~50/60 Hz
Max. current (A)	16
Colour	○ white
Material	Aluminium
L x W x H (cm)	200 x 5.5 x 1.8
Prod. no.	**143221**
GBP	**64.00**

1-phase feed-in, earth left

16 A max. | Plastic
L: 10.8 cm W: 5.5 cm H: 2 cm
Earth left

○ white Prod. no. **143231** **12.00 GBP**

1-phase feed-in, earth right

16 A max. | Plastic
L: 10.8 cm W: 5.5 cm H: 2 cm
Feed-in right

○ white Prod. no. **143241** **12.00 GBP**

1-phase, longitudinal connector including longitudinal brace

Plastic/Steel
L: 6.5 cm W: 1.8 cm H: 1.7 cm
Longitudinal connector including longitudinal brace

○ white Prod. no. **143271** **12.00 GBP**

1-phase, corner connector, internal earth

16 A max. | Plastic
L: 11.2 cm W: 11.2 cm H: 2 cm
internal earth

○ white Prod. no. **143261** **18.00 GBP**

1-phase, corner connector, external earth

16 A max. | Plastic
L: 11.2 cm W: 11.2 cm H: 2 cm
external earth

○ white Prod. no. **143251** **18.00 GBP**

1-phase, end cap

Plastic
L: 2.7 cm W: 5.5 cm H: 1.8 cm
End cap

○ white Prod. no. **143281** **7.00 GBP**

1-phase, retainer

Steel
L: 7.5 cm W: 1.5 cm H: 4 cm

● nickel Prod. no. **143230** **4.00 GBP**

1-phase adaptor with hook

6 A max. | 2 kg max. | Polycarbonate (PC)
L: 8.5 cm W: 3.5 cm H: 7.4 cm
For pendant lights that feature additional mechanical suspension

● black Prod. no. **143170** **13.00 GBP**
○ white Prod. no. **143171** **13.00 GBP**
● grey Prod. no. **143172** **13.00 GBP**

1-phase adapter

6A max. | 2 kg max. | Polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

● black Prod. no. **143120** **13.00 GBP**
○ white Prod. no. **143121** **13.00 GBP**
● grey Prod. no. **143124** **13.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008042 533

QUIMERA
PD, 1-phase

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.6 W
Material: Aluminium

- Narrow lines on the glass create fascinating light reflections
- Black track adapter

Indirect 365 lm | 2700 K

Options	Prod. no.	GBP
black	1008041	317.00
Brass	1008042	317.00
Copper	1008043	317.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008540 535

FORCHINI M 40 TRACK
1-phase, E27





220-240 V ~50/60 Hz
Material: Steel/Aluminium

- 1008539 with grey 1-phase track adapter
- 1008540 with black 1-phase track adapter

Base: 1xE27 | max. Ø: 6.8 cm | L: 15.2 cm

Options	Prod. no.	GBP
black/gold	1008539	200.00
black/gold	1008540	200.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010798 537

LALU® SET
1-phase, PD, LED Base, PHASE



IP20 IK03 40° 50 000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- including colour temperature switch 2700 K/3000 K
- with black adapter

LED INSIDE CRI 90

Down	550 lm | 2700 K	600 lm | 3000 K

Options	Prod. no.	GBP
● black	1010797	215.00

LALU® SET
1-phase, PD, LED Base, PHASE

IP20 IK03 40° 50 000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- including colour temperature switch 2700 K/3000 K
- with black adapter

LED INSIDE CRI 90

Down	700 lm | 2700 K	750 lm | 3000 K

Options	Prod. no.	GBP
● black	1010798	215.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LALU® SET
1-phase, PD, LED Base, Phase



220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- including colour temperature switch 2700 K / 3000 K
- with black adapter

LED INSIDE CRI 90

Down	700 lm | 2700 K	800 lm | 3000 K

Options	Prod. no.	GBP
● black	1010799 ●	228.00

TEL: 020 8 542 1471 EMAIL: SALES@INTALITE.CO.UK

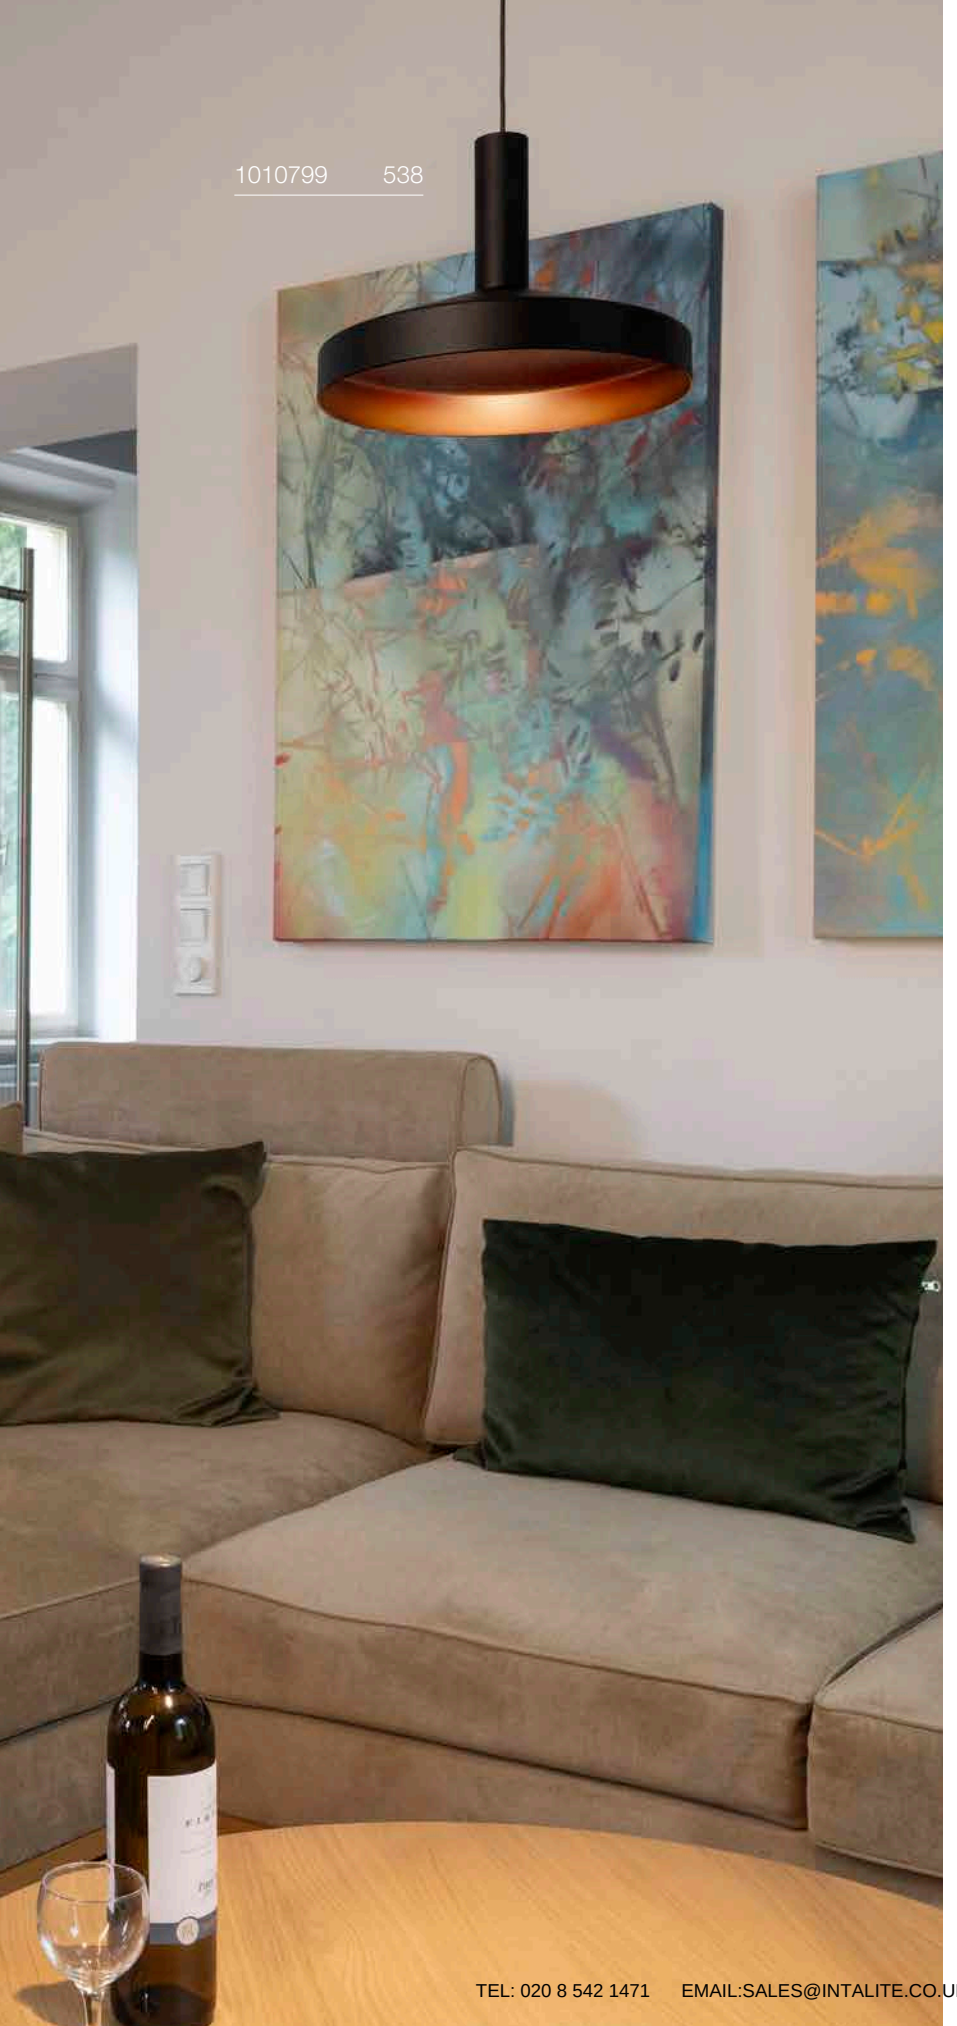

LALU® SET
1-phase, PD, LED Base, PHASE

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- including colour temperature switch 2700 K / 3000 K
- with black adapter

LED INSIDE CRI 90

Down	700 lm | 2700 K	700 lm | 3000 K

Options	Prod. no.	GBP
● black	**1010800** ●	**214.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008250 541

PURI 2.0 Tube
1-phase, QPAR51



IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008242**	**34.00**
●● black/gold	**1008243**	**34.00**
○ white	**1008244**	**34.00**
● grey	**1008245**	**34.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

PURI 2.0 Cone
1-phase, QPAR51



IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008246**	**34.00**
●● black/gold	**1008247**	**34.00**
○ white	**1008248**	**34.00**
● grey	**1008249**	**34.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

PURI 2.0 Dome
1-phase, QPAR51



IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008250**	**34.00**
●● black/gold	**1008251**	**34.00**
○ white	**1008252**	**34.00**
● grey	**1008253**	**34.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: 1010467 50.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008263 543

PURI 2.0 Tube
1-phase, PD, QPAR51

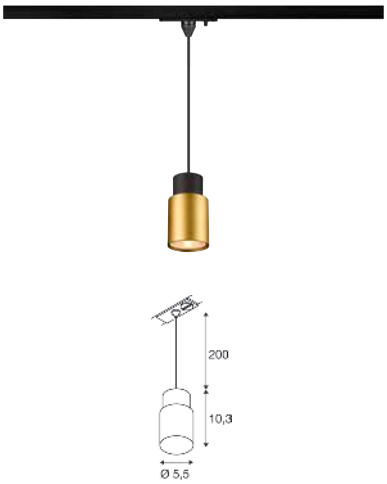

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
black	1008254	38.00
black/gold	1008255	38.00
white	1008256	38.00
grey	1008257	38.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

PURI 2.0 Cone
1-phase, PD, QPAR51

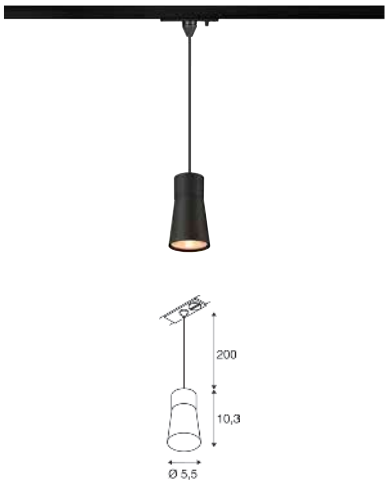

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
black	1008258	38.00
black/gold	1008259	38.00
white	1008260	38.00
grey	1008261	38.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

PURI 2.0 Dome
1-phase, PD, QPAR51

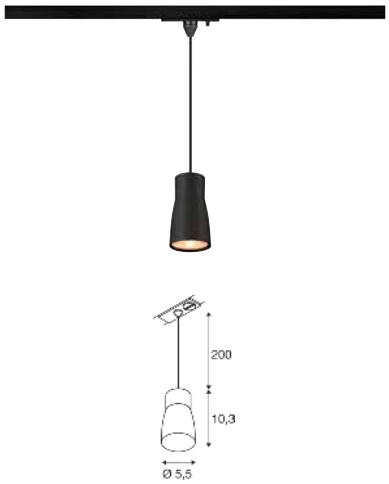

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
black	1008262	38.00
black/gold	1008263	38.00
white	1008264	38.00
grey	1008265	38.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: 1010467 50.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

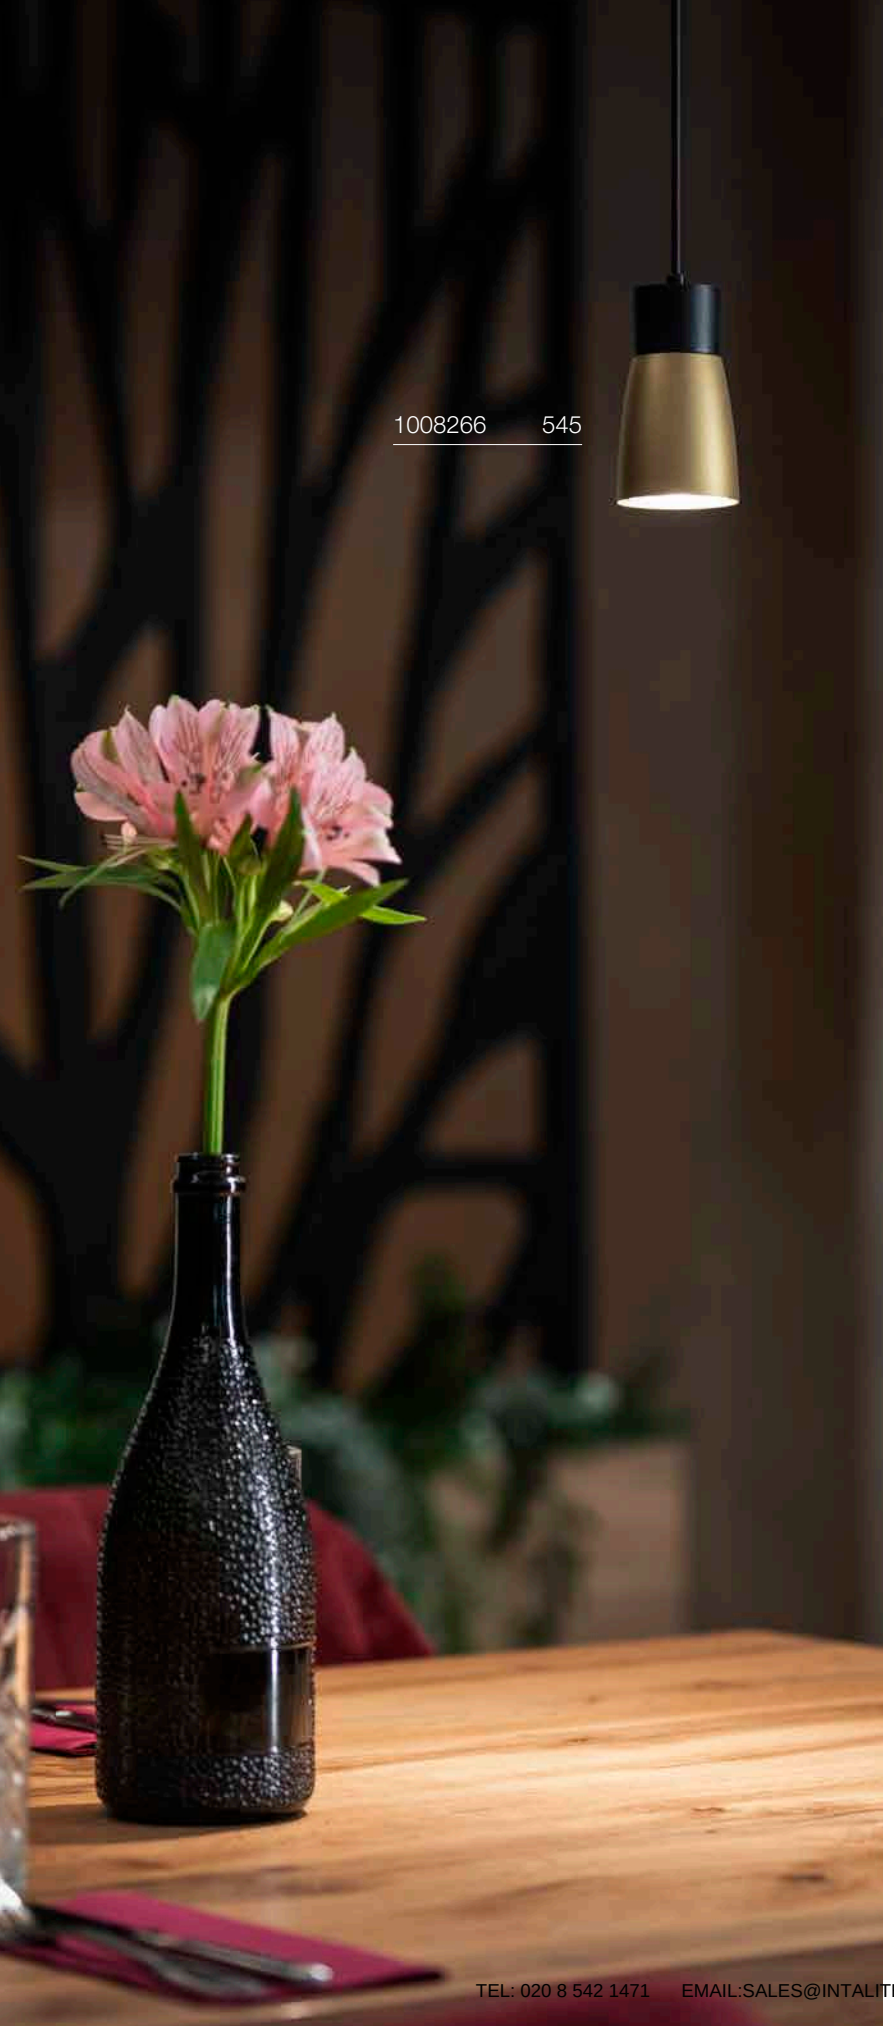

1008266 545

PURI 2.0
1-phase, Triple Track Set, QPAR51





220-240 V ~50/60 Hz
Total wattage: 6 W
Material: Aluminium

- Consists of: 2 x 1 m track, 1 x longitudinal connector with feed-in option, and 3 x PURI 2.0 Tube Spots

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008903**	**183.00**
◐ black/gold	**1008904**	**183.00**
○ white	**1008902**	**183.00**

PURI 2.0 Tube
Shade

Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Options	Prod. no.	GBP
black	1008214	8.00
white	1008213	8.00
gold	1008216	8.00
grey	1008215	8.00
bronze	1008217	8.00
Aluminium	1008376	8.00

PURI 2.0 Cone
Shade

Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Options	Prod. no.	GBP
black	1008219	8.00
white	1008218	8.00
gold	1008221	8.00
grey	1008220	8.00
bronze	1008222	8.00
Aluminium	1008377	8.00

PURI 2.0 Dome
Shade

Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Options	Prod. no.	GBP
black	1008224	8.00
white	1008223	8.00
gold	1008226	8.00
grey	1008225	8.00
bronze	1008227	8.00
Aluminium	1008378	8.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

143390 547

PURI TRACK
1-phase, QPAR51



IP20 350° 85°

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- Decorative ring included

SOCKET INSIDE 50 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**143390**	**30.00**
○ white	**143391**	**30.00**
● grey	**143392**	**30.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000h

Prod. no.: **1005273** **9.00 GBP**

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: **1010471** **39.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008399 549

GRIP! S
1-phase, PHASE, Ø 3,0 cm



C,L · IP20 · IK02 · 29° · 330° · 90° · 50000h L80B10 · UGR 25

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium

- Honeycomb accessories included

LED INSIDE · CRI 90

Down	530 lm | 2700 K	610 lm | 3000 K

Options	Prod. no.	GBP
black/gold 2700 K	1008392	145.00
black/gold 3000 K	1008397	145.00
white/black 2700 K	1008390	145.00
white/black 3000 K	1008395	145.00
gold/black 2700 K	1008394	145.00
gold/black 3000 K	1008399	145.00
bronze/black 2700 K	1008393	145.00
bronze/black 3000 K	1008398	145.00

GRIP! S
1-phase, PHASE, Ø 3,0 cm

DIM TO WARM



C,L · IP20 · IK02 · 29° · 330° · 90° · 50000h L80B20 · UGR 25

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium

- Honeycomb accessories included

LED INSIDE · CRI 90

Down	350 lm | 2000 K – 3000 K

Options	Prod. no.	GBP
black/gold	1008402	145.00
white/black	1008400	145.00
gold/black	1008404	145.00
bronze/black	1008403	145.00

Further accessories can be found on page 555

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

EMAIL:SALES@

GRIP! M
1-phase, PHASE, Ø 4,3 cm

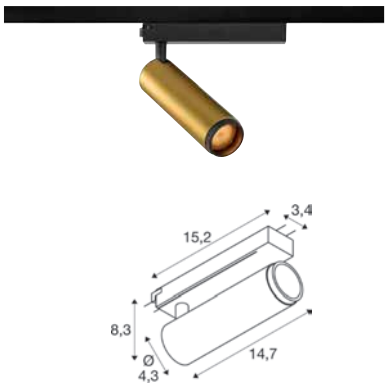

C,L IP20 IK02 42° 330° 90°

50 000 h L80B10 UGR 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium

- Honeycomb accessories included

LED INSIDE CRI 90

Down	1810 lm | 2700 K	1900 lm | 3000 K

Options	Prod. no.	GBP
black/gold 2700 K	1008422	154.00
black/gold 3000 K	1008427	154.00
white/black 2700 K	1008420	154.00
white/black 3000 K	1008425	154.00
gold/black 2700 K	1008424	154.00
gold/black 3000 K	1008429	154.00
bronze/black 2700 K	1008423	154.00
bronze/black 3000 K	1008428	154.00

GRIP! M
1-phase, PHASE, Ø 4,3 cm

DIM TO WARM

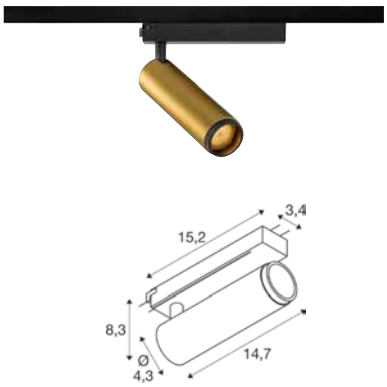

C,L IP20 IK02 42° 330° 90°

50 000 h L80B20 UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included

LED INSIDE CRI 90

Down	350 lm | 2000 K – 3000 K

Options	Prod. no.	GBP
black/gold	1008432	154.00
white/black	1008430	153.00
gold/black	1008434	154.00
bronze/black	1008433	154.00

Further accessories can be found on page 555

1008473 553

GRIP! L
1-phase, QPAR51, Ø 5,7 cm



IP20 IK02 360° 90°

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
black/gold	**1008449**	**76.00**
white/black	**1008447**	**76.00**
gold/black	**1008451**	**77.00**
bronze/black	**1008450**	**76.00**

| 6 W | 38°
470 lm | 3000 K | EEC = F
6 kW/1000h

C,L

Prod. no.: **1005079** **7.00 GBP**

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: **1010470** **33.00 GBP**

GRIP! L
1-phase, PD, QPAR51, Ø 5,7 cm



IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
black/gold	**1008471**	**120.00**
white/black	**1008469**	**120.00**
gold/black	**1008473**	**120.00**
bronze/black	**1008472**	**120.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kW/1000h

C,L

Prod. no.: **1005080** **7.00 GBP**

Further accessories can be found on page 555

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008473+1008489 553+555

GRIP! S
Decorative ring Ø 2,7 cm

Ø: 2.7 cm
H: 1.1 cm
Material: Aluminium

Options	Prod. no.	GBP
● black	**1008489**	**15.00**
○ white	**1008488**	**15.00**
● gold	**1008491**	**15.00**
● nickel	**1008490**	**15.00**

GRIP! M
Decorative ring Ø 4,0 cm

Ø: 4 cm
H: 1.4 cm
Material: Aluminium

Options	Prod. no.	GBP
● black	**1008493**	**17.00**
○ white	**1008492**	**17.00**
● gold	**1008495**	**17.00**
● nickel	**1008494**	**17.00**

GRIP! L
Decorative ring Ø 5,4 cm

Ø: 5.4 cm
H: 2.05 cm
Material: Aluminium

Options	Prod. no.	GBP
● black	**1008497**	**20.00**
○ white	**1008496**	**20.00**
● gold	**1008499**	**20.00**
● nickel	**1008498**	**20.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010324 557

DYSKO
1-phase, PHASE



220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: Plastic PC/Aluminium

- Intrack LED driver adapter

750 lm|2700 K

Options	Prod. no.	GBP
black/gold	1010318	161.00
white/black	1010319	161.00

DYSKO
1-phase, PD, PHASE

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: Plastic PC/Aluminium

- Intrack LED driver adapter

750 lm|2700 K

Options	Prod. no.	GBP
black/gold	1010324	169.00
white/black	1010325	169.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LIGHT EYE® 90
1-phase, QPAR51



IP20 330° 90°

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Options	Prod. no.	GBP
● black	**1008180**	**72.00**
○ white	**1008181**	**72.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kW/1000h

C,L

Prod. no.: **1005080** **7.00 GBP**

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: **1010470** **33.00 GBP**

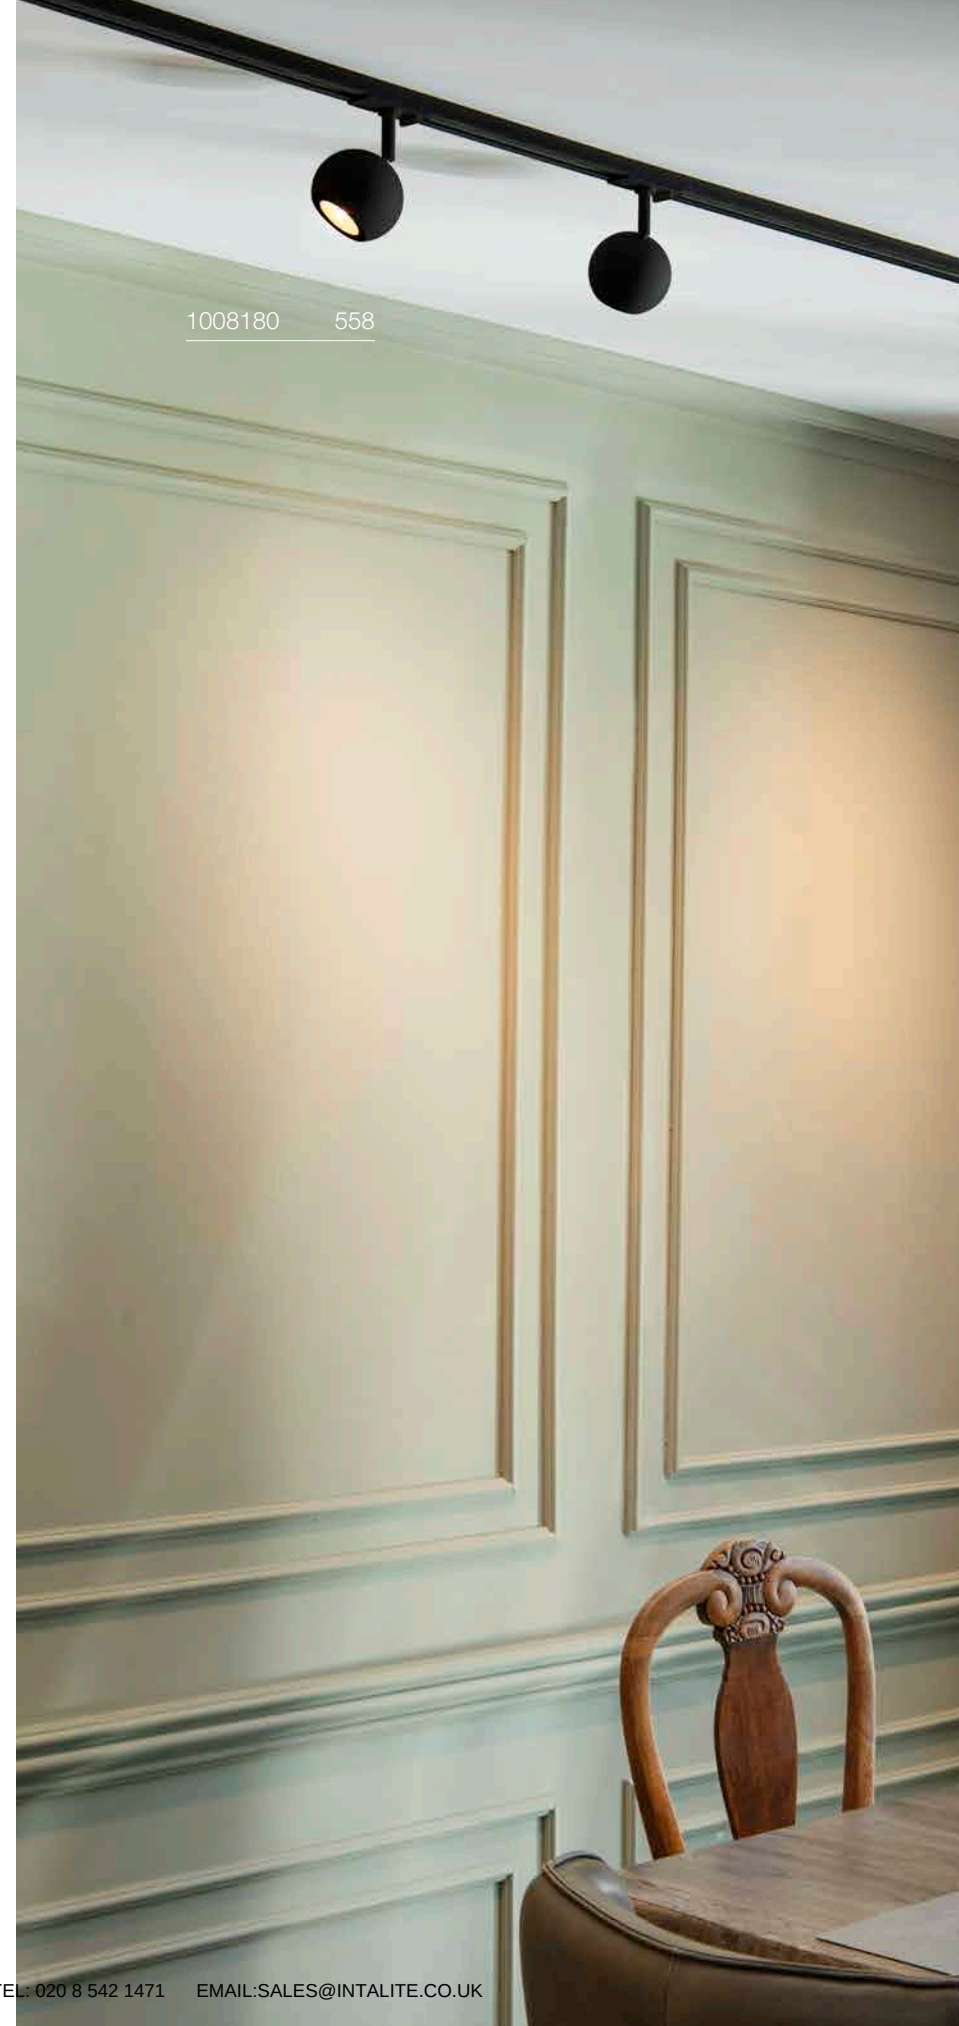

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

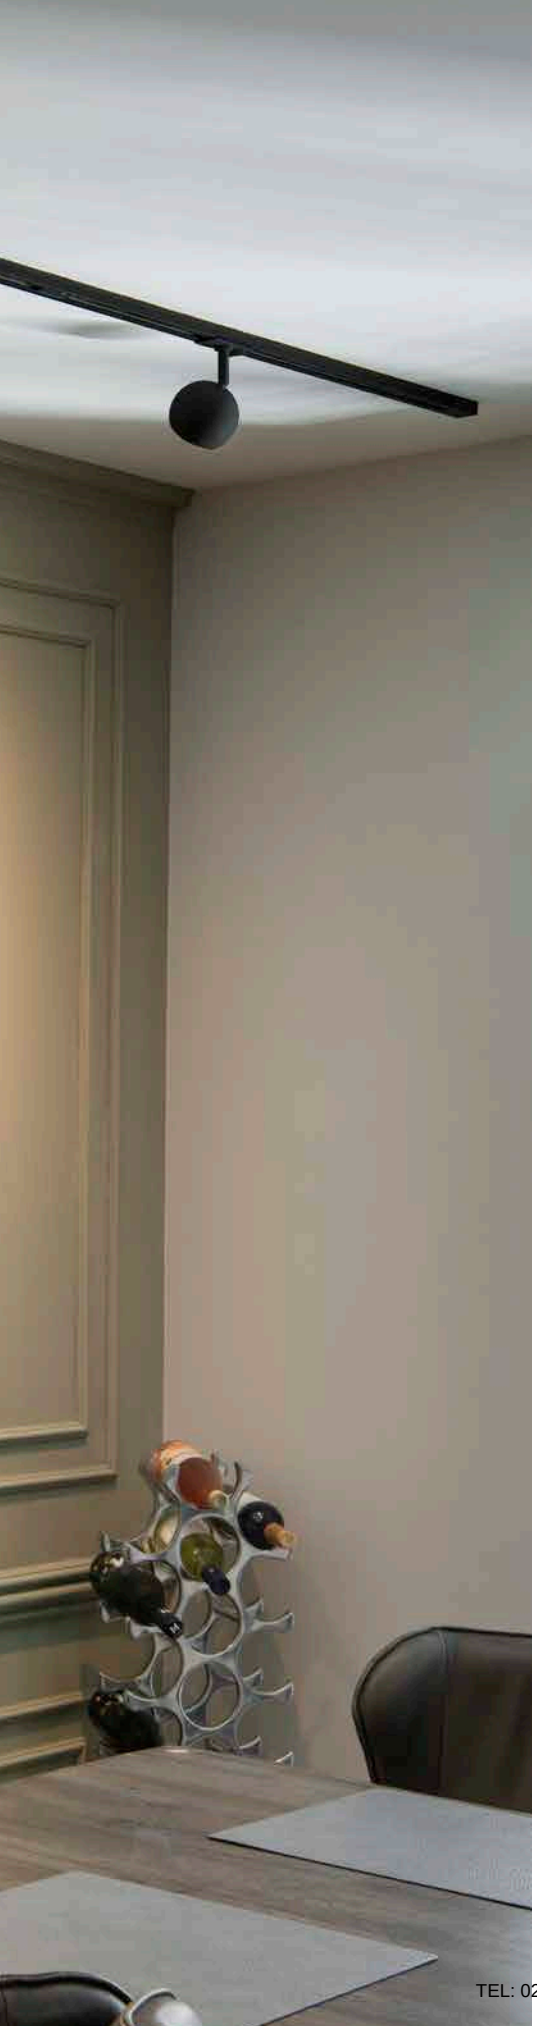

LIGHT EYE® 150
1-phase, QPAR111



220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Options	Prod. no.	GBP
● black	**1008182**	**114.00**
○ white	**1008183**	**114.00**

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G
12 kW/1000h

Prod. no.: **1005298** **73.00 GBP**

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: **1010471** **39.00 GBP**

further accessories can be found on page 561

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008168 561

LIGHT EYE® 90
1-phase, PD, QPAR51



IP20 150 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.35 cm

Options	Prod. no.	GBP
● black	1008168	72.00
○ white	1008169	72.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005080 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

LIGHT EYE® 150
1-phase, PD, QPAR111



IP20 150 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Options	Prod. no.	GBP
● black	1008174	112.00
○ white	1008175	112.00

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G
12 kW/1000h

C

Prod. no.: 1005298 73.00 GBP

LIGHT EYE® 90
Decorative ring Ø 5,7 cm

NEW

Ø: 5.9 cm
H: 1.4 cm
Material: steel

Options	Prod. no.	GBP
● black	1008186	8.00
○ white	1008187	8.00
gold	1008188	12.00
chrome	151049	12.00

LIGHT EYE® 150
Decorative ring Ø 13,6 cm

NEW

Ø: 13.6 cm
H: 2.3 cm
Material: steel

Options	Prod. no.	GBP
● black	1008189	30.00
○ white	1008190	30.00
gold	1008192	39.00
chrome	1008191	39.00

further accessories can be found on page 561

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LIGHT EYE® 2.0
1-phase, PHASE, Ø 7,5 cm



IP20 | 30° | 50 000 h L80B20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium

LED INSIDE | CRI 90

Down	1150 lm	2700 K	1200 lm	3000 K

Options	Prod. no.	GBP
● black 2700 K	**1010448**	**123.00**
● black 3000 K	**1010450**	**123.00**
◐● white/black 2700 K	**1010449**	**123.00**
◐● white/black 3000 K	**1010451**	**123.00**

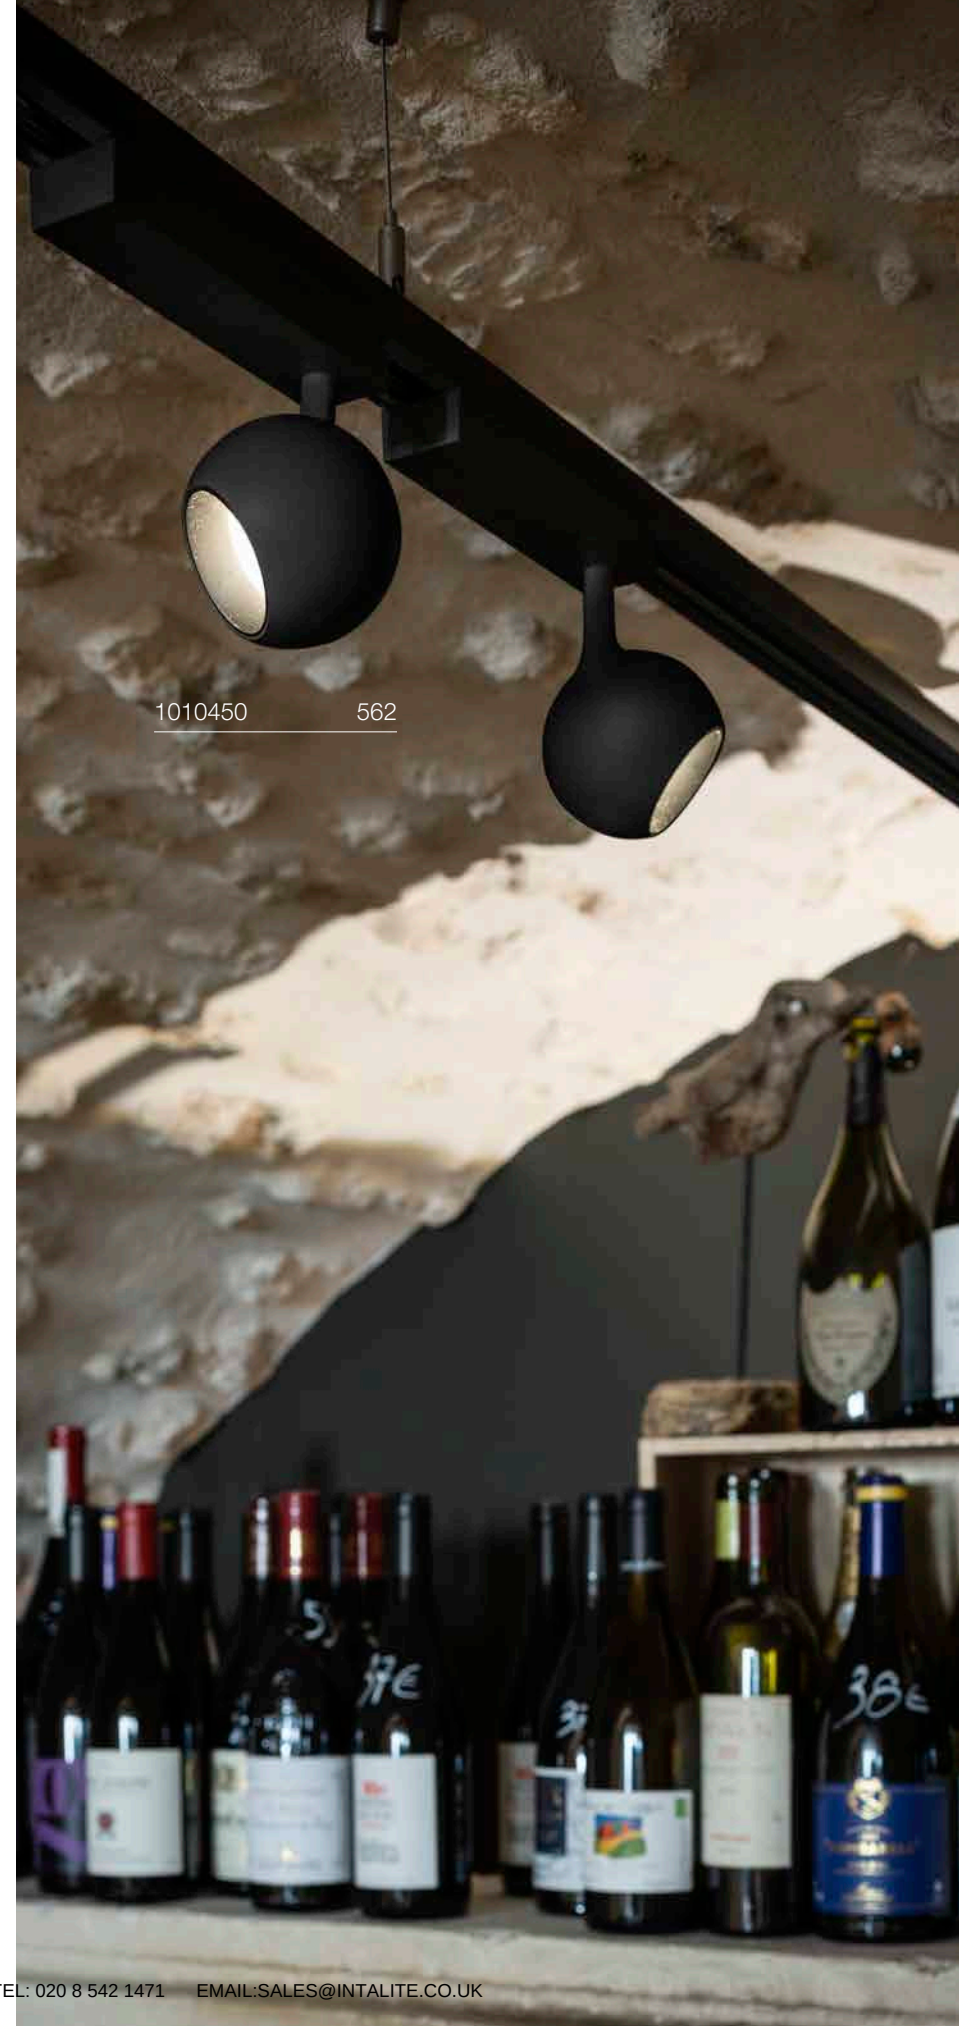

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

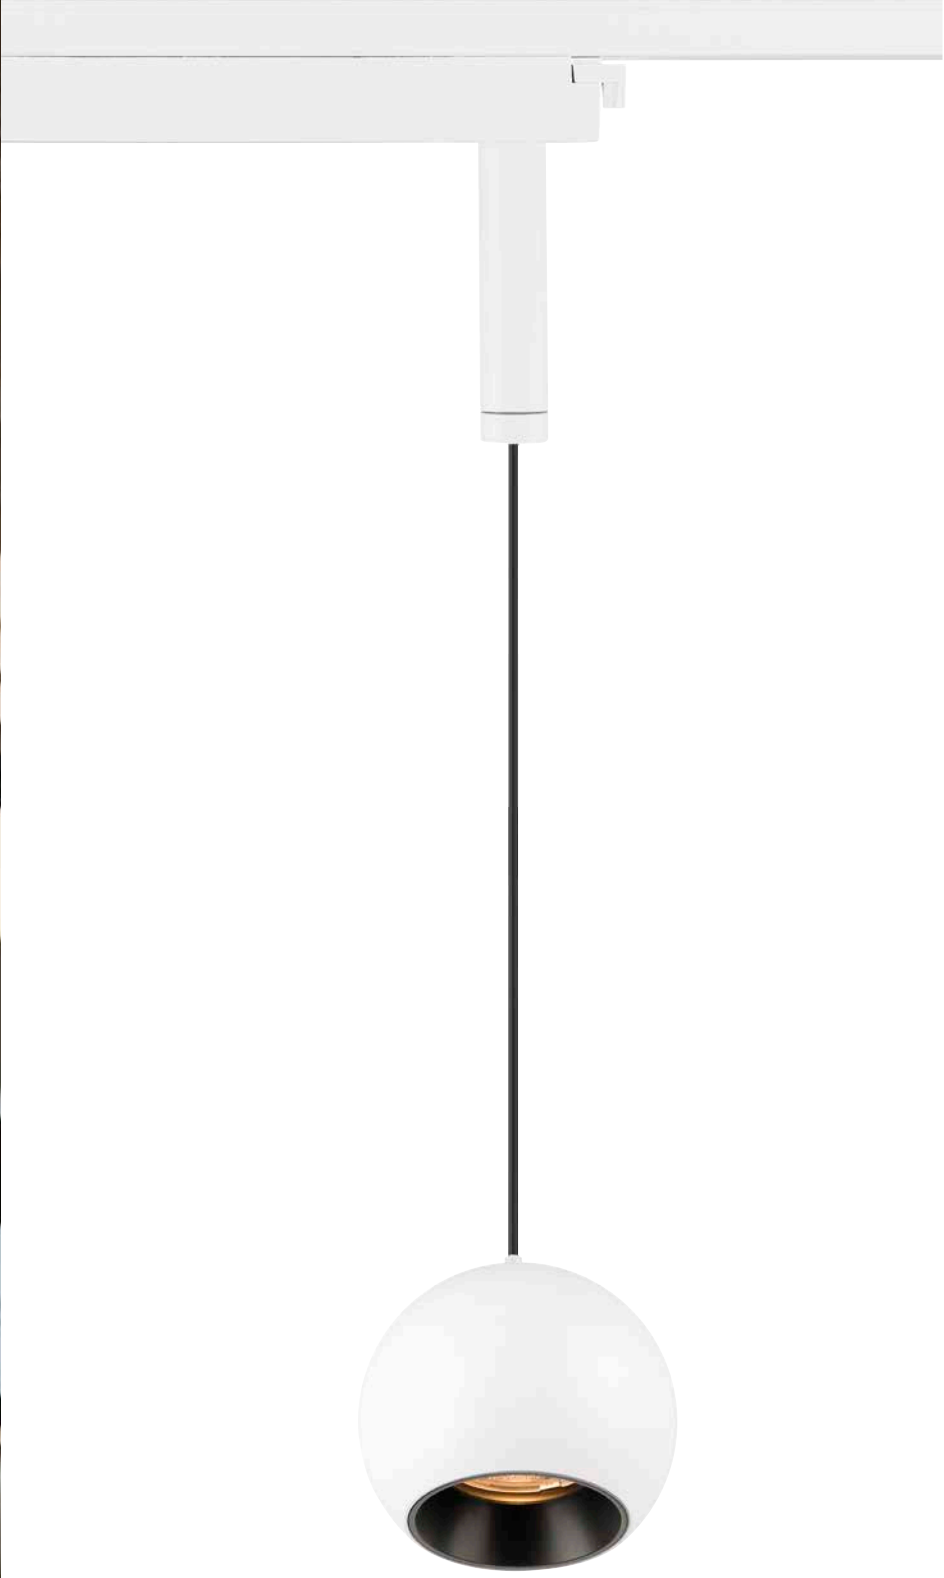

LIGHT EYE® 2.0
1-phase, PD, Ø 7,5 cm



220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium

Down	1150 lm	2700 K	1200 lm	3000 K

Options	Prod. no.	GBP
● black 2700 K	**1010452**	**135.00**
● black 3000 K	**1010454**	**135.00**
◐ white/black 2700 K	**1010453**	**135.00**
◐ white/black 3000 K	**1010455**	**135.00**

further accessories can be found on page 561

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

KALU 2.0
1-phase, PHASE



IP20 IK02 36° 340° 90°

50 000 h L90B10 UGR 19

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

LED INSIDE CRI 90

1400 lm | 2700 K | 1450 lm | 3000 K | 1500 lm | 4000 K

Options	Prod. no.	GBP
● black 2700 K	1010222	127.00
● black 3000 K	1010226	127.00
● black 4000 K	1010230	127.00
○ white 2700 K	1010224	127.00
○ white 3000 K	1010228	127.00
○ white 4000 K	1010232	127.00

Product	Prod. no.	GBP
Decorative ring		
○ white	1010135	8.00
● black	1010136	8.00
gold	1010138	8.00
Copper	1010139	8.00
Lens		
○ transparent, 15°	1010140	16.00
○ transparent, 24°	1010141	16.00
○ transparent, 36°	1010142	16.00
○ transparent, 60°	1010143	16.00

KALU TRACK
1-phase, QPAR111



IP20 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	143540	65.00
○ white	143541	65.00
● grey	143544	65.00

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G
12 kW/1000h

Prod. no.: **1005297** **73.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRIP! FLAT
1-phase, PHASE



C,L · IP20 · 330° · 84° · L70B50 · UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 16 W
Material: Aluminium

INSIDE

Down	400 lm | 2700 K	430 lm | 3000 K

Options	Prod. no.	GBP
● black	1009131	237.00
○ white	1009132	237.00

GRIP! FLAT
1-phase, PD, PHASE



C,L · IP20 · L70B50 · 200 cm · UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 16 W
Material: Aluminium

INSIDE

Down	400 lm | 2700 K	430 lm | 3000 K

Options	Prod. no.	GBP
● black	1009133	246.00
○ white	1009134	246.00

GRIP! FLAT
Felt shade Ø 50 cm x 6,2 cm

Ø: 50 cm
H: 6.2 cm
Material:

Options	Prod. no.	GBP
● black	1010403	118.00
● grey	1010404	118.00
● ochre	1010405	118.00

GRIP! FLAT
Felt shade Ø 50 cm x 0,6 cm



Ø: 50 cm
H: 0.6 cm
Material:

Options	Prod. no.	GBP
● black	1010406	84.00
● grey	1010407	84.00
● ochre	1010408	84.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NOBLO® SPOT
1-phase, Triple Track Set



220-240 V ~50/60 Hz | 150 mA
Total wattage: 19 W
Material: Aluminium

- Consists of 2 x 1 m track, 1 x longitudinal connector with feed-in option, 1 x 2 end caps, 3 x NOBLO lamp head

2250 lm | 2700 K

Options	Prod. no.	GBP
● black	**1007673**	**219.00**
○ white	**1007674**	**219.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NOBLO® SPOT
1-phase, PHASE



IP20 | 32° | 355° | 90° | 50000 h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: Aluminium/Polycarbonate (PC)

LED INSIDE | CRI 90

740 lm | 2700 K | 750 lm | 3000 K

Options	Prod. no.	GBP
● black 2700 K	**1007638**	**61.00**
● black 3000 K	**1007641**	**61.00**
○ white 2700 K	**1007639**	**61.00**
○ white 3000 K	**1007642**	**61.00**
● grey 2700 K	**1007640**	**61.00**
● grey 3000 K	**1007643**	**61.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	**1008482**	**5.00**
○ white	**1008483**	**5.00**
● gold	**1008484**	**5.00**
● grey	**1008485**	**5.00**
● bronze	**1008486**	**5.00**
● Copper	**1008487**	**5.00**

NOBLO® SPOT
1-phase, PHASE

DIM TO WARM



IP20 | 36° | 355° | 90° | 40000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.4 W
Material: Aluminium/Polycarbonate (PC)

LED INSIDE | CRI 90

30 lm | 2000 K – 450 lm | 3000 K

Options	Prod. no.	GBP
● black	**1007352**	**73.00**
○ white	**1007353**	**73.00**
● grey	**1007354**	**73.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	**1008482**	**5.00**
○ white	**1008483**	**5.00**
● gold	**1008484**	**5.00**
● grey	**1008485**	**5.00**
● bronze	**1008486**	**5.00**
● Copper	**1008487**	**5.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ASTO TUBE
1-phase, GU10



IP20 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

- Decorative rings available as accessories

SOCKET INSIDE 10 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**1006445**	**61.00**
○ white	**1006446**	**61.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

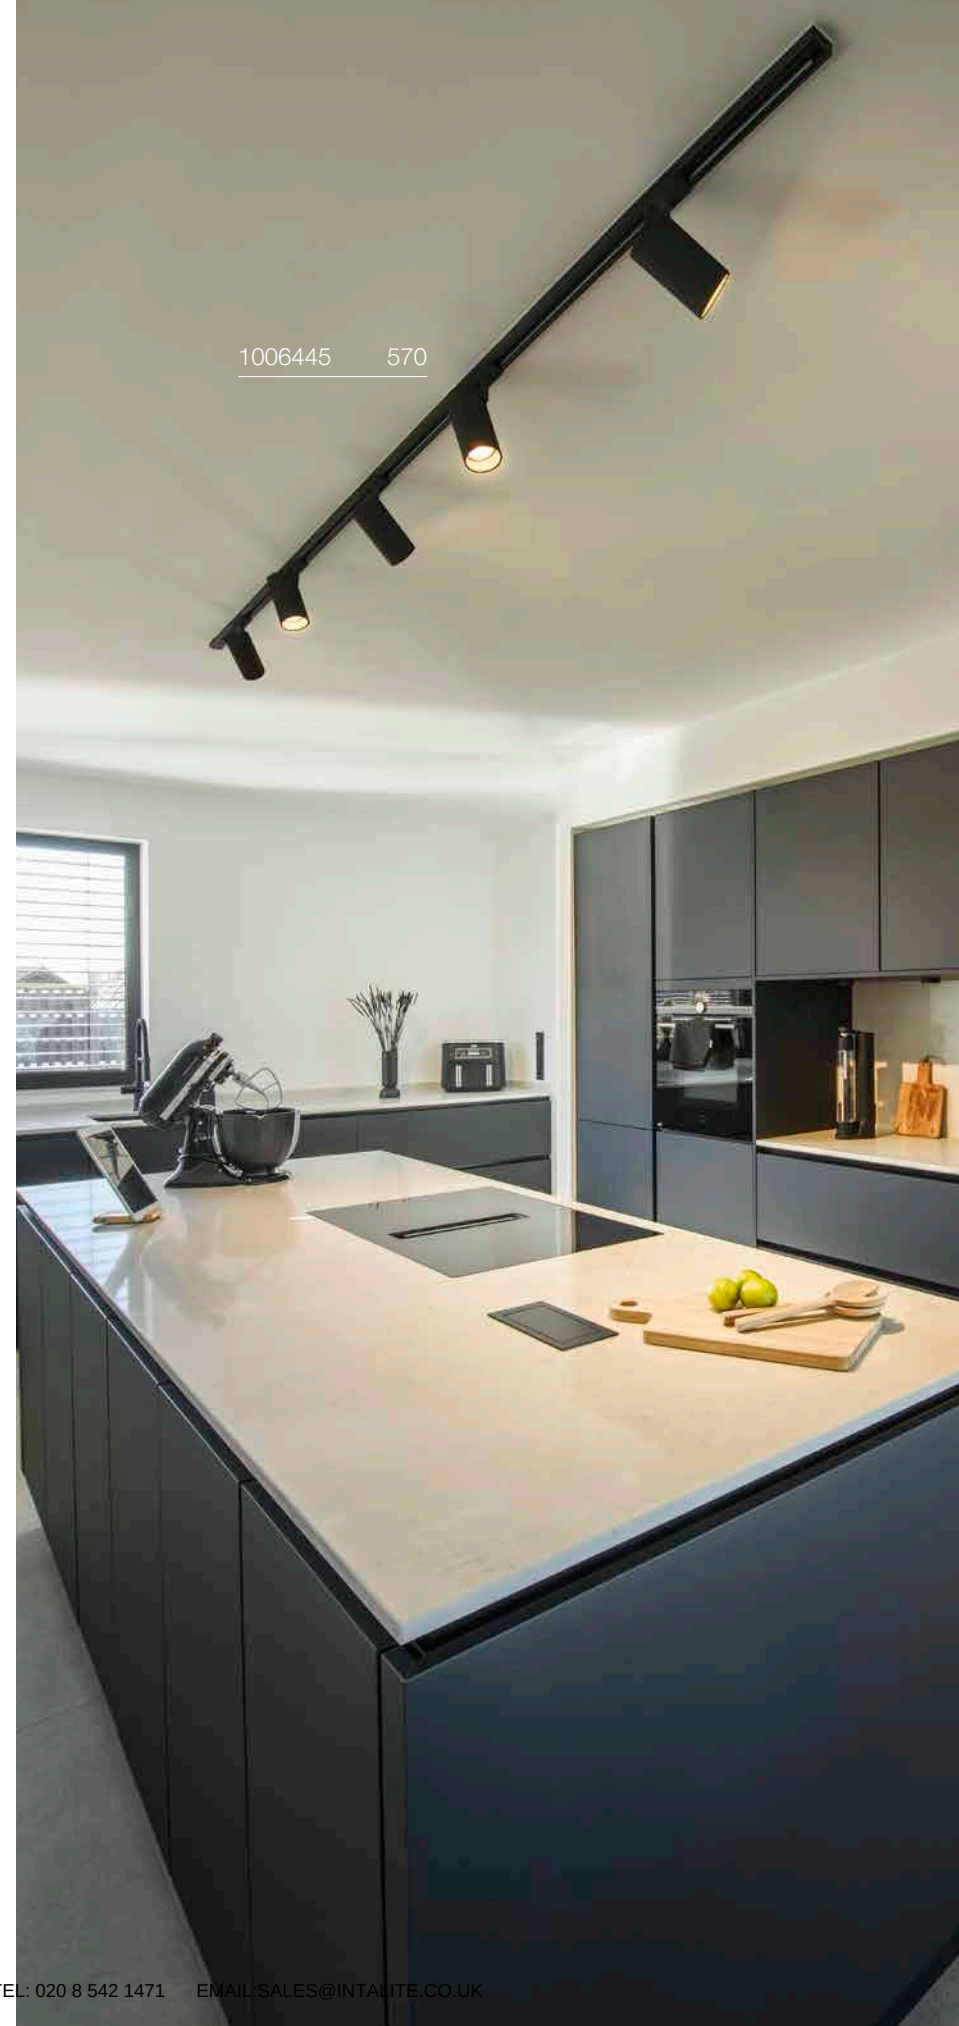

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ASTO TUBE
1-phase, PD, GU10



IP20 250 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5 cm | L: 6 cm

Options	Prod. no.	GBP
● black	**1010099**	**67.00**
○ white	**1010100**	**67.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005076 7.00 GBP

ASTO TUBE
Decorative reflector

Ø: 6.8 cm
H: 3.95 cm
Material: Polycarbonate (PC)

Options	Prod. no.	GBP
black/chrome	**1007190**	**4.00**
gold	**1006450**	**4.00**
chrome	**1006449**	**4.00**
Copper	**1006451**	**4.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009138 573

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PARA CONE GL
1-phase, GU10



IP20 | 300° | 90°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE | 25 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	1006155	77.00
○ white	1006156	77.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

PARA CONE 14
1-phase, GU10



IP20 | 300° | 80°

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE | 25 W

Base: 1xGU10

Options	Prod. no.		GBP
black/gold	1008052	●	74.00
white/gold	1008053	●	74.00
copper/white	1008054	●	77.00
Aluminium	1009138	●	76.00

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G
4 kW/1000h

C

Prod. no.: 1006321 42.00 GBP

PARA CONE 14
1-phase, PD, GU10



IP20 | 150 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE | 35 W

Base: 1xGU10

Options	Prod. no.		GBP
black/gold	1008058	●	101.00
white/gold	1008059	●	101.00
copper/white	1008060	●	107.00
Aluminium	1009140	●	105.00

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G
4 kW/1000h

C

Prod. no.: 1006321 42.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

143580 575

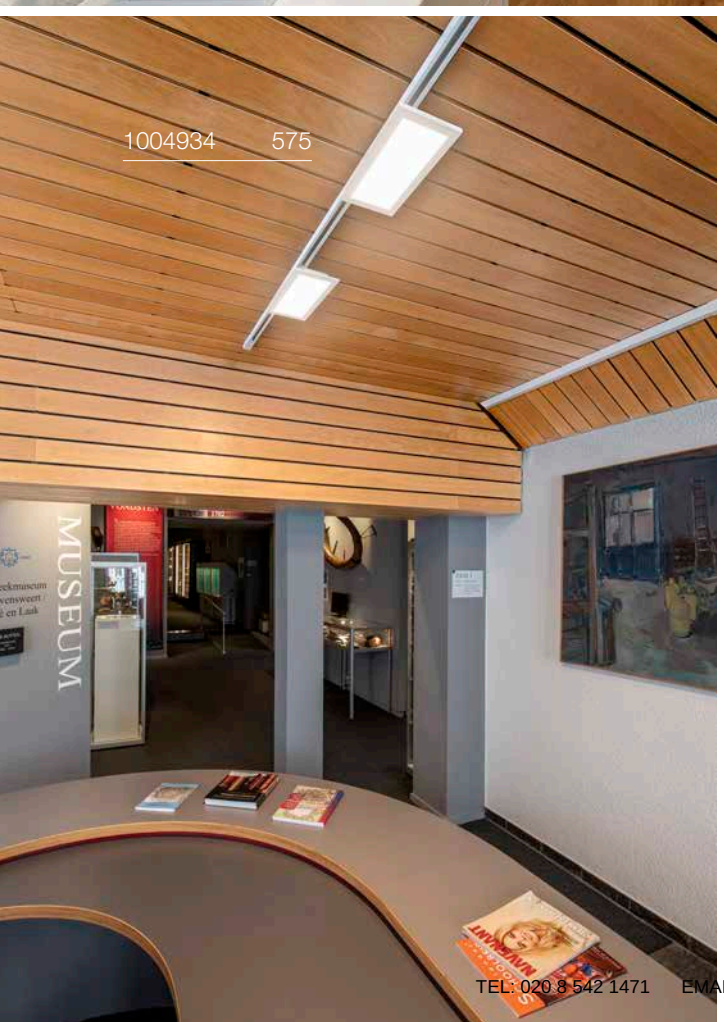
1004934 575
MUSEUM

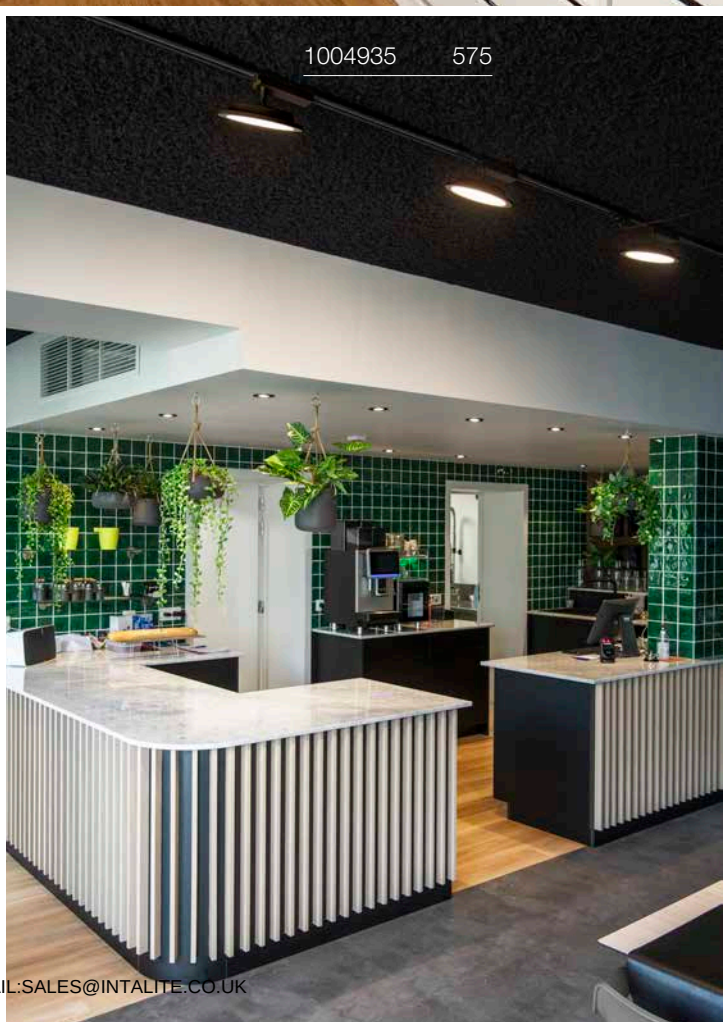
1004935 575

HELIA 50 TRACK
1-phase



220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

920 lm
970 lm
3000 K

Options	Prod. no.	GBP
● black 920 lm	**143580**	**78.00**
○ white 970 lm	**143581**	**78.00**

PANEL TRACK
1-phase, square



220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: Polycarbonate (PC)/Steel

1800 lm
3000 K

Options	Prod. no.	GBP
● black	**1004933**	**83.00**
○ white	**1004934**	**83.00**

PANEL TRACK
1-phase, round



220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: Polycarbonate (PC)/Steel

1800 lm
3000 K

Options	Prod. no.	GBP
● black	**1004935**	**83.00**
○ white	**1004936**	**83.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ENOLA® C TRACK
1-phase



220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium/Glass

1040 lm|3000 K

Options	Prod. no.	GBP
● black	**1000711**	**152.00**
○ white	**143941**	**152.00**

ENOLA® C TRACK
1-phase



220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium/Glass

1040 lm|3000 K

Options	Prod. no.	GBP
● black	**1000712**	**151.00**
○ white	**143951**	**152.00**

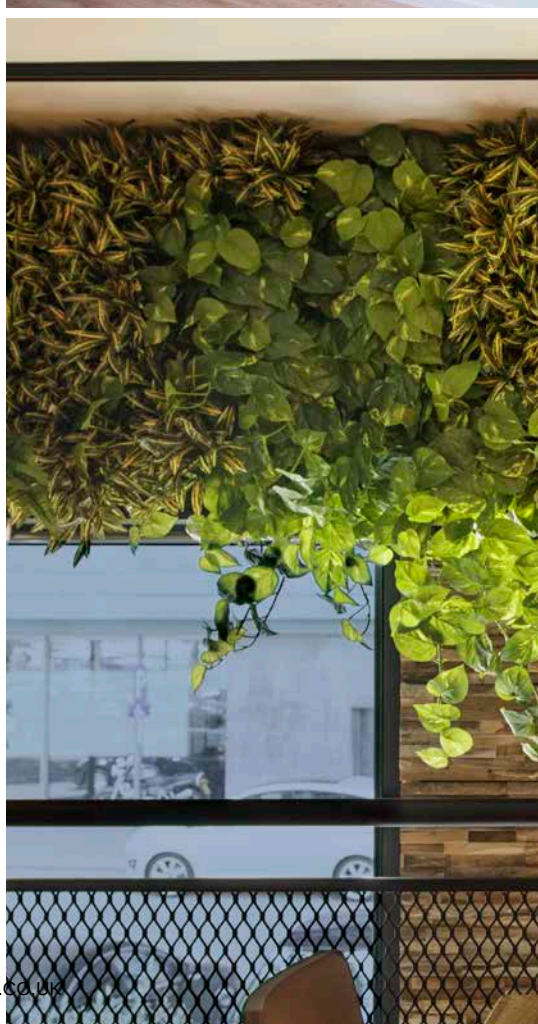

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

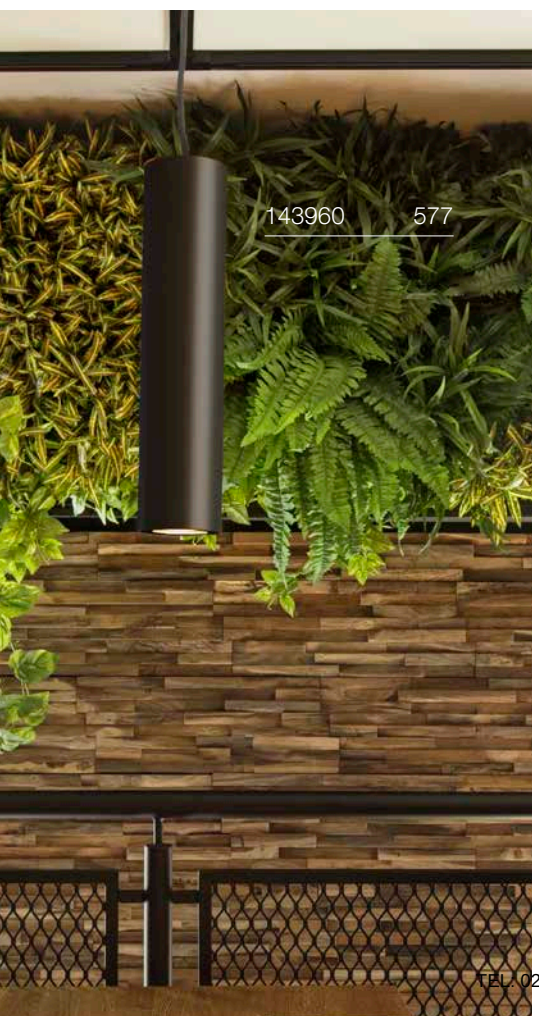

ENOLA® B TRACK
1-phase, QPAR51



IP20 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

SOCKET INSIDE 50 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 6.7 cm

Options	Prod. no.	GBP
● black	**1002110**	**61.00**
○ white	**1002111**	**61.00**
● grey	**1002113**	**61.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

ENOLA® B
1-phase, PD, QPAR51

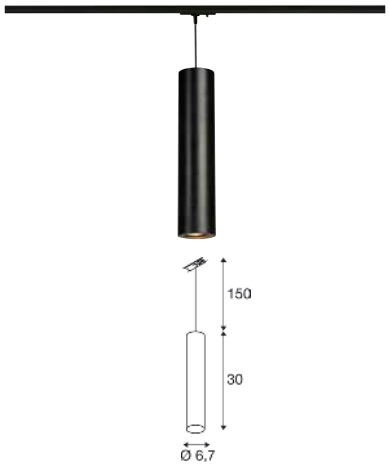

IP20 150 cm

220-240 V ~50/60 Hz
Material: Aluminium/Steel

SOCKET INSIDE 50 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**143960**	**108.00**
○ white	**143961**	**108.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000h

C

Prod. no.: 1005273 9.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

143440 579

BIMA
1-phase, single, QPAR51



IP20 350° 200°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 50 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Options	Prod. no.	GBP
● black	**143440**	**39.00**
○ white	**143441**	**39.00**
● grey	**143442**	**39.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000h

Prod. no.: 1005273 9.00 GBP

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: 1010471 39.00 GBP

BIMA
1-phase, double, QPAR51



IP20 350° 200°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 50 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Options	Prod. no.	GBP
● black	**143430**	**61.00**
○ white	**143431**	**61.00**
● grey	**143432**	**61.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: 1005077 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

EURO SPOT TRACK
1-phase, QPAR51



IP20 350° 100°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 25 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**1001861**	**66.00**
○ white	**143811**	**67.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: **1005077** **7.00 GBP**

SMART

GU10 | 5.5 W | 36°
400 lm | RGBW | EEC = F
6 kWh/1000 h

Prod. no.: **1010471** **39.00 GBP**

1001861 580

TEL: 020 8 542 [illegible] EMAIL: SALES@[illegible].CO.UK

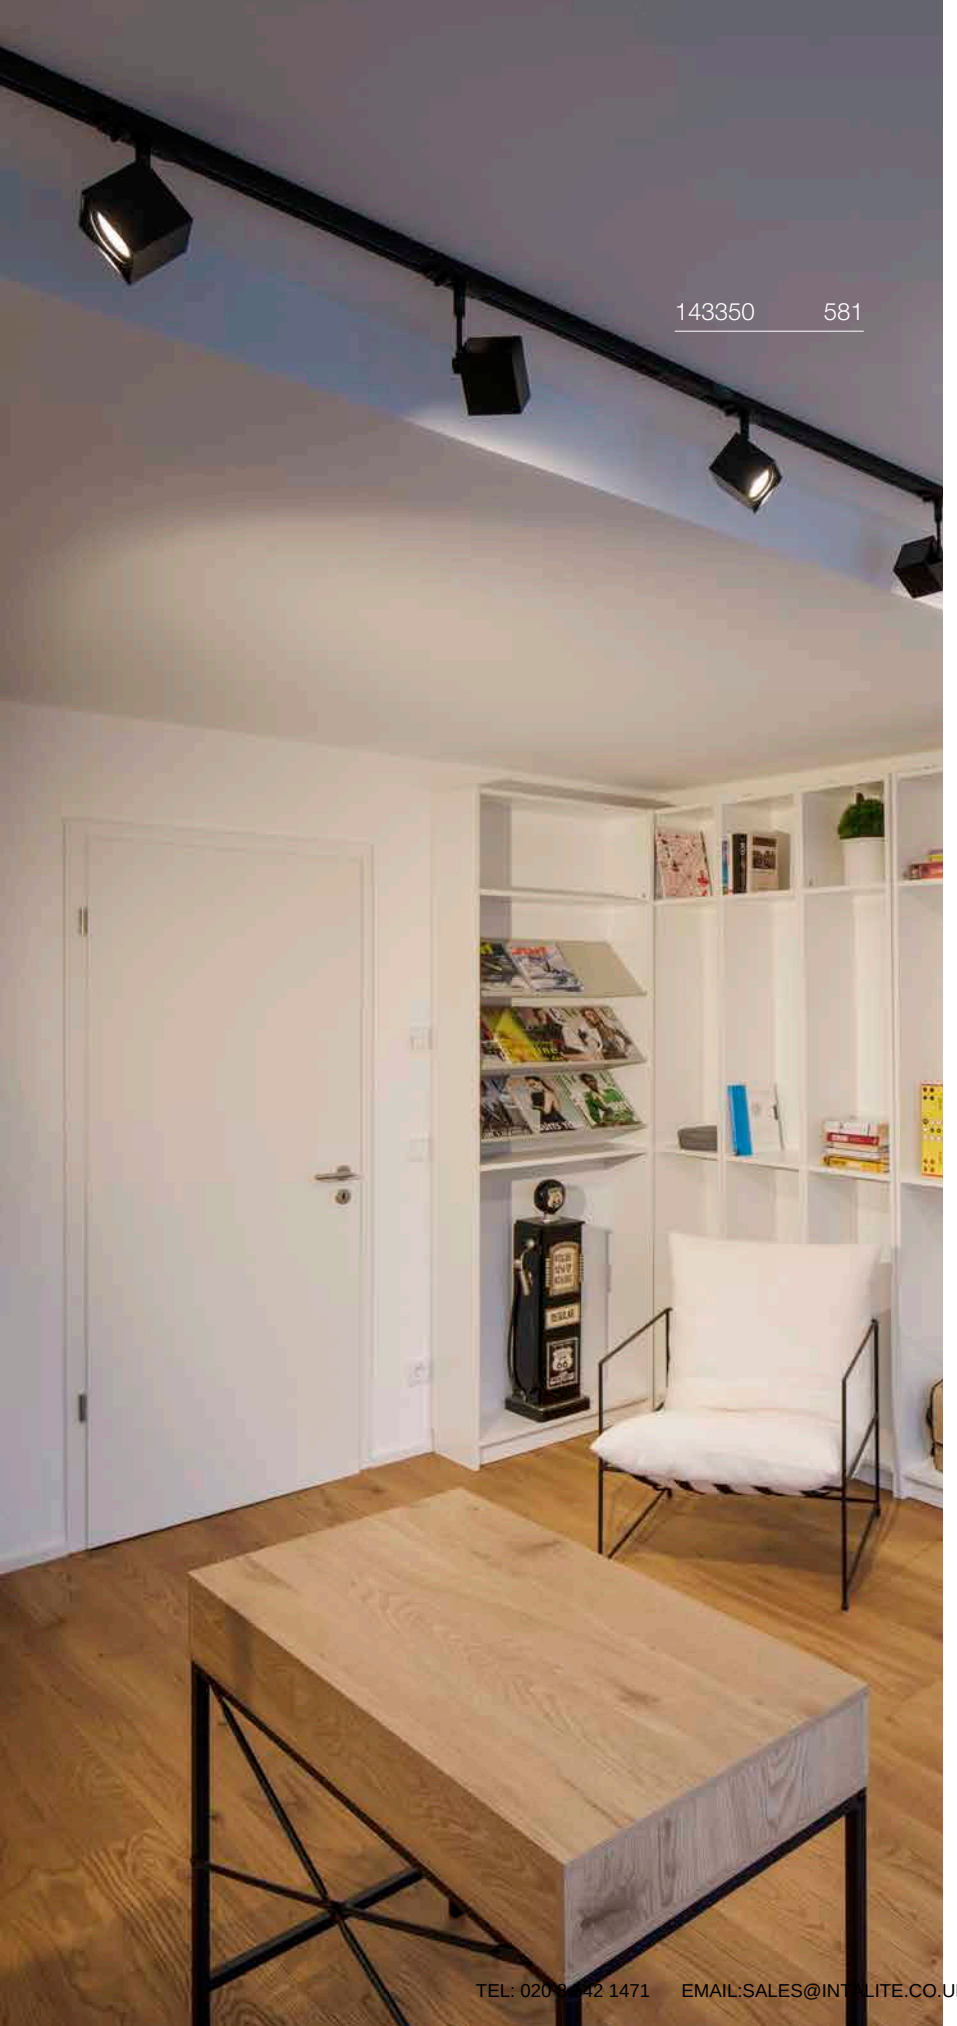

ALTRA DICE TRACK
1-phase, QPAR51



IP20 350° 180°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 50 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**143350**	**76.00**
○ white	**143351**	**76.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: **1005077** **7.00 GBP**

SMART

GU10 | 10 W | 24°
750 lm | 2200-6500 K | EEC = G
10 kWh/1000 h

Prod. no.: **1010467** **50.00 GBP**

TEL: 020 8 42 1471 EMAIL:SALES@INTALITE.CO.UK

1005727 627

SOCKET

PURI 2.0 TUBE | 607

SOCKET

PURI 2.0 CONE | 607

SOCKET

PURI 2.0 DOME | 607

SOCKET

PURI TRACK | 613

SOCKET

GRIP! | 614–617

LED

NUMINOS® | 620–627

LED

NUMINOS® ZOOM M | 628

LED

UNIVERSAL TRACKSPOT | 631

LED

ONE 40 TRACK | 633

LED

NOBLO® SPOT | 635

LED

SIGHT EVO | 637–639

LED

SIGHT PANEL | 640

LED

SIGHT EASY | 641

LED

SIGHT TRACK | 642

LED

SIGHT MOVE | 643

SOCKET

PARA CONE 14 | 645

SOCKET

PARA CONE GL | 647

SOCKET

FORCHINI M 40 TRACK | 649

SOCKET

LIGHT EYE® | 650–651

SOCKET

EURO SPOT TRACK | 562

LED

EURO CUBE | 653

LED

KALU 2.0 | 655

SOCKET

KALU TRACK | 655

SOCKET

BIMA | 656

SOCKET

BIMA | 657

LED

HELIA 50 TRACK | 657

LED

ENOLA® C TRACK | 657

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

3-PHASE BUSBAR COMPATIBILITY

Track compatibility with adapters of:

	SLV	EUTRAC®	Global/Nordic
SLV S-TRACK tracks and track components			
3-phase	✓	✓	✓
3-Phase DALI	✓	✗	✓

Light compatibility with tracks and track components of:

	SLV S-TRACK	EUTRAC®	Global/Nordic
SLV 3-phase light adapter			
3-phase	✓	✓	✓
3-Phase DALI	✓	✗	✓

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SLV track systems and components stand out for their high level of compatibility and are compatible with lights and adapters from: EUTRAC®, Zumtobel, Erco, LTS ONETrack and unipro® .

Zumtobel	Erco	LTS ONETrack	unipro®
✓	✓	✓	✓
✗	✗	✓	✓

Zumtobel	Erco	LTS ONETrack	unipro®
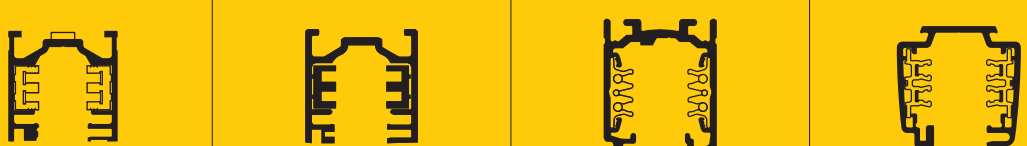			
✓	✓	✓	✓
✗	✗	✓	✓

Details not guaranteed.
Technical data and dimensions are subject to change without notice.
During the planning phase of the project, check the project using samples to ensure functionality.
Compatibility refers only to tracks/lights.
Tracks and track components from different manufacturers should not be combined.
Subject to prior testing using light and track samples.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

3-PHASE TRACK SYSTEM

Professionally managed: well-designed lighting is essential, especially where there's plenty to see. Due to the versatility of track lighting, it's possible to showcase specific objects in the perfect light. Changes to the lighting design can also be made at any time. 3-phase high-voltage busbars are perfect for shops and exhibition stands, or for use in the catering trade. SLV lights create the perfect illumination and present products and exhibition items in just the right light.

WHERE DO YOU WANT TO INSTALL YOUR SYSTEM?

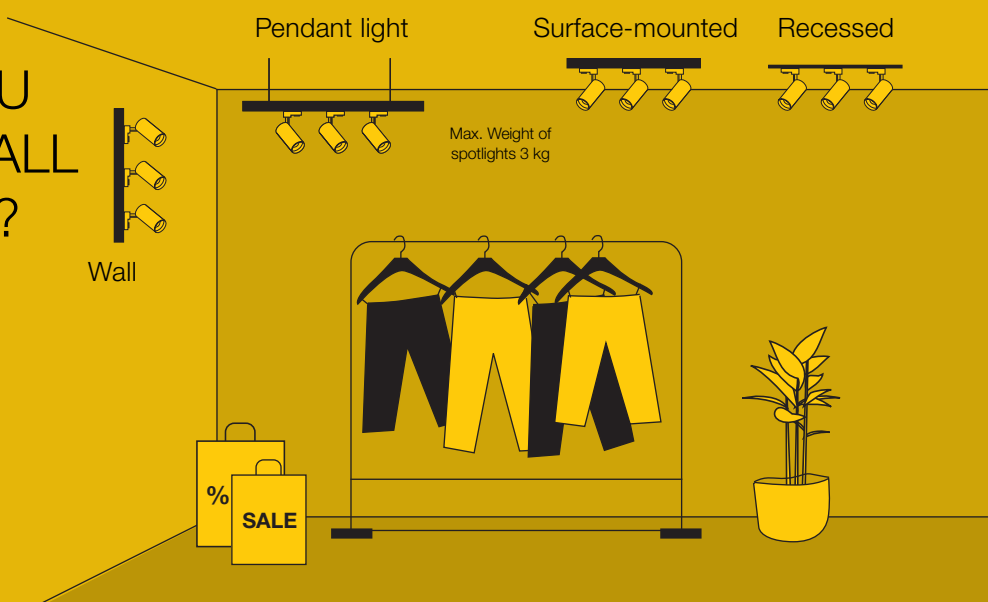

TRACK CONFIGURATION

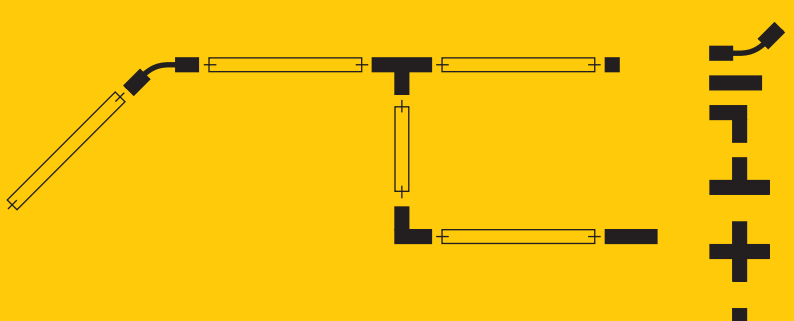

Use our track configurator at
www.slv.com/en/service/slv-track-configurator

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TRACK SYSTEMS

S-TRACK
3-phase system with DALI option

Recessed track

Surface-mounted track

Black / white

1m - 2m - 3m - 4m

EUTRAC
3-phase system

Recessed track

Surface-mounted track

White

1m - 2m - 3m

Black / White / Grey

1m - 2m - 3m

Colour selection

Choose your light!

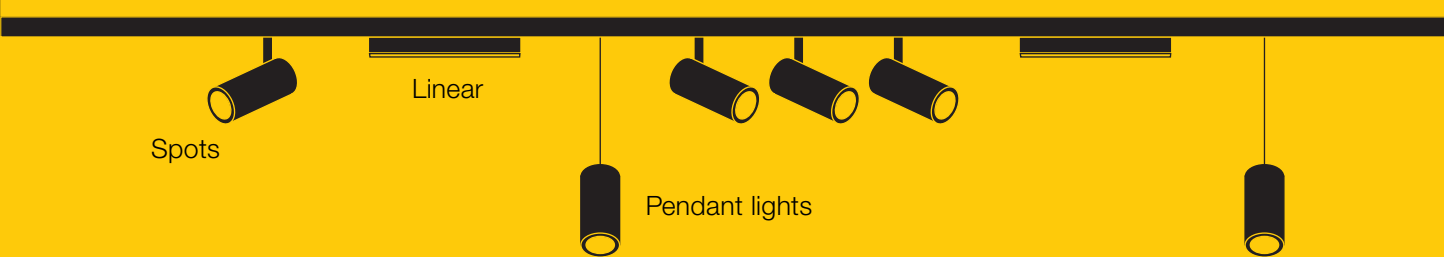

DONE!

Various design options tailored to your room

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

S-TRACK
3-phase surface-mounted track, ON/OFF

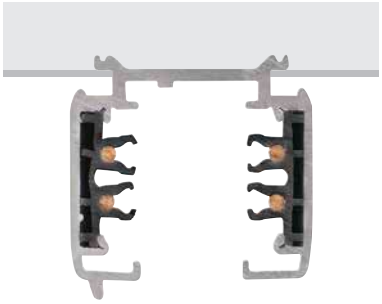

	100 cm	100 cm	200 cm	200 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 3.6 x 3.6	100 x 3.6 x 3.6	200 x 3.6 x 3.6	200 x 3.6 x 3.6
Prod. no.	**175010**	**1001375**	**175020**	**1001376**
GBP	**31.00**	**31.00**	**59.00**	**59.00**

	300 cm	300 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.
Max. mech. load	30 kg	30 kg
Colour	● black	○ white
Material	aluminium	aluminium
L x W x H (cm)	300 x 3.6 x 3.6	300 x 3.6 x 3.6
Prod. no.	**175030**	**1001377**
GBP	**84.00**	**84.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

S-TRACK

3-phase surface-mounted track ON/OFF
Planning assistance and accessories at a glance

View of components from above
on the installation side

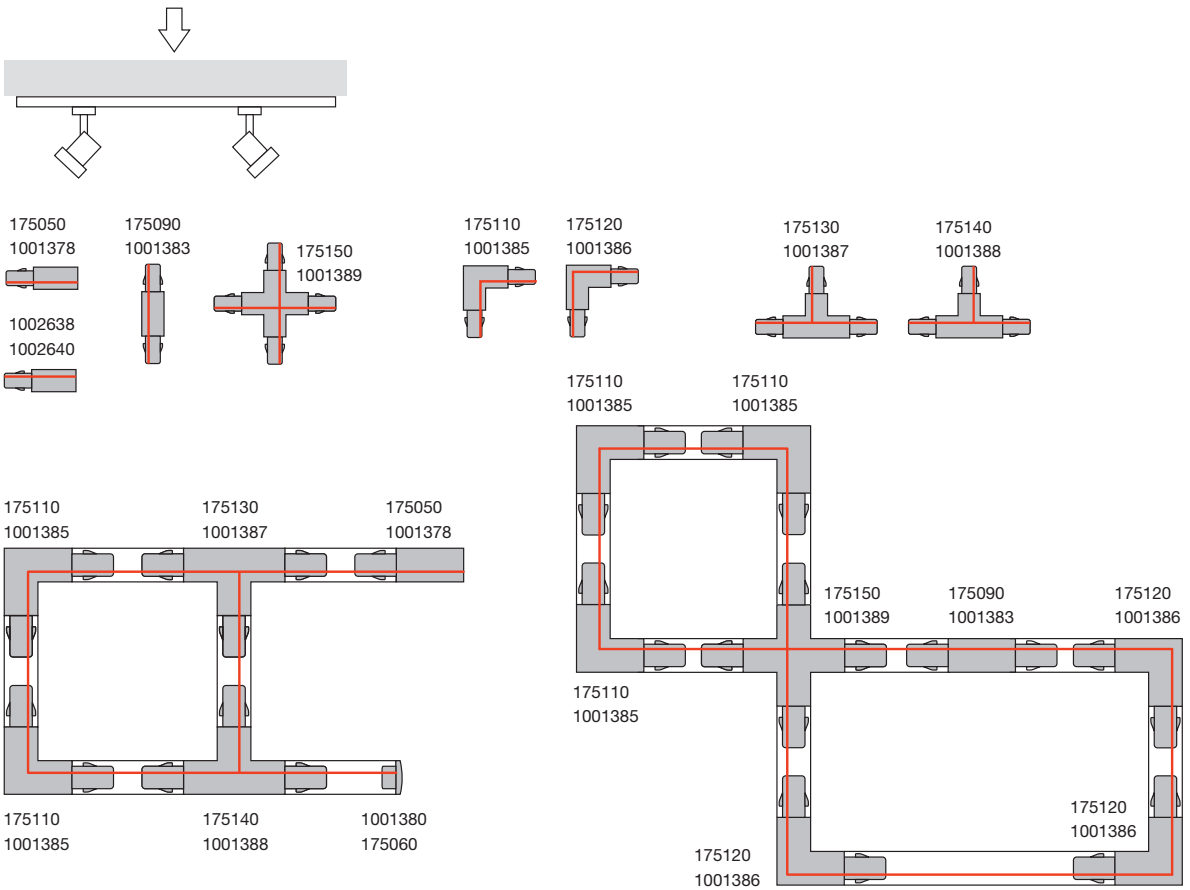

T-connector, On/Off, left, with feed-in option

16 A max. | polycarbonate (PC)
L: 10 cm | W: 6.7 cm | H: 3.3 cm

● black	Prod. no.	**175130**	**30.00 GBP**
○ white	Prod. no.	**1001387**	**30.00 GBP**

T-connector, On/Off, right, with feed-in option

16 A max. | polycarbonate (PC)
L: 10 cm | W: 6.7 cm | H: 3.3 cm

● black	Prod. no.	**175140**	**30.00 GBP**
○ white	Prod. no.	**1001388**	**30.00 GBP**

L-connector, On/Off, earth outside

16 A max. | polycarbonate (PC)
L: 6.7 cm | W: 6.7 cm | H: 3.3 cm

● black	Prod. no.	**175120**	**24.00 GBP**
○ white	Prod. no.	**1001386**	**24.00 GBP**

L-connector, On/Off, earth inside

16 A max. | polycarbonate (PC)
L: 6.7 cm | W: 6.7 cm | H: 3.3 cm

● black	Prod. no.	**175110**	**24.00 GBP**
○ white	Prod. no.	**1001385**	**24.00 GBP**

Feed-in, On/Off, earth left

16 A max. | polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.	**175050**	**13.00 GBP**
○ white	Prod. no.	**1001378**	**13.00 GBP**

Feed-in, On/Off, earth right

16 A max. | polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.	**175040**	**14.00 GBP**
○ white	Prod. no.	**1001379**	**14.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

X-connector, On/Off

16 A max. | polycarbonate (PC)
L: 10 cm | W: 10 cm | H: 3.3 cm

● black	Prod. no.	**175150**	**43.00 GBP**
○ white	Prod. no.	**1001389**	**43.00 GBP**

Mini-insulating connector

16 A max. | Plastic
L: 6.8 cm | W: 3.10 cm | H: 2.6 cm

● black	Prod. no.	**175080**	**7.00 GBP**
○ white	Prod. no.	**1001382**	**7.00 GBP**

Longitudinal connector, On/Off

16 A max. | polycarbonate (PC)
L: 9.9 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.	**175090**	**24.00 GBP**
○ white	Prod. no.	**1001383**	**24.00 GBP**

Mini-connector, On/Off

16 A max. | polycarbonate (PC)
L: 6.8 cm | W: 2 cm | H: 2 cm

● black	Prod. no.	**175070**	**8.00 GBP**
○ white	Prod. no.	**1001381**	**8.00 GBP**

Flex connector, On/Off

16 A max. | polycarbonate (PC)
L: 16.2 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.	**175100**	**37.00 GBP**
○ white	Prod. no.	**1001384**	**37.00 GBP**

3-phase Adapter, On/Off

16 A max. | polycarbonate (PC)
L: 8.4 cm | W: 5.5 cm | H: 3.3 cm

● black	Prod. no.	**175200**	**14.00 GBP**
○ white	Prod. no.	**1001394**	**14.00 GBP**

Pendant clip

4 cm | Steel
L: 4 cm | W: 3.40 cm | H: 1.25 cm

● black	Prod. no.	**1002657**	**7.00 GBP**
○ white	Prod. no.	**1002658**	**7.00 GBP**

Cover, 2m

200 cm | Polycarbonate (PC)
L: 200 cm | W: 2.20 cm | H: 0.75 cm

● black	Prod. no.	**1004939**	**7.00 GBP**
○ white	Prod. no.	**1004940**	**7.00 GBP**

Mech. 3-phase Adapter

6.6 cm | Aluminium/Plastic
L: 6.6 cm | W: 6.60 cm | H: 3.1 cm

● black	Prod. no.	**175210**	**14.00 GBP**
○ white	Prod. no.	**1001395**	**14.00 GBP**

Pendant suspension

6 cm | Aluminium/Plastic
L: 6 cm | W: 6 cm | H: 4 cm

● black	Prod. no.	**175160**	**28.00 GBP**
○ white	Prod. no.	**1001390**	**28.00 GBP**

End cap

3.5 cm | Plastic
L: 3.5 cm | W: 3.30 cm | H: 3.2 cm

● black	Prod. no.	**175060**	**2.00 GBP**
○ white	Prod. no.	**1001380**	**2.00 GBP**

Mech. 3-phase Adaptor with hook

5 kg max. | Plastic/Steel
H: 5.2 cm

● black	Prod. no.	**175190**	**3.00 GBP**
○ white	Prod. no.	**1001393**	**3.00 GBP**

Joint connector

18.2 cm | Aluminium
L: 18.2 cm | W: 3.30 cm | H: 2.1 cm

● black	Prod. no.	**175180**	**11.00 GBP**
○ white	Prod. no.	**1001392**	**11.00 GBP**

EUTRACK®, S-TRACK and 1-phase tracks, 5 m, set of two

500 cm | Stainless steel/Brass
L: 500 cm

● nickel	Prod. no.	**1002845**	**36.00 GBP**

Ceiling rosette, phase & DALI

Polycarbonate (PC)
H: 3.5 cm

● black	Prod. no.	**1004684**	**33.00 GBP**
○ white	Prod. no.	**1004685**	**33.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

S-TRACK
3-phase surface-mounted track, Phase & DALI

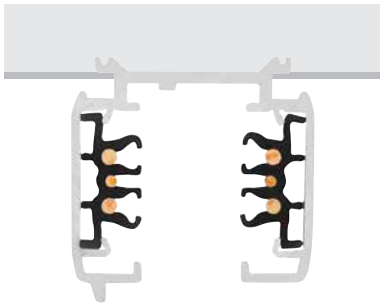

	100 cm	100 cm	200 cm	200 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 3.6 x 3.6	100 x 3.6 x 3.6	200 x 3.6 x 3.6	200 x 3.6 x 3.6
Prod. no.	**1004937**	**1004938**	**1002631**	**1002632**
GBP	**40.00**	**40.00**	**70.00**	**70.00**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● schwarz	○ weiß	● schwarz	○ weiß
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 3.6 x 3.6	300 x 3.6 x 3.6	400 x 3.6 x 3.6	400 x 3.6 x 3.6
Prod. no.	**1002633**	**1002634**	**1002635**	**1002636**
GBP	**101.00**	**101.00**	**127.00**	**127.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

3-phase phase & DALI surface-mounted track
Planning assistance and accessories at a glance

View of components from above
on the installation side

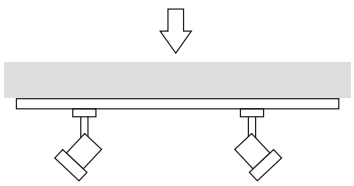

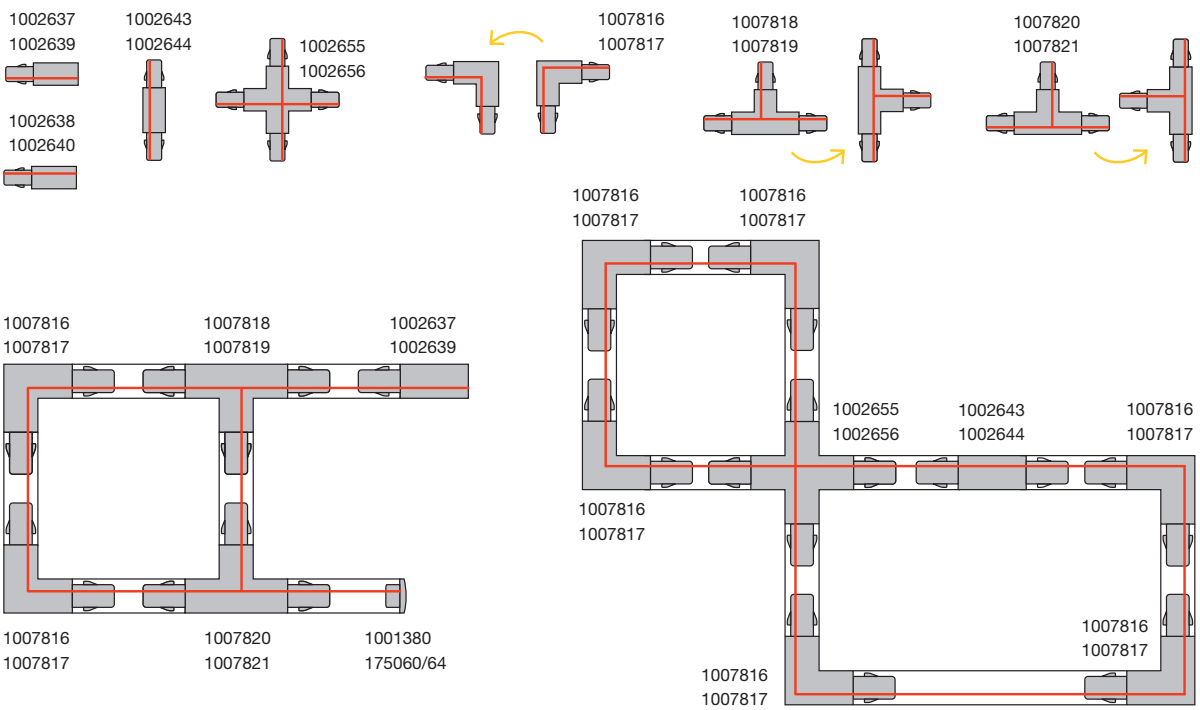







T-connector, phase & DALI, adjustable, left, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 11.90 cm | H: 3.3 cm

● black	Prod. no.	**1007818**	**34.00 GBP**
○ white	Prod. no.	**1007819**	**34.00 GBP**



T-connector, phase & DALI, adjustable, right, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 11.90 cm | H: 3.3 cm

● black	Prod. no.	**1007820**	**34.00 GBP**
○ white	Prod. no.	**1007821**	**34.00 GBP**



L-connector, phase & DALI, adjustable, with feed-in option

16 A max. | polycarbonate (PC)
L: 11.9 cm | W: 11.90 cm | H: 3.3 cm

● black	Prod. no.	**1007816**	**29.00 GBP**
○ white	Prod. no.	**1007817**	**29.00 GBP**

Feed-in, phase & DALI, earth left

16 A max. | polycarbonate (PC)
L: 13.9 cm | W: 3.50 cm | H: 3.3 cm

● black	Prod. no.	**1002637**	**17.00 GBP**
○ white	Prod. no.	**1002639**	**17.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Feed-in, phase & DALI, earth right

16 A max. | polycarbonate (PC)
L: 13.9 cm | W: 3.50 cm | H: 3.3 cm

● black	Prod. no.	**1002638**	**17.00 GBP**
○ white	Prod. no.	**1002640**	**17.00 GBP**

X-connector, phase & DALI

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 20.30 cm | H: 3.3 cm

● black	Prod. no.	**1002655**	**55.00 GBP**
○ white	Prod. no.	**1002656**	**55.00 GBP**

Longitudinal connector, phase & DALI

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 3.50 cm | H: 3.3 cm

● black	Prod. no.	**1002643**	**29.00 GBP**
○ white	Prod. no.	**1002644**	**29.00 GBP**

Mini-insulating connector

16 A max. | Plastic
L: 6.8 cm | W: 3.10 cm | H: 2.6 cm

● black	Prod. no.	**175080**	**7.00 GBP**
○ white	Prod. no.	**1001382**	**7.00 GBP**

Flex connector, phase & DALI

16 A max. | polycarbonate (PC)
L: 28.5 cm | W: 3.50 cm | H: 3.3 cm

● black	Prod. no.	**1002645**	**46.00 GBP**
○ white	Prod. no.	**1002646**	**47.00 GBP**

Mini-connector, phase & DALI

16 A max. | polycarbonate (PC)
L: 10.6 cm | W: 2.50 cm | H: 2.8 cm

● black	Prod. no.	**1002641**	**9.00 GBP**
○ white	Prod. no.	**1002642**	**9.00 GBP**

Pendant clip

4 cm | Steel
L: 4 cm | W: 3.40 cm | H: 1.25 cm

● black	Prod. no.	**1002657**	**7.00 GBP**
○ white	Prod. no.	**1002658**	**7.00 GBP**

3-phase Adapter, DALI

16 A max. | polycarbonate (PC)
L: 11.3 cm | W: 5.50 cm | H: 3.3 cm

● black	Prod. no.	**1002660**	**17.00 GBP**
○ white	Prod. no.	**1002659**	**17.00 GBP**

Mech. 3-phase Adapter

6.6 cm | Aluminium/Plastic
L: 6.6 cm | W: 6.60 cm | H: 3.1 cm

● black	Prod. no.	**175210**	**14.00 GBP**
○ white	Prod. no.	**1001395**	**14.00 GBP**

Cover, 2m

200 cm | Polycarbonate (PC)
L: 200 cm | W: 2.20 cm | H: 0.75 cm

● black	Prod. no.	**1004939**	**7.00 GBP**
○ white	Prod. no.	**1004940**	**7.00 GBP**

End cap

3.5 cm | Plastic
L: 3.5 cm | W: 3.30 cm | H: 3.2 cm

● black	Prod. no.	**175060**	**2.00 GBP**
○ white	Prod. no.	**1001380**	**2.00 GBP**

Pendant suspension

6 cm | Aluminium/Plastic
L: 6 cm | W: 6 cm | H: 4 cm

● black	Prod. no.	**175160**	**28.00 GBP**
○ white	Prod. no.	**1001390**	**28.00 GBP**

Joint connector

18.2 cm | Aluminium
L: 18.2 cm | W: 3.30 cm | H: 2.1 cm

● black	Prod. no.	**175180**	**11.00 GBP**
○ white	Prod. no.	**1001392**	**11.00 GBP**

Mech. 3-phase Adaptor with hook

5 kg max. | Plastic/Steel
H: 5.2 cm

● black	Prod. no.	**175190**	**3.00 GBP**
○ white	Prod. no.	**1001393**	**3.00 GBP**

Ceiling rosette, phase & DALI

Polycarbonate (PC)
H: 3.5 cm

● black	Prod. no.	**1004684**	**33.00 GBP**
○ white	Prod. no.	**1004685**	**33.00 GBP**

EUTRACK®, S-TRACK and 1-phase tracks, 5 m, set of two

500 cm | Stainless steel/Brass
L: 500 cm

● nickel	Prod. no.	**1002845**	**36.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

S-TRACK
3-phase recessed track, Phase & DALI

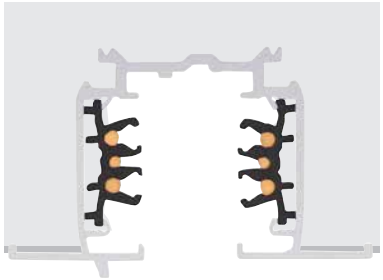

	100 cm	100 cm	200 cm	200 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 5.6 x 3.55	100 x 5.6 x 3.55	200 x 5.6 x 3.55	200 x 5.6 x 3.55
Prod. no.	**1006511**	**1006512**	**1006513**	**1006514**
GBP	**46.00**	**46.00**	**83.00**	**83.00**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black	○ white	● black	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 5.6 x 3.55	300 x 5.6 x 3.55	400 x 5.6 x 3.55	400 x 5.6 x 3.55
Prod. no.	**1006515**	**1006516**	**1006517**	**1006518**
GBP	**118.00**	**118.00**	**187.00**	**187.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

S-TRACK

3-phase recessed track PHASE & DALI
Planning assistance and accessories at a glance

View of components from above
on the installation side

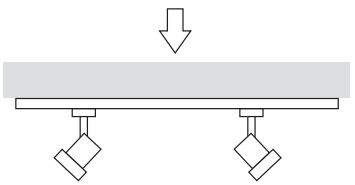

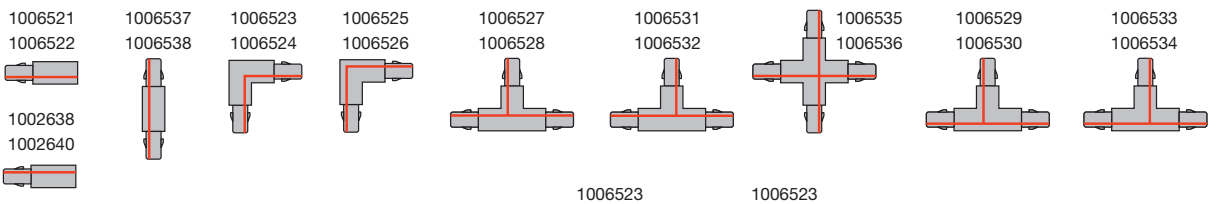

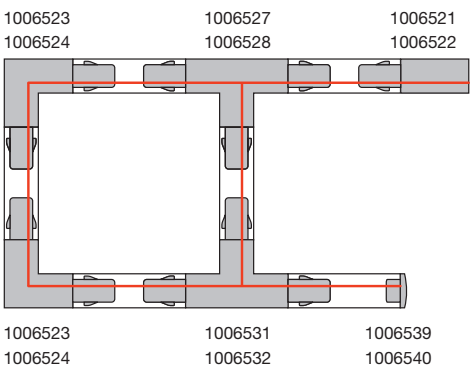

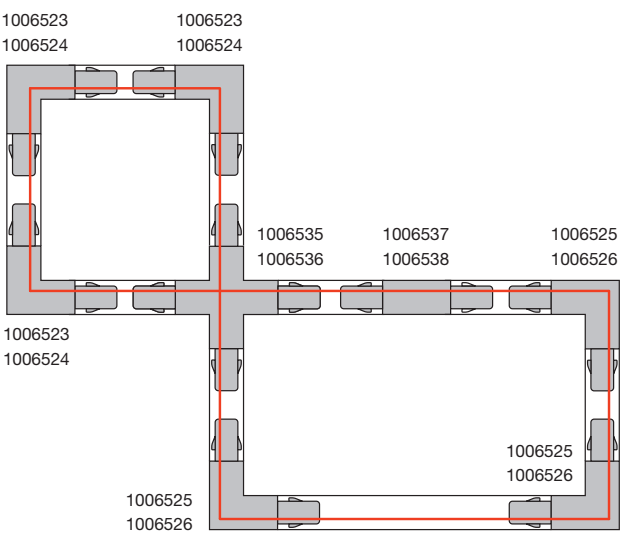

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Feed-in, phase & DALI, earth left

16 A max. | polycarbonate (PC)
L: 14.7 cm W: 5.60 cm H: 3.3 cm

● black	Prod. no.	**1006521**	**29.00 GBP**
○ white	Prod. no.	**1006522**	**29.00 GBP**

Feed-in, phase & DALI, earth right

16 A max. | polycarbonate (PC)
L: 14.7 cm W: 5.60 cm H: 3.3 cm

● black	Prod. no.	**1006519**	**29.00 GBP**
○ white	Prod. no.	**1006520**	**29.00 GBP**

L-connector, phase & Dali, internal earth, with feed-in option

16 A max. | polycarbonate (PC)
L: 13 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006523**	**29.00 GBP**
○ white	Prod. no.	**1006524**	**29.00 GBP**

L-connector, phase & Dali, external earth, with feed-in option

16 A max. | polycarbonate (PC)
L: 13 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006525**	**29.00 GBP**
○ white	Prod. no.	**1006526**	**29.00 GBP**

T-connector, phase & Dali, internal earth right, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006529**	**34.00 GBP**
○ white	Prod. no.	**1006530**	**34.00 GBP**

T-connector, phase & Dali, internal earth right, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006531**	**34.00 GBP**
○ white	Prod. no.	**1006532**	**34.00 GBP**

T-connector, phase & Dali,external earth left, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006527**	**34.00 GBP**
○ white	Prod. no.	**1006528**	**34.00 GBP**

T-connector, phase & Dali, external earth left, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006533**	**34.00 GBP**
○ white	Prod. no.	**1006534**	**34.00 GBP**

X-CONNECTOR

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 20.30 cm | H: 3.3 cm

● black	Prod. no.	**1006535**	**55.00 GBP**
○ white	Prod. no.	**1006536**	**55.00 GBP**

Longitudinal connector, phase & DALI

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 5.60 cm | H: 3.3 cm

● black	Prod. no.	**1006537**	**29.00 GBP**
○ white	Prod. no.	**1006538**	**29.00 GBP**

Mini-connector, phase & DALI

16 A max. | polycarbonate (PC)
L: 10.6 cm | W: 2.50 cm | H: 2.8 cm

● black	Prod. no.	**1002641**	**9.00 GBP**
○ white	Prod. no.	**1002642**	**9.00 GBP**

End cap, for 3-phase recessed track

Polycarbonate (PC)
L: 4.8 cm | W: 5.60 cm

● black	Prod. no.	**1006539**	**2.00 GBP**
○ white	Prod. no.	**1006540**	**2.00 GBP**

3-phase Adapter, DALI

16 A max. | polycarbonate (PC)
L: 11.3 cm | W: 5.50 cm | H: 3.3 cm

● black	Prod. no.	**1002660**	**17.00 GBP**
○ white	Prod. no.	**1002659**	**17.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

EUTRAC®
3-phase surface-mounted track

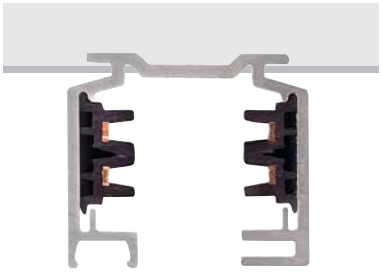

	100 cm	100 cm	100 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	○ white	● black	● grey
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	100 x 3.6 x 3.2	100 x 3.6 x 3.2	100 x 3.6 x 3.2
Prod. no.	**1001510**	**145100**	**145102**
GBP	**43.00**	**43.00**	**43.00**

	200 cm	200 cm	200 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	○ white	● black	● grey
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	200 x 3.6 x 3.2	200 x 3.6 x 3.2	200 x 3.6 x 3.2
Prod. no.	**1001511**	**145200**	**145202**
GBP	**78.00**	**78.00**	**78.00**

	300 cm	300 cm	300 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	○ white	● black	● grey
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	300 x 3.6 x 3.2	300 x 3.6 x 3.2	300 x 3.6 x 3.2
Prod. no.	**1001512**	**145300**	**145302**
GBP	**121.00**	**121.00**	**121.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

3-phase surface-mounted track
Planning assistance and accessories at a glance

View of components from above on the installation side

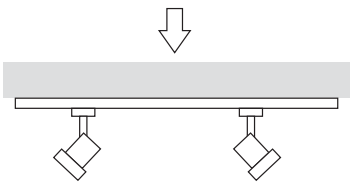

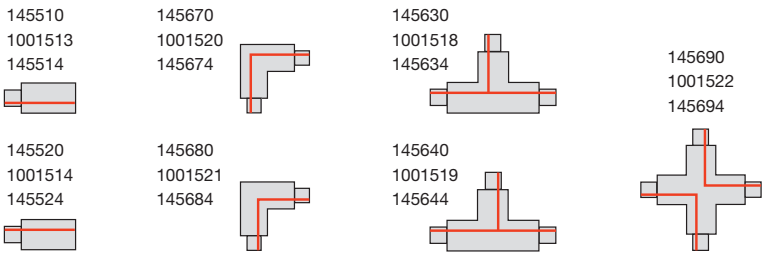

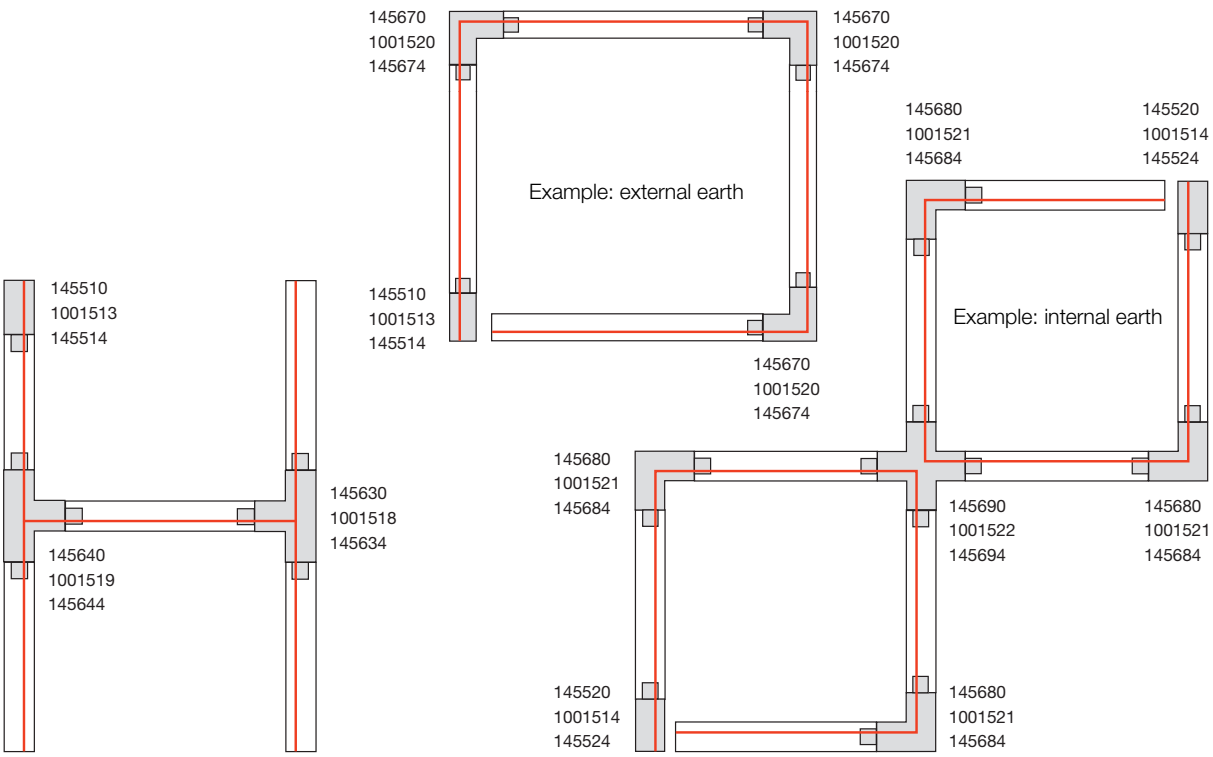

3-phase feed-in, earth left

16 A max. | Plastic
L: 11.2 cm W: 3.6 cm H: 3.2 cm

• earth left

● black	Prod. no.	**145510**	**17.00 GBP**
○ white	Prod. no.	**1001513**	**17.00 GBP**
● grey	Prod. no.	**145514**	**17.00 GBP**

3-phase feed-in, earth right

16 A max. | Plastic
L: 11.2 cm W: 3.6 cm H: 3.2 cm

• earth right

● black	Prod. no.	**145520**	**17.00 GBP**
○ white	Prod. no.	**1001514**	**17.00 GBP**
● grey	Prod. no.	**145524**	**17.00 GBP**

3-phase centre feed-in

16 A max. | Plastic
L: 13 cm W: 3.6 cm H: 3.6 cm

● black	Prod. no.	**145530**	**39.00 GBP**
○ white	Prod. no.	**1001515**	**39.00 GBP**
● grey	Prod. no.	**145534**	**39.00 GBP**

3-phase longitudinal connector with feed-in option

16 A max. | Plastic
L: 19.2 cm | W: 3.6 cm | H: 3.2 cm

● black	Prod. no.	**145660**	**67.00 GBP**
○ white	Prod. no.	**1001517**	**67.00 GBP**
● grey	Prod. no.	**145664**	**67.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

3-phase longitudinal connector

16 A max. | Plastic
L: 5.8 cm | W: 1.5 cm | H: 2.6 cm

● black	Prod. no.	**145560**	**17.00 GBP**
○ white	Prod. no.	**1001516**	**17.00 GBP**
● grey	Prod. no.	**145564**	**17.00 GBP**

3-phase, L-connector, external earth, with feed-in option

16 A max. | Plastic
L: 15.0 cm | W: 15.0 cm | H: 3.2 cm

● black	Prod. no.	**145670**	**56.00 GBP**
○ white	Prod. no.	**1001520**	**56.00 GBP**
● grey	Prod. no.	**145674**	**56.00 GBP**

3-phase, T-connector, internal earth right

16 A max. | Plastic
L: 26 cm | W: 18,50 cm | H: 3,2 cm

● black	Prod. no.	**145640**	**77.00 GBP**
○ white	Prod. no.	**1001519**	**77.00 GBP**
● grey	Prod. no.	**145644**	**77.00 GBP**

3-phase, joint connector

10 cm | Plastic
L: 10 cm | W: 3.6 cm | H: 1.9 cm

● black	Prod. no.	**145600**	**19.00 GBP**
○ white	Prod. no.	**1001523**	**19.00 GBP**
● grey	Prod. no.	**145604**	**19.00 GBP**

3-phase, socket

6.3 A max. | Plastic
L: 9.6 cm W: 6.5 cm H: 9 cm

● black	Prod. no.	**145700**	**81.00 GBP**
○ white	Prod. no.	**1001525**	**80.00 GBP**

3-phase, pendant clip

aluminium
L: 5 cm W: 3.6 cm H: 1.9 cm

● black	Prod. no.	**145730**	**10.00 GBP**
○ white	Prod. no.	**1001530**	**10.00 GBP**
● grey	Prod. no.	**145734**	**10.00 GBP**

3-phase, end cap

Plastic
L: 3.6 cm W: 1.7 cm H: 3.2 cm

● black	Prod. no.	**145590**	**4.00 GBP**
○ white	Prod. no.	**1001527**	**4.00 GBP**
● grey	Prod. no.	**145594**	**4.00 GBP**

3-phase, pendant suspension, rigid

Plastic/Steel
L: 120 cm H: 122 cm

● black	Prod. no.	**145710**	**39.00 GBP**
○ white	Prod. no.	**1001528**	**39.00 GBP**
● grey	Prod. no.	**145714**	**39.00 GBP**

3-phase, L-connector, internal earth, with feed-in option

16 A max. | Plastic
L: 15.0 cm | W: 15.0 cm | H: 3.2 cm

● black	Prod. no.	**145680**	**56.00 GBP**
○ white	Prod. no.	**1001521**	**56.00 GBP**
● grey	Prod. no.	**145684**	**56.00 GBP**

3-phase, T-connector, internal earth left

16 A max. | Plastic
L: 26 cm | W: 18,50 cm | H: 3,2 cm

● black	Prod. no.	**145630**	**77.00 GBP**
○ white	Prod. no.	**1001518**	**77.00 GBP**
● grey	Prod. no.	**145634**	**77.00 GBP**

3-phase, X-connector with feed-in option

16 A max. | Plastic
L: 26 cm W: 26 cm H: 3.2 cm

● black	Prod. no.	**145690**	**112.00 GBP**
○ white	Prod. no.	**1001522**	**112.00 GBP**
● grey	Prod. no.	**145694**	**112.00 GBP**

3-phase, flex connector

16 A max. | Plastic
L: 30.7 cm | W: 3.6 cm | H: 3.2 cm

● black	Prod. no.	**145580**	**77.00 GBP**
○ white	Prod. no.	**1001524**	**77.00 GBP**
● grey	Prod. no.	**145584**	**77.00 GBP**

3-phase, pendant light adapter

10 A max. | Plastic
L: 9.6 cm W: 3.5 cm H: 4.5 cm

● black	Prod. no.	**145990**	**17.00 GBP**
○ white	Prod. no.	**1001542**	**17.00 GBP**
● grey	Prod. no.	**145994**	**17.00 GBP**

3-phase, universal point outlet

16 A max. | Plastic
H: 3.1 cm | Ø: 11.9 cm

● black	Prod. no.	**145830**	**90.00 GBP**
○ white	Prod. no.	**1001526**	**89.00 GBP**
● grey	Prod. no.	**145834**	**90.00 GBP**

3-phase, pendant suspension, rigid

Plastic/Steel
L: 60 cm H: 63.5 cm

● black	Prod. no.	**145720**	**34.00 GBP**
○ white	Prod. no.	**1001529**	**34.00 GBP**
● grey	Prod. no.	**145724**	**34.00 GBP**

EUTRACK®, S-TRACK and 1-phase tracks, 5 m, set of two

Stainless steel/brass
L: 500 cm

● nickel	Prod. no.	**1002845**	**36.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

EUTRAC®
3-phase, recessed track

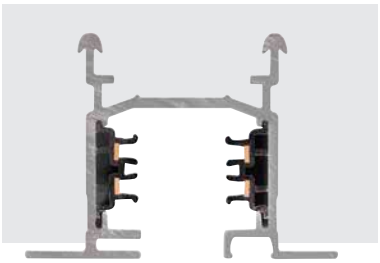

	200 cm	300 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.
Colour	○ white	○ white
Material	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	200 x 5.9 x 4.1	300 x 5.9 x 4.1
Prod. no.	**1001531**	**1001532**
GBP	**104.00**	**173.00**

3-phase feed-in, earth left

16 A max. | Plastic/Steel
L: 12.2 cm | W: 6 cm | H: 3.4 cm

○ white Prod. no. **1001533** **28.00 GBP**

3-phase feed-in, earth right

16 A max. | Plastic/Steel
L: 12.2 cm | W: 6 cm | H: 3.4 cm

○ white Prod. no. **1001534** **28.00 GBP**

3-phase, L-connector

16 A max. | Plastic/Steel
L: 16 cm | W: 16 cm | H: 3.2 cm
• Earth external, with feed-in option

○ white Prod. no. **1001536** **67.00 GBP**

3-phase, L-connector

16 A max. | Plastic/Steel
L: 16 cm | W: 16 cm | H: 3.2 cm
• Earth internal, with feed-in option

○ white Prod. no. **1001537** **67.00 GBP**

3-phase, end cap

2.7 cm | Plastic
L: 2.7 cm | W: 6 cm | H: 3.2 cm

○ white Prod. no. **1001538** **7.00 GBP**

3-phase longitudinal connector

16 A max. | Plastic/Steel
L: 6.2 cm W: 2.5 cm H: 2.7 cm

○ white Prod. no. **1001539** **24.00 GBP**

3-phase, mounting spring clip

2 cm | Steel
L: 2 cm W: 1 cm H: 2.5 cm

● grey Prod. no. **145551** **12.00 GBP**

3-phase light adapter

10 A max. | Plastic
L: 9.6 cm W: 3.5 cm H: 4.5 cm

○ white Prod. no. **1001542** **17.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PURI 2.0 Tube
3-phase, QPAR51



220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008266**	**34.00**
●● black/gold	**1008267**	**34.00**
○ white	**1008268**	**34.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: 1005077 7.00 GBP

PURI 2.0 Cone
3-phase, QPAR51



220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008269**	**34.00**
●● black/gold	**1008270**	**34.00**
○ white	**1008271**	**34.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: 1005077 7.00 GBP

PURI 2.0 Dome
3-phase, QPAR51



220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008272**	**34.00**
●● black/gold	**1008273**	**34.00**
○ white	**1008274**	**34.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: 1005077 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008282 609

PURI 2.0 Tube
3-phase, PD, QPAR51

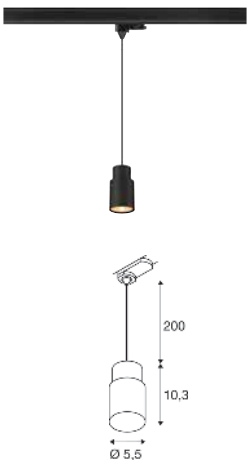

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	1008275	38.00
●● black/gold	1008276	38.00
○ white	1008277	38.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

PURI 2.0 Cone
3-phase, PD, QPAR51

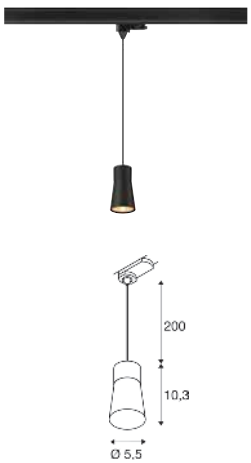

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	1008278	38.00
●● black/gold	1008279	38.00
○ white	1008280	38.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

PURI 2.0 Dome
3-phase, PD, QPAR51

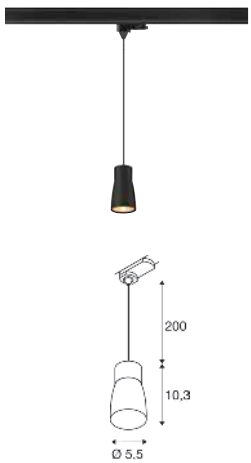

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	1008281	38.00
●● black/gold	1008282	38.00
○ white	1008283	38.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008271+1002819 607+611

PURI 2.0 Tube
Shade

Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Options	Prod. no.	GBP
black	**1008214**	**8.00**
white	**1008213**	**8.00**
gold	**1008216**	**8.00**
grey	**1008215**	**8.00**
bronze	**1008217**	**8.00**
Aluminium	**1008376**	**8.00**

PURI 2.0 Cone
Shade

Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Options	Prod. no.	GBP
black	**1008219**	**8.00**
white	**1008218**	**8.00**
gold	**1008221**	**8.00**
grey	**1008220**	**8.00**
bronze	**1008222**	**8.00**
Aluminium	**1008377**	**8.00**

PURI 2.0 Dome
Shade

Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Options	Prod. no.	GBP
black	**1008224**	**8.00**
white	**1008223**	**8.00**
gold	**1008226**	**8.00**
grey	**1008225**	**8.00**
bronze	**1008227**	**8.00**
Aluminium	**1008378**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

153560 613

MENSEN DIE ZICH ELKE DAG KUNNEN GEVEN..
ZIJ ZIJN DE MENSEN DIE IK BEWONDER.
ZE ZIJN ECHTE MENSEN.
-Marco Pierre White-
Succes is geboren uit arrogantie,
maar grootheid komt uit nederigheid.

PURI TRACK
3-phase, QPAR51



IP20 350° 85°

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- Decorative ring included

SOCKET INSIDE 50 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**153560**	**31.00**
○ white	**153561**	**31.00**
● grey	**153564**	**31.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000h

Prod. no.: **1005273** **9.00 GBP**

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: **1010470** **33.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRIP! M
3-phase, DALI, Ø 4,3 cm



220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium

• Honeycomb accessories included

Down	1810 lm	2700 K
Down	1900 lm	3000 K

Options	Prod. no.	GBP
black/gold 1810 lm | 2700 K	**1008436**	**154.00**
black/gold 1900 lm | 3000 K	**1008438**	**154.00**
white/black 1810 lm | 2700 K	**1008435**	**154.00**
white/black 1900 lm | 3000 K	**1008437**	**154.00**

Product	Prod. no.	GBP
Decorative ring		
white	**1008492**	**17.00**
black	**1008493**	**17.00**
nickel	**1008494**	**17.00**
gold	**1008495**	**17.00**

GRIP! M
3-phase, DALI, Ø 4,3 cm



220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

• Honeycomb accessories included

Down	1000 lm	2000 K – 3000 K

Options	Prod. no.	GBP
black/gold	**1008440**	**154.00**
white/black	**1008439**	**154.00**

Product	Prod. no.	GBP
Decorative ring		
white	**1008492**	**17.00**
black	**1008493**	**17.00**
nickel	**1008494**	**17.00**
gold	**1008495**	**17.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRIP! M
3-phase, PHASE, Ø 4,3 cm



IP20 IK02 42° 330° 90°

50 000 h L80B10 UGR 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium

• Honeycomb accessories included

LED INSIDE CRI 90

Down	1810 lm	2700 K
Down	1900 lm	3000 K

Options	Prod. no.	GBP
black/gold 1810 lm | 2700 K	**1008442**	**154.00**
black/gold 1900 lm | 3000 K	**1008444**	**154.00**
white/black 1810 lm | 2700 K	**1008441**	**154.00**
white/black 1900 lm | 3000 K	**1008443**	**154.00**

Product	Prod. no.	GBP
Decorative ring		
white	**1008492**	**17.00**
black	**1008493**	**17.00**
nickel	**1008494**	**17.00**
gold	**1008495**	**17.00**

GRIP! M
3-phase, PHASE, Ø 4,3 cm

DIM TO WARM



IP20 IK02 42° 330° 90°

50 000 h L80B20 UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

• Honeycomb accessories included

LED INSIDE CRI 90

Down	1000 lm	2000 K – 3000 K

Options	Prod. no.	GBP
black/gold	**1008446**	**153.00**
white/black	**1008445**	**154.00**

Product	Prod. no.	GBP
Decorative ring		
white	**1008492**	**17.00**
black	**1008493**	**17.00**
nickel	**1008494**	**17.00**
gold	**1008495**	**17.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008493 614

GRIP! L
3-phase, QPAR51, Ø 5,7 cm



IP20 IK02 330° 90°

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Options	Prod. no.	GBP
black/gold	1008453	77.00
white/black	1008452	77.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005080 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

GRIP! M
Decorative ring Ø 4,0 cm

Ø: 4 cm
H: 1.4 cm
Material: Aluminium

Options	Prod. no.	GBP
black	1008493	17.00
white	1008492	17.00
gold	1008495	17.00
nickel	1008494	17.00

GRIP! L
Decorative ring Ø 5,4 cm

Ø: 5.4 cm
H: 2.05 cm
Material: Aluminium

Options	Prod. no.	GBP
black	1008497	20.00
white	1008496	20.00
gold	1008499	20.00
nickel	1008498	20.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CONFIGURE YOUR NUMINOS®

SELECT YOUR SYSTEM COLOUR

NUMINOS® DL

NUMINOS® MOVE

NUMINOS® GIMBLE



- black
  - black
  - white
  - chrome
- white
  - black
  - white
  - chrome

NUMINOS® PD

NUMINOS® CL

NUMINOS® SPOT



black white

NUMINOS® TRACK

NUMINOS® ZOOM

black white

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

The NUMINOS® lighting system offers constant lighting characteristics and a modern design for all uses: from hotels and offices to commercial and private spaces. From application to technology to detailed design: one great feature is that the modular downlights and spotlights can be configured exactly as required by the design or space in question. Thanks to standardised light qualities within the system, all NUMINOS® variants can be perfectly combined with one another, regardless of the type of installation in the project. The more multifaceted your project, the more you can benefit from the intelligent NUMINOS® lighting system.

Discover NUMINOS® Lights also for the 48 V system on p. 486 – 493

SIZE

XS **S** **M** **L** **XL**

PERFORMANCE

XS 200mA
Power consumption: 7 W

S 200mA
Power consumption: 7 W

M 350mA
Power consumption: 12 W

L 500mA
Power consumption: 17 W

XL 700mA
Power consumption: 24 W

DIFFUSERS

ELLIPTICAL

Vertically distributed light, reduced glare, perfect for use in corridors

PRISMATIC

Wide beam, low glare, perfect for lights at specific distances

FROSTED

Wide beam, superior illumination, perfect for low ceilings

HONEYCOMB

Narrow beam, reduced glare, perfect for computer work

S **M** **L** **XL**

S 200mA
Power consumption: 8.6 W

M 350mA
Power consumption: 14 W

L 500mA
Power consumption: 9 W

XL 700mA
Power consumption: 26 W

S **M** **L** **XL**

NUMINOS® Zoom only available in size M

NUMINOS® S
3-phase, PHASE



220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: Aluminium



● black



○ white

Options	GBP
All S versions	**99.00**
All S versions DALI	**142.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring S		
○ white	**1006167**	**2.00**
● copper	**1008140**	**7.00**
● gold	**1008144**	**7.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004074**	
			36°	16	**1004075**	
			60°	19	**1004076**	
	3000 K	1050 lm	24°	16	**1004082**	
			36°	16	**1004083**	
			60°	19	**1004084**	
	4000 K	1100 lm	24°	16	**1004090**	
			36°	16	**1004091**	
			60°	19	**1004092**	
Dali Touch	2700 K	950 lm	24°	16	**1004362**	
			36°	16	**1004363**	
			60°	19	**1004364**	
	3000 K	1050 lm	24°	16	**1004370**	
			36°	16	**1004371**	
			60°	19	**1004372**	
	4000 K	1100 lm	24°	16	**1004378**	
			36°	16	**1004379**	
			60°	19	**1004380**	
C	2700 K	950 lm	24°	16	**1004078**	
			36°	16	**1004079**	
			60°	19	**1004080**	
	3000 K	1050 lm	24°	16	**1004086**	
			36°	16	**1004087**	
			60°	19	**1004088**	
	4000 K	1100 lm	24°	16	**1004094**	
			36°	16	**1004095**	
			60°	19	**1004096**	
Dali Touch	2700 K	950 lm	24°	16	**1004366**	
			36°	16	**1004367**	
			60°	19	**1004368**	
	3000 K	1050 lm	24°	16	**1004374**	
			36°	16	**1004375**	
			60°	19	**1004376**	
	4000 K	1100 lm	24°	16	**1004382**	
			36°	16	**1004383**	
			60°	19	**1004384**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® M
3-phase, PHASE



220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: Aluminium

Options	GBP
All M versions	**125.00**
All M versions DALI	**169.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring M		
○ white	**1006168**	**3.00**
● copper	**1008141**	**8.00**
● gold	**1008145**	**8.00**



● black



○ white

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004170**	
			36°	16	**1004171**	
			60°	22	**1004172**	
	3000 K	1800 lm	24°	16	**1004178**	
			36°	16	**1004179**	
			60°	22	**1004180**	
	4000 K	1950 lm	24°	16	**1004186**	
			36°	16	**1004187**	
			60°	22	**1004188**	
Dali Touch	2700 K	1750 lm	24°	16	**1004458**	
			36°	16	**1004459**	
			60°	22	**1004460**	
	3000 K	1800 lm	24°	16	**1004466**	
			36°	16	**1004467**	
			60°	22	**1004468**	
	4000 K	1950 lm	24°	16	**1004474**	
			36°	16	**1004475**	
			60°	22	**1004476**	
C	2700 K	1750 lm	24°	16	**1004174**	
			36°	16	**1004175**	
			60°	22	**1004176**	
	3000 K	1800 lm	24°	16	**1004182**	
			36°	16	**1004183**	
			60°	22	**1004184**	
	4000 K	1950 lm	24°	16	**1004190**	
			36°	16	**1004191**	
			60°	22	**1004192**	
Dali Touch	2700 K	1750 lm	24°	16	**1004462**	
			36°	16	**1004463**	
			60°	22	**1004464**	
	3000 K	1800 lm	24°	16	**1004470**	
			36°	16	**1004471**	
			60°	22	**1004472**	
	4000 K	1950 lm	24°	16	**1004478**	
			36°	16	**1004479**	
			60°	22	**1004480**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® L
3-phase, PHASE



220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium



● black



○ white

Options	GBP
All L versions	133.00
All L versions DALI	185.00

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring L		
○ white	1006169	3.00
● copper	1008142	9.00
● gold	1008146	9.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004266**	
			36°	16	**1004267**	
			60°	19	**1004268**	
	3000 K	2400 lm	24°	16	**1004274**	
			36°	16	**1004275**	
			60°	19	**1004276**	
	4000 K	2600 lm	24°	16	**1004282**	
			36°	16	**1004283**	
			60°	19	**1004284**	
Dali Touch	2700 K	2300 lm	24°	16	**1004554**	
			36°	16	**1004555**	
			60°	19	**1004556**	
	3000 K	2400 lm	24°	16	**1004562**	
			36°	16	**1004563**	
			60°	19	**1004564**	
	4000 K	2600 lm	24°	16	**1004570**	
			36°	16	**1004571**	
			60°	19	**1004572**	
C	2700 K	2300 lm	24°	16	**1004270**	
			36°	16	**1004271**	
			60°	19	**1004272**	
	3000 K	2400 lm	24°	16	**1004278**	
			36°	16	**1004279**	
			60°	19	**1004280**	
	4000 K	2600 lm	24°	16	**1004286**	
			36°	16	**1004287**	
			60°	19	**1004288**	
Dali Touch	2700 K	2300 lm	24°	16	**1004558**	
			36°	16	**1004559**	
			60°	19	**1004560**	
	3000 K	2400 lm	24°	16	**1004566**	
			36°	16	**1004567**	
			60°	19	**1004568**	
	4000 K	2600 lm	24°	16	**1004574**	
			36°	16	**1004575**	
			60°	19	**1004576**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® XL
3-phase, PHASE



220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: Aluminium

Options	GBP
All XL versions	**142.00**
All XL versions DALI	**202.00**

Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring XL		
○ white	**1006170**	**4.00**
● copper	**1008143**	**9.50**
● gold	**1008147**	**9.50**



● black



○ white

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	3550 lm	24°	16	**1005723**	
			36°	16	**1005724**	
		3150 lm	60°	22	**1005725**	
	3000 K	3550 lm	24°	16	**1005729**	
			36°	16	**1005730**	
		3150 lm	60°	22	**1005731**	
	4000 K	3900 lm	24°	16	**1005735**	
			36°	16	**1005736**	
		3500 lm	60°	22	**1005737**	
Dali Touch	2700 K	3550 lm	24°	16	**1005795**	
			36°	16	**1005796**	
		3150 lm	60°	22	**1005797**	
	3000 K	3550 lm	24°	16	**1005801**	
			36°	16	**1005802**	
		3150 lm	60°	22	**1005803**	
	4000 K	3900 lm	24°	16	**1005807**	
			36°	16	**1005808**	
		3500 lm	60°	22	**1005809**	
C	2700 K	3550 lm	24°	16	**1005726**	
			36°	16	**1005727**	
		3150 lm	60°	22	**1005728**	
	3000 K	3550 lm	24°	16	**1005732**	
			36°	16	**1005733**	
		3150 lm	60°	22	**1005734**	
	4000 K	3900 lm	24°	16	**1005738**	
			36°	16	**1005739**	
		3500 lm	60°	22	**1005740**	
Dali Touch	2700 K	3550 lm	24°	16	**1005798**	
			36°	16	**1005799**	
		3150 lm	60°	22	**1005800**	
	3000 K	3550 lm	24°	16	**1005804**	
			36°	16	**1005805**	
		3150 lm	60°	22	**1005806**	
	4000 K	3900 lm	24°	16	**1005810**	
			36°	16	**1005811**	
		3500 lm	60°	22	**1005812**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NUMINOS® ZOOM M
3-phase, PHASE



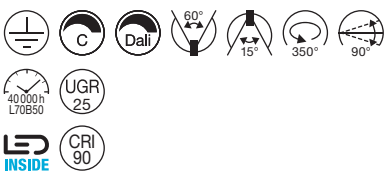

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium/Polycarbonate (PC)

Options	GBP
All M versions	**157.00**
All M versions DALI	**199.00**

● black



○ white

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

					Prod. no.	
C	2700 K	680 – 1650 lm	15° – 60°	25	**1006108**	
	3000 K	750 – 1800 lm			**1006110**	
	4000 K	780 – 1900 lm			**1006112**	
Dali	2700 K	680 – 1650 lm	15° – 60°	25	**1006114**	
	3000 K	750 – 1800 lm			**1006116**	
	4000 K	780 – 1900 lm			**1006118**	
C	2700 K	680 – 1650 lm	15° – 60°	25	**1006109**	
	3000 K	750 – 1800 lm			**1006111**	
	4000 K	780 – 1900 lm			**1006113**	
Dali	2700 K	680 – 1650 lm	15° – 60°	25	**1006115**	
	3000 K	750 – 1800 lm			**1006117**	
	4000 K	780 – 1900 lm			**1006119**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007655 631

UNIVERSAL TRACKSPOT M

3-phase, 12/16/20/24 W,
927/930/940 24°...60°



220-240 V ~50/60 Hz | 300/400/500/600 mA
Total wattage: 12/16/20/24 W
Material: Aluminium/Plastic PC

- Variable beam angle 24°-60°

INSIDE

2000 lm	2700 K	2200 lm	3000 K	2150 lm	4000 K

Options	Prod. no.	GBP
● black	1007655	137.00
○ white	1007654	137.00

UNIVERSAL TRACKSPOT L

3-phase, 24/28/32/36 W,
927/930/940 24°...60°



220-240 V ~50/60 Hz | 600/700/800/900 mA
Total wattage: 24/28/32/36 W
Material: Aluminium/Plastic PC

- Variable beam angle 24°-60°

INSIDE

2900 lm	2700 K	3300 lm	3000 K	3200 lm	4000 K

Options	Prod. no.	GBP
● black	1007657	154.00
○ white	1007656	154.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1004772 633
41

ONE 40 TRACK
3-phase, DALI



220-240 V ~50/60 Hz | 350 mA
Total wattage: 15.2 W
Material: Aluminium

670 lm | 4000 K

Options	Prod. no.	GBP
○ white	**1004772**	**286.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007646 635

NOBLO® SPOT
3-phase, PHASE



IP20 | 32° | 355° | 90° | 50000 h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: Aluminium/Polycarbonate (PC)

INSIDE CRI 90

740 lm | 2700 K | 750 lm | 3000 K | 760 lm | 4000 K

Options	Prod. no.	GBP
● black 2700 K	1007644	65.00
● black 3000 K	1007646	65.00
● black 4000 K	1007648	65.00
○ white 2700 K	1007645	65.00
○ white 3000 K	1007647	65.00
○ white 4000 K	1007649	65.00

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	5.00
○ white	1008483	5.00
● gold	1008484	5.00
● grey	1008485	5.00
● bronze	1008486	5.00
● copper	1008487	5.00

NOBLO® SPOT
3-phase, PHASE

DIM TO WARM



IP20 | 36° | 355° | 90° | 39000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.4 W
Material: Aluminium/Polycarbonate (PC)

• Dim to warm function (2000 K - 3000 K)

INSIDE CRI 90

30 lm | 2000 K – 450 lm | 3000 K

Options	Prod. no.	GBP
● black	1007355	78.00
○ white	1007356	78.00

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	5.00
○ white	1008483	5.00
● gold	1008484	5.00
● grey	1008485	5.00
● bronze	1008486	5.00
● copper	1008487	5.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SIGHT EVO
3-phase

NEW

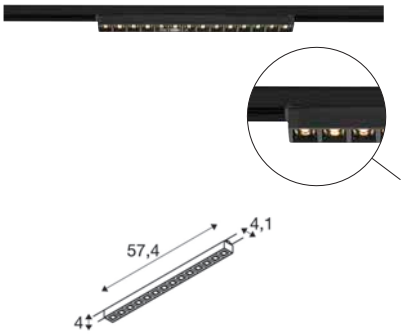

IP20 IK02 60° 50000h L80B20 UGR 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Plastic PC

LED INSIDE CRI 90

Down	2250 lm | 3000 K	2250 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	1010146	152.00
● black 4000 K	1010147	152.00
◌● white/black 3000 K	1010144	152.00
◌● white/black 4000 K	1010145	152.00

SIGHT EVO
3-phase

NEW

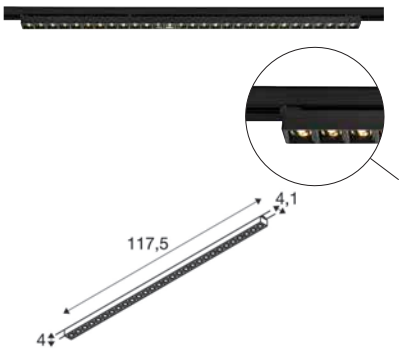

IP20 IK02 60° 50000h L80B20 UGR 16

220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE CRI 90

Down	3200 lm | 3000 K	3200 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	1010150	203.00
● black 4000 K	1010151	203.00
◌● white/black 3000 K	1010148	203.00
◌● white/black 4000 K	1010149	203.00

SIGHT EVO
3-phase

NEW

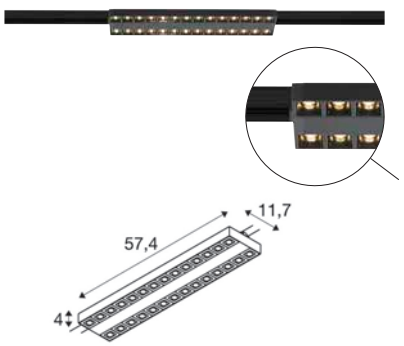

IP20 IK02 60° 50000h L80B20 UGR 16

220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE CRI 90

Down	3250 lm | 3000 K	3350 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	1010154	212.00
● black 4000 K	1010155	212.00
◌● white/black 3000 K	1010152	212.00
◌● white/black 4000 K	1010153	212.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SIGHT EVO
3-phase, DALI

Dali | IP20 | IK02 | 60° | 50 000 h L80B20 | UGR 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Plastic PC

LED INSIDE | CRI 90

Down	2250 lm | 3000 K	3200 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	1010158	169.00
● black 4000 K	1010159	169.00
○● white/black 3000 K	1010156	169.00
○● white/black 4000 K	1010157	169.00

SIGHT EVO
3-phase, DALI

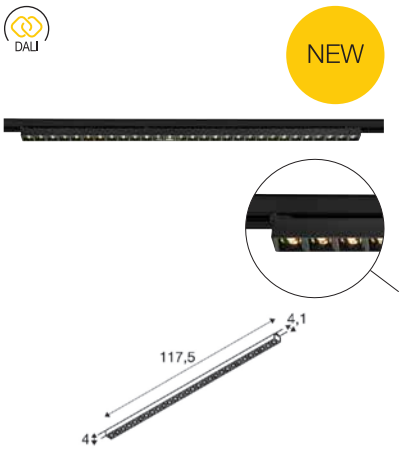

Dali | IP20 | IK02 | 60° | 50 000 h L80B20 | UGR 16

220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE | CRI 90

Down	3200 lm | 3000 K	3200 | 4000 K

Options	Prod. no.	GBP
● black 3000 K	1010383	229.00
● black 4000 K	1010384	229.00
○● white/black 3000 K	1010381	229.00
○● white/black 4000 K	1010382	229.00

SIGHT EVO
3-phase, DALI

Dali | IP20 | IK02 | 60° | 50 000 h L80B20 | UGR 16

220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE | CRI 90

Down	3250 lm | 3000 K	3350 lm | 4000 K

Options	Prod. no.	GBP
● black 3000 K	1010387	237.00
● black 4000 K	1010388	237.00
○● white/black 3000 K	1010385	237.00
○● white/black 4000 K	1010386	237.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SIGHT PANEL
3-phase

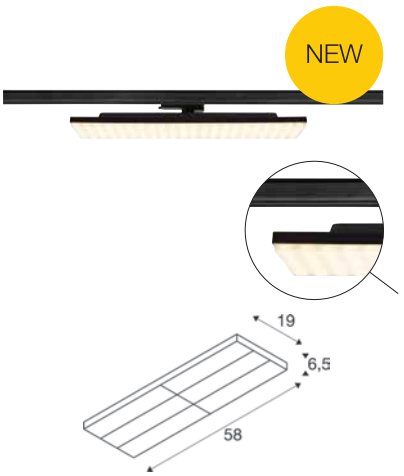

IP20 IK02 L80B10 UGR 25

220-240 V ~50/60 Hz | 210 / 260 / 310 / 380 mA
Total wattage: 38 / 48 / 58 / 72 W

INSIDE

38 W	6300 lm	3000 K
	6500 lm	4000 K
48 W	7700 lm	3000 K
	7950 lm	4000 K
58 W	9000 lm	3000 K
	9350 lm	4000 K
72 W	10800 lm	3000 K
	11350 lm	4000 K

Options	Prod. no.	GBP
● black 3000 K	**1009146**	**212.00**
● black 4000 K	**1009148**	**212.00**
○ white 3000 K	**1009147**	**212.00**
○ white 4000 K	**1009149**	**212.00**

SIGHT PANEL
3-phase, DALI

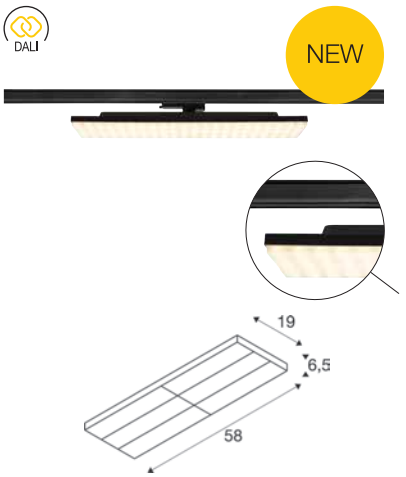

Dali IP20 IK02 L80B10 UGR 25

220-240 V ~50/60 Hz | 330 mA
Total wattage: 65 W

INSIDE

Down	10100 lm	3000 K	11600 lm	4000 K

Options	Prod. no.	GBP
● black 10100 lm | 3000 K	**1009150**	**280.00**
● black 11600 lm | 4000 K	**1009152**	**280.00**
○ white 10100 lm | 3000 K	**1009151**	**280.00**
○ white 11600 lm | 4000 K	**1009153**	**280.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SIGHT EASY
3-phase, DALI

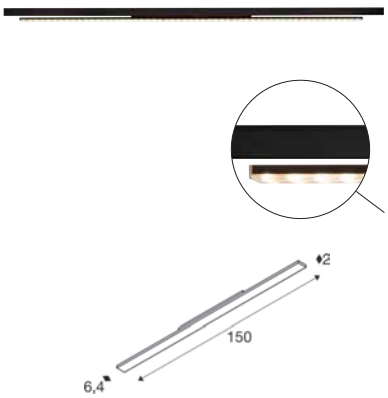

220-240 V ~50/60 Hz | 250 / 300 / 350 / 400 mA
Total wattage: 41 / 49 / 58 / 66 W
Material: Aluminium

41 W	6500 lm	3000 K
	7100 lm	4000 K
49 W	7700 lm	3000 K
	8200 lm	4000 K
58 W	9100 lm	3000 K
	9600 lm	4000 K
66 W	10200 lm	3000 K
	10900 lm	4000 K

Options	Prod. no.	GBP
● black 3000 K	**1008728**	**198.00**
● black 4000 K	**1008730**	**198.00**
○ white 3000 K	**1008729**	**198.00**
○ white 4000 K	**1008731**	**198.00**

SIGHT EASY
3-phase

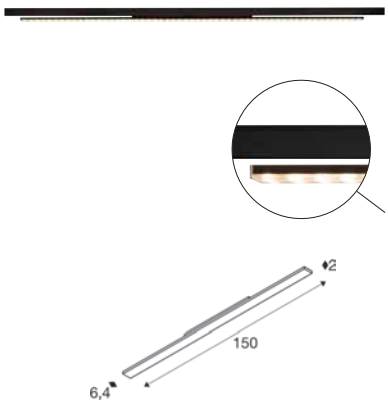

220-240 V ~50/60 Hz | 250 / 300 / 350 / 400 mA
Total wattage: 41 / 49 / 58 / 66 W
Material: Aluminium

41 W	6500 lm	3000 K
	7100 lm	4000 K
49 W	7700 lm	3000 K
	8200 lm	4000 K
58 W	9100 lm	3000 K
	9600 lm	4000 K
66 W	10200 lm	3000 K
	10900 lm	4000 K

Options	Prod. no.	GBP
● black 3000 K	**1008676**	**163.00**
● black 4000 K	**1008678**	**163.00**
○ white 3000 K	**1008677**	**163.00**
○ white 4000 K	**1008679**	**163.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SIGHT TRACK
3-phase, DALI



220-240 V ~50/60 Hz | 700 mA
Total wattage: 39 W
Material: Aluminium/Acrylic

3000 lm | 3000 K	3000 lm | 4000 K

Options	Prod. no.	GBP
● black	**1005397**	**322.00**
○ white	**1005399**	**322.00**

SIGHT TRACK
3-phase



220-240 V ~50/60 Hz | 700 mA
Total wattage: 37 W
Material: Aluminium/Acrylic

3000 lm | 3000 K	3000 lm | 4000 K

Options	Prod. no.	GBP
● black	**1005400**	**266.00**
○ white	**1005401**	**266.00**
● grey	**1005402**	**266.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

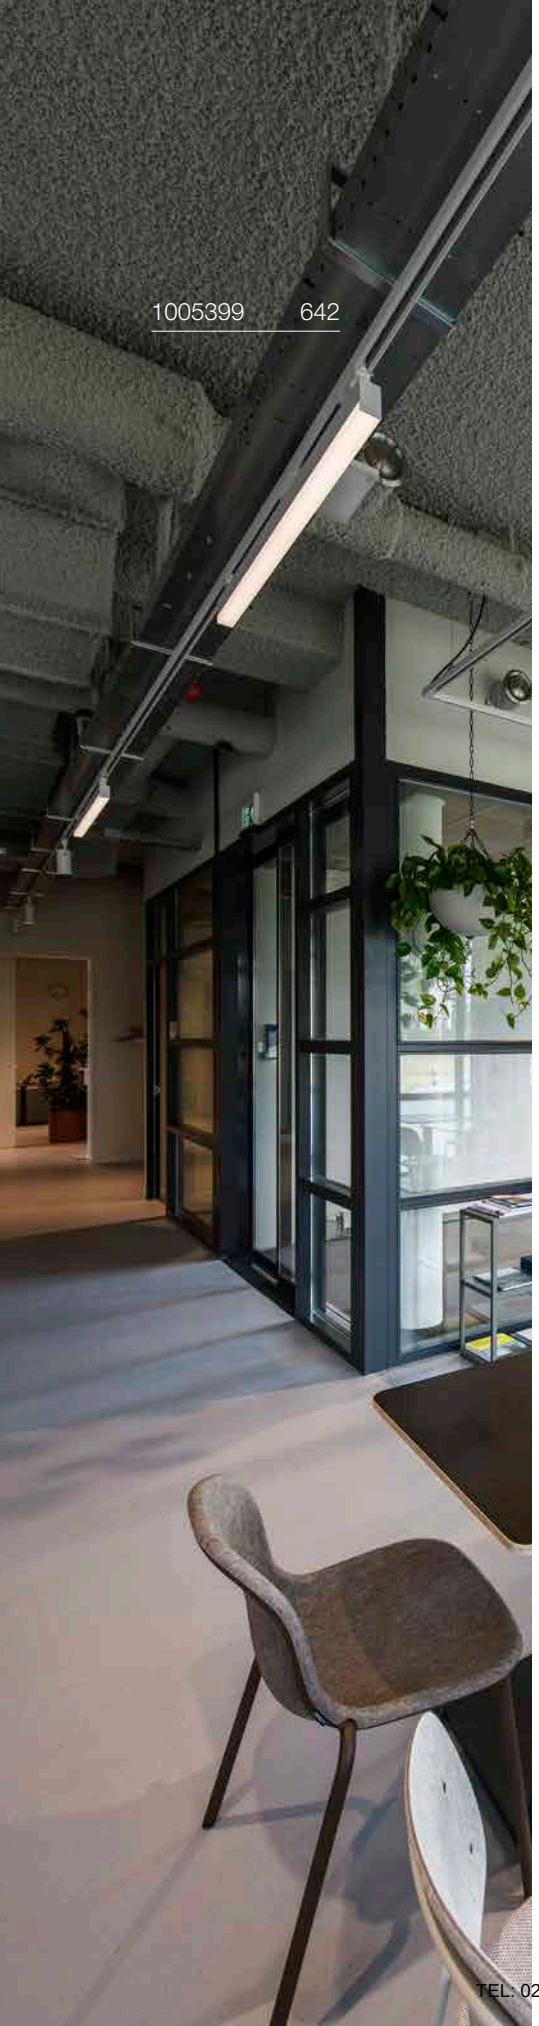

SIGHT MOVE
3-phase, DALI



Dali IP20 75° 120° 30000h L70B50 UGR 25

220-240 V ~50/60 Hz | 350 mA
Total wattage: 26 W
Material: Aluminium/Polymethylmethacrylate (PMMA)

LED INSIDE CRI 90

2700 lm | 3000 K
3100 lm | 4000 K

Options	Prod. no.	GBP
● black 2700 lm | 3000 K	**1004690**	**217.00**
● black 3100 lm | 4000 K	**1004692**	**219.00**
○ white 2700 lm | 3000 K	**1004691**	**219.00**
○ white 3100 lm | 4000 K	**1004693**	**217.00**

SIGHT MOVE
3-phase



IP20 75° 120° 30000h L70B50 UGR 25

220-240 V ~50/60 Hz | 350 mA
Total wattage: 26 W
Material: Aluminium/Polymethylmethacrylate (PMMA)

LED INSIDE CRI 90

2700 lm | 3000 K
3100 lm | 4000 K

Options	Prod. no.	GBP
● black 2700 lm | 3000 K	**1004686**	**157.00**
● black 3100 lm | 4000 K	**1004688**	**155.00**
○ white 2700 lm | 3000 K	**1004687**	**155.00**
○ white 3100 lm | 4000 K	**1004689**	**155.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009139 645
1009141 645

PARA CONE 14
3-phase, GU10



IP20 300° 80°

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 25 W

Base: 1xGU10

Options	Prod. no.	GBP
black/gold	1008055	74.00
white/gold	1008056	74.00
copper/white	1008057	77.00
Aluminium	1009139	73.00

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G
4 kW/1000h

Prod. no.: 1006321 42.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

PARA CONE 14
3-phase, PD, GU10



IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 35 W

Base: 1xGU10

Options	Prod. no.	GBP
black/gold	1008061	101.00
white/gold	1008062	101.00
copper/white	1008063	107.00
Aluminium	1009141	99.00

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G
4 kW/1000h

Prod. no.: 1006321 42.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

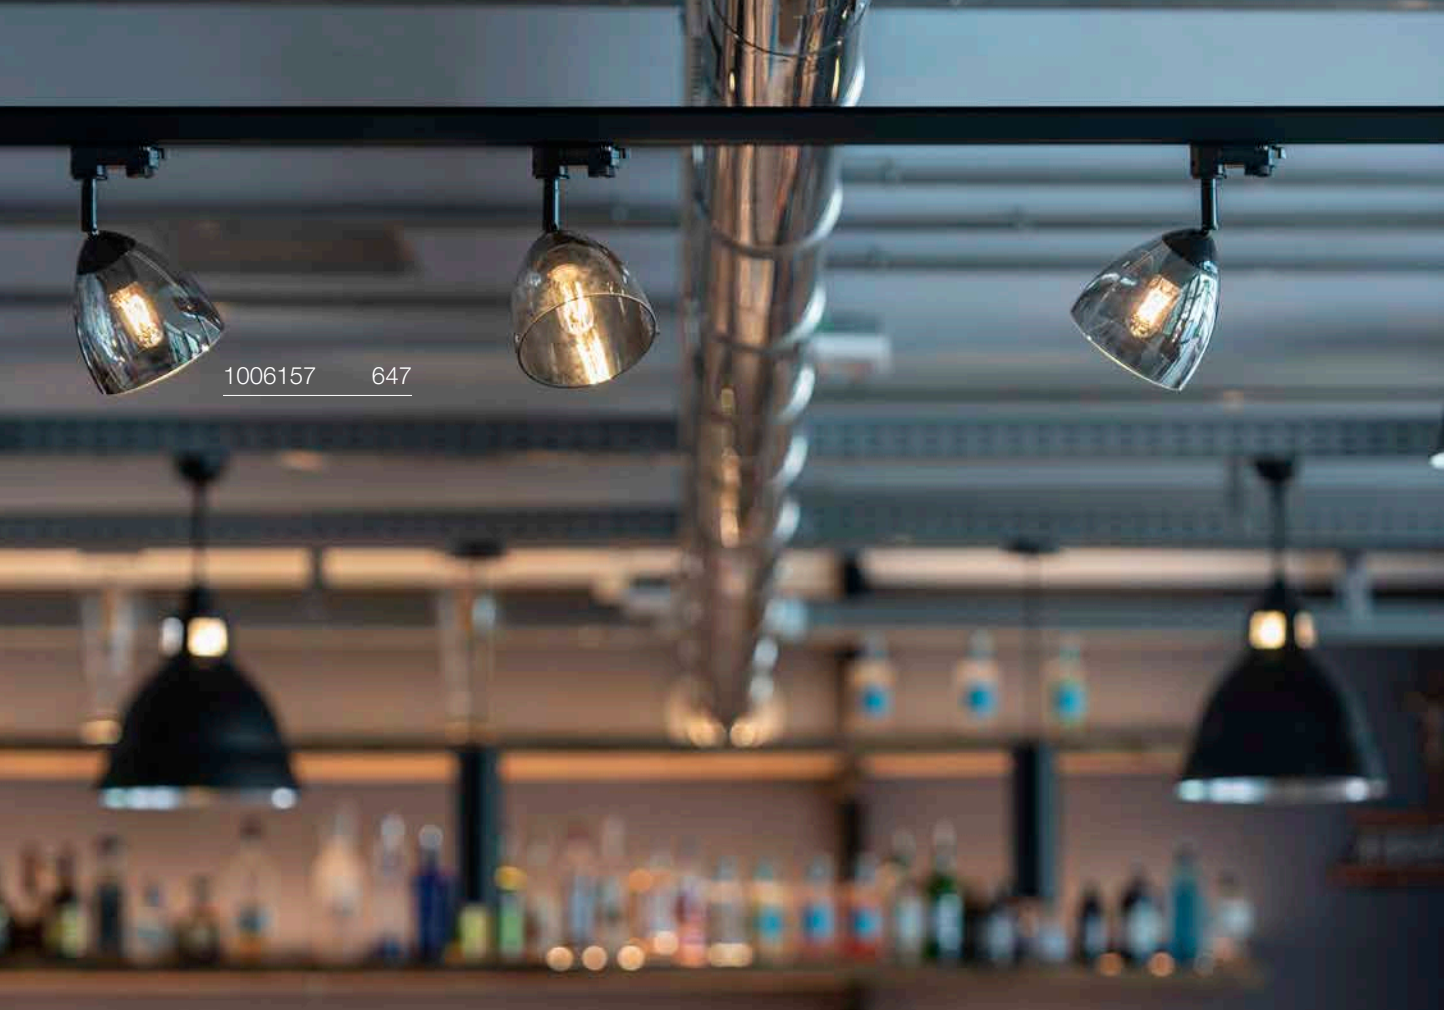
1006157 647

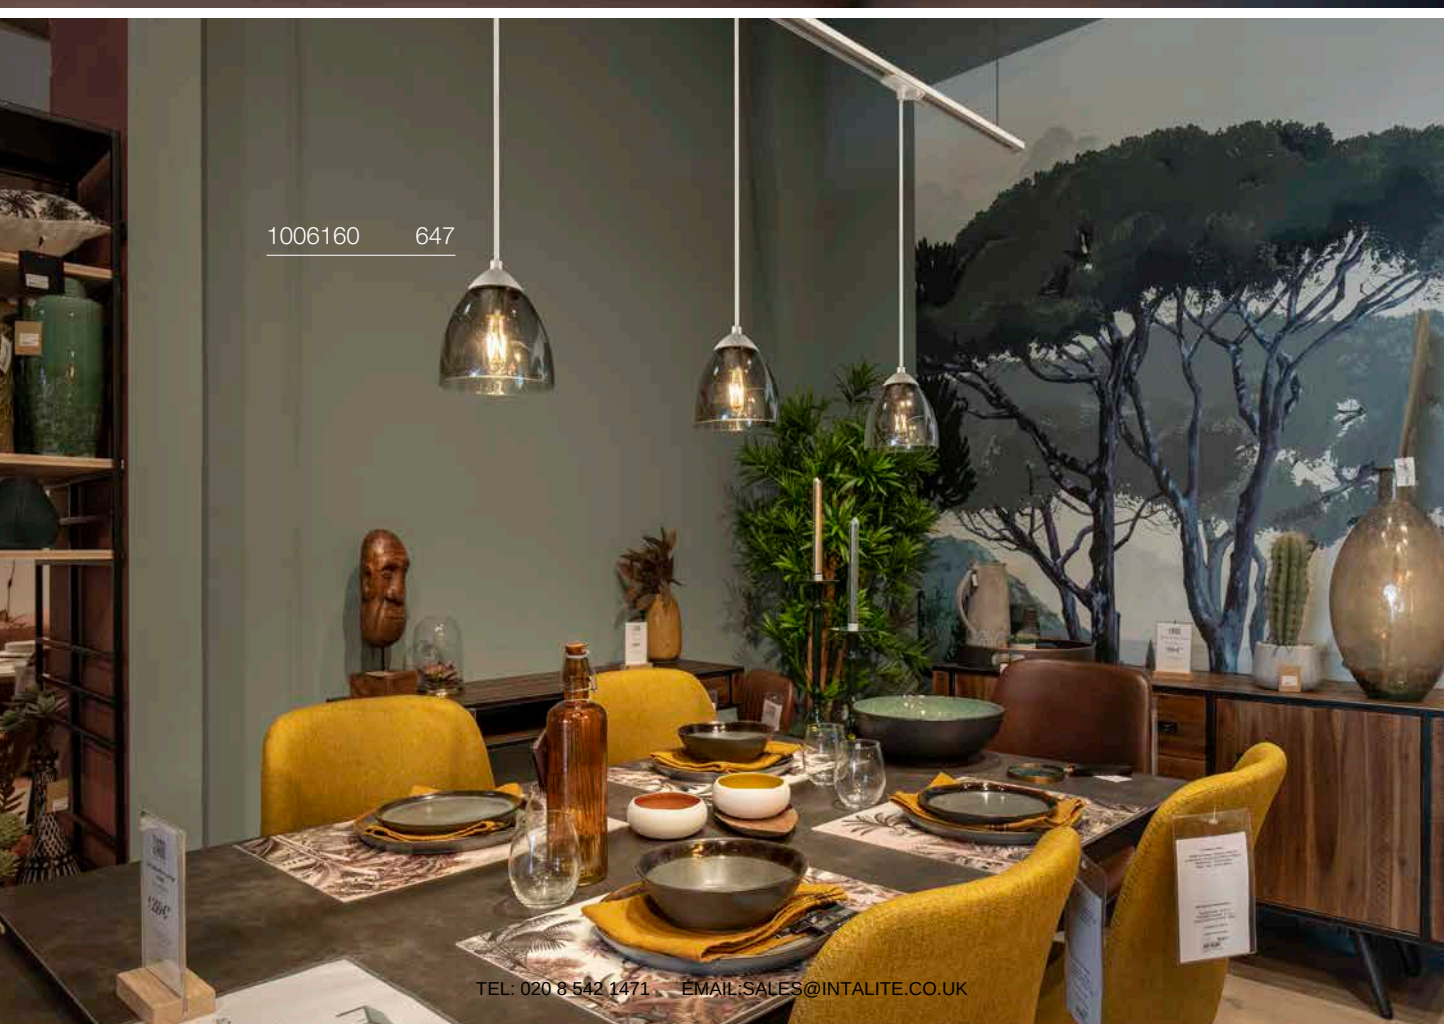
1006160 647

PARA CONE GL
3-phase, GU10



220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 25 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**1006157**	**88.00**
○ white	**1006158**	**88.00**

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G
4 kW/1000h

Prod. no.: 1006321 42.00 GBP

PARA CONE GL
PD, GU10



220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Matching accessories can be found on page 603
- open cable end

SOCKET INSIDE 25 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**1006159**	**72.00**
○ white	**1006160**	**72.00**

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G
4 kW/1000h

Prod. no.: 1006321 42.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008541 649

FORCHINI M 40 TRACK
3-phase, PD, E27



IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel/Aluminium

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 6.8 cm | L: 15.2 cm

Options	Prod. no.	GBP
black/gold	**1008541**	**200.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: **1005303** **9.00 GBP**

SMART

E27 | 7 W | 300°
640 lm | 2200-4000 K | EEC = G
7 kWh/1000 h

Prod. no.: **1010486** **24.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LIGHT EYE® 90
3-phase, PD, QPAR51



IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.35 cm

Options	Prod. no.	GBP
● black	**1008170**	**72.00**
○ white	**1008171**	**72.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005080 7.00 GBP

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: 1010470 33.00 GBP

LIGHT EYE® 150
3-phase, PD, QPAR111



IP20 | 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE | 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Options	Prod. no.	GBP
● black	**1008176**	**114.00**
○ white	**1008177**	**114.00**

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G
12 kW/1000h

Prod. no.: 1005298 73.00 GBP

LIGHT EYE® 150
3-phase, QPAR111



IP20 | 330° | 90°

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE | 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Options	Prod. no.	GBP
● black	**1008184**	**114.00**
○ white	**1008185**	**114.00**

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G
12 kW/1000h

Prod. no.: 1005298 73.00 GBP

LIGHT EYE® 90
Decorative ring

IP20

Ø: 5.9 cm
H: 1.4 cm
Material: plastic

Options	Prod. no.	GBP
● black	**1008186**	**8.00**
○ white	**1008187**	**8.00**
● gold	**1008188**	**12.00**
◑ chrome	**151049**	**12.00**

LIGHT EYE® 150
Decorative ring Ø 13,6 cm

Ø: 13.6 cm
H: 2.3 cm
Material: Steel

Options	Prod. no.	GBP
● black	**1008189**	**30.00**
○ white	**1008190**	**30.00**
● gold	**1008192**	**39.00**
◑ chrome	**1008191**	**39.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

EURO SPOT TRACK
3-phase, QPAR111



IP20 350° 100°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**153420**	**91.00**
○ white	**153421**	**91.00**

GU10 | 13 W | 10°
900 lm | 2700 K | EEC = G
13 kW/1000h

Prod. no.: 1005275 48.00 GBP

EURO SPOT TRACK
3-phase, QPAR51



IP20 350° 100°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 25 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	**153850**	**73.00**
○ white	**153851**	**73.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: 1005077 7.00 GBP

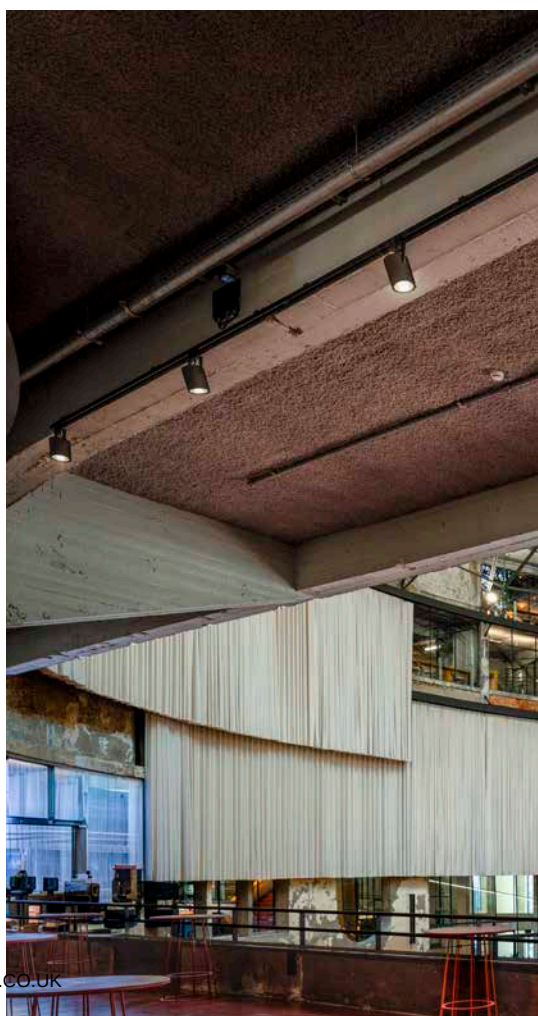

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

EURO CUBE
3-phase

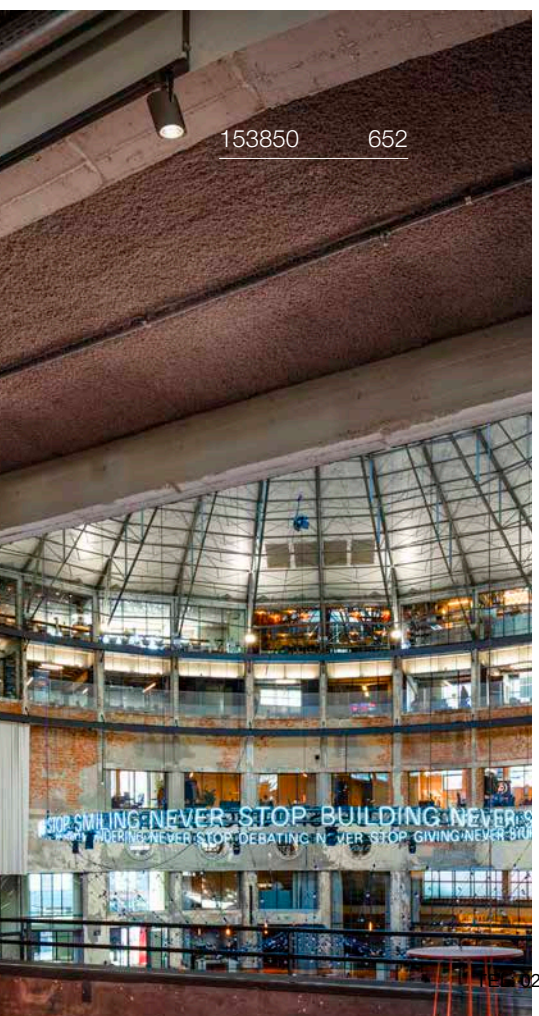



220-240 V ~50/60 Hz
Total wattage: 26 W
Material: Aluminium

2470 lm	3000 K
2740 lm	4000 K

Options	Prod. no.	GBP
● black 3000 K	**152750**	**224.00**
● black 4000 K	**152780**	**224.00**
○ white 3000 K	**152751**	**224.00**
○ white 4000 K	**152781**	**224.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010246 655
MACHU
SPORTS

KALU 2.0
3-phase, PHASE

NEW



C | IP20 | IK02 | 36° | 330° | 90° | 50 000 h L90B10 | UGR 19

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

LED INSIDE | CRI 90

1400 lm | 2700 K | 1450 lm | 3000 K | 1500 lm | 4000 K

Options	Prod. no.	GBP
● black 2700 K	1010234	110.00
● black 3000 K	1010240	110.00
● black 4000 K	1010246	144.00
○ white 2700 K	1010236	110.00
○ white 3000 K	1010242	110.00
○ white 4000 K	1010248	144.00

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	1010136	8.00
○ white	1010135	8.00
● gold	1010138	8.00
● copper	1010139	8.00
Lens		
○ transparent | 15°	1010140	16.00
○ transparent | 24°	1010141	16.00
○ transparent | 36°	1010142	16.00
○ transparent | 60°	1010143	16.00

KALU 2.0
3-phase, DALI

DALI

NEW



Dali | IP20 | IK02 | 36° | 350° | 90° | 50 000 h L90B10 | UGR 19

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

LED INSIDE | CRI 90

1400 lm | 2700 K | 1450 lm | 3000 K | 1500 lm | 4000 K

Options	Prod. no.	GBP
● black 2700 K	1010237	110.00
● black 3000 K	1010243	144.00
● black 4000 K	1010249	144.00
○ white 2700 K	1010239	110.00
○ white 3000 K	1010245	144.00
○ white 4000 K	1010251	144.00

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	1010136	8.00
○ white	1010135	8.00
● gold	1010138	8.00
● copper	1010139	8.00
Lens		
○ transparent | 15°	1010140	16.00
○ transparent | 24°	1010141	16.00
○ transparent | 36°	1010142	16.00
○ transparent | 60°	1010143	16.00

KALU TRACK
3-phase, QPAR111



IP20 | 350° | 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE | 75 W

Base: 1xGU10

Options	Prod. no.	GBP
● black	152610	77.00
○ white	152611	77.00

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G
12 kW/1000h

C

Prod. no.: 1005297 73.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

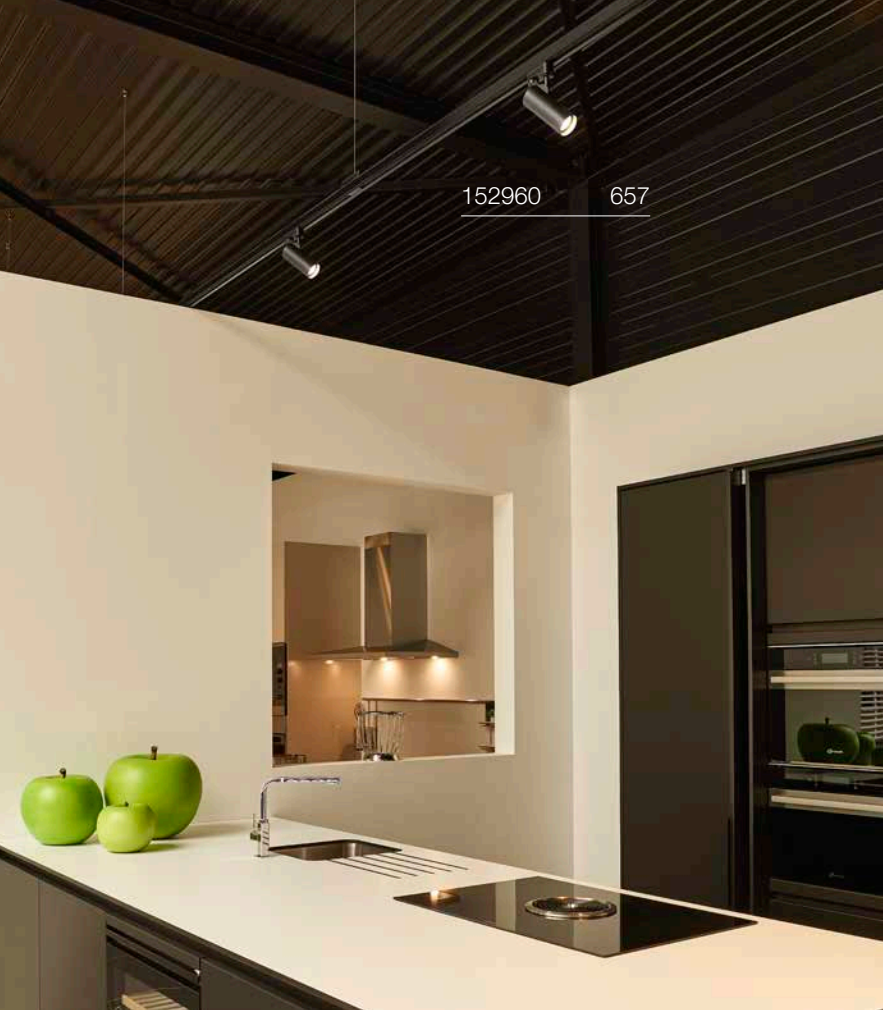

BIMA
3-phase, single, QPAR51



220-240 V ~50/60 Hz
Material: Aluminium

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.7 cm

Options	Prod. no.	GBP
● black	**152240**	**39.00**
○ white	**152241**	**39.00**
● grey	**152242**	**39.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000h

Prod. no.: **1005273** **9.00 GBP**

SMART

GU10 | 5 W | 36°
420 lm | 2200-6500 K | EEC = F
5 kWh/1000 h

Prod. no.: **1010470** **33.00 GBP**

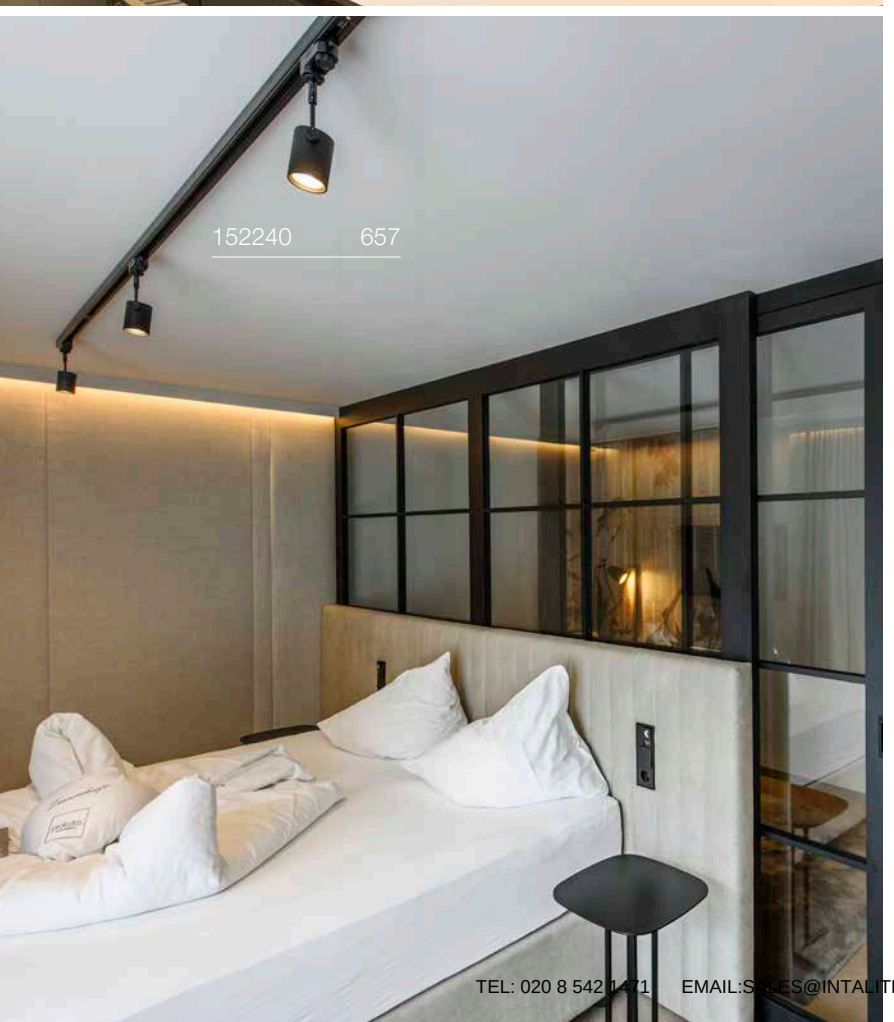

BIMA
3-phase, double, QPAR51



IP20 | 350° | 200°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE | 50 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Options	Prod. no.	GBP
● black	**152230**	**61.00**
○ white	**152231**	**61.00**
● grey	**152232**	**61.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: 1005077 7.00 GBP

HELIA 50 TRACK
3-phase



C | IP20 | 35° | 330° | 90° | 50000 h L80B20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

LED INSIDE | CRI 90

920 lm / 970 lm | 3000 K

Options	Prod. no.	GBP
● black 920 lm	**152960**	**78.00**
○ white 970 lm	**152961**	**78.00**

ENOLA® C TRACK
3-phase



IP20 | 55° | 350° | 90° | 40000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

LED INSIDE | CRI 80

1040 lm | 3000 K

Options	Prod. no.	GBP
● black	**152430**	**152.00**
○ white	**152431**	**152.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PROFILES

GRAZIA 10 SURFACE-MOUNTED PROFILE | 663



GRAZIA 10 RECESSED PROFILE | 663



GRAZIA 10 EDGE | 666



GRAZIA 20 SURFACE-MOUNTED PROFILE | 669

GRAZIA 20 RECESSED PROFILE | 669



GRAZIA 60 SURFACE-MOUNTED PROFILE | 673



GRAZIA 60 RECESSED PROFILE | 673

GRAZIA 10 ACCESSORIES | 665

GRAZIA 10 EDGE ACCESSORIES | 667

GRAZIA 20 ACCESSORIES | 670–671

GRAZIA 60 ACCESSORIES | 674–675

LED STRIPS

GRAZIA LED STRIP VALUE ADDITIONAL LIGHTING AND ACCESSORIES | 676

GRAZIA LED STRIP VALUE MAIN LIGHTING AND ACCESSORIES | 677

GRAZIA LED STRIP VALUE MAIN LIGHTING + AND ACCESSORIES | 678

GRAZIA LED STRIP CORE MAIN LIGHTING AND ACCESSORIES | 679

GRAZIA PRO MAX FLEXSTRIP AND ACCESSORIES | 680

GRAZIA PRO MAX FLEXSTRIP AND ACCESSORIES | 681

GRAZIA PRO FLEXSTRIP TUNABLE WHITE AND ACCESSORIES | 682

GRAZIA PRO FLEXSTRIP RGBW AND ACCESSORIES | 683

GRAZIA IP FLEXSTRIP | 684

GRAZIA IP FLEXSTRIP TUNABLE WHITE AND ACCESSORIES | 685

GRAZIA IP FLEXSTRIP RGBW AND ACCESSORIES | 685

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DESIGN YOUR LED PROFILE

Create accents or illuminate entire rooms – from 700 lm up to 4000 lm per metre.

Bring colour into play – LED strips available in white, as CCT (Tunable White) or RGBW version.

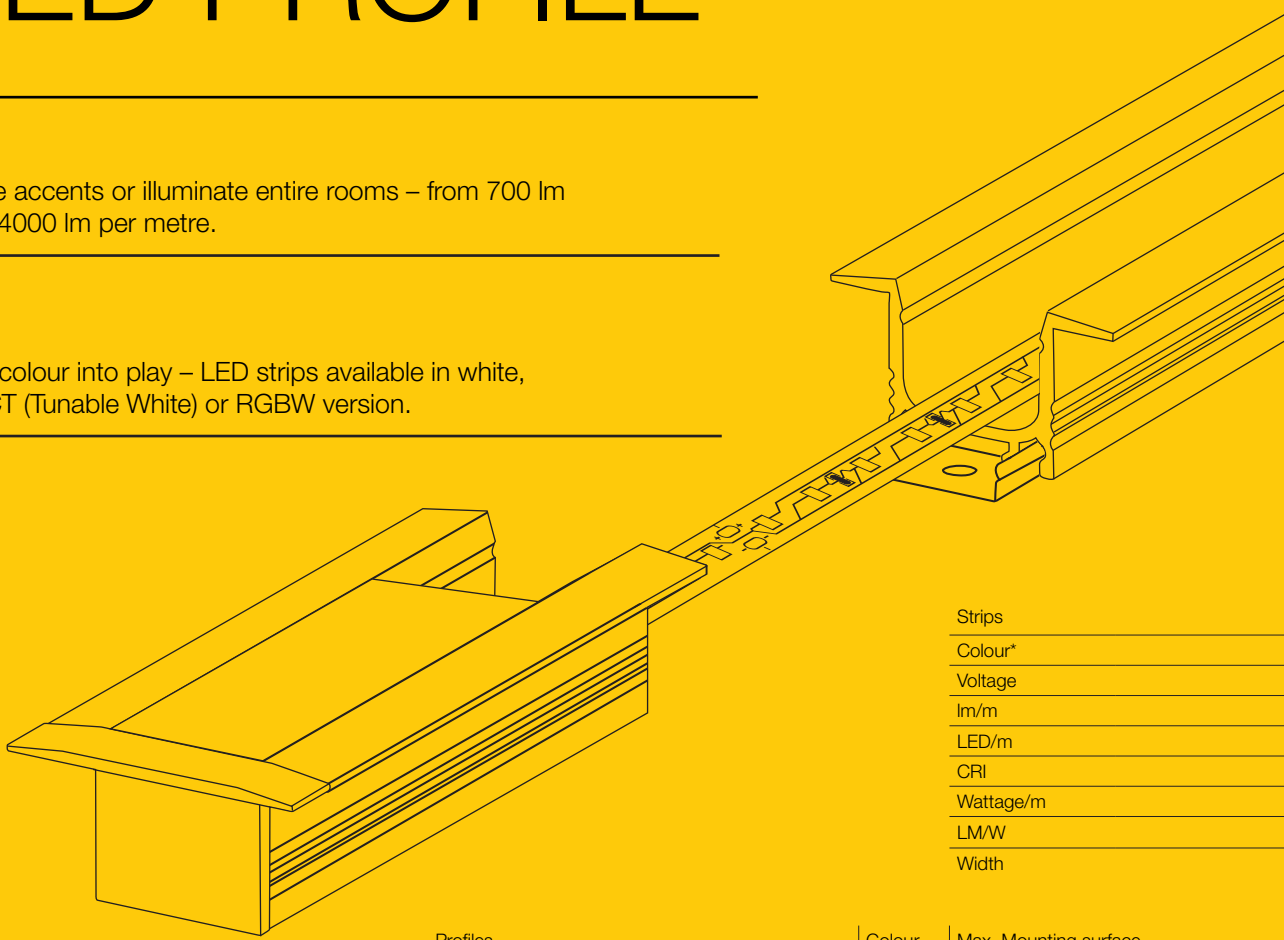

Strips
Colour*
Voltage
lm/m
LED/m
CRI
Wattage/m
LM/W
Width

Profiles		Colour	Max. Mounting surface
GRAZIA 10 surface-mounted profile, flat 2 m	1000462	black	10 mm
	1000461	white	
GRAZIA 10 surface-mounted profile, standard 2 m	1000465	black	10 mm
	1000464	white	
GRAZIA 10 recessed profile 2 m	1000459	black	10 mm
	1000458	white	
GRAZIA 10 corner 2 m	1004889	aluminium	10 mm
	1004890	white	
GRAZIA 20 surface-mounted profile, standard 3 m	1000525	black	20 mm
	1000524	white	
GRAZIA 20 surface-mounted profile, flat 3 m	1000534	black	20 mm
	1000533	white	
GRAZIA 20 recessed profile 3 m	1000498	black	20 mm
	1000497	white	
GRAZIA 60 surface-mounted profile 1.5 m	1004896	black	40 mm
	1004897	white	
GRAZIA 60 surface-mounted profile 3 m	1004898	black	40 mm
	1004899	white	
GRAZIA 60 recessed profile 1.5 m	1004905	black	40 mm
	1004906	white	
GRAZIA 60 recessed profile 3 m	1004908	black	40 mm
	1004907	white	

Create your very own profile. Matching drivers are presented on our Accessories pages 1015–1019.

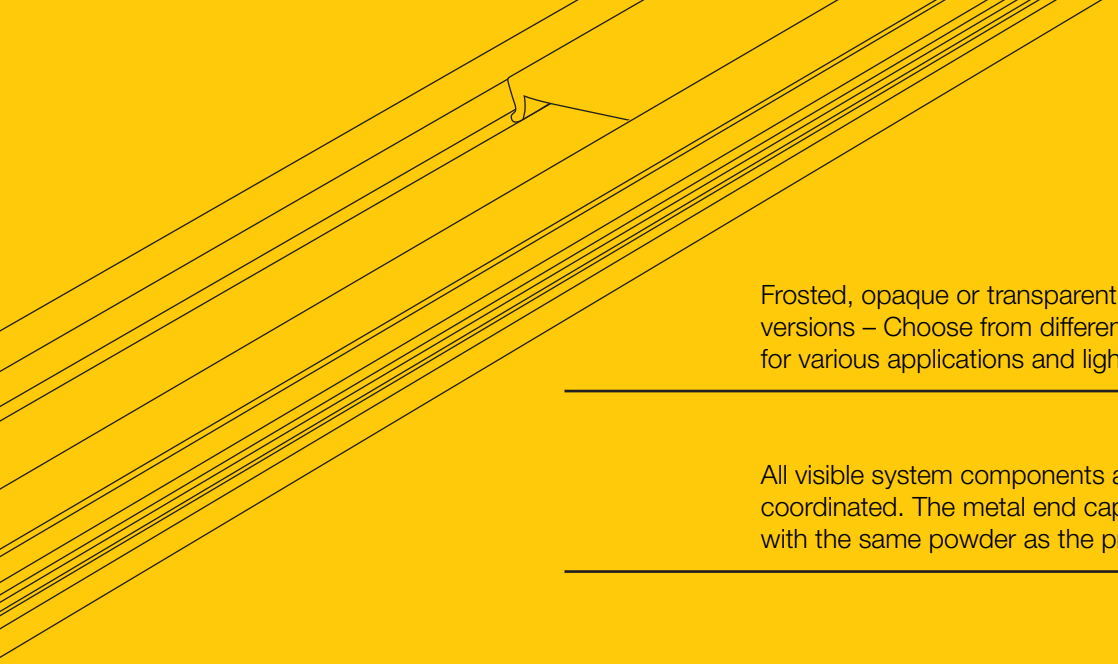

Frosted, opaque or transparent, in flat or tall versions – Choose from different covers for various applications and light distributions.

All visible system components are colour-coordinated. The metal end caps are coated with the same powder as the profiles.

The strip mounting surface of the profiles is not powder-coated to optimise heat dissipation.

NEW Grazia LED Strip Value, Additional Lighting	NEW Grazia LED Strip Value, Main Lighting	NEW Grazia LED Strip Value, Main Lighting Plus	NEW Grazia LED Strip Core, Main Lighting	Grazia LED Strip Pro MAX	Grazia LED Strip Pro MAX Performance
1008380	1008516	1008519	1008522	1004720	1004722
3000K	3000K	3000K	3000K	3000K	3000K
24V	24V	24V	24V	24V	24V
670	1340	2040	1620	2500	4000
64	128	160	180	196	196
>80	>80	>80	>90	>90	>90
4,8W	9,6W	14,4W	9W	25,2W	38,6W
140	140	140	180	99	104
8mm	8mm	8mm	8mm	20mm	20mm
✓	✓	✓	✓	-	-
✓	✓	✓	✓	-	-
✓	✓	✓	✓	-	-
✓	✓	✓	✓	-	-
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	-	-
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓

* available in other light colours

GRAZIA 10
Surface-mounted profile, flat 2 m

Material: Aluminium
Max. LED strip width in mm: 10
Cover not included



IP20

Length	Colour	Material	Prod. no.	GBP
200 cm	● black	Aluminium	**1000462**	**POA**
	○ white		**1000461**	

GRAZIA 10
Surface-mounted profile, standard

Material: Aluminium
Max. LED strip width in mm: 10
Cover not included



IP20

Length	Colour	Material	Prod. no.	GBP
200 cm	● black	Aluminium	**1000465**	**POA**
	○ white		**1000464**	

GRAZIA 10
Recessed profile

Material: Aluminium
Max. LED strip width in mm: 10
Cover not included



IP20

Length	Colour	Material	Prod. no.	GBP
200 cm	● black	Aluminium	**1000459**	**POA**
	○ white		**1000458**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA 10
Cover

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Cover	○ Opaque	200 cm	1,58 cm	0,4 cm	Polycarbonate (PC)	**1000466**	**16.00**
	○ frosted				Polymethyl methacrylate (PMMA)	**1000468**	**21.00**
	○ satin finish					**1000469**	**21.00**

GRAZIA 10
Mounting clips

Packaging unit: 2 pieces

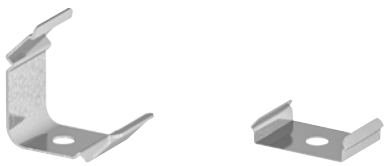

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Mounting clips	◌ silver, 45°	-		0,001 cm	Steel	**1000489**	**5.00**
	◐ Stainless steel, not visible		1,53 cm	0,3 cm	Stainless steel	**1000487**	**4.00**

GRAZIA 10
End caps for surface-mounted profile

Packaging unit: 2 pieces

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
End caps	● black, flat		1,75 cm	1,1 cm	Aluminium	**1000477**	**6.00**
	○ white, flat					**1000476**	**6.00**
End caps	● black, standard		1,75 cm	1,62 cm	Aluminium	**1000480**	**6.00**
	○ white, standard					**1000479**	**6.00**

GRAZIA 10
End caps for recessed profile

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
End caps	● black		3,00 cm	1,62 cm	Aluminium	**1000474**	**6.00**
	○ white					**1000473**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA 10 EDGE
2 m

Material: Aluminium
Max. LED strip width in mm: 10
Cover not included





IP20

Length	Colour	Material	Prod. no.	GBP
200 cm	○ white	Aluminium	1004890	POA
	● Aluminium		1004889	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA 10 EDGE
Cover

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Cover	○ Opaque	200 cm	1,58 cm	0,4 cm	Polycarbonate (PC)	**1000466**	**16.00**
	○ frosted				Polymethyl methacrylate (PMMA)	**1000468**	**21.00**
	○ satin finish					**1000469**	**21.00**

GRAZIA 10 EDGE
End cap

Packaging unit: 2 pieces



Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
End cap	○ white	2 cm	0,7 cm	2 cm	ABS	**1004894**	**2.00**
	● Aluminium					**1004893**	

GRAZIA 10 EDGE
Mounting clips

Packaging unit: 2 pieces



Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Mounting clips	◐ Stainless steel	2,25 cm	15 cm	2,25 cm	Steel	**1004895**	**4.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DISCOVERY

GRAZIA 20
Standard surface-mounted profile, 3 m

Material: Aluminium
Max. LED strip width in mm: 20
Cover not included



IP20

Length	Colour	Material	Prod. no.	GBP
300 cm	● black	Aluminium	1000525	POA
	○ white		1000524	

GRAZIA 20
Standard surface-mounted profile, 3 m

Material: Aluminium
Max. LED strip width in mm: 20
Cover not included



IP20

Length	Colour	Material	Prod. no.	GBP
300 cm	● black	Aluminium	1000534	POA
	○ white		1000533	

GRAZIA 20
Recessed profile, 3 m

Material: Aluminium
Max. LED strip width in mm: 20
Cover not included



IP20

Length	Colour	Material	Prod. no.	GBP
300 cm	● black	Aluminium	1000498	POA
	○ white		1000497	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA 20
Cover, 3 m, tall

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Cover	○ Opaque	300 cm	3,20 cm	0,6 cm	Polycarbonate (PC)	**1000540**	**36.00**
	○ frosted				Polymethyl methacrylate (PMMA)	**1000546**	
	○ satin finish					**1000549**	

GRAZIA 20
Longitudinal connector

Packaging unit: 2 pieces

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Longitudinal connector	● Aluminium	3,8 cm	1,4 cm	0,4 cm	Aluminium	**1000571**	**11.00**

GRAZIA 20
End caps for surface-mounted profile

Packaging unit: 2 pieces

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
End caps	● black		3,5 cm	2,2 cm	Aluminium	**1000561**	**8.00**
	○ white					**1000560**	**8.00**
End caps	● black, standard		3,5 cm	3,2 cm	Aluminium	**1000567**	**8.00**
	○ white, standard					**1000566**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA 20
End cap for recessed profile

Packaging unit: 2 pieces

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
End cap	● black		5,20 cm	3,2 cm	Aluminium	**1000558**	**8.00**
	○ white					**1000557**	

GRAZIA 20
Pendant suspension

Packaging unit: 2 pieces

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Pendant suspension	◯ silver	200 cm	-	-	Steel	**1000535**	**24.00**

GRAZIA 20
Mounting clips

Packaging unit: 2 pieces

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Mounting clip	◯ silver		3,0 cm	0,8 cm	Steel	**1000536**	**4.00**
Mounting clip	◯ chrome/aluminium	5,5 cm	7,0 cm	2,3 cm	Steel/Aluminium	**1004932**	**19.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA 60
Surface mounted profile, 1.5 m

Material: Aluminium
Max. LED strip width in mm: 20
Cover not included





IP20

Length	Colour	Material	Prod. no.	GBP
150 cm	● black	Aluminium	1004896	POA
	○ white		1004897	POA
300 cm	● black	Aluminium	1004898	POA
	○ white		1004899	POA

GRAZIA 60
Recessed profile, 1.5 m

Material: Aluminium
Max. LED strip width in mm: 20
Cover not included



IP20

Length	Colour	Material	Prod. no.	GBP
150 cm	● black	Aluminium	1004905	57.00
	○ white		1004906	57.00
300 cm	● black	Aluminium	1004907	114.00
	○ white		1004908	114.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA 60
Cover

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Cover, 1.5 m	● black	150 cm	6,50 cm	0,65 cm	Aluminium	**1004912**	**25.00**
	○ white					**1004913**	**25.00**
	○ frosted				Polycarbonate (PC)	**1004914**	**16.00**
	○ frosted				Polymethyl methacrylate (PMMA)	**1004916**	**20.00**
Cover, 3 m	○ frosted	300 cm	6,50 cm	0,65 cm	Polycarbonate (PC)	**1004915**	**31.00**
	○ frosted				Polymethyl methacrylate (PMMA)	**1004917**	**38.00**

GRAZIA 60
End cap





Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
End cap	● black	-	7,00 cm	9,5 cm	Aluminium	**1004900**	**11.00**
	○ white					**1004901**	
End cap	● black	-	8,60 cm	3,3 cm		**1004909**	**8.00**
	○ white					**1004910**	

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA 60
Mounting profile

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Mounting profile	● black	150 cm	6,10 cm	1,2 cm	Aluminium	**1004902**	**POA**

GRAZIA 60
Longitudinal connector

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Longitudinal connector	● Aluminium	8 cm	4,20 cm	1 cm	Aluminium	**1004903**	**11.00**

GRAZIA 60
Feed-in



Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Feed-in	● Aluminium	8 cm	4,20 cm	2,4 cm	Aluminium	**1004904**	**12.00**

GRAZIA 60
Mounting clip

Description	Colour	Length	Width	Height	Material	Prod. no.	GBP
Mounting clip	● chrome	13 cm	2,80 cm	4 cm	Aluminium	**1004911**	**14.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA LED STRIP VALUE

Additional Lighting

LEDs per metre:	64
Distance between LEDs:	1,56 cm
Can be separated every:	12,5 cm
IP code:	IP20

50 cm feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
2700 K	3300 lm	24 W	CRI 80	500 cm	0,80 cm	0,14 cm	**1008379**	**46.00**
3000 K	3350 lm						**1008380**	**46.00**
4000 K	3450 lm						**1008381**	**46.00**

Product	Material	Length	Width	Height	Prod. no.	GBP
LED power supply | 30W | 24V DC	Polycarbonate (PC)	30 cm	3,00 cm	1,6 cm	**1007250**	**43.00**
LED power supply 24V | 36W	Polycarbonate (PC)	17 cm	5,70 cm	1,8 cm	**1008654**	**47.00**
LED power supply 24V | 25W, round	Polycarbonate (PC)		Ø 5,5 cm	2,5 cm	**1008652**	**23.00**
LED power supply | 25W | 24V	Polycarbonate (PC)	12,8 cm	5,20 cm	3 cm	**1006336**	**30.00**
LED power supply | 30W | 24V DC Dali	Polycarbonate (PC)	30 cm	3,00 cm	1,6 cm	**1007254**	**52.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

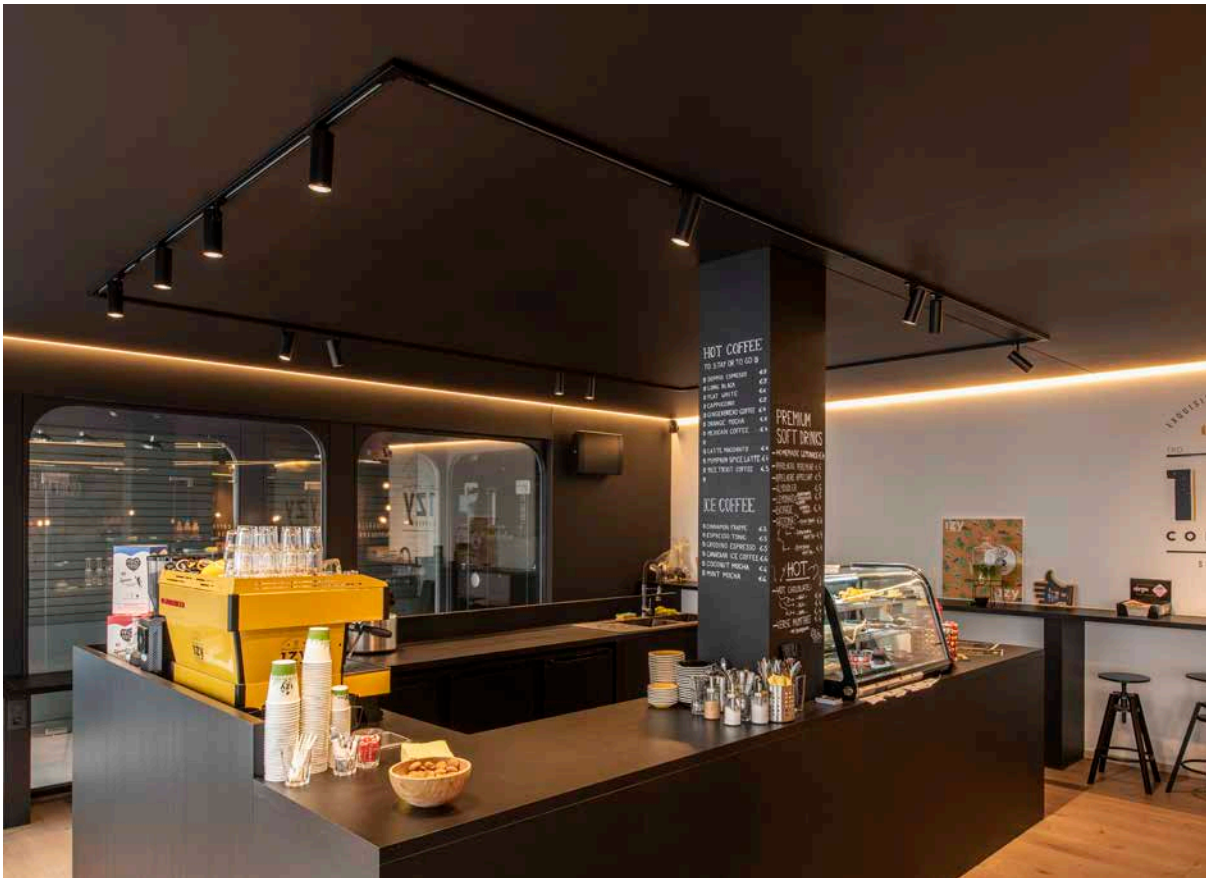

GRAZIA LED STRIP VALUE

Main Lighting

LEDs per metre: 128
Distance between LEDs: 0,78 cm
Can be separated every: 6,25 cm
IP code: IP20

50 cm feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
2700 K	6600 lm	48 W	CRI 80	500 cm	0,80 cm	0,14 cm	**1008515**	**98.00**
3000 K	6700 lm						**1008516**	**98.00**
4000 K	6950 lm						**1008517**	**98.00**

Product	Material	Length	Width	Height	Prod. no.	GBP
LED power supply | 100 W | 24V DC	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007251**	**69.00**
LED power supply | 60 W | 24V	Polycarbonate (PC)	17 cm	5,70 cm	1,8 cm	**1008655**	**56.00**
Power adapter | 50 W | 24V	Polycarbonate (PC)	18,4 cm	6,10 cm	3,2 cm	**1003104**	**43.00**
LED power supply | 100W | 24V DC Dali	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007255**	**95.00**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Adhesive tape on reverse of LED strip.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA LED STRIP VALUE

Main Lighting +

LEDs per metre:	160
Distance between LEDs:	0,63 cm
Can be separated every:	5 cm
IP code:	IP20

50 cm feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
2700 K	10050 lm	72 W	CRI 80	500 cm	1,00 cm	0,14 cm	**1008518**	**111.00**
3000 K	10200 lm						**1008519**	**111.00**
4000 K	10450 lm						**1008520**	**111.00**

⊕

Product	Material	Length	Width	Height	Prod. no.	GBP
LED power supply | 100 W | 24V DC including strain relief	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007251**	**69.00**
Power adapter | 100 W | 24V DC	Polycarbonate (PC)	21 cm	6,70 cm	3,4 cm	**1003105**	**104.00**
LED power supply | 100 W | 24V DC Dali dimmable including strain relief	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007255**	**95.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

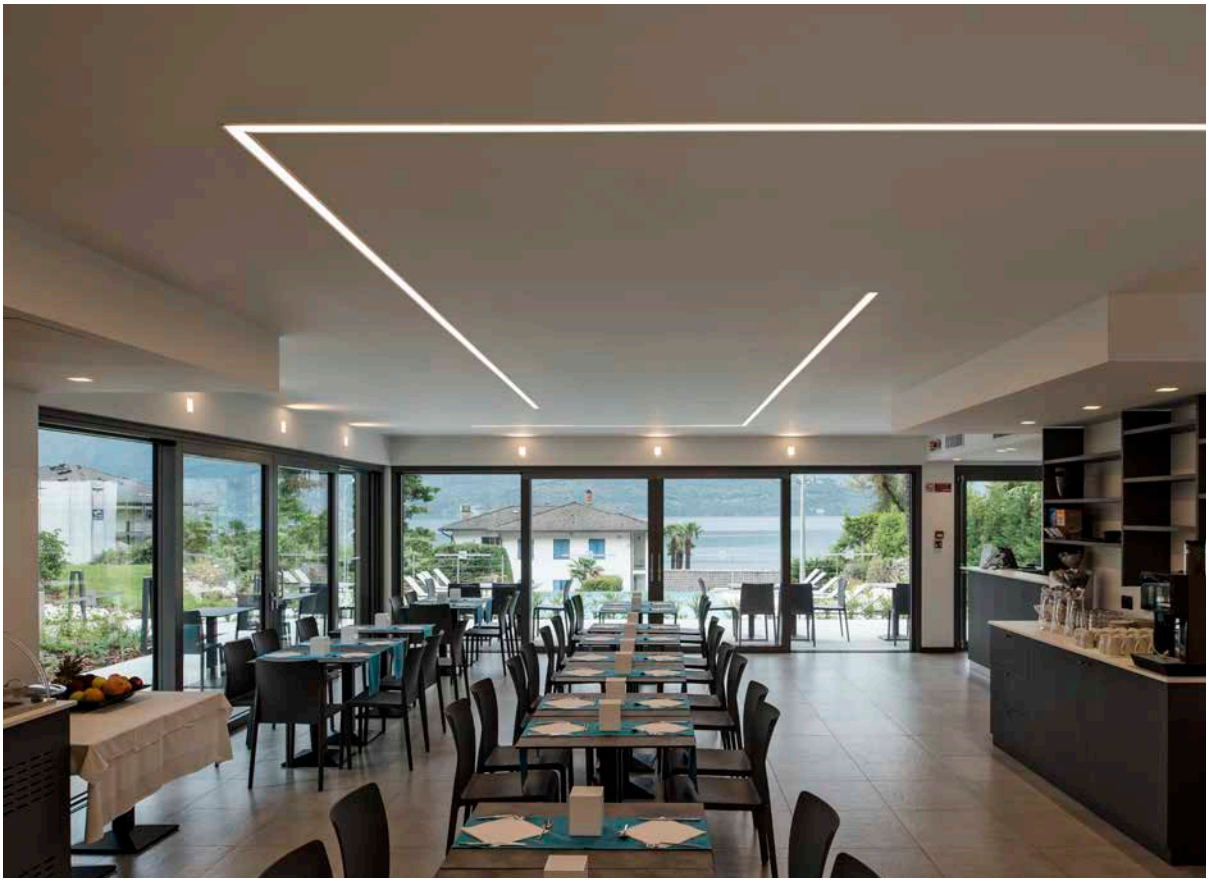

GRAZIA LED STRIP CORE
Main Lighting

LEDs per metre: 180
Distance between LEDs: 0,56 cm
Can be separated every: 5 cm
IP code: IP20

50 cm feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
2700 K	8000 lm	45 W	CRI 90	500 cm	1,00 cm	0,14 cm	**1008521**	**171.00**
3000 K	8100 lm						**1008522**	
4000 K	8500 lm						**1008523**	
6500 K							**1008524**	

Product	Material	Length	Width	Height	Prod. no.	GBP
LED power supply | 100 W | 24V DC	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007251**	**69.00**
LED power supply | 60 W | 24V	Polycarbonate (PC)	17 cm	5,70 cm	1,8 cm	**1008655**	**56.00**
Power adapter | 50 W | 24V	Polycarbonate (PC)	18,4 cm	6,10 cm	3,2 cm	**1003104**	**43.00**
LED power supply | 100 W | 24V DC Dali	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007255**	**95.00**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Adhesive tape on reverse of LED strip.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA PRO MAX FLEXSTRIP
24 V

LEDs per metre: 196
Distance between LEDs: 0,5 cm
Can be separated every: 3,6 cm
IP code: IP20

Feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
3000 K	12500 lm	126 W	CRI 90	500 cm	2,00 cm	0,15 cm	**1004720**	**171.00**
4000 K	13000 lm						**1004721**	**171.00**

Product	Material	Length	Width	Height	Prod. no.	GBP
LED power supply | 150 W | 24V DC	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007252**	**86.00**
LED power supply | 150 W | 24V DC Dali	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007256**	**121.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA PRO MAX FLEXSTRIP
24 V

LEDs per metre: 196
Distance between LEDs: 1 cm
Can be separated every: 7,1 cm
IP code: IP20

Feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
3000 K	20000 lm	193 W	CRI 90	500 cm	2,00 cm	0,15 cm	**1004722**	**301.00**
4000 K	21400 lm						**1004723**	**301.00**

Product	Material	Length	Width	Height	Prod. no.	GBP
LED power supply | 250 W | 24V DC	Polycarbonate (PC)	40 cm	4,00 cm	2,2 cm	**1007253**	**103.00**
LED power supply | 250 W | 24V DC Dali	Polycarbonate (PC)	40 cm	4,00 cm	2,2 cm	**1007257**	**138.00**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Adhesive tape on reverse of LED strip.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA PRO FLEXSTRIP
tunable white, 24 V

LEDs per metre: 224
Distance between LEDs: 0,9 cm
Can be separated every: 6,3 cm
IP code: IP20

Feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
2700 - 6500 K	3400 lm	80 W	CRI 90	500 cm	1 cm	0,12 cm	**1004725**	**132.00**

Product	Material	Length	Width	Height	Prod. no.	GBP
DALI Controller | 1-channel, push-dim	Polycarbonate (PC)	11,6 cm	4,2 cm	1,8 cm	**1003106**	**57.00**
DALI DT8 Controller | 5-channel, push-dim	Polycarbonate (PC)	17 cm	5,9 cm	2,9 cm	**1007997**	**103.20**
SMART Controller | 1-5 channel	Polycarbonate (PC)	14,5 cm	4,65 cm	1,6 cm	**1006348**	**69.00**
SMART Remote Controller | Zigbee	Polycarbonate (PC)	14 cm	4,4 cm	1,7 cm	**1007827**	**68.00**
LED power supply | 60 W | DALI | 2-channel	Polycarbonate (PC)	20,2 cm	5,8 cm	3 cm	**1006133**	**132.00**
LED power supply | 100 W | 24 V DC Dali	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007251**	**69.00**
LED power supply | 100 W | 24 V Dali	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007255**	**95.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA PRO FLEXSTRIP
RGBW, 24V

LEDs per metre: 70
Distance between LEDs: 1,4 cm
Can be separated every: 10 cm
IP code: IP20

Feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
3000 K	2050 lm	27 W	CRI 90	500 cm	1,20 cm	0,22 cm	**1004727**	**133.00**

Product	Material	Length	Width	Height	Prod. no.	GBP
DALI DT8 Controller | 5-channel, push-dim	Polycarbonate (PC)	17 cm	5,9 cm	2,9 cm	**1007997**	**103.20**
SMART Controller | 1-5 channel	Polycarbonate (PC)	14,5 cm	4,65 cm	1,6 cm	**1006348**	**69.00**
SMART Remote Controller | Zigbee	Polycarbonate (PC)	14 cm	4,4 cm	1,7 cm	**1007827**	**68.00**
LED power supply | 100 W | 24 V DC Dali	Polycarbonate (PC)	35 cm	3,00 cm	1,8 cm	**1007251**	**69.00**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Adhesive tape on reverse of LED strip.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

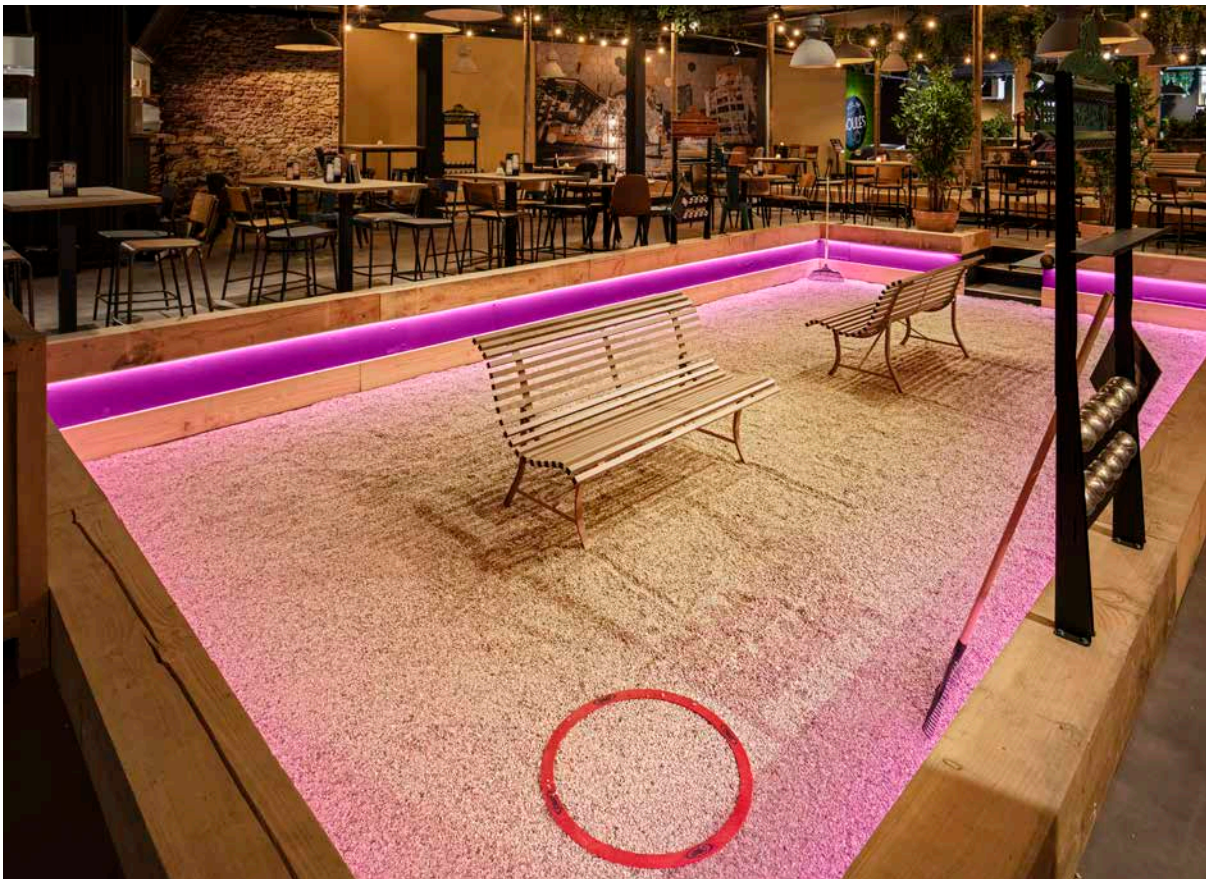

GRAZIA IP FLEXSTRIP
24 V

LEDs per metre: 70
Distance between LEDs: 1,4 cm
Can be separated every: 10 cm
IP code: IP54

Feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
2700 K	3363 lm	44 W	CRI 90	502 cm	1,20 cm	0,4 cm	**1004734**	**85.00**
3000 K							**1004735**	**85.00**
4000 K	3614 lm						**1004736**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA IP FLEXSTRIP
tunable white, 24V

LEDs per metre: 223
Distance between LEDs: 0,9 cm
Can be separated every: 6,3 cm
IP code: IP54

Feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
2700 - 6500 K	3400 lm	80,3 W	CRI 90	502 cm	1,20 cm	0,4 cm	**1004726**	**146.00**

⊕

Product	Material	Length	Width	Height	Prod. no.	GBP
DALI DT8 Controller | 5-channel, push-dim	Polycarbonate (PC)	17 cm	5,9 cm	2,9 cm	**1007997**	**103.20**
SMART Controller | 1-5 channel	Polycarbonate (PC)	14,5 cm	4,65 cm	1,6 cm	**1006348**	**69.00**
SMART Remote Controller | Zigbee	Polycarbonate (PC)	14 cm	4,4 cm	1,7 cm	**1007827**	**68.00**
LED power supply | 60 W | DALI | 2-channel	Polycarbonate (PC)	20,2 cm	5,8 cm	3 cm	**1006133**	**132.00**
LED power supply | 100 W | 24V DC Dali	Polycarbonate (PC)	35 cm	4 cm	2,2 cm	**1006134**	**158.00**
LED power supply | 150 W | 24V	Polycarbonate (PC)	35 cm	3 cm	1,8 cm	**1007252**	**86.00**

GRAZIA IP FLEXSTRIP
RGBW, 24V

LEDs per metre: 70
Distance between LEDs: 1,4 cm
Can be separated every: 10 cm
IP code: IP54

Feed-in cable on both sides

Colour temperature	Luminous flux	Output	Colour rendering	Length	Width	Height	Prod. no.	GBP
3000 K	1958 lm	27 W	CRI 90	502 cm	1,40 cm	0,46 cm	**1004737**	**181.00**

⊕

Product	Material	Length	Width	Height	Prod. no.	GBP
DALI DT8 Controller | 5-channel, push-dim	Polycarbonate (PC)	17 cm	5,9 cm	2,9 cm	**1007997**	**103.20**
SMART Controller | 1-5 channel	Polycarbonate (PC)	14,5 cm	4,65 cm	1,6 cm	**1006348**	**69.00**
SMART Remote Controller | Zigbee	Polycarbonate (PC)	14 cm	4,4 cm	1,7 cm	**1007827**	**68.00**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Adhesive tape on reverse of LED strip.

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008543 794

GRID SUN | 691

GRID CUBE | 691

ADEGAN | 693

VINOLINA ONE | 695

VINOLINA | 695

VINOLINA TWO | 697

TAHA | 699

TUBE 32 | 701

S–TUBE 75 | 701

T–TUBE 70 | 702–703

PHOTONI CYL | 705

PHOTONI | 705

S–CUBE | 708

R–CUBE | 709

I–RING 65 | 710

LID I | 711

QUAD PRO | 713

NEW

M–POL | 714–723

CONCRETE | 726–727

NEW

CONCRETO | 729

RASTERLYS 70 | 731

FLATT II | 733

NEW

FLATT | 734–735

ESKINA FRAME | 737–739

LOGS | 741

GRAFIT | 743

GRAFIT | 744

QUADRULO | 747

RUSTY® SLOT | 748–749

RUSTY® PATHLIGHT | 750–751

RUSTY® | 752–753

RUSTY® CONE | 755

RUSTY® | 756

ARROCK GRANITE | 757

ARROCK ARC | 758

ARROCK STONE | 759

ARROCK SLOT | 759

L–LINE OUT | 760–761

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED
TAHA II | 763

LED
OVALISK | 765

SOCKET
GLOO PURE | 767

SOCKET
ROTOBALL | 769

SOCKET
PHOTONIA | 771

SOCKET
OTOS GLAS | 771

SOCKET
CUBIX | 772

SOCKET
CONE | 772

SOCKET
MOLAT | 773

SOCKET
LISENNE | 774–775

SOCKET
ALPA MUSHROOM | 777

SOCKET
ALPA CONE | 777

LED
APONI | 778

LED
TRUST | 779

SOCKET
BIG NAILS | 780

SOCKET
ROX ACRYL | 781

SOCKET
VAP SLIM | 783

SOCKET
C–POL 90 | 784

SOCKET
F–POL 85 | 784

SOCKET
SQUARE | 785

LED
SLOTS | 787

LED
H–POL | 788–789

LED
SLOTBOX | 791

LED
ORDI II | 793

LED
ABRIDOR HYBRID | 794

LED
ABRIDOR | 795

LED
IPERI 50 | 796

SOCKET
QUADRASYL 75 | 797

LED
QUAD | 798

LED
BOOKAT | 798

SOCKET
MYRA SPOT | 799

SOCKET
SITRA 360 | 799

SOCKET
THEO PATHLIGHT 73 | 801

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008477 691

1008476 691

GRID SUN
FL



IP44/ IP65 | IK03 | 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 8 W
Material: Steel/Plastic PC

- IP44 24 V plug-in power supply

LED INSIDE | CRI 80

500 lm | 2700 K

Options	Prod. no.	GBP
● black/opaque	**1008476**	**154.00**

GRID CUBE
FL



IP44/ IP65 | IK03 | 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 8 W
Material: Steel

- IP44 24 V plug-in power supply

LED INSIDE | CRI 80

250 lm | 2700 K

Options	Prod. no.	GBP
● black	**1008477**	**171.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008388 693

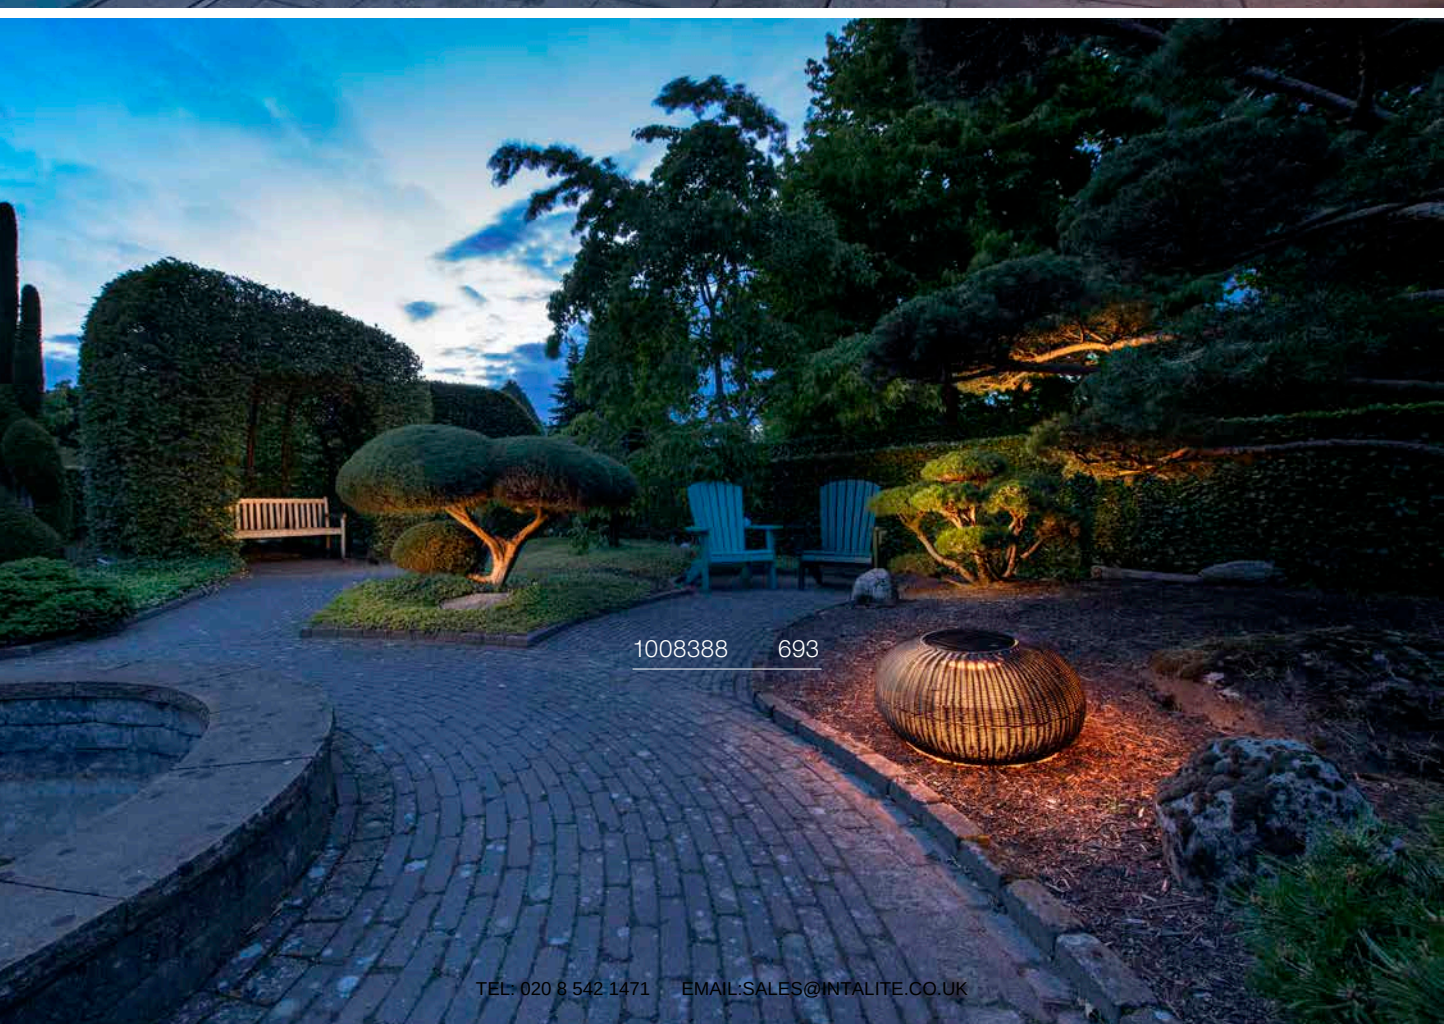
1008388 693

ADEGAN
FL, Flat SOLAR



Touch IP65 IK03 50 000 h L80B20

Power consumption: 4.3500
Material: PE/Steel/Plastic PC

- 2.5m USB-C charging cable included
- The light switches off while charging via USB cable
- The light can be dimmed in 3 stages (100/50/25%)

LED INSIDE CRI 80

75 lm 85 lm	2200 K	35 lm 40 lm	20 lm

Options	Prod. no.	GBP
black 75 lm	**1008388**	**249.00**
brown/black 85 lm	**1008389**	**249.00**

ADEGAN
FL, SOLAR

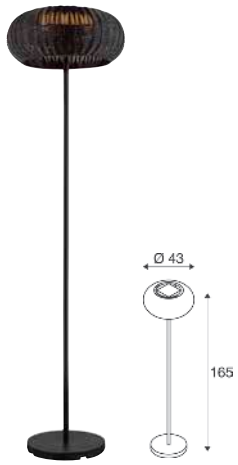

Touch IP65 IK03 50 000 h L80B20

Power consumption: 4.3500
Material: PE/Steel

- 2.5m USB-C charging cable included
- The light switches off while charging via USB cable
- The light can be dimmed in 3 stages (100/50/25%)

LED INSIDE CRI 80

85 lm 100 lm	2200 K	40 lm 45 lm	20 lm

Options	Prod. no.	GBP
black 85 lm	**1008386**	**325.94**
brown/black 100 lm	**1008387**	**326.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007357 695

BELOVED
1007360 695
Marshall

VINOLINA ONE
TL, Battery



Touch IP54 50000h L80B10

5 V
Total wattage: 2.5 W
Material: Aluminium

- Running time 12h
- Charging time 7h
- charging plate included
- power adapter not included
- USB-A

LED INSIDE CRI 80

125 lm|2700 K

Options	Prod. no.	GBP
● black	**1007359**	**85.00**
○ white	**1007357**	**85.00**
● rust	**1007358**	**85.00**

VINOLINA
TL, Battery

CCT



Touch IP54 50000h L80B10

5 V
Total wattage: 2.2 W
Material: Aluminium

- Running time 12h
- Charging time 7h
- charging plate included
- power adapter not included
- USB-A

LED INSIDE CRI 80

130 lm|2700 K | 130 lm|3000 K

Options	Prod. no.	GBP
● black	**1007362**	**85.00**
○ white	**1007360**	**85.00**
● rust	**1007361**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007695 697

VINOLINA TWO
TL, Battery, DTW



Touch IP65 IK03 30000h L70B50

5 V
Total wattage: 2 W
Material: Aluminium/Plastic

- Running time 10h
- Charging time 5h
- Charging station for one light included
- USB-A

LED INSIDE

140 lm | 2200 K	170 lm | 2700 K	190 lm | 3000 K

Options	Prod. no.	GBP
● black	**1007693**	**85.00**
○ white	**1007692**	**85.00**
● sand	**1007697**	**85.00**
● rust	**1007695**	**85.00**
● red	**1007694**	**85.00**
● sage green	**1007696**	**85.00**

⊕

Product	Prod. no.	GBP
Charging base		
● black	**1007698**	**120.00**

VINOLINA TWO
Charging base

IP20 IK04

L: 46.2 cm
W: 32.6 cm
H: 5 cm
Material: Plastic

- Charging base for max. 6
- Connection cable available separately

Options	Prod. no.	GBP
● black	**1007698**	**120.00**

VINOLINA TWO
IEC connection cable with safety plug

IP20

L: 180 cm

Options	Prod. no.	GBP
● black	**1008029**	**13.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007380 699

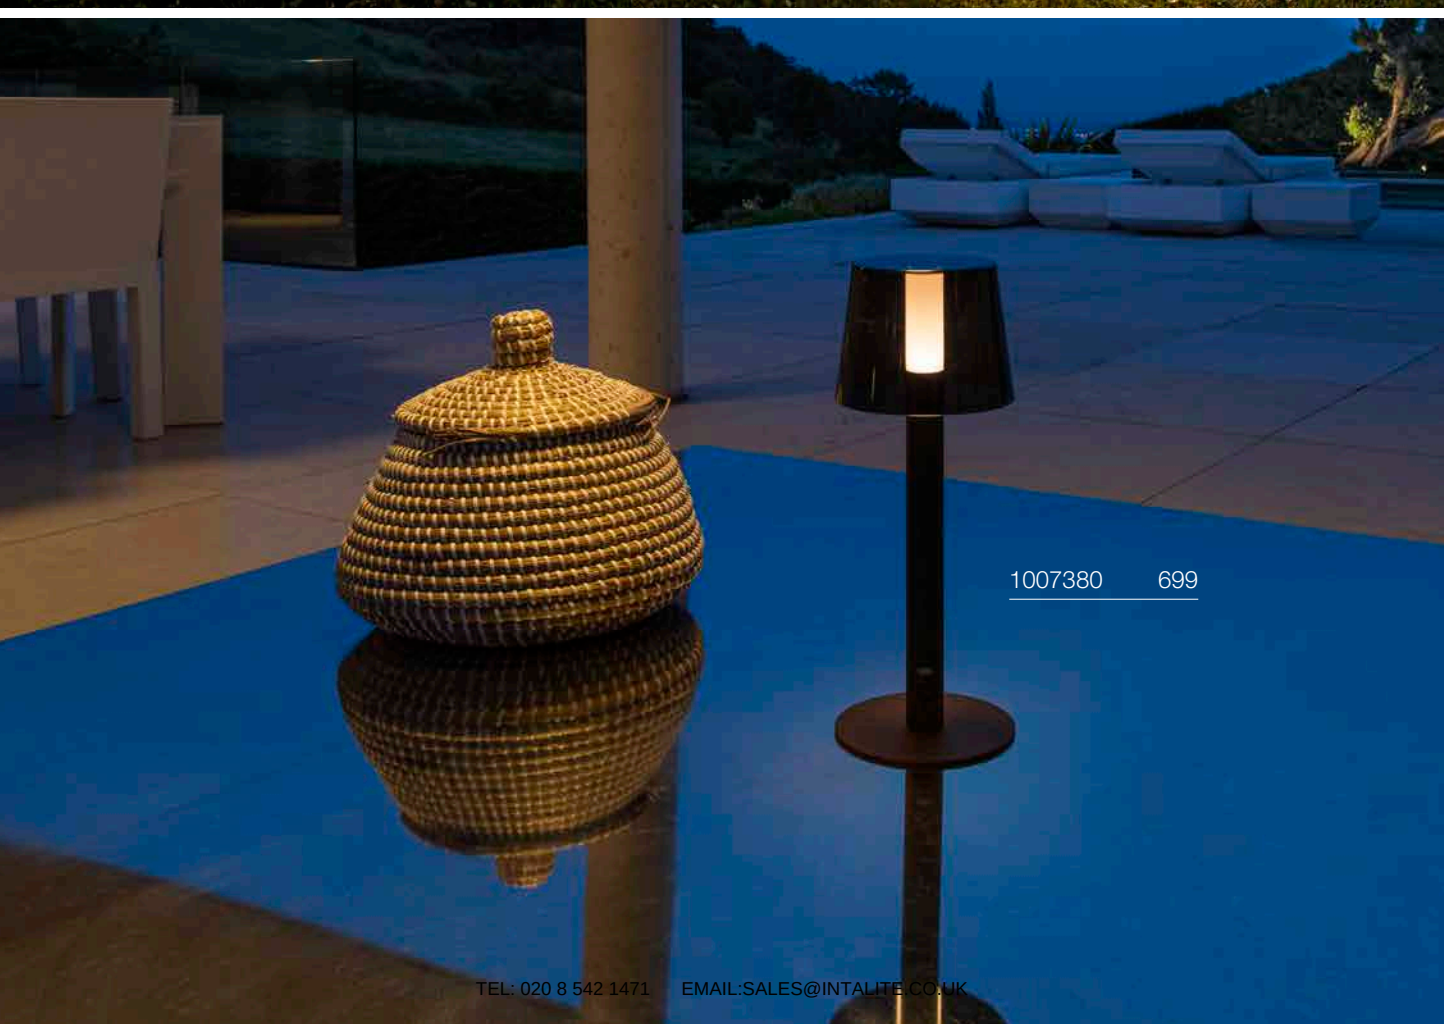
1007380 699

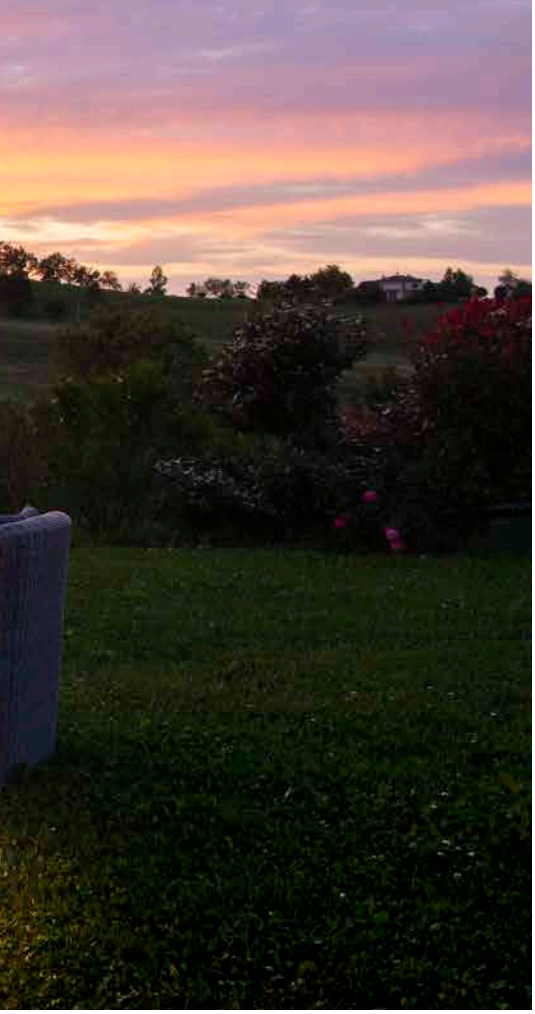

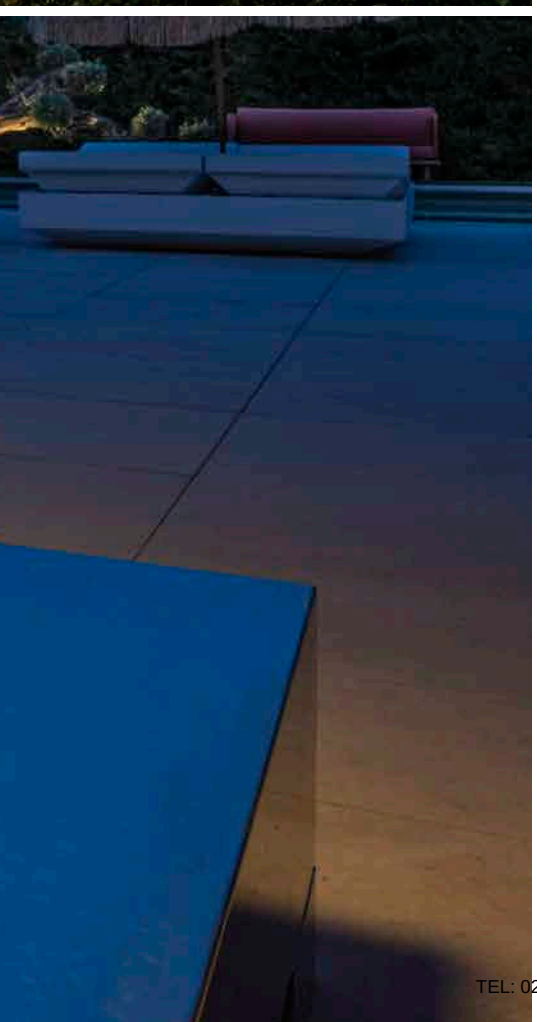

TAHA
Light set, battery-powered



100-240 V ~50/60 Hz | 5 V
Total wattage: 5 W
Material: Aluminium/Plastic

- In addition to the light, the light set includes two different lampshades, an extension tube, USB-C charging cable, ground spike and a loop for hanging temporarily on branches and beams.
- 3 dimming levels
- IP44 plug-in power supply

200 lm | 2700 K

Options	Prod. no.	GBP
● black	**1007980**	**142.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007651 701
1007652 701

S-TUBE 32
Pole, GU10



IP65 IK06 340° 130°

220-240 V ~50/60 Hz
Material: Aluminium

- open cable end
- streamlined design

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1007651**	**76.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000h

Prod. no.: **1007230** **5.00 GBP**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

S-TUBE 75
Pole, GU10



IP65 IK06 340° 130°

220-240 V ~50/60 Hz
Material: Aluminium

- open cable end
- streamlined design

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1007652**	**118.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000h

Prod. no.: **1007230** **5.00 GBP**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

T-TUBE 70
Pole, GU10, single, Sensor



IP44 IK06 300°

220-240 V ~50/60 Hz
Material: Aluminium

- Primary and replica functionality possible with accessories
- PIR sensor, adjustable range 10-2000lx and 5s-10min. Detection range up to 8 m depending on the mounting height of the light
- IP connection box

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008014**	**137.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: 1005077 7.00 GBP

T-TUBE 70
Pole, GU10, double, Sensor



IP44 IK06 300°

220-240 V ~50/60 Hz
Material: Aluminium

- Primary and replica functionality possible with accessories
- PIR sensor, adjustable range 10-2000lx and 5s-10min. Detection range up to 8 m depending on the mounting height of the light
- IP connection box

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008015**	**171.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

Prod. no.: 1005077 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

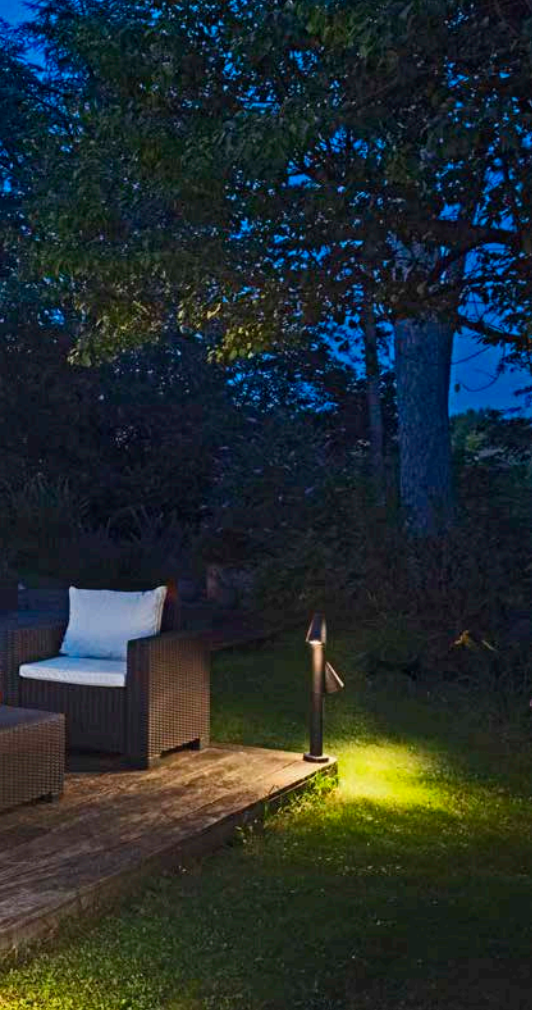

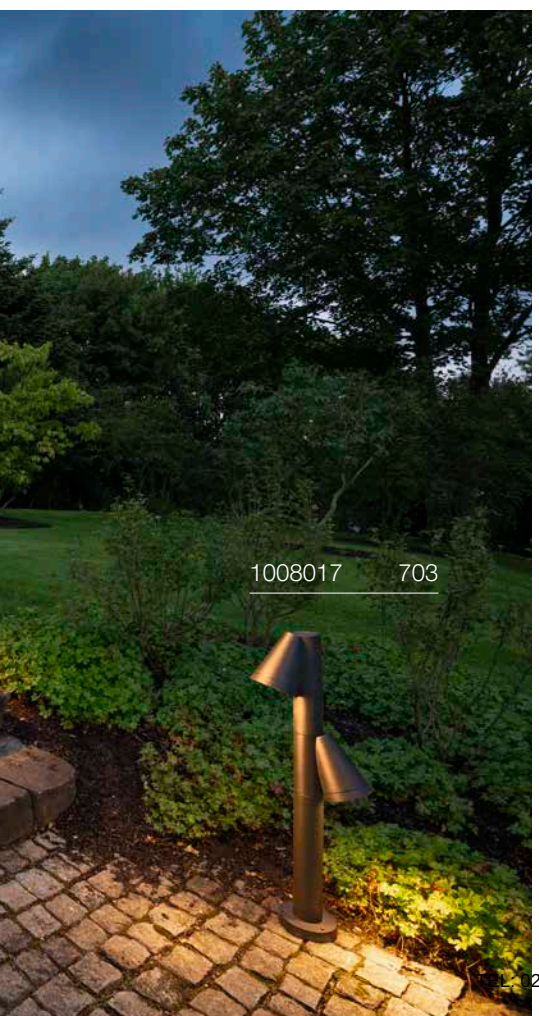

T-TUBE 70
Pole, GU10, single



IP65 IK06 300°

220-240 V ~50/60 Hz
Material: Aluminium

- IP connection box

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008016**	**120.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: **1005077** **7.00 GBP**

T-TUBE 70
Pole, GU10, double



IP65 IK06 300°

220-240 V ~50/60 Hz
Material: Aluminium

- IP connection box

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008017**	**154.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000h

C,L

Prod. no.: **1005077** **7.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008194 705

PHOTONI CYL 45
Pole, E27



IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

- IP connection box

SOCKET INSIDE 13 W

Base: 1xE27	max. Ø: 6 cm	L: 11.6 cm

Options	Prod. no.	GBP
● black	**1008195**	**154.00**
● rust	**1008196**	**154.00**

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005305 17.00 GBP

PHOTONI CYL 75
Pole, E27



IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

- IP connection box

SOCKET INSIDE 13 W

Base: 1xE27	max. Ø: 6 cm	L: 11.6 cm

Options	Prod. no.	GBP
● black	**1008193**	**171.00**
● rust	**1008194**	**171.00**

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005305 17.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007584 707
1007587 707

PHOTONI 45
Pole, E27



IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

- Sea-air resistant
- IP connection box

SOCKET INSIDE 13 W

Base: 1xE27	max. Ø: 6 cm	L: 11.6 cm

Options	Prod. no.	GBP
● black	**1007587**	**154.00**
● rust	**1007583**	**154.00**

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005305 17.00 GBP

PHOTONI 75
Pole, E27



IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

- Sea-air resistant
- IP connection box

SOCKET INSIDE 13 W

Base: 1xE27	max. Ø: 6 cm	L: 11.6 cm

Options	Prod. no.	GBP
● black	**1007584**	**171.00**
● rust	**1007580**	**171.00**

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005305 17.00 GBP

20 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

S-CUBE
Pole, PHASE



IP65 IK04 80° 180° 50000 h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

INSIDE CRI 80

1000 lm | 2700 K	1200 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007460**	**173.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

S-CUBE 75
Pole, PHASE



IP65 IK04 80° 180° 50000 h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

INSIDE CRI 80

1000 lm | 2700 K	1200 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007459**	**207.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

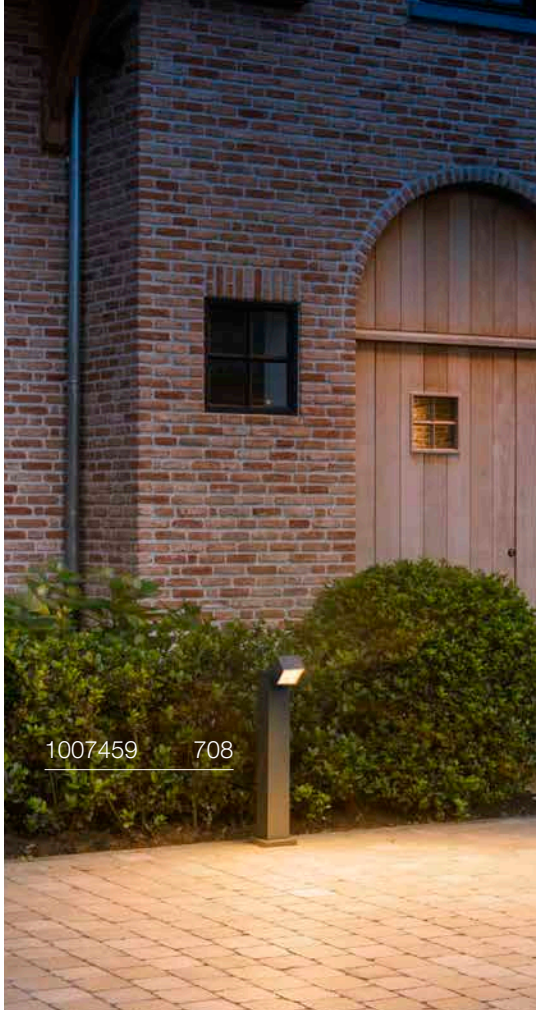

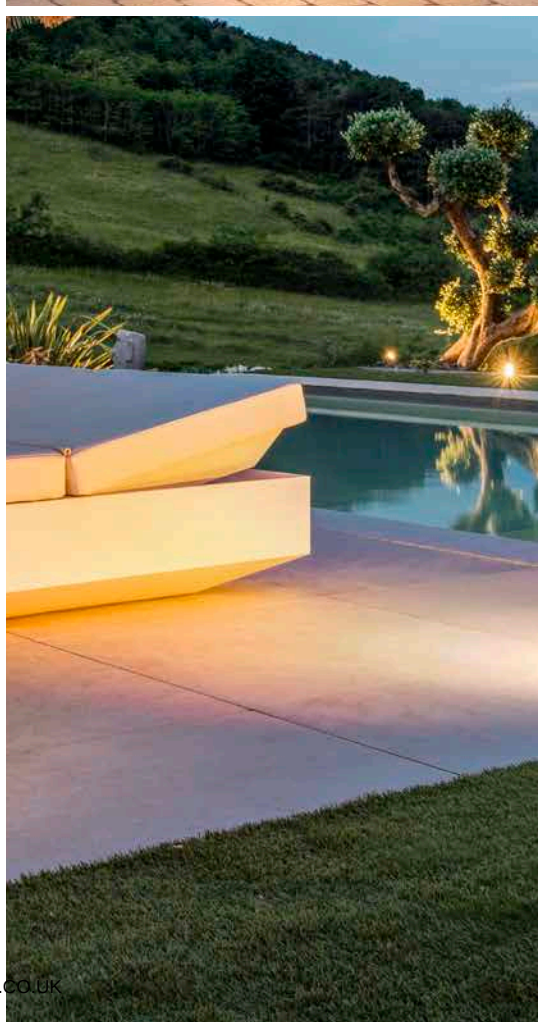

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

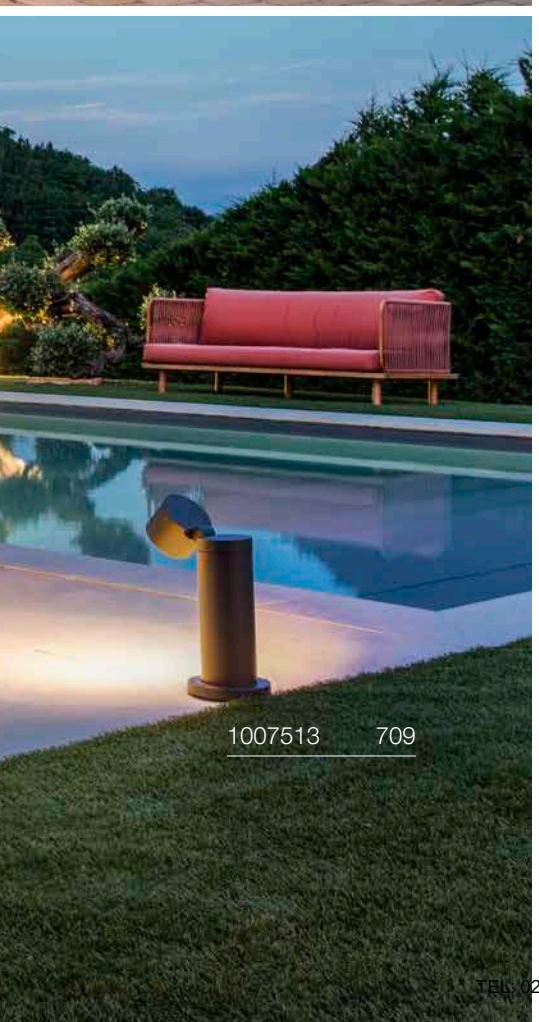

R-CUBE 35
Pole, PHASE



IP65 IK04 70° 350° 180° 48000h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

800 lm | 2700 K	800 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007513**	**173.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

R-CUBE 75
Pole, PHASE

IP65 IK04 70° 350° 180° 48000h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

800 lm | 2700 K	800 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007512**	**207.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

I-RING 65
Pole



IP65 IK05 350° 90° 50000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 9.2 W
Material: Aluminium

- IP68 connection box

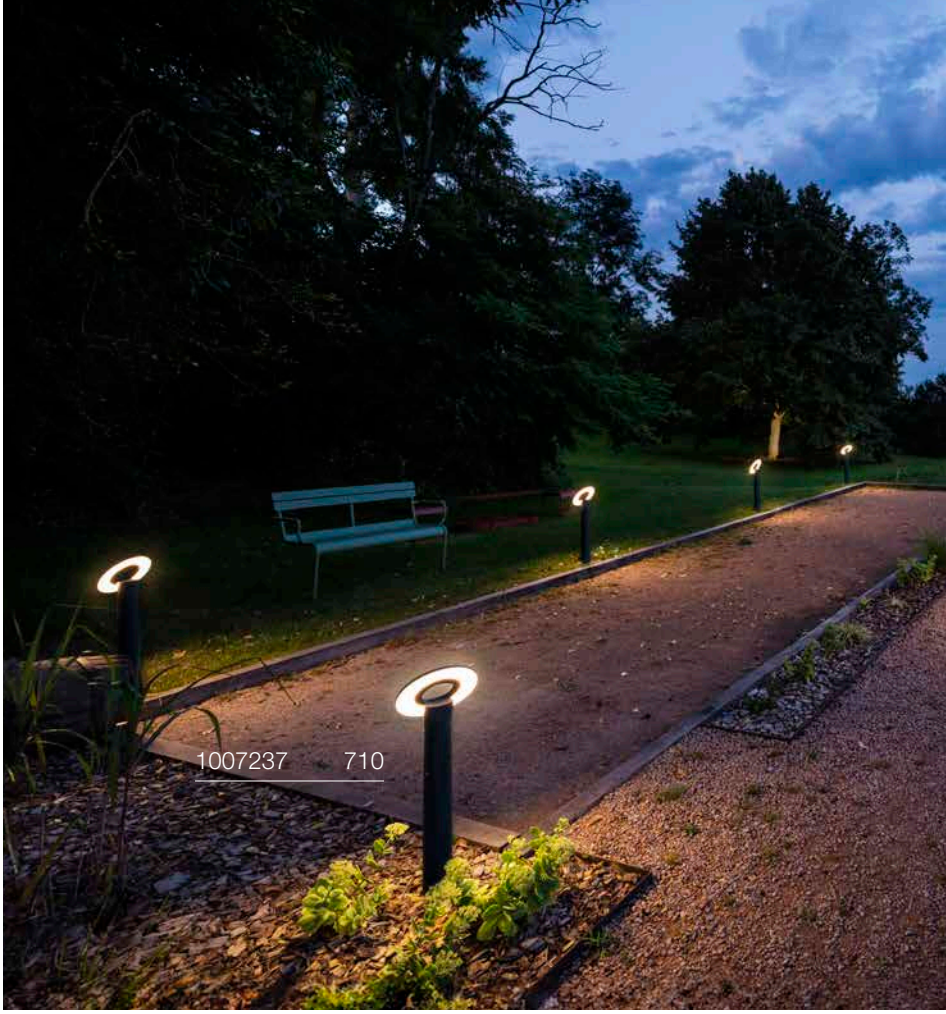

LED INSIDE CRI 80

670 lm | 3000 K

Options	Prod. no.	GBP
anthracite	**1007237**	**197.00**

⊕

Product	Prod. no.	GBP
Screw set		
Stainless steel	**228753**	**8.00**

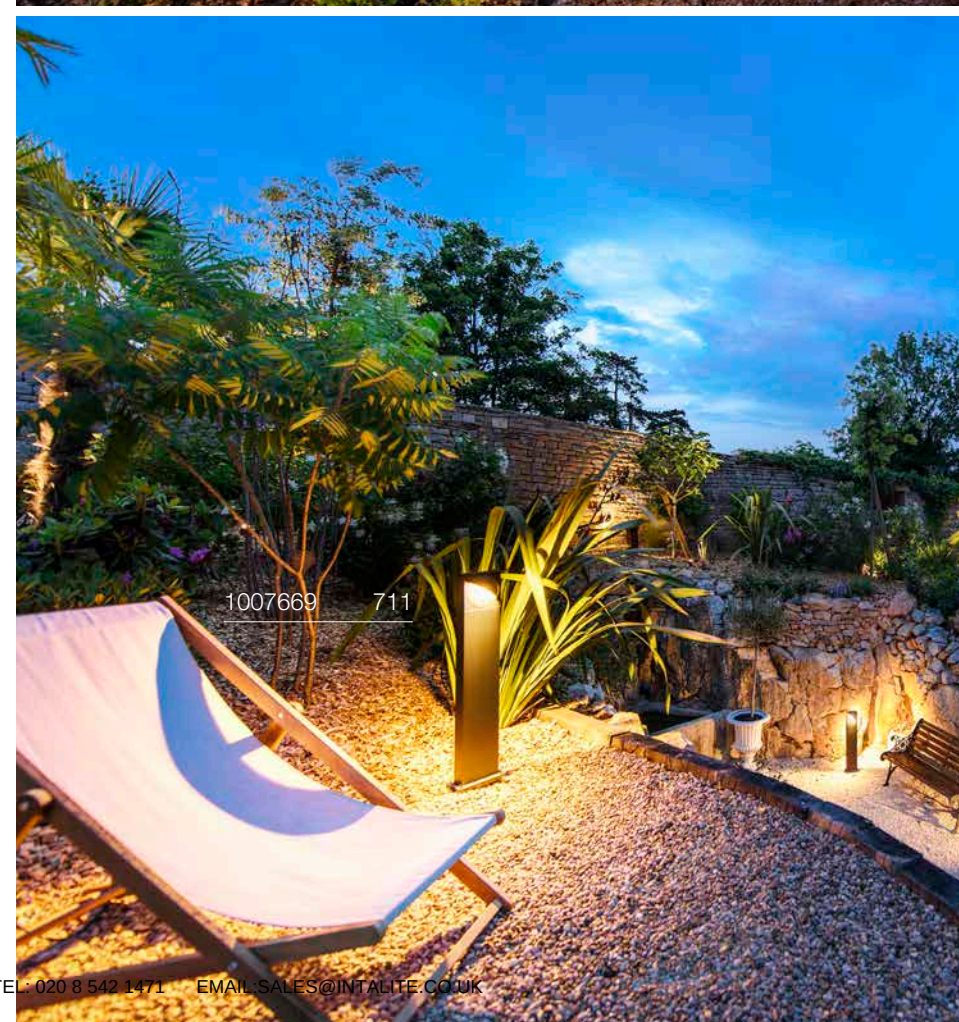

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

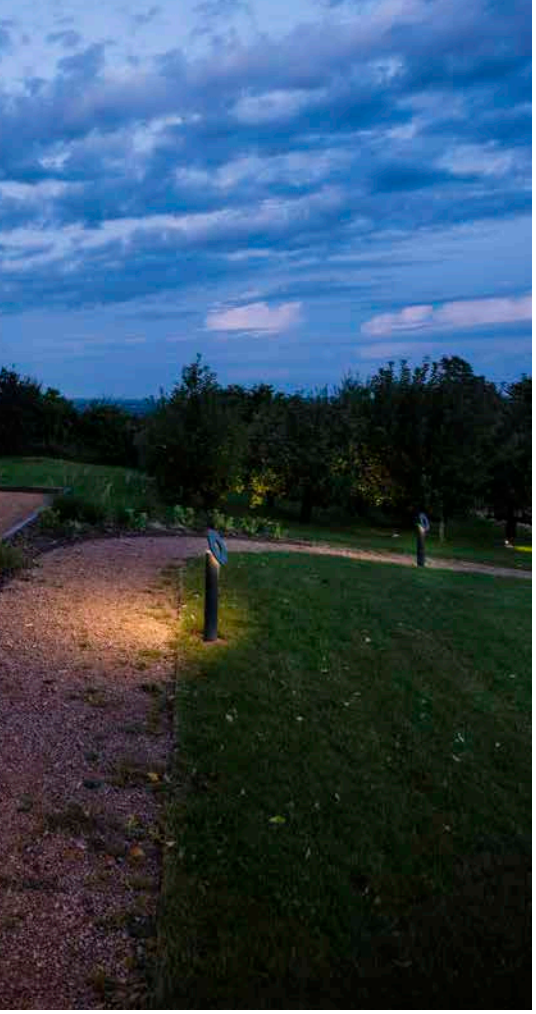

LID I 45
Pole, single, PHASE



IP65 IK07 100° 330° 50000h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- open cable end
- The light colour must be set prior to installation

LED INSIDE CRI 80

	900 lm | 2700 K	1050 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007670**	**195.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

LID I 75
Pole, double, PHASE



IP65 IK07 100° 330° 50000h L70B20

220-240 V ~50/60 Hz | 700 mA
Total wattage: 29 W
Material: Aluminium

- open cable end
- The light colour must be set prior to installation

LED INSIDE CRI 80

	Direct	850 lm | 2700 K	1000 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007669**	**263.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

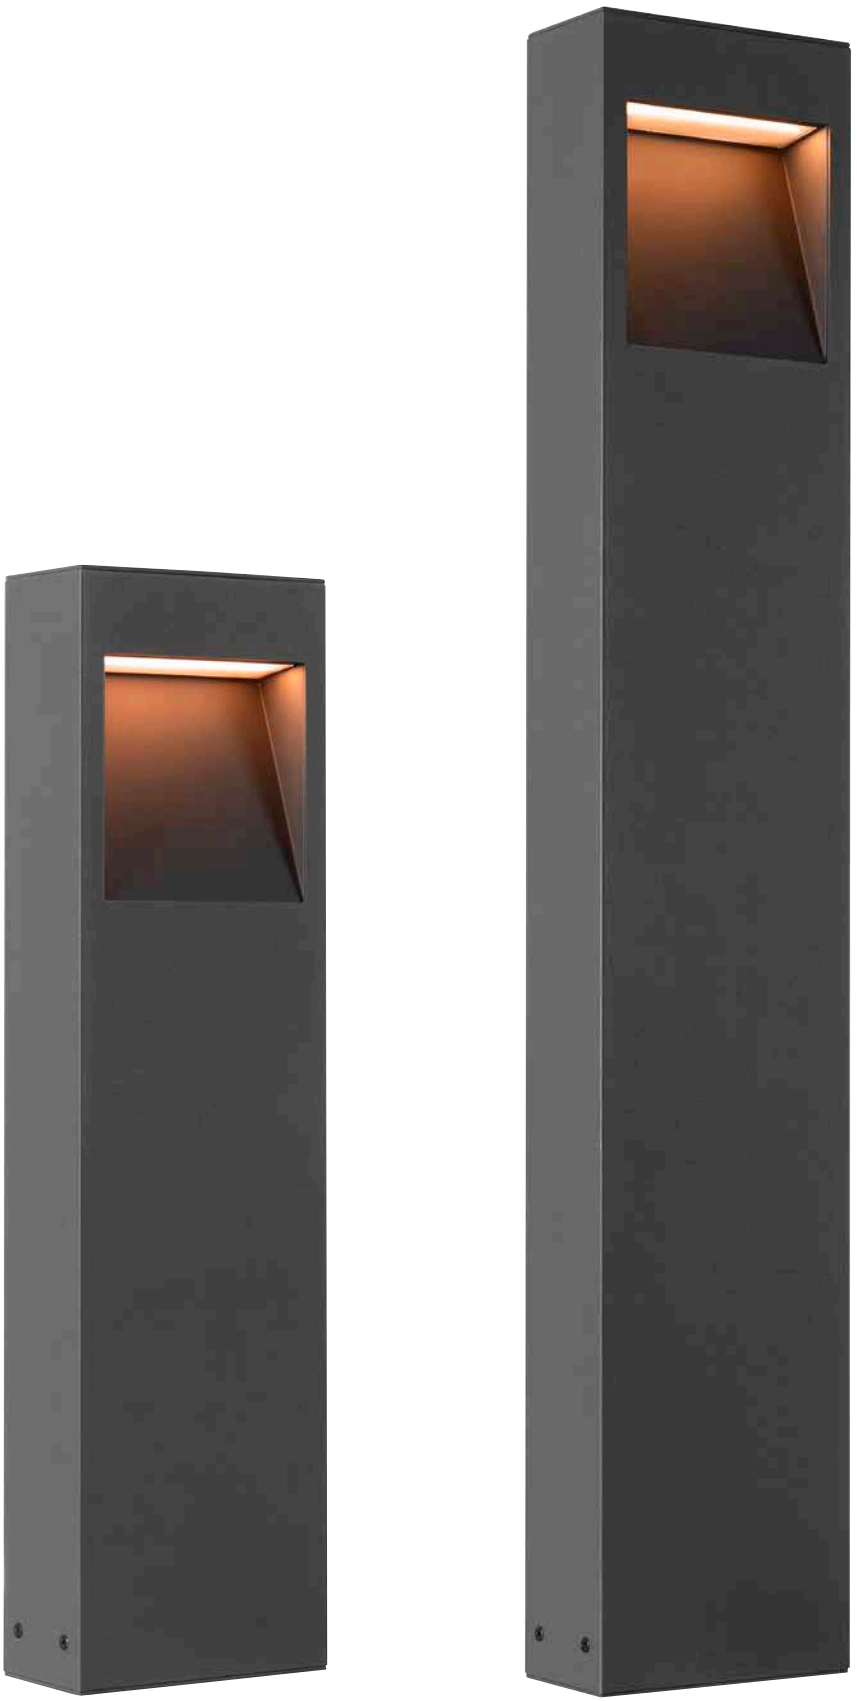

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

QUAD PRO 60
Pole, DALI

NEW



100-240 V ~50/60 Hz | 500 mA
Total wattage: 14 W
Material: Aluminium

- asym. Light distribution for optimum illumination of paths
- ULOR <2% to avoid light pollution
- IP connection box

Asymetrical	450 lm | 2200 K
Asymetrical	500 lm | 2700 K

Options	Prod. no.	GBP
anthracite 450 lm | 2200 K	**1010204**	**254.00**
anthracite 500 lm | 2700 K	**1010205**	**254.00**

QUAD PRO 90
Pole, DALI

NEW



100-240 V ~50/60 Hz | 500 mA
Total wattage: 14 W
Material: Aluminium

- asym. Light distribution for optimum illumination of paths
- ULOR <2% to avoid light pollution
- IP connection box

Asymetrical	450 lm | 2200 K
Asymetrical	500 lm | 2700 K

Options	Prod. no.	GBP
anthracite 450 lm | 2200 K	**1010202**	**331.00**
anthracite 500 lm | 2700 K	**1010203**	**331.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

M-POL S
Polehead 360°, glare reduction



IP65 IK10 50 000 h L80B50 90 17

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 80

750 lm | 2700 K

Options	Prod. no.	GBP
● anthracite	**1007232**	**249.00**

⊕

Product	Prod. no.	GBP
T-connector box		
● black	**228726**	**28.00**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

M-POL S
Polehead 360°, glare reduction, DALI

DALI



Dali IP65 IK10 50 000 h L80B50 90 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 80

750 lm | 2700 K

Options	Prod. no.	GBP
● anthracite	**1007233**	**266.00**

⊕

Product	Prod. no.	GBP
Connection box		
● black	**228725**	**17.00**
IP68 connection box, 5-pin		
● black	**1006453**	**31.00**

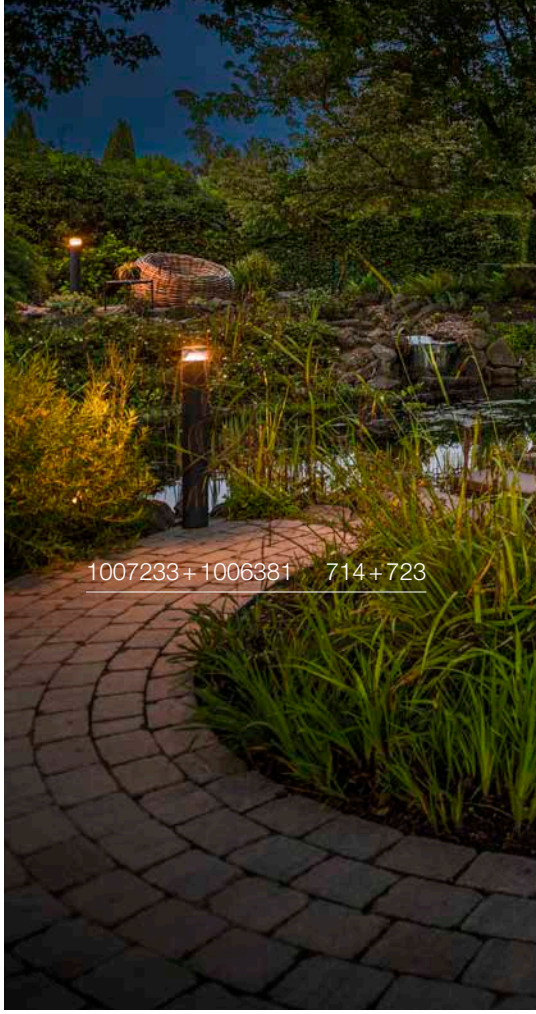

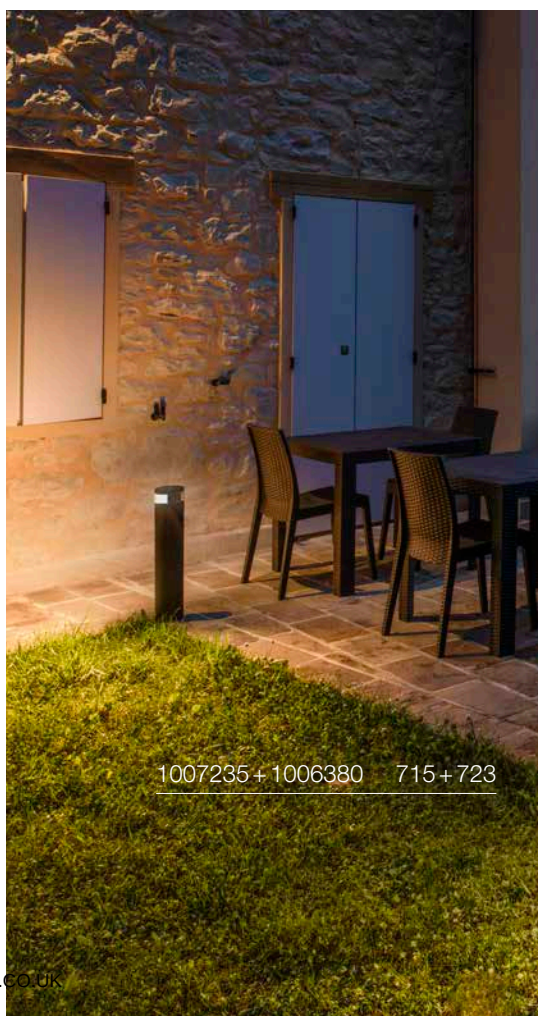

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

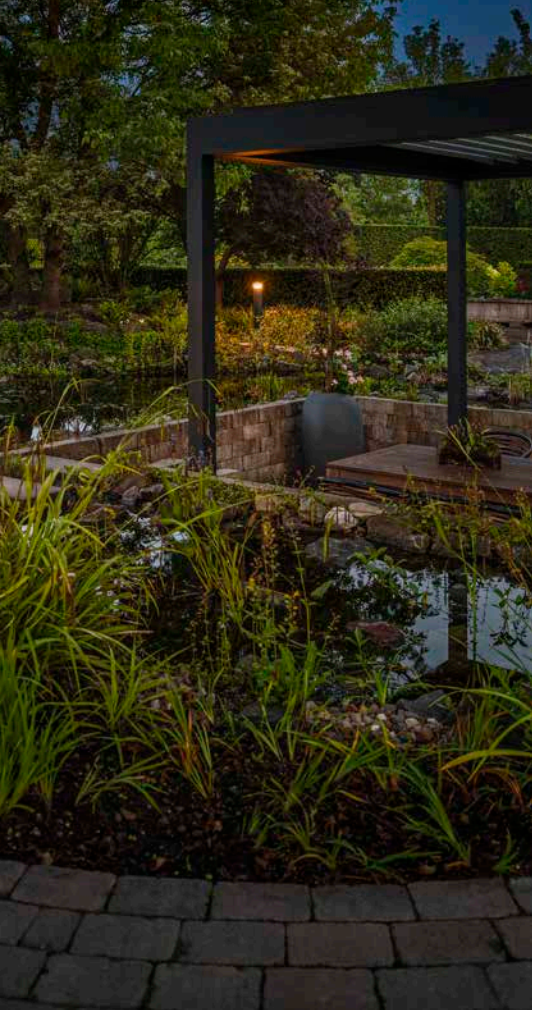

M-POL S
Polehead 180°, glare reduction



IP65 IK10 50000h L80B50 90 17

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 80

700 lm | 2700 K

Options	Prod. no.	GBP
● anthracite	**1007234**	**257.00**

Product	Prod. no.	GBP
T-connector box		
● black	**228726**	**28.00**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

M-POL S
Polehead 180°, glare reduction, DALI

DALI



Dali IP65 IK10 50000h L80B50 90 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 80

700 lm | 2700 K

Options	Prod. no.	GBP
● anthracite	**1007235**	**274.00**

Product	Prod. no.	GBP
Connection box		
● black	**228725**	**17.00**
IP68 connection box, 5-pin		
● black	**1006453**	**31.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

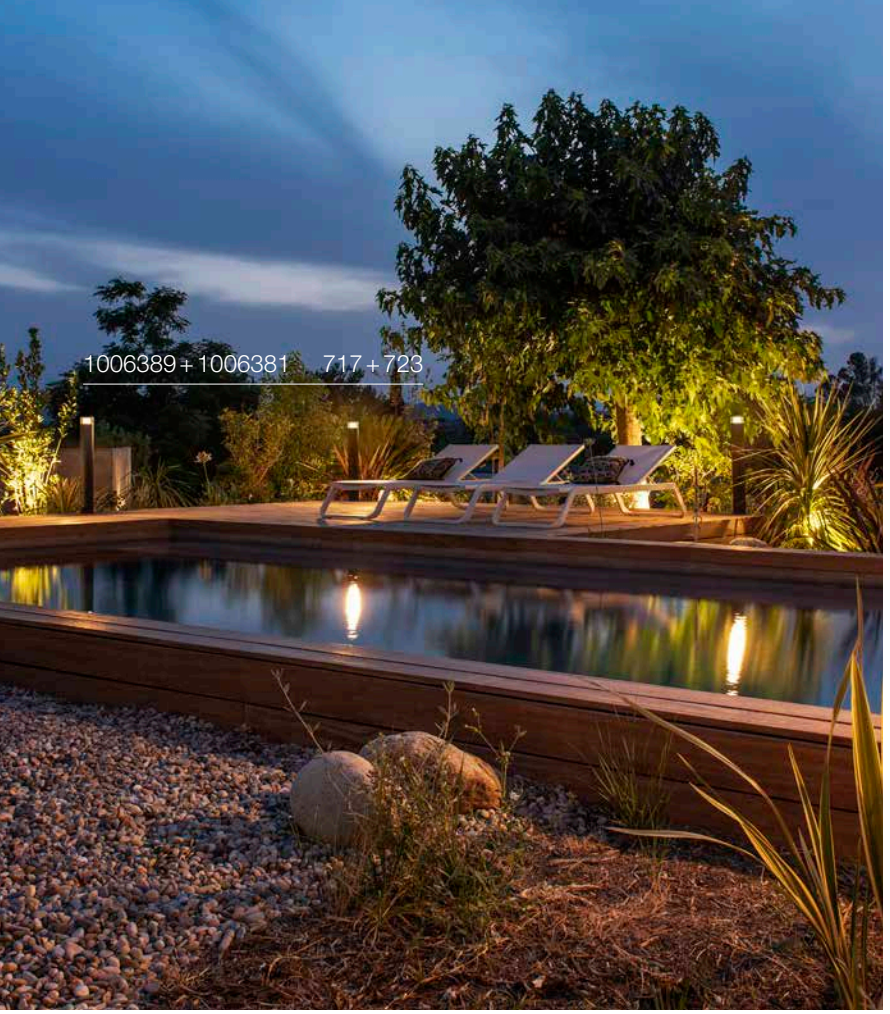

1006389 + 1006381 717 + 723

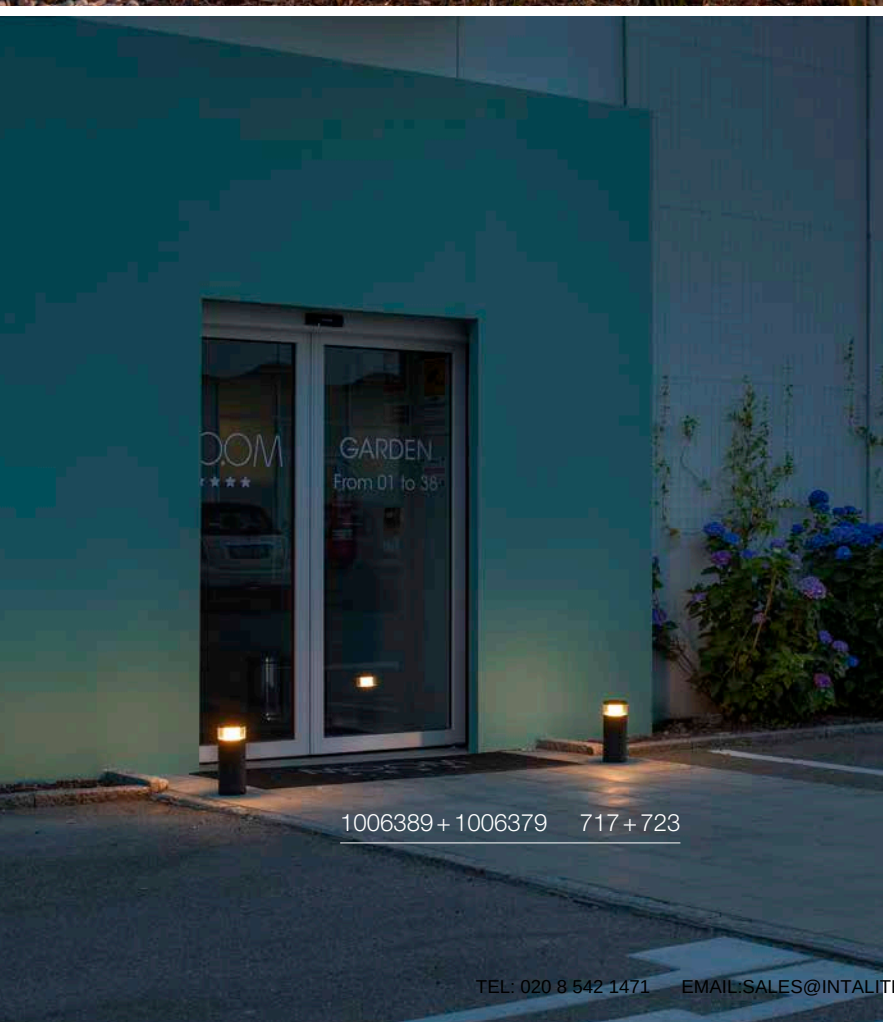

1006389 + 1006379 717 + 723

M-POL S
Polehead



IP65 IK10 50 000 h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 90

Indirect	470 lm | 2700 K	510 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1006383**	**223.00**

⊕

Product	Prod. no.	GBP
T-connector box		
● black	**228726**	**28.00**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

M-POL S
Polehead, DALI



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

INSIDE CRI 90

Indirect	890 lm | 2700 K	950 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1006389**	**314.00**

Product	Prod. no.	GBP
Connection box		
● black	**228725**	**17.00**
IP68 connection box, 5-pin		
● black	**1006453**	**31.00**

M-POL S
Polehead, Shader



220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

INSIDE CRI 90

Indirect	285 lm | 2700 K	310 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1006387**	**240.00**

Product	Prod. no.	GBP
T-connector box		
● black	**228726**	**28.00**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

M-POL S
Polehead, Shader, DALI



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

INSIDE CRI 90

Indirect	520 lm | 2700 K	550 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1006393**	**331.00**

Product	Prod. no.	GBP
Connection box		
● black	**228725**	**17.00**
IP68 connection box, 5-pin		
● black	**1006453**	**31.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

M-POL S
Polehead, Louver



IP65 IK10 50000h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 90

Indirect	145 lm | 2700 K	155 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1006385**	**271.00**

Product	Prod. no.	GBP
T-connector box		
● black	**228726**	**28.00**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

M-POL S
Polehead, Louver, DALI



Dali IP65 IK10 50000h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 90

Indirect	260 lm | 2700 K	270 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1006391**	**386.00**

Product	Prod. no.	GBP
Connection box		
● black	**228725**	**17.00**
IP68 connection box, 5-pin		
● black	**1006453**	**31.00**

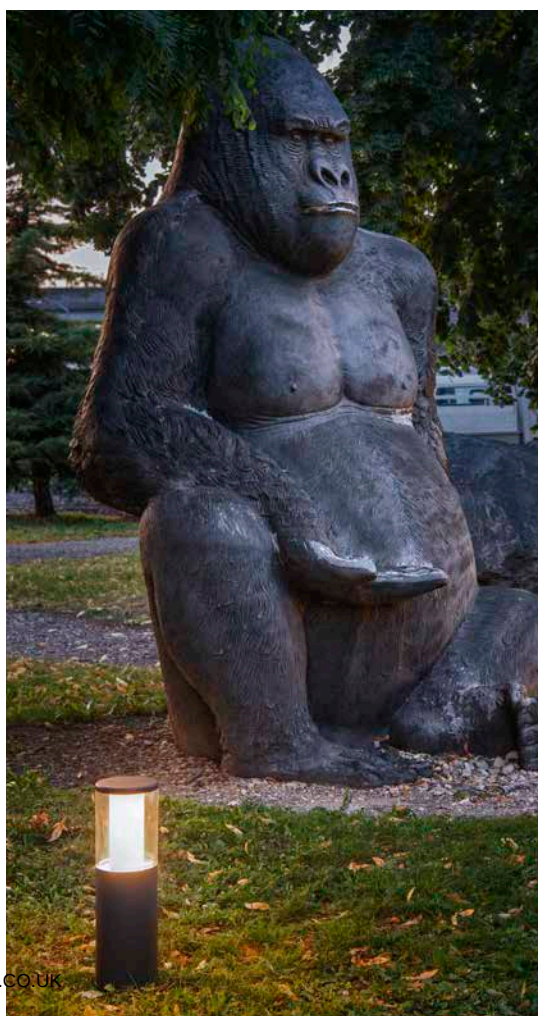

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

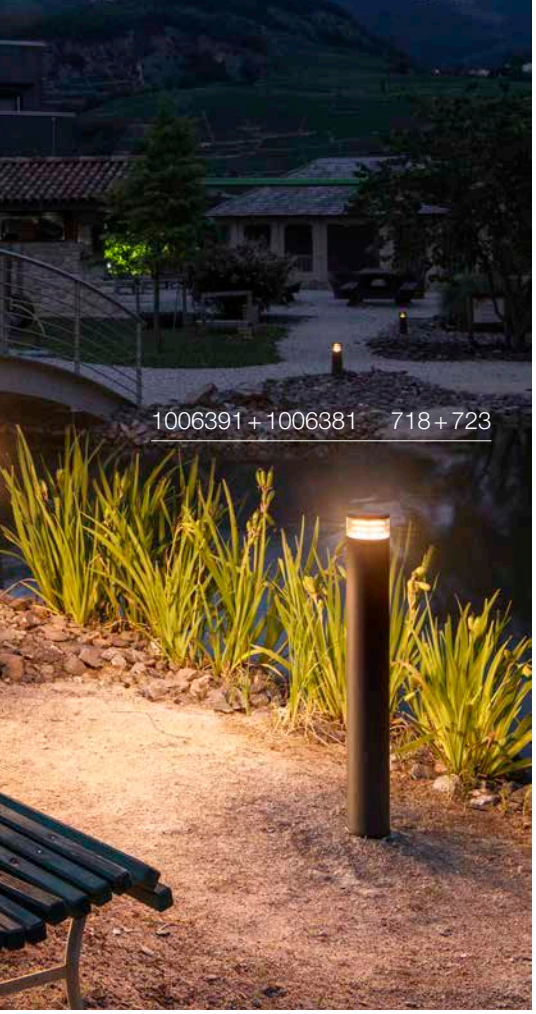

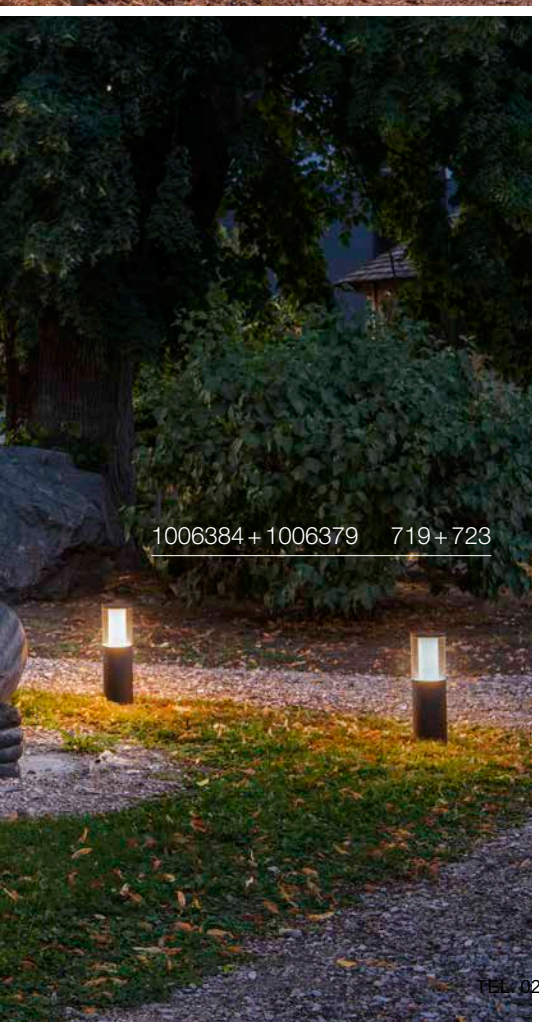

M-POL M
Polehead



IP65 IK10 50000 h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 90

Indirect	590 lm | 2700 K	660 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1006384**	**240.00**

⊕

Product	Prod. no.	GBP
T-connector box		
● black	**228726**	**28.00**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

M-POL M
Polehead, DALI



Dali IP65 IK10 50000 h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 90

Indirect	1150 lm | 2700 K	1230 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1006390**	**331.00**

⊕

Product	Prod. no.	GBP
Connection box		
● black	**228725**	**17.00**
IP68 connection box, 5-pin		
● black	**1006453**	**31.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

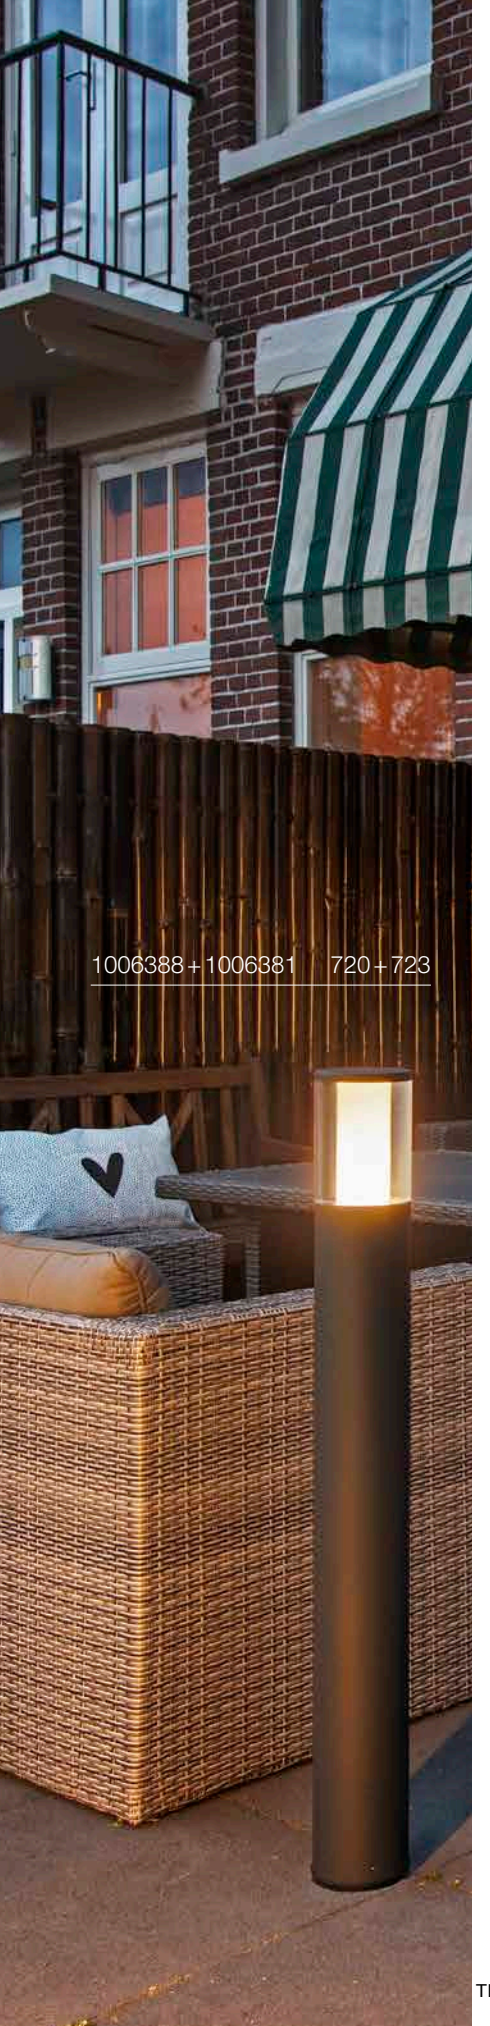

1006388 + 1006381 720 + 723

M-POL M
Polehead, Shader



IP65 IK10 50000 h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 90

Indirect	420 lm	2700 K	460 lm	3000 K

Options	Prod. no.	GBP
● anthracite	**1006388**	**257.00**

Product	Prod. no.	GBP
T-connector box		
● black	**228726**	**28.00**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

M-POL M
Polehead, Shader, DALI



Dali IP65 IK10 50000 h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 90

Indirect	820 lm	2700 K	870 lm	3000 K

Options	Prod. no.	GBP
● anthracite	**1006394**	**351.00**

Product	Prod. no.	GBP
Connection box		
● black	**228725**	**17.00**
IP68 connection box, 5-pin		
● black	**1006453**	**31.00**

M-POL M
Polehead, Louver



IP65 IK10 50 000 h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 90

Indirect	190 lm	2700 K	210 lm	3000 K

Options	Prod. no.	GBP
● anthracite	**1006386**	**377.00**

Product	Prod. no.	GBP
T-connector box		
● black	**228726**	**28.00**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

M-POL M
Polehead, Louver, DALI



Dali IP65 IK10 50 000 h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- open cable end
- Matching accessories can be found on page 722-723

LED INSIDE CRI 90

Indirect	350 lm	2700 K	370 lm	3000 K

Options	Prod. no.	GBP
● anthracite	**1006392**	**454.00**

Product	Prod. no.	GBP
Connection box		
● black	**228725**	**17.00**
IP68 connection box, 5-pin		
● black	**1006453**	**31.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

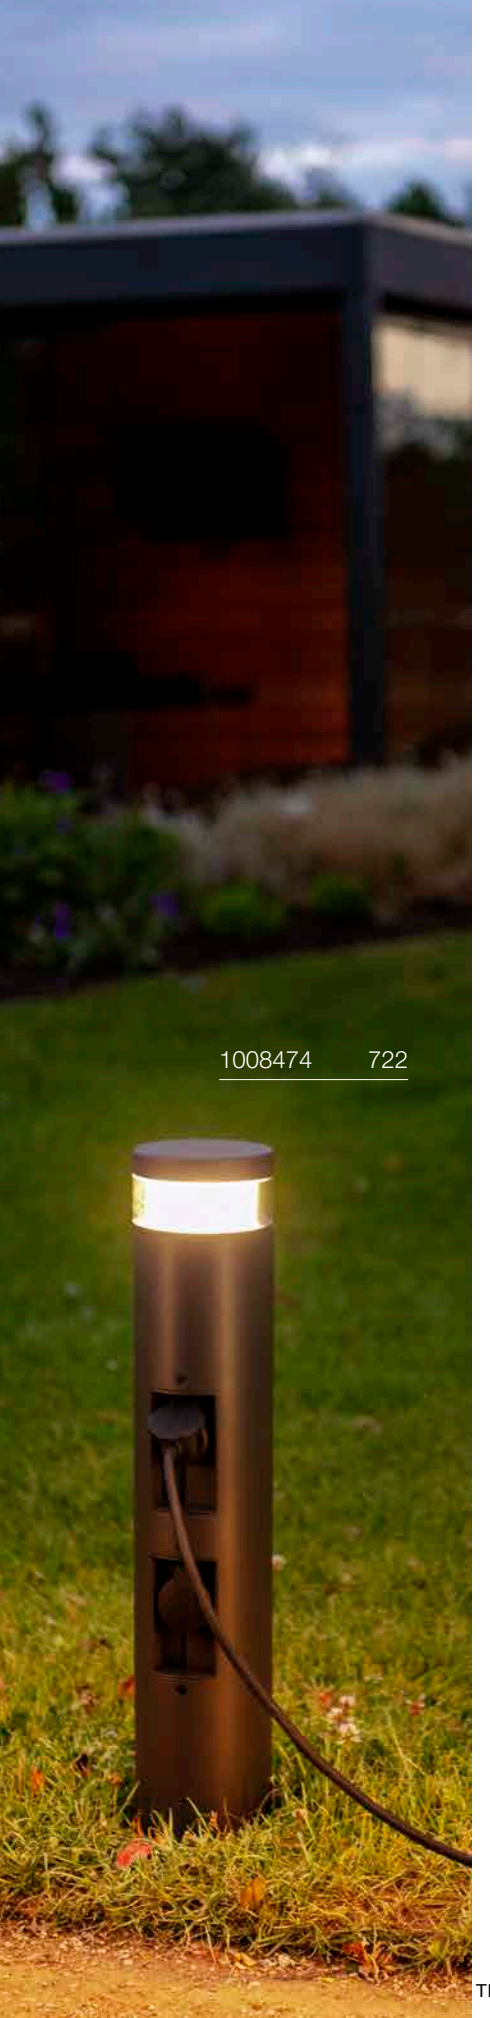

1008474 722

M-POL
Cover

Ø: 12 cm
H: 2.2 cm
Material: Aluminium

Options	Prod. no.	GBP
● anthracite	**1008475**	**21.00**

M-POL
Pole 60, Socket

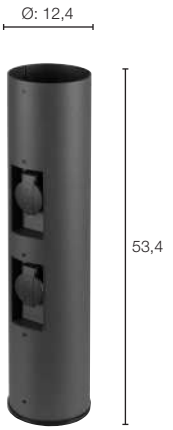

IP54 IK10

Ø: 12.4 cm
H: 53,4 cm
Material: Aluminium

Options	Prod. no.	GBP
● anthracite	**1008474**	**137.00**

⊕

Product	Prod. no.	GBP
T-connector box		
● black	**228726**	**28.00**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**
Ground anchor set		
◐ Stainless steel	**1006382**	**43.00**
Connection box, 5 poles, IP68		
● black	**1006453**	**31.00**
Cover		
● anthracite	**1008475**	**21.00**

M-POL 30
Pole

Ø: 12.4 cm
H: 23.4 cm
Material: Aluminium

• Sea-air resistant

Options	Prod. no.	GBP
● anthracite	**1006379**	**85.00**

⊕

Product	Prod. no.	GBP
Ground anchor set		
◐ Stainless steel	**1006382**	**43.00**

M-POL 60
Pole

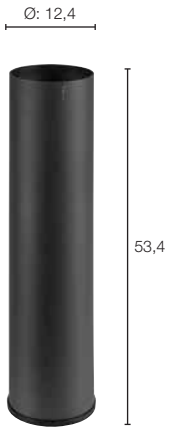

Ø: 12.4 cm
H: 53,4 cm
Material: Aluminium

• Sea-air resistant

Options	Prod. no.	GBP
● anthracite	**1006380**	**120.00**

⊕

Product	Prod. no.	GBP
Ground anchor set		
◐ Stainless steel	**1006382**	**43.00**

M-POL 90
Pole

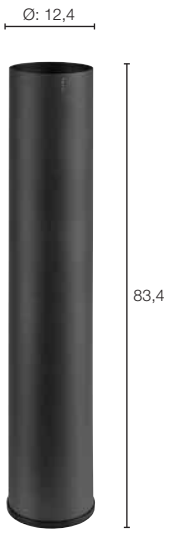

Ø: 12.4 cm
H: 83.4 cm
Material: Aluminium

• Sea-air resistant

Options	Prod. no.	GBP
● anthracite	**1006381**	**145.00**

⊕

Product	Prod. no.	GBP
Ground anchor set		
◐ Stainless steel	**1006382**	**43.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DESIGN YOUR M-POL SYSTEM

The right bollard lights in a few steps – made possible with the M-POL system. It combines three sizes and eight lamp heads with five light properties and two colour temperatures. Whether in high or flat form, with shaders for less light on one side, homogeneous and diffuse radiance or glare-free thanks to integrated louvres. Whether 2700 or 3000 Kelvin, controllable as an On/Off version or DALI. Configure your chosen M-POL bollard lights and showcase every outdoor ambience in its best light.

CHOOSE YOUR PREFERRED ...

1. bollard (30, 60, 90)
2. Lamp head (On/Off, DALI)
3. Lamp head size (high, flat)
4. Light property (Clear, Shader, Louver)
5. Colour temperature (2700 K, 3000 K)

DONE!

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LAMP HEADS

M-POL S
Ø: 12,3 cm, H: 15,9 cm

Clear | Shader | Louver | 180° direction | 360° direction

M-POL M
Ø: 12,3 cm, H: 25,9 cm

Clear | Shader | Louver

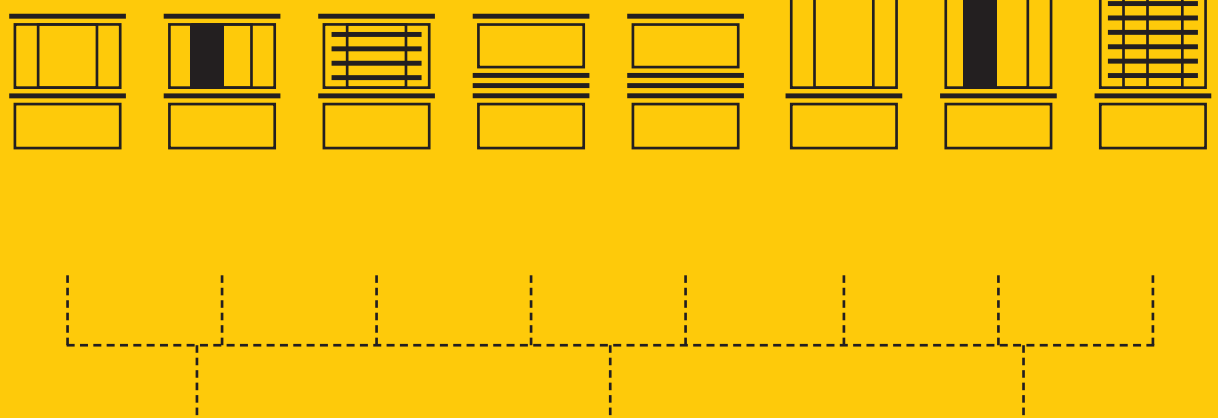

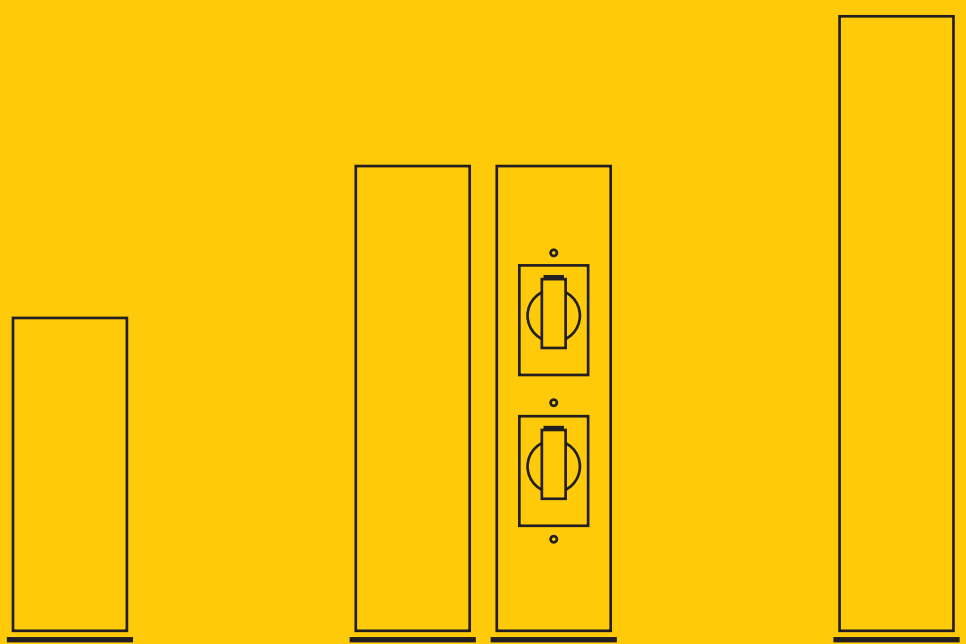

M-POL 30
Ø: 12,4 cm, H: 23,4 cm

M-POL 60
Ø: 12,4 cm, H: 53,4 cm

M-POL 90
Ø: 12,4 cm, H: 83,4 cm

BOLLARD

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CONCRETE 35
Pole, PHASE

NEW



IP65 IK06 50 000 h L80B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: concrete

- Bayonet lock enables easy assembly
- IP connection box

LED INSIDE CRI 80

Down	600 lm | 2700 K

Options	Prod. no.	GBP
grey	1008838	357.00

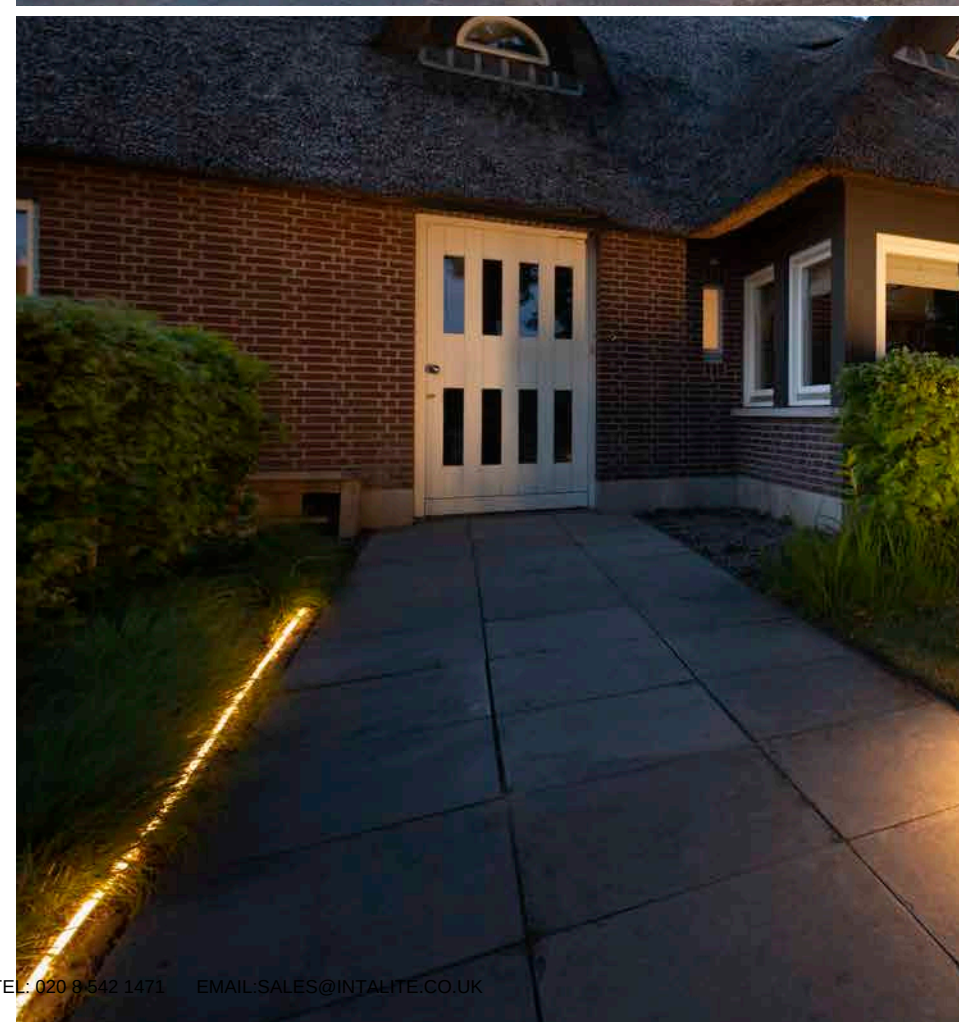

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CONCRETE 55
Pole, PHASE

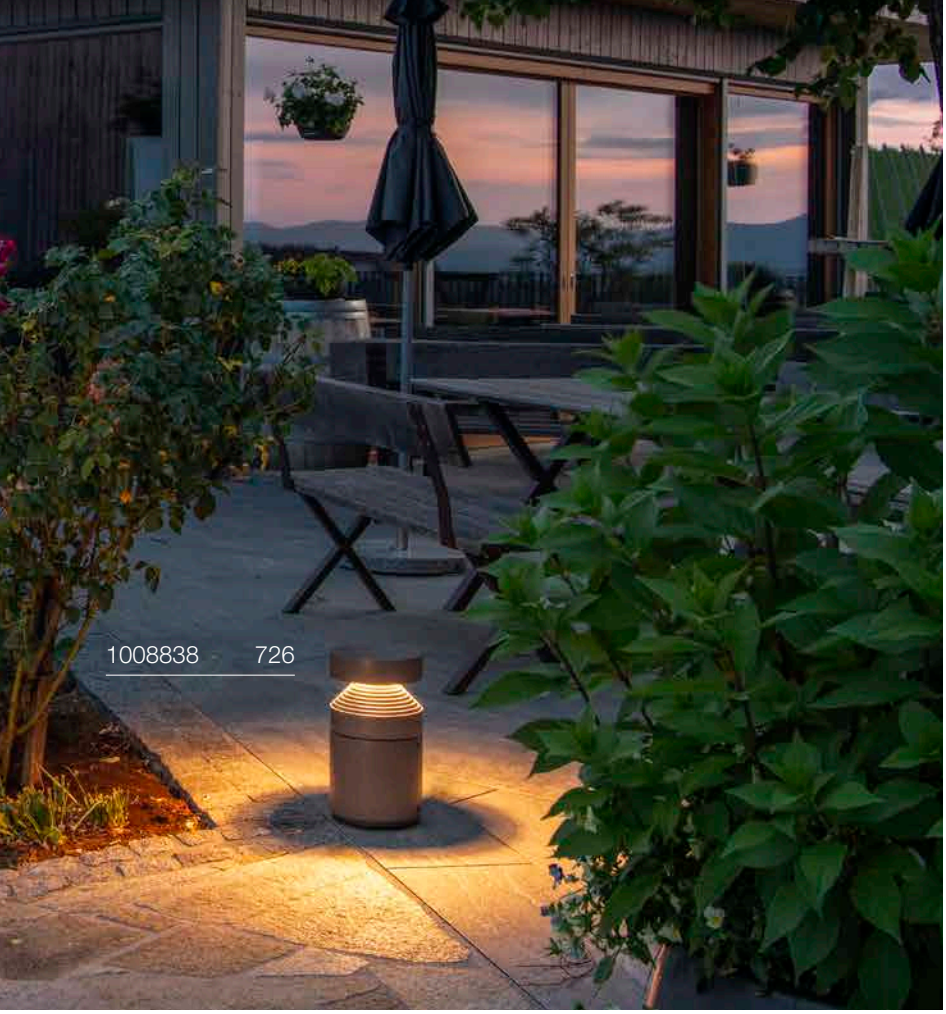

NEW



220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: concrete

- Bayonet lock enables easy assembly
- IP connection box

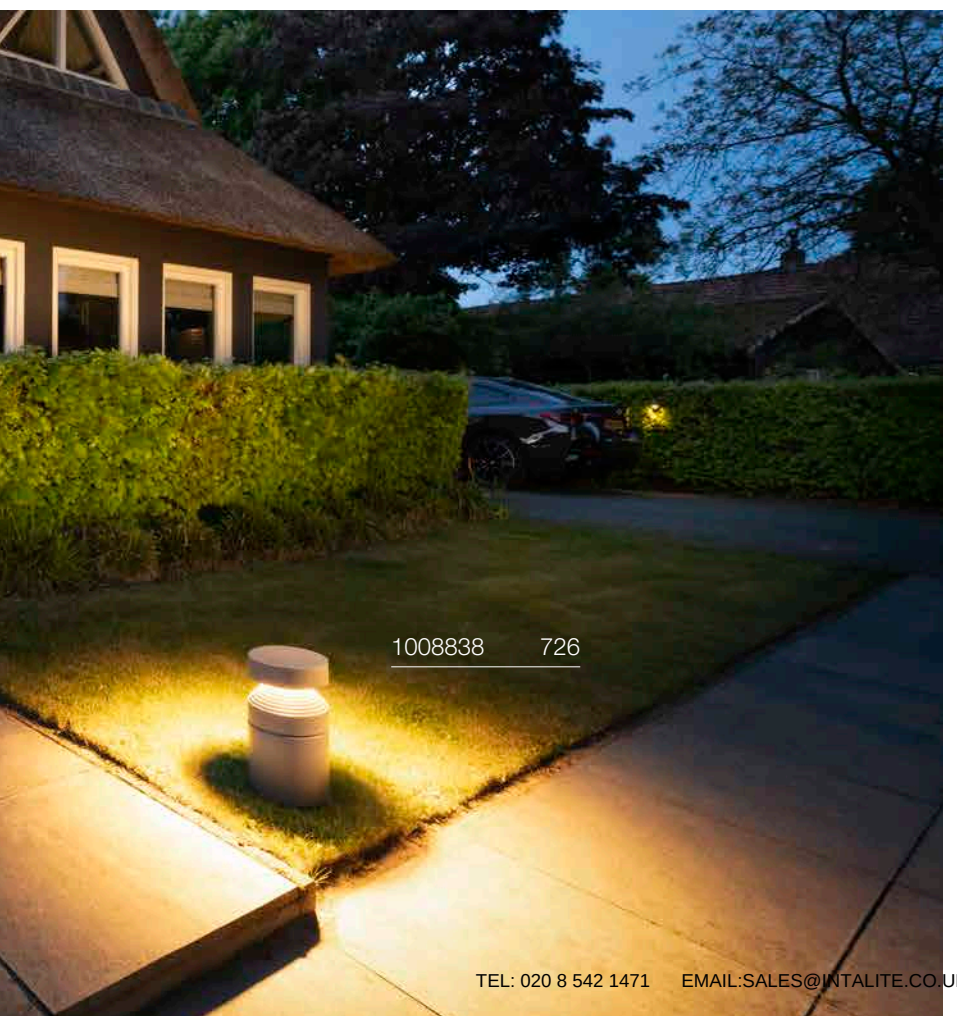

LED INSIDE CRI 80

Down 600 lm | 2700 K

Options	Prod. no.	GBP
grey	1008839	382.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006408 729

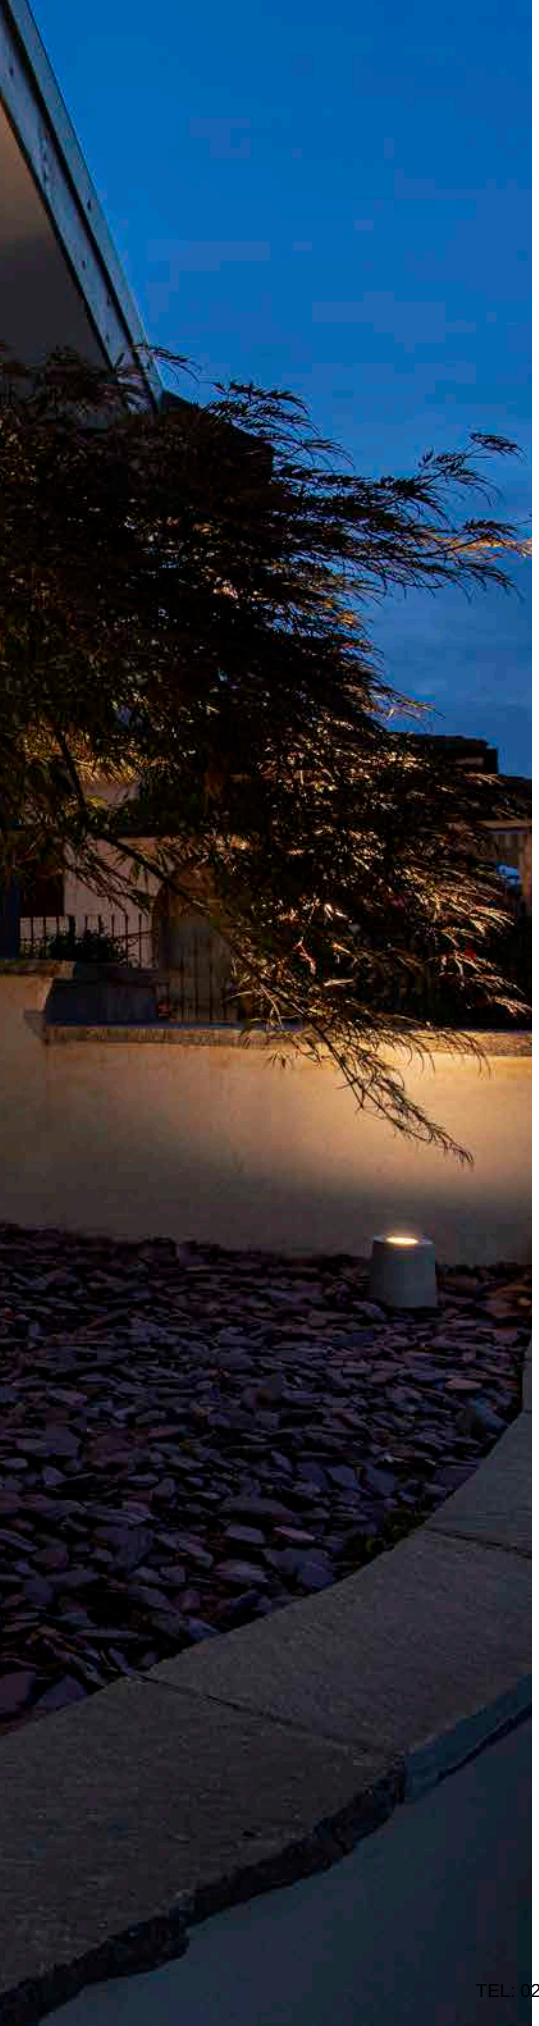

CONCRETO
FL, round, QPAR 51



IP65 IK05

220-240 V ~50/60 Hz
Material: Concrete/Aluminium

- IP44 safety plug

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Options	Prod. no.	GBP
grey/black	**1007931**	**105.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000h

Prod. no.: 1007230 5.00 GBP

CONCRETO
FL, square, QPAR51



IP65 IK05

220-240 V ~50/60 Hz
Material: Concrete/Aluminium

- IP44 safety plug

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Options	Prod. no.	GBP
grey/black	**1007932**	**105.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000h

Prod. no.: 1007230 5.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008385 731

RASTERLYS 70
Pole, PHASE



220-240 V ~0/50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium

- The light colour must be set prior to installation
- Suitable for DC operation
- open cable end

2x350 lm | 2700 K	2x375 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1008385**	**257.00**

Product	Prod. no.	GBP
T-connector box		
● black	**228726**	**28.00**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FLATT II 36
Pole, PHASE

NEW



C,L IP65 IK03 50 000 h L80B20 200

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- open cable end

LED INSIDE CRI 80

650 lm | 2700 K

Options	Prod. no.	GBP
● black	1010104	169.00
● anthracite/brown	1010103	169.00

⊕

Product	Prod. no.	GBP
T-connector box		
● black	228726	28.00
Connection box IP68, 3-pole		
● black	228730	16.00

FLATT II 62
Pole, PHASE

NEW



C,L IP65 IK03 50 000 h L80B20 200

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- open cable end

LED INSIDE CRI 80

650 lm | 2700 K

Options	Prod. no.	GBP
● black	1010106	186.00
● anthracite/brown	1010105	186.00

⊕

Product	Prod. no.	GBP
T-connector box		
● black	228726	28.00
Connection box IP68, 3-pole		
● black	228730	16.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

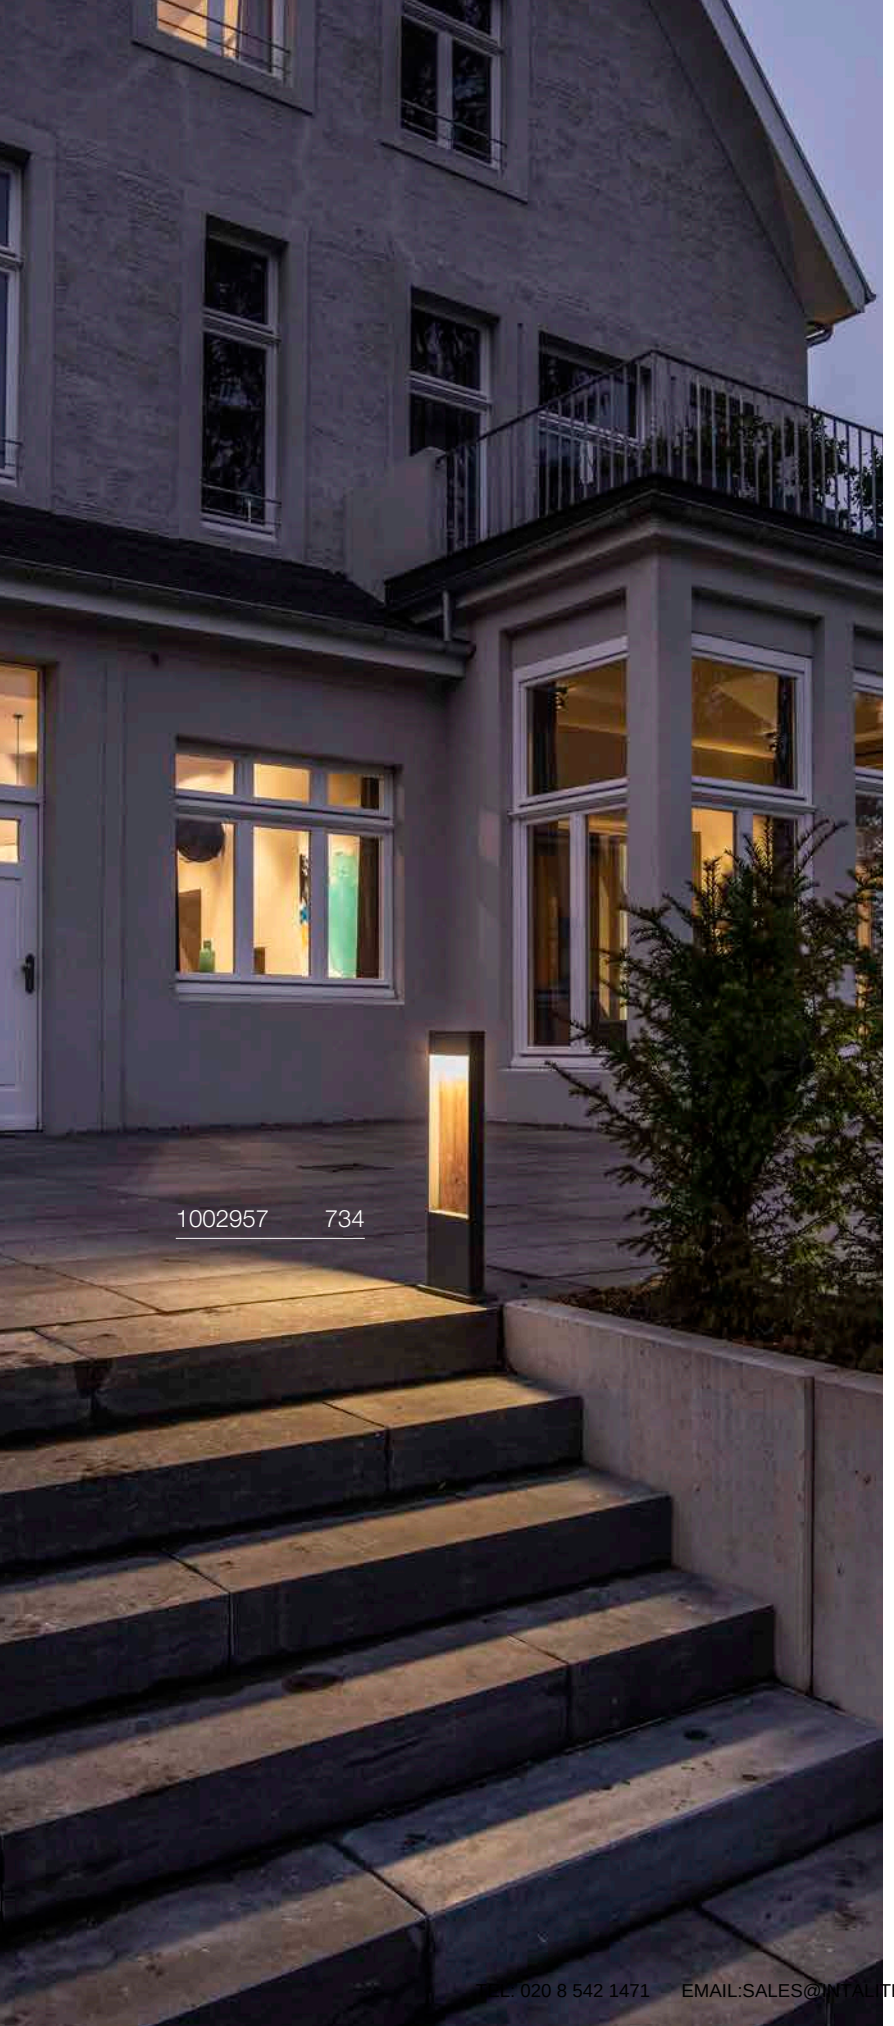

FLATT 65
Pole



IP65 IK03 30000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

LED INSIDE CRI 80

400 lm | 3000 K | 4000 K

Options	Prod. no.	GBP
anthracite	**1002956**	**220.00**
brown/anthracite	**1002957**	**220.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**16.00**

FLATT 100
Pole



IP65 IK03 30000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

LED INSIDE CRI 80

400 lm | 3000 K | 4000 K

Options	Prod. no.	GBP
anthracite	**1002958**	**267.00**
brown/anthracite	**1002959**	**267.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

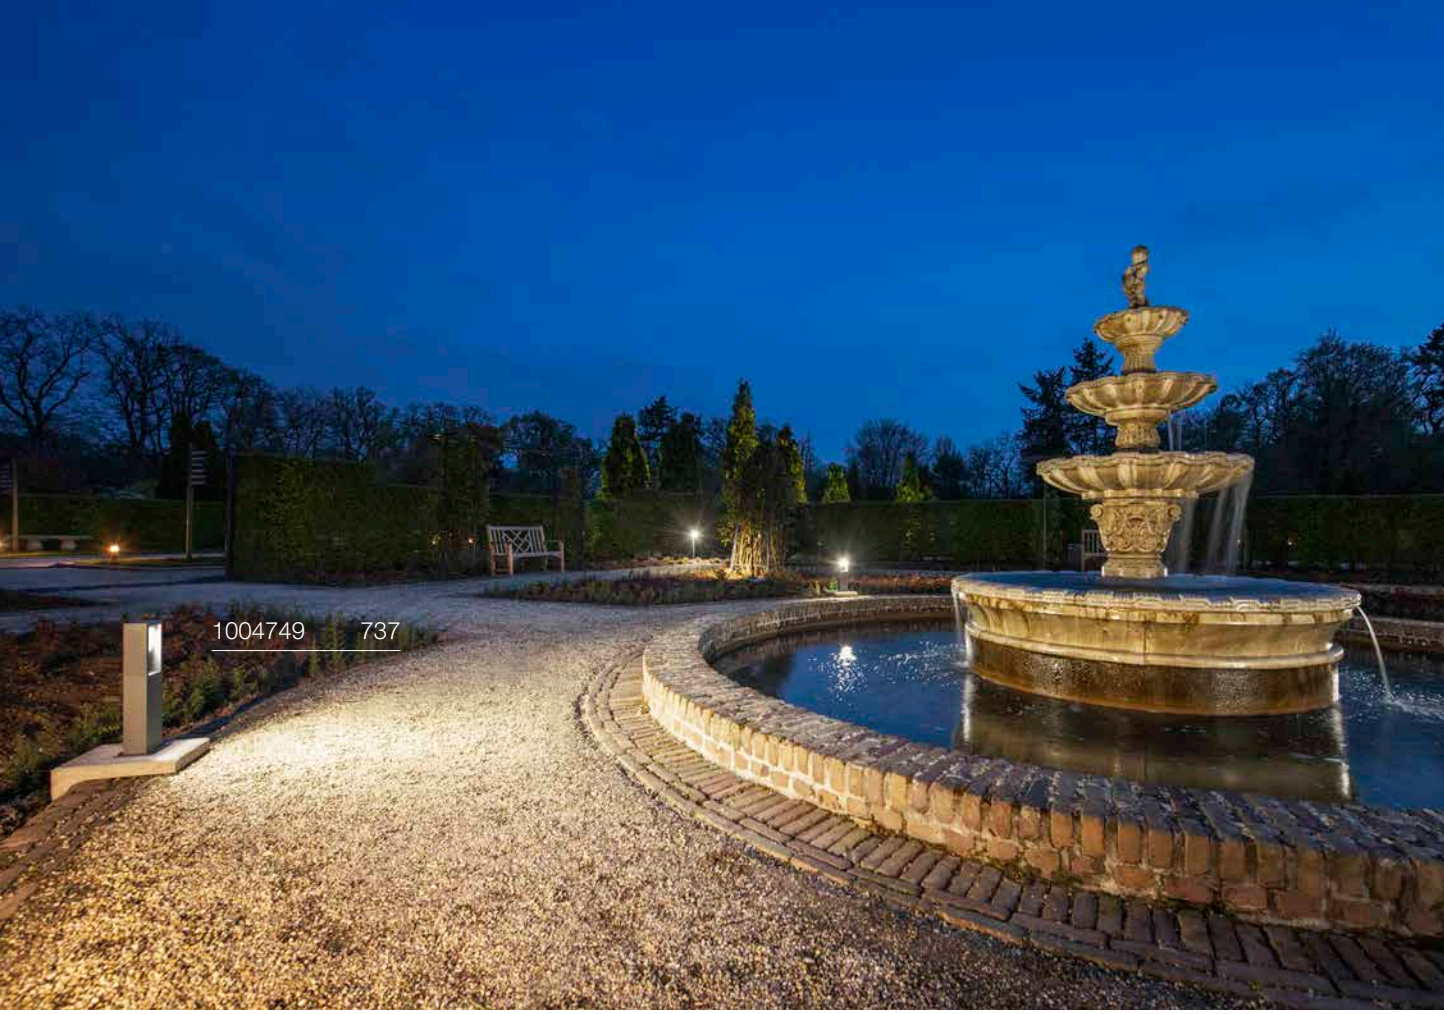
1004749 737

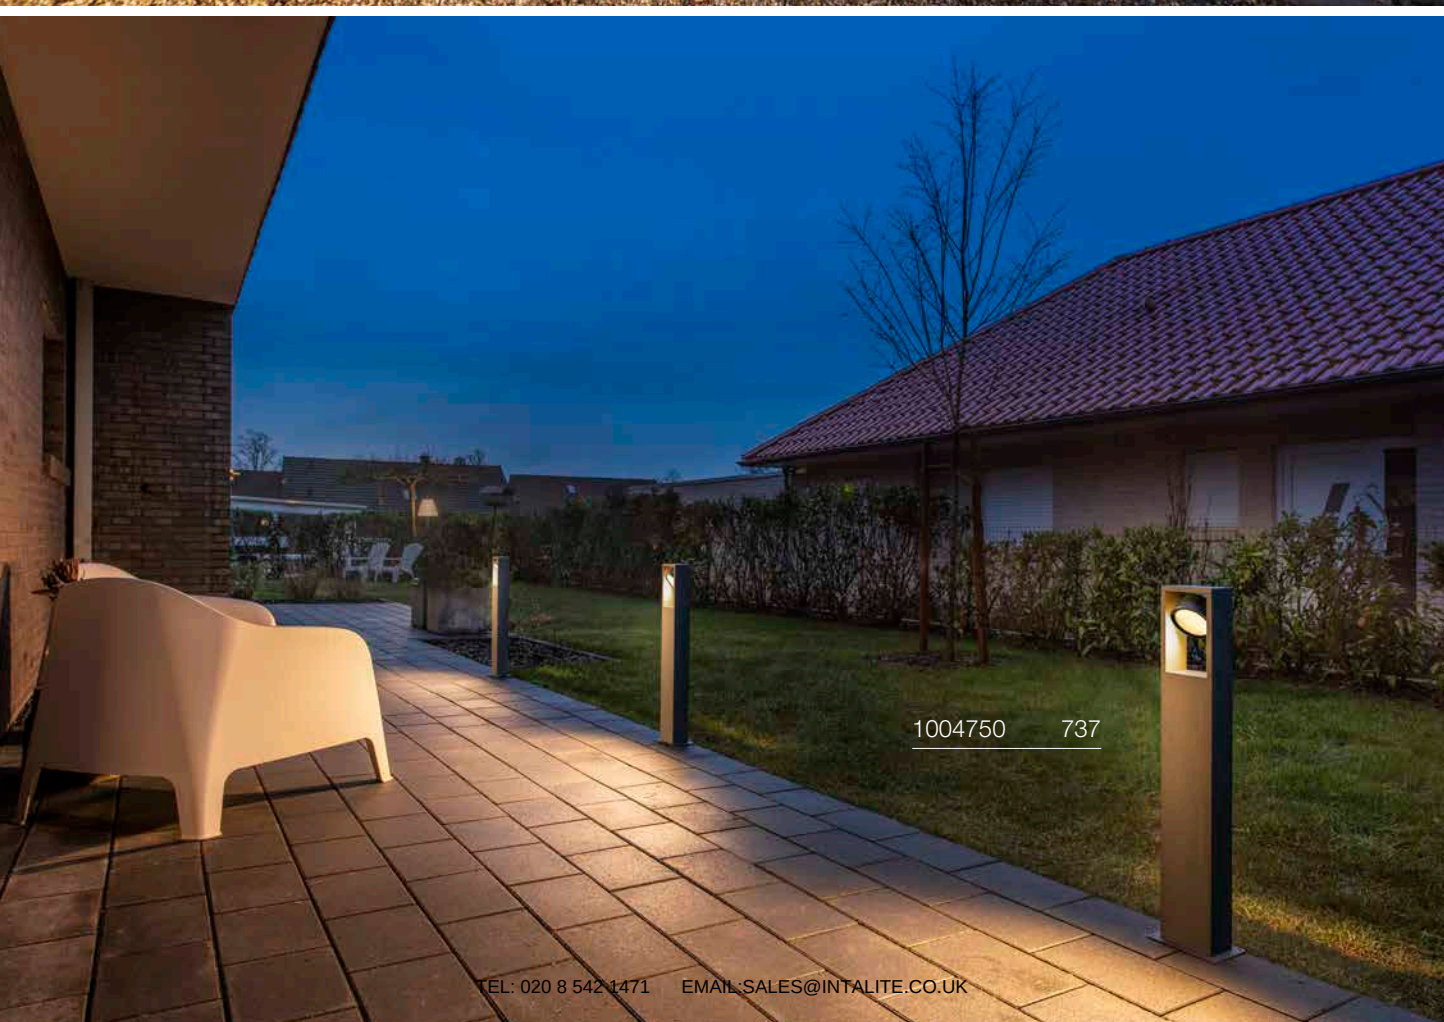
1004750 737

ESKINA FRAME 45
Pole, single



IP65 IK06 95° 320° 30 000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

INSIDE CRI 80

Spot	1100 lm | 3000 K	1200 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1004749**	**241.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

ESKINA FRAME 78
Pole, single



IP65 IK06 95° 320° 30 000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

INSIDE CRI 80

Spot	1100 lm | 3000 K	1200 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1004750**	**263.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

ESKINA FRAME 78
Pole, double



IP65 IK06 95° 320° 30 000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

INSIDE CRI 80

Spot 1	1100 lm | 3000 K	1200 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1004751**	**300.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1005439 739

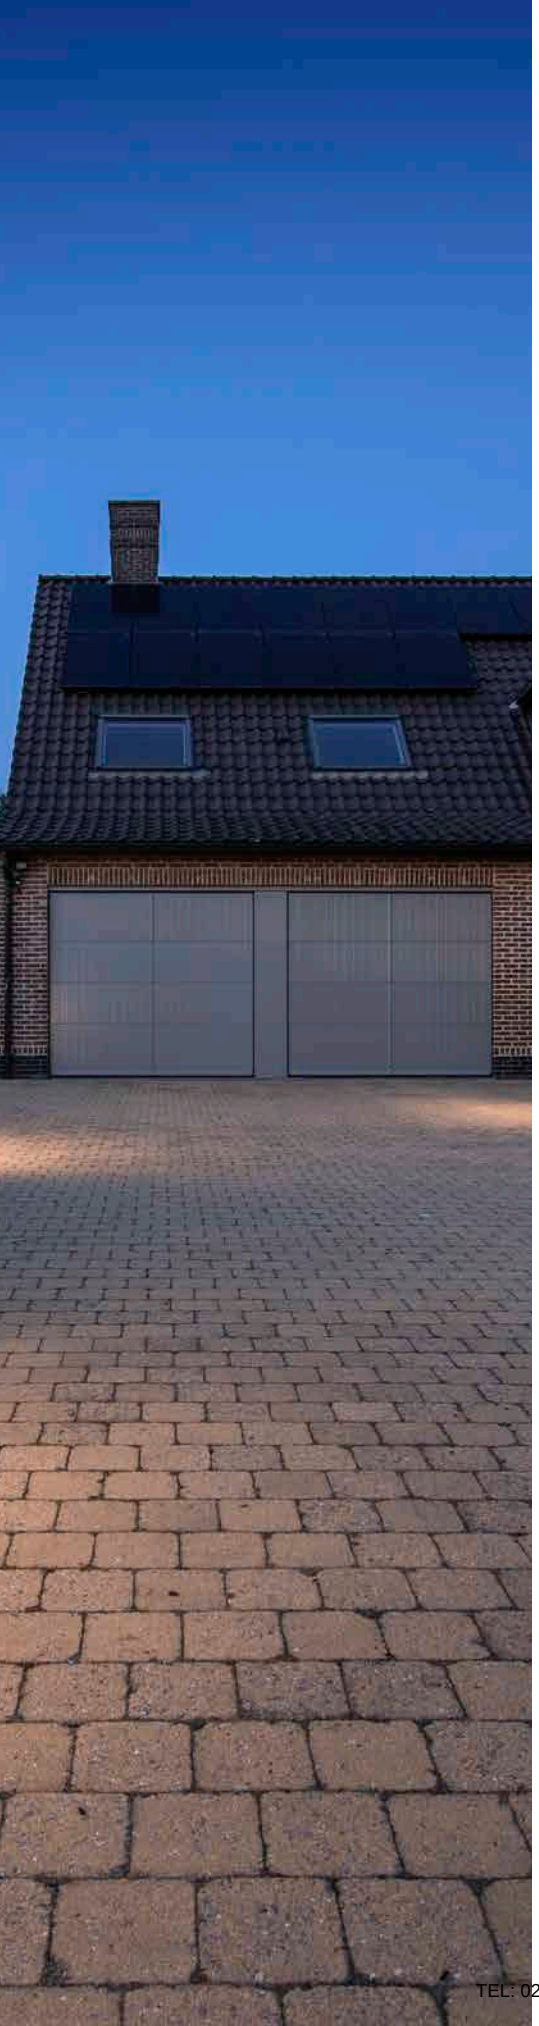

ESKINA FRAME 125
Pole, double



220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

Options	Prod. no.	GBP
anthracite	**1005439**	**343.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**16.00**

ESKINA FRAME 175
Pole, double



220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

Options	Prod. no.	GBP
anthracite	**1005440**	**407.00**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

232115 741

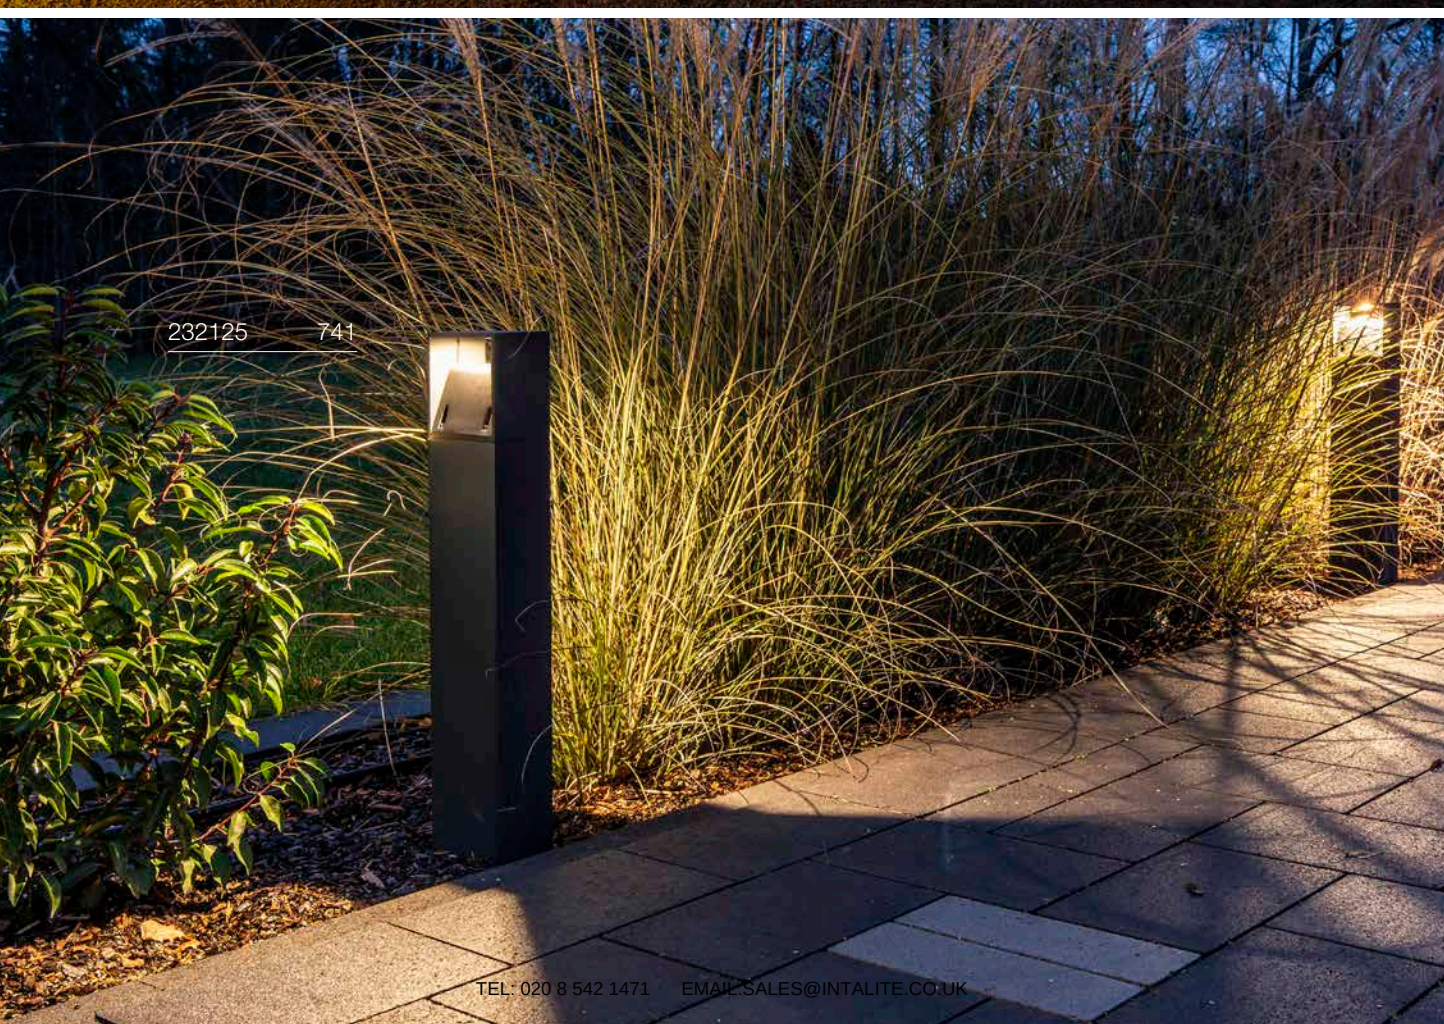
232125 741

LOGS 40
Pole



IP65 IK04 40000h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium

- open cable end

INSIDE CRI 80

570 lm|3000 K

Options	Prod. no.	GBP
● anthracite	**232115**	**223.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**
Screw set		
◐ Stainless steel	**228754**	**4.00**
Ground spike		
● grey	**231230**	**40.00**
Concrete anchor		
● grey	**232119**	**53.00**

LOGS 70
Pole



IP65 IK04 40000h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium

- open cable end

INSIDE CRI 80

570 lm|3000 K

Options	Prod. no.	GBP
● anthracite	**232125**	**257.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**
Screw set		
◐ Stainless steel	**228754**	**4.00**
Ground spike		
● grey	**231230**	**40.00**
Concrete anchor		
● grey	**232119**	**53.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006180 743

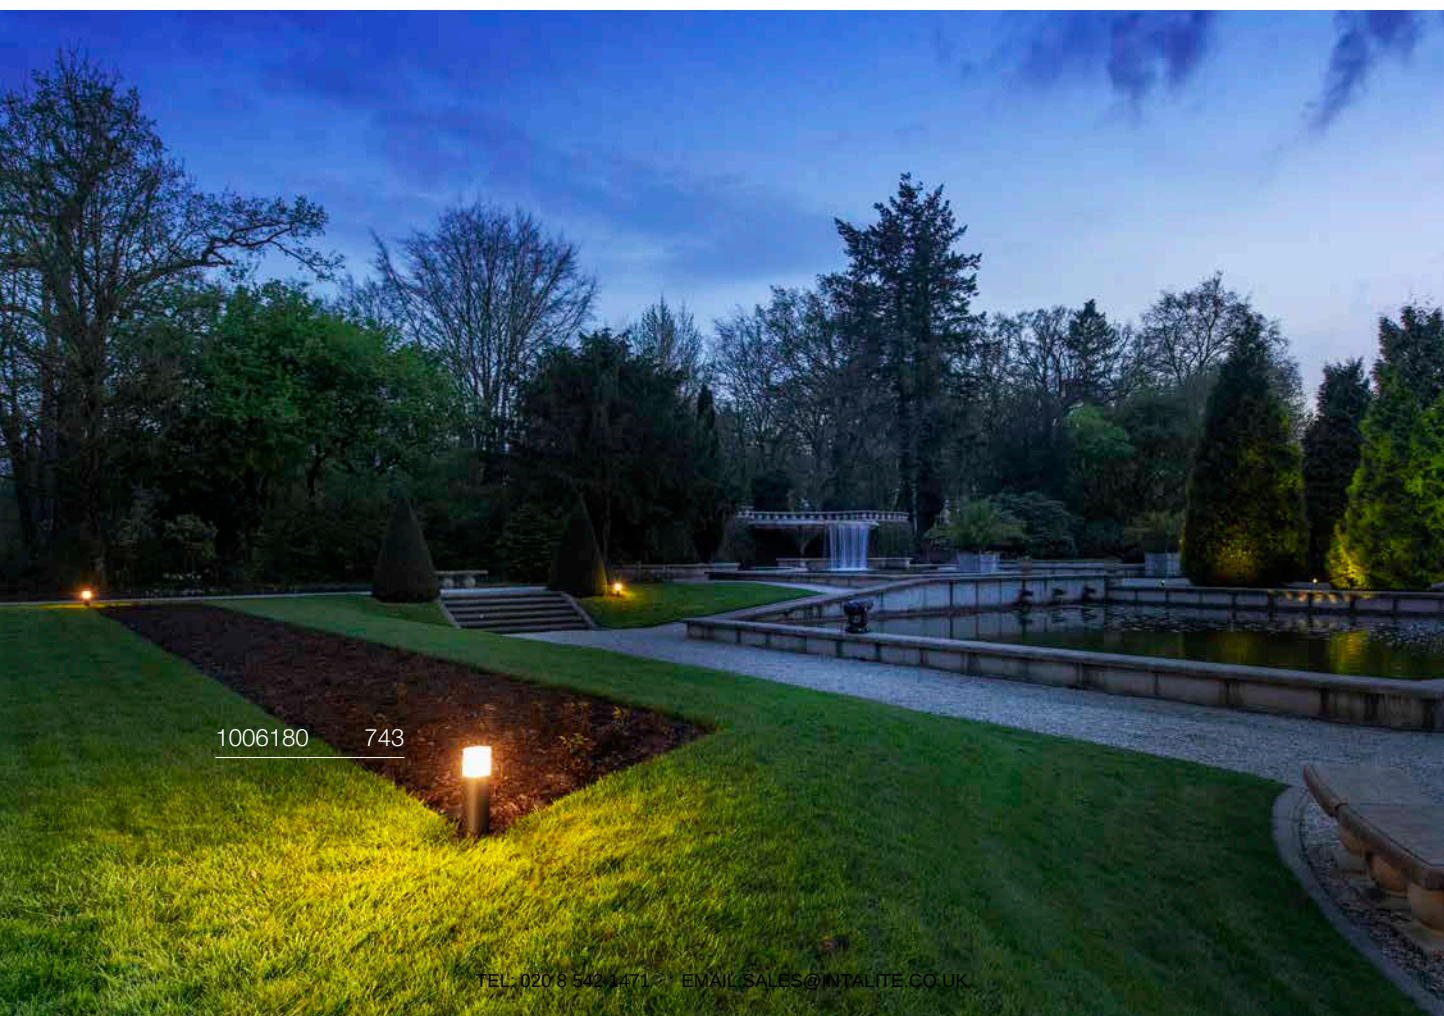
1006180 743

GRAFIT 30
Pole, round, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

• open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Options	Prod. no.	GBP
● anthracite	**1006180**	**69.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

GRAFIT 60
Pole, round, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

• open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Options	Prod. no.	GBP
● anthracite	**1006181**	**86.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

GRAFIT 90
Pole, round, E27

IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

• open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Options	Prod. no.	GBP
● anthracite	**1006182**	**113.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

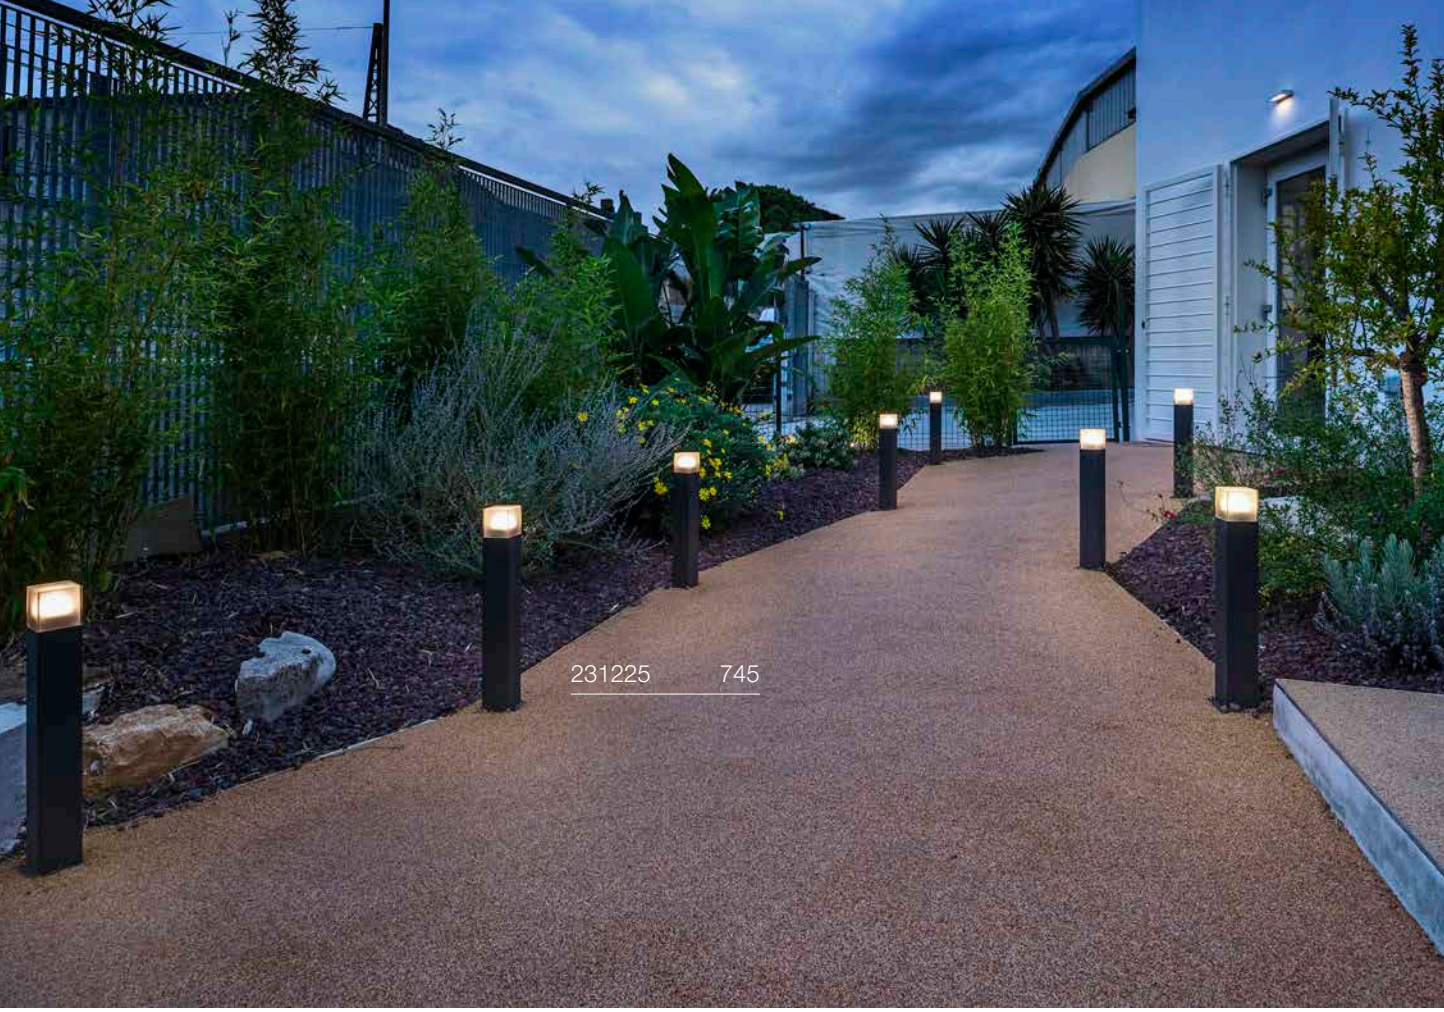
231225 745

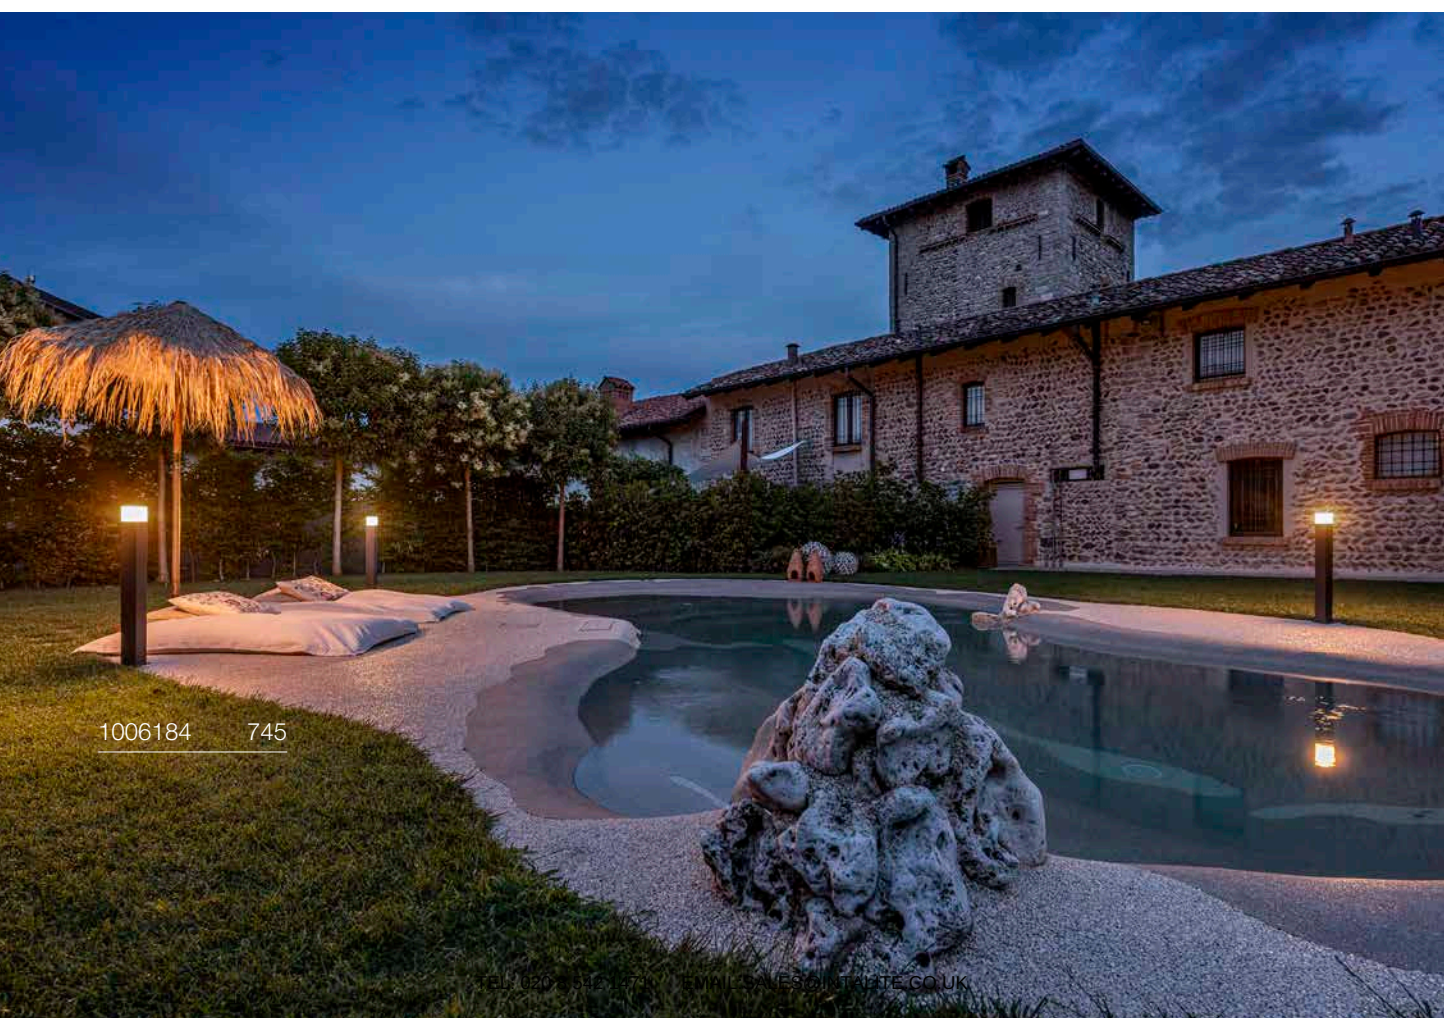
1006184 745

GRAFIT 30
Pole, E27



IP44

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

• open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Options	Prod. no.	GBP
● anthracite	231215	68.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000h

Prod. no.: 1005303 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	228730	16.00
Screw set		
◐ Stainless steel	228754	4.00
Ground spike		
● grey	231230	40.00

GRAFIT 60
Pole, E27



IP44

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

• open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Options	Prod. no.	GBP
● anthracite	231225	85.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	228730	16.00
Screw set		
◐ Stainless steel	228754	4.00
Ground spike		
● grey	231230	40.00

GRAFIT 90
Pole, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

• open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Options	Prod. no.	GBP
● anthracite	1006184	113.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	228730	16.00
Ground spike		
● grey	231230	40.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1005442 747

QUADRULO
FL



IP55
30000 h
L70B50

100-277 V ~50/60 Hz | 480 mA
Total wattage: 7 W
Material: Aluminium/Acrylic

- IP connection box

LED INSIDE
CRI 80

340 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1005442**	**141.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

RUSTY® SLOT 50
Pole



IP55 35000h L70B50

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: FeCSi Steel/Polycarbonate (PC)

• open cable end

LED INSIDE CRI 80

30 lm|3000 K

Options	Prod. no.	GBP
rust	233447	266.00

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	231230	40.00

RUSTY® SLOT 80
Pole



IP55 35000h L70B50

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: FeCSi Steel/Polycarbonate (PC)

• open cable end

LED INSIDE CRI 80

30 lm|3000 K

Options	Prod. no.	GBP
rust	233457	331.00

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	231230	40.00

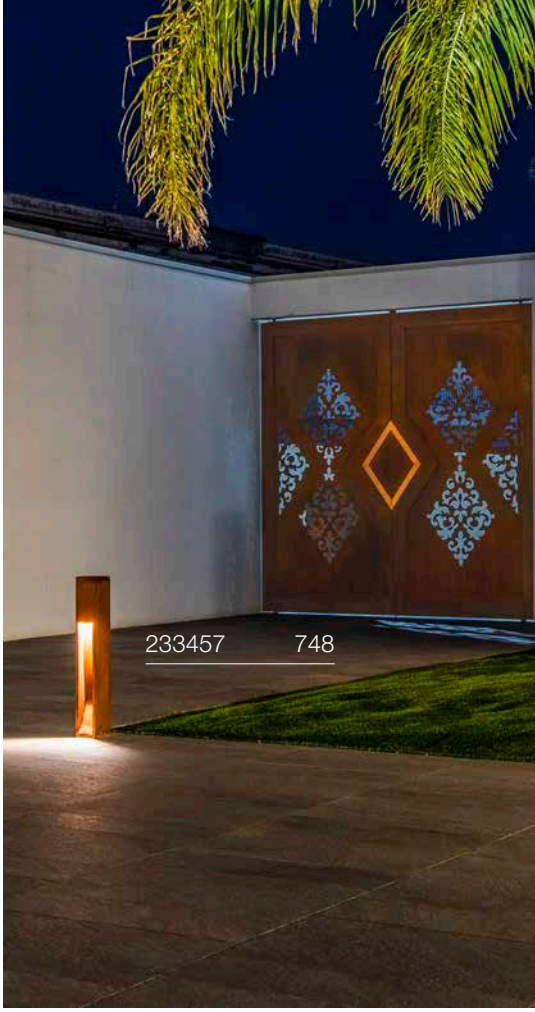

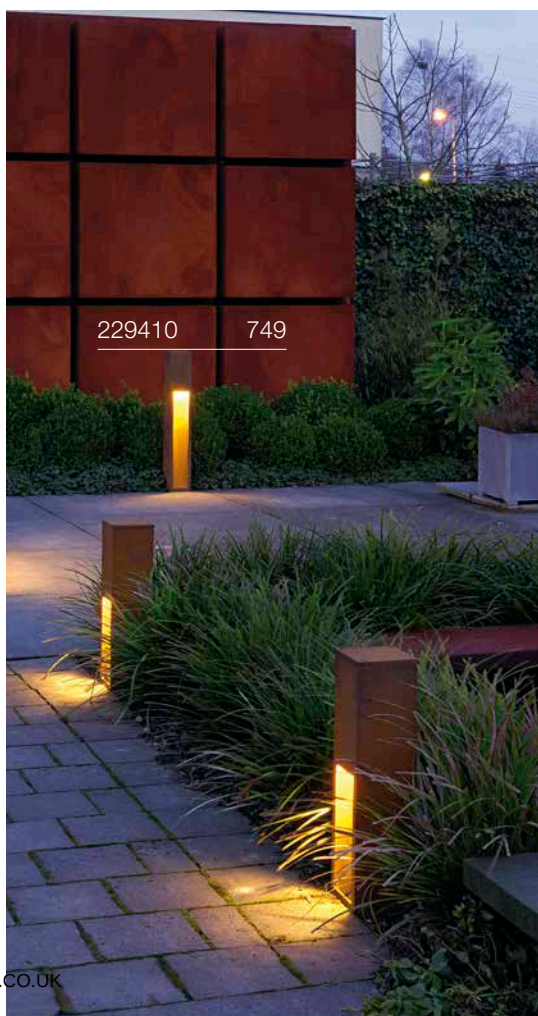

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

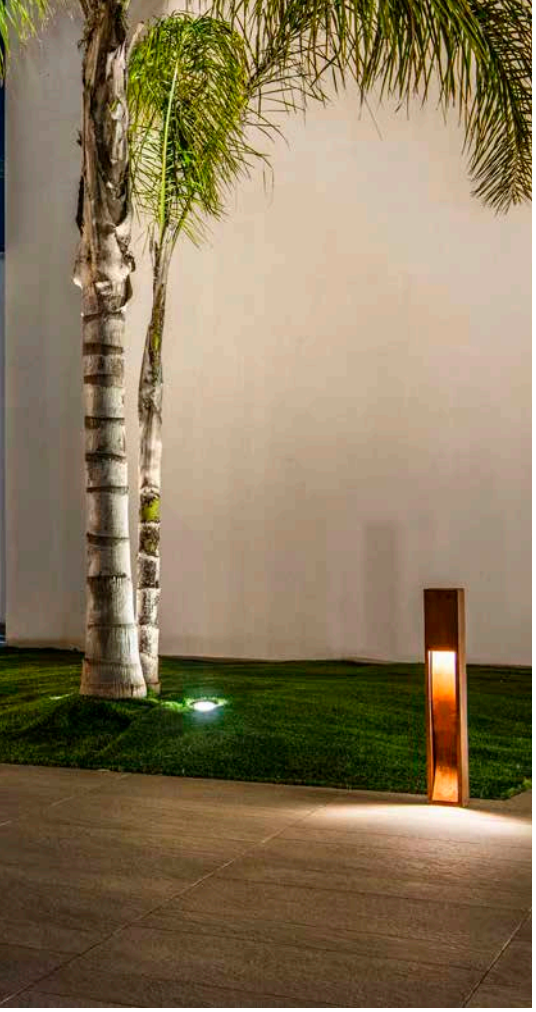

RUSTY® SLOT 50
Pole, E27



IP44

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- open cable end

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 4.8 cm	L: 13.9 cm

Options	Prod. no.	GBP
rust	**229410**	**246.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**16.00**
Ground spike		
grey	**231230**	**40.00**

RUSTY® SLOT 80
Pole, E27



IP44

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- open cable end

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 4.8 cm	L: 13.9 cm

Options	Prod. no.	GBP
rust	**229411**	**309.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**16.00**
Ground spike		
grey	**231230**	**40.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

RUSTY® PATHLIGHT
Pole, TCR-TSE



220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

• open cable end

SOCKET INSIDE 9 W

Base: 1xG53	max. Ø: 7.5 cm	L: 2.7 cm

Options	Prod. no.	GBP
● rust	**230090**	**266.00**

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G
7 kW/1000 h

Prod. no.: **1005272** **10.00 GBP**

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**
Ground spike		
● grey	**229422**	**40.00**

TEL: 020 8 542 1471 EMAIL: SALES@INTALITE.CO.UK

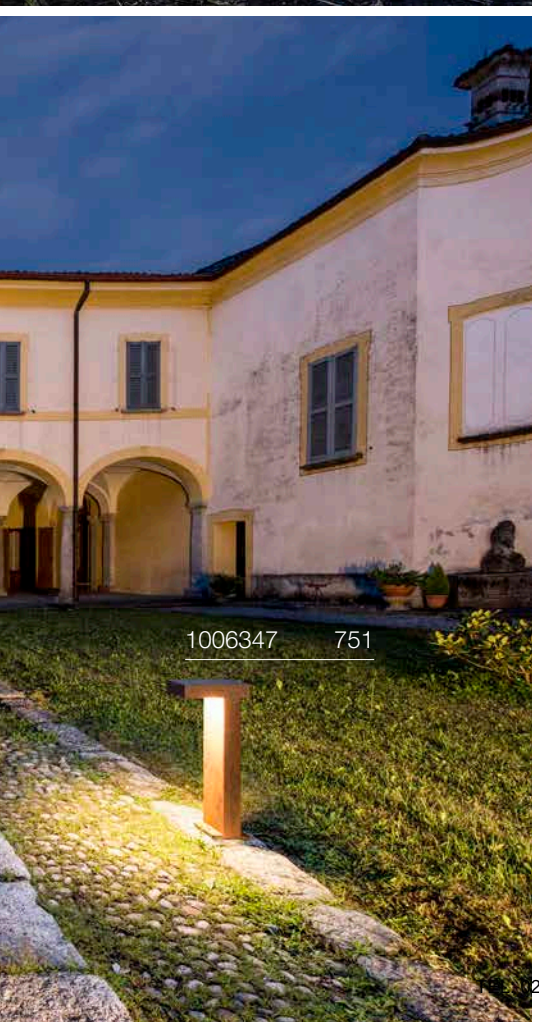

RUSTY® PATHLIGHT 40
Pole



IP55 IK06 90° 25000h L70B50 20

220-240 V ~50/60 Hz
Total wattage: 8.8 W
Material: Steel/Acrylic

- open cable end

LED INSIDE CRI 80

470 lm|3000 K

Options	Prod. no.	GBP
rust	1006346	275.00

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	229422	40.00

RUSTY® PATHLIGHT 70
Pole



IP55 IK06 90° 25000h L70B50 20

220-240 V ~50/60 Hz
Total wattage: 8.8 W
Material: Steel/Acrylic

- open cable end

LED INSIDE CRI 80

470 lm|3000 K

Options	Prod. no.	GBP
rust	1006347	360.00

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	229422	40.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

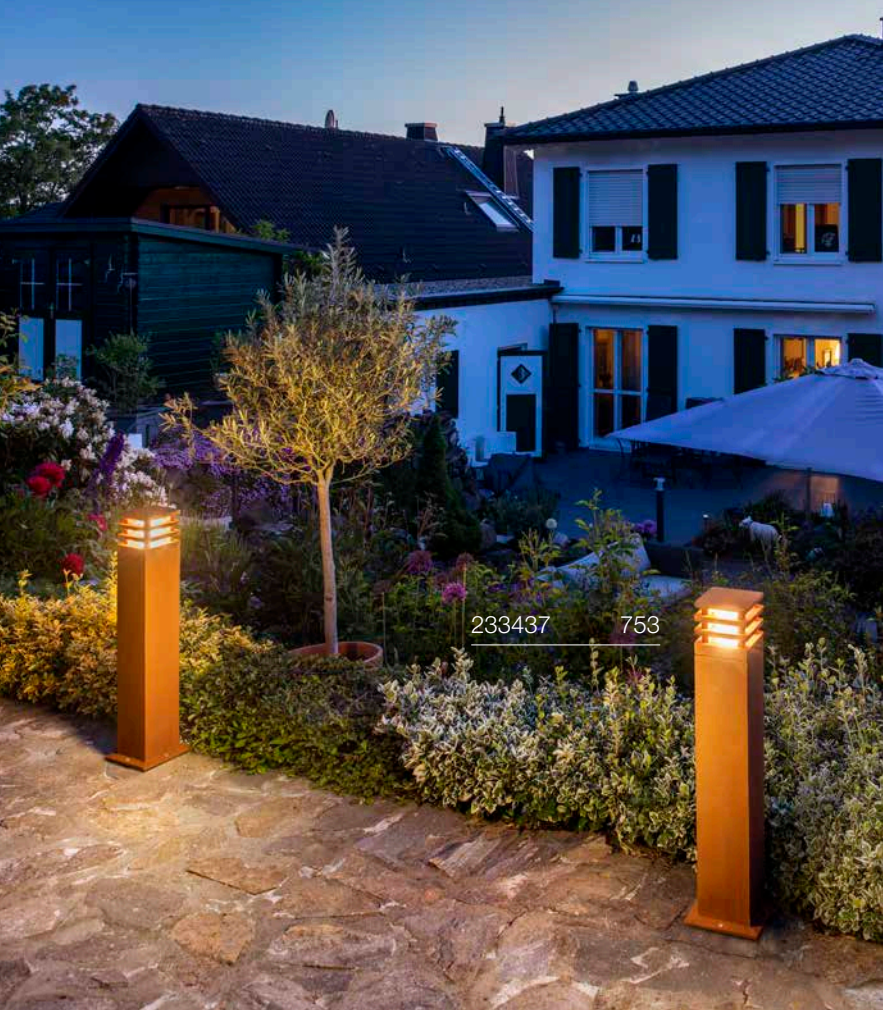

RUSTY® 40
Pole



220-240 V ~50/60 Hz
Total wattage: 9 W
Material: FeCSi Steel/Polycarbonate (PC)

- open cable end

90 lm|3000 K

Options	Prod. no.	GBP
rust	**233427**	**266.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**16.00**
Ground spike		
grey	**229422**	**40.00**

RUSTY® 70
Pole



IP55 IK02 35000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: FeCSi Steel/Polycarbonate (PC)

• open cable end

LED INSIDE CRI 80

90 lm | 3000 K

Options	Prod. no.	GBP
rust	233437	334.00

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	229422	40.00

RUSTY® 40
Pole, E27



IP55 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

• open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 13.9 cm

Options	Prod. no.	GBP
rust	229420	244.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	229422	40.00

RUSTY® 70
Pole, E27



IP55 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

• open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 13.9 cm

Options	Prod. no.	GBP
rust	229421	309.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	229422	40.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

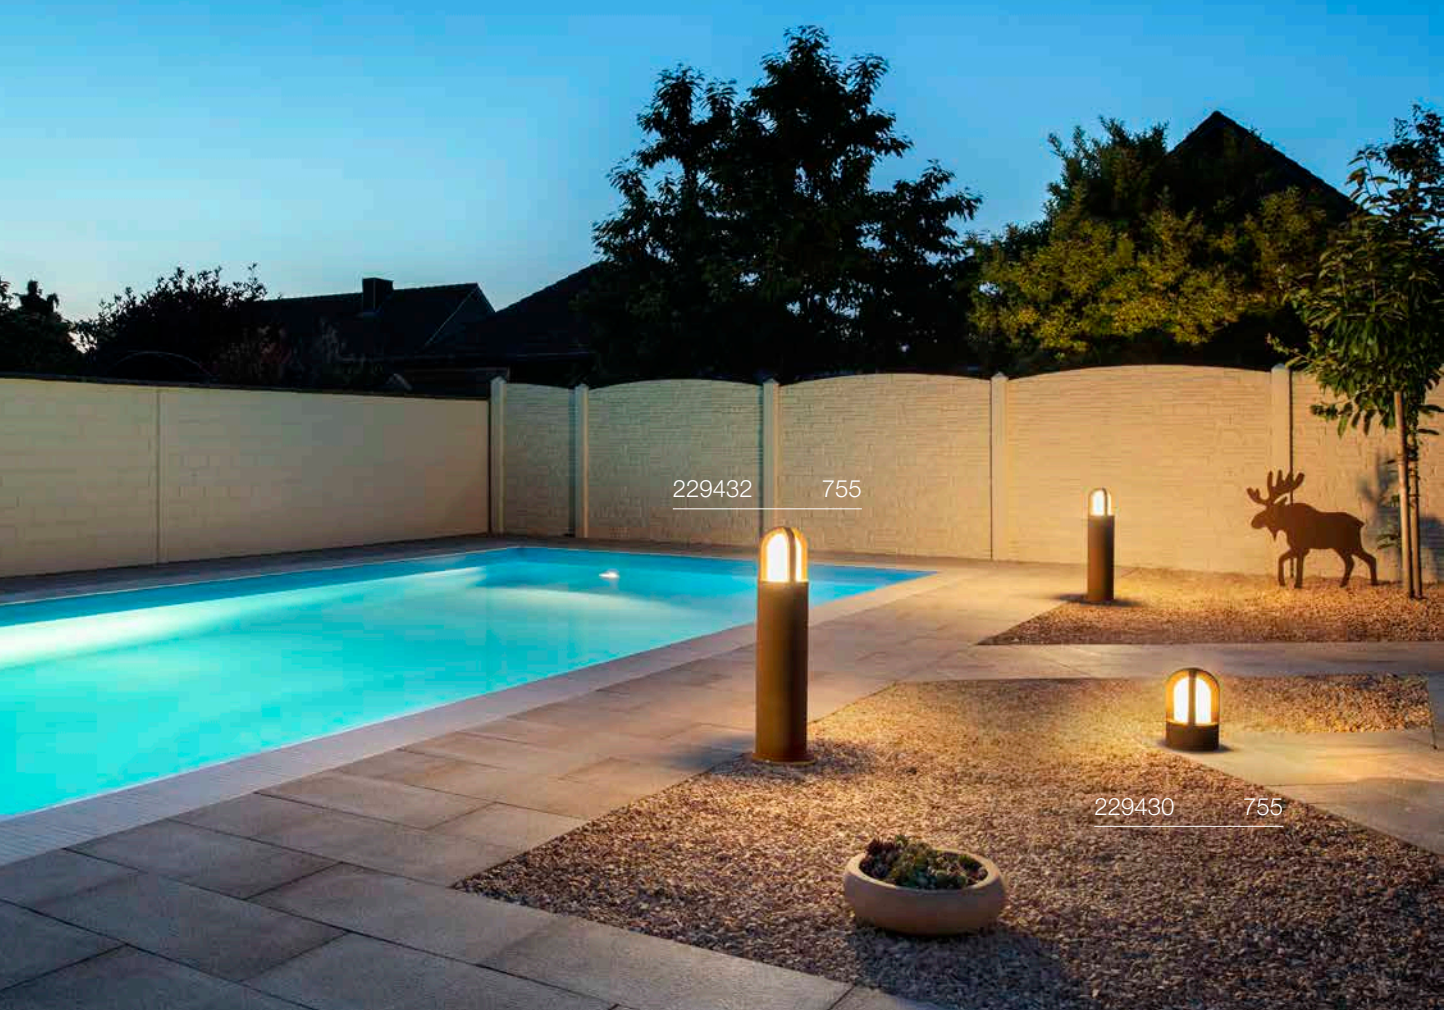
229432 755
229430 755

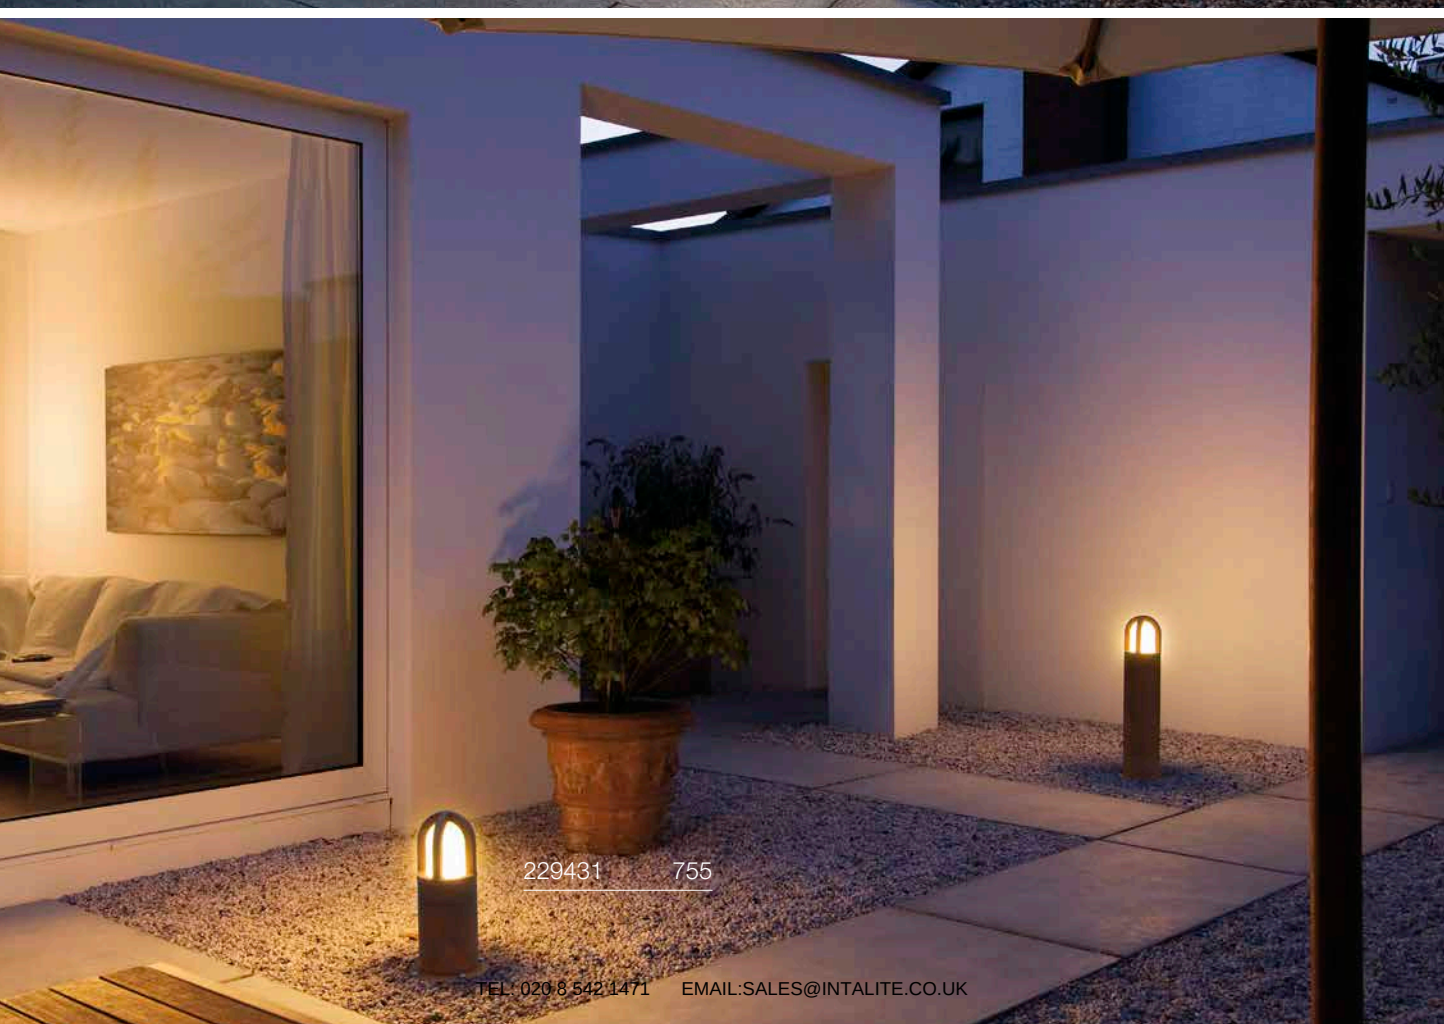
229431 755

RUSTY® CONE 24
FL, E14



IP54 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Glass

- open cable end

SOCKET INSIDE 40 W

Base: 1xE14	max. Ø: 4.8 cm	L: 13.9 cm

Options	Prod. no.	GBP
rust	229430	236.00

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F
5 kW/1000h

Prod. no.: 1005284 6.00 GBP

RUSTY® CONE 40
Pole, E27



IP54 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Glass

- open cable end

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 4.8 cm	L: 13.9 cm

Options	Prod. no.	GBP
rust	229431	360.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	229423	43.00

RUSTY® CONE 70
Pole, E27



IP54 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- open cable end

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 4.8 cm	L: 13.9 cm

Options	Prod. no.	GBP
rust	229432	425.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	229423	43.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

RUSTY® 40
Pole, E27



IP55 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

• open cable end

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 4.8 cm	L: 13.9 cm

Options	Prod. no.	GBP
rust	**229020**	**244.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**16.00**
Ground spike		
Stainless steel	**229022**	**43.00**

RUSTY® 70
Pole, E27



IP55 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

• open cable end

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 4.8 cm	L: 13.9 cm

Options	Prod. no.	GBP
rust	**229021**	**309.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**16.00**
Ground spike		
Stainless steel	**229022**	**43.00**

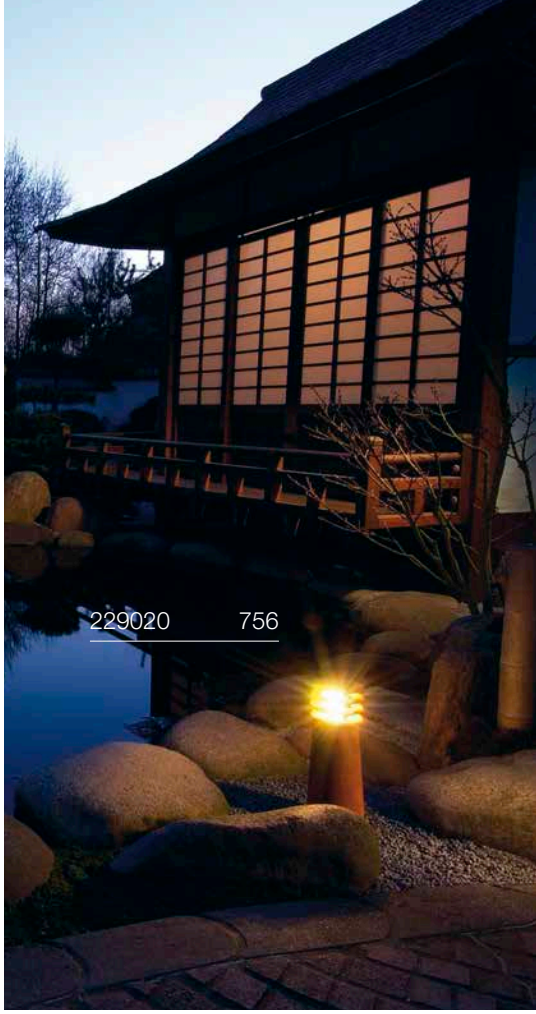

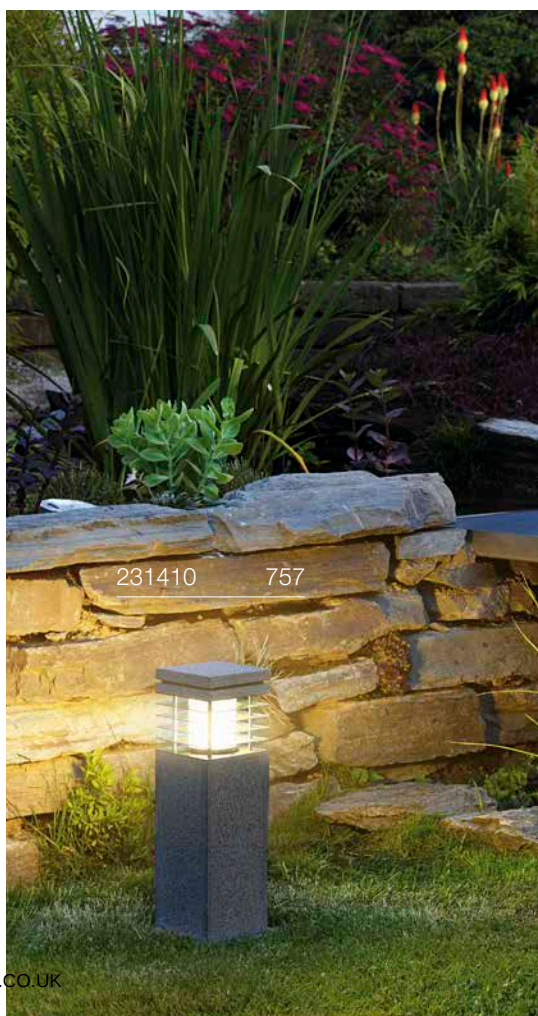

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

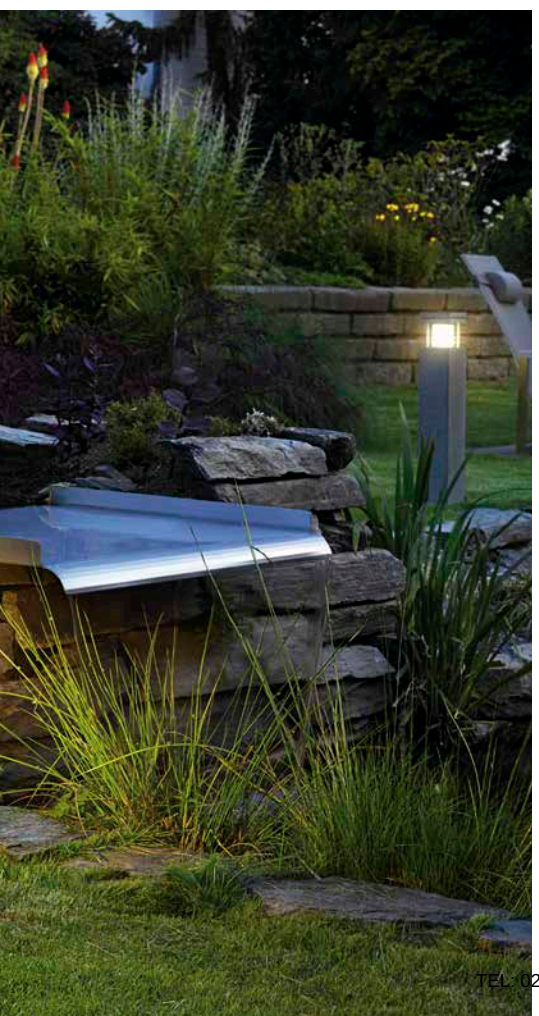

ARROCK GRANITE 40
Pole, square, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Granite/Stainless steel 304

- open cable end

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 11.5 cm

Options	Prod. no.	GBP
grey/chrome	231410	314.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	229422	40.00

ARROCK GRANITE 70
Pole, square, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Granite/Stainless steel 304

- open cable end

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 11.5 cm

Options	Prod. no.	GBP
grey/chrome	231411	382.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	229422	40.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ARROCK ARC
Pole, QPAR51



IP44 IK02

220-240 V ~50/60 Hz
Material: Granite/Stainless steel 304

SOCKET INSIDE 35 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 7.6 cm

Options	Prod. no.	GBP
grey/chrome	231420	314.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	231233	43.00

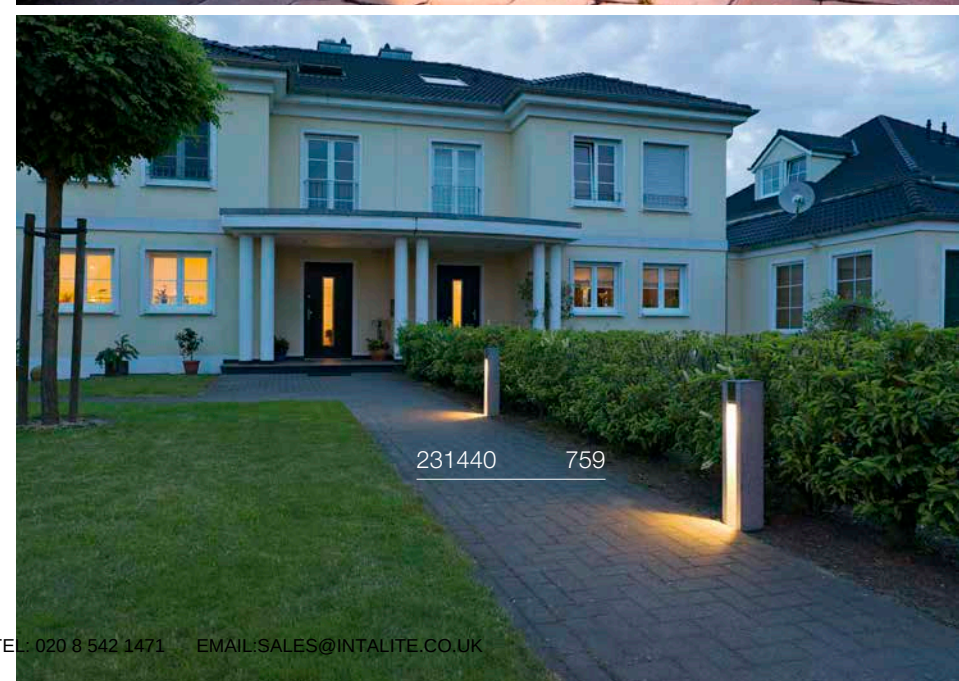

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ARROCK STONE 50
Pole



IP55 IK02 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 9 W
Material: Basalt/Stainless steel 304

- IP connection box
- open cable end

LED INSIDE CRI 80

330 lm|3000 K

Options	Prod. no.	GBP
grey	231370	360.00

⊕

Product	Prod. no.	GBP
Ground spike		
grey	231235	43.00

ARROCK STONE 75
Pole



IP55 IK02 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 9 W
Material: Basalt/Stainless steel 304

- IP connection box
- open cable end

LED INSIDE CRI 80

330 lm|3000 K

Options	Prod. no.	GBP
grey	231371	416.00

⊕

Product	Prod. no.	GBP
Ground spike		
grey	231235	43.00

ARROCK SLOT
Pole, QPAR51



IP55 IK02

220-240 V ~50/60 Hz
Material: Granite/Stainless steel 304

- open cable end

SOCKET INSIDE 4 W

Base: 1xGU10

Options	Prod. no.	GBP
grey/chrome	231440	360.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

Prod. no.: **1005077** **7.00 GBP**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	231235	43.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

L-LINE OUT 30
FL, vertical



IP65 IK02 30000 h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11.5 W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- open cable end

LED INSIDE CRI 80

800 lm | 3000 K	810 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1003536**	**199.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

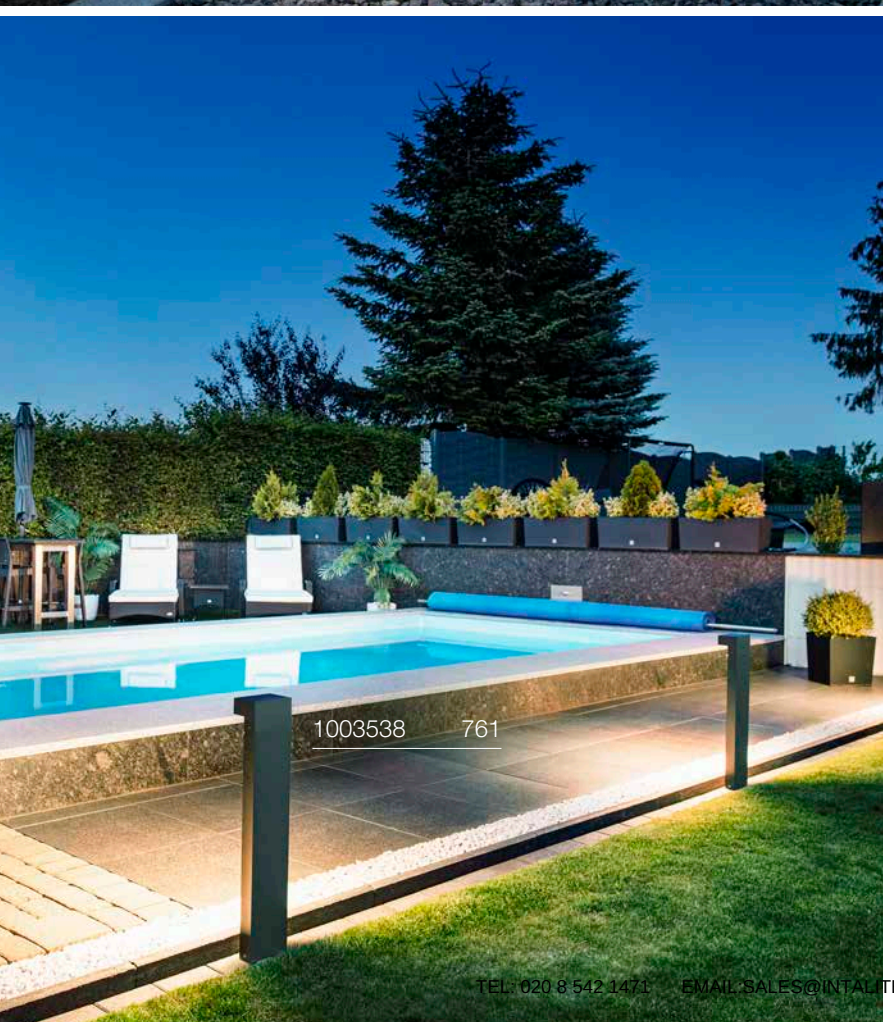

L-LINE OUT 60
FL, vertical



IP65 IK02 30000h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11.5 W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- open cable end

INSIDE CRI 80

780 lm|3000 K | 800 lm|4000 K

Options	Prod. no.	GBP
● anthracite	**1003535**	**208.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

L-LINE OUT 50
Pole, horizontal



IP65 IK02 30000h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7 W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- open cable end

INSIDE CRI 80

490 lm|3000 K | 530 lm|4000 K

Options	Prod. no.	GBP
● anthracite	**1003537**	**164.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

L-LINE OUT 80
Pole, horizontal



IP65 IK02 30000h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7 W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- open cable end

INSIDE CRI 80

490 lm|3000 K | 530 lm|4000 K

Options	Prod. no.	GBP
● anthracite	**1003538**	**191.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TAHA II 45
Pole, PHASE

NEW



C,L IP65 IK02 50 000 h L80B20

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- IP connection box

LED INSIDE CRI 80

450 lm | 2200 K	500 lm | 2700 K

Options	Prod. no.	GBP
● black	1010197	203.00
● black	1010198	229.00
● black	1010199	254.00

TAHA II 70
Pole, Sensor

NEW



IP54 IK02 50 000 h L80B20

100-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- Primary and replica functionality. Option to control additional lights without a sensor
- IP connection box

LED INSIDE CRI 80

450 lm | 2200 K	500 lm | 2700 K

Options	Prod. no.	GBP
● black	1010200	246.00
● black	1010201	280.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1004680 765

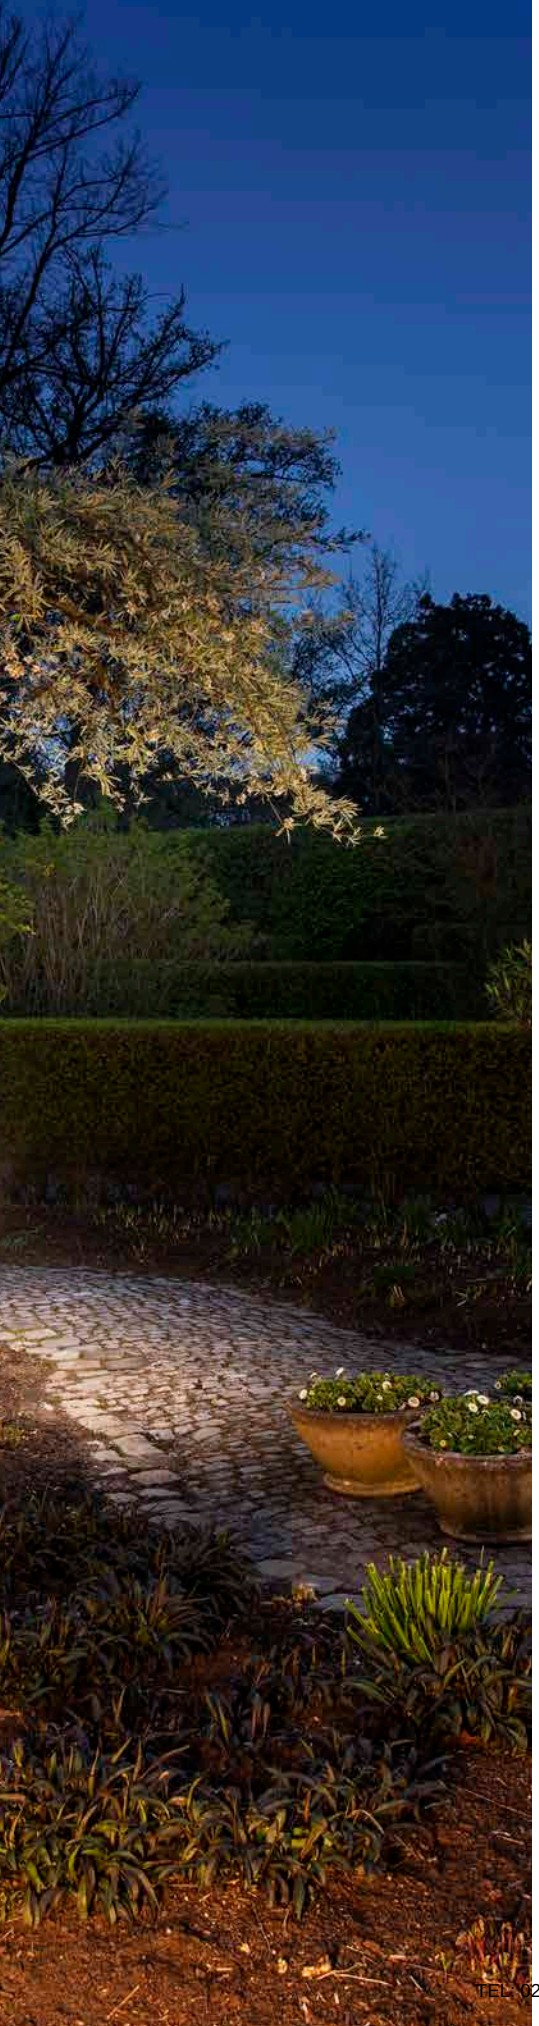

OVALISK 75
Pole



IP65 IK02 30000 h L70B50 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- open cable end

LED INSIDE CRI 80

580 lm | 3000 K	630 lm | 4000 K

Options	Prod. no.	GBP
anthracite	**1004680**	**297.00**

⊕

Product	Prod. no.	GBP
Concrete anchor		
silver	**228712**	**55.00**
Ground spike		
grey	**228722**	**51.00**
Connection box IP68, 3-pole		
black	**228730**	**16.00**

OVALISK 100
Pole



IP65 IK02 30000 h L70B50 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- open cable end

LED INSIDE CRI 80

580 lm | 3000 K	630 lm | 4000 K

Options	Prod. no.	GBP
anthracite	**1004681**	**322.00**

⊕

Product	Prod. no.	GBP
Concrete anchor		
silver	**228712**	**55.00**
Ground spike		
grey	**228722**	**51.00**
Connection box IP68, 3-pole		
black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1001999 767

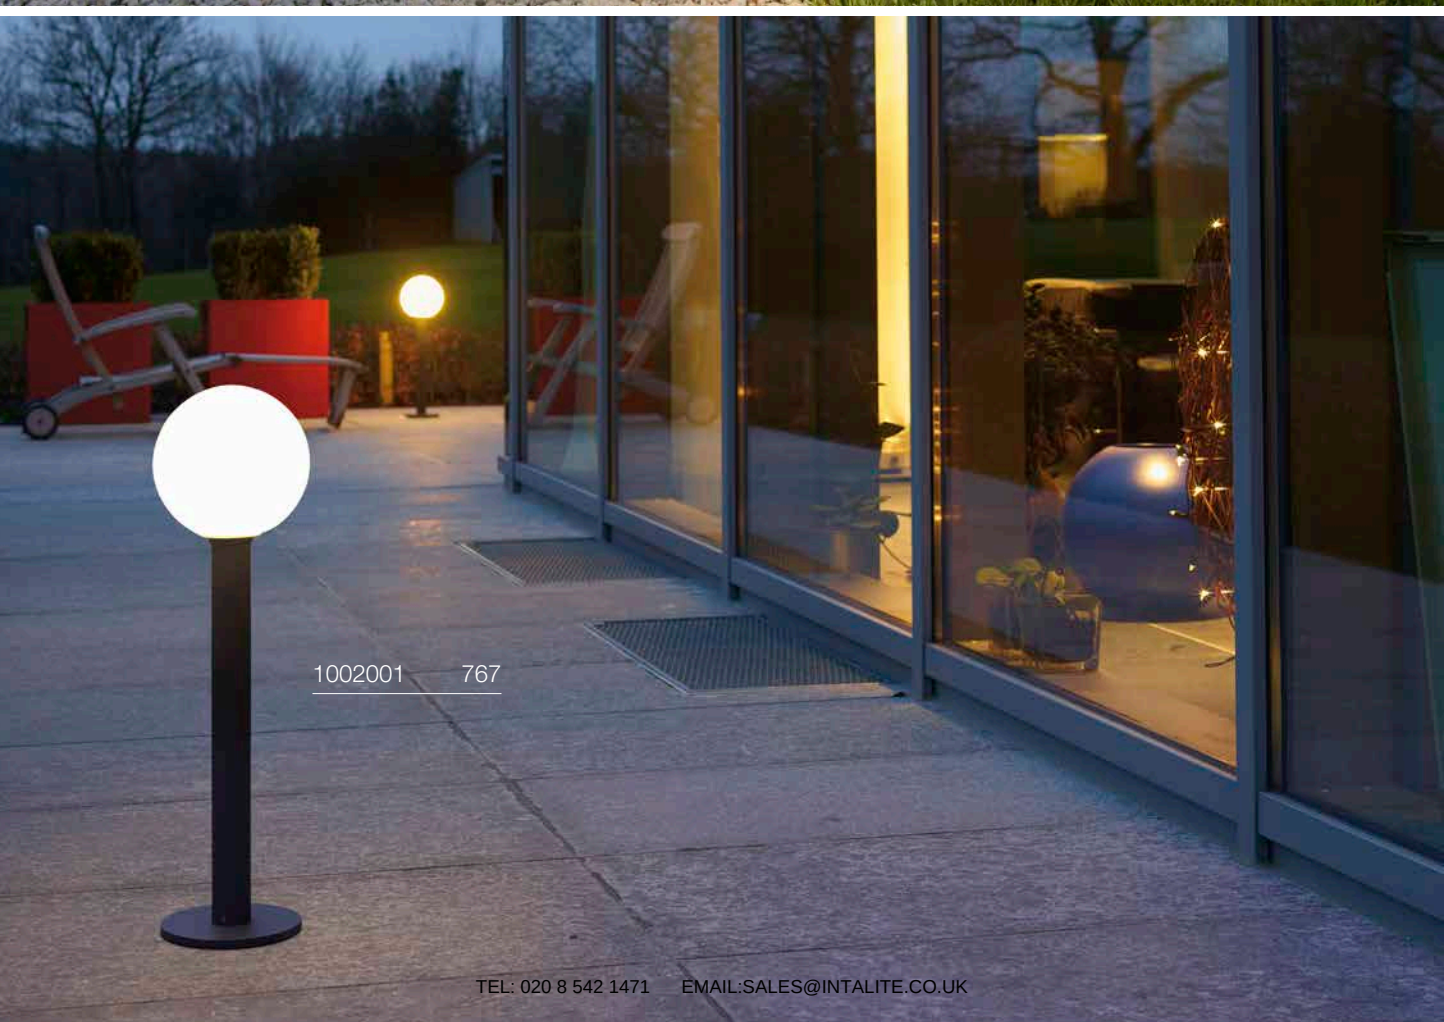
1002001 767

GLOO PURE 27
Pole, E27



IP44 IK02 30

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- open cable end

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 18 cm

Options	Prod. no.	GBP
● anthracite	**1001999**	**84.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**
Ground spike		
● grey	**231234**	**46.00**

GLOO PURE 44
Pole, E27



IP44 IK02 20

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- open cable end

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 18 cm

Options	Prod. no.	GBP
● anthracite	**1002000**	**114.00**

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E
14 kW/1000 h

Prod. no.: 1005307 11.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**
Ground spike		
● grey	**231234**	**46.00**

GLOO PURE 70
Pole, E27



IP44 IK02 20

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- open cable end

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 18 cm

Options	Prod. no.	GBP
● anthracite	**1002001**	**122.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**
Ground spike		
● grey	**231234**	**46.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

227221 769

ROTOBALL 25
FL, E27



IP44 IK04

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

- IP44 safety plug

SOCKET INSIDE 24 W

Base: 1xE27

Options	Prod. no.	GBP
○ white	**1007969**	**137.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kW/1000 h

Prod. no.: 1005302 11.00 GBP

ROTOBALL 40
FL, E27



IP44 IK04

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

- IP44 safety plug

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 9.5 cm

Options	Prod. no.	GBP
○ white	**1007970**	**154.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kW/1000 h

Prod. no.: 1005302 11.00 GBP

ROTOBALL 50
FL, E27



IP44 IK04

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

- IP44 safety plug

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 9.5 cm

Options	Prod. no.	GBP
○ white	**1007971**	**206.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kW/1000 h

Prod. no.: 1005302 11.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

232075 771

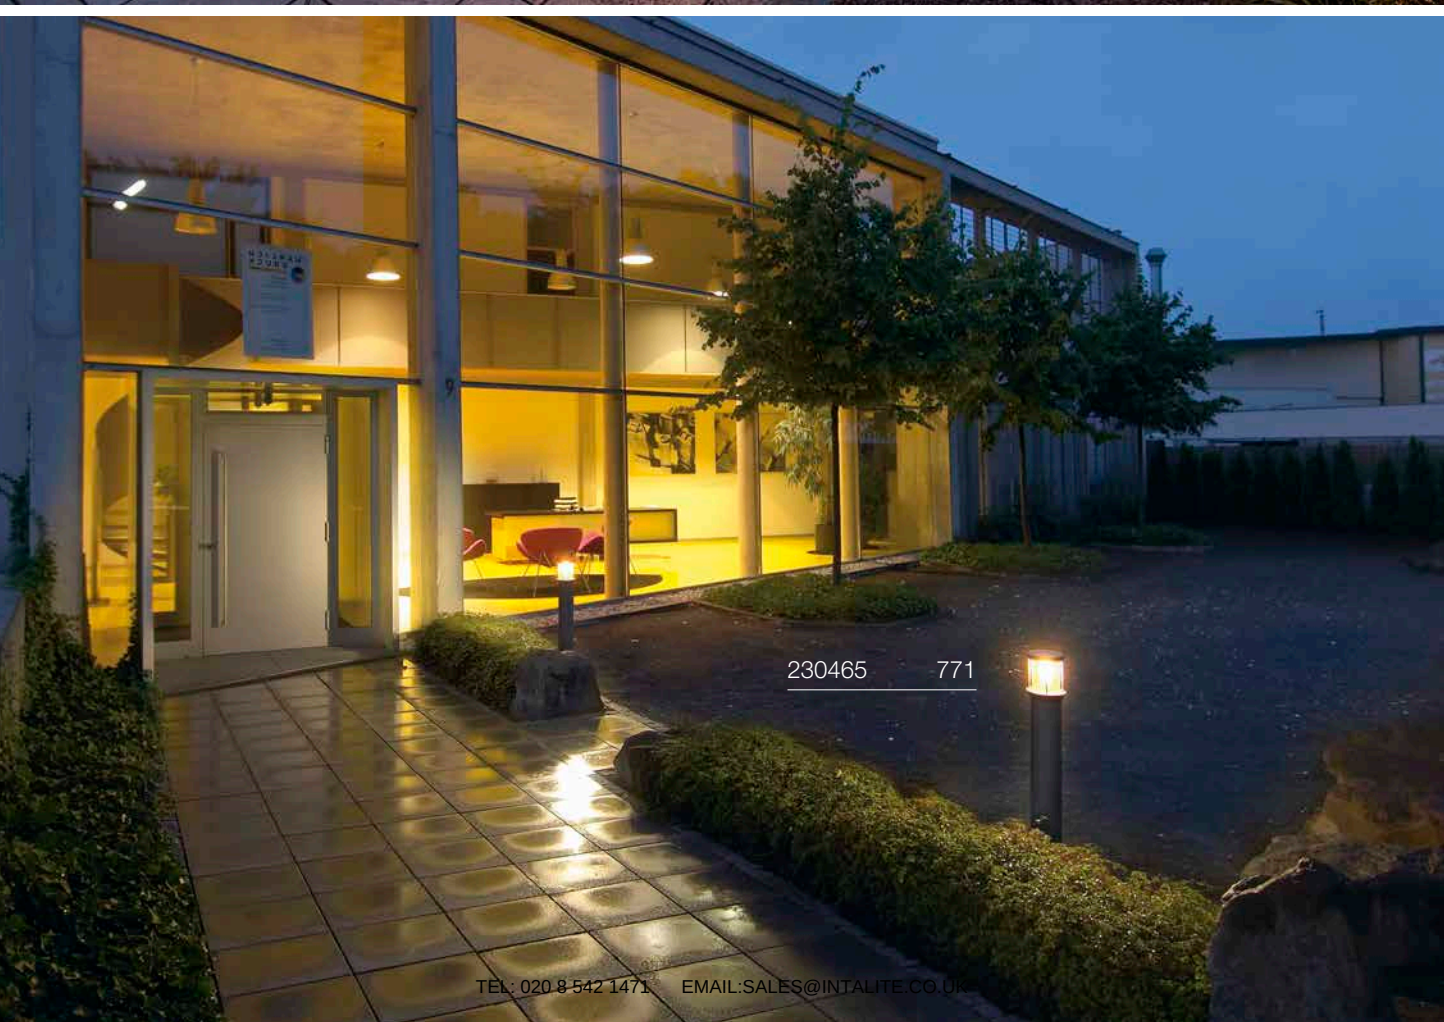
230465 771

PHOTONIA
Pole, E27



IP55 IK03 20

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- open cable end

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 9 cm | L: 15 cm

Options	Prod. no.	GBP
● anthracite	**232075**	**241.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005303 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**
Concrete anchor		
◐ Stainless steel	**232085**	**43.00**

OTOS GLAS
Pole, E27



IP43 IK04

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Concrete anchor included

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 14.5 cm

Options	Prod. no.	GBP
● anthracite	**230465**	**127.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kW/1000 h

Prod. no.: 1005302 11.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**
Screw set		
◐ Stainless steel	**228753**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CUBIX
FL, QPAR51



IP44 IK04 100°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- IP44 safety plug

SOCKET INSIDE 25 W

Base: 1xGU10

Options	Prod. no.	GBP
● anthracite	**1007933**	**109.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

CONE
FL, E27



IP54 IK05

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 100 W

Base: 1xE27 | L: 15 cm

Options	Prod. no.	GBP
● anthracite	**230435**	**85.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kW/1000 h

C

Prod. no.: 1005302 11.00 GBP

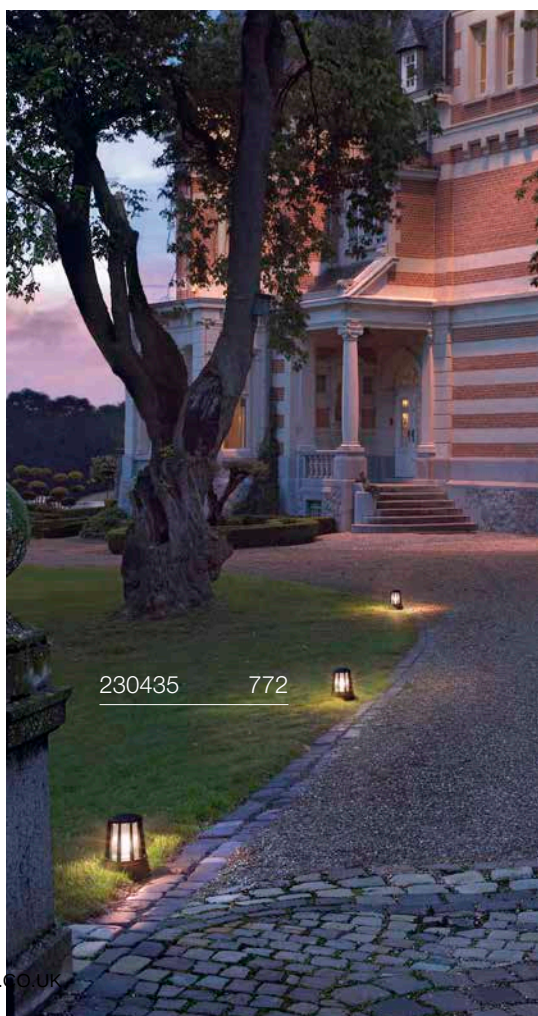

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

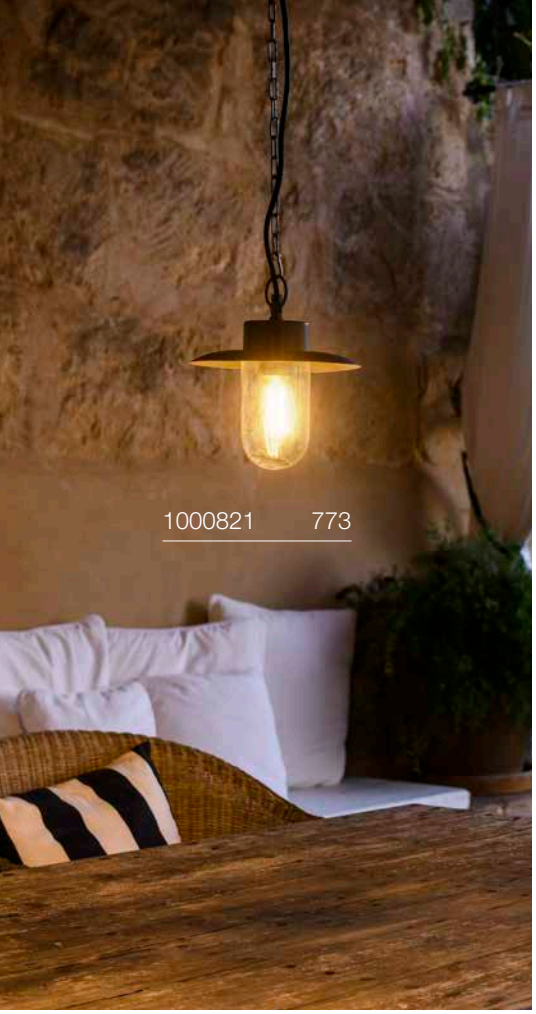

MOLAT
PD, E27



IP44 IK04 250 cm

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Suspension chain included
- IP44 safety plug

SOCKET INSIDE 60 W

Base: 1xE27	max. Ø: 6.5 cm	L: 14.5 cm

Options	Prod. no.	GBP
● anthracite	**1007954**	**120.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005268 11.00 GBP

Product	Prod. no.	GBP
Ceiling rosette		
● anthracite	**1000398**	**70.00**

MOLAT 100
Pole, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- open cable end

SOCKET INSIDE 60 W

Base: 1xE27	max. Ø: 6.5 cm	L: 14.5 cm

Options	Prod. no.	GBP
● anthracite	**1000822**	**154.00**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kW/1000 h

Prod. no.: 1005265 23.00 GBP

Product	Prod. no.	GBP
Ground spike		
● grey	**230060**	**46.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LISENNE 40
Pole, E27



IP54 IK02

220-240 V ~50/60 Hz
Material: Basalt/Glass

- open cable end

SOCKET INSIDE 23 W

Base: 1xE27	max. Ø: 5.9 cm	L: 15 cm

Options	Prod. no.	GBP
grey	**1000665**	**344.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: **1005268** **11.00 GBP**

Product	Prod. no.	GBP
Ground spike		
grey	**229422**	**40.00**

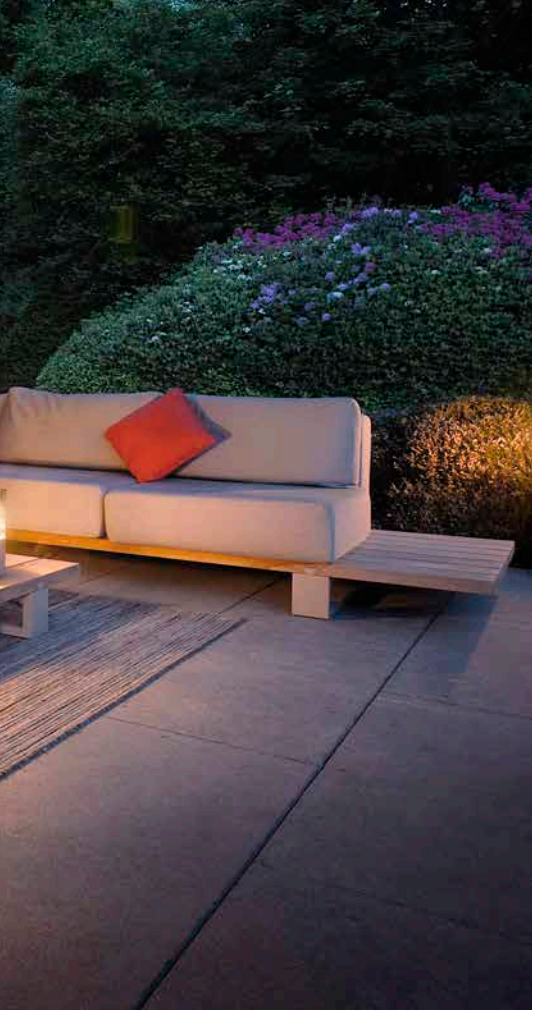

LISENNE 70
Pole, E27



220-240 V ~50/60 Hz
Material: Basalt/Glass

- open cable end

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 5.9 cm | L: 15 cm

Options	Prod. no.	GBP
grey	**1000666**	**393.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: **1005268** **11.00 GBP**

Product	Prod. no.	GBP
Ground spike		
grey	**229422**	**40.00**

20 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

228935 777

228925 777

ALPA MUSHROOM 45
Pole, E27



IP55 IK03

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- open cable end

SOCKET INSIDE 24 W

Base: 1xE27	max. Ø: 5.2 cm	L: 16 cm

Options	Prod. no.	GBP
anthracite	228935	114.00

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E
14 kW/1000 h

Prod. no.: 1005307 11.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
silver	228712	55.00
Ground spike		
grey	228722	51.00
Connection box IP68, 3-pole		
black	228730	16.00
Screw set		
Stainless steel	228752	6.00

ALPA MUSHROOM 75
Pole, E27



IP55 IK03

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- open cable end

SOCKET INSIDE 24 W

Base: 1xE27	max. Ø: 5.2 cm	L: 16 cm

Options	Prod. no.	GBP
anthracite	228945	139.00

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E
14 kW/1000 h

Prod. no.: 1005307 11.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
silver	228712	55.00
Ground spike		
grey	228722	51.00
Connection box IP68, 3-pole		
black	228730	16.00
Screw set		
Stainless steel	228752	6.00

ALPA CONE 100
Pole, E27

IP55 IK03

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- open cable end

SOCKET INSIDE 24 W

Base: 1xE27	max. Ø: 5.2 cm	L: 17.5 cm

Options	Prod. no.	GBP
anthracite	228925	165.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
silver	228712	55.00
Ground spike		
grey	228722	51.00
Connection box IP68, 3-pole		
black	228730	16.00
Screw set		
Stainless steel	228752	6.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

APONI 90
Pole, PHASE

IP65 | 30000 h L70B50 | 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.3 W
Material: Aluminium

- open cable end

INSIDE CRI 80

520 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1000682**	**226.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

APONI 120
Pole, PHASE



IP65 | 30000 h L70B50 | 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.3 W
Material: Aluminium

- open cable end

INSIDE CRI 80

520 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1000683**	**279.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

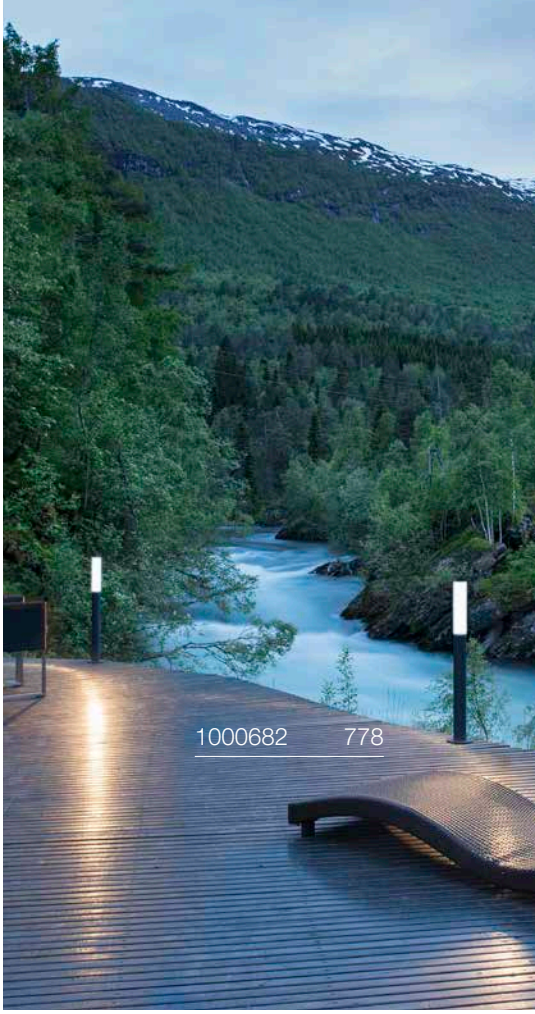

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

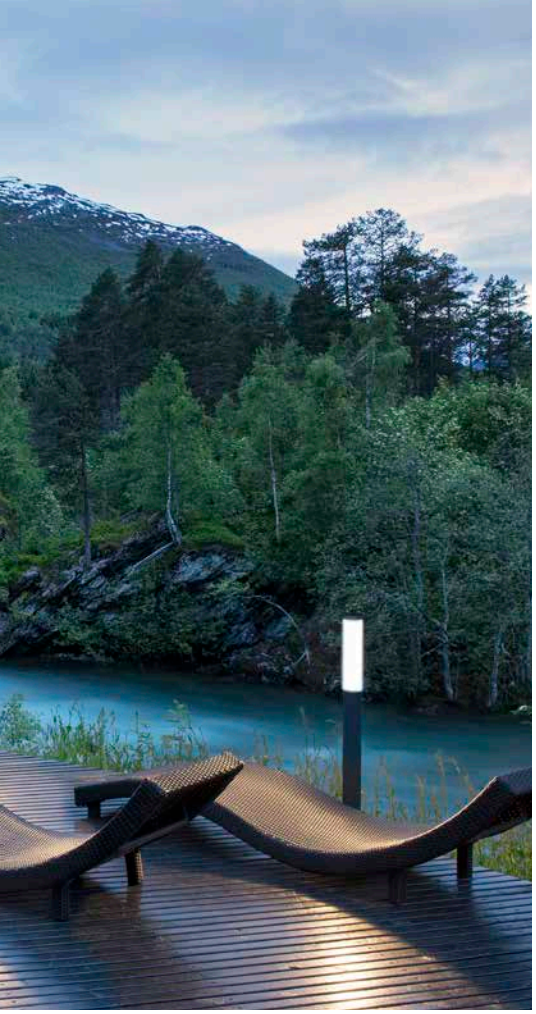

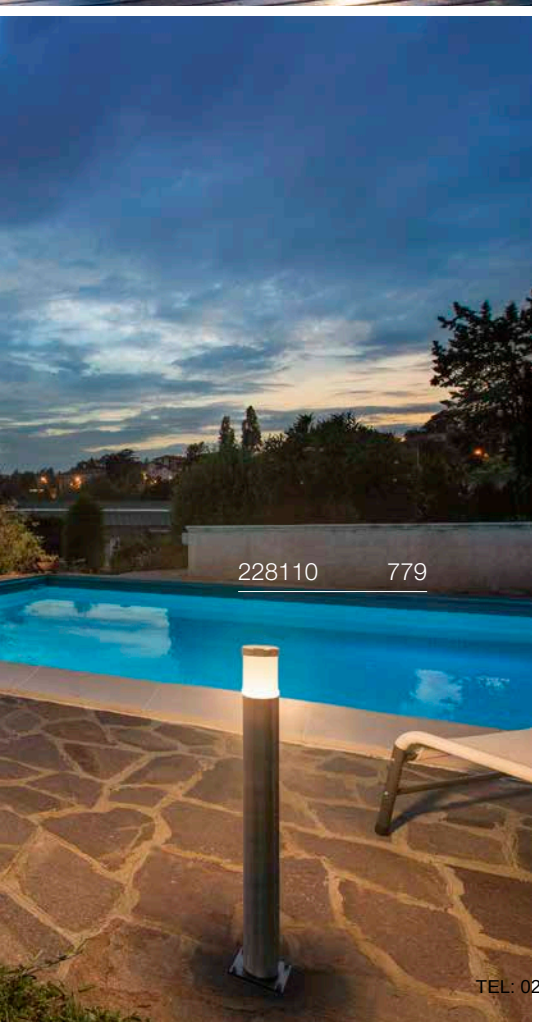

TRUST 30
Pole



220-240 V ~50/60 Hz
Total wattage: 9 W
Material: Stainless steel 316

- open cable end

400 lm | 3000 K

Options	Prod. no.	GBP
Stainless steel	**228100**	**223.00**

⊕

Product	Prod. no.	GBP
Ground spike		
black	**227922**	**46.00**
Ring-shaped grid		
Stainless steel	**228130**	**84.00**
Connection box IP68, 3-pole		
black	**228730**	**16.00**
Spiral-shaped grid		
black	**1000449**	**50.87**

TRUST 60
Pole



220-240 V ~50/60 Hz
Total wattage: 9 W
Material: Stainless steel 316

- open cable end

400 lm | 3000 K

Options	Prod. no.	GBP
Stainless steel	**228110**	**285.00**

⊕

Product	Prod. no.	GBP
Ground spike		
black	**227922**	**46.00**
Ring-shaped grid		
Stainless steel	**228130**	**84.00**
Connection box IP68, 3-pole		
black	**228730**	**16.00**
Spiral-shaped grid		
black	**1000449**	**50.87**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

BIG NAILS 50
Pole, E27



IP44

220-240 V ~50/60 Hz
Material: Stainless steel 304/
Polycarbonate (PC)

• open cable end

SOCKET INSIDE 15 W

Base: 1xE27	max. Ø: 4.5 cm	L: 17 cm

Options	Prod. no.	GBP
Stainless steel	**229162**	**139.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
black	**227922**	**46.00**

BIG NAILS 80
Pole, E27



IP44

220-240 V ~50/60 Hz
Material: Stainless steel 304/
Polycarbonate (PC)

• open cable end

SOCKET INSIDE 15 W

Base: 1xE27	max. Ø: 4.5 cm	L: 17 cm

Options	Prod. no.	GBP
Stainless steel	**229172**	**160.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Ground spike		
black	**227922**	**46.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ROX ACRYL 30
Pole, E27



IP65 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

• open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Options	Prod. no.	GBP
Stainless steel	**1001488**	**139.00**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A
4 kW/1000 h

Prod. no.: 1008641 6.50 GBP

Product	Prod. no.	GBP
T-connector box		
black	**228726**	**28.00**
Ground spike		
grey	**231234**	**46.00**
Concrete anchor		
Stainless steel	**1001494**	**26.00**

ROX ACRYL 60
Pole, E27



IP65 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

• open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Options	Prod. no.	GBP
Stainless steel	**1001489**	**164.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kW/1000 h

Prod. no.: 1005302 11.00 GBP

Product	Prod. no.	GBP
T-connector box		
black	**228726**	**28.00**
Ground spike		
grey	**231234**	**46.00**
Concrete anchor		
Stainless steel	**1001494**	**26.00**

ROX ACRYL 90
Pole, E27



IP65 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

• open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Options	Prod. no.	GBP
Stainless steel	**1001490**	**181.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005303 9.00 GBP

Product	Prod. no.	GBP
T-connector box		
black	**228726**	**28.00**
Ground spike		
grey	**231234**	**46.00**
Concrete anchor		
Stainless steel	**1001494**	**26.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

230066 783

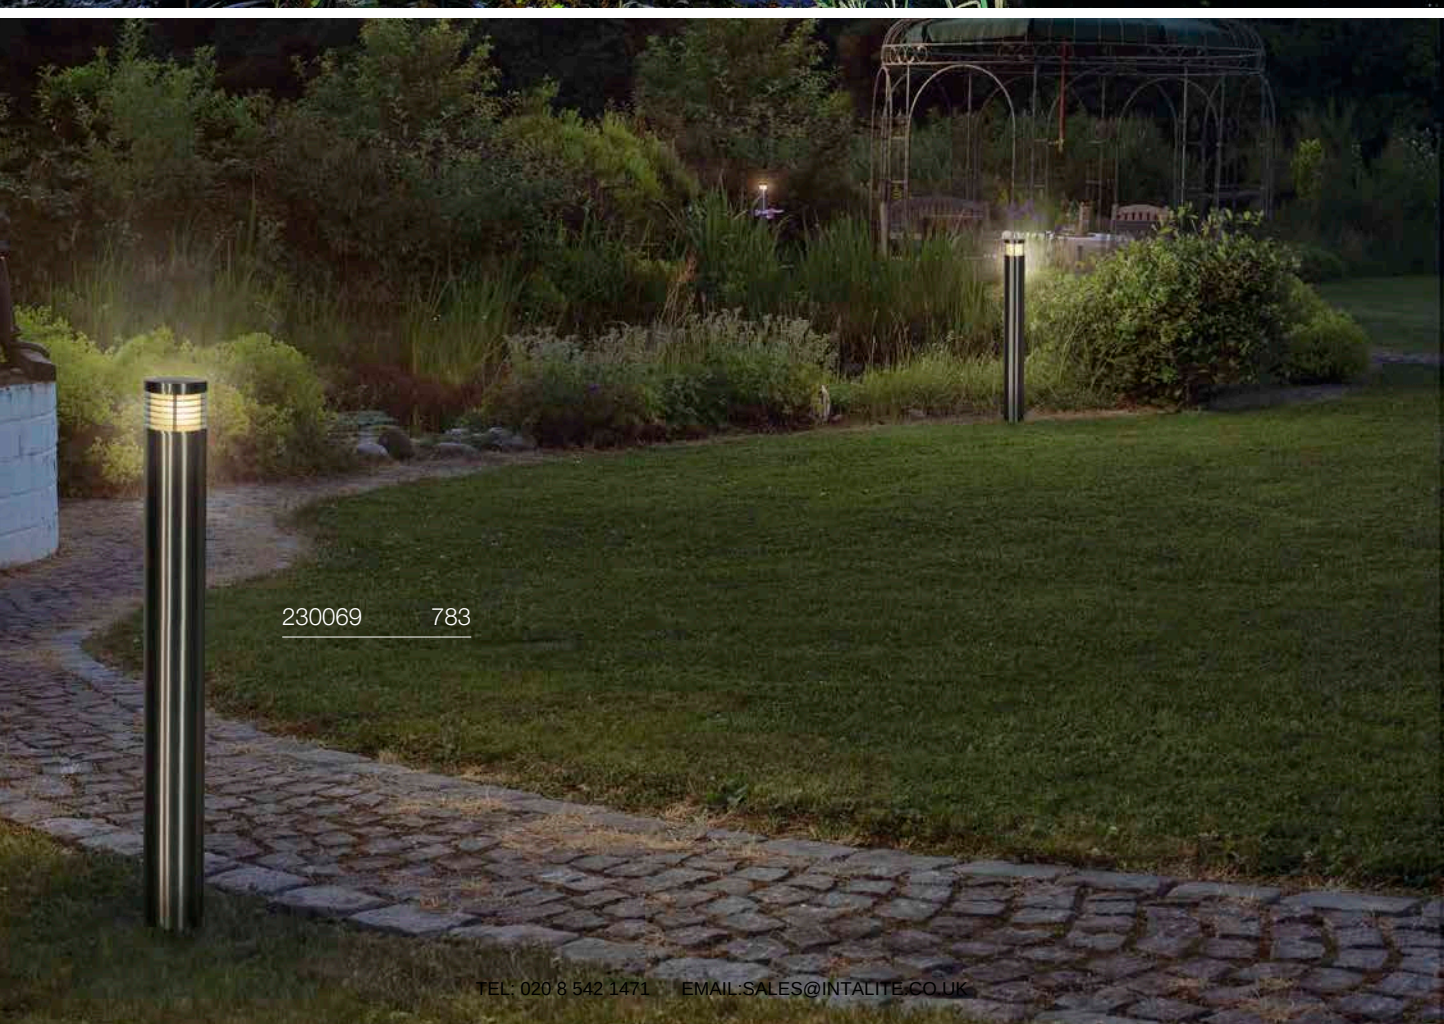
230069 783

VAP SLIM 30
Pole, E27



IP44

220-240 V ~50/60 Hz
Material: Stainless steel 304

- open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 5.1 cm | L: 12.6 cm

Options	Prod. no.	GBP
Stainless steel	230063	145.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 **9.00 GBP**

Product	Prod. no.	GBP
Ground spike		
grey	230060	46.00
Concrete anchor		
Stainless steel	230061	23.00

VAP SLIM 60
Pole, E27

IP44

220-240 V ~50/60 Hz
Material: Stainless steel 304

- open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 5.1 cm | L: 12.6 cm

Options	Prod. no.	GBP
Stainless steel	230066	163.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 **9.00 GBP**

Product	Prod. no.	GBP
Ground spike		
grey	230060	46.00
Concrete anchor		
Stainless steel	230061	23.00

VAP SLIM 90
Pole, E27

IP44

220-240 V ~50/60 Hz
Material: Stainless steel 304

- open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 5.1 cm | L: 12.6 cm

Options	Prod. no.	GBP
Stainless steel	230069	188.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 **9.00 GBP**

Product	Prod. no.	GBP
Ground spike		
grey	230060	46.00
Concrete anchor		
Stainless steel	230061	23.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

C-POL 90
Pole, E27

IP54 IK03

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

• open cable end

SOCKET INSIDE 24 W

Base: 1xE27	max. Ø: 5.2 cm	L: 17.3 cm

Options	Prod. no.	GBP
● anthracite	**231475**	**170.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

F-POL 85
Pole, E27



IP54 IK05

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

• open cable end

SOCKET INSIDE 20 W

Base: 1xE27	max. Ø: 5.1 cm	L: 14.8 cm

Options	Prod. no.	GBP
● anthracite	**231595**	**164.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

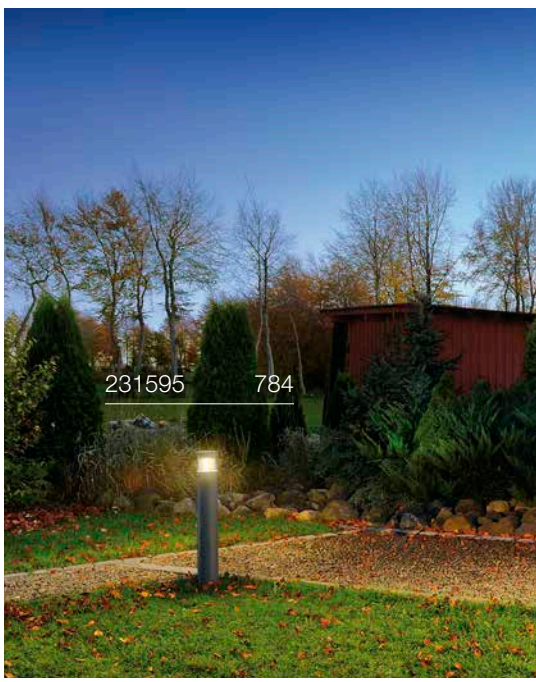

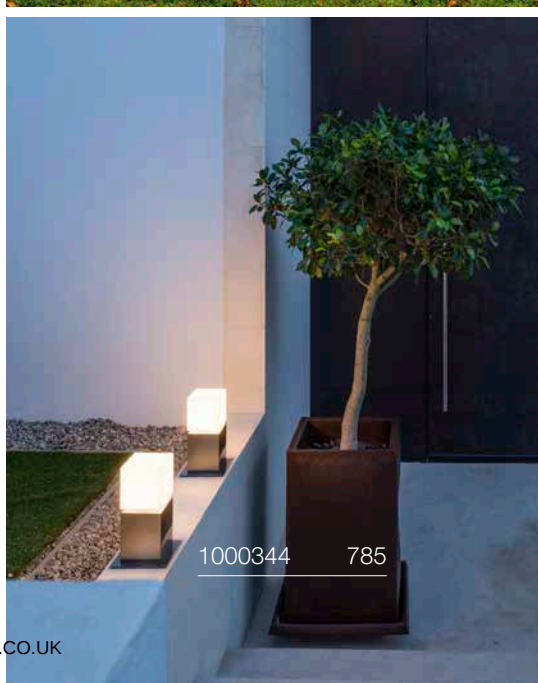

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SQUARE POLE 30
Pole, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

• open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Options	Prod. no.	GBP
Stainless steel	1000344	197.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005303 9.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	231234	46.00
Concrete anchor		
Stainless steel	1000343	47.00

SQUARE POLE 60
Pole, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

• open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Options	Prod. no.	GBP
Stainless steel	1000345	249.00

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A
4 kW/1000 h

Prod. no.: 1008641 6.50 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	231234	46.00
Concrete anchor		
Stainless steel	1000343	47.00

SQUARE POLE 90
Pole, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

• open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Options	Prod. no.	GBP
Stainless steel	1000346	292.00

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kW/1000 h

Prod. no.: 1005302 11.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00
Ground spike		
grey	231234	46.00
Concrete anchor		
Stainless steel	1000343	47.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

231455 787

SLOTS 45
Pole



220-240 V ~50/60 Hz
Total wattage: 4.5 W
Material: Aluminium

- Concrete anchor included
- open cable end

200 lm|3000 K

Options	Prod. no.	GBP
anthracite	231815	154.00
rust	231817	154.00

SLOTS 65
Pole



220-240 V ~50/60 Hz
Total wattage: 4.5 W
Material: Aluminium

- Concrete anchor included
- open cable end

200 lm|3000 K

Options	Prod. no.	GBP
anthracite	231455	161.00
rust	231457	161.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

H-POL 30
Pole



IP65 IK03 120° 30000h L70B50 36

100-277 V ~50/60 Hz | 480 mA
Total wattage: 9.7 W
Material: Aluminium/Plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the floor, with installation dimensions L: 14 cm W: 14 cm D: 16 cm

LED INSIDE CRI 80

350 lm|3000 K

Options	Prod. no.	GBP
● anthracite	**232155**	**208.00**

⊕

Product	Prod. no.	GBP
Recessed fixing kit 14x14 cm		
● black	**232195**	**43.00**

H-POL 60
Pole



IP65 IK03 120° 30000h L70B50 18

100-277 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the floor, with installation dimensions L: 14 cm W: 14 cm D: 16 cm

LED INSIDE CRI 80

700 lm|3000 K

Options	Prod. no.	GBP
● anthracite	**232165**	**303.00**

⊕

Product	Prod. no.	GBP
Recessed fixing kit 14x14 cm		
● black	**232195**	**43.00**

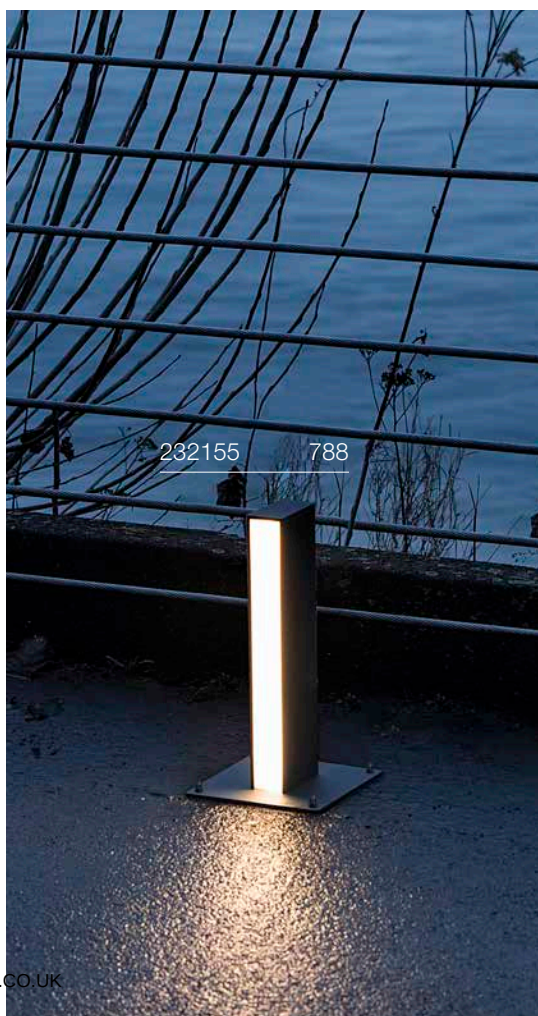

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

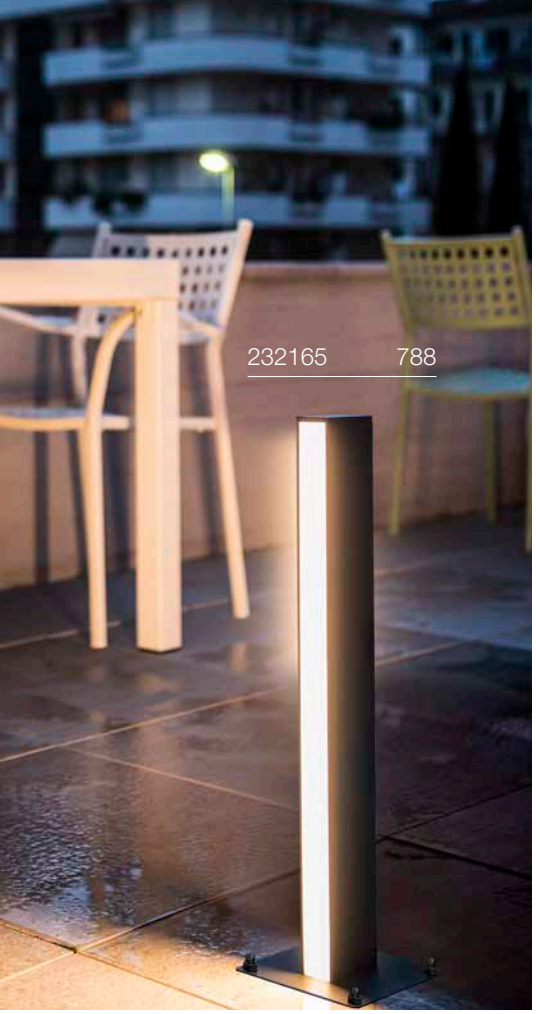

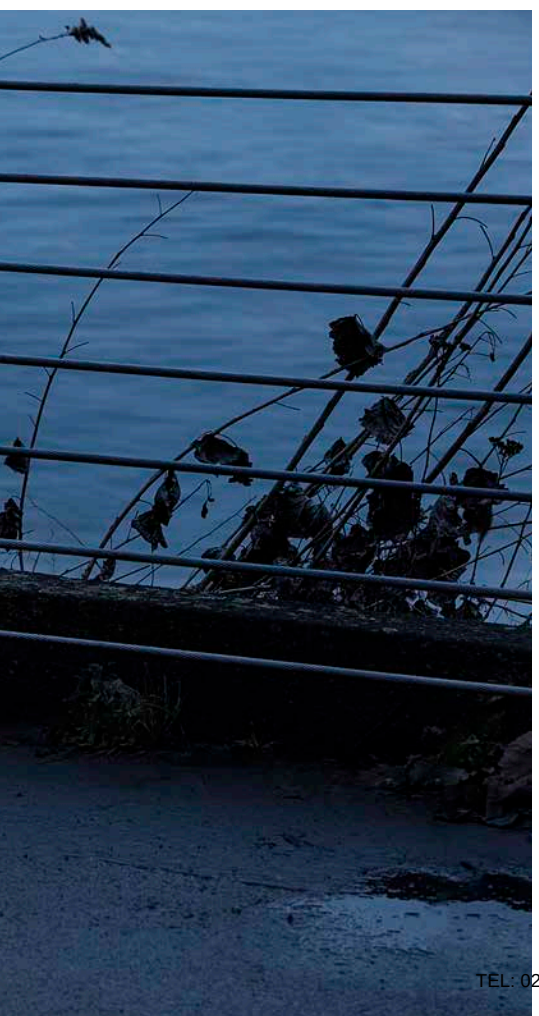

H-POL TWIN 60
Pole





220-240 V ~50/60 Hz | 1000 mA
Total wattage: 35 W
Material: Aluminium/Plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the floor, with installation dimensions L: 14 cm W: 14 cm D: 16 cm

LED INSIDE CRI 80

Direct 700 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**232185**	**398.00**

⊕

Product	Prod. no.	GBP
Recessed fixing kit 14x14 cm		
● black	**232195**	**43.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

232135 791

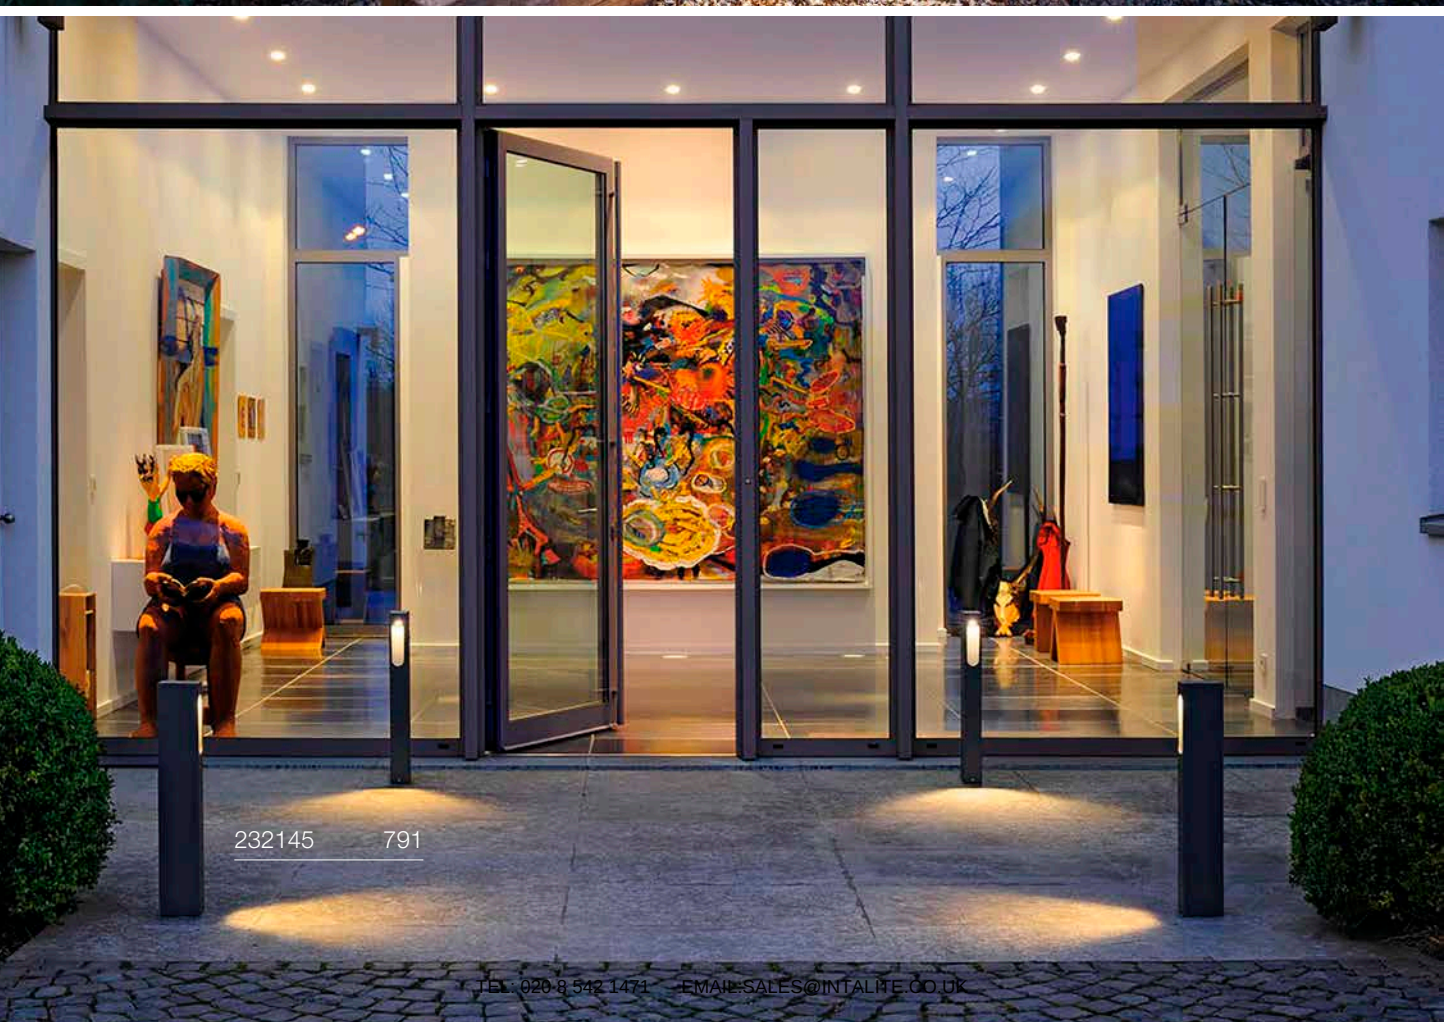
232145 791

SLOTBOX 40
Pole



IP44 IK04 35 000 h L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8 W
Material: Aluminium

- open cable end

INSIDE

160 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**232135**	**173.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

SLOTBOX 70
Pole



IP44 IK04 35 000 h L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.7 W
Material: Aluminium

- open cable end

INSIDE

160 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**232145**	**208.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008727 793

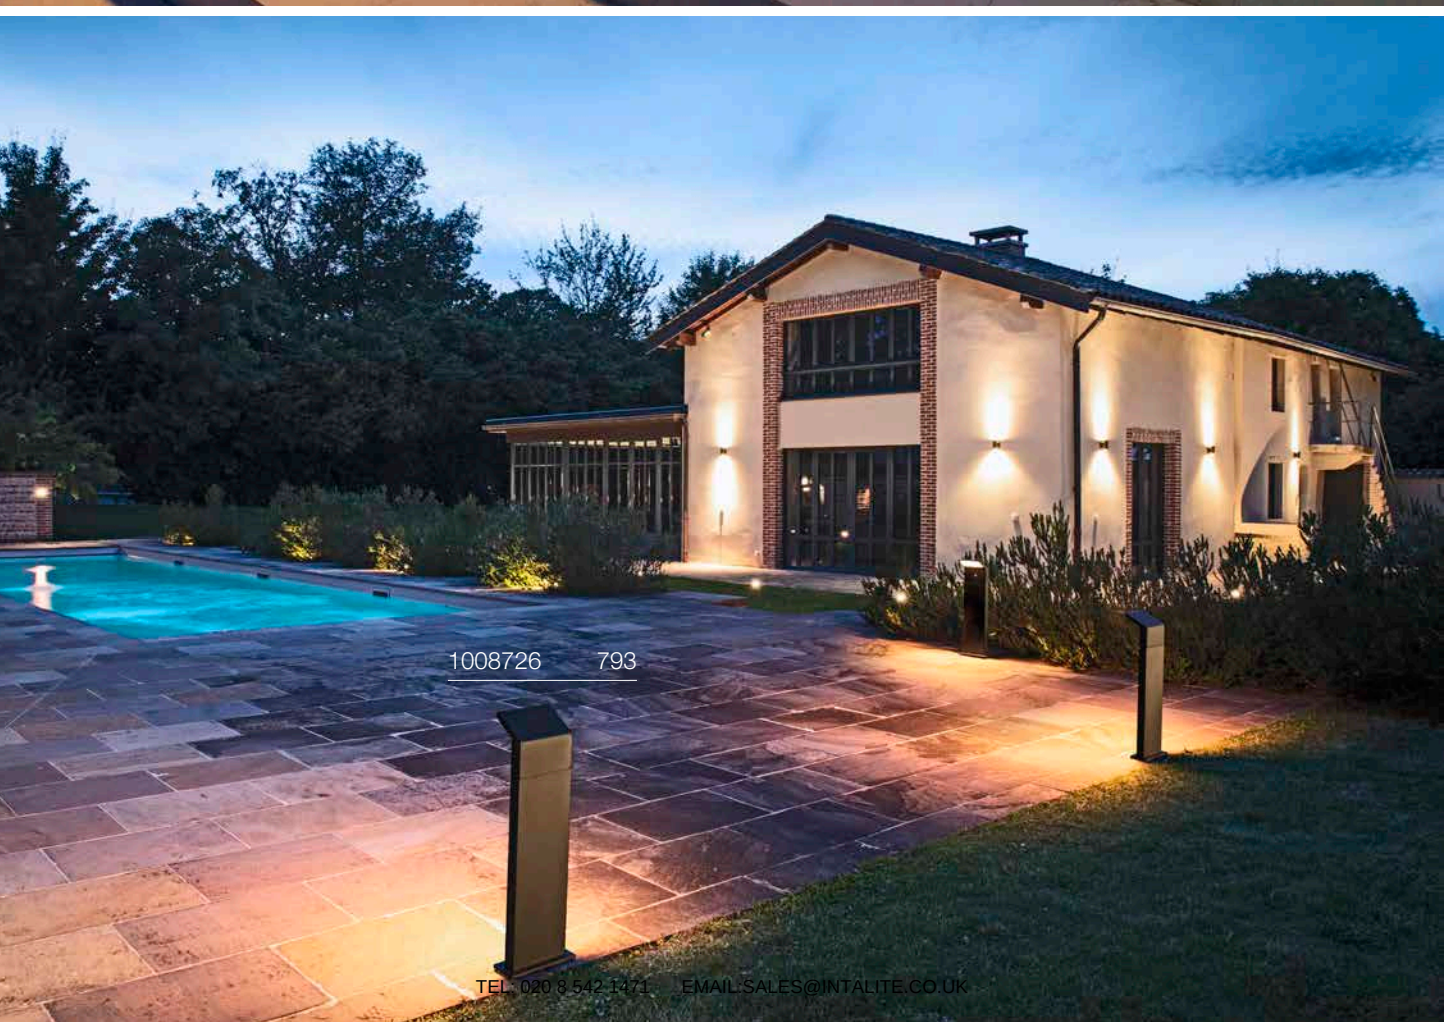
1008726 793

ORDI II 45
Pole, PHASE



IP65 IK07 50000 h L80B20 150

220-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: Aluminium

- The light colour must be set prior to installation
- IP connection box

INSIDE CRI 80

700 lm | 2200 K	850 lm | 3000 K

Options	Prod. no.	GBP
● black	**1008725**	**223.00**

ORDI II 70
Pole, PHASE



IP65 IK07 50000 h L80B20 150

220-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: Aluminium

- The light colour must be set prior to installation
- IP connection box

INSIDE CRI 80

700 lm | 2200 K	850 lm | 3000 K

Options	Prod. no.	GBP
● black	**1008726**	**257.00**

ORDI II 70
Pole, Sensor



IP54 IK07 50000 h L80B20 150

100-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: Aluminium

- The light colour must be set prior to installation
- Primary and replica functionality
- IP connection box

INSIDE CRI 80

700 lm | 2200 K	850 lm | 3000 K

Options	Prod. no.	GBP
● black	**1008727**	**266.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ABRIDOR HYBRID 60
Pole



IP65 IK07 30000h L80B50 80

100-240 V ~50/60 Hz | 380 mA
Total wattage: 6.8 W
Material: Aluminium

- Solar and 230V operation possible
- 3 different modes
- Battery charging via solar
- IP68 connection box

INSIDE CRI 80

600 lm | 2200 K	650 lm | 2700 K

Options	Prod. no.	GBP
● anthracite	**1008543**	**250.00**

ABRIDOR HYBRID 100
Pole



IP65 IK07 30000h L80B50 80

100-240 V ~50/60 Hz | 380 mA
Total wattage: 6.8 W
Material: Aluminium

- Solar and 230V operation possible
- 3 different modes
- Battery charging via solar
- IP68 connection box

INSIDE CRI 80

600 lm | 2200 K	650 lm | 2700 K

Options	Prod. no.	GBP
● anthracite	**1008544**	**283.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ABRIDOR 60
Pole



IP55 IK03 100° 90° 30000h L70B50

100-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: Aluminium

- open cable end

INSIDE CRI 80

950 lm | 3000 K	980 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1002991**	**187.00**

ABRIDOR 100
Pole



IP55 IK03 100° 90° 30000h L70B50

100-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: Aluminium

- The light colour must be set prior to installation
- open cable end

INSIDE CRI 80

950 lm | 3000 K	980 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1002992**	**238.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

IPERI 50
Pole



220-240 V ~50/60 Hz
Total wattage: 4.5 W
Material: Aluminium/Plastic

- open cable end

400 lm | 4000 K

Options	Prod. no.	GBP
anthracite	**231305**	**111.00**

Product	Prod. no.	GBP
Ground spike		
grey	**231231**	**43.00**

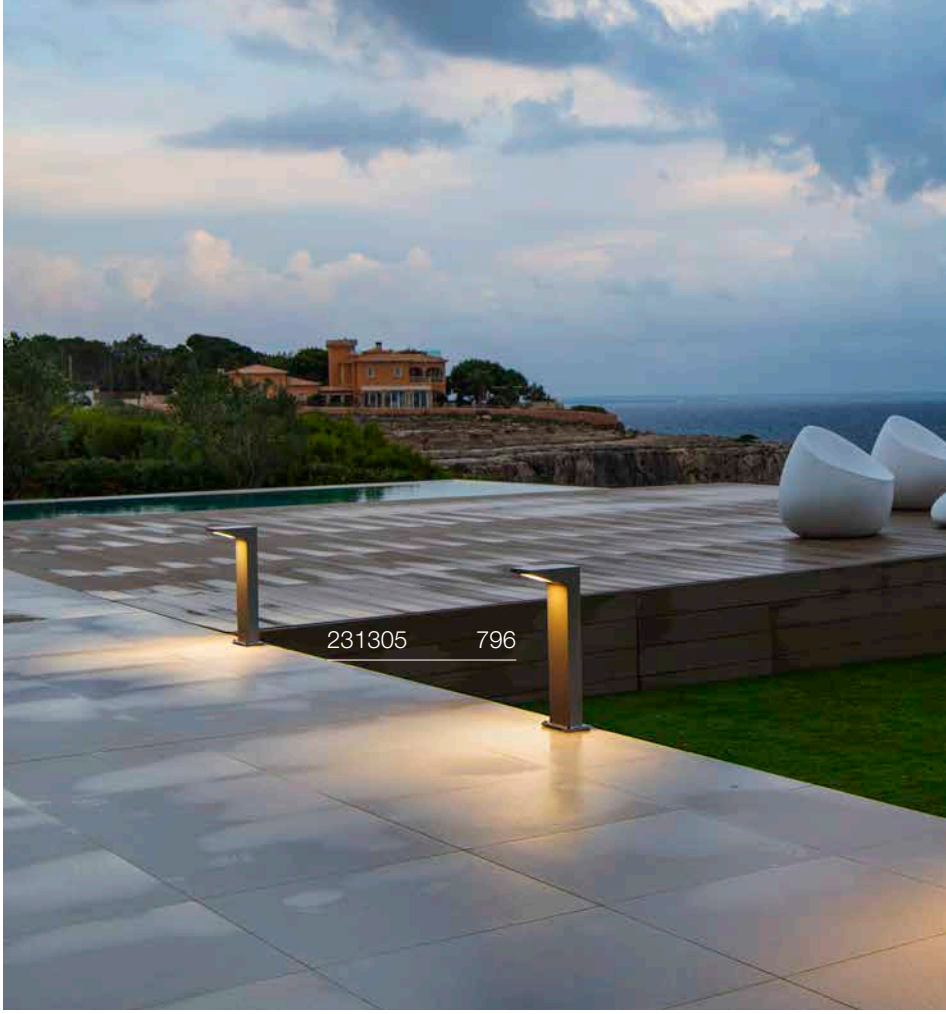

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

QUADRASYL 75
Pole, TCR-TSE



IP44

220-240 V ~50/60 Hz
Material: Aluminium

- Concrete anchor included
- open cable end

SOCKET INSIDE 11 W

Base: 1xG53	max. Ø: 7.5 cm	L: 2.7 cm

Options	Prod. no.	GBP
anthracite	232295	141.00
grey	232294	141.00

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G
7 kW/1000h

C,L

Prod. no.: **1005272** **10.00 GBP**

Product	Prod. no.	GBP
T-connector box		
black	228726	28.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

QUAD
Pole



IP65 IK02 100° 180° 25000 h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Glass

- open cable end

LED INSIDE CRI 80

	1550 lm | 3000 K
Options	**Prod. no.** **GBP**
● anthracite	**1003001** **318.00**

⊕

Product	**Prod. no.**	**GBP**
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

BOOKAT
Pole

CCT



IP65 IK05 30000 h L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: Aluminium/Polycarbonate (PC)

- IP connection box included
- The light colour must be set prior to installation
- IP connection box

LED INSIDE CRI 80

	1240 lm | 3000 K	1300 lm | 4000 K
Options	**Prod. no.**	**GBP**
● anthracite	**1005441**	**356.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

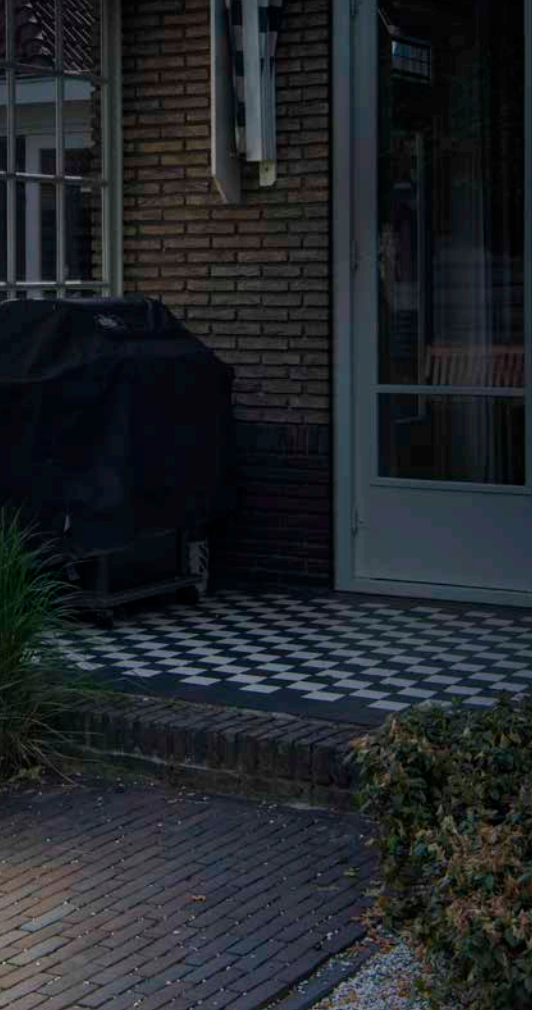

MYRA SPOT
Double, GU10



IP44 | 340° | 45° | 300

220-240 V ~50/60 Hz
Material: Aluminium

- The height of the light can be increased by a maximum of 2 extension rods.
- open cable end

SOCKET INSIDE 4.5 W

Base: 2xGU10	max. Ø: 5.1 cm	L: 5.7 cm

Options	Prod. no.	GBP
anthracite	233185	145.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

Product	Prod. no.	GBP
Concrete anchor		
silver	228712	55.00
Screw set		
Stainless steel	228752	6.00
Pedestal		
anthracite	233145	23.00
Extension rod 30 cm		
anthracite	233165	23.00

SITRA 360
Pole, TCR-TSE



IP44 | 90° | 90°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 9 W

Base: 2xG53	max. Ø: 7.5 cm	L: 3.5 cm

Options	Prod. no.	GBP
anthracite	231505	137.00

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G
7 kW/1000 h

C,L

Prod. no.: 1005272 10.00 GBP

Product	Prod. no.	GBP
Ground spike		
grey	230060	46.00
Ground spike		
Stainless steel	1000736	19.00

20 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1002871 801

THEO PATHLIGHT 73
Pole, double



220-240 V ~50/60 Hz
Material: Aluminium

- open cable end

Base: 2xGU10

Options	Prod. no.	GBP
● anthracite	**1002871**	**205.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
● black	**228730**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007869 819

SYNA WIDE | 804

SYNA SHADE | 805

SYNA PLANT | 807

SYNA GARDEN | 807

SYNA | 807

GALEN 60 | 808

GALEN 120 | 808

GALEN PRO | 809

HELIA SPOT | 810–811

FLAC BEAM | 811

SAMRINA | 811

NAUTILUS 10 | 812–813

BIG NAUTILUS | 813

NAUTILUS 10 | 814

NAUTILUS | 815

NAUTILUS 10 SPOT | 815

DASAR® PROJECTOR | 817

DASAR® 920 | 817

HELIA SLIM | 819

THEO BRACKET | 821

LED SPIKE | 821

SITRA 360 SPIKE | 823

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SYNA WIDE
SP



220-240 V ~50/60 Hz | 500 mA
Total wattage: 5.5 W
Material: aluminium

- IP44 safety plug

	500 lm | 2200 K	650 lm | 3000 K

Options	Prod. no.	GBP
● black 500 lm | 2200 K	**1008478**	**60.00**
● black 650 lm | 3000 K	**1008479**	**60.00**

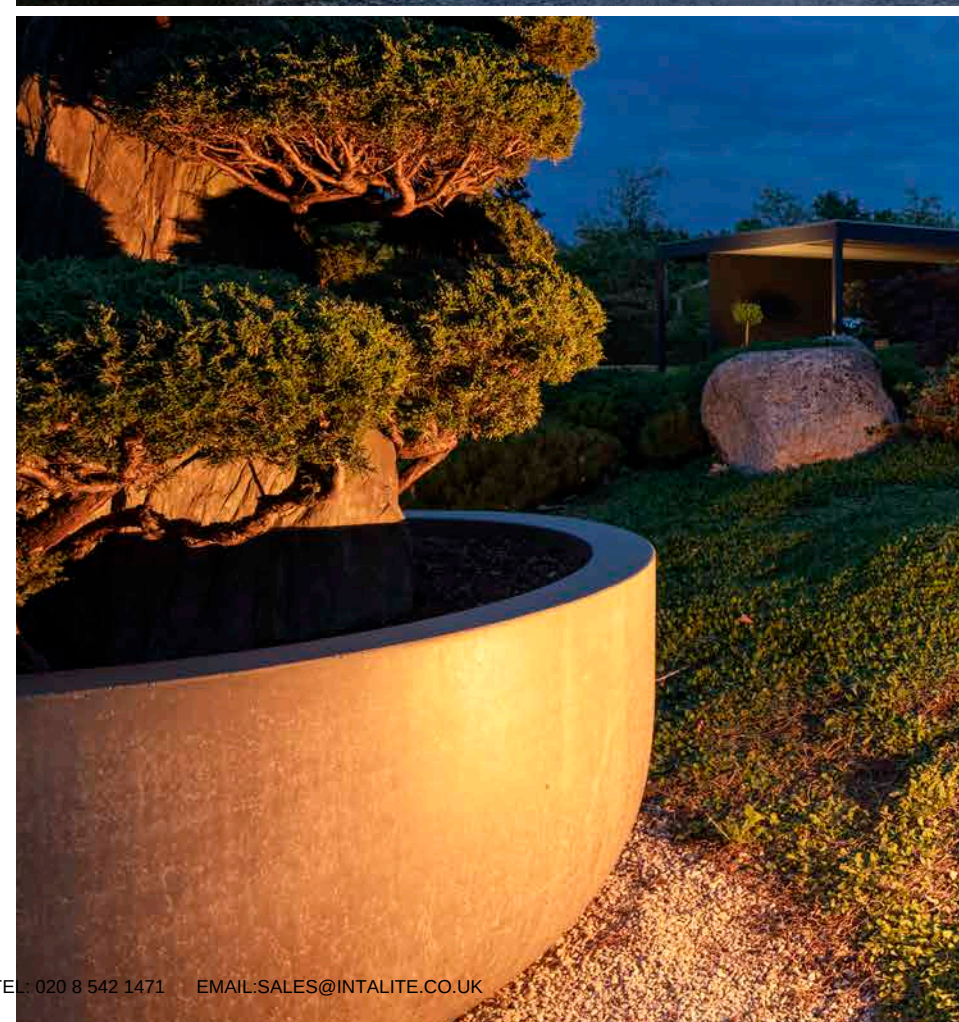

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SYNA SHADE
SP, GU10

NEW



220-240 V ~50/60 Hz
Material: aluminium

- IP44 safety plug

SOCKET INSIDE

10 W

Base: 1xGU10 | max. Ø: 5 cm | L: 5.3 cm

Options	Prod. no.	GBP
● black	**1008480** ●	**39.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000 h

Prod. no.: **1007230** **5.00 GBP**

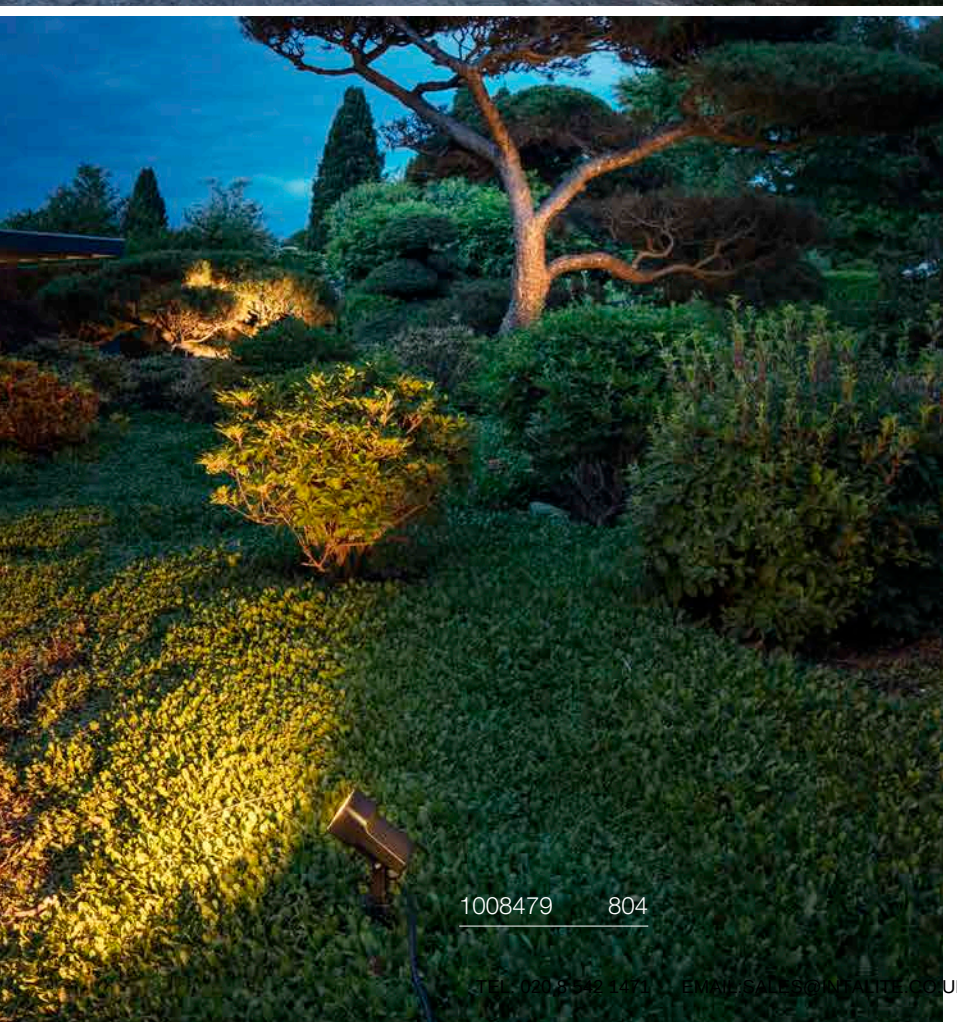

TEL: 020 8542 1471 | EMAIL: SALES@NORTH-LITE.CO.UK

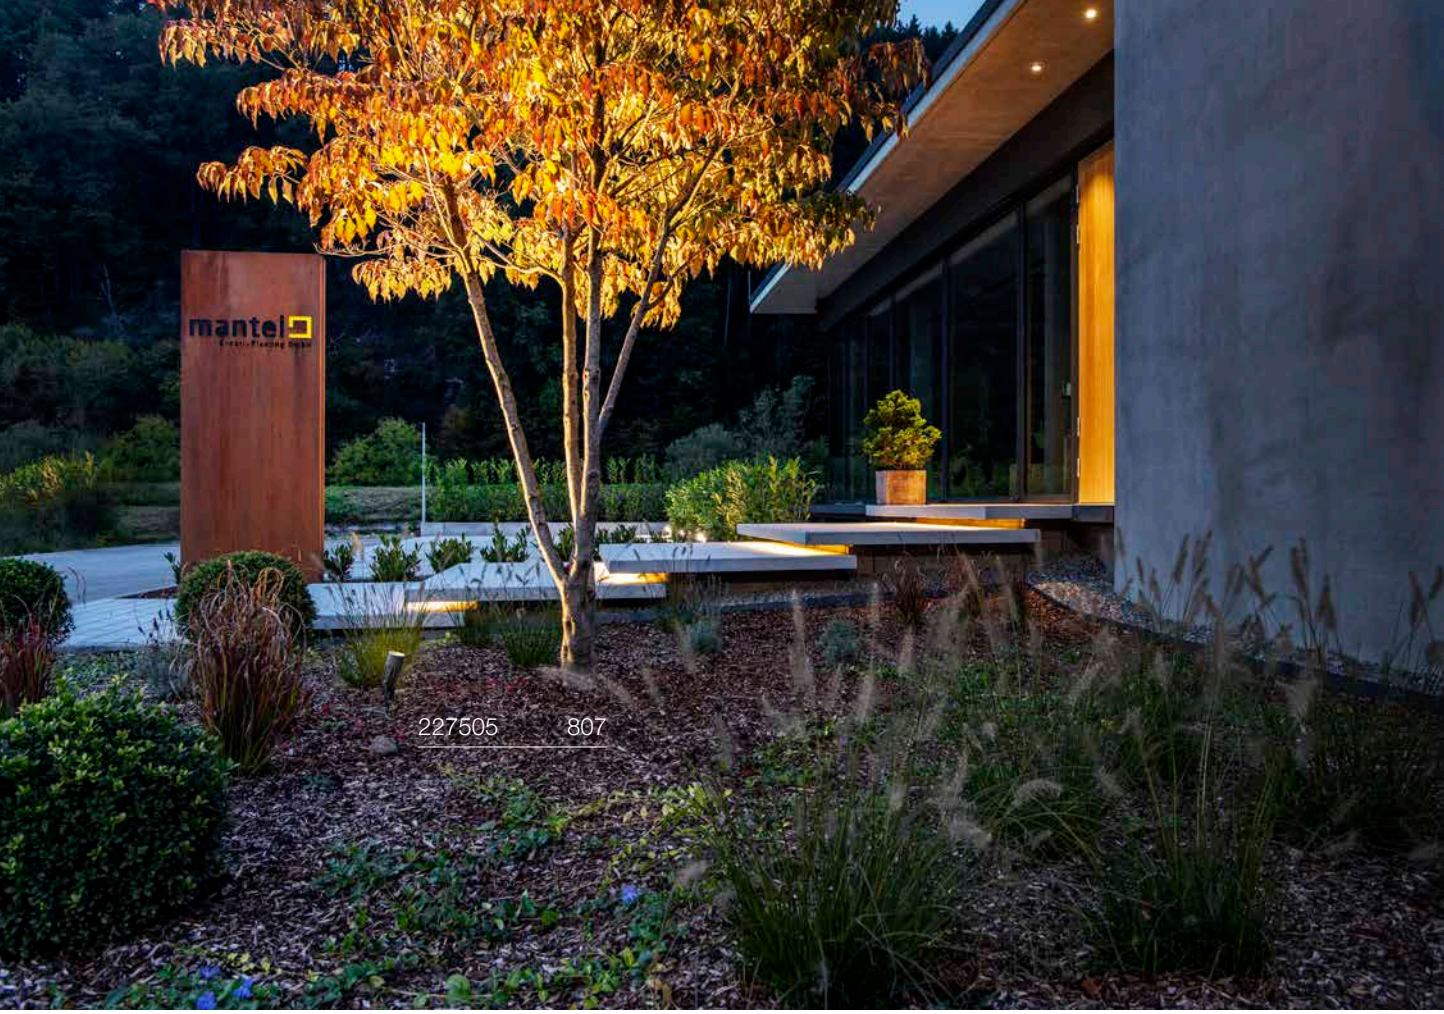

227505 807

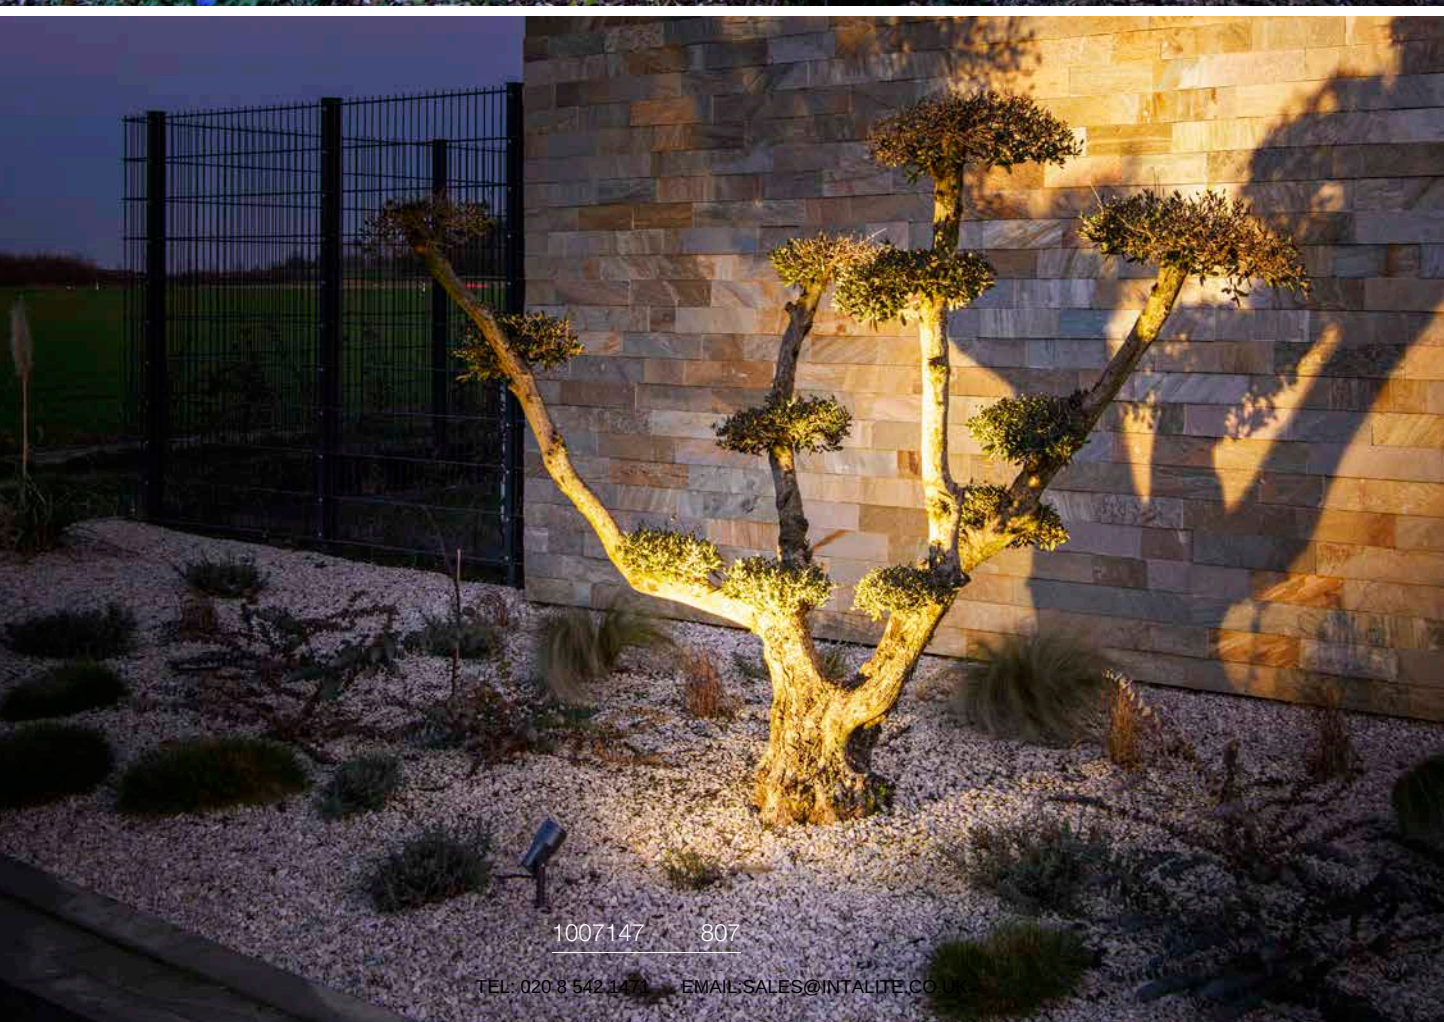

1007147 807

SYNA PLANT
SP



220-240 V ~50/60 Hz | 250 mA
Total wattage: 6 W
Material: aluminium

• IP44 safety plug

540 lm|3000 K

Options	Prod. no.	GBP
● black	**1007978**	**59.00**

SYNA GARDEN
SP



220-240 V ~50/60 Hz | 250 mA
Total wattage: 6 W
Material: aluminium

• IP44 safety plug

540 lm|3000 K

Options	Prod. no.	GBP
● black	**1007979**	**59.00**

SYNA
SP



220-240 V ~50/60 Hz
Total wattage: 9 W
Material: aluminium

• IP44 safety plug

470 lm|3000 K

Options	Prod. no.	GBP
● anthracite	**1007977**	**69.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GALEN 60
SP

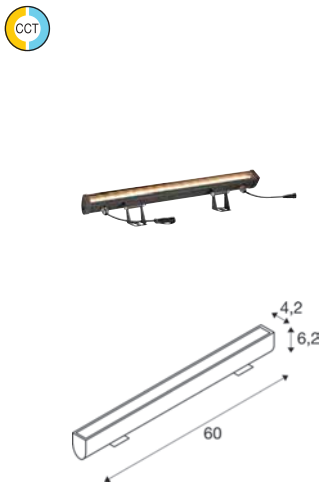

IP65 IK03 180° 54000h L70B50 12

220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: aluminium

LED INSIDE CRI 80

1570 lm | 3000 K	1570 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1003447**	**197.00**

Product	Prod. no.	GBP
5 m connection cable with open cable end		
● black	**231960**	**25.00**
Connection cable 1.0m		
● black	**231961**	**17.00**

GALEN 120
SP

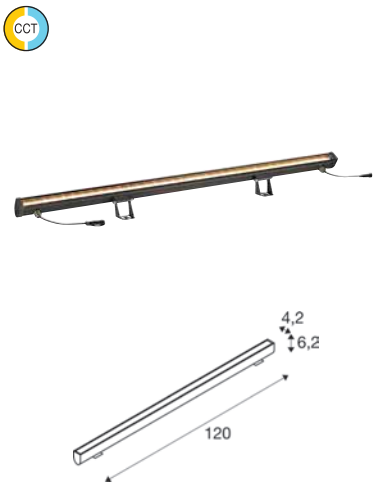

IP65 IK03 180° 54000h L70B50 10

220-240 V ~50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium

- IP67 plug-in system

LED INSIDE CRI 80

3000 lm | 3000 K	3100 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1003448**	**291.00**

Product	Prod. no.	GBP
5 m connection cable with open cable end		
● black	**231960**	**25.00**
Connection cable 1.0m		
● black	**231961**	**17.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.C

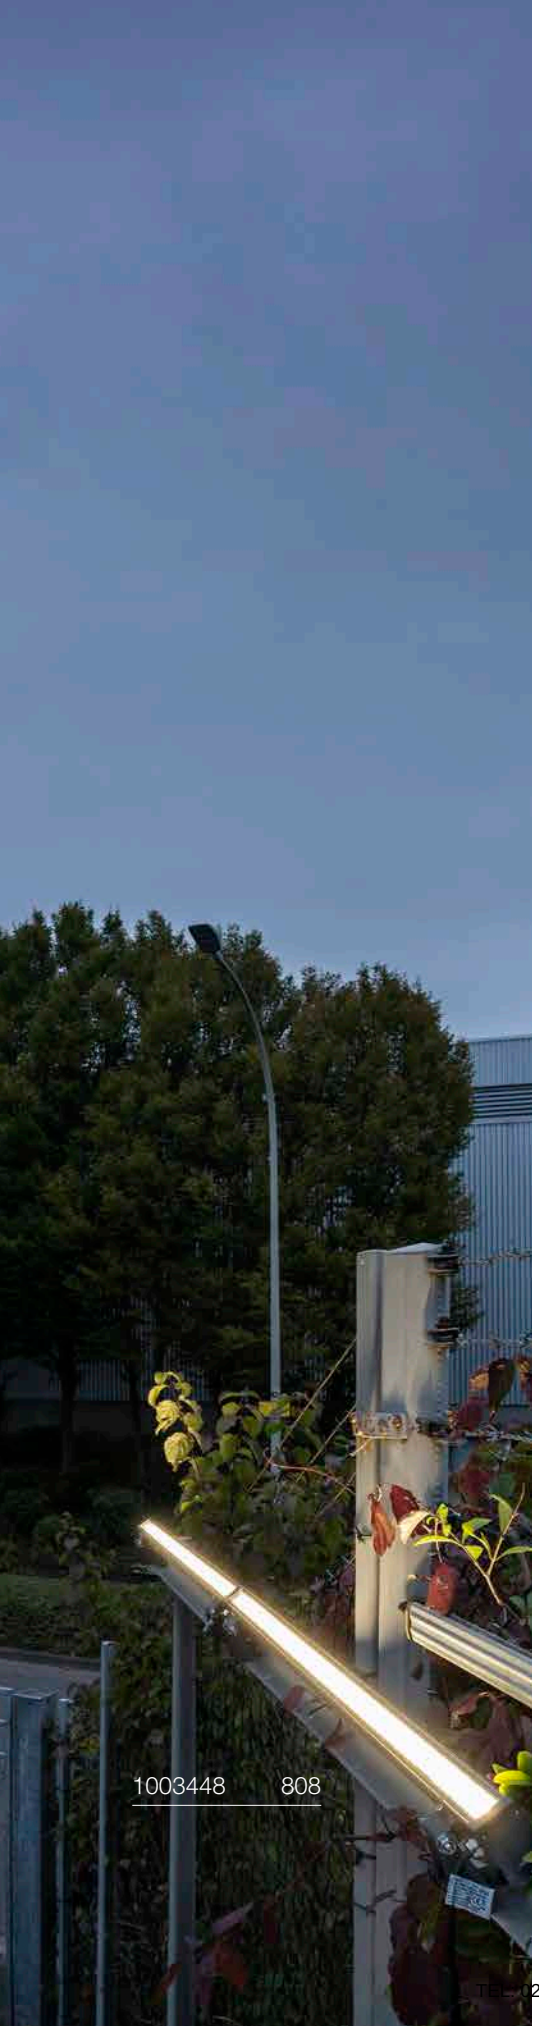

GALEN Pro 60
WL, DALI

DALI

NEW



Dali IP65 IK06 26/54° 180° 50000h L80B20 17

220-240 V ~0/50/60 Hz | 305 mA
Total wattage: 20 W
Material: aluminium/glass

- Asym. light distribution for optimum illumination of paths
- IP connection box

LED INSIDE CRI 80

Asymetrical 2300 lm|3000 K

Options	Prod. no.	GBP
anthracite	1009107	365.00

⊕

Product	Prod. no.	GBP
Wall bracket		
grey	234354	48.24

GALEN Pro 120
WL, DALI

DALI

NEW



Dali IP65 IK06 26/54° 180° 50000h L80B20 17

220-240 V ~0/50/60 Hz | 335 mA
Total wattage: 40 W
Material: aluminium/glass

- Asym. light distribution for optimum illumination of paths
- IP connection box

LED INSIDE CRI 80

Asymetrical 5150 lm|3000 K

Options	Prod. no.	GBP
anthracite	1009108	450.00

⊕

Product	Prod. no.	GBP
Wall bracket		
grey	234354	48.24

TEL:020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

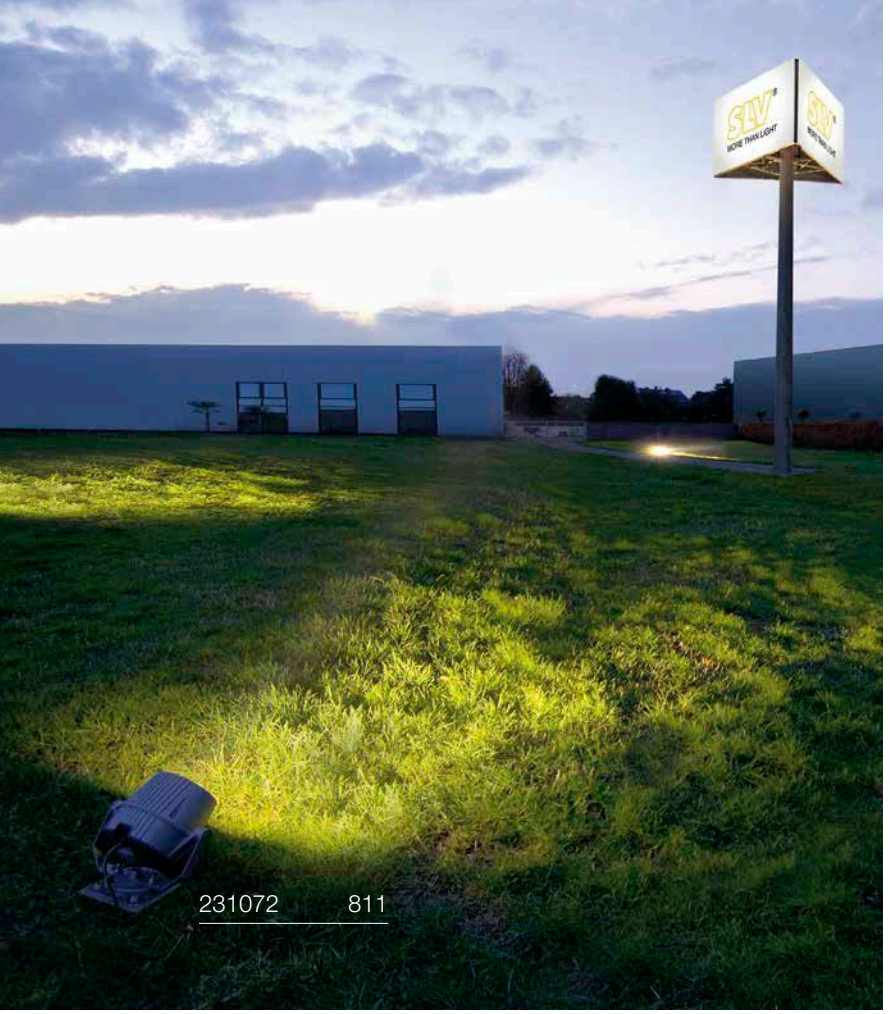

HELIA SPOT S

SP, single



220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium

- IP44 safety plug

440 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007944**	**150.00**

⊕

Product	Prod. no.	GBP
Ground spike		
◐ stainless steel	**1000736**	**19.00**

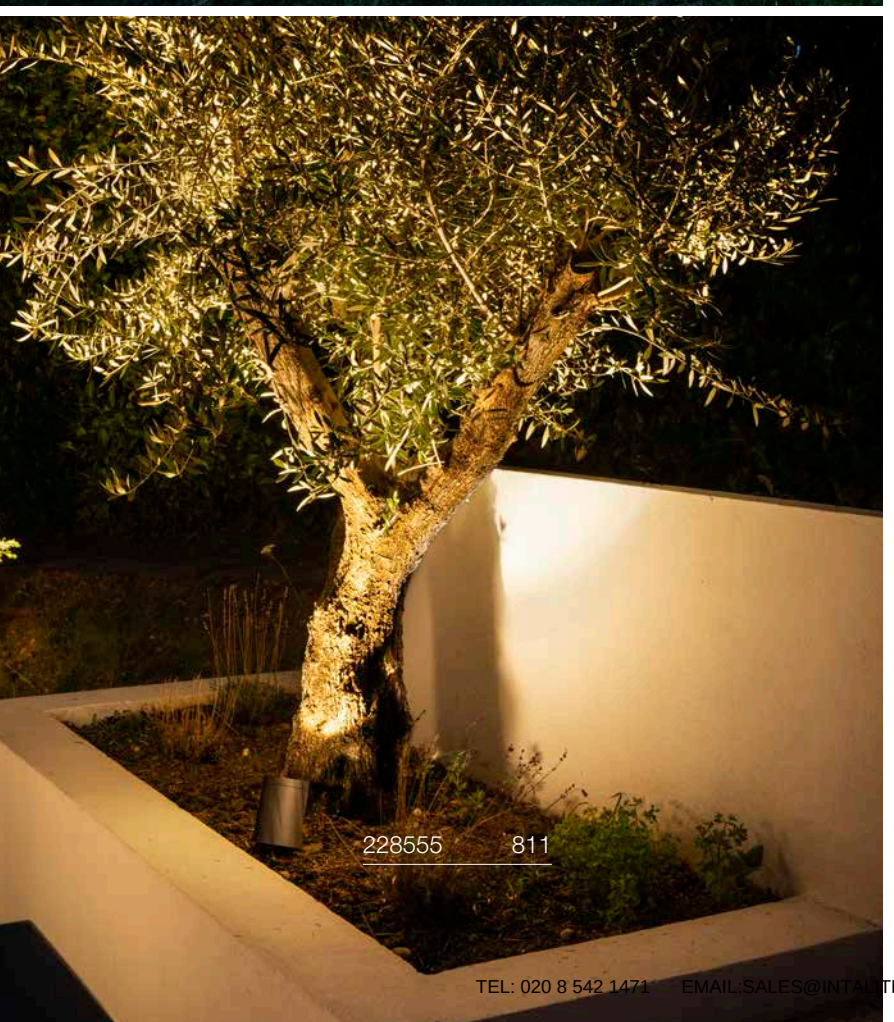

HELIA SPOT L
SP, single, PHASE



IP66 IK04 40° 320° 90° 40000h L70B50 300

220-240 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: aluminium

- IP44 safety plug

INSIDE CRI 80

1340 lm | 3000 K

Options	Prod. no.	GBP
anthracite	1007943	193.00

Product	Prod. no.	GBP
Ground spike		
stainless steel	228560	23.00

FLAC BEAM
SP



IP65 IK04 60° 120° 170° 50000h L70B50 200

220-240 V ~50/60 Hz
Total wattage: 27 W
Material: aluminium

- IP44 safety plug

INSIDE CRI 80

1600 lm | 3000 K

Options	Prod. no.	GBP
grey	1007942	419.00

SAMRINA
SP, single, GU10



IP65 IK04 280° 150

220-240 V ~50/60 Hz
Material: plastic

- Contains recycled material
- IP44 safety plug

SOCKET INSIDE 7 W

Base: GU10 | max. Ø: 6 cm | L: 6 cm

Options	Prod. no.	GBP
black	1007972	40.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NAUTILUS 10
SP, round, QPAR51



IP65 IK04 180° 150

220-240 V ~50/60 Hz
Material: aluminium

- IP44 safety plug

SOCKET INSIDE 10 W

Base: 1xGU10	L: 5.7 cm

Options	Prod. no.	GBP
grey	1007956	24.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

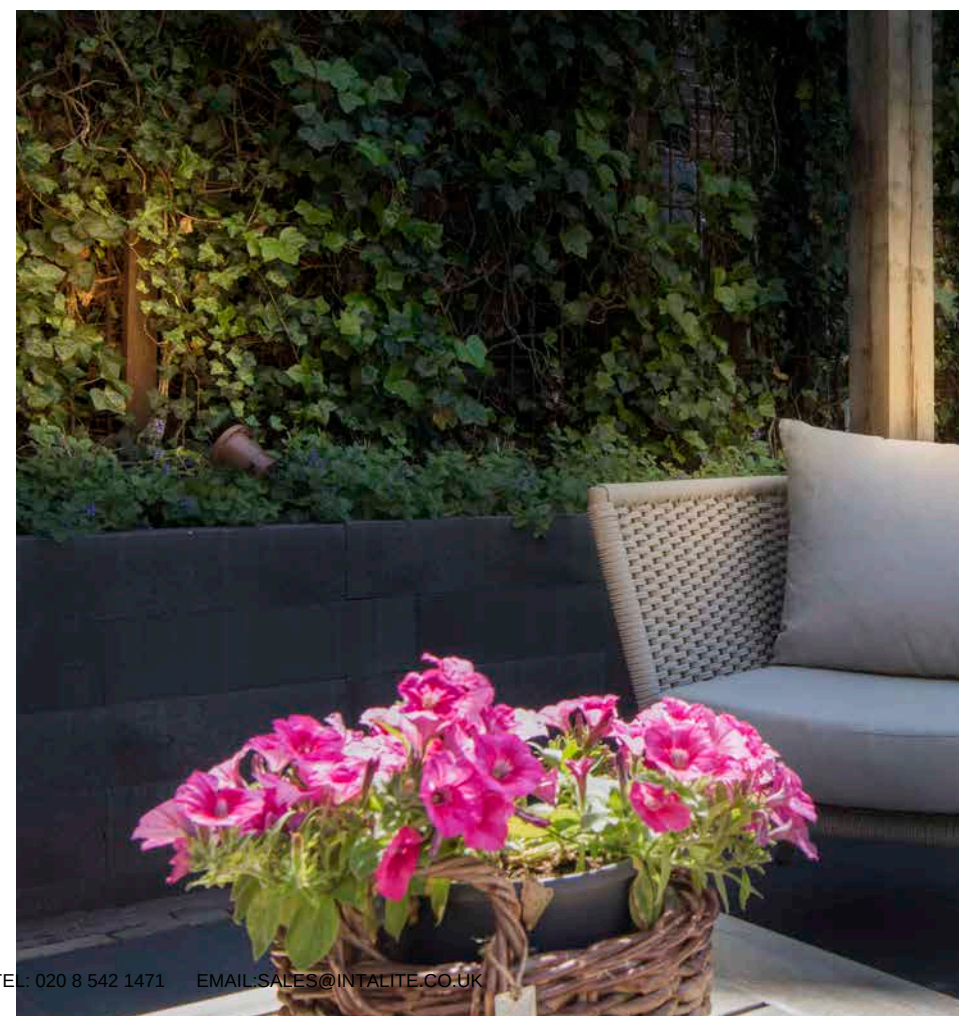

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

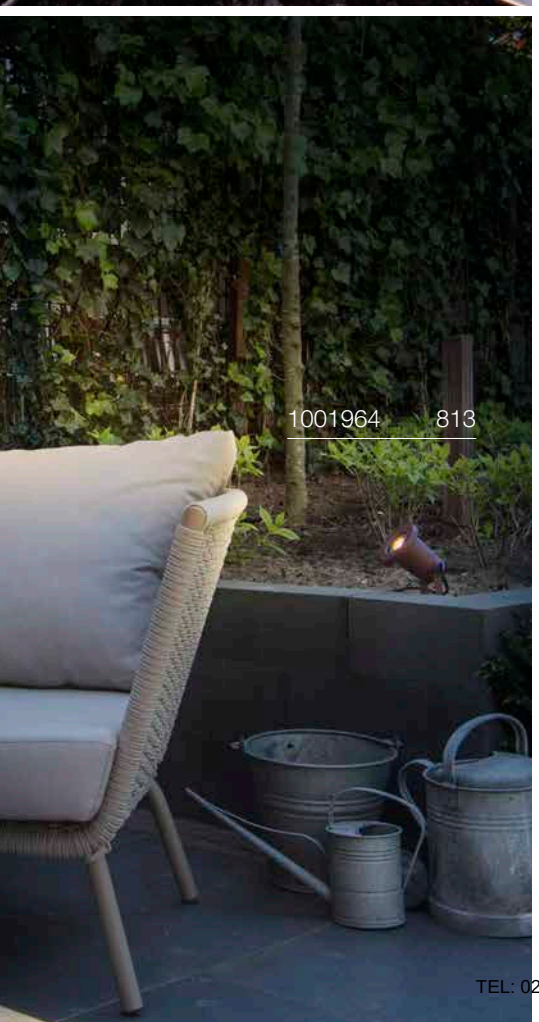

BIG NAUTILUS
SP, round, QPAR51



220-240 V ~50/60 Hz
Material: aluminium

- Earth spike made from recycled plastic
- IP44 safety plug

SOCKET INSIDE 11 W

Base: GU10 | max. Ø: 5.1 cm | L: 8.3 cm

Options	Prod. no.	GBP
black	**1007955**	**26.00**
rust	**1008030**	**26.00**
green	**1007960**	**26.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

Prod. no.: 1005077 7.00 GBP

NAUTILUS 10
SP, round, QPAR51



220-240 V ~50/60 Hz
Material: stainless steel 316

- IP44 safety plug

SOCKET INSIDE 25 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Options	Prod. no.	GBP
stainless steel	**1007957**	**85.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

Prod. no.: 1005077 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

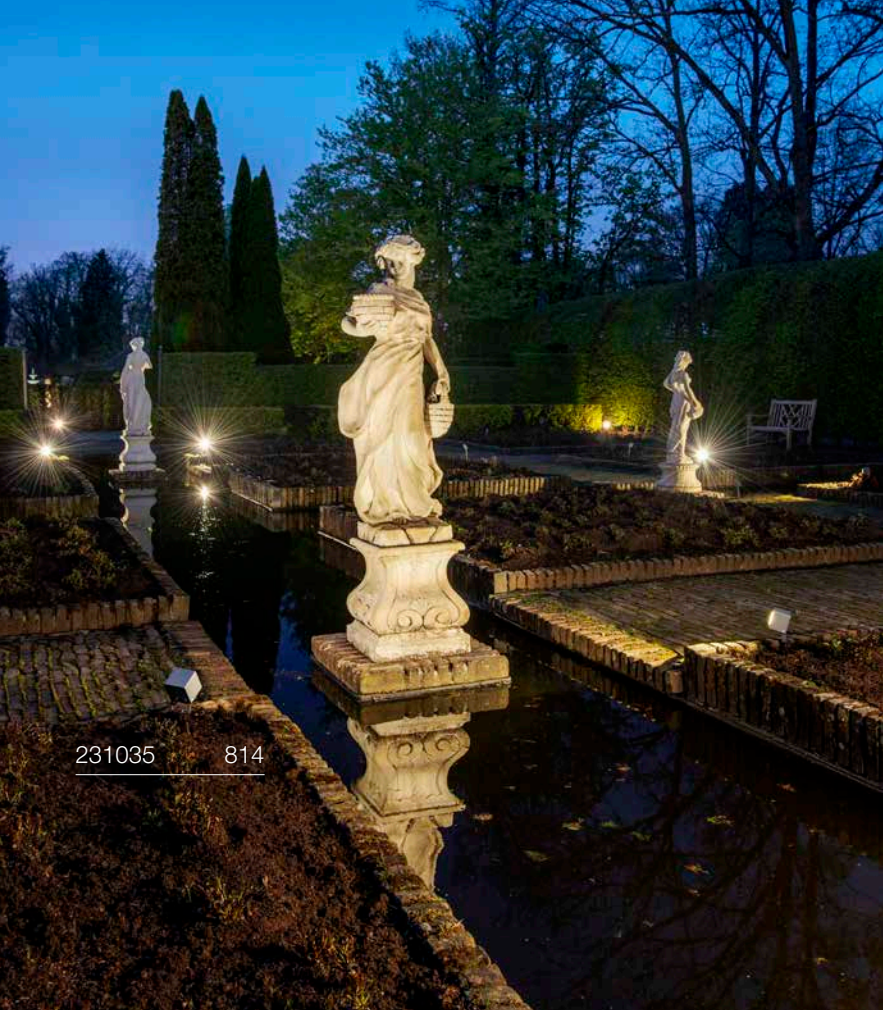

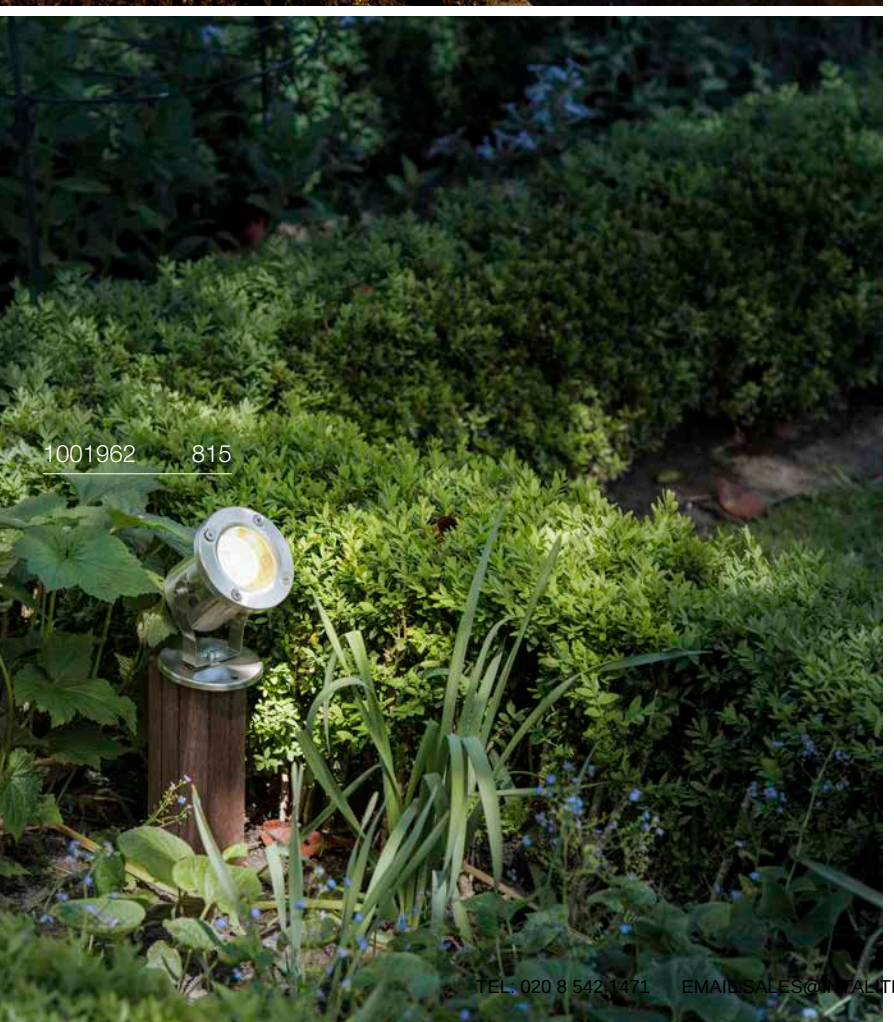

NAUTILUS 10

SP, square



100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W
Material: aluminium/glass

- IP44 safety plug

LED INSIDE CRI 80

660 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007958**	**124.00**

NAUTILUS
SP, QR-C51



IP67 IK03 180° 150

12 V 50/60 Hz
Material: stainless steel 304/glass

• open cable end

SOCKET INSIDE 35 W

Base: 1xGX5.3

Options	Prod. no.	GBP
stainless steel	229090	77.00

GU5.3 | 6 W | 36°
450 lm | 2700 K | EEC = G
6 kW/1000 h

Prod. no.: 1001574 30.00 GBP

NAUTILUS 10 SPOT
SP, QPAR51



IP55 IK03 360° 180° 150

220-240 V ~50/60 Hz
Material: stainless steel 316

• open cable end

SOCKET INSIDE 25 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

Options	Prod. no.	GBP
stainless steel	229741	85.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

Prod. no.: 1005077 7.00 GBP

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	228730	16.00

NAUTILUS 10 SPOT
SP, LED



IP55 IK04 60° 180° 30000 h L80B50

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: stainless steel 316

• IP44 safety plug

LED INSIDE CRI 80

520 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	1007959	98.00

Product	Prod. no.	GBP
Plastic ground spike		
black	900011	4.00
Mounting plate		
stainless steel	1001963	8.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

233570 817

DASAR® PROJECTOR
SP, 12/24V



12-24 V
Total wattage: 6.5 W
Material: stainless steel 316/glass

- open cable end

520 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**233570**	**208.00**

Product	Prod. no.	GBP
Stainless steel 316 ground spike		
stainless steel	**233580**	**17.00**
Stainless steel 316 mounting plate		
stainless steel	**233582**	**23.00**
Plastic ground spike		
black	**900011**	**4.00**
LED power supply, 15W | 12V		
white	**1005444**	**25.00**
LED power supply, 15 W | 24V		
white	**1005445**	**25.00**

DASAR® 920
SP, 230V



220-240 V ~50/60 Hz | 400 mA
Total wattage: 4.6 W
Material: stainless steel 316/glass

- IP44 safety plug

300 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007934**	**260.00**

Product	Prod. no.	GBP
Stainless steel 316 ground spike		
stainless steel	**233580**	**17.00**
Stainless steel 316 mounting plate		
stainless steel	**233582**	**23.00**
Plastic ground spike		
black	**900011**	**4.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

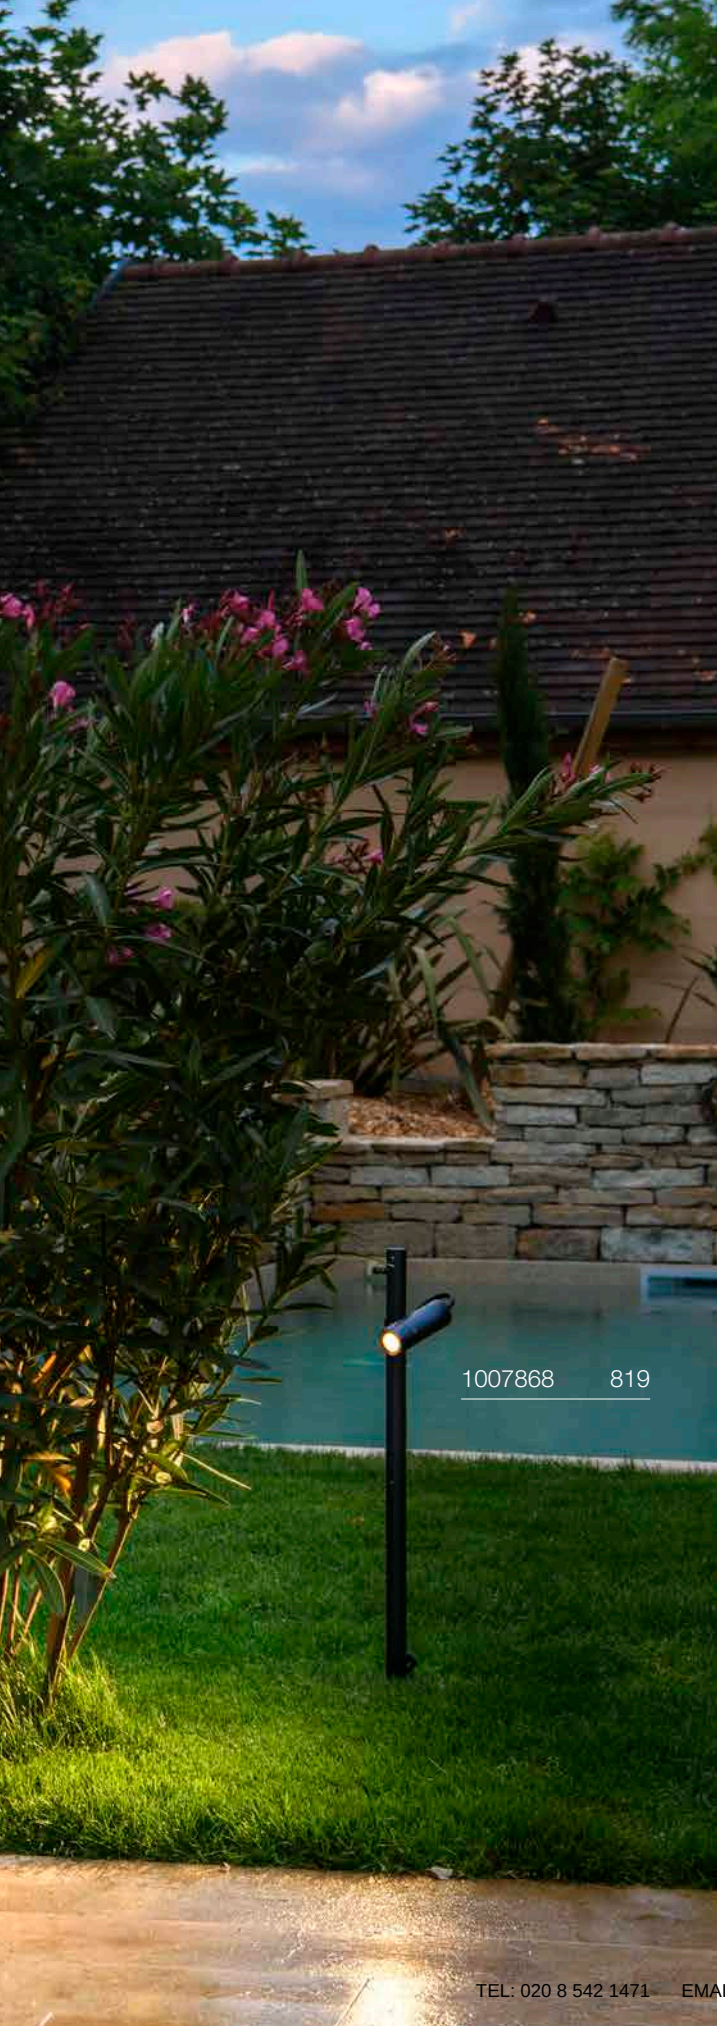

1007868 819

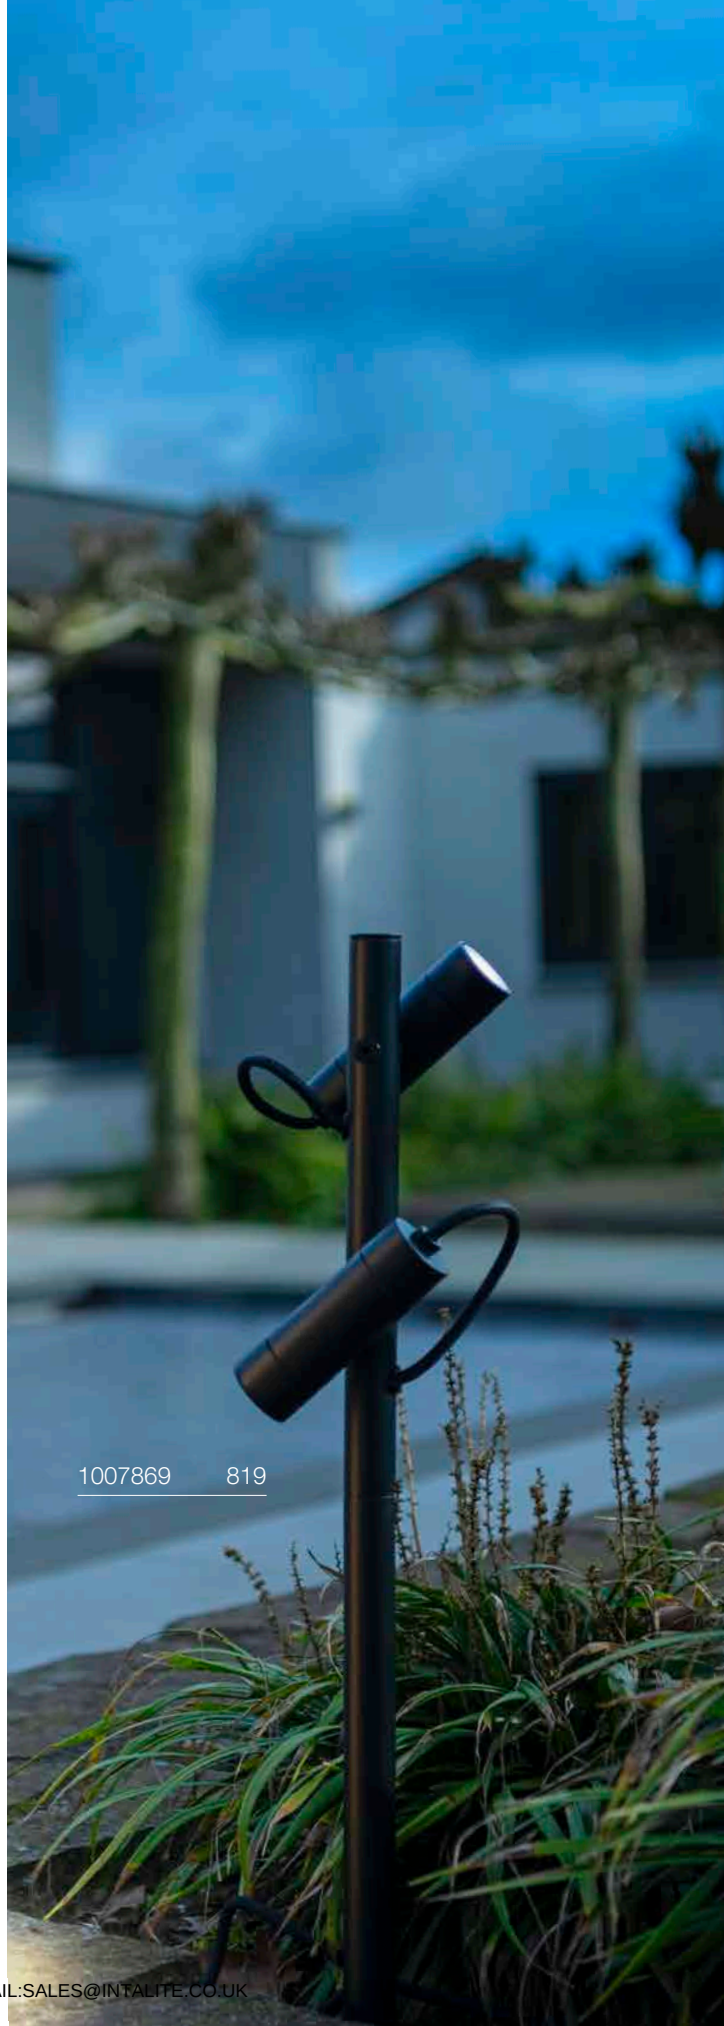

1007869 819

HELIA SLIM
Pole, single

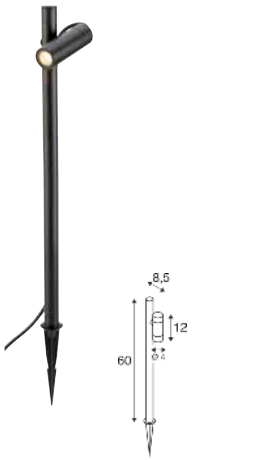

IP65 IK03 38° 180° 50000h L70B50 150

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6 W
Material: aluminium

- IP44 safety plug

LED INSIDE CRI 80

450 lm | 3000 K

Options	Prod. no.	GBP
● black	**1007868**	**119.00**

HELIA SLIM
Pole, double

IP65 IK03 2x 38° 180° 50000h L70B50 150

220-240 V ~50/60 Hz | 500 mA
Total wattage: 12 W
Material: aluminium

- IP44 safety plug

LED INSIDE CRI 80

Down 450 lm | 3000 K

Options	Prod. no.	GBP
● black	**1007869**	**145.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

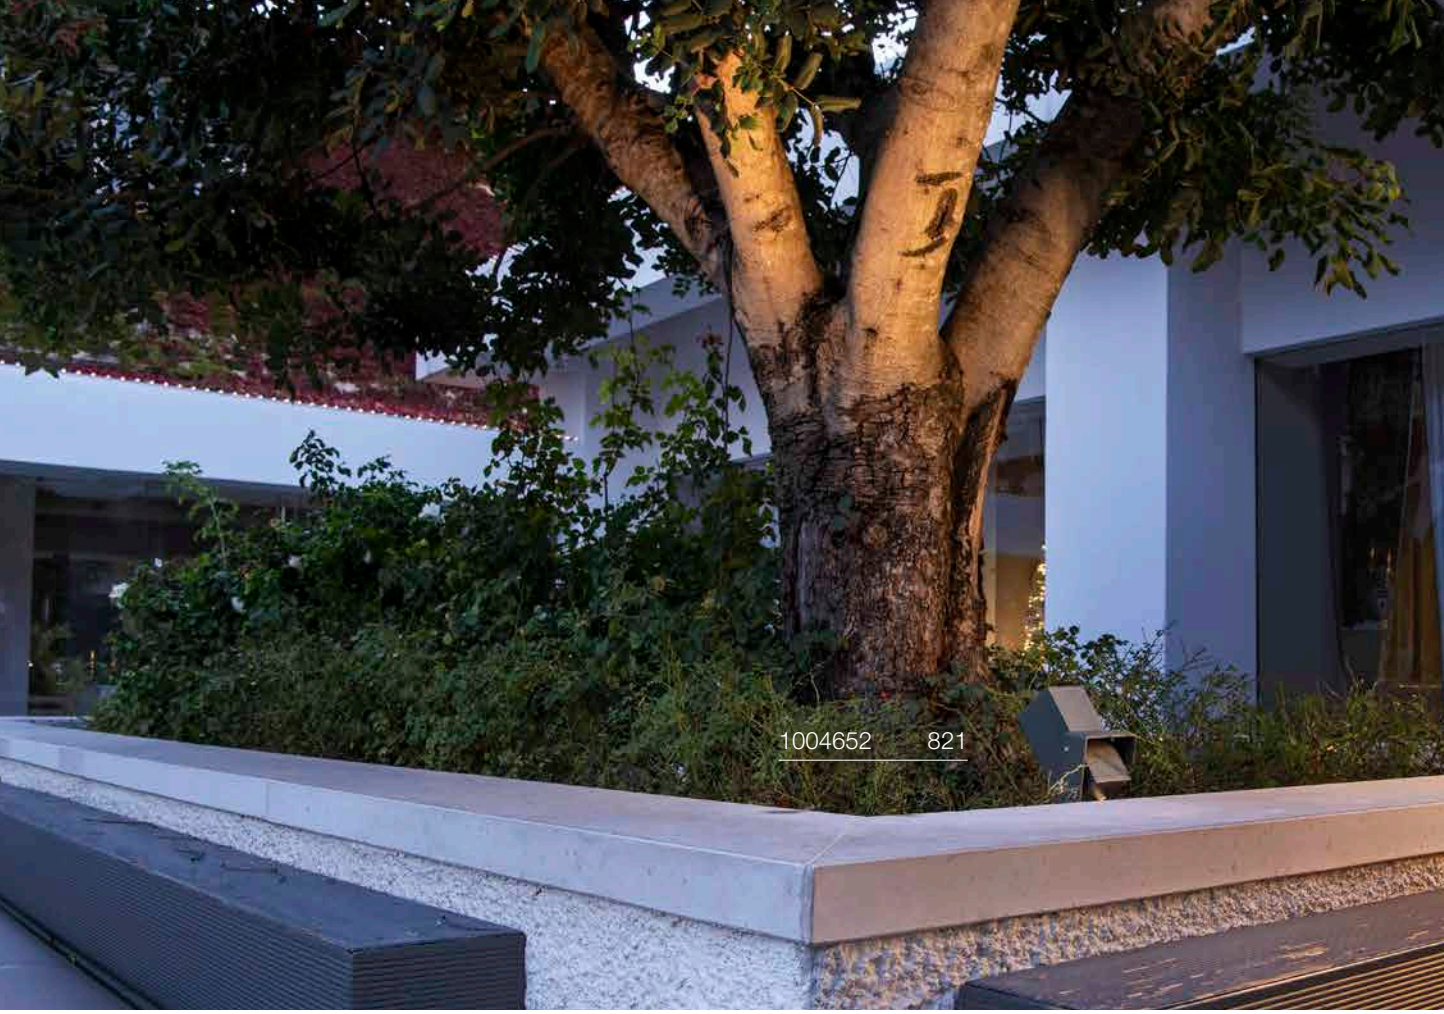
1004652 821

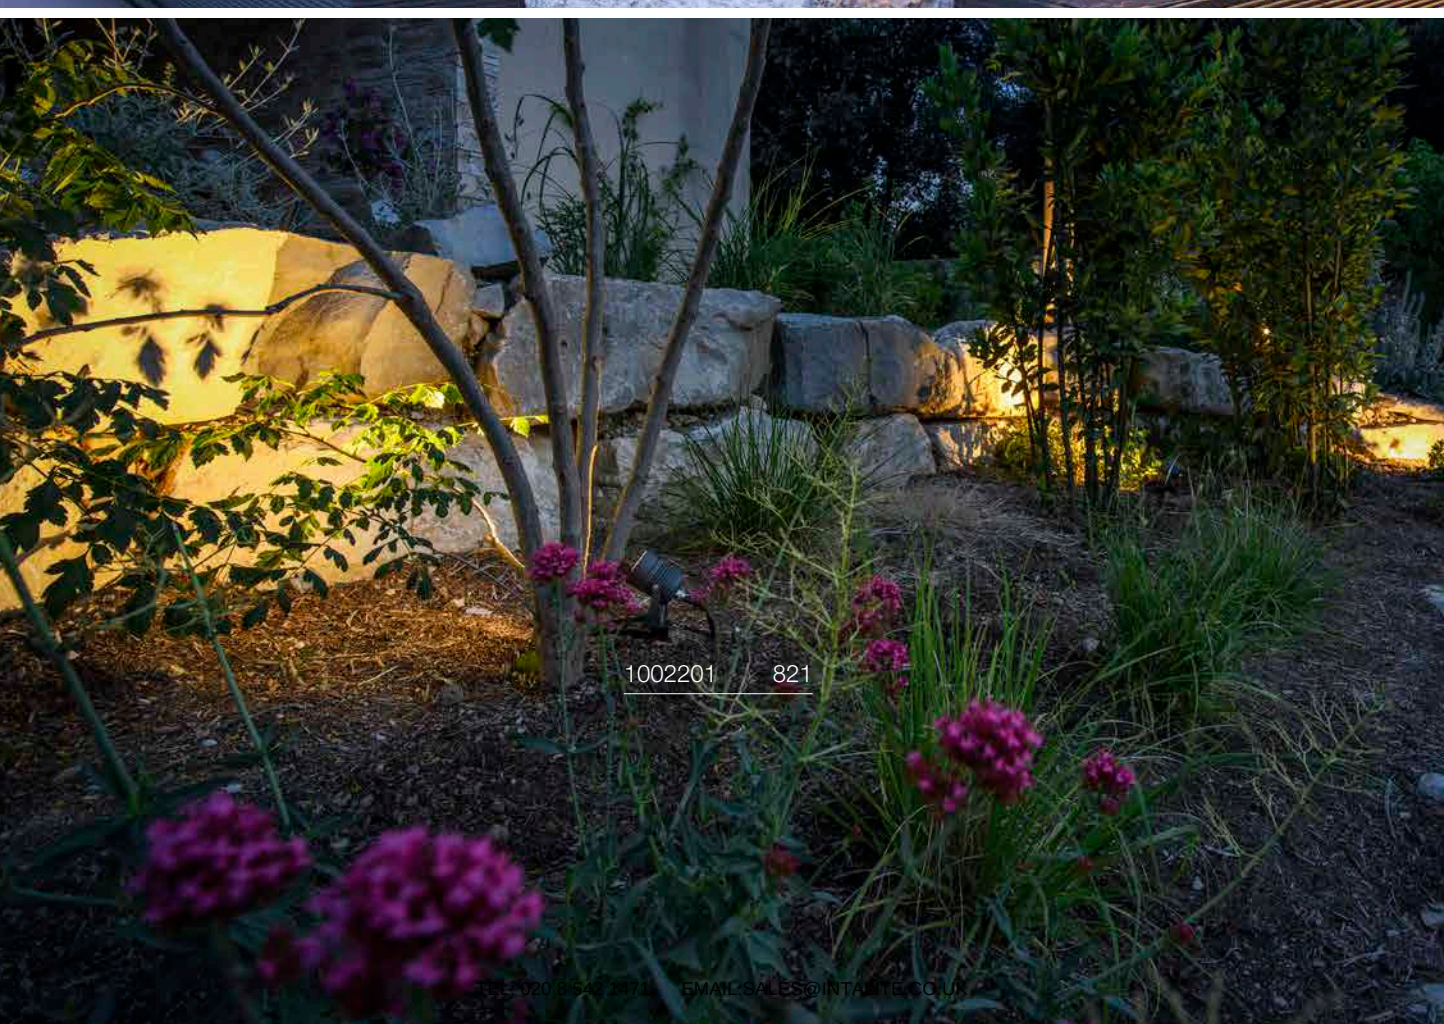
1002201 821

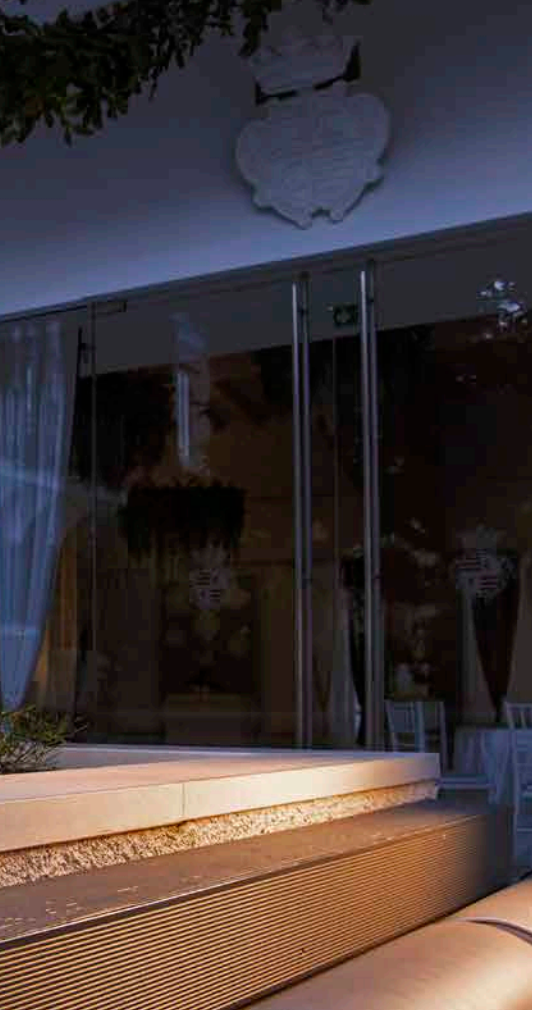

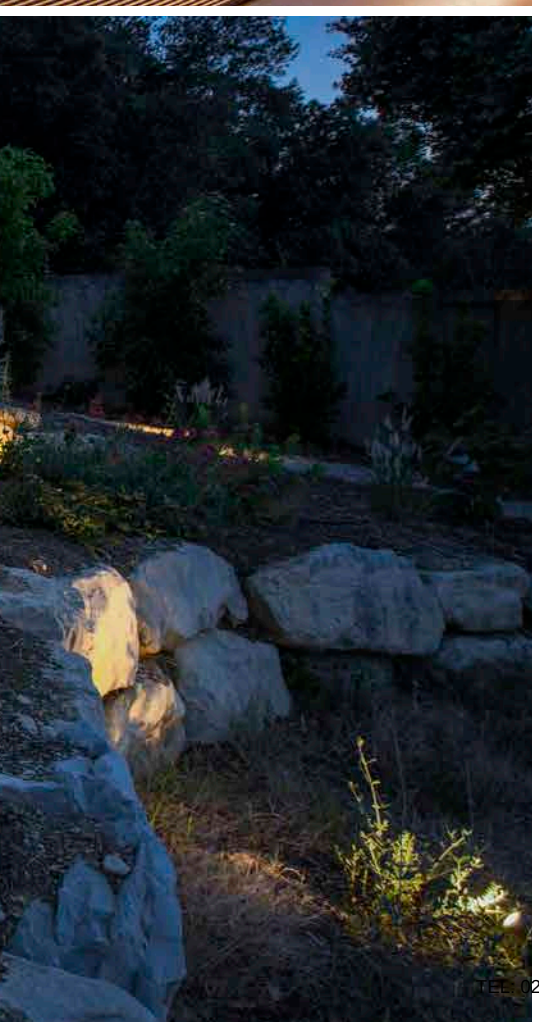

THEO BRACKET
SP



IP44/ IP65 | IK02 | 70° | 150

220-240 V ~50/60 Hz
Material: aluminium/glass

- IP44 safety plug

SOCKET INSIDE | 7 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Options	Prod. no.	GBP
anthracite	**1007981**	**55.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: **1005077** **7.00 GBP**

LED SPIKE
SP



IP55 | IK06 | 40° | 30 000 h L80B80

100-240 V ~50/60 Hz | 240 mA
Total wattage: 6 W
Material: aluminium/glass

- IP44 safety plug

LED INSIDE | CRI 80

400 lm | 3000 K

Options	Prod. no.	GBP
anthracite	**1007949**	**61.00**
rust	**1007950**	**61.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

231535 823

SITRA 360 SPIKE
SP, single, TCR-TSE



IP44 IK04 90° 150

220-240 V ~50/60 Hz
Material: aluminium/glass

- Earth spike made from recycled plastic
- IP44 safety plug

SOCKET INSIDE 9 W

Base: 1xG53	max. Ø: 7.5 cm	L: 3.5 cm

Options	Prod. no.	GBP
● anthracite	**1007973**	**55.00**

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G
7 kW/1000 h

C,L

Prod. no.: 1005272 10.00 GBP

SITRA 360 SPIKE
SP, double, TCR-TSE



IP44 IK04 90° 90° 150

220-240 V ~50/60 Hz
Material: aluminium/glass

- IP44 safety plug

SOCKET INSIDE 9 W

Base: 2xG53	max. Ø: 7.5 cm	L: 3.5 cm

Options	Prod. no.	GBP
● anthracite	**1007974**	**164.00**

GX53 | 6 W | 120°
490 lm | 3000 K | EEC = G
7 kW/1000 h

C,L

Prod. no.: 1005271 10.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006327 830

SOCKET

PHOTONI | 827

SOCKET

LED

CUBE | 828

LED

ESKINA FRAME | 829

ENOLA® OCULUS | 830

ENOLA® ROUND | 831

LED

ENOLA® SQUARE | 832

LED

SOCKET

BIG THEO | 833

LED

OVALISK | 834

SOCKET

MOLAT | 835

SITRA | 836

ROX | 837

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

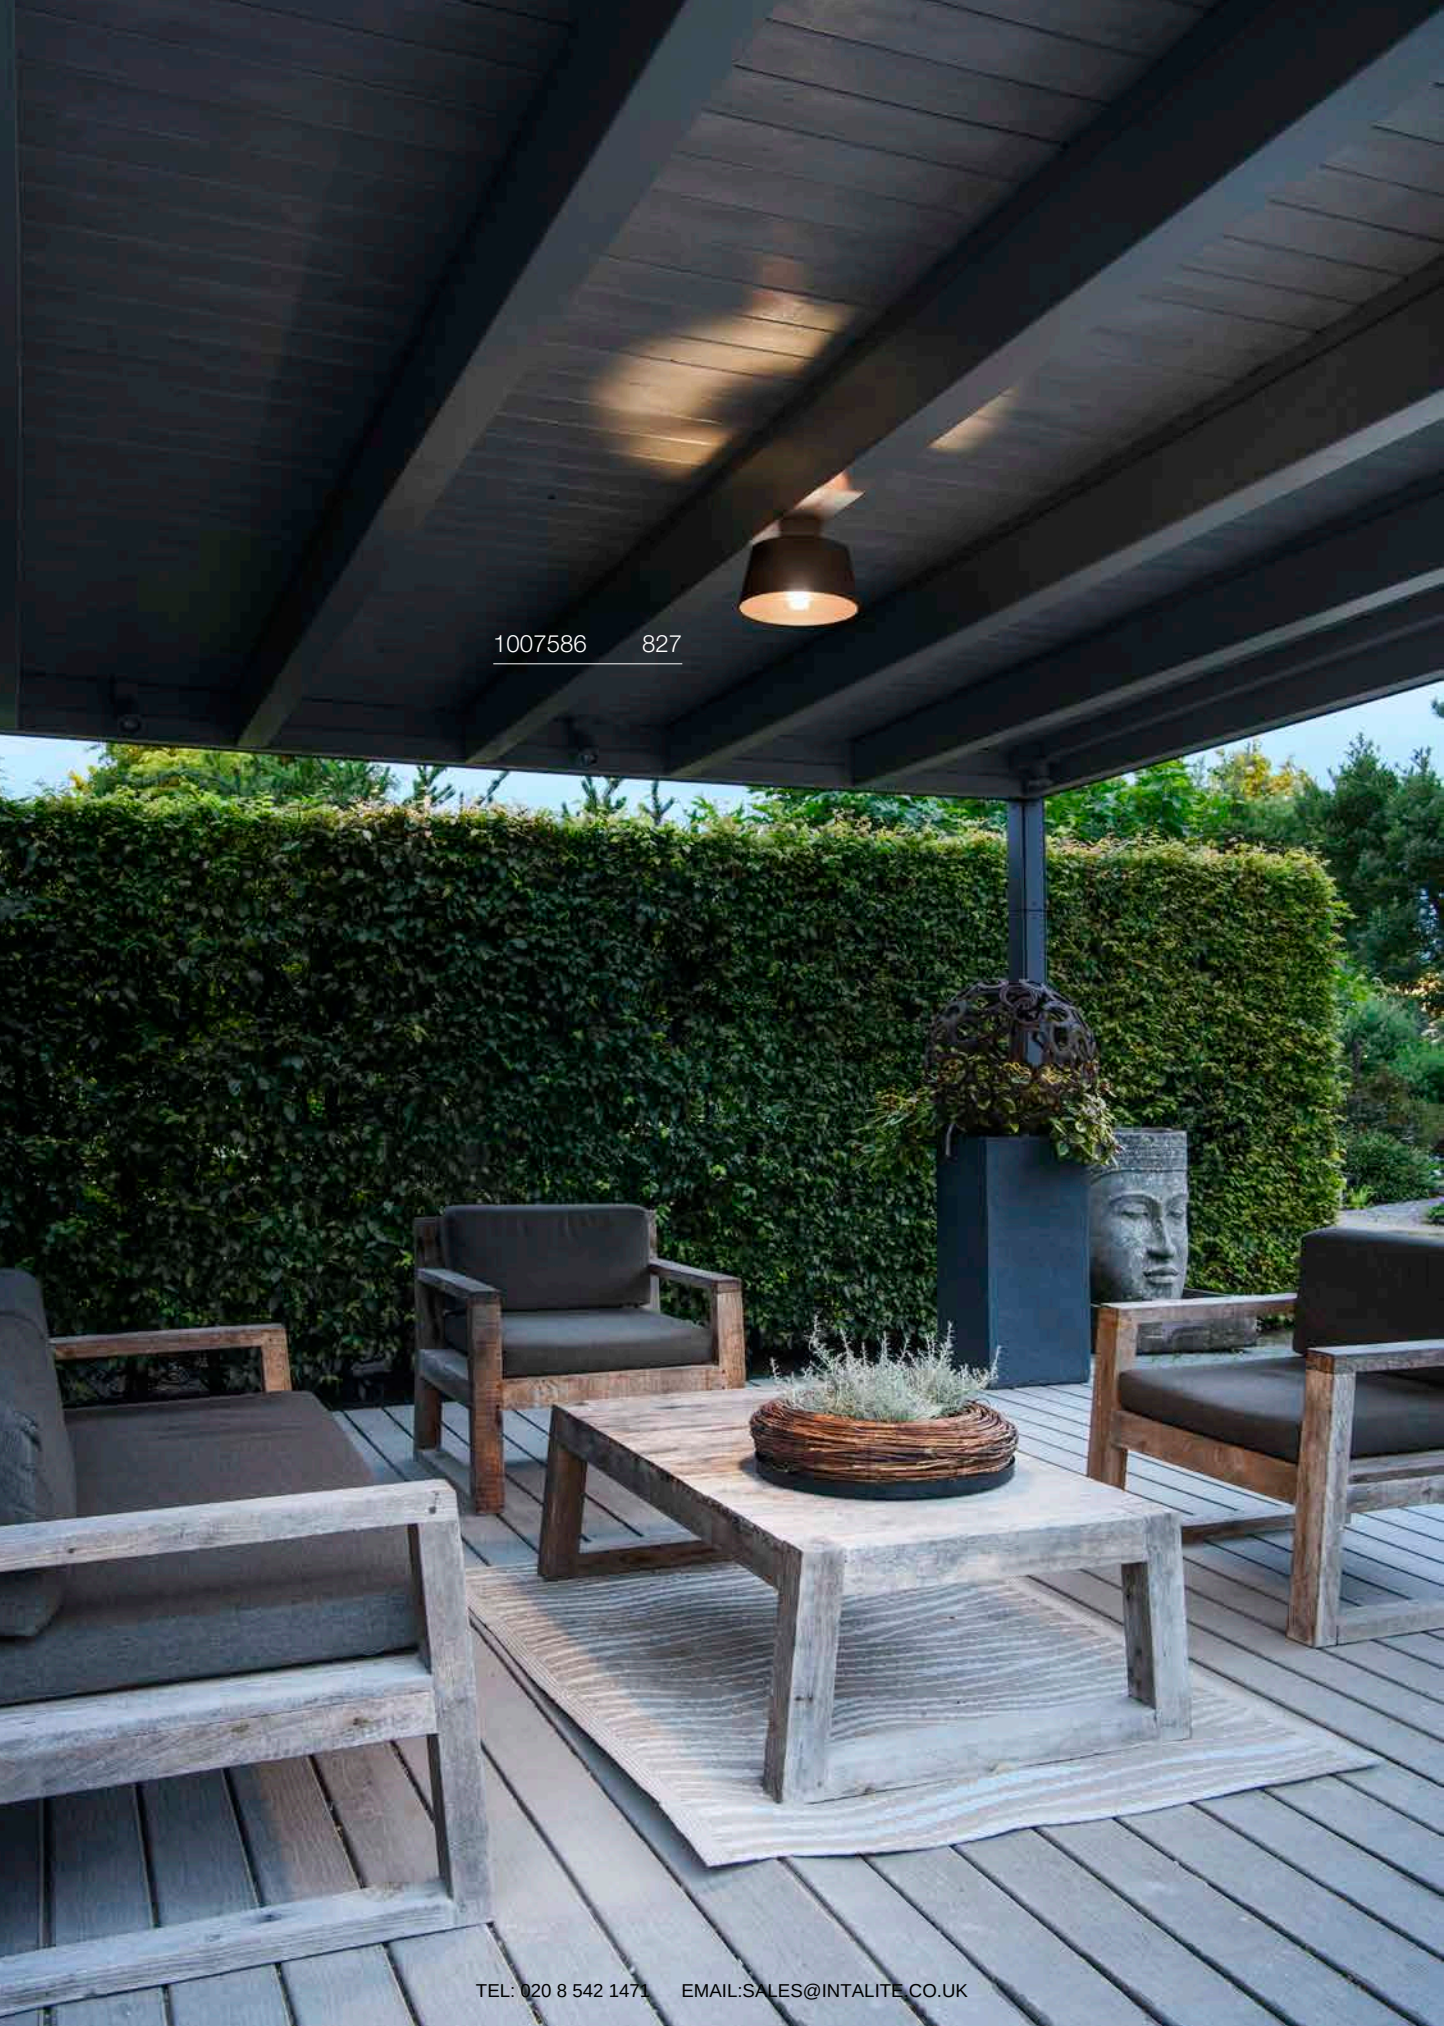

1007586 827

PHOTONI CYL
CL, E27



IP65 IK08

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Options	Prod. no.	GBP
● black	**1008199**	**85.00**
● rust	**1008200**	**85.00**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A
4 kW/1000h

Prod. no.: 1008641 6.50 GBP

PHOTONI
CL, E27



IP65 IK08

220-240 V ~50/60 Hz
Material: aluminium

- Sea-air resistant

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Options	Prod. no.	GBP
● black	**1007586**	**85.00**
● rust	**1007582**	**85.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000h

Prod. no.: 1005289 9.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CUBE
CL, PHASE



IP65 IK04 80° 50000 h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium

- The light colour must be set prior to installation

LED INSIDE CRI 80

1000 lm | 2700 K	1200 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007461**	**118.00**

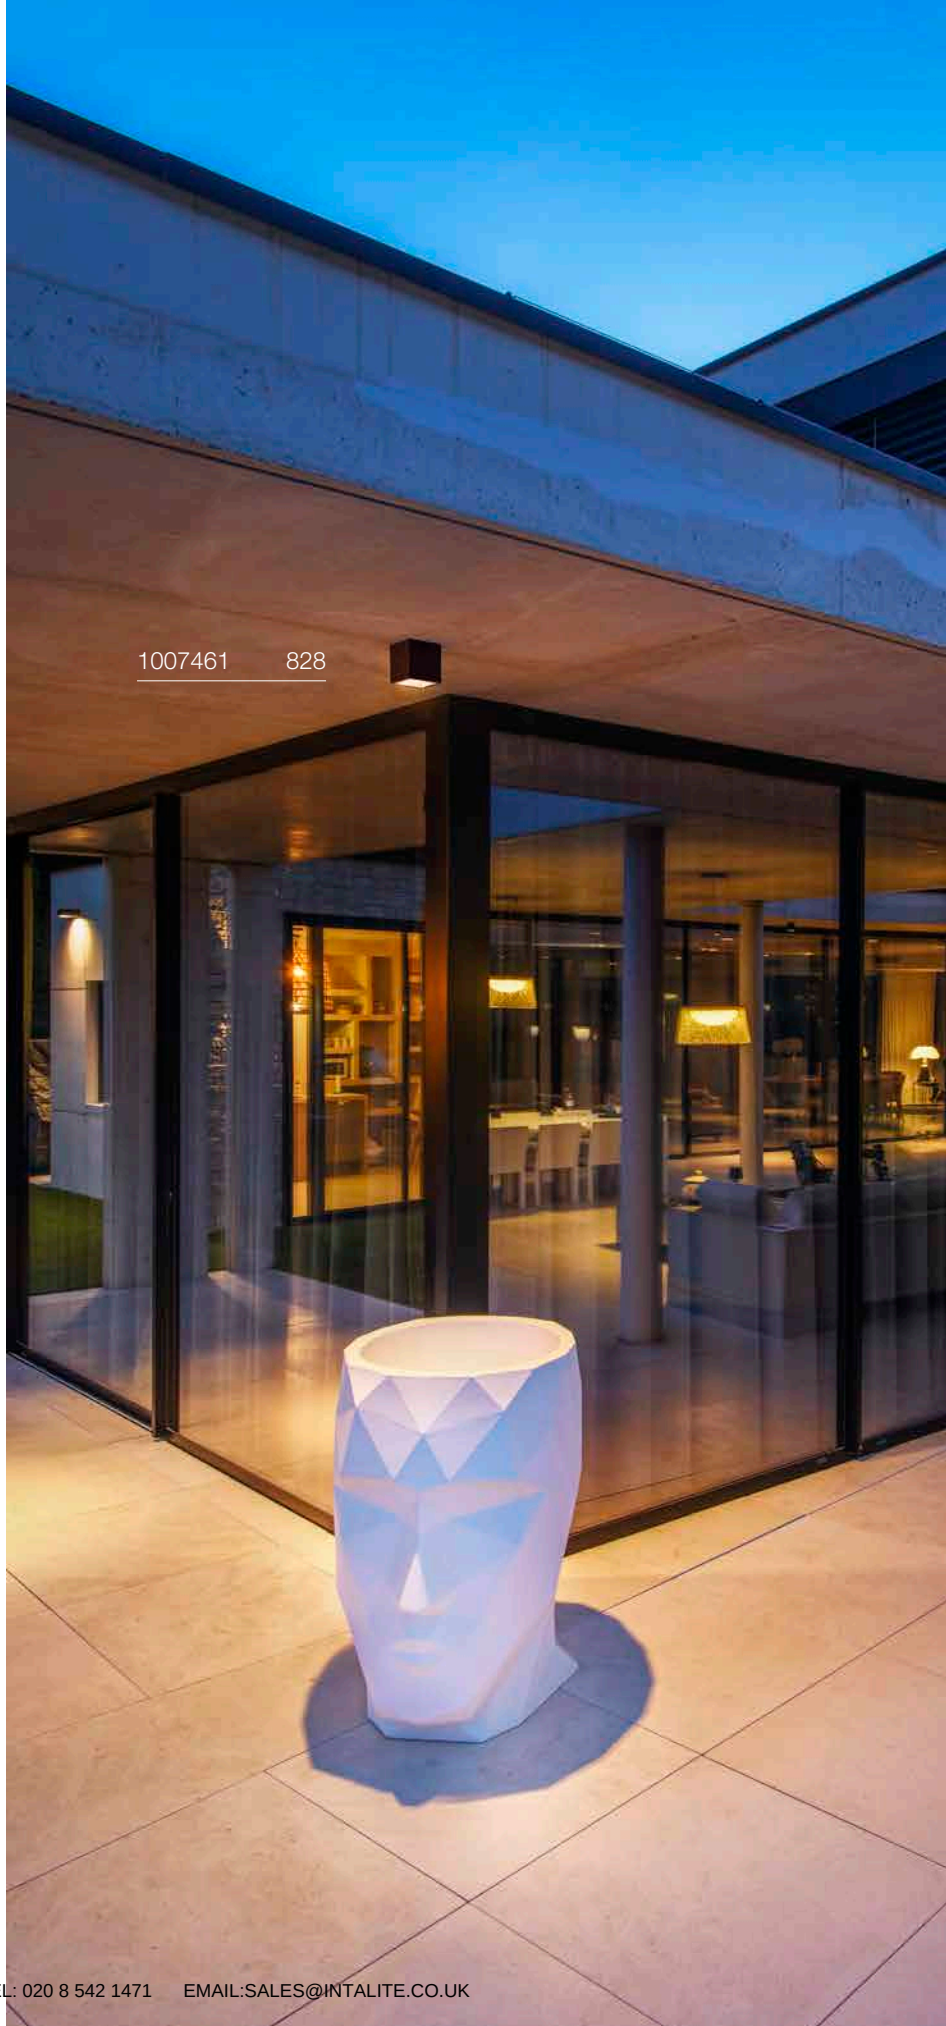

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

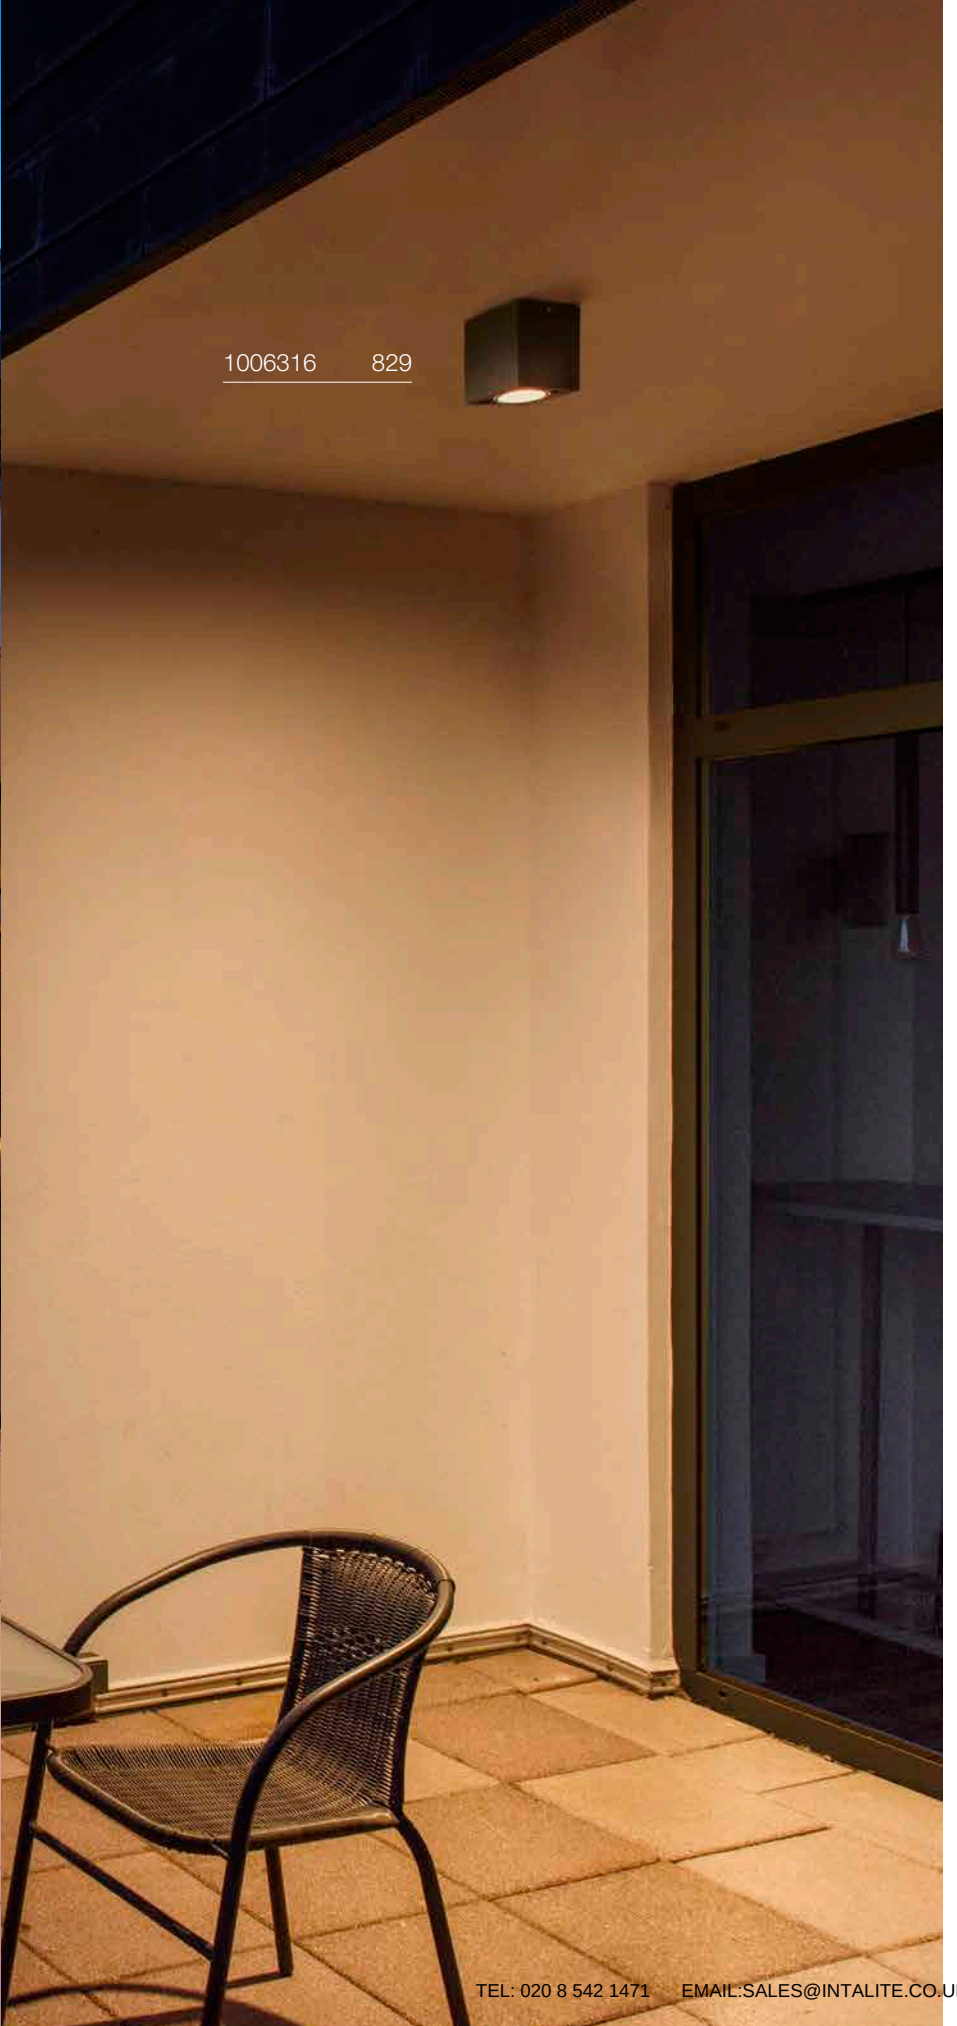

ESKINA FRAME
CL, single, PHASE



220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Light head is pivoting

LED INSIDE CRI 80

Direct	1100 lm | 3000 K	1200 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1006316**	**156.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ENOLA® OCULUS
CL



IP65 IK03 100° 30000h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium/glass

- The light colour must be set prior to installation

LED INSIDE CRI 90

	1000 lm | 3000 K	1100 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1006327**	**205.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1003479**	**8.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ENOLA® ROUND S
CL

IP65 IK06 38° 30000 h L70B50 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9 W
Material: aluminium/glass

- The light colour must be set prior to installation

LED INSIDE CRI 90

540 lm|3000 K | 610 lm|4000 K

Options	Prod. no.	GBP
anthracite	1003426	148.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1003479	8.00

ENOLA® ROUND M
CL

IP65 IK06 38° 30000 h L70B50 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CRI 90

840 lm|3000 K | 960 lm|4000 K

Options	Prod. no.	GBP
anthracite	1003427	188.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1003479	8.00
Lens 19°		
black	1005205	36.00
Asymmetrical lens		
black/chrome	1005206	36.00
Reflector 60°		
chrome	1005207	22.00

ENOLA® ROUND L
CL

IP65 IK06 38° 30000 h L70B50 10

220-240 V ~50/60 Hz | 900 mA
Total wattage: 36 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

3200 lm|3000 K | 3500 lm|4000 K

Options	Prod. no.	GBP
anthracite	1003442	268.00

⊕

Product	Prod. no.	GBP
Spacer		
anthracite	1003479	8.00
Reflector 60°		
chrome	1005263	19.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ENOLA® SQUARE S
CL



IP65 IK06 38° 30000 h L70B50 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9 W
Material: aluminium/glass

- The light colour must be set prior to installation

LED INSIDE CRI 90

540 lm | 3000 K	610 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1003420**	**148.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1003479**	**8.00**

ENOLA® SQUARE M
CL



IP65 IK06 38° 30000 h L70B50 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CRI 90

840 lm | 3000 K	960 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1003421**	**188.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1003479**	**8.00**
Lens 19°		
● black	**1005205**	**36.00**
Asymmetrical lens		
◐ black/chrome	**1005206**	**36.00**
Reflector 60°		
◑ chrome	**1005207**	**22.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

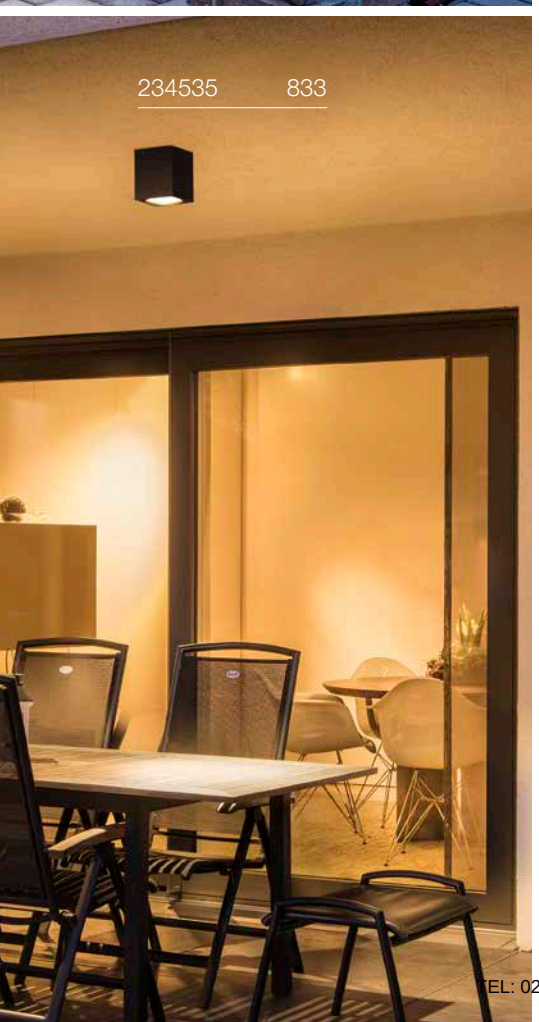

BIG THEO
CL



IP44 IK02 24° 30000h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium/glass

LED INSIDE CRI 80

2000 lm|3000 K

Options	Prod. no.	GBP
● anthracite	**234535**	**180.00**

BIG THEO
CL, QPAR111





IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
● anthracite	**229555**	**107.00**
○ white	**229551**	**107.00**
● grey	**229554**	**107.00**

GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F
13 kW/1000h

C,L

Prod. no.: 1005278 48.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

OVALISK
CL



IP65 IK02 30000 h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.9 W
Material: aluminium/glass

- The light colour must be set prior to installation

LED INSIDE CRI 80

	540 lm | 3000 K	570 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1004677**	**241.00**

1004677 834

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MOLAT
CL, E27

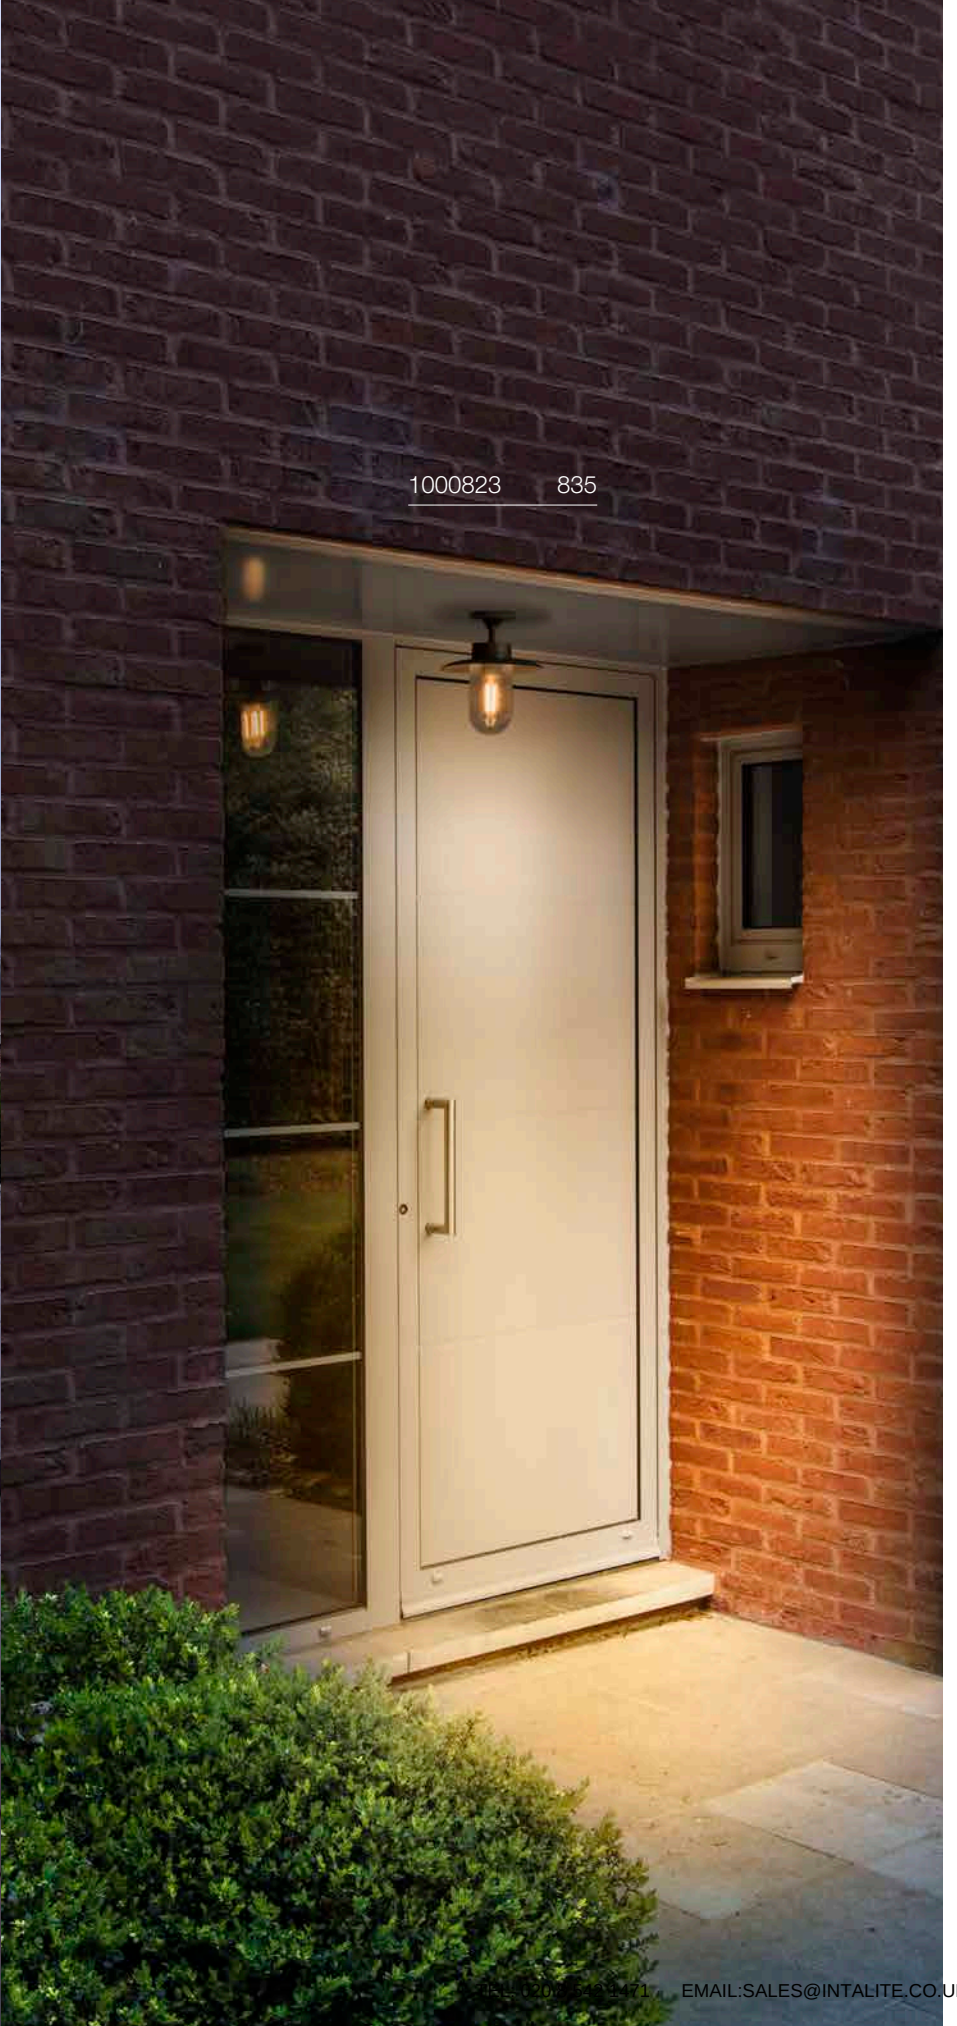



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 14.5 cm

Options	Prod. no.	GBP
● anthracite	**1000823**	**111.00**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kW/1000h

Prod. no.: **1005265** **23.00 GBP**

TEL:020 8543 9471 EMAIL:SALES@INTALITE.CO.UK

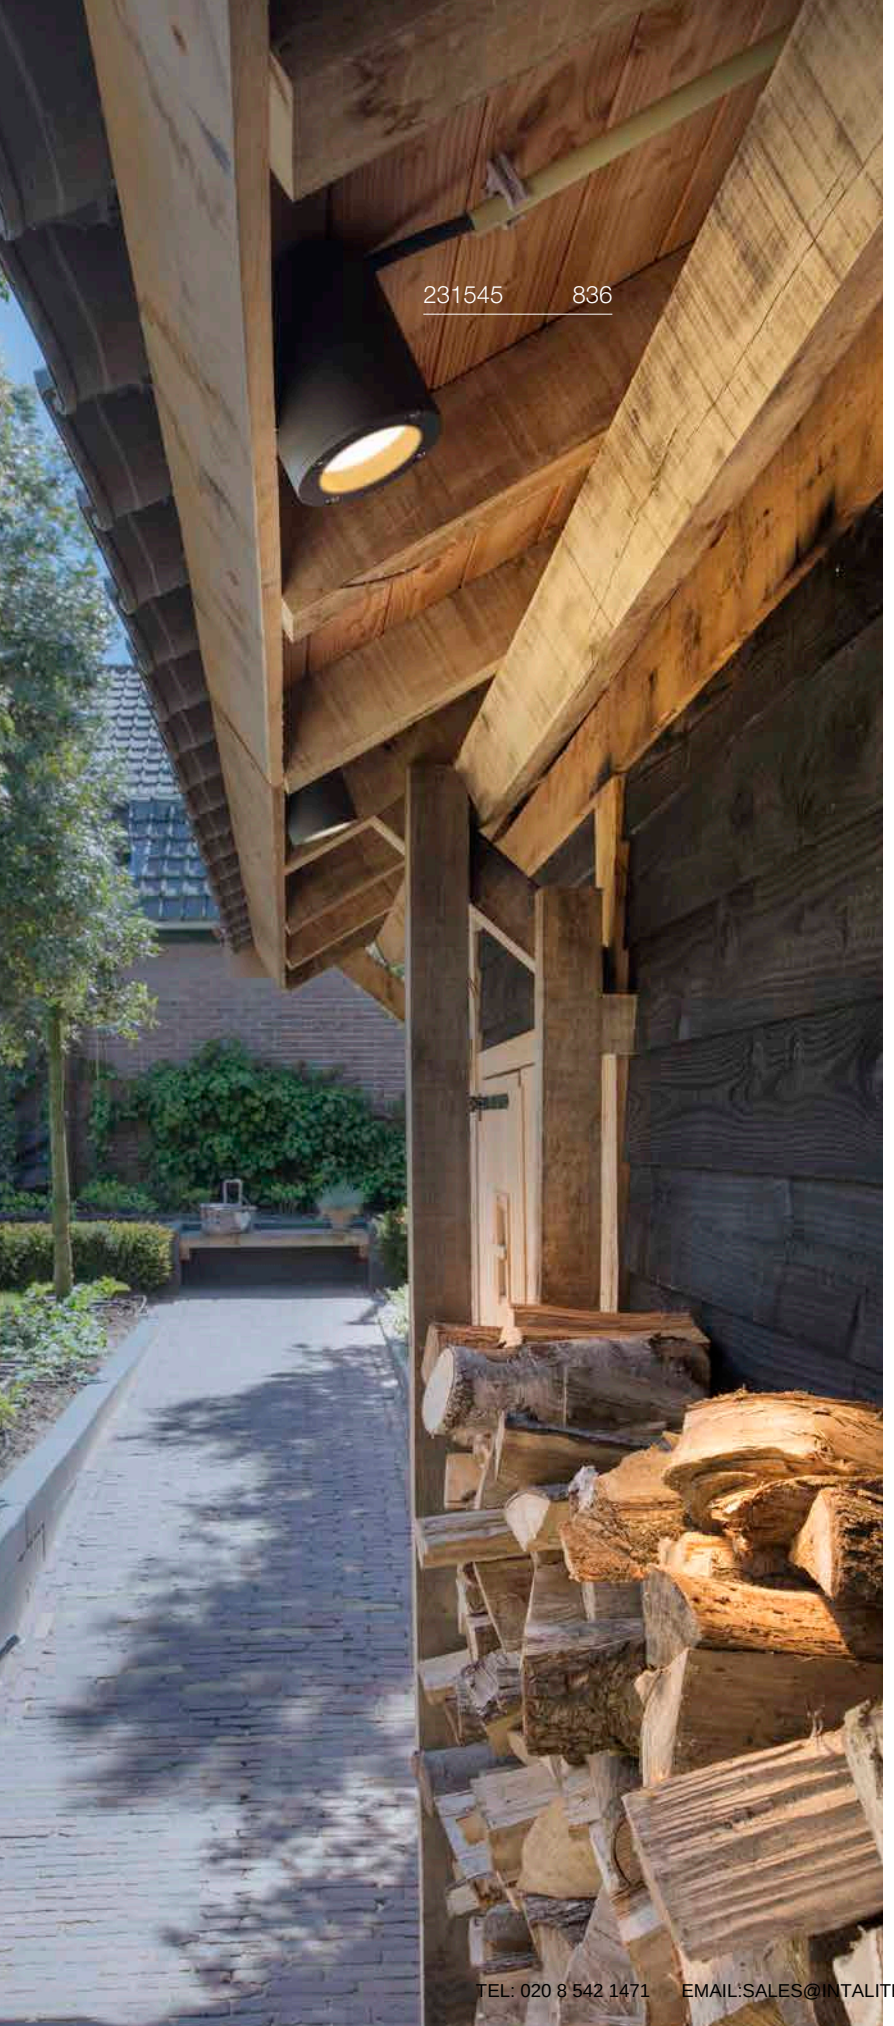

SITRA
CL, TCR-TSE



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 9 W

Base: 1xG53 | max. Ø: 7.5 cm | L: 3.5 cm

Options	Prod. no.	GBP
● anthracite	**231545**	**77.00**
○ white	**231541**	**77.00**

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G
7 kW/1000h

C,L

Prod. no.: **1005272** **10.00 GBP**

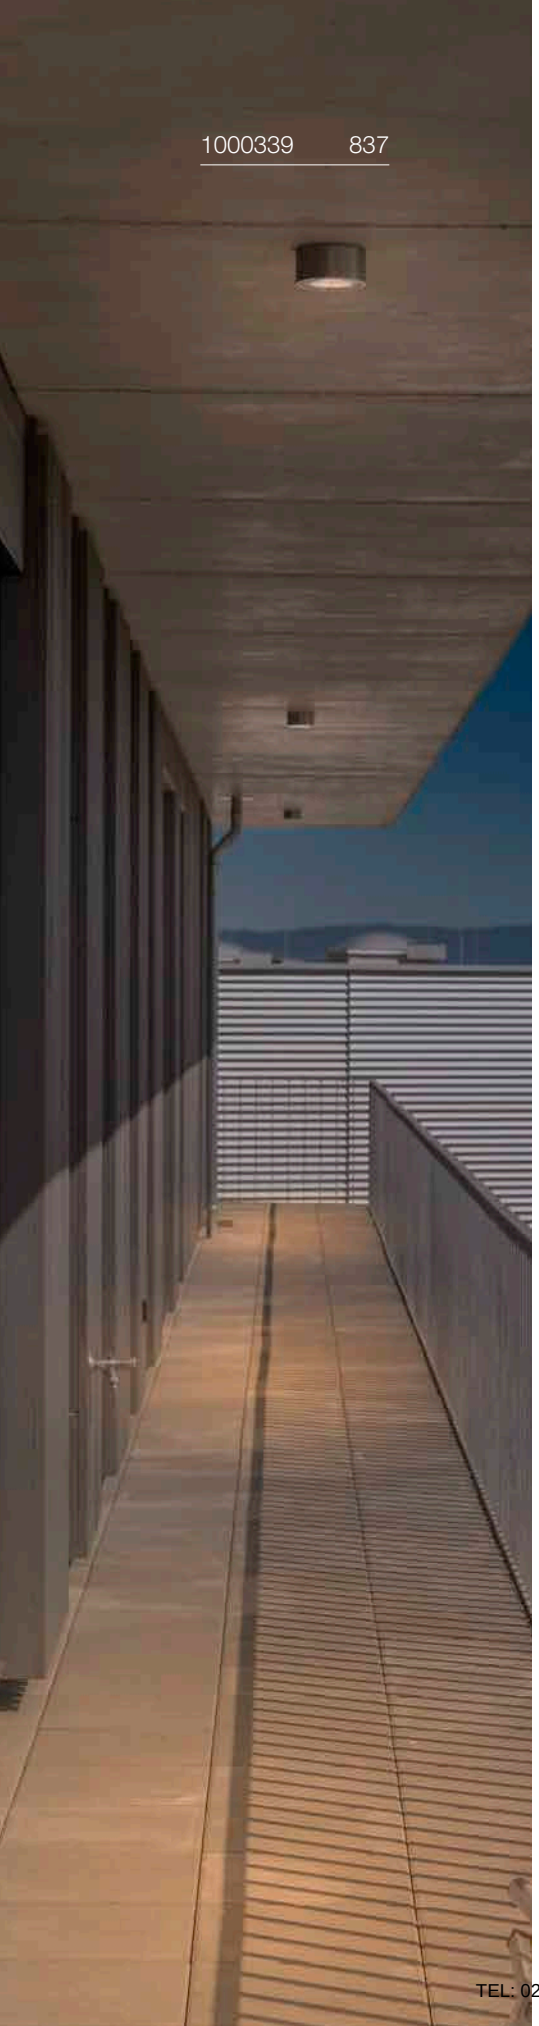

ROX
CL, QPAR111



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 50 W

Base: 1xGU10

Options	Prod. no.	GBP
aluminium	**1000332**	**113.00**

GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F
13 kW/1000h

C,L

Prod. no.: 1005278 48.00 GBP

ROX
CL, GX53



IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 11 W

Base: 1xG53 max. Ø: 7.5 cm | L: 3.5 cm

Options	Prod. no.	GBP
aluminium	**1000339**	**139.00**

GX53 | 6 W | 120°
490 lm | 3000 K | EEC = G
7 kW/1000h

C,L

Prod. no.: 1005271 10.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010107 859

R–CUBE | 843

S–CUBE | 843

PHOTONI | 844

MODELA | 845

LID I | 846

LID I | 846



LID II | 847

Q–RING | 848

I–RING | 849

D–RING | 849–850

OVAL | 851

CONCRETO | 852

RASTERLYS | 853

T–TUBE | 854–855

S–TUBE | 857

NEW

FLATT II | 858–859

FLATT | 860–861

THEO | 863–864

BIG THEO | 863–865

NEW

THEO PRO | 867–871

NEW

HELIA PRO | 873–877

SITRA | 879–881

SITRA CUBE | 881

BIG QUAD | 883

QUAD | 884

RUSTY® UP/DOWN | 885

RUSTY® UP/DOWN | 885

ENOLA® OCULUS | 887

ENOLA® ROUND | 889–891

ENOLA® SQUARE | 893–894

GRAFIT | 898–899

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SQUARE | 900

QUADRULO | 901–903

MERIDIAN BOX | 904–905

MERIDIAN | 904

ESKINA FRAME | 907



ESKINA FRAME | 907

BOOKAT | 908

NEW

TAHA II | 908

OVALISK | 909

PEMA® | 910



PEMA® | 911

ASTINA | 912

ASTINA STEEL | 912

ANGOLUX | 913

VILUA | 915

VILUA | 915

MYRA UP/DOWN | 916

SITRA | 917

ROX | 919

DELWA | 919

WALLYX | 920

DOWNUNDER OUT | 921

ABRIDOR | 923–925

ORDI II | 926

ORDI | 927

BOX–L | 929



BOX | 929

LOGS | 931

OUT–BEAM UP/ FLOOD DOWN | 931

L–LINE OUT | 931

PHOTONIA | 933

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SOCKET

MOLAT | 933

SOCKET

GLOO PURE | 933

SOCKET

F–POL | 934

LED

IPERI | 934

SOCKET

QUADRASYL | 935



SOCKET

SQUARE TURN | 935

LED

TODAY PRO | 936

LED

ESKINA D | 937

SOCKET

MYRA DISPLAY | 937

SOCKET

MYRA | 937

LED

LED SPOT | 939

SOCKET

NAUTILUS | 939

SOCKET

MYRA | 939

LED

ESKINA SPOT | 941

SOCKET

SITRA 360 | 942

SOCKET

THEO BRACKET | 942

LED

HELIA | 943

LED

AINOS | 944–945

LED

RUBA | 946

LED

TERANG 200 | 946

SOCKET

BULAN | 947

SOCKET

BULAN GRID | 947

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007511 843

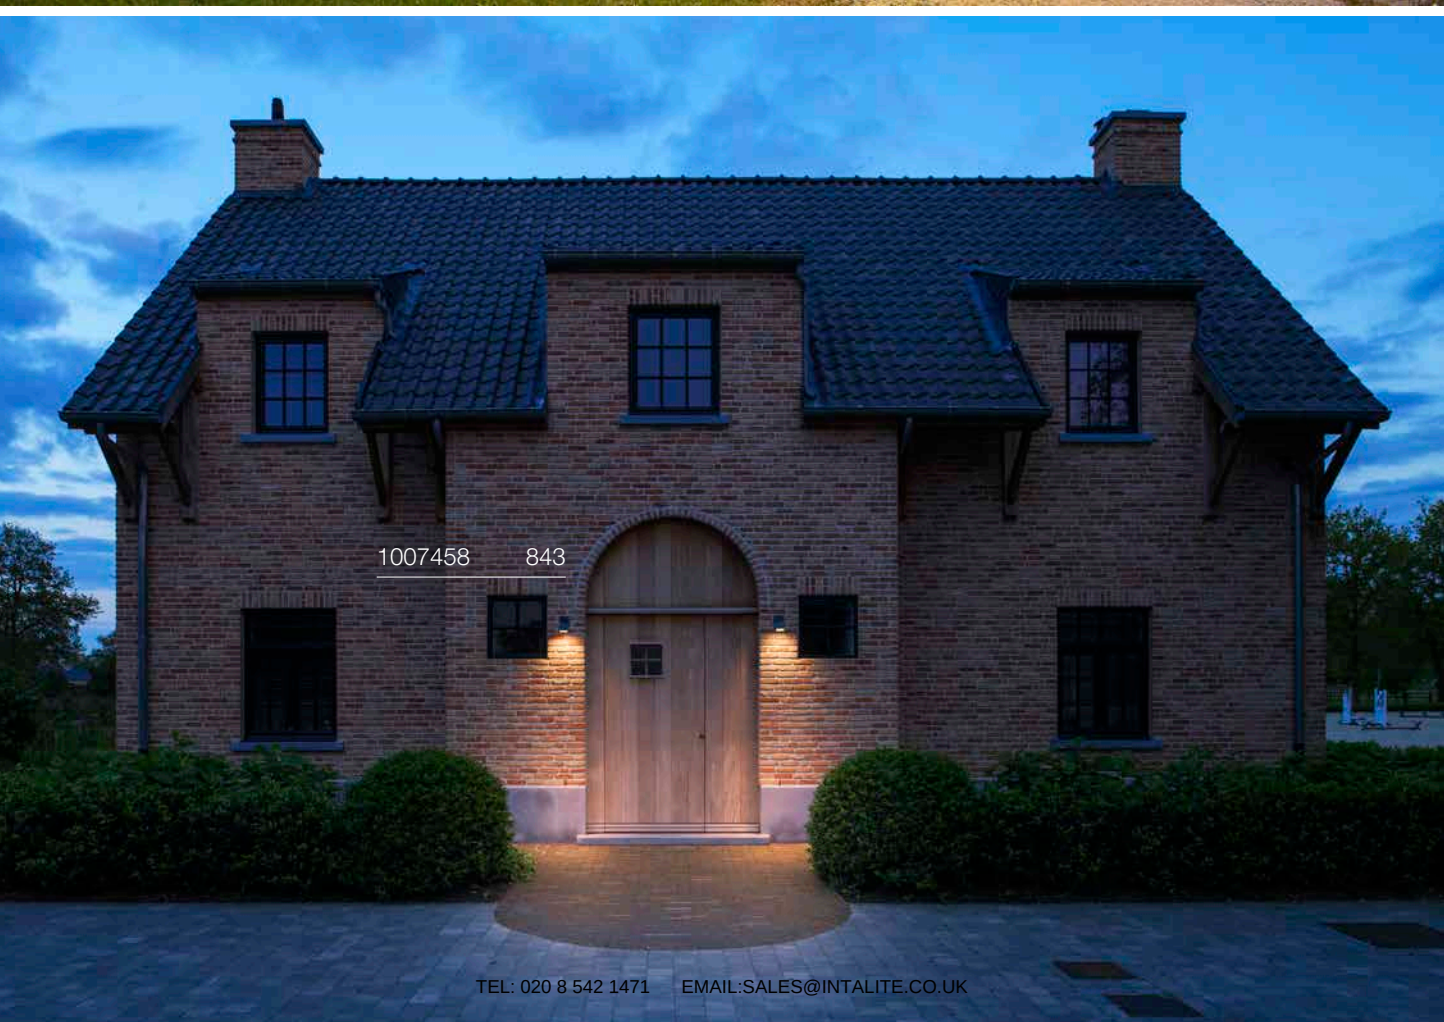
1007458 843

R-CUBE
WL, PHASE



IP65 IK04 70° 350° 130° 48000h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium

- The light colour must be set prior to installation

LED INSIDE CRI 80

800 lm | 2700 K	800 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007511**	**135.00**

S-CUBE
CW, PHASE

CCT



IP65 IK04 80° 130° 50000h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium

- The light colour must be set prior to installation

LED INSIDE CRI 80

1000 lm | 2700 K	1200 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007458**	**135.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

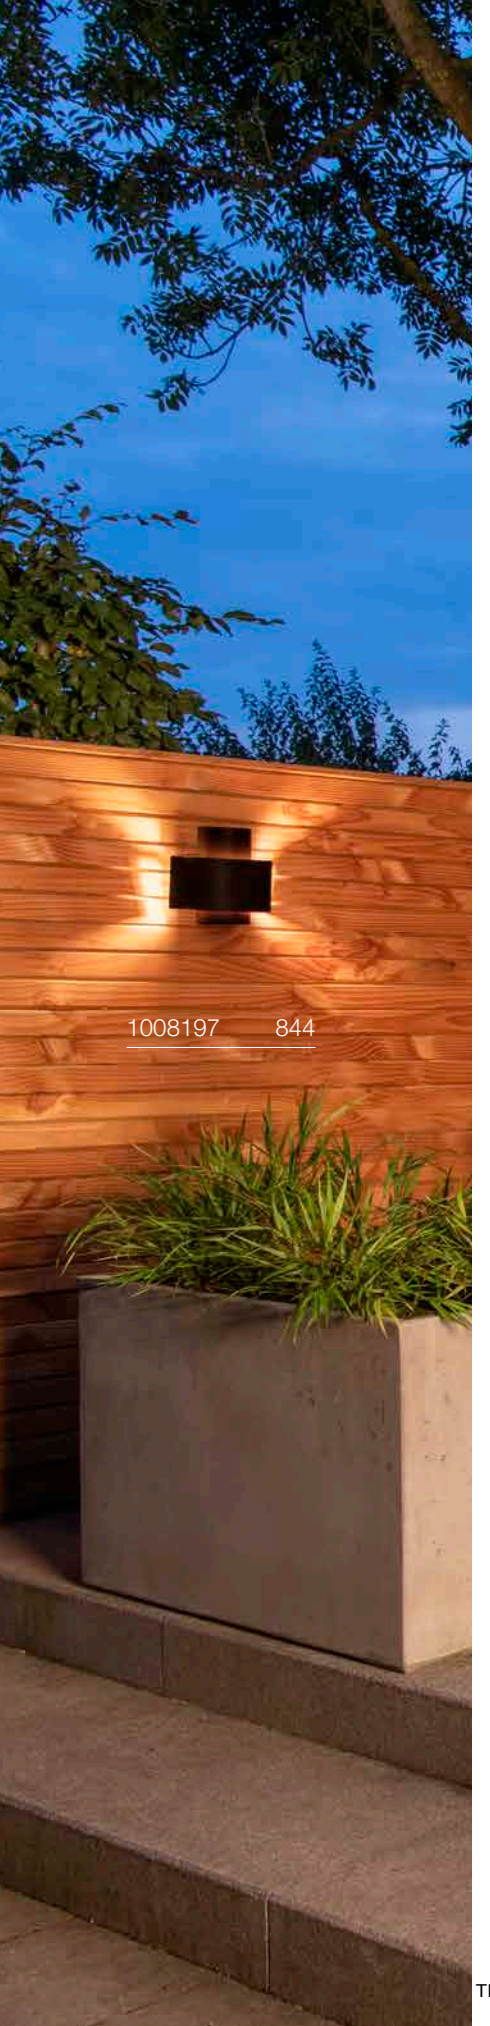

1008197 844

PHOTONI CYL
WL, E27

UPDATE



IP65 IK08

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Options	Prod. no.	GBP
black	1008197	85.00
rust	1008198	85.00

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005305 17.00 GBP

PHOTONI
WL, E27



IP65 IK08

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Options	Prod. no.	GBP
black	1007585	85.00
rust	1007581	85.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

MODELA
WL, up/down, PHASE



IP65 IK07 60° 50000h L80B50 65

220-240 V ~50/60 Hz | 95 mA
Total wattage: 7.5 W
Material: aluminium

LED INSIDE CRI 80

Up	405 lm	2700 K
Down	405 lm	

Options	Prod. no.	GBP
black/gold 810 lm	1007807	128.00
black 770 lm	1007808	128.00
white/gold 810 lm	1007806	128.00
white 800 lm	1007809	128.00

TEL: 020-8 542 1474 EMAIL: SALES@INTALITE.CO.UK

LID I
WL, single, PHASE



IP65 IK07 100° 330° 50000h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium

- The light colour must be set prior to installation

INSIDE CRI 80

	900 lm	2700 K	1050 lm	3000 K

Options	Prod. no.	GBP
● anthracite	**1007667**	**127.00**

LID I
WL, double, PHASE



IP65 IK07 2x 100° 330° 50000h L70B20 30

220-240 V ~50/60 Hz | 700 mA
Total wattage: 29 W
Material: aluminium

- The light colour must be set prior to installation

INSIDE CRI 80

	850 lm	2700 K	1000 lm	3000 K
Direct 1	850 lm	2700 K	1000 lm	3000 K
Direct 2				

Options	Prod. no.	GBP
● anthracite	**1007668**	**203.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.U

LID II
WL, single, PHASE





IP65 IK02 100° 48000h L70B20 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium

- The light colour must be set prior to installation

	800 lm | 2700 K	800 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007282**	**97.00**

LID II
WL. up/down, PHASE





IP65 IK03 100° 50000h L70B20 20

220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: aluminium

- The light colour must be set prior to installation

	750 lm | 2700 K	750 lm | 3000 K
Up	750 lm | 2700 K	750 lm | 3000 K
Down	750 lm | 2700 K	750 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007281**	**114.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Q-RING
WL, PHASE



IP65 IK06 30000h L80B50 20

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: aluminium/plastic

INSIDE CRI 80

950 lm|3000 K

Options	Prod. no.	GBP
● black	**1007918**	**137.00**
○ white	**1007919**	**137.00**

Q-RING
WL. Sensor



IP54 IK06 30000h L80B50 20

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: aluminium/plastic

- PIR sensor, adjustable range 10-2000 lx and 8 s-8 min. Detection range between 6-10 m depending on the mounting height of the light

INSIDE CRI 80

950 lm|3000 K

Options	Prod. no.	GBP
● black	**1007916**	**154.00**
○ white	**1007917**	**154.00**

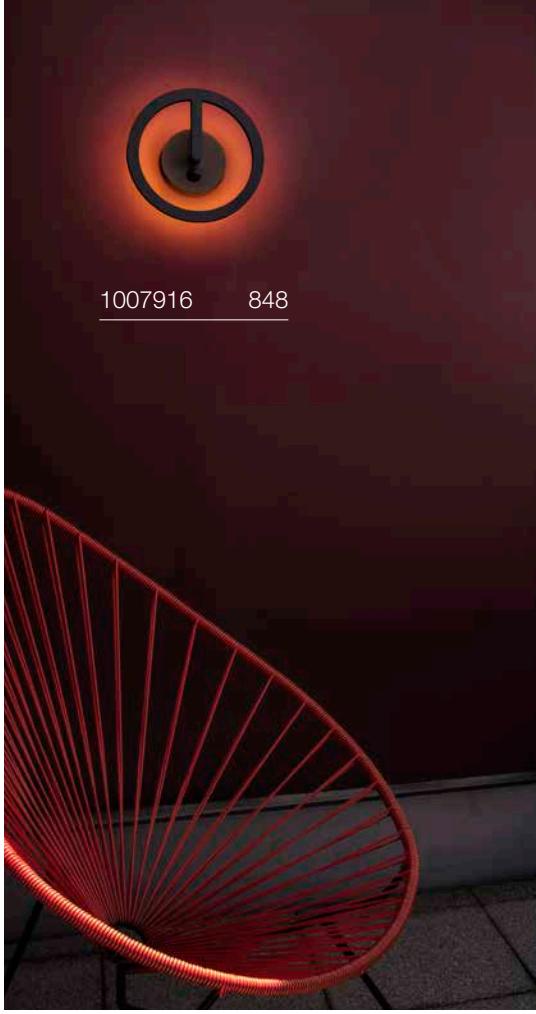

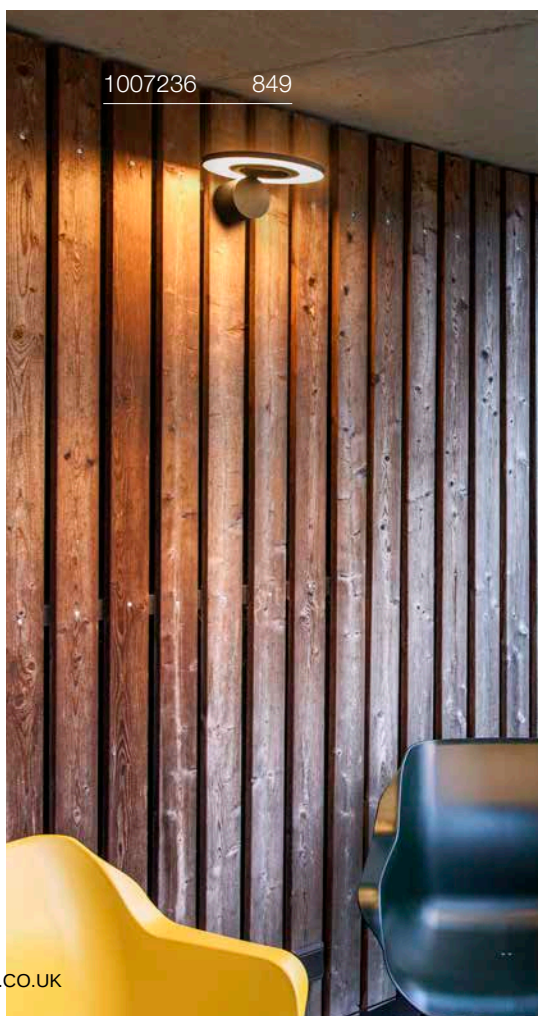

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

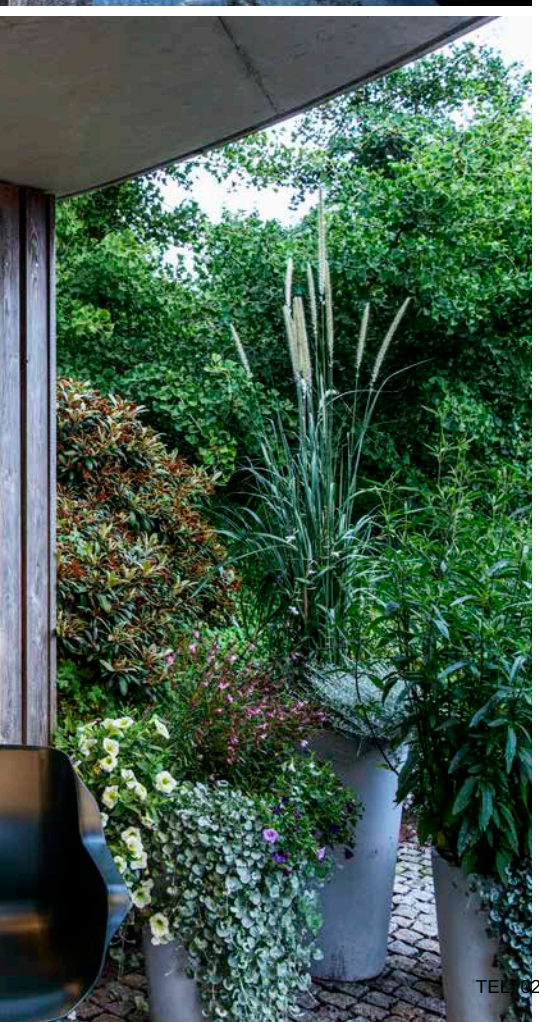

I-RING
WL



IP65 | IK05 | 350° | 90° | 50000 h L70B50 | 20

100-240 V ~50/60 Hz | 350 mA
Total wattage: 9.2 W
Material: aluminium

LED INSIDE | CRI 80

670 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1007236**	**141.00**

D-RING S
WL, PHASE

CCT



C,L | IP65 | IK06 | 50000 h L80B20 | 160

220-240 V ~50/60 Hz | 95 mA
Total wattage: 7.5 W
Material: aluminium

- The light colour must be set prior to installation

LED INSIDE | CRI 80

630 lm | 2700 K | 650 lm | 3000 K

Options	Prod. no.	GBP
● black 630 lm	**1007911**	**85.00**
○ white 790 lm	**1007912**	**85.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

D-RING M
WL, PHASE



C,L IP65 IK06 50 000 h L80B20 80

220-240 V ~50/60 Hz | 190 mA
Total wattage: 15 W
Material: aluminium

- The light colour must be set prior to installation

LED INSIDE CRI 80

1260 lm | 2700 K	1360 lm | 3000 K

Options	Prod. no.	GBP
● black 1260 lm	**1007913**	**128.00**
○ white 1540 lm	**1007914**	**128.00**

OVAL 14
WL, up/down



IP65 IK08 50000h L70B50 74

220-240 V ~50/60 Hz | 145 mA
Total wattage: 5.7 W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation

INSIDE CRI 80

Up	280 lm	2700 K	3000 K
Down	280 lm		

Options	Prod. no.	GBP
● black/frosted	**1007142**	**64.00**
○ white/frosted	**1007143**	**64.00**

OVAL 18
WL, up/down



IP65 IK08 50000h L70B50 71

220-240 V ~50/60 Hz | 275 mA
Total wattage: 9.3 W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation

INSIDE CRI 80

Up	430 lm	2700 K	3000 K
Down	430 lm		

Options	Prod. no.	GBP
● black/frosted	**1007144**	**77.00**
○ white/frosted	**1007145**	**77.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CONCRETO M
WL



IP65 IK02 50 000 h L80B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W
Material: concrete/aluminium

LED INSIDE CRI 80

Asymmetrical 270 lm | 3000 K

Options	Prod. no.	GBP
grey/black	**1006404**	**178.00**

CONCRETO L
WL



IP65 IK03 50 000 h L80B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 12 W
Material: concrete/aluminium

LED INSIDE CRI 80

Asymmetrical 470 lm | 3000 K

Options	Prod. no.	GBP
grey/black	**1006405**	**229.00**

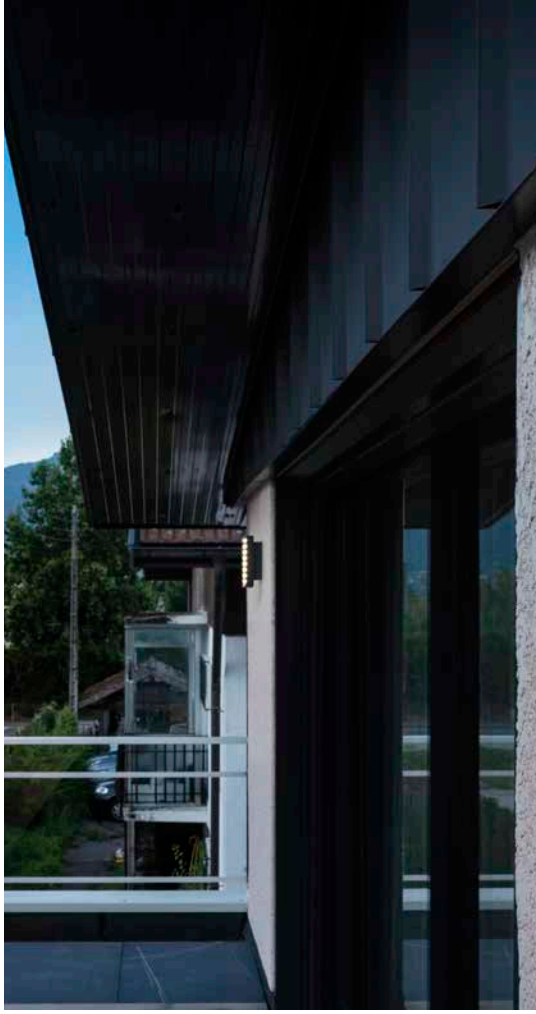

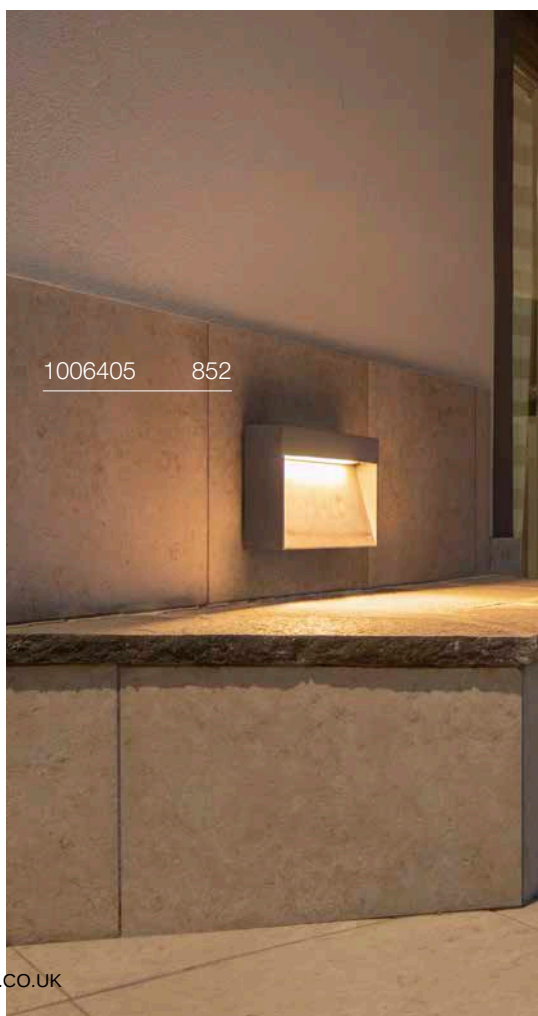

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

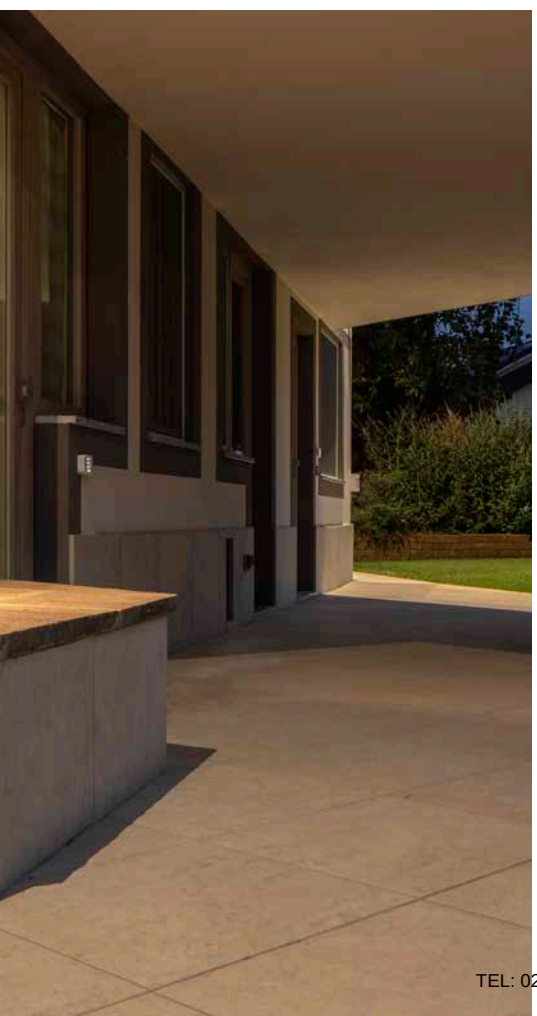

RASTERLYS
WL, PHASE



220-240 V ~0/50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium

- The light colour must be set prior to installation
- Suitable for DC operation

	350 lm | 2700 K	400 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1008384**	**154.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

T-TUBE
WL GU10, single, Sensor

IP44 IK06 36° 90°

220-240 V ~50/60 Hz
Material: aluminium

- PIR sensor, adjustable range 10-2000 lx and 5 s-10 min. Detection range up to 8 m depending on the mounting height of the light

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008010** ●	**115.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

T-TUBE
WL GU10, double, Sensor

IP44 IK06 90°/180°

220-240 V ~50/60 Hz
Material: aluminium

- Lower luminaire head 90° - Upper luminaire head 180° swivelling
- PIR sensor, adjustable range 10-2000 lx and 5 s-10 min. Detection range up to 8 m depending on the mounting height of the light

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Options	Prod. no.	GBP
● black	**1008011** ●	**141.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

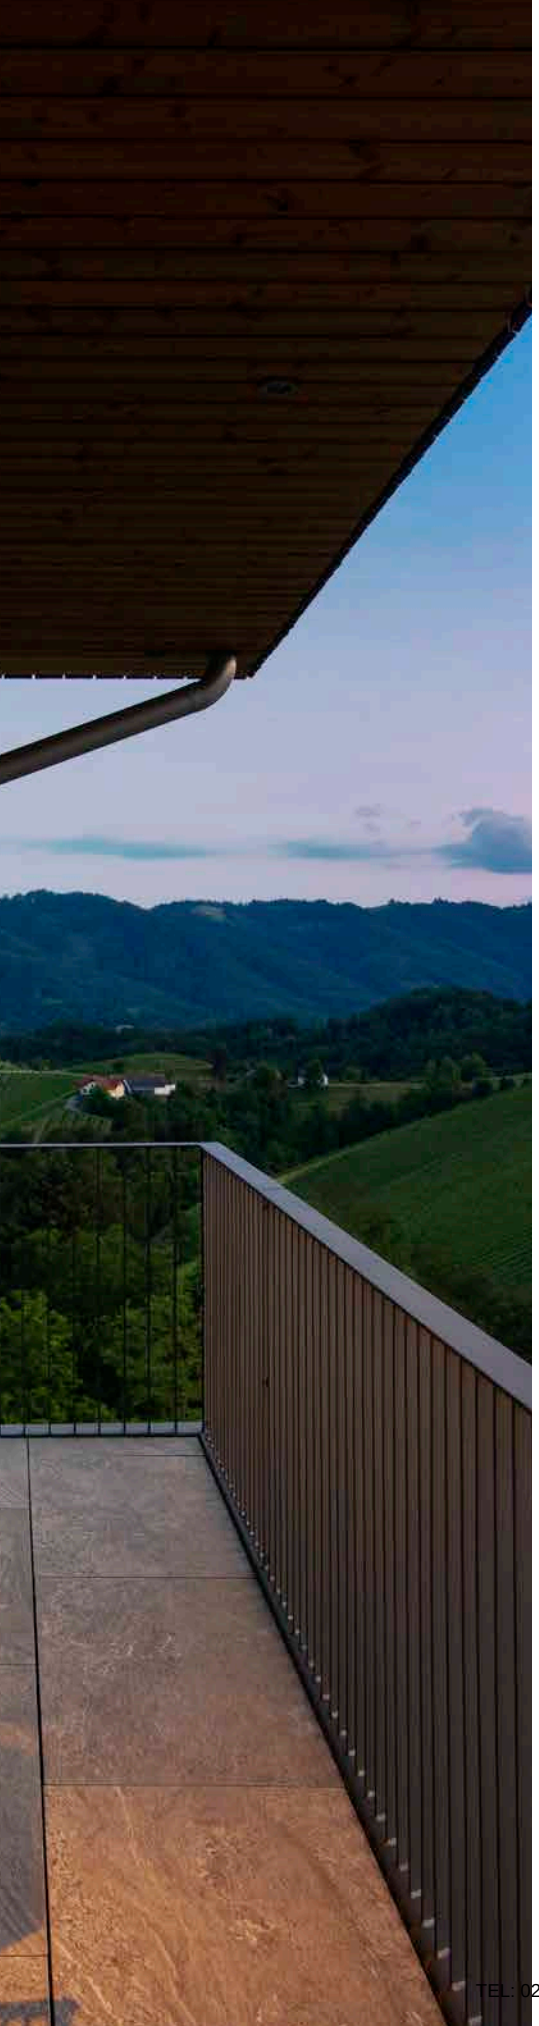

T-TUBE
WL GU10, single

UPDATE



IP65 IK06 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Options	Prod. no.	GBP
● black	1008012	94.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

T-TUBE
WL GU10, double

UPDATE



IP65 IK06 90°/180°

220-240 V ~50/60 Hz
Material: aluminium

- Lower luminaire head 90° – Upper luminaire head 180° swivelling

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Options	Prod. no.	GBP
● black	1008013	128.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007653 857

S-TUBE
CW



220-240 V ~50/60 Hz
Material: aluminium

- streamlined design

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Options	Prod. no.	GBP
● black	**1007653**	**85.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000 h

Prod. no.: **1007230** **5.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FLATT II
WL, PHASE

NEW



IP65 IK03 50 000 h L80B20 130

220-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: aluminium

LED INSIDE CRI 80

Up	310/320 lm	2700 K
Down	310/320 lm	

Options	Prod. no.	GBP
● black 620 lm	**1010102**	**152.00**
● anthracite/brown 640 lm	**1010101**	**152.00**

1010107 859

TE EMAIL:SALES@INTALITE.CO.UK

FLATT II
WL, Sensor

NEW



IP54 IK03 50 000 h L80B20 10

100-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: aluminium

- Primary and replica functionality. Option to control additional lights without a sensor

LED INSIDE CRI 80

Up	310/320 lm	2700 K
Down	310/320 lm	

Options	Prod. no.	GBP
black 620 lm	1010108	169.00
anthracite/brown 640 lm	1010107	169.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FLATT
WL



IP65 IK03 30000h L70B50

100-240 V ~50/60 Hz | 300 mA
Total wattage: 13 W
Material: aluminium

LED INSIDE CRI 80

	500 lm|3000 K	530 lm|4000 K

Options	Prod. no.	GBP
anthracite 500/530 lm	**1002952**	**152.00**
anthracite/brown 500/530 lm	**1002953**	**152.00**

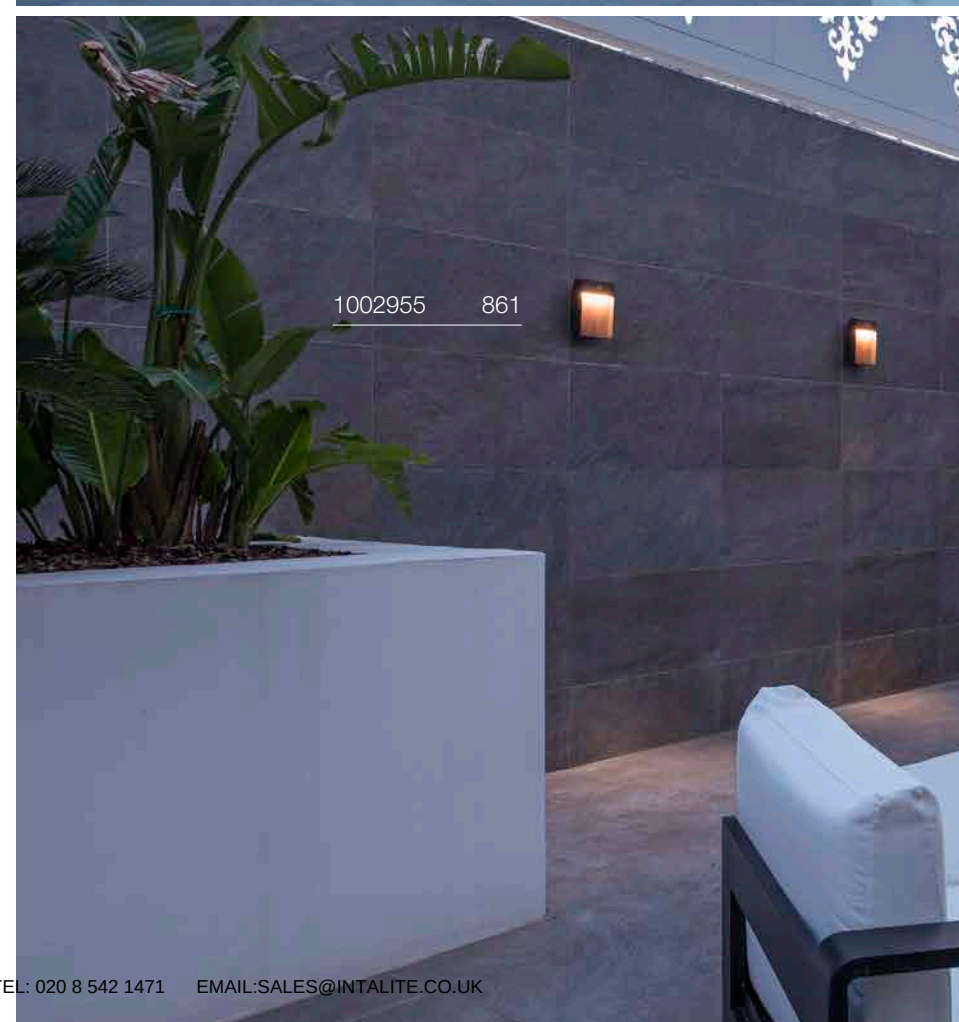

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

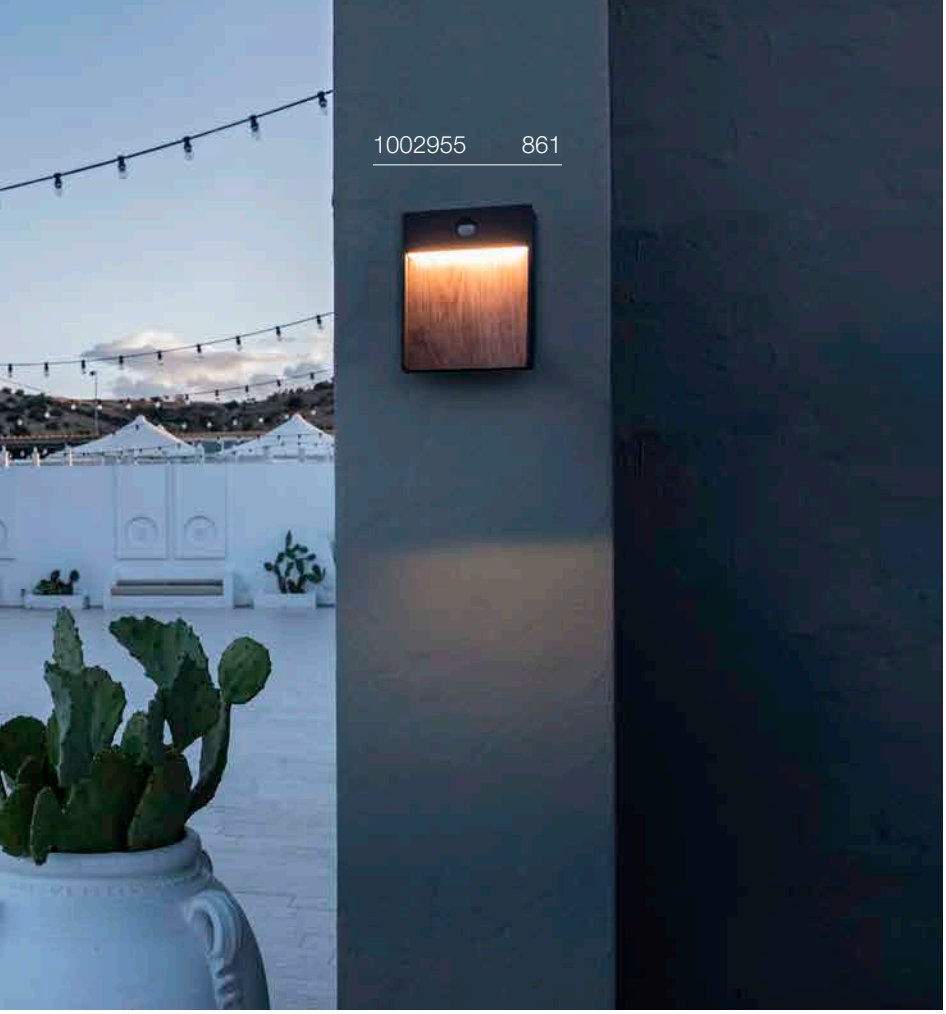

FLATT SENSOR
WL



IP54 IK03 30000h L70B50

100-240 V ~50/60 Hz | 300 mA
Total wattage: 13 W
Material: aluminium

- PIR sensor, adjustable range 15-2000 lx and 5 s - 10 min. Detection range between 6-9 m depending on the mounting height of the light

LED INSIDE CRI 80

500 lm | 3000 K	530 lm | 4000 K

Options	Prod. no.	GBP
anthracite 500/530 lm	**1002954**	**186.00**
anthracite/brown 500/530 lm	**1002955**	**186.00**

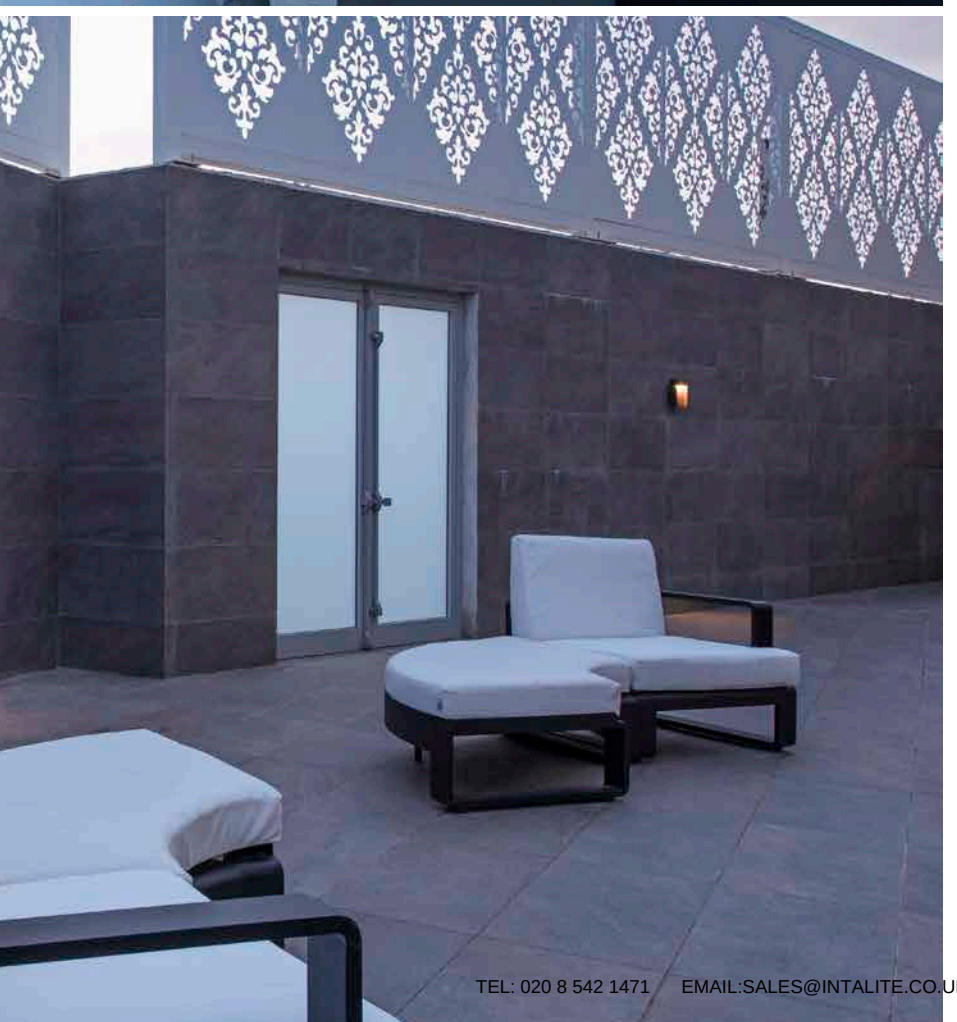

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

229532 862

234515 863

THEO UP/DOWN
WL, QPAR51



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 35 W

Base: 2xGU10

Options	Prod. no.	GBP
● anthracite	**229535**	**77.00**
○ white	**229531**	**77.00**
● grey	**229532**	**77.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

Prod. no.: **1005077** **7.00 GBP**

BIG THEO
WL, BEAM UP/FLOOD DOWN



IP44 IK02 2° 24°

220-240 V ~50/60 Hz | 500 mA
Total wattage: 29 W
Material: aluminium/glass

- The 2° light effect is particularly suitable for contouring and structuring high surfaces and building facades such as hotels, restaurants or even apartment blocks and shopping centres.

LED INSIDE CRI 80

Up	130 lm	3000 K
Down	2000 lm	

Options	Prod. no.	GBP
● anthracite	**234515**	**240.00**

BIG THEO UP/DOWN
WL, QPAR111



IP44 IK02 25000 h L70B50

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 75 W

Base: 2xGU10

Options	Prod. no.	GBP
● anthracite	**229575**	**154.00**
● grey	**229574**	**154.00**

GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F
13 kW/1000 h

Prod. no.: **1005278** **48.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

THEO
WL, QPAR51



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 35 W

Base: 1xGU10

Options	Prod. no.	GBP
anthracite	229525	64.00
grey	229524	64.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

BIG THEO FLOOD UP/DOWN
WL



IP44 IK02 24° 24° 30000 h L70B50

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 42 W
Material: aluminium/glass

LED INSIDE CRI 80

Up	2000 lm	3000 K
Down	2000 lm	

Options	Prod. no.	GBP
anthracite	234505	270.00

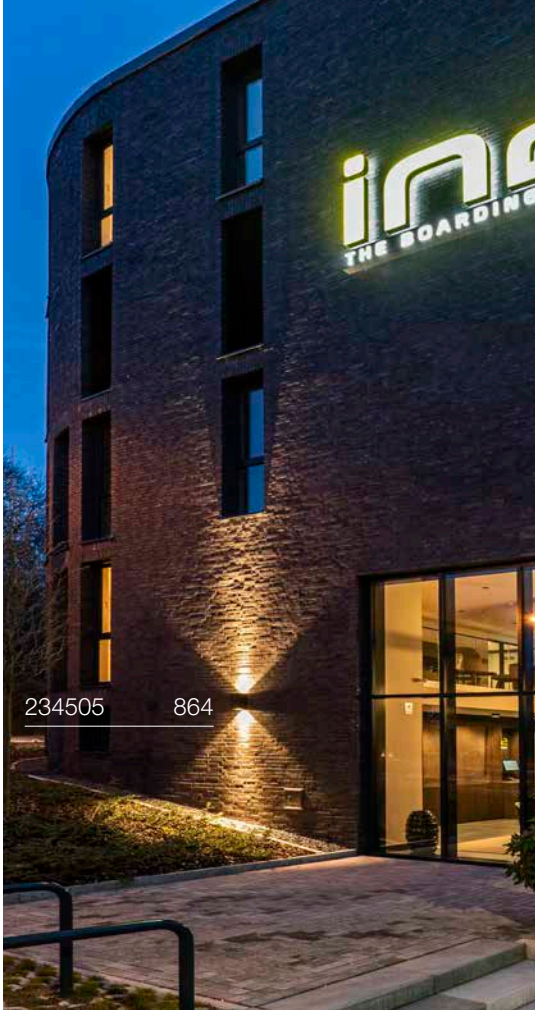

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

BIG THEO
WL, QPAR111





IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
● anthracite	**229565**	**97.00**
● grey	**229564**	**97.00**

GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F
13 kW/1000 h

C,L

Prod. no.: 1005278 48.00 GBP

BIG THEO
WL



IP44 IK02 24° 30000 h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium/glass

LED INSIDE CRI 80

2000 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**234525**	**193.00**

20 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010179 867
33

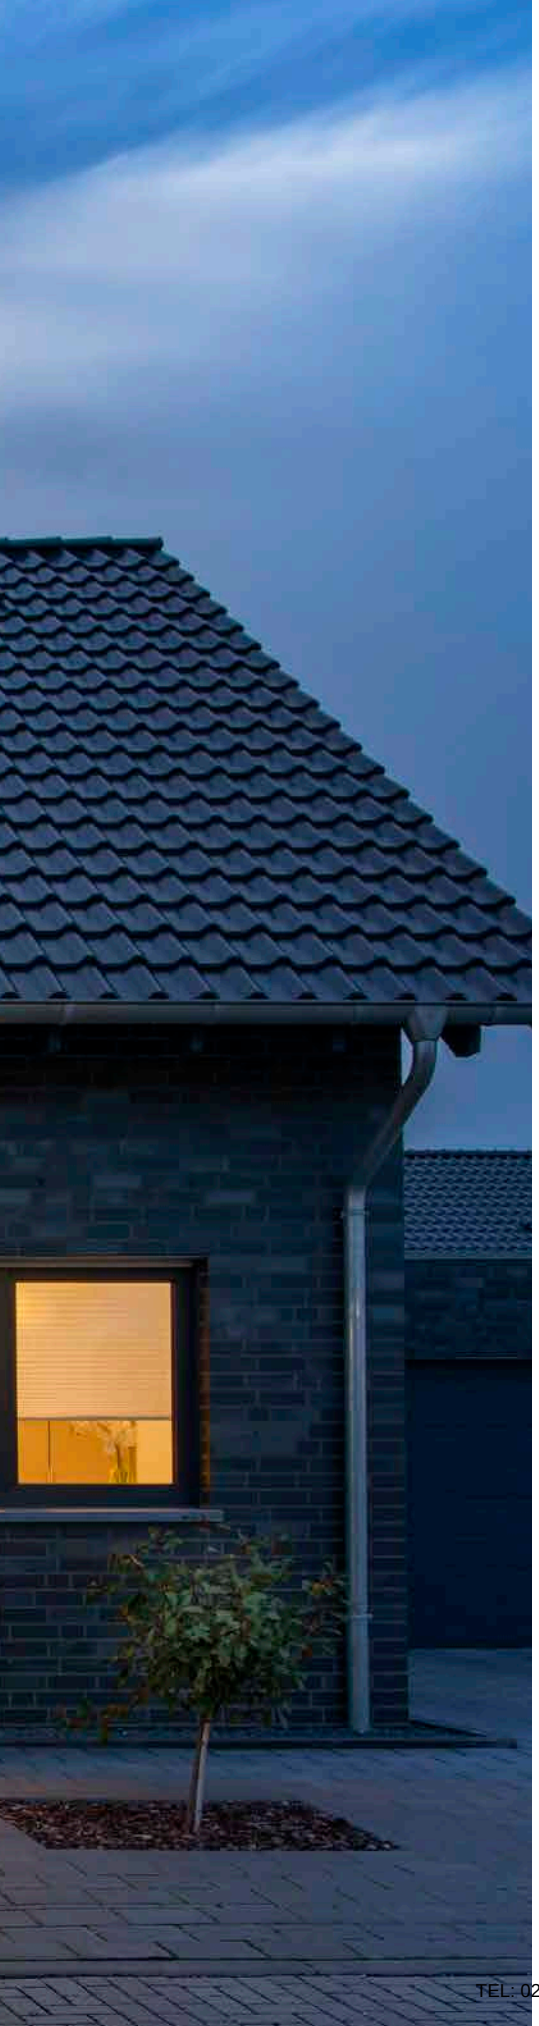

THEO PRO S
WL, single, DALI P1



220-240 V ~50/60 Hz | 340 mA
Total wattage: 3 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

Down	300 lm	2700 K

Options	Prod. no.	GBP
● anthracite	1010177	135.00
○ white	1010178	135.00

THEO PRO S
WL, up/down, DALI P1



220-240 V ~50/60 Hz | 385 mA
Total wattage: 6 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

Up	300 lm	2700 K
Down	300 lm	

Options	Prod. no.	GBP
● anthracite	1010179	148.00
○ white	1010180	148.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010183 869

THEO PRO S
WL, single, DALI P2



220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

LED INSIDE CRI 80

Down	600 lm	2700 K

Options	Prod. no.	GBP
● anthracite	1010181	144.00
○ white	1010182	144.00

THEO PRO S
WL, up/down, DALI P2



220-240 V ~50/60 Hz | 285 mA
Total wattage: 12 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

LED INSIDE CRI 80

Up	600 lm	2700 K
Down	600 lm	

Options	Prod. no.	GBP
● anthracite	1010183	161.00
○ white	1010184	161.00

THEO PRO L
WL, single, DALI P1



220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

LED INSIDE CRI 80

Down	1200 lm	2700 K

Options	Prod. no.	GBP
● anthracite	1010185	186.00
○ white	1010186	186.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

THEO PRO L

WL, up/down, DALI P1

DALI

NEW



Dali Touch IP66 IK08 24° 24°

50 000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

LED INSIDE CRI 80

Up	1200 lm	2700 K
Down	1200 lm	

Options	Prod. no.	GBP
● anthracite	**1010187**	**203.00**
○ white	**1010188**	**203.00**

THEO PRO L
WL, single, DALI P2

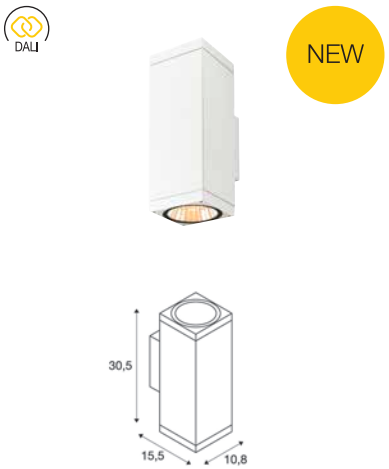

220-240 V ~50/60 Hz | 370 mA
Total wattage: 15 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

Down	1800 lm	2700 K

Options	Prod. no.	GBP
○ white	1010189	220.00
○ white	1010190	220.00

THEO PRO L
WL, up/down, DALI P2

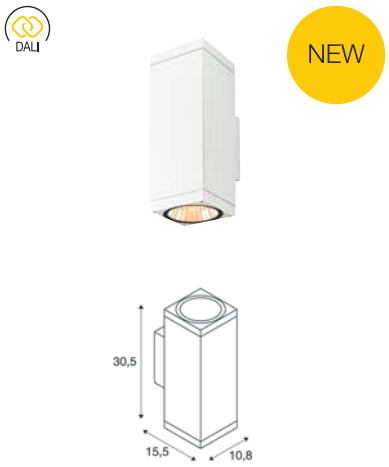

220-240 V ~50/60 Hz | 800 mA
Total wattage: 30 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

Up	1800 lm	2700 K
Down	1800 lm	

Options	Prod. no.	GBP
○ white	1010191	237.00
○ white	1010192	237.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010163 873

HELIA PRO S
WL, single, DALI P1



220-240 V ~50/60 Hz | 340 mA
Total wattage: 3 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

Down	300 lm	2700 K

Options	Prod. no.	GBP
● anthracite	1010161	127.00
○ white	1010162	127.00

HELIA PRO S
WL, up/down, DALI P1



220-240 V ~50/60 Hz | 385 mA
Total wattage: 6 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

Up	300 lm	2700 K
Down	300 lm	

Options	Prod. no.	GBP
● anthracite	1010163	139.00
○ white	1010164	139.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

HELIA PRO S
WL, single, DALI P2

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

Down	600 lm	2700 K

Options	Prod. no.	GBP
● anthracite	1010165	135.00
○ white	1010166	135.00

HELIA PRO S
WL, up/down, DALI P2

220-240 V ~50/60 Hz | 285 mA
Total wattage: 12 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

Up	600 lm	2700 K
Down	600 lm	

Options	Prod. no.	GBP
● anthracite	1010167	152.00
○ white	1010168	152.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

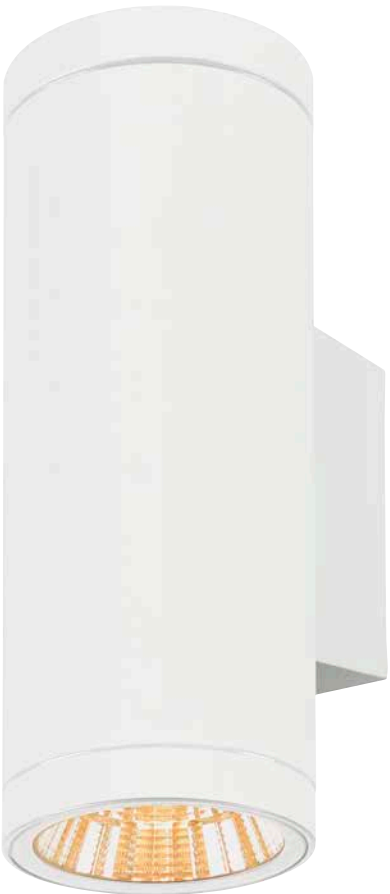

HELIA PRO L
WL, single, DALI P1

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

Down	1200 lm	2700 K

Options	Prod. no.	GBP
● anthracite	1010169	178.00
○ white	1010170	178.00

HELIA PRO L
WL, up/down, DALI P1

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

Up	1200 lm	2700 K
Down	1200 lm	

Options	Prod. no.	GBP
● anthracite	1010171	195.00
○ white	1010172	195.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010175 877

HELIA PRO L
WL, single, DALI P2



Dali Touch IP66 IK08 24° 50000h L80B10

220-240 V ~50/60 Hz | 370 mA
Total wattage: 15 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

LED INSIDE CRI 80

Down	1800 lm	2700 K

Options	Prod. no.	GBP
● anthracite	1010173	212.00
○ white	1010174	212.00

HELIA PRO L
WL, up/down, DALI P2



Dali Touch IP66 IK08 24° 24° 50000h L80B10

220-240 V ~50/60 Hz | 800 mA
Total wattage: 30 W
Material: aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- incl. 1 slide for asym. light distribution
- Optimised frame end design due to uniform dimensions and luminous flux (up and up/down) within one version

LED INSIDE CRI 80

Up	1800 lm	2700 K
Down	1800 lm	

Options	Prod. no.	GBP
● anthracite	1010175	229.00
○ white	1010176	229.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1005149 879

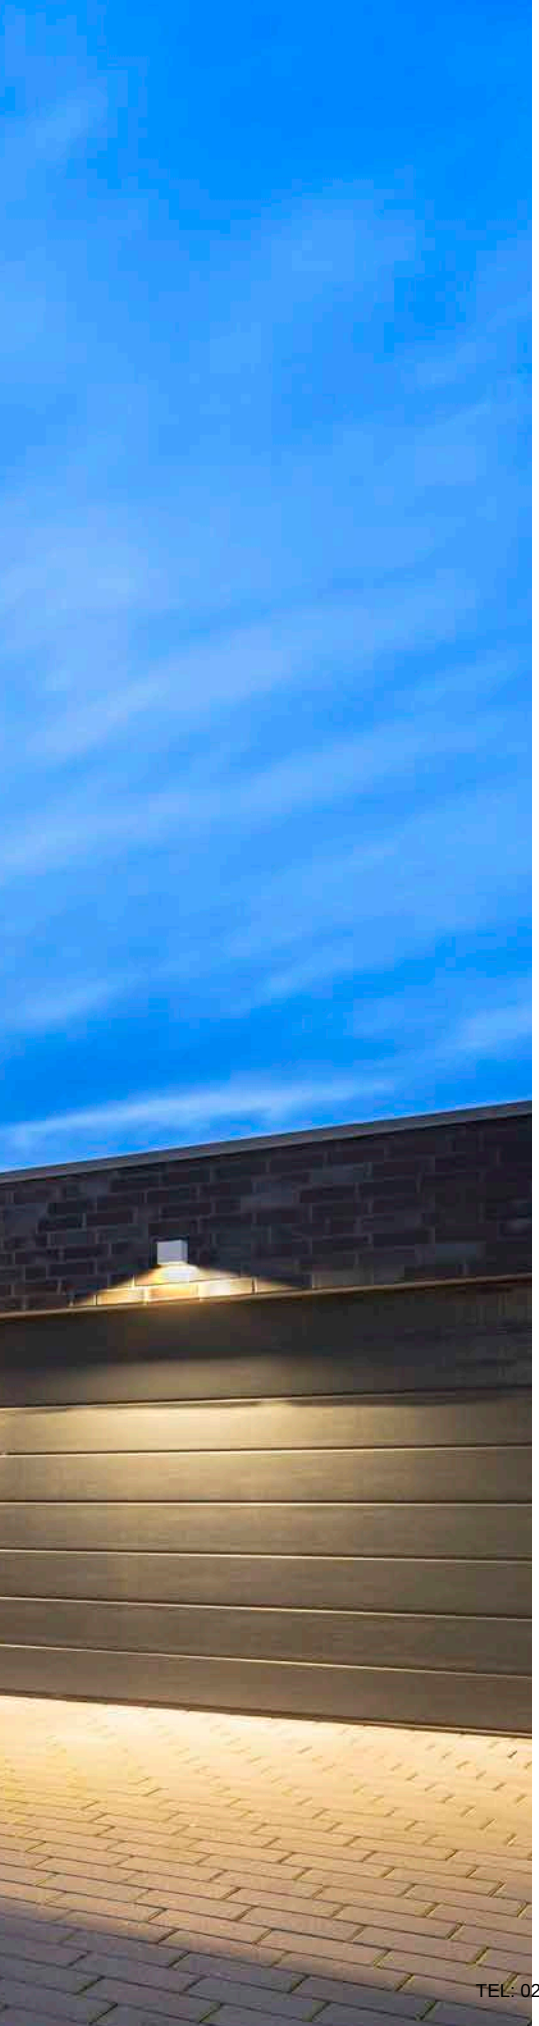

SITRA S
WL, single, square



IP44 IK05 105° 50000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.2 W
Material: aluminium/glass

	580 lm | 3000 K	620 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1005148**	**85.00**
○ white	**1005149**	**85.00**
● rust	**1005150**	**85.00**

SITRA S
WL, single, square



IP65 IK05 105° 50000h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium

Up	550 lm	3000 K	635 lm	4000 K
Down	550 lm		635 lm	

Options	Prod. no.	GBP
● anthracite	**1002032**	**103.00**
○ white	**1002033**	**103.00**
● rust	**1002034**	**102.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

232531 881

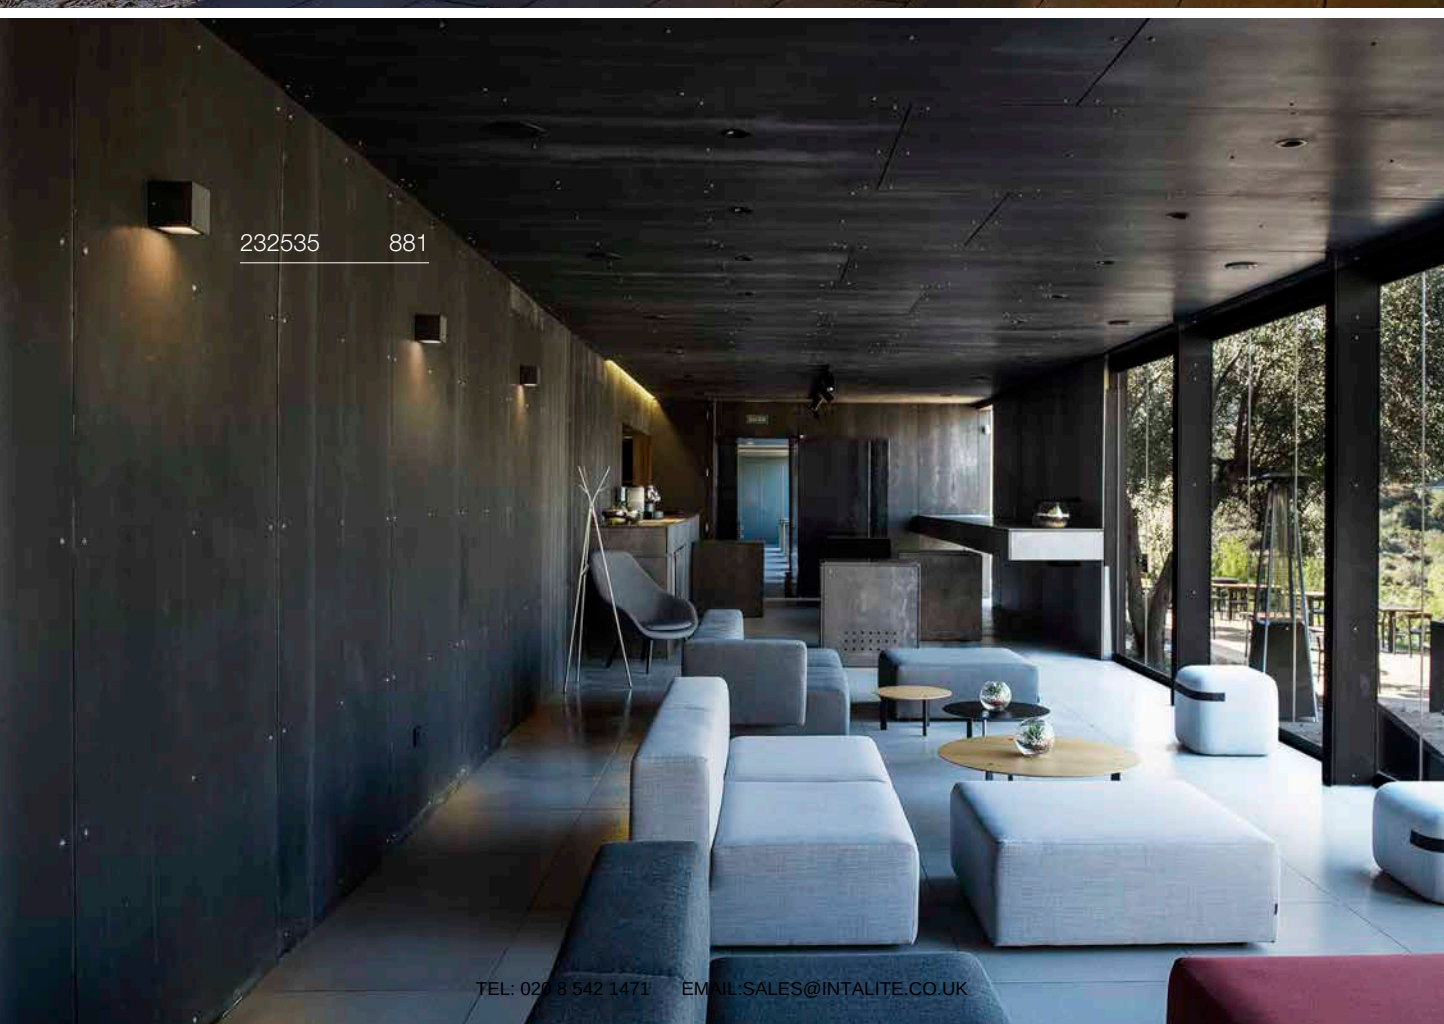
232535 881

SITRA M
WL, up/down, square



IP65 IK05 95° 50000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium

INSIDE CRI 80

Up	850 lm	3000 K	940 lm	4000 K
Down	850 lm		940 lm	

Options	Prod. no.	GBP
anthracite	1005151	124.00
white	1005153	124.00
rust	1005154	124.00

SITRA L
WL, up/down, square



IP65 IK05 105° 50000 h L70B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium

INSIDE CRI 80

Up	1400 lm	3000 K	1530 lm	4000 K
Down	1400 lm		1530 lm	

Options	Prod. no.	GBP
anthracite	1005155	158.00
white	1005156	158.00
rust	1005157	158.00

SITRA CUBE
WL, TCR-TSE



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 9 W

Base: 2xG53	max. Ø: 7.5 cm	L: 2.7 cm

Options	Prod. no.	GBP
anthracite	232535	64.00
white	232531	64.00
rust	232537	64.00

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G
7 kW/1000 h

C,L

Prod. no.: 1005272 10.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

232435 883

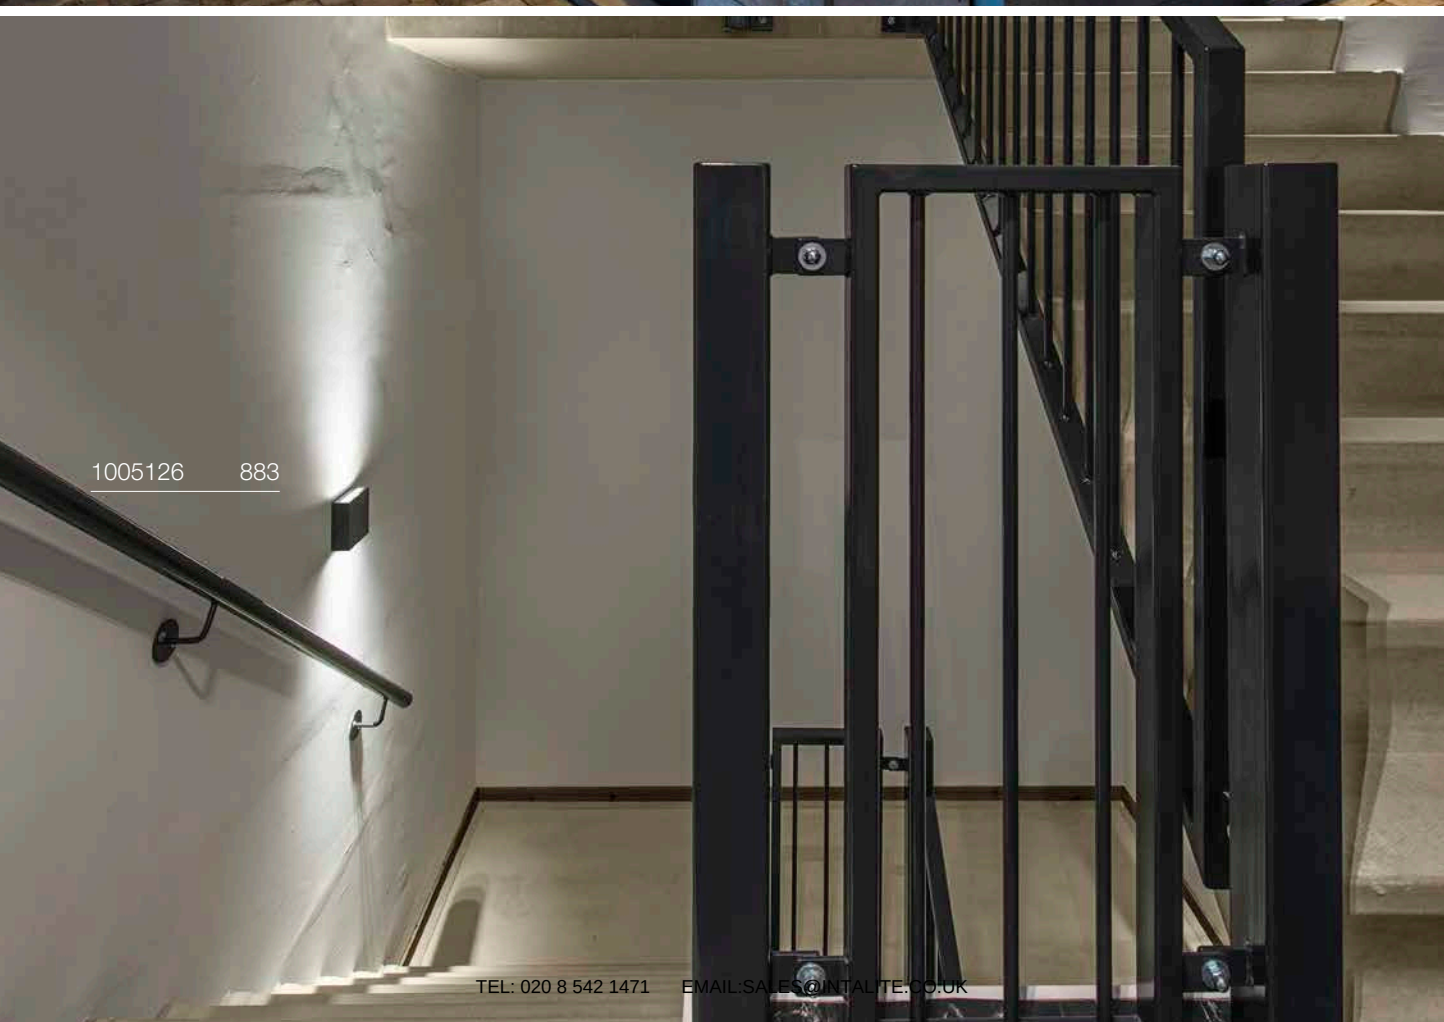
1005126 883

BIG QUAD
WL



IP44 IK05 110° 30000h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 4.5 W
Material: aluminium/glass

LED INSIDE CRI 80

290 lm | 3000 K

Options	Prod. no.	GBP
● anthracite 260 lm	**232435**	**103.00**
○ white 290 lm	**232431**	**103.00**

BIG QUAD UP/DOWN
WL



IP54 30° 36000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 8.2 W
Material: aluminium/glass

LED INSIDE CRI 80

Up	320 lm	3000 K
Down	320 lm	

Options	Prod. no.	GBP
● anthracite	**1005126**	**145.00**
○ white	**1005125**	**145.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

QUAD
WL



IP44 IK02 90° 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 4.6 W
Material: aluminium/glass

INSIDE

	100 lm	3000 K

Options	Prod. no.	GBP
● anthracite 80 lm	**232465**	**73.00**
○ white 100 lm	**232461**	**73.00**

QUAD UP/DOWN 15
WL



IP44 IK02 110° 30000h L70B50

100-277 V ~50/60 Hz | 350 mA
Total wattage: 8 W
Material: aluminium/glass

INSIDE

Up	290 lm	3000 K
Down	260 lm	

Options	Prod. no.	GBP
● anthracite 260 lm	**232445**	**111.00**
○ white 290 lm	**232441**	**111.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

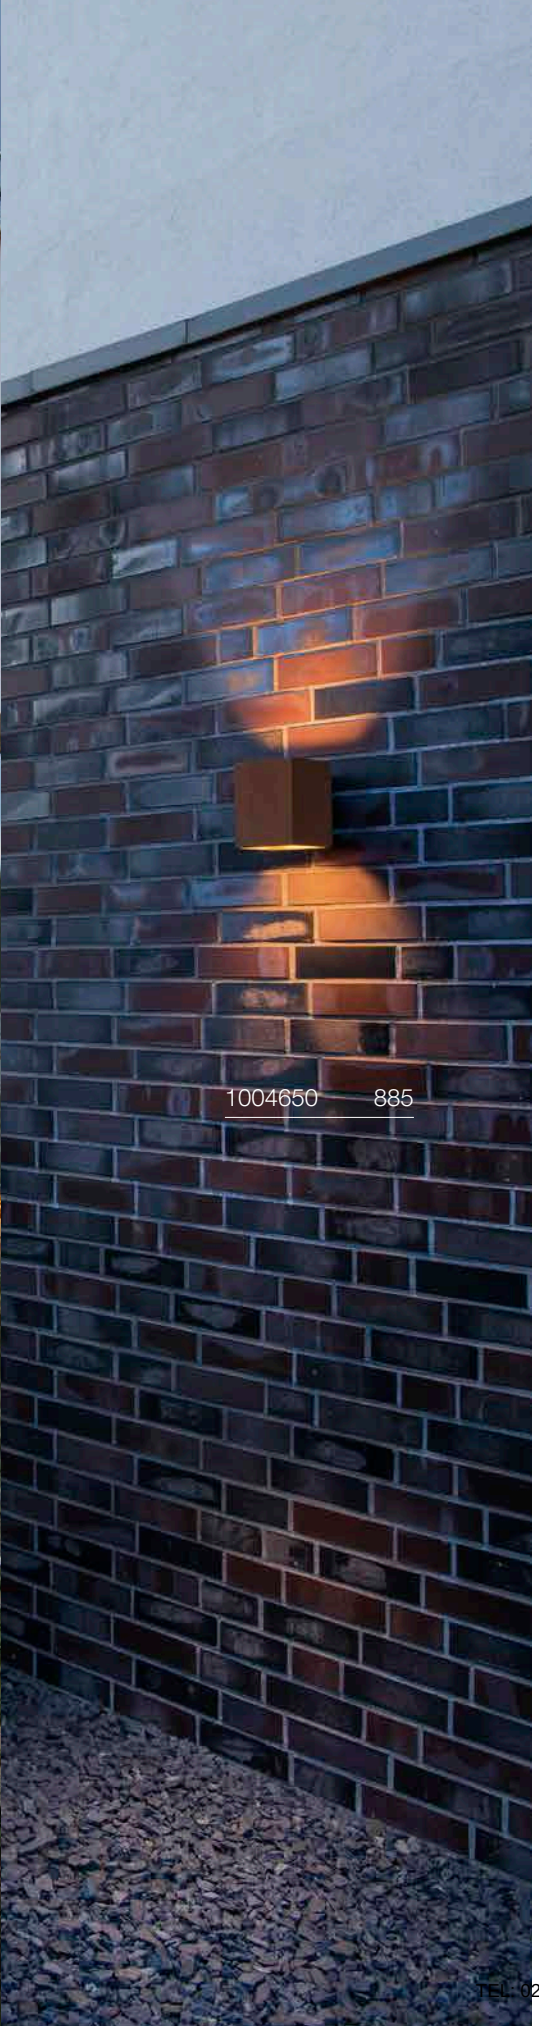

RUSTY® UP/DOWN
WL, round



220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: FeCSi steel/aluminium

Up	249 lm | 3000 K	254 lm | 4000 K	

Options	Prod. no.	GBP
rust/anthracite	**1004651**	**240.00**

RUSTY® UP/DOWN
WL, square



220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: FeCSi steel/aluminium

Up	259 lm | 3000 K	260 lm | 4000 K	

Options	Prod. no.	GBP
rust/anthracite	**1004650**	**240.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006328 886

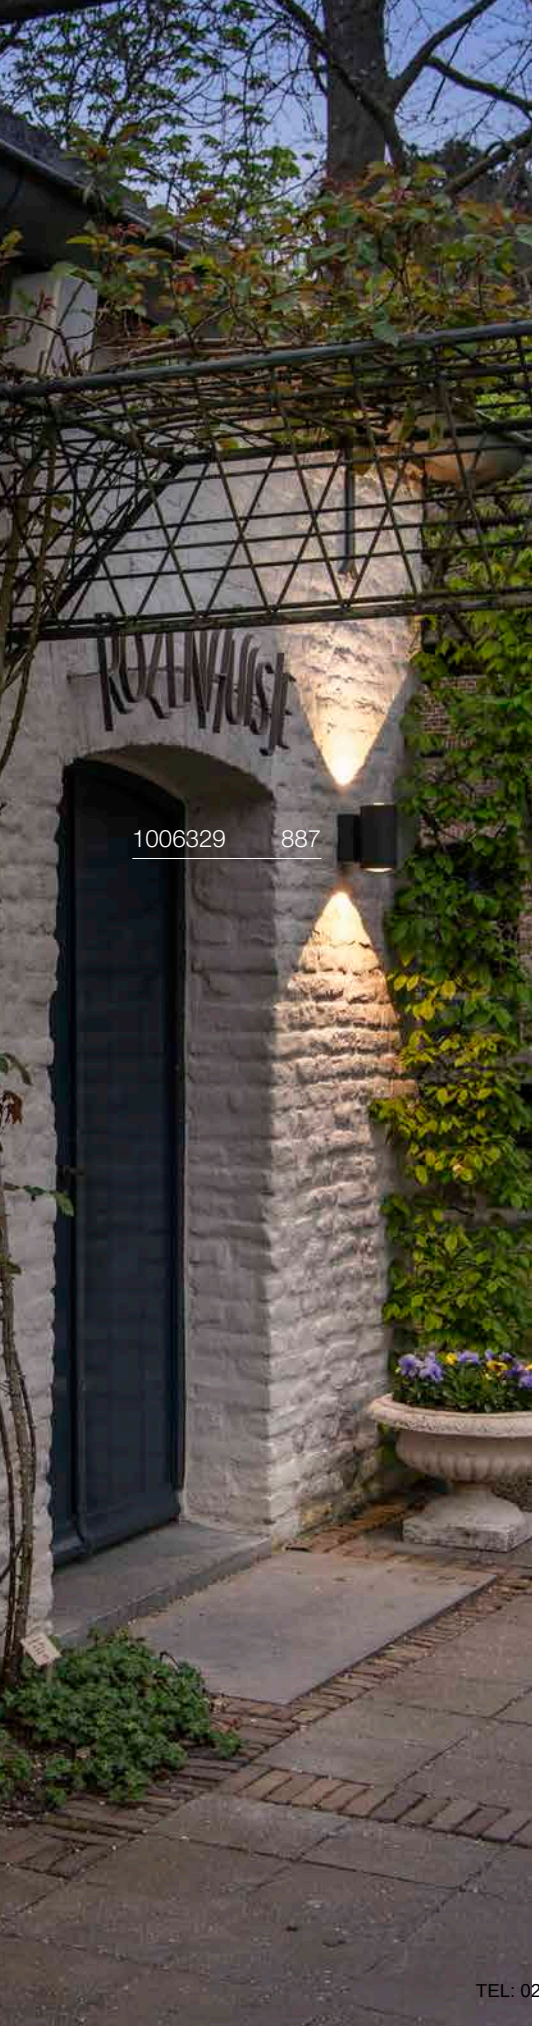

ENOLA® OCULUS
WL, single

CCT



IP65 IK03 100° 30000h L70B50 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium/glass

- The light colour must be set prior to installation
- The Occulus optic creates a contoured, cleanly defined light effect on the respective surface

LED INSIDE CRI 90

	1000 lm | 3000 K	1100 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1006328**	**235.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**

ENOLA® OCULUS
WL, up/down

CCT



IP65 IK03 100° 30000h L70B50 37

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/glass

- The light colour must be set prior to installation
- The Occulus optic creates a contoured, cleanly defined light effect on the respective surface

LED INSIDE CRI 90

	940 lm | 3000 K	1060 lm | 4000 K
Up	940 lm | 3000 K	1060 lm | 4000 K
Down	940 lm | 3000 K	1060 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1006329**	**293.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1003440 889

ENOLA® ROUND S
WL, single



IP65 IK06 30° 30000h L70B50 10

100-240 V ~50/60 Hz | 500 mA
Total wattage: 6 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

450 lm | 3000 K	500 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1003422**	**172.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**
Reflector 60°		
◑ chrome	**1005262**	**15.00**

ENOLA® ROUND M
WL, single



IP65 IK06 38° 30000h L70B50 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CRI 90

	860 lm | 3000 K	980 lm | 4000 K
Up		
Down	830 lm | 3000 K	950 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1003423**	**211.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**
Lens 19°		
● black	**1005205**	**36.00**
Asymmetrical lens		
◐ black/chrome	**1005206**	**36.00**
Reflector 60°		
◑ chrome	**1005207**	**22.00**

ENOLA® ROUND L
WL, single



IP65 IK06 38° 30000h L70B50 10

220-240 V ~50/60 Hz | 900 mA
Total wattage: 36 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

3300 lm | 3000 K	3700 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1003440**	**295.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**
Reflector 60°		
◑ chrome	**1005263**	**19.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1003441 891
Arredo3

ENOLA® ROUND S
WL, UP/DOWN



IP65 IK06 30° 30000h L70B50 10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.8 W
Material: aluminium/glass

- The light colour must be set prior to installation

LED INSIDE CRI 90

Up	310 lm	3000 K	350 lm	4000 K
Down	310 lm	3000 K	350 lm	4000 K

Options	Prod. no.	GBP
● anthracite	**1003424**	**211.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**
Reflector 60°		
◑ chrome	**1005262**	**15.00**

ENOLA® ROUND M
WL, UP/DOWN



IP65 IK06 38° 30000h L70B50 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CRI 90

Up	830 lm	3000 K	900 lm	4000 K
Down	830 lm	3000 K	900 lm	4000 K

Options	Prod. no.	GBP
● anthracite	**1003425**	**258.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**
Lens 19°		
● black	**1005205**	**36.00**
Asymmetrical lens		
◐ black/chrome	**1005206**	**36.00**
Reflector 60°		
◑ chrome	**1005207**	**22.00**

ENOLA® ROUND L
WL, UP/DOWN



IP65 IK06 38° 38° 30000h L70B50 10

220-240 V ~50/60 Hz | 700 mA
Total wattage: 55 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

Up	2700 lm	3000 K	3000 lm	4000 K
Down	2700 lm	3000 K	3000 lm	4000 K

Options	Prod. no.	GBP
● anthracite	**1003441**	**404.00**

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	**1002853**	**7.00**
Reflector 60°		
◑ chrome	**1005263**	**19.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1003417 893

ENOLA® SQUARE S
WL, single



IP65 IK06 30° 30000 h L70B50 10

100-240 V ~50/60 Hz | 500 mA
Total wattage: 6 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

450 lm|3000 K | 500 lm|4000 K

Options	Prod. no.	GBP
anthracite	**1003416**	**172.00**

Product	Prod. no.	GBP
Spacer		
anthracite	**1002853**	**7.00**
Reflector 60°		
chrome	**1005262**	**15.00**

ENOLA® SQUARE M
WL, single



IP65 IK06 38° 30000 h L70B50 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CRI 90

860 lm|3000 K | 980 lm|4000 K

Options	Prod. no.	GBP
anthracite	**1003417**	**211.00**

Product	Prod. no.	GBP
Spacer		
anthracite	**1002853**	**7.00**
Lens 19°		
black	**1005205**	**36.00**
Asymmetrical lens		
black/chrome	**1005206**	**36.00**
Reflector 60°		
chrome	**1005207**	**22.00**

ENOLA® SQUARE L
WL, single



IP65 IK06 38° 30000 h L70B50 10

220-240 V ~50/60 Hz | 900 mA
Total wattage: 36 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CRI 90

3300 lm|3000 K | 3700 lm|4000 K

Options	Prod. no.	GBP
anthracite	**1003437**	**295.00**

Product	Prod. no.	GBP
Spacer		
anthracite	**1002853**	**7.00**
Reflector 60°		
chrome	**1005263**	**19.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ENOLA® SQUARE S
WL, UP/DOWN



220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.8 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conenviently adjustable light distribution using 60° interchangeable optics as an accessory

Up	310 lm	3000 K	350 lm	4000 K
Down	310 lm	3000 K	350 lm	4000 K

Options	Prod. no.	GBP
anthracite	**1003418**	**211.00**

Product	Prod. no.	GBP
Spacer		
anthracite	**1002853**	**7.00**
Reflector 60°		
chrome	**1005262**	**15.00**

ENOLA® SQUARE M
WL, UP/DOWN



220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conenviently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

Up	830 lm	3000 K	950 lm	4000 K
Down	830 lm	3000 K	950 lm	4000 K

Options	Prod. no.	GBP
anthracite	**1003419**	**258.00**

Product	Prod. no.	GBP
Spacer		
anthracite	**1002853**	**7.00**
Lens 19°		
black	**1005205**	**36.00**
Asymmetrical lens		
black/chrome	**1005206**	**36.00**
Reflector 60°		
chrome	**1005207**	**22.00**

ENOLA® SQUARE L
WL, UP/DOWN



220-240 V ~50/60 Hz | 700 mA
Total wattage: 55 W
Material: aluminium/glass

- The light colour must be set prior to installation
- Conenviently adjustable light distribution using 60° interchangeable optics as an accessory

Up	2700 lm	3000 K	3000 lm	4000 K
Down	2700 lm	3000 K	3000 lm	4000 K

Options	Prod. no.	GBP
anthracite	**1003438**	**404.00**

Product	Prod. no.	GBP
Spacer		
anthracite	**1002853**	**7.00**
Reflector 60°		
chrome	**1005263**	**19.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ENOLA® S/M/L
Reflector

S | H: 1.85 cm Ø: 4.5 cm
M | H: 4 cm Ø: 7.5 cm
L | H: 6.96 cm Ø: 11 cm
Material: polycarbonate (PC)

Options	Prod. no.	GBP
chrome **| S**	**1005262**	**15.00**
chrome **| M**	**1005207**	**22.00**
chrome **| L**	**1005263**	**19.00**

ENOLA® M
Lens 34°

Ø: 7.5 cm
H: 3.8 cm
Material: steel/polycarbonate (PC)

Options	Prod. no.	GBP
black	**1005205**	**36.00**

ENOLA® M
Asymmetrical lens

Ø: 7.5 cm
H: 3 cm
Material: steel/polycarbonate (PC)

Options	Prod. no.	GBP
black/chrome	**1005206**	**36.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

EASY TO INSTALL

1

WALL MOUNTING.

Screw the mounting plate into the wall with the fixing screw.

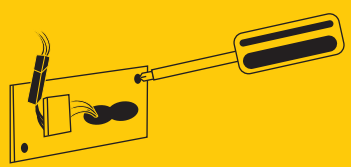

2

SIMPLY PLUG TOGETHER.

Connect the power supply plug connection to the LED lights.

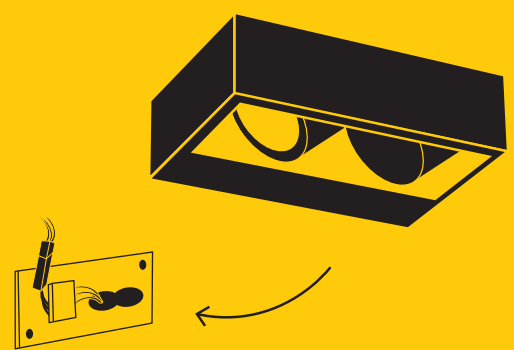

3

SIMPLE AND SECURE ASSEMBLY.

Hook the light into the useful guiding groove on the mounting plate and screw the light body to the mounting plate.

DONE!

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

Because efficiency always pays off, SLV lights are easy, quick and safe to install. On account of the fixed mounting plates, detachable lamp heads, spring clamps, through wiring, cable entries and various other features, they offer crucial benefits: in that they save you time, effort, and expense.

MOUNTABLE LIGHT HEADS.

With our ENOLA® family, the light head can be separated from the mounting plate attached to the wall. This way, after mounting using the integrated nib and establishing the electrical connection using the plug connection, both hands remain free to securely screw on the lights.





PRACTICAL SPRING CLAMPS.

The cube-shaped SITRA CUBE wall lights offer wonderful modern simplicity. This means they are also fast and simple to install: Simply directly connect the connection cable (no tools required) and connect the mounting plate coupling to the light connector – done!

Connecting the power



Simply plug together

FEED-THROUGH WIRING.

Our QUADRULO wall and ceiling lights show how simply through-wiring functions in practice. Two cable entries in a figure of 8 configuration are provided in the light's baseplate. In addition to two cable entries, the spring terminal also has two connection options. This means that multiple lights can be quickly and simply installed simultaneously.



Secure cable entry

Feed-through wiring

GRAFIT
WL, round, sensor, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/acrylic

- PIR sensor, adjustable range 10-2000 lx and 8 s-8 min. Detection range between 6-10 m depending on the mounting height of the light

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Options	Prod. no.	GBP
● anthracite	**1006179**	**78.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005303 9.00 GBP

GRAFIT
WL, round, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/acrylic

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Options	Prod. no.	GBP
● anthracite	**1006178**	**69.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005303 9.00 GBP

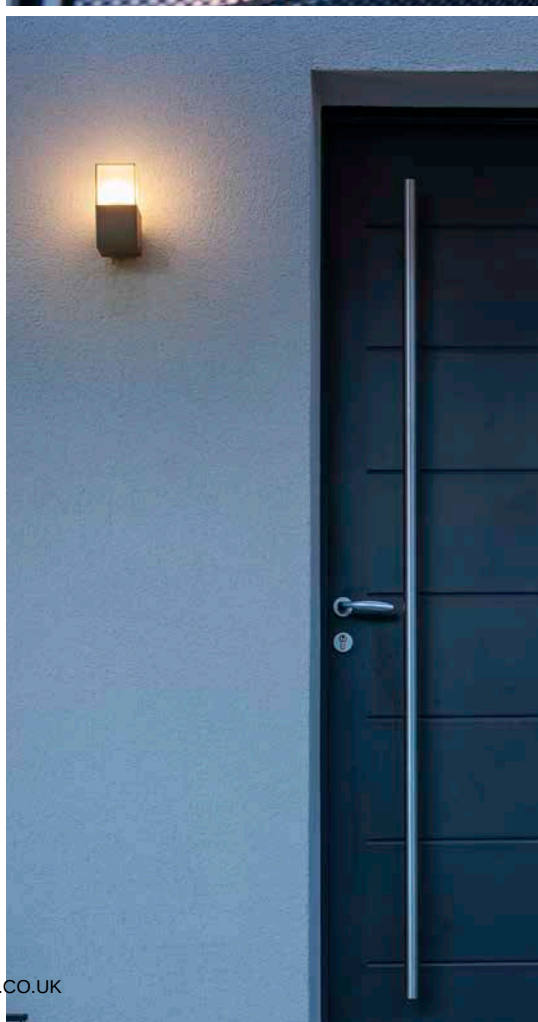

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

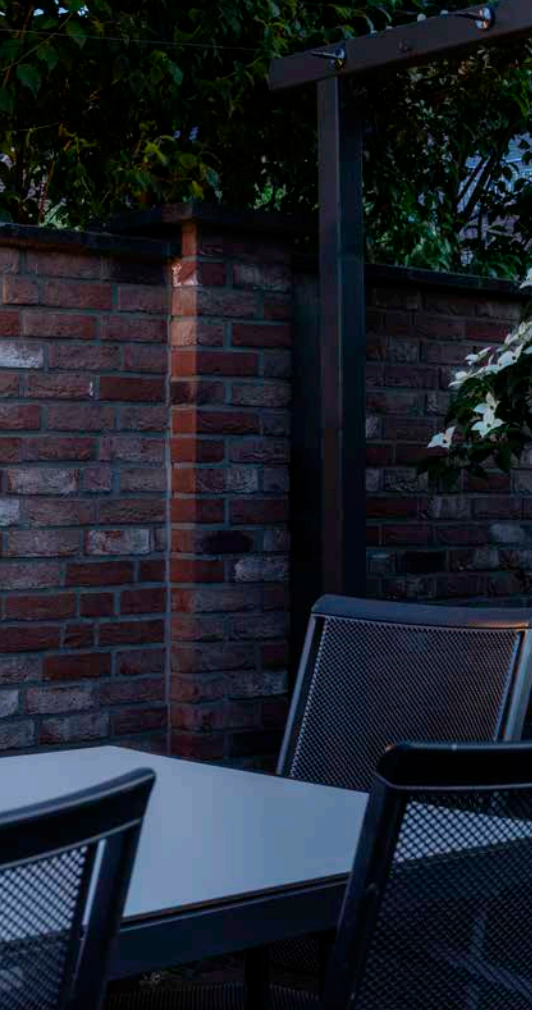

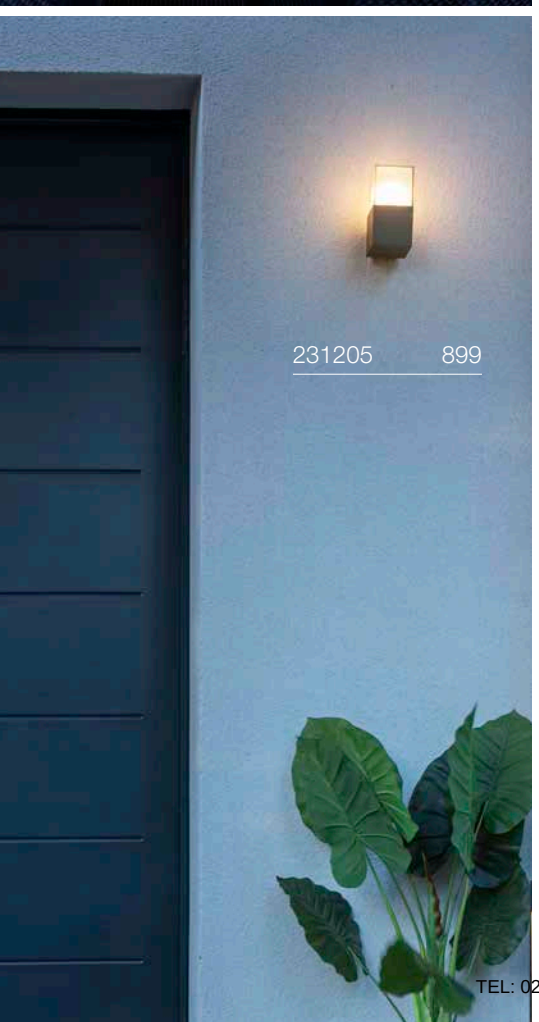

GRAFIT
WL, square, sensor, E27

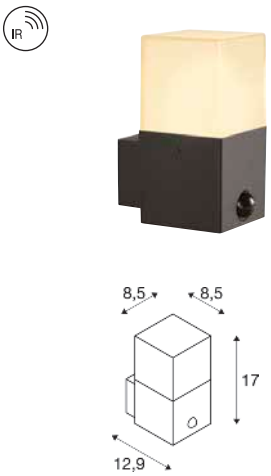

IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/acrylic

- PIR sensor, adjustable range 10-2000 lx and 8 s-8 min. Detection range between 6-10 m depending on the mounting height of the light

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Options	Prod. no.	GBP
● anthracite	**1006183**	**78.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F
14 kW/1000 h

Prod. no.: 1005302 11.00 GBP

GRAFIT
WL, E27

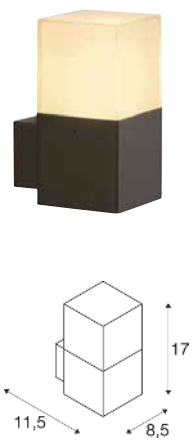

IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/plastic

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Options	Prod. no.	GBP
● anthracite	**231205**	**68.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005303 9.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

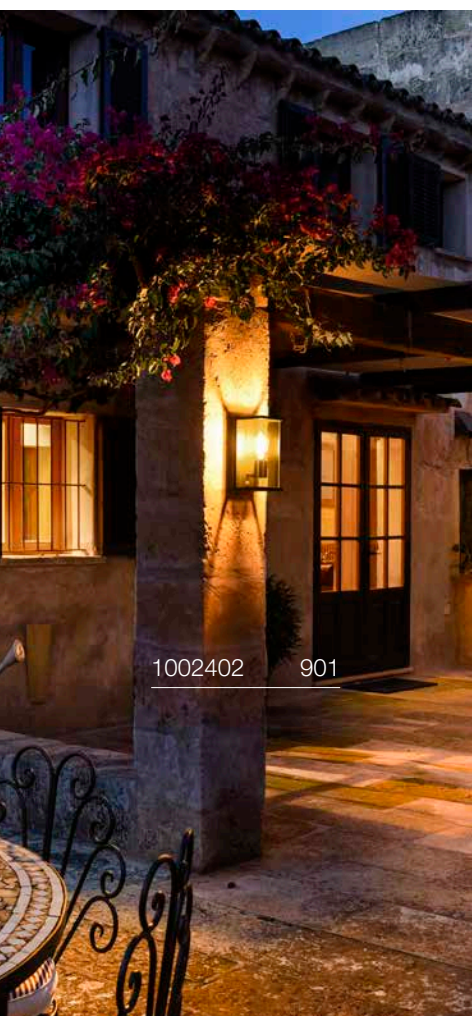

SQUARE
WL, E27



220-240 V ~50/60 Hz
Material: stainless steel 304

Base: 1xE27	max. Ø: 7 cm	L: 13 cm

Options	Prod. no.	GBP
stainless steel	**1000336**	**193.00**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A
4 kW/1000 h

Prod. no.: **1008641** **6.50 GBP**

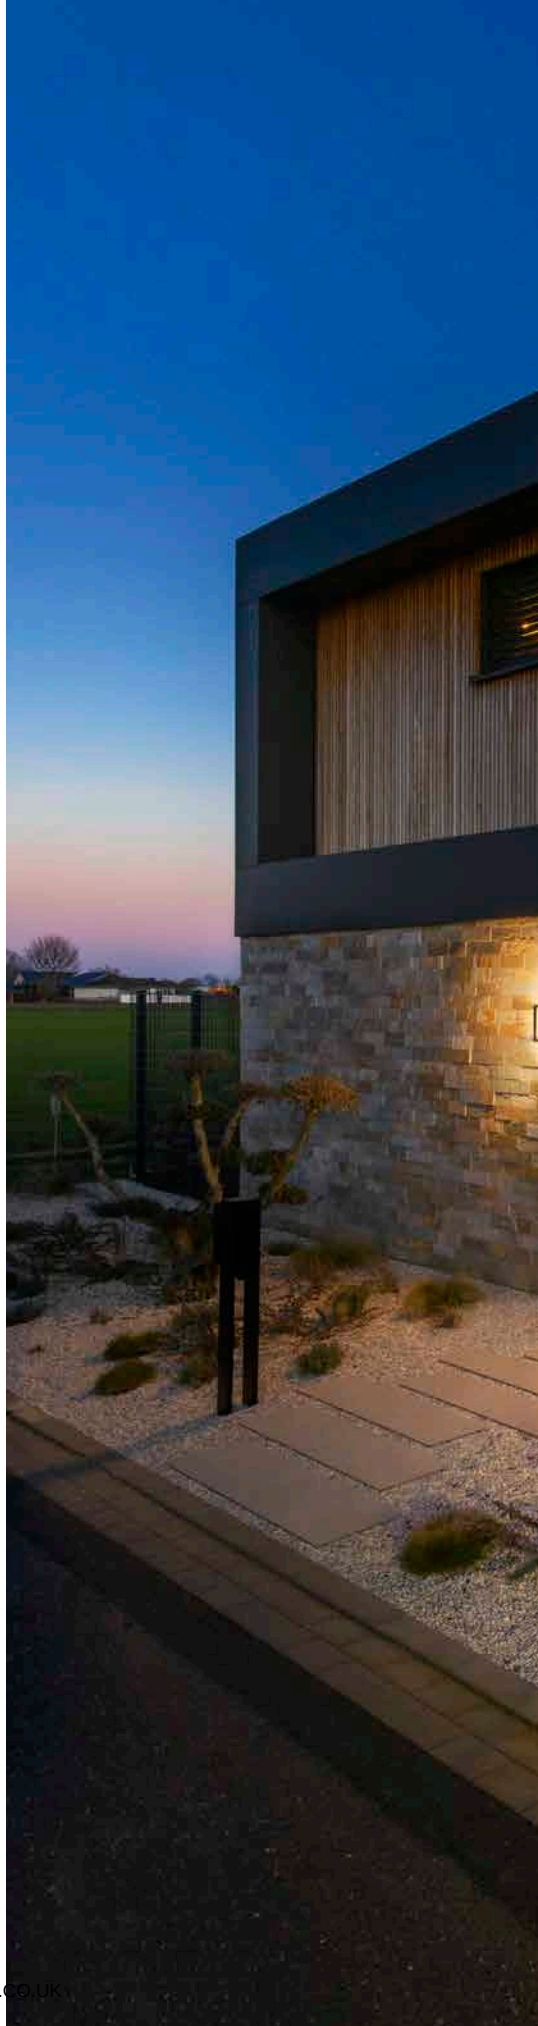

QUADRULO
WL



IP55 IK04 30000 h L70B50 20

100-277 V ~50/60 Hz | 350 mA
Total wattage: 7.4 W
Material: aluminium/acrylic

LED INSIDE CRI 80

270 lm | 3000 K

Options	Prod. no.	GBP
anthracite/brown 280 lm	**1007207**	**128.00**
anthracite 270 lm	**1005201**	**141.00**

QUADRULO SENSOR
WL, E27

IR



IP44 IK02 20

220-240 V ~50/60 Hz
Material: aluminium/glass

- PIR sensor, detection range up to 8 m depending on the mounting height of the light

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 8 cm | L: 18 cm

Options	Prod. no.	GBP
anthracite	**1002402**	**145.00**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kW/1000 h

Prod. no.: 1005265 23.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1002403 903

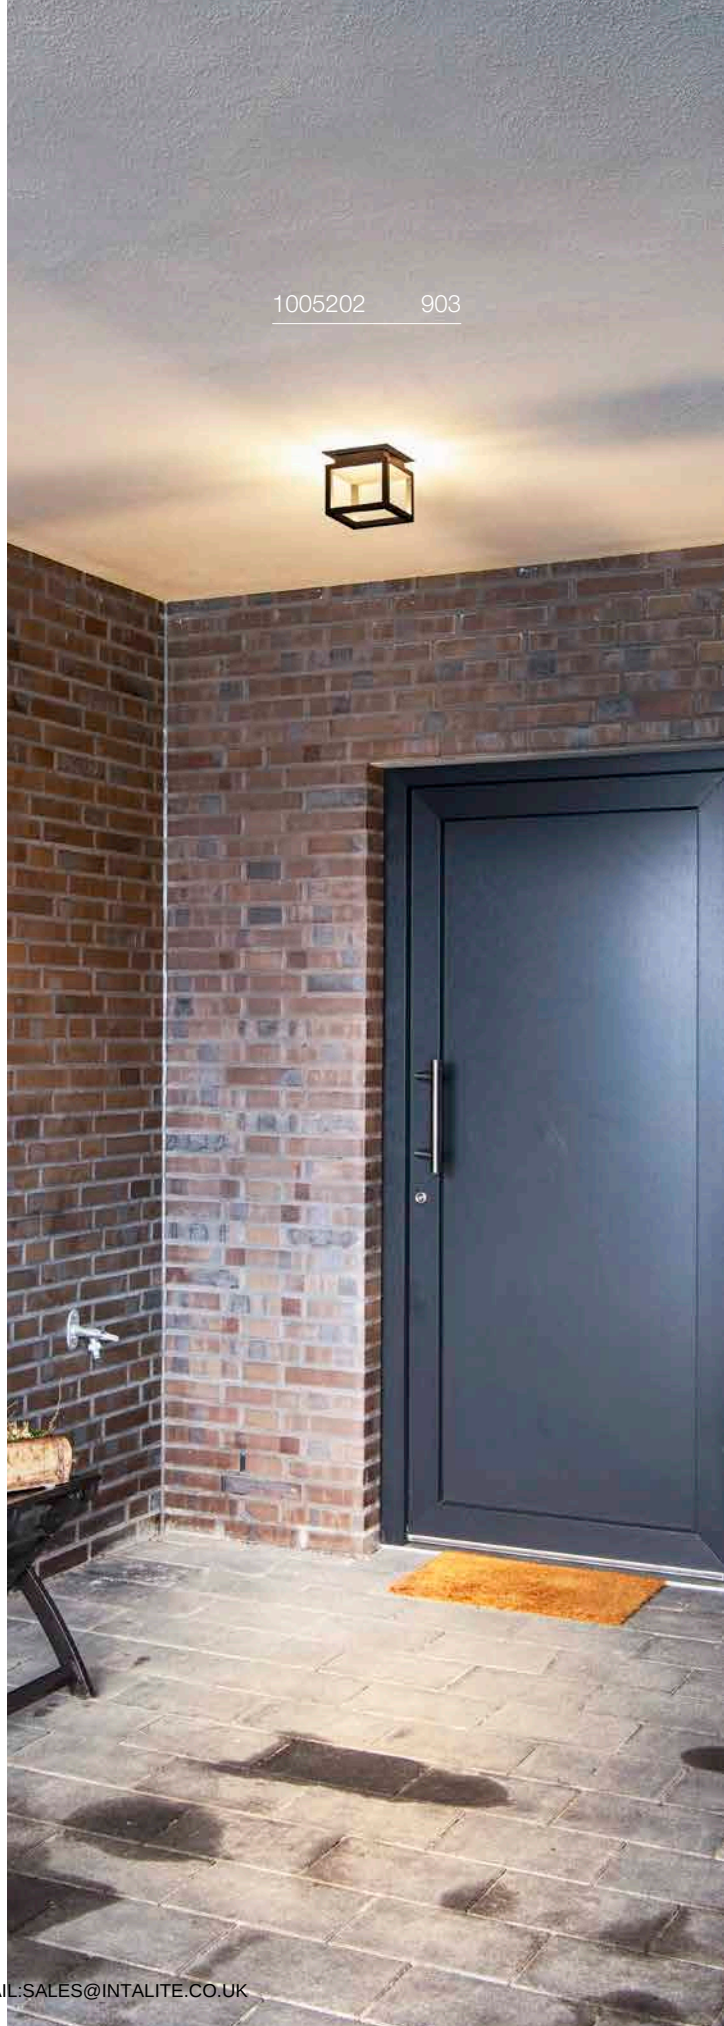
1005202 903

QUADRULO
WL, E27



IP44 IK02 20

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 8 cm | L: 18 cm

Options	Prod. no.	GBP
● anthracite	**1002403**	**128.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005268 11.00 GBP

QUADRULO
CL





IP55 IK02 30000 h L70B50 20

100-277 V ~50/60 Hz | 480 mA
Total wattage: 7.5 W
Material: aluminium/acrylic

LED INSIDE CRI 80

230 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1005202**	**141.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MERIDIAN BOX
WL, E27



IP54 IK02

220-240 V ~50/60 Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE 25 W

Base: 1xE27 | max. Ø: 7 cm | L: 17.5 cm

Options	Prod. no.	GBP
● anthracite	**230045**	**85.00**
● grey	**230044**	**85.00**

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E
14 kW/1000 h

Prod. no.: 1005307 11.00 GBP

MERIDIAN
WL, E27



IP54 IK03

220-240 V ~50/60 Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE 25 W

Base: 1xE27 | max. Ø: 7 cm | L: 17.5 cm

Options	Prod. no.	GBP
● anthracite	**230445**	**68.00**
● grey	**230444**	**68.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

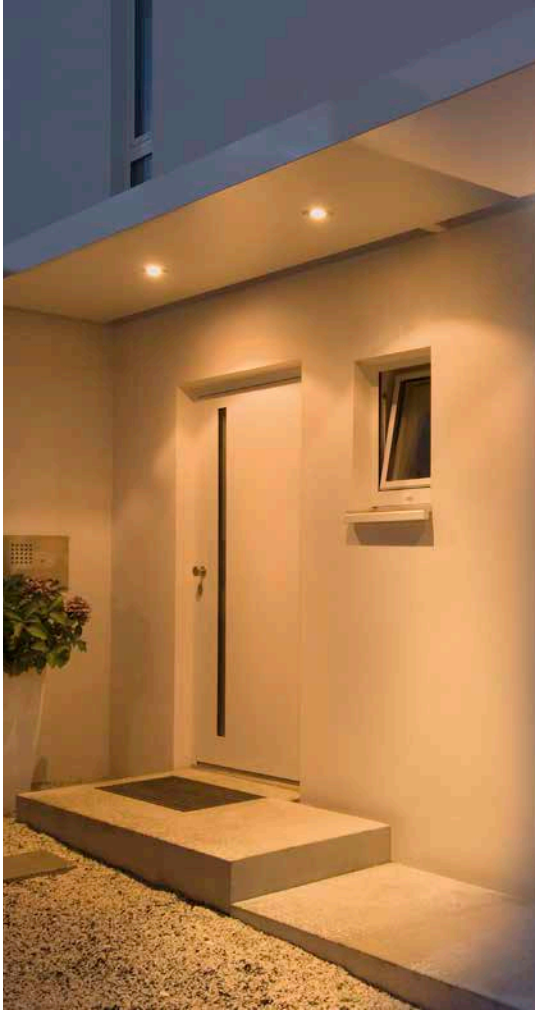

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

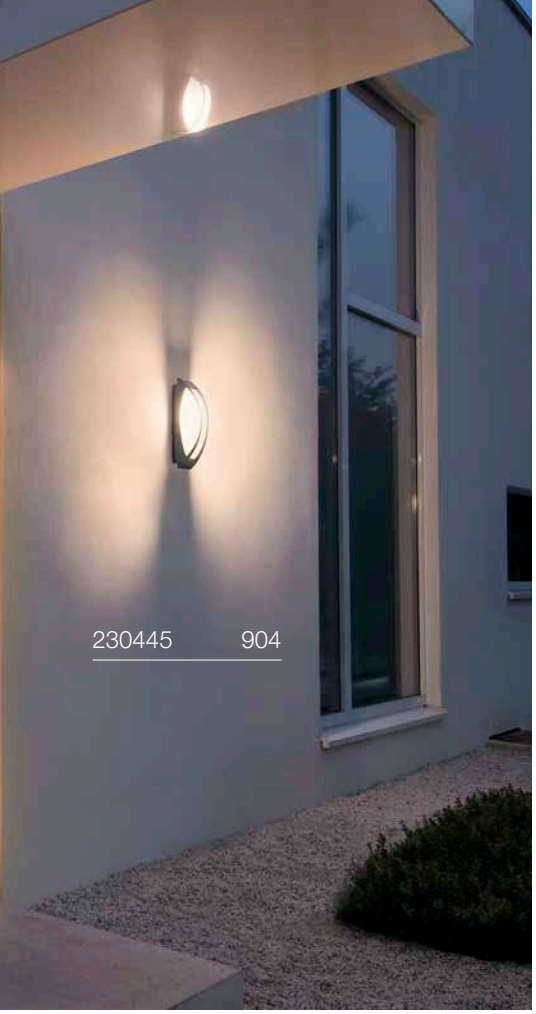

MERIDIAN BOX SENSOR
WL, E27

MR



IP54 IK02

220-240 V ~50/60 Hz
Material: aluminium/polycarbonate (PC)

- The ambient brightness and operating time can be adjusted.

SOCKET INSIDE 25 W

Base: 1xE27	max. Ø: 7 cm	L: 17.5 cm

Options	Prod. no.	GBP
anthracite	**230085**	**141.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

MERIDIAN BOX
WL, E27



IP54 IK02

220-240 V ~50/60 Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE 25 W

Base: 1xE27	max. Ø: 7 cm	L: 17.5 cm

Options	Prod. no.	GBP
anthracite	**230655**	**94.00**
rust	**230657**	**94.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005268 11.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

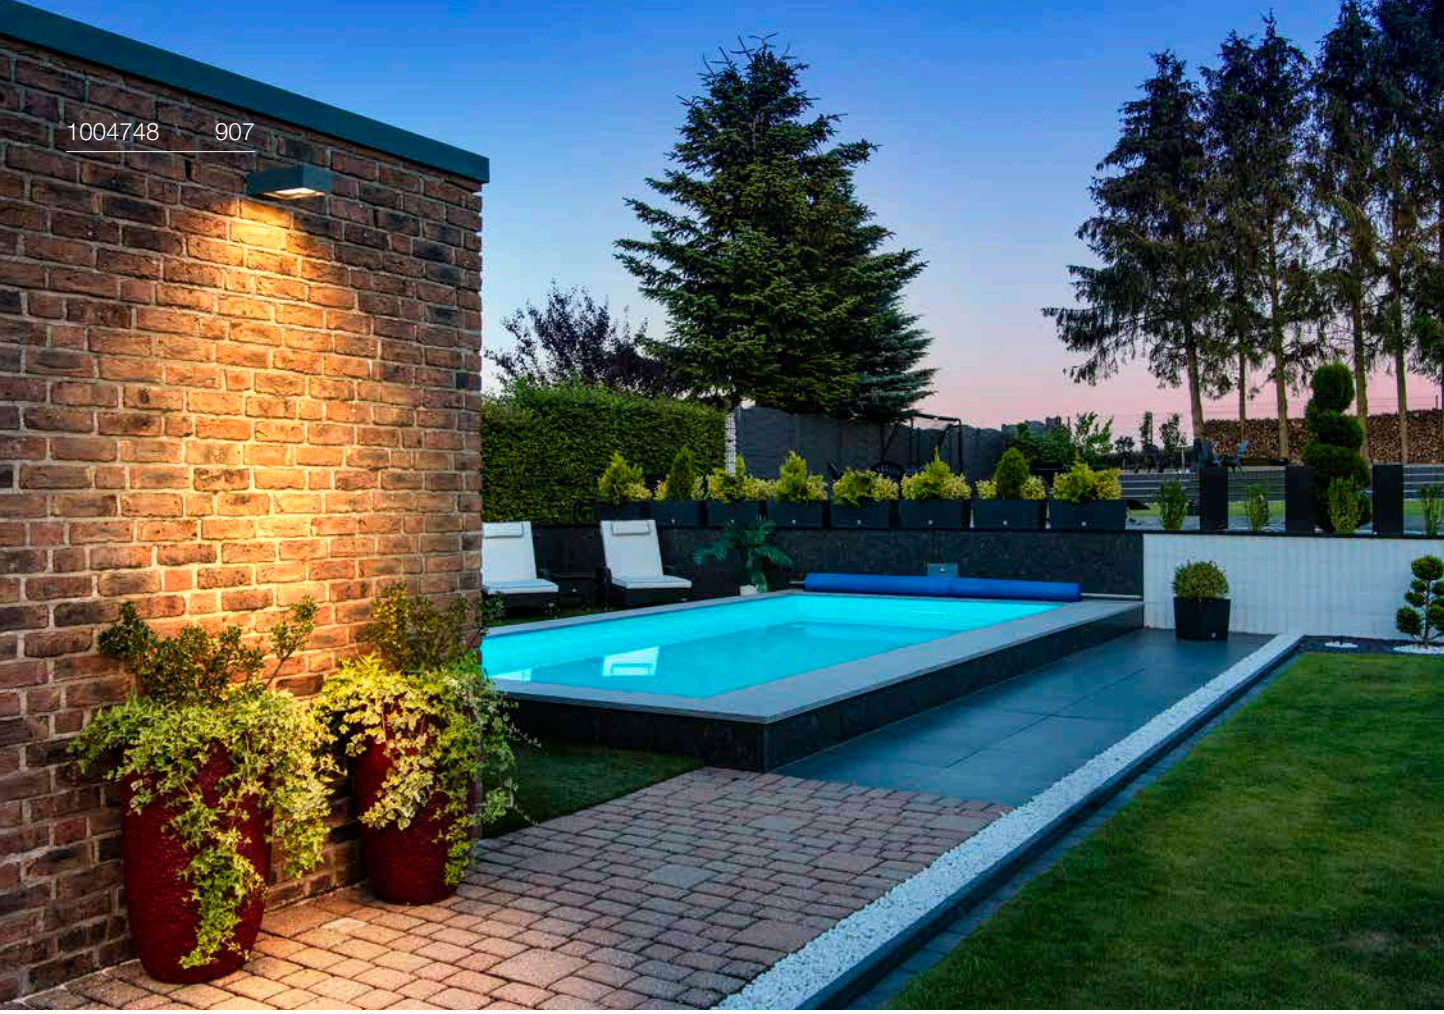
1004748 907

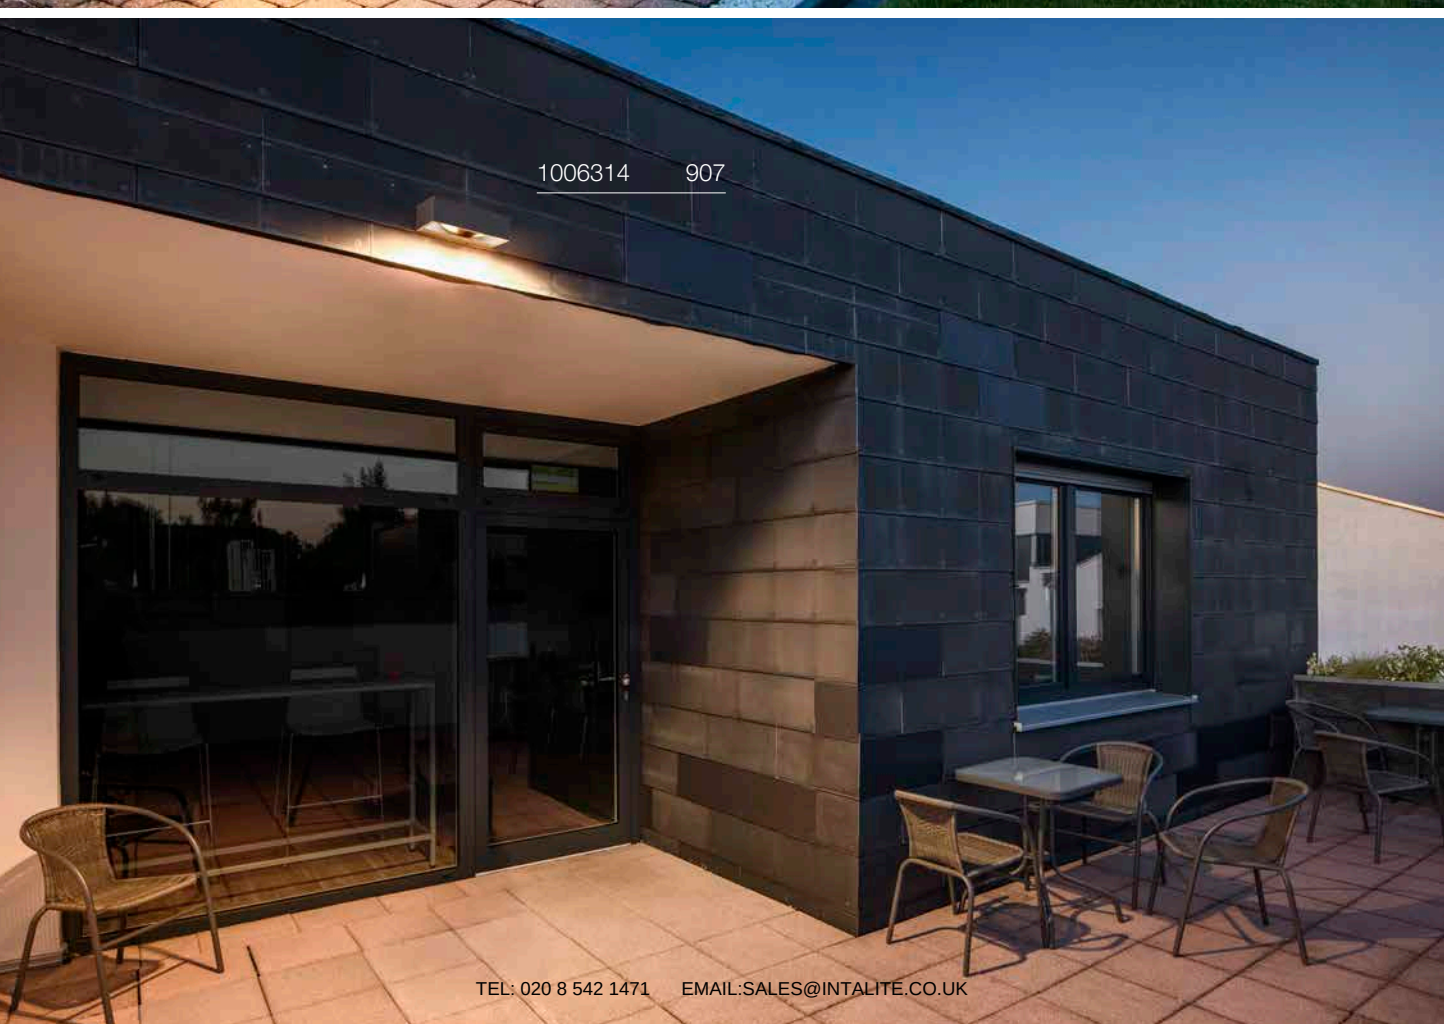
1006314 907

ESKINA FRAME
WL



IP65 IK06 95° 320° 30000h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium

- The light colour must be set prior to installation

INSIDE CRI 80

Direct	1100 lm	3000 K	1200 lm	4000 K

Options	Prod. no.	GBP
anthracite	1004747	190.00

ESKINA FRAME
WL, double



IP65 IK06 95° 320° 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium

- The light colour must be set prior to installation

INSIDE CRI 80

Spot 1	1100 lm	3000 K	1200 lm	4000 K
Spot 2	1100 lm	3000 K	1200 lm	4000 K

Options	Prod. no.	GBP
anthracite	1004748	233.00

ESKINA FRAME
WL, double



C IP65 IK06 95° 320° 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium

- The light colour must be set prior to installation

INSIDE CRI 80

Spot 1	1100 lm	3000 K	1200 lm	4000 K
Spot 2	1100 lm	3000 K	1200 lm	4000 K

Options	Prod. no.	GBP
anthracite	1006314	233.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

BOOKAT
WL



IP65 IK05 30000h L70B50 20

100-277 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: aluminium

INSIDE CRI 80

920 lm | 3000 K	990 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1005443**	**173.00**

TAHA II
WL, PHASE

NEW



C,L IP65 IK02 50000h L80B20

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: aluminium

INSIDE CRI 80

450 lm | 2200 K	500 lm | 2700 K

Options	Prod. no.	GBP
● black	**1010195** ●	**169.00**

TAHA II
WL, Sensor

NEW



C,L IP65 IK02 50000h L80B20

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: aluminium

- Primary and replica functionality. Option to control additional lights without a sensor

INSIDE CRI 80

450 lm | 2200 K	500 lm | 2700 K

Options	Prod. no.	GBP
● black	**1010196** ●	**203.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

OVALISK SENSOR
WL

CCT
IR



IP65 IK02 30000 h L70B50 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.6 W
Material: aluminium/glass

- The light colour must be set prior to installation
- PIR sensor, adjustable range 3-1000 lx and 8 s-12 min. Detection range up to 8 m depending on the mounting height of the light

LED INSIDE CRI 80

580 lm | 3000 K	630 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1004679**	**258.00**

OVALISK
WL

CCT



IP65 IK02 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.2 W
Material: aluminium/glass

- The light colour must be set prior to installation

LED INSIDE CRI 80

580 lm | 3000 K	630 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1004678**	**241.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PEMA®
WL



IP55 IK03 30000h L70B50

220-240 V ~50/60 Hz
Total wattage: 3.8 W
Material: aluminium

LED INSIDE CRI 80

190 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**231015**	**101.00**
○ white	**231010**	**102.00**
● grey	**231012**	**102.00**

PEMA®
WL



IP54 IK05 110° 30000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 7.7 W
Material: aluminium/glass

LED INSIDE CRI 80

640 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1002069**	**111.00**
○ white	**1002070**	**111.00**

PEMA®
WL

CCT



IP65 IK02 30000 h L70B50 10

100-277 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/glass

LED INSIDE CRI 80

1340 lm | 3000 K | 1420 lm | 4000 K

Options	Prod. no.	GBP
● black	**1003453**	**124.00**
● grey	**1003454**	**124.00**

PEMA®
WL, E27



IP65 20

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 21 cm

Options	Prod. no.	GBP
● black	**230030**	**91.00**
● grey	**230034**	**91.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ASTINA
WL, QPAR51



IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 11 W

Base: 2xGU10 | L: 9 cm

Options	Prod. no.	GBP
anthracite	**228775**	**71.00**
white	**228771**	**71.00**
aluminium	**228776**	**76.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000 h

Prod. no.: 1005273 9.00 GBP

ASTINA STEEL
WL, QPAR51



IP44

220-240 V ~50/60 Hz
Material: stainless steel 304

SOCKET INSIDE 35 W

Base: 2xGU10 max. Ø: 5.1 cm | L: 5.7 cm

Options	Prod. no.	GBP
stainless steel	**233302**	**107.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G
6 kW/1000 h

Prod. no.: 1005273 9.00 GBP

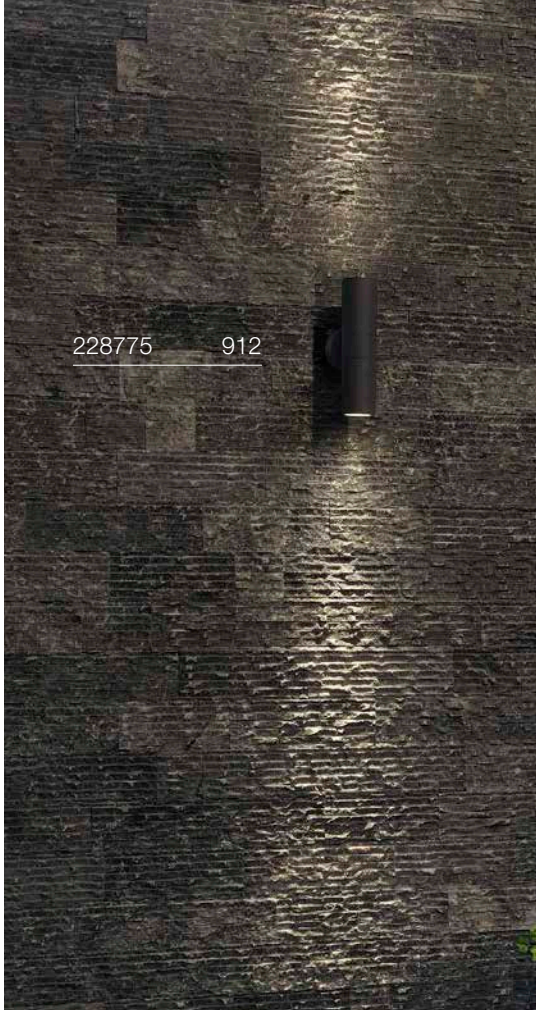

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

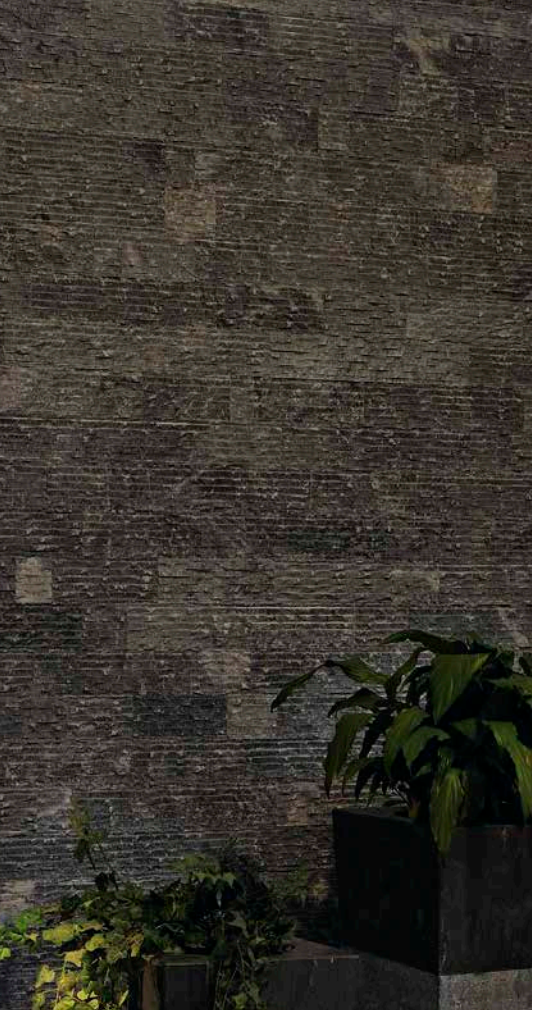

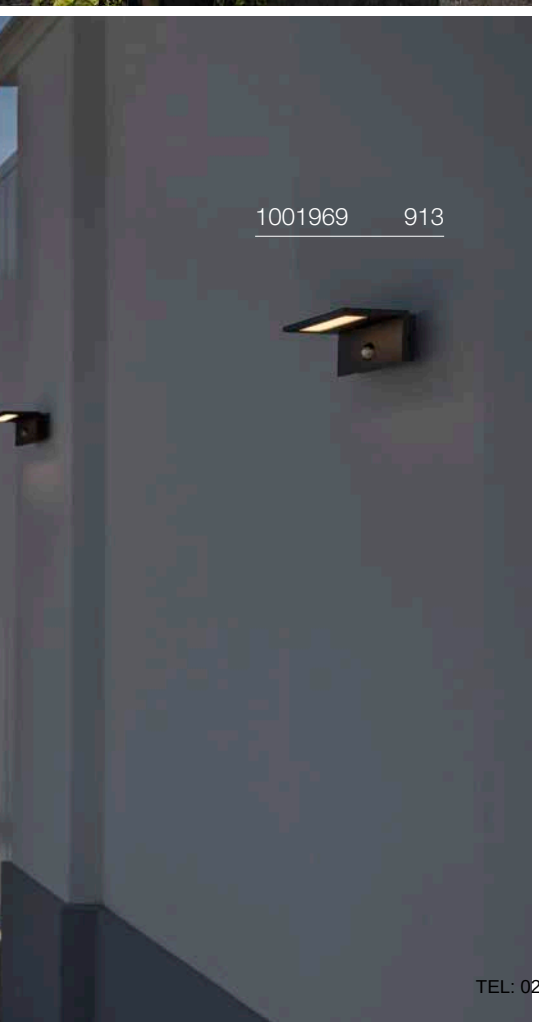

ANGOLUX SENSOR
WL



IP44 IK02 100° 25000h L80B50 20

100-240 V ~50/60 Hz | 240 mA
Total wattage: 9.8 W
Material: aluminium

- PIR sensor, adjustable range 10-2000 lx and 8 s-8 min. Detection range between 6 -10 m depending on the mounting height of the light
- Protection rating IP44 only when mounted with light emission downwards.

LED INSIDE CRI 80

750 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1001969**	**156.00**
○ white	**1001970**	**156.00**

ANGOLUX
WL



IP44 IK02 120° 25000h L70B50

220-240 V ~50/60 Hz | 80 mA
Total wattage: 6.8 W
Material: aluminium

- Protection rating IP44 only when mounted with light emission downwards.

LED INSIDE CRI 80

550 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**231355**	**139.00**
○ white	**231351**	**139.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1002505 914

VILUA S
WL



IP54 IK02 100° 30000h L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 9 W
Material: aluminium/glass

LED INSIDE CRI 80

405 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1002503**	**137.00**

VILUA L
WL



IP54 IK02 100° 30000h L70B50

100-277 V ~50/60 Hz | 350 mA
Total wattage: 17 W
Material: aluminium/glass

LED INSIDE CRI 80

940 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1002504**	**171.00**

VILUA
WL, UP/DOWN



IP54 IK02 100° 100° 30000h L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 16 W
Material: aluminium/glass

LED INSIDE CRI 80

Up	400 lm | 3000 K
Down	400 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1002505**	**171.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

MYRA UP/DOWN
WL, QPAR51



IP55 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 35 W

Base: 2xGU10	max. Ø: 5.1 cm	L: 5.7 cm

Options	Prod. no.	GBP
● anthracite	**233115**	**85.00**
● grey	**233114**	**85.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

Product	Prod. no.	GBP
Surface-mounting frames		
● grey	**233214**	**19.00**

233114 916

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

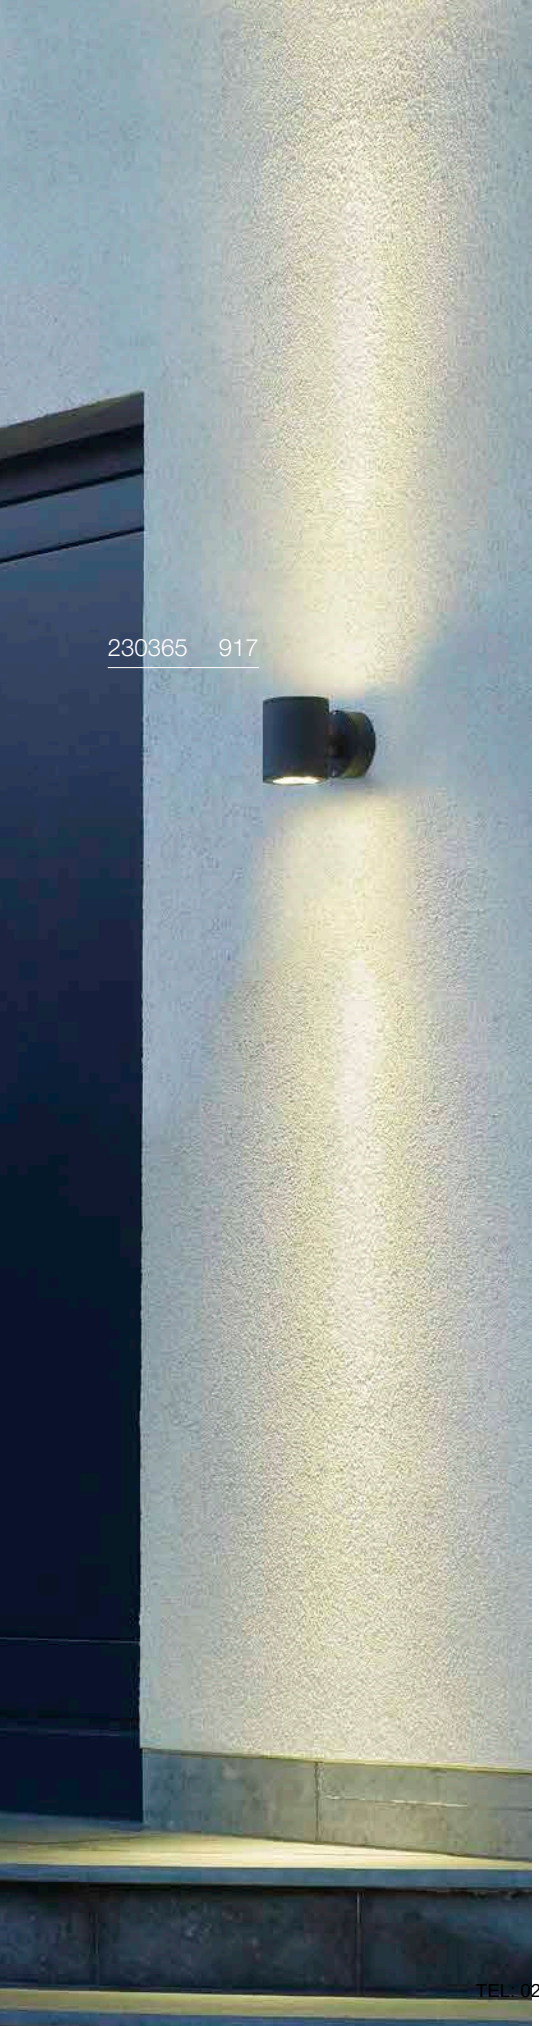

230365 917

SITRA
WL, UP/DOWN, TCR-TSE



IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 9 W

Base: 2xG53 | max. Ø: 7.5 cm | L: 3.5 cm

Options	Prod. no.	GBP
● anthracite	**230365**	**85.00**

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G
7 kW/1000 h

C,L

Prod. no.: 1005272 10.00 GBP

SITRA
WL, TCR-TSE



IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 9 W

Base: 1xG53 | max. Ø: 7.5 cm | L: 3.5 cm

Options	Prod. no.	GBP
● anthracite	**230355**	**59.00**

GX53 | 6 W | 120°
490 lm | 3000 K | EEC = G
7 kW/1000 h

C,L

Prod. no.: 1005271 10.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1000334 918

ROX
WL, UP/DOWN, QPAR111



IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 50 W

Base: 2xGU10

Options	Prod. no.	GBP
● aluminium	**1000334**	**164.00**

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G
12 kW/1000 h

Prod. no.: 1005298 73.00 GBP

DELWA
WL



IP44 IK02 100° 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 10 W
Material: aluminium/glass

LED INSIDE CRI 80

840 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1000342**	**182.00**
○ white	**1000340**	**182.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

WALLYX
WL, QPAR51



IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 50 W

Base: 1xGU10	L: 7.6 cm

Options	Prod. no.	GBP
● anthracite	**227195**	**103.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

Prod. no.: **1005077** **7.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

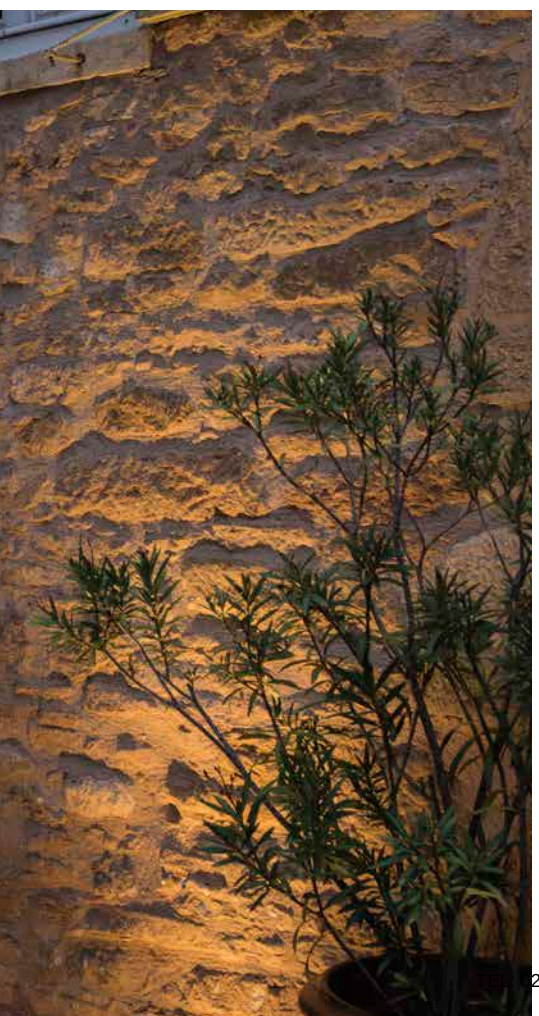

DOWNUNDER OUT
WL, round



IP65 IK02 60° 30 000 h L70B50

100-240 V ~50/60 Hz | 500 mA
Total wattage: 4.3 W
Material: aluminium

LED INSIDE CRI 80

150 lm | 3000 K	160 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1002868**	**114.00**

DOWNUNDER OUT
WL, square



IP65 IK02 60° 30 000 h L70B50

100-240 V ~50/60 Hz | 500 mA
Total wattage: 4.3 W
Material: aluminium

LED INSIDE CRI 80

150 lm | 3000 K	160 lm | 4000 K

Options	Prod. no.	GBP
● anthracite	**1002869**	**115.00**

20 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008542 923

ABRIDOR HYBRID
WL



100-240 V ~50/60 Hz | 380 mA
Total wattage: 6.8 W
Material: aluminium

- Solar and 230V operation possible
- 3 different modes
- Battery charging via solar

600 lm | 2200 K	650 lm | 2700 K

Options	Prod. no.	GBP
● anthracite	**1008542**	**171.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1002990 925

ABRIDOR
WL



IP55 IK03 100° 90° 30000h L70B50

100-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: aluminium

950 lm|3000 K | 980 lm|4000 K

Options	Prod. no.	GBP
● anthracite	**1002989**	**153.00**

ABRIDOR SENSOR
WL



IP54 IK03 100° 90° 30000h L70B50

100-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: aluminium

- PIR sensor, adjustable range 15-2000 lx and 5 s-10 min. Detection range between 6-9 m depending on the mounting height of the light

950 lm|3000 K | 980 lm|4000 K

Options	Prod. no.	GBP
● anthracite	**1002990**	**170.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ORDI II SENSOR
WL



IP54 IK07 50 000 h L80B20 10

100-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: aluminium

- The light colour must be set prior to installation
- Primary and replica functionality
- PIR sensor, adjustable range 20-2000 lx and 8 s-8 min. Detection range between 8-9 m depending on the mounting height of the light

LED INSIDE CRI 80

700 lm | 2200 K | 850 lm | 3000 K

Options	Prod. no.	GBP
● black 700/850 lm	**1008723**	**178.00**
○ white 750lm/900lm	**1008724**	**178.00**

ORDI II
WL, PHASE



C,L IP65 IK07 50 000 h L80B20

220-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: aluminium

- The light colour must be set prior to installation

LED INSIDE CRI 80

700 lm | 2200 K | 850 lm | 3000 K

Options	Prod. no.	GBP
● black 700 lm	**1008721**	**161.00**
○ white 750 lm	**1008722**	**161.00**

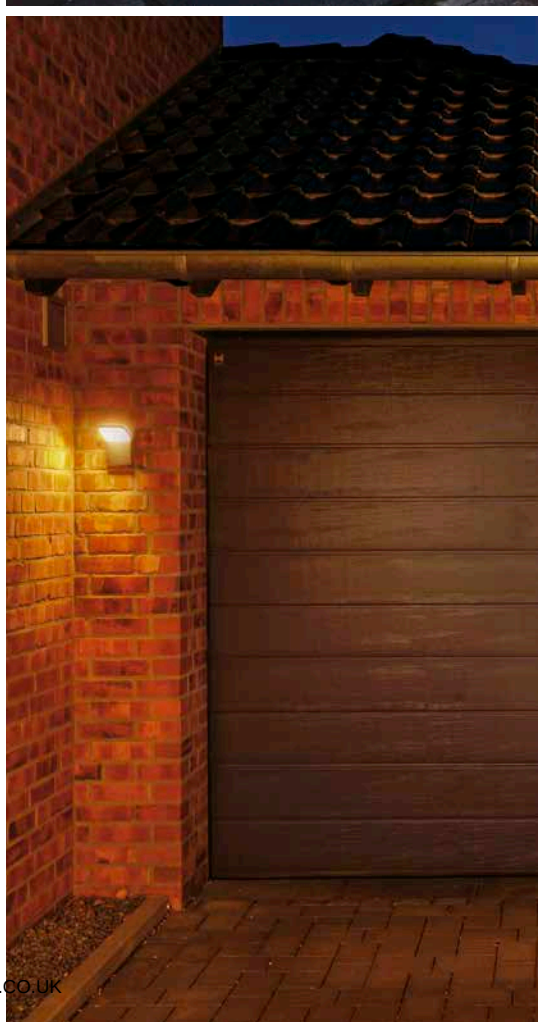

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

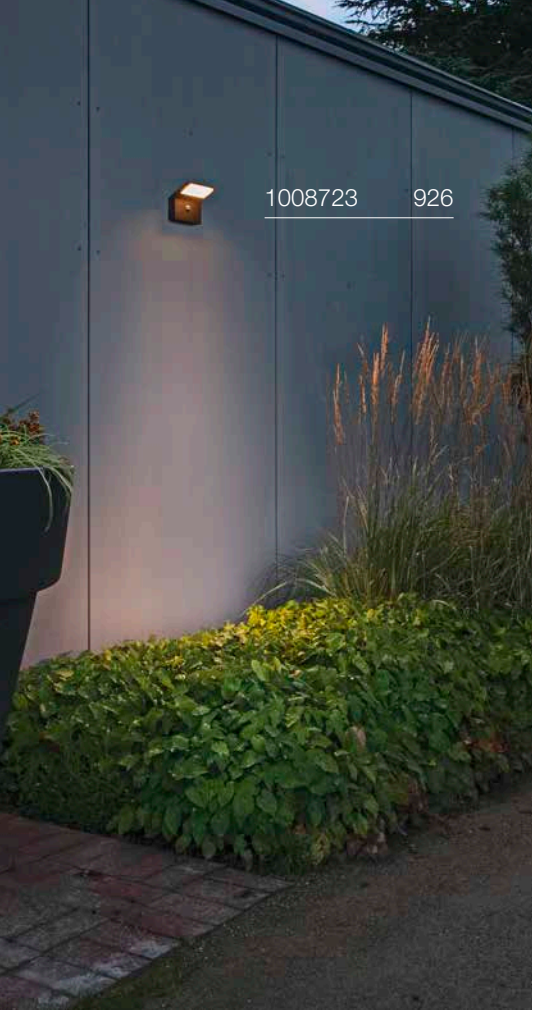

ORDI
WL



IP44 IK02 120° 25000h L70B50

220-240 V ~50/60 Hz | 110 mA
Total wattage: 9 W
Material: aluminium

LED INSIDE CRI 80

740 lm|3000 K

Options	Prod. no.	GBP
● anthracite	**232905**	**111.00**

ORDI SENSOR
WL

IR



IP44 IK02 120° 25000h L70B50

220-240 V ~50/60 Hz | 110 mA
Total wattage: 9 W
Material: aluminium

LED INSIDE CRI 80

740 lm|3000 K

Options	Prod. no.	GBP
● anthracite	**232915**	**128.00**

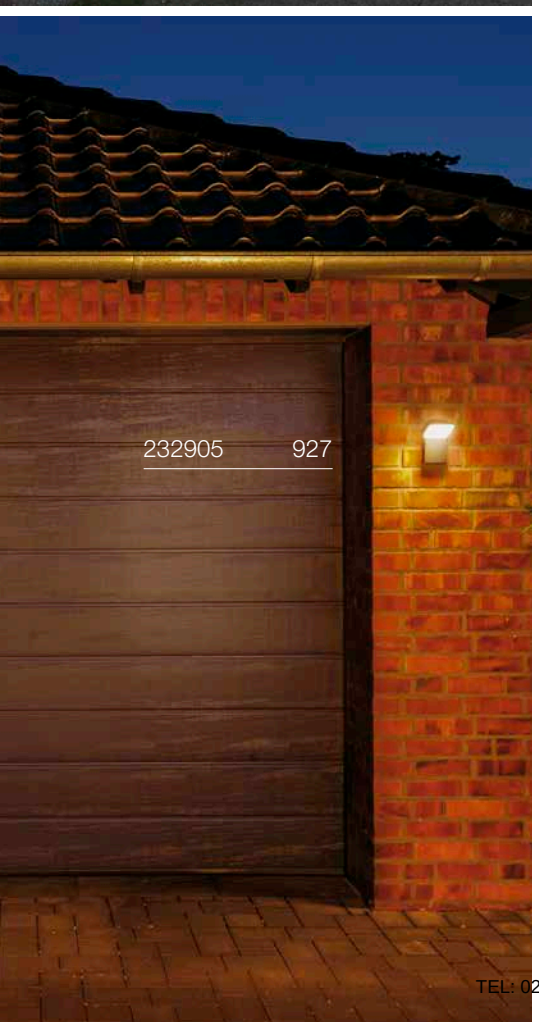

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

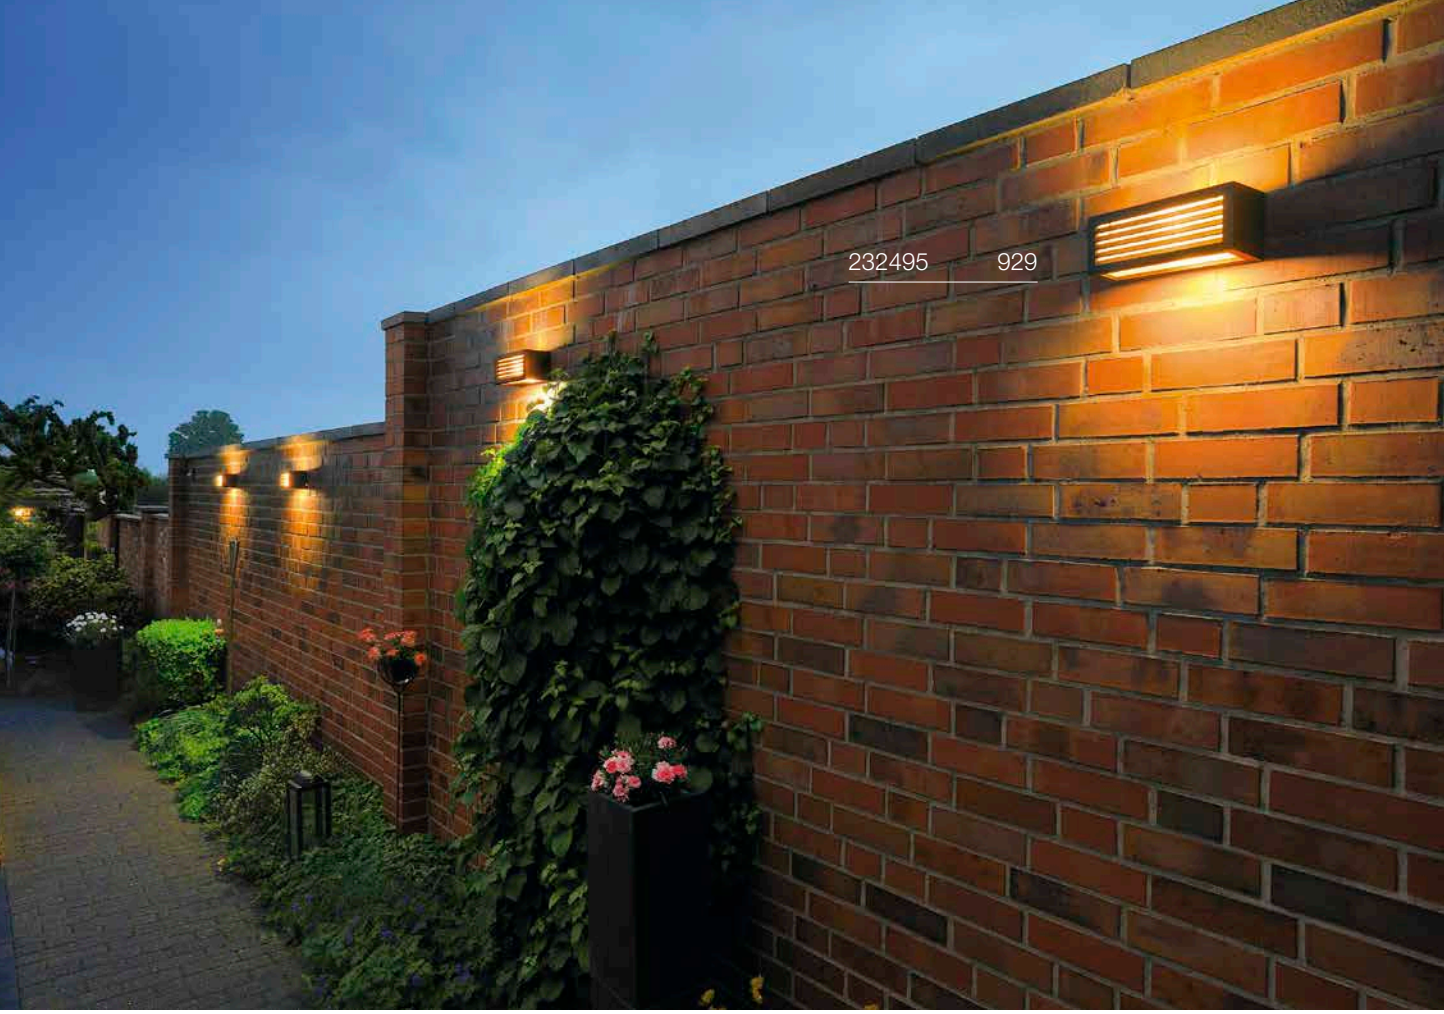
232495 929

1002035 929

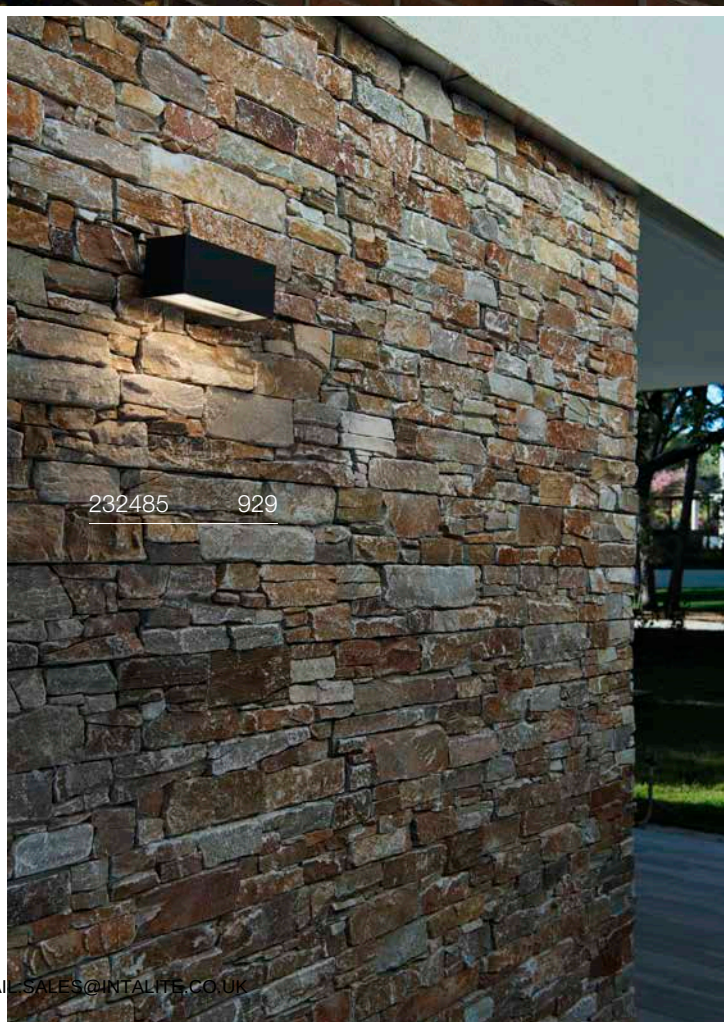
232485 929

BOX-L
WL, E27



IP54

220-240 V ~50/60 Hz
Material: aluminium/acrylic

SOCKET INSIDE 18 W

Base: 1xE27 max. Ø: 6 cm | L: 17.5 cm

Options	Prod. no.	GBP
● anthracite	**232495**	**90.00**
○ white	**232491**	**90.00**
● rust	**232497**	**90.00**

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E
14 kW/1000 h

Prod. no.: 1005307 11.00 GBP

BOX-L
WL



IP54 IK05 30000 h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/acrylic

LED INSIDE CRI 80

600 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**1002035**	**109.00**

BOX
WL, UP/DOWN, QT-DE12



IP44 IK03

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 80 W

Base: 1xR7s 78 mm

Options	Prod. no.	GBP
● anthracite	**232485**	**85.00**

R7s 78mm | 9 W | 330°
1050 lm | 3000 K | EEC = E
9 kW/1000 h

Prod. no.: 1005287 21.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

232101 931

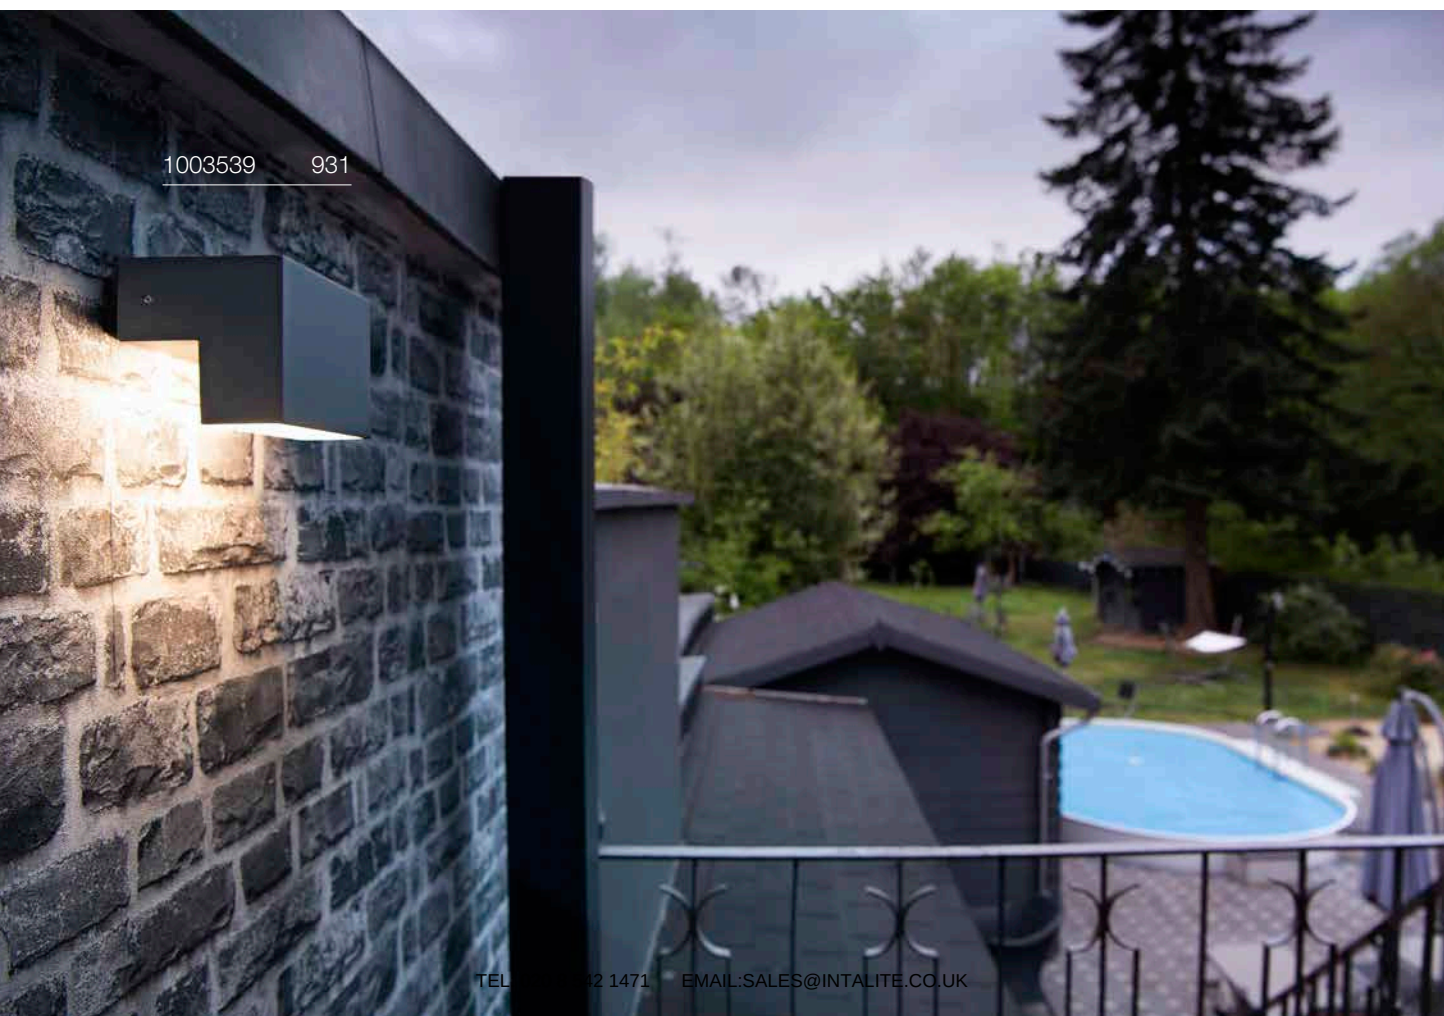
1003539 931

LOGS
WL



IP65 IK04 40000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium

INSIDE CRI 80

800 lm	3000 K

Options	Prod. no.	GBP
● anthracite 520 lm	**232105**	**172.00**
○ white 800 lm	**232101**	**172.00**

OUT-BEAM UP/ FLOOD DOWN
WL



IP44 IK03 2° 80° 25000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium/glass

- The 2° light effect is particularly suitable for contouring and structuring surfaces and building facades.

INSIDE CRI 80

Down	690 lm	3000 K
Beam	50 lm	

Options	Prod. no.	GBP
● anthracite	**229665**	**236.00**
● grey	**229664**	**236.00**

L-LINE OUT
WL

CCT



IP65 IK02 30000h L70B50 10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7 W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation

INSIDE CRI 80

500 lm	3000 K	570 lm	4000 K

Options	Prod. no.	GBP
● anthracite	**1003539**	**121.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

232045
933

PHOTONIA
WL, E27



IP55 IK03 20

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 9 cm | L: 15 cm

Options	Prod. no.	GBP
● anthracite	232045	165.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F
8 kW/1000 h

Prod. no.: 1005265 23.00 GBP

Product	Prod. no.	GBP
Spacer		
● anthracite	1002853	7.00

MOLAT
WL, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 14.5 cm

Options	Prod. no.	GBP
● anthracite	1000820	85.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F
8 kW/1000 h

Prod. no.: 1005303 9.00 GBP

GLOO PURE
WL, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 18 cm

Options	Prod. no.	GBP
● anthracite	1002002	88.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

F-POL
WL, E27



IP54 IK07

220-240 V ~50/60 Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 5.1 cm | L: 14 cm

Options	Prod. no.	GBP
● anthracite	**231585**	**121.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

IPERI
WL



IP44 IK02 25000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 4.5 W
Material: aluminium

LED INSIDE CRI 80

400 lm | 4000 K

Options	Prod. no.	GBP
● black	**231315**	**111.00**

231315 934

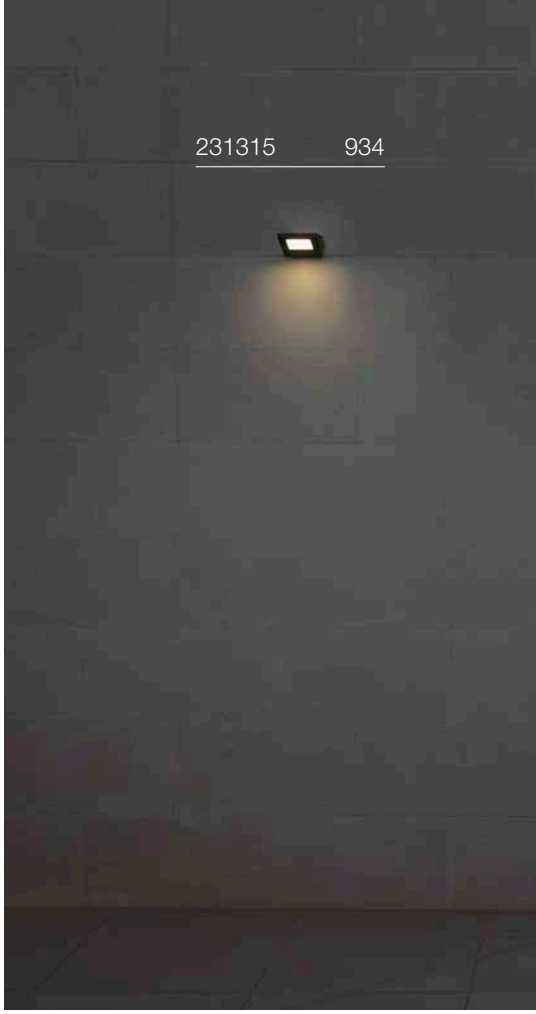

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.C

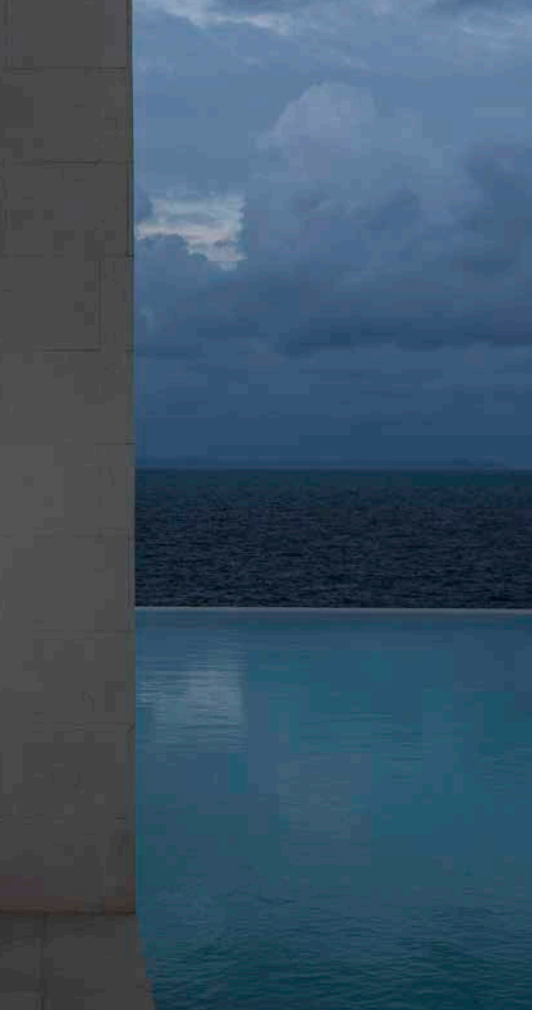

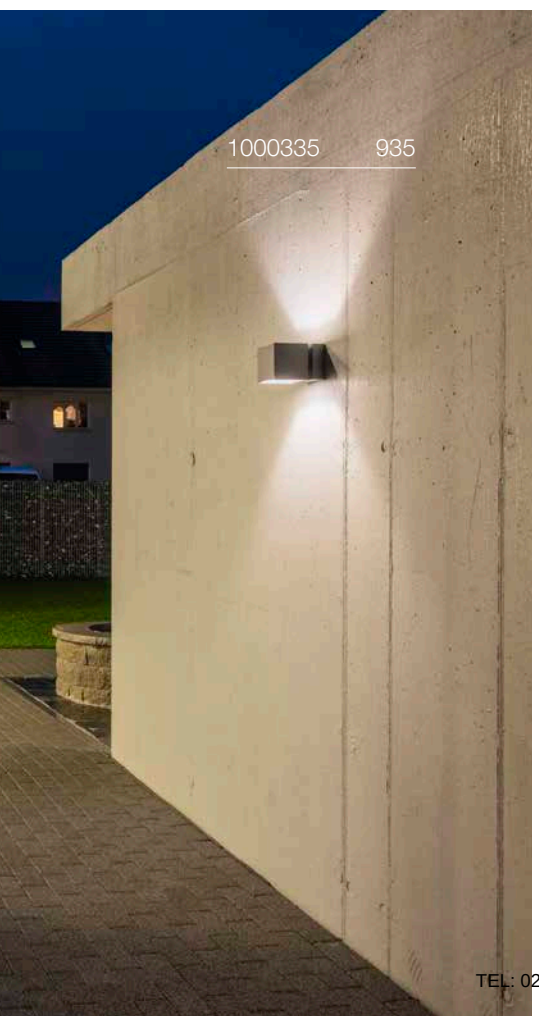

QUADRASYL
WL, TCR-TSE



IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 11 W

Base: 1xG53	max. Ø: 7.5 cm	L: 2.7 cm

Options	Prod. no.	GBP
● anthracite	**232285**	**55.00**

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G
7 kW/1000 h

Prod. no.: 1005272 10.00 GBP

SQUARE TURN
WL, G9



IP44 360°

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 42 W

Base: 1xG9	max. Ø: 3.5 cm	L: 8 cm

Options	Prod. no.	GBP
● grey	**1000335**	**180.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E
4 kW/1000 h

Prod. no.: 1005286 8.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TODAY PRO
Display



220-240 V ~50/60 Hz | 640 mA
Total wattage: 29 W
Material: aluminium

LED INSIDE CRI 70

2800 lm | 4000 K

Options	Prod. no.	GBP
● black 2800 lm	**1000880**	**203.00**
○ white 3400 lm	**1000881**	**203.00**

ESKINA D
Display, PHASE



IP65 IK02 95° 340° 105° 36000 h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14.5 W
Material: aluminium

• CCT switch on light head

LED INSIDE CRI 80

1000 lm | 3000 K | 4000 K

Options	Prod. no.	GBP
● anthracite	1002905	233.00

MYRA DISPLAY
WL, curved, QPAR51



IP55 IK02 340° 45°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 50 W

Base: 1xGU10 max. Ø: 5.1 cm L: 5.7 cm

Options	Prod. no.	GBP
● anthracite	233135	154.00
● grey	233134	154.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

Product	Prod. no.	GBP
Surface-mounting frames		
● grey	233214	19.00

MYRA
WL, double, QPAR51



IP55 IK02 340° 45° 20

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 50 W

Base: 2xGU10 max. Ø: 5.1 cm L: 5.7 cm

Options	Prod. no.	GBP
● anthracite	233095	145.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

Product	Prod. no.	GBP
Spacer		
● anthracite	1002853	7.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

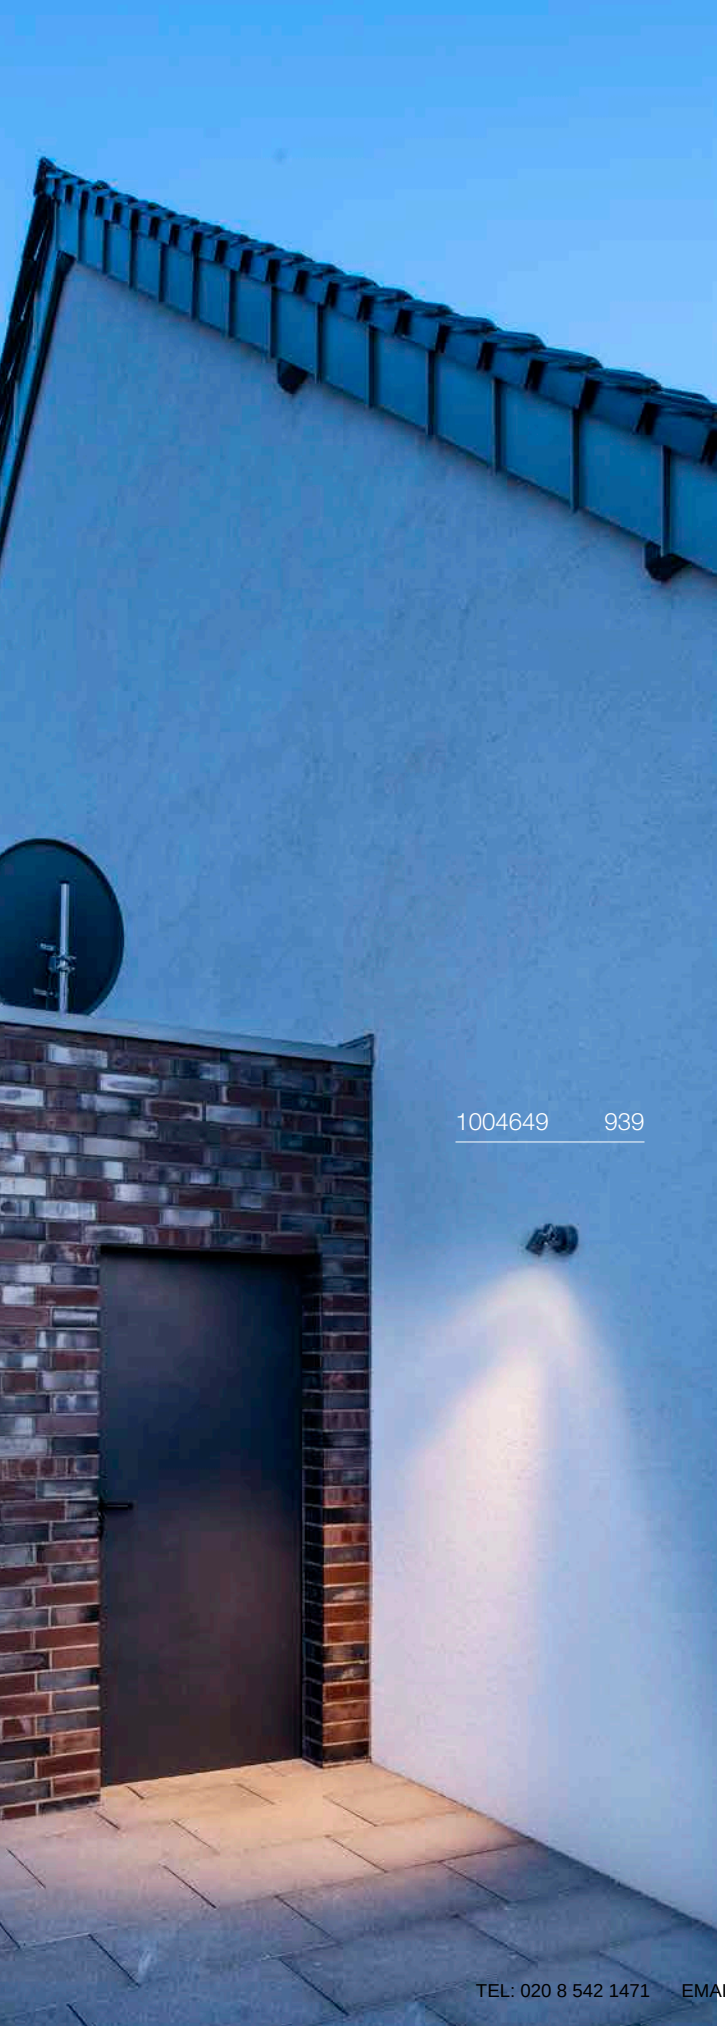
1004649 939

233105 939

LED SPOT
SP



IP55 IK06 40° 330° 180° 30000h L80B50

100-240 V ~50/60 Hz | 240 mA
Total wattage: 6 W
Material: aluminium/glass

LED INSIDE CRI 80

400 lm | 3000 K

Options	Prod. no.	GBP
anthracite	1004649	62.00
rust	1004957	62.00

Product	Prod. no.	GBP
NAUTILUS | Mounting plate		
black	1002884	5.00

NAUTILUS
WL QPAR51



IP54 IK02 330° 180°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 11 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 8.3 cm

Options	Prod. no.	GBP
black	1002867	42.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

Product	Prod. no.	GBP
NAUTILUS | Mounting plate		
black	1002884	5.00

MYRA
CW, single, QPAR51



IP55 IK02 340° 45°

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 50 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Options	Prod. no.	GBP
anthracite	233105	77.00
grey	233104	77.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

C,L

Prod. no.: 1005077 7.00 GBP

Product	Prod. no.	GBP
Surface-mounting frames		
grey	233214	19.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

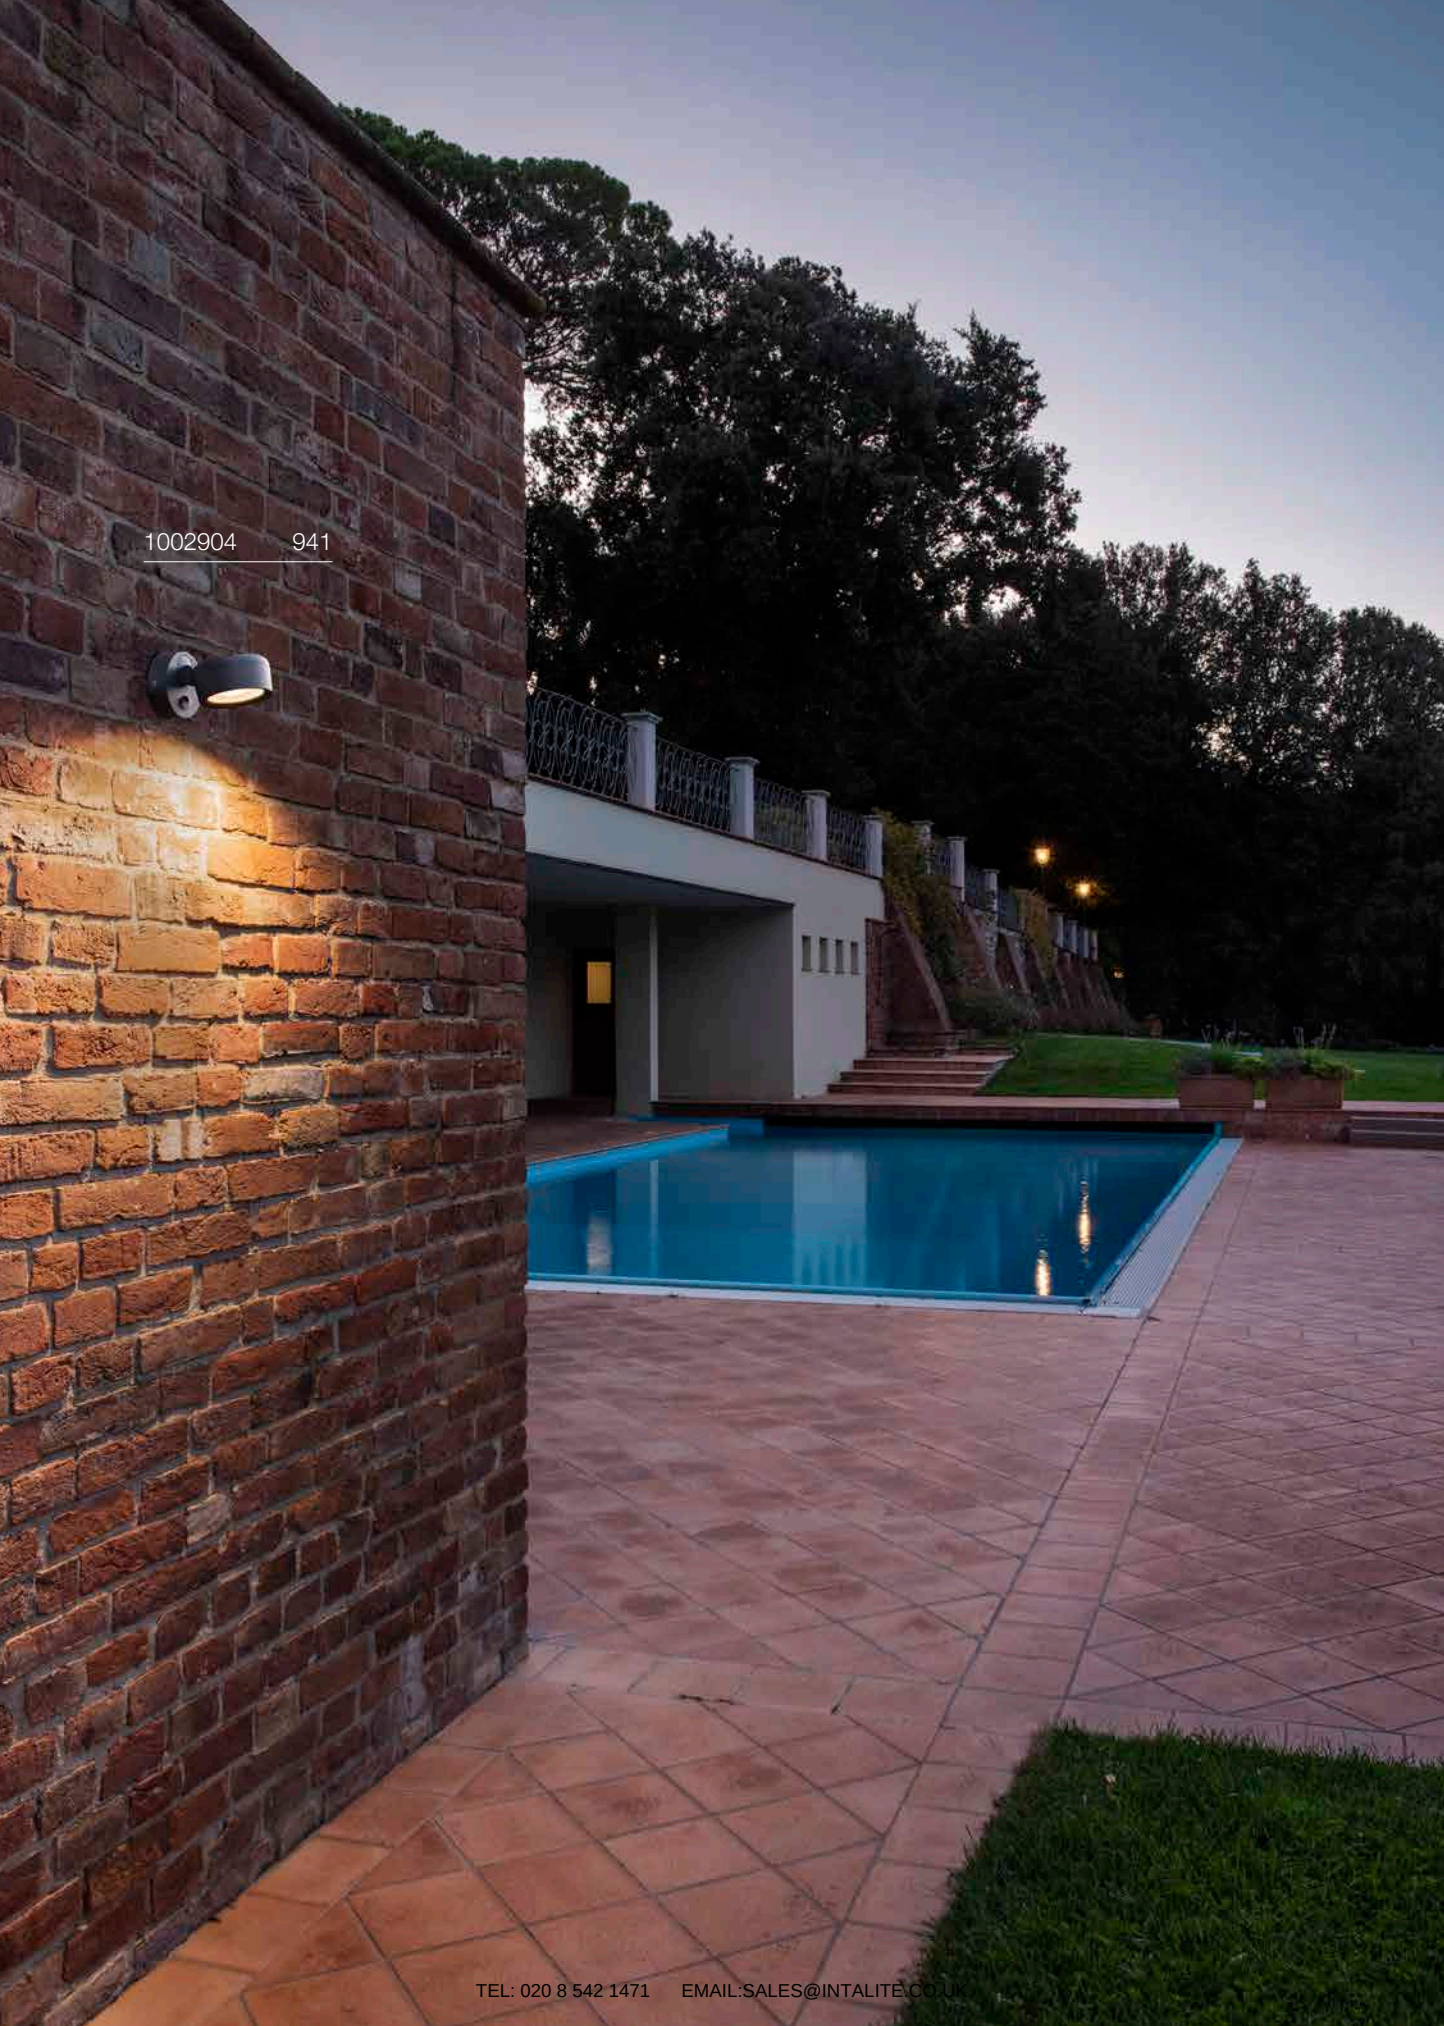
1002904 941

ESKINA SPOT SENSOR
CW, PHASE



IP54 IK02 95° 340° 105° 36000h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium

- Motion sensor in the wall rosette.
- PIR sensor, adjustable range 0-1000 lx and 8 s-12 min. Detection range up to 10 m depending on the mounting height of the light

LED INSIDE CRI 80

1000 lm | 3000 K | 4000 K

Options	Prod. no.	GBP
● anthracite	**1002904**	**233.00**

ESKINA SPOT
CW, PHASE



IP65 IK02 95° 340° 105° 36000h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14.5 W
Material: aluminium

LED INSIDE CRI 80

1000 lm | 3000 K | 4000 K

Options	Prod. no.	GBP
● anthracite	**1002903**	**216.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SITRA 360
CW, TCR-TSE



IP44 90° 90°

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 9 W

Base: 1xG53 | max. Ø: 7.5 cm | L: 3.5 cm

Options	Prod. no.	GBP
● anthracite	**231515**	**94.00**

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G
7 kW/1000 h

Prod. no.: 1005272 10.00 GBP

THEO BRACKET
CW



IP65 IK02 340° 70°

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 7 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Options	Prod. no.	GBP
● anthracite	**1004653**	**64.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F
6 kW/1000 h

Prod. no.: 1005077 7.00 GBP

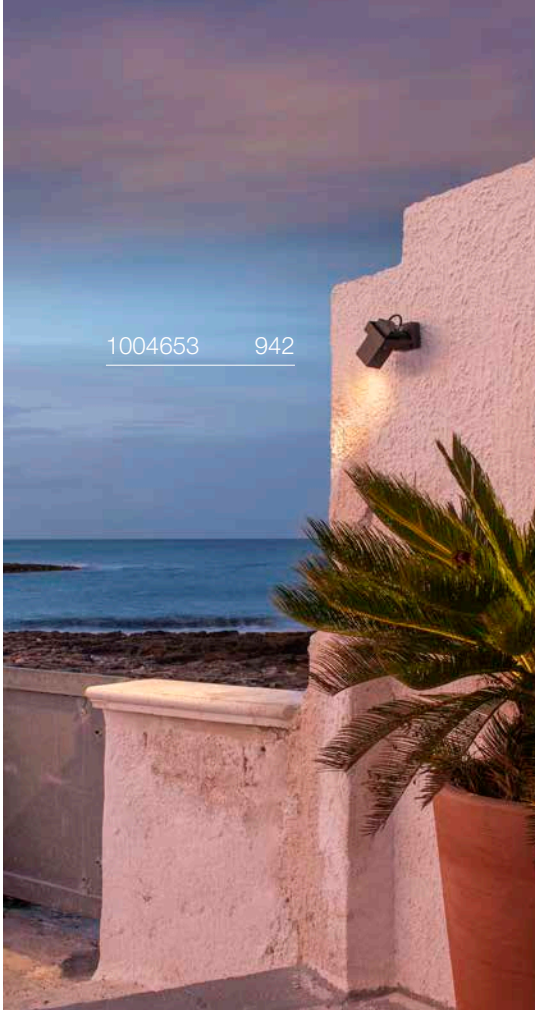

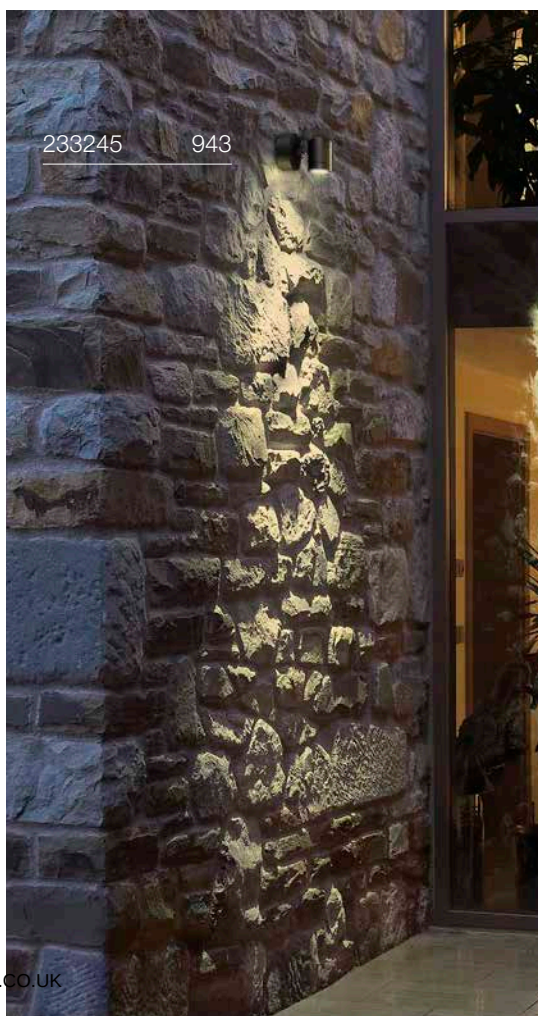

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

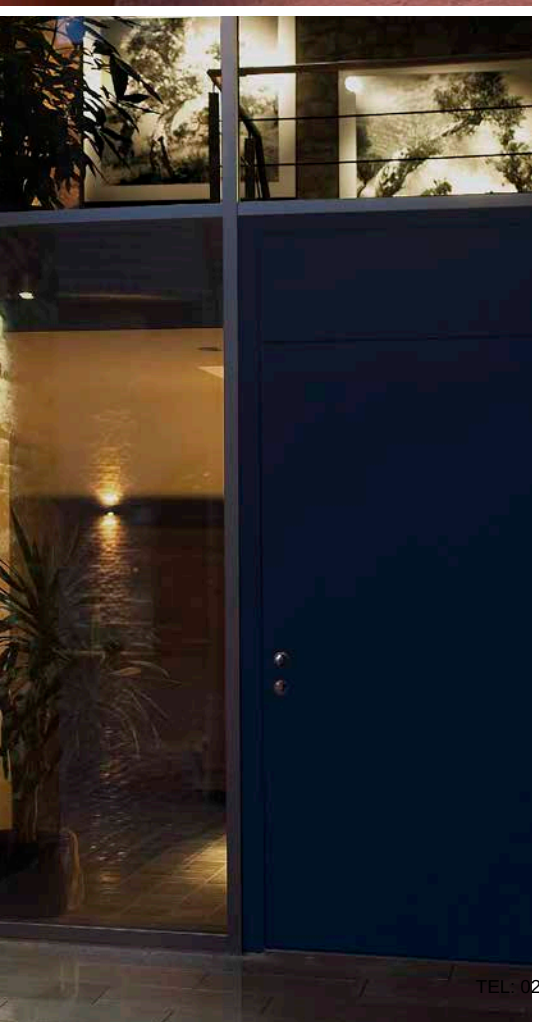

HELIA
CW, single



IP65 IK04 35° 350° 90° 30000h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium/glass

INSIDE CRI 80

	440 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	233245	151.00

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	1002853	7.00

HELIA
CW, double



IP65 IK04 35° 350° 90° 30000h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 13 W
Material: aluminium/glass

INSIDE CRI 80

Spot 1	440 lm | 3000 K
Spot 2	440 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	233255	266.00

⊕

Product	Prod. no.	GBP
Spacer		
● anthracite	1002853	7.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

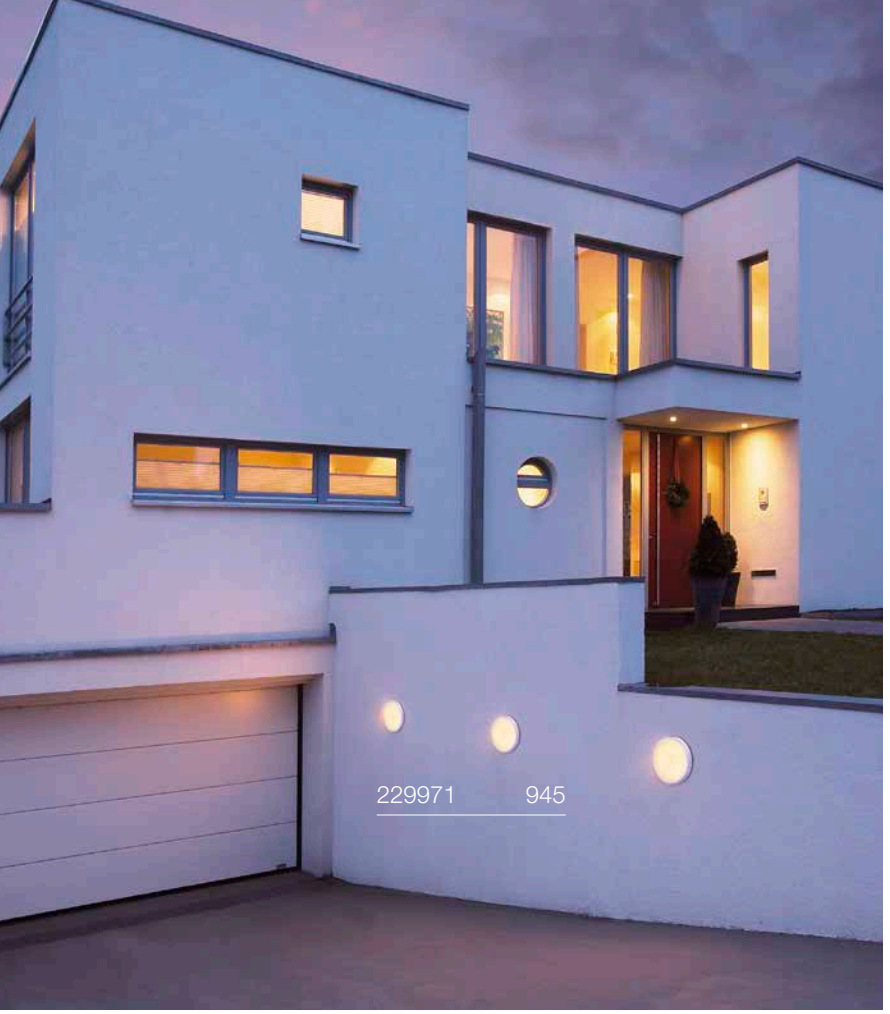

AINOS
CW



220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium/polycarbonate (PC)

1430 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**229965**	**128.00**
○ white	**229961**	**128.00**

AINOS
CW, SENSOR



IP44 IK02 120° 30000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 22 W
Material: aluminium/polycarbonate (PC)

- Sensor in the light housing

LED INSIDE CRI 80

1430 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	229975	168.00
○ white	229971	168.00

AINOS
CW, square

CCT



IP65 IK02 120° 30000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 17 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

1300 lm | 3000 K | 4000 K

Options	Prod. no.	GBP
● anthracite	1003450	139.00
○ white	1003449	139.00

AINOS
CW, SENSOR, square



IP65 IK02 120° 30000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium/polycarbonate (PC)

- Sensor in the light housing

LED INSIDE CRI 80

1300 lm | 3000 K | 4000 K

Options	Prod. no.	GBP
● anthracite	1003452	173.00
○ white	1003451	173.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

RUBA
CW



220-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: polycarbonate (PC)

LED INSIDE CRI 90

960 lm / 2000 lm	3000 K	1100 lm / 2300 lm	4000 K

Options	Prod. no.	GBP
○ white | Ø: 27 cm 960/1100 lm	**1005089**	**97.00**
○ white | Ø: 42 cm 2000/2300 lm	**1005090**	**195.00**

TERANG 200
CW



220-240 V ~50/60 Hz
Total wattage: 11 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 80

830 lm	3000 K

Options	Prod. no.	GBP
● anthracite	**229935**	**68.00**
○ white	**229931**	**68.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

BULAN
CW, E14



IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 60 W

Base: 1xE14 | max. Ø: 4.8 cm | L: 13 cm

Options	Prod. no.	GBP
● anthracite	**229075**	**59.00**
○ white	**229071**	**59.00**
● grey	**229072**	**59.00**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G
5 kW/1000 h

Prod. no.: 1005285 8.00 GBP

BULAN GRID
CW, E27



IP55 IK02

220-240 V ~50/60 Hz
Material: aluminium/polycarbonate (PC)

SOCKET INSIDE 25 W

Base: 2xE27 | max. Ø: 5.2 cm | L: 17.3 cm

Options	Prod. no.	GBP
● anthracite	**229085**	**63.00**
○ white	**229081**	**63.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E
8 kW/1000 h

Prod. no.: 1005289 9.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

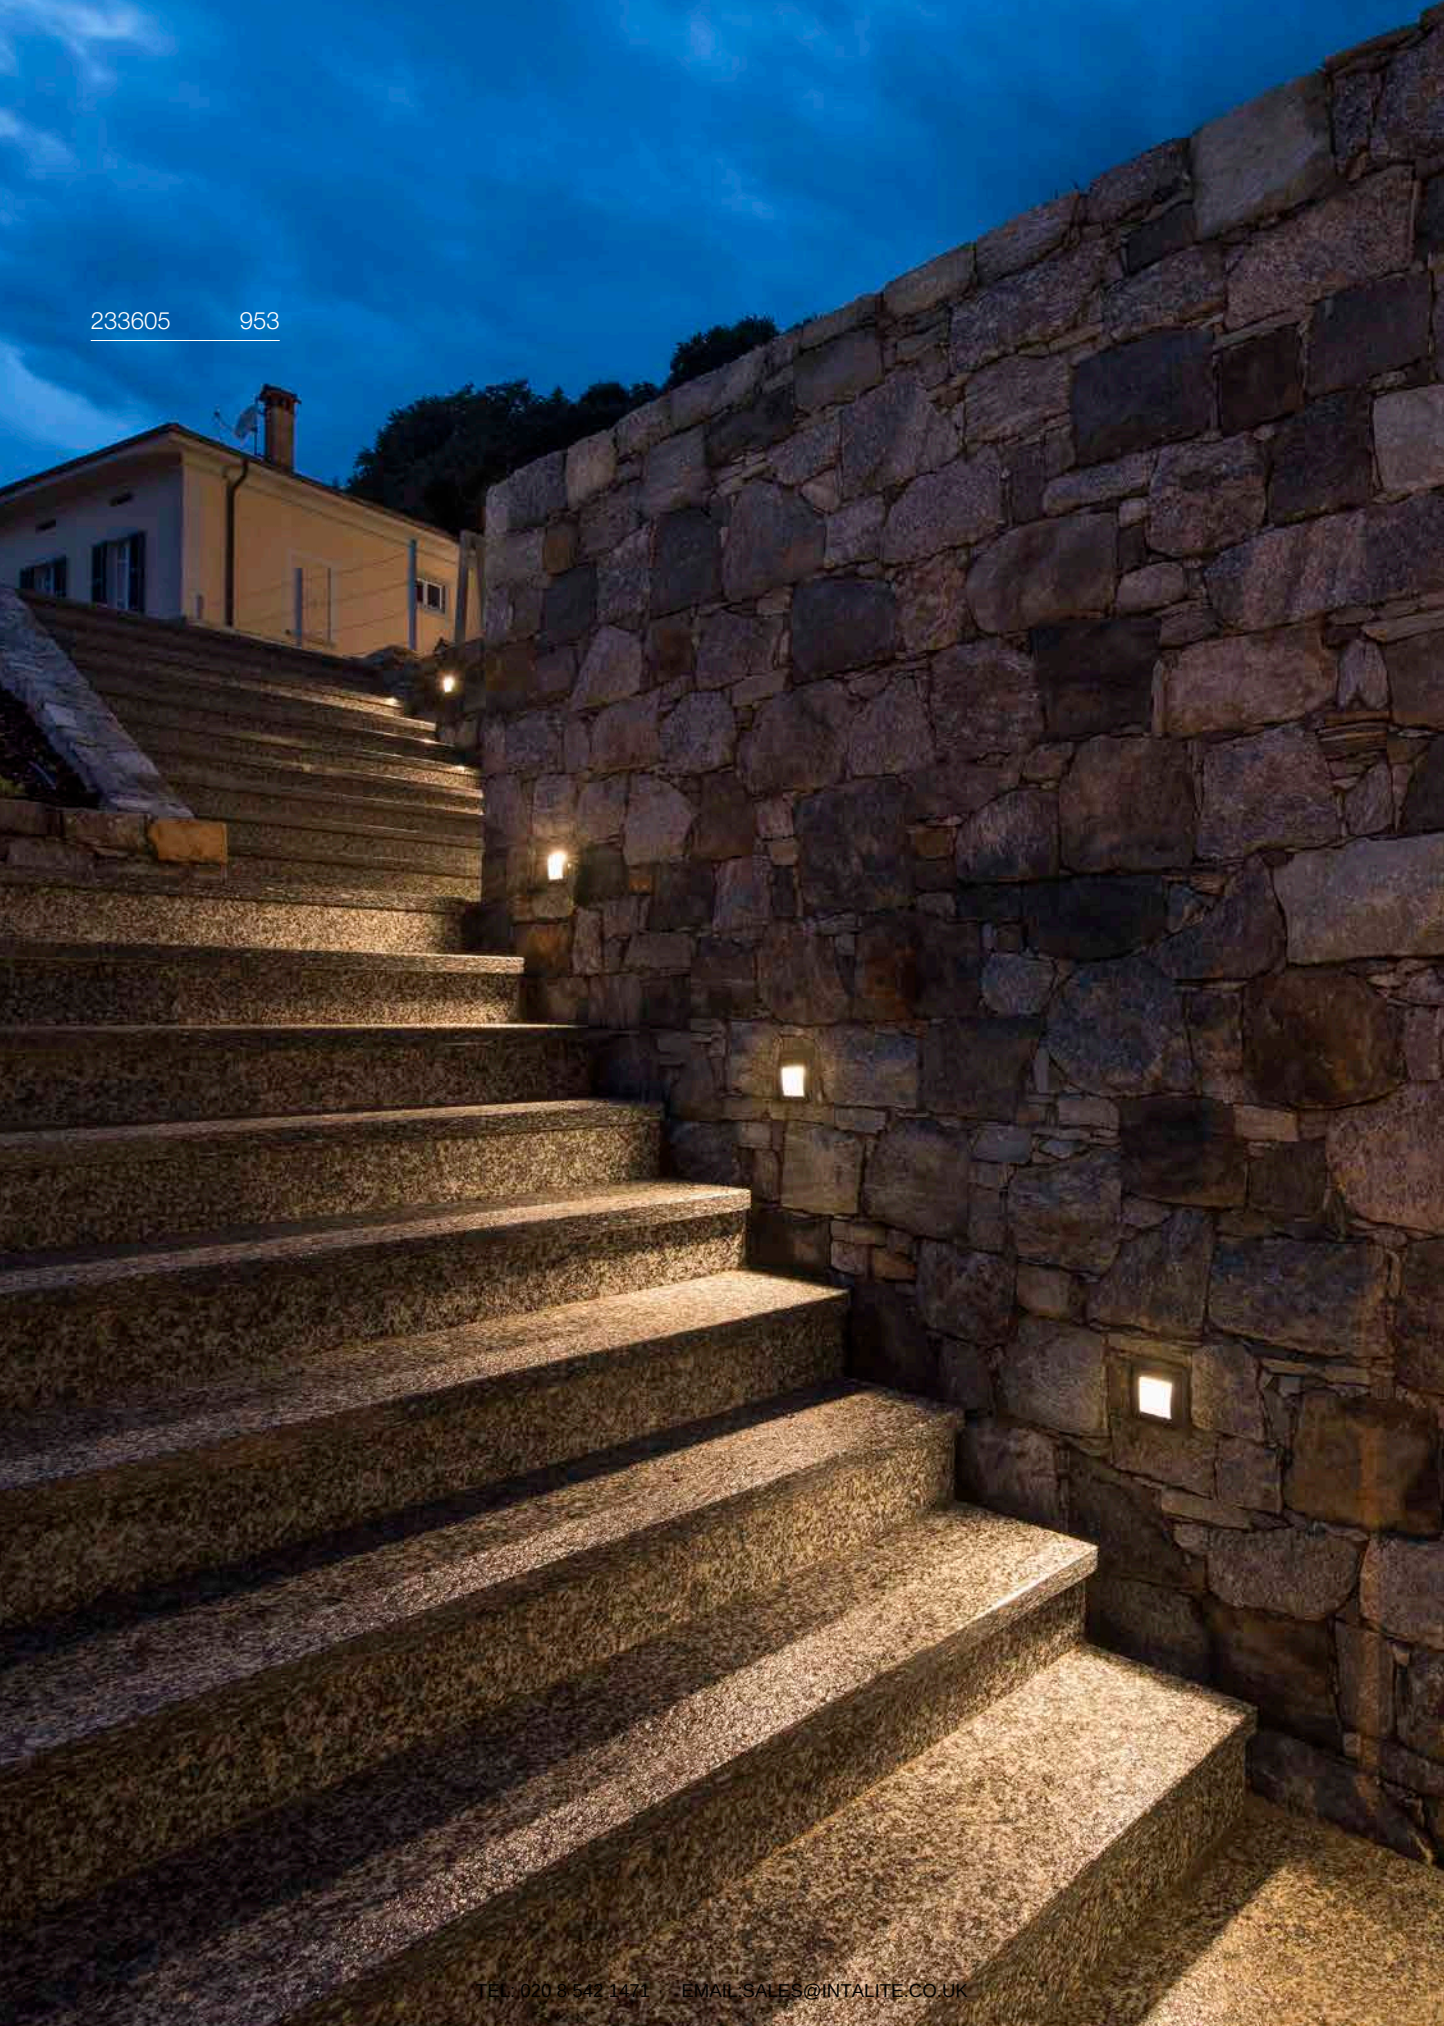
233605 953



CONCRETO | 951

ADI | 952

DOWNUNDER OUT | 953



BRICK MESH | 955

BRICK | 955

SOCKET

BRICK DOWNUNDER | 957

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

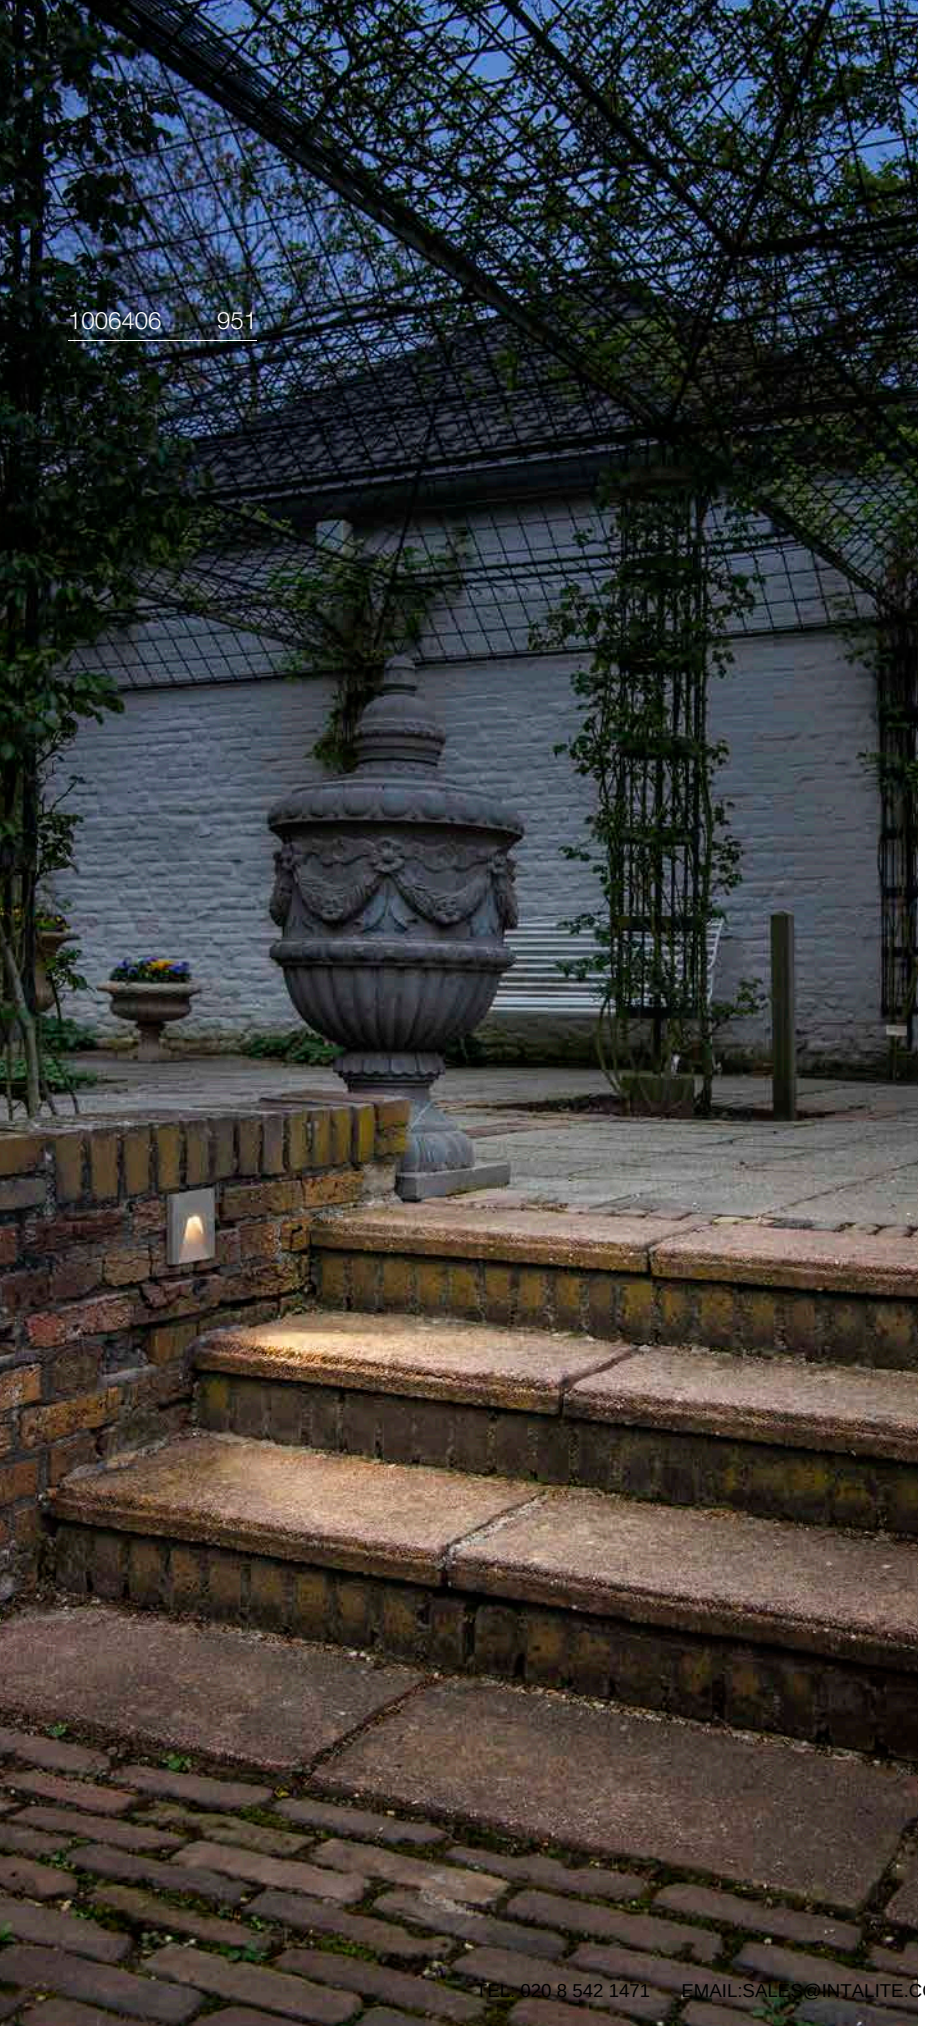

1006406 951

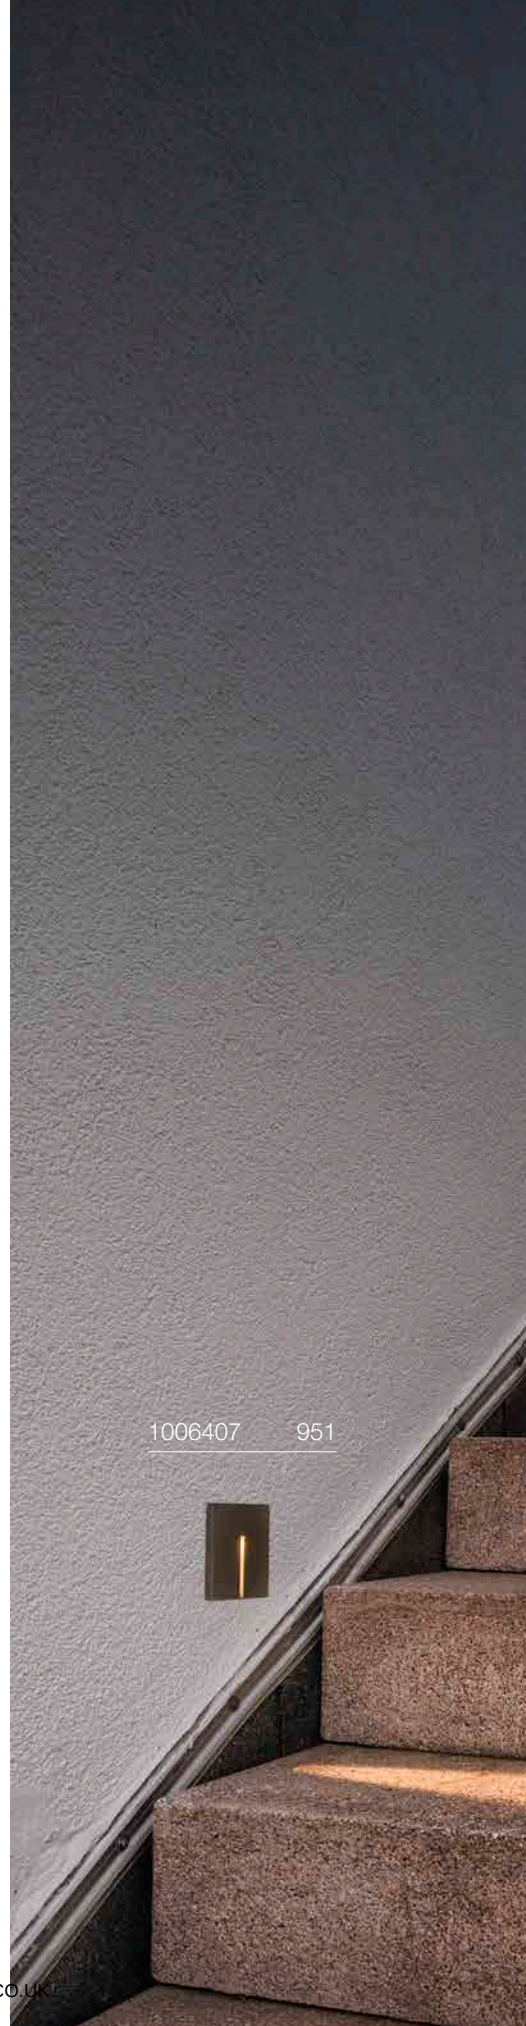

1006407 951

CONCRETO
EL, Wing



IP65 IK03 120° 50 000 h L80B50

100-240 V ~50/60 Hz | 700 mA
Total wattage: 3.2 W
Material: concrete/aluminium

- Recessed fixing kit included

LED INSIDE CRI 80

45 lm|3000 K

Options	Prod. no.	GBP
grey/black	**1006406**	**88.00**

CONCRETO
EL, Cut



IP65 IK03 15° 50 000 h L80B50

100-240 V ~50/60 Hz | 700 mA
Total wattage: 3.2 W
Material: concrete/aluminium

- Recessed fixing kit included

LED INSIDE CRI 80

15 lm|3000 K

Options	Prod. no.	GBP
grey/black	**1006407**	**88.00**

TEL:020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

ADI
EL



IP55 IK02 25000 h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium/polycarbonate (PC)

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit must be ordered separately

LED INSIDE CRI 80

940 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**233635**	**225.00**

⊕

Product	Prod. no.	GBP
Recessed fixing kit		
● black	**233639**	**17.00**

TEL: 020 8 542 1471 EMAIL: SALES@INTALITE.CO.UK

DOWNUNDER OUT S
EL



IP55 IK02 25000h L70B50

220-240 V ~50/60 Hz | 300 mA
Total wattage: 1.7 W
Material: aluminium/plastic

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included

INSIDE CRI 80

Down	25 lm | 3000 K	65 lm | 3000 K

Options	Prod. no.	GBP
● anthracite 25 lm	**233605**	**55.00**
○ white 65 lm	**233601**	**55.00**

DOWNUNDER OUT M
EL

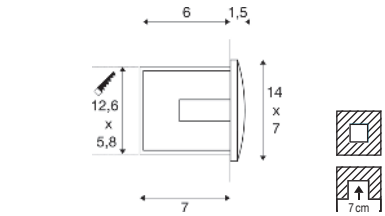

IP55 IK02 25000h L70B50

220-240 V ~50/60 Hz | 300 mA
Total wattage: 4 W
Material: aluminium/plastic

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included

INSIDE CRI 80

Down	85 lm | 3000 K	155 lm | 3000 K

Options	Prod. no.	GBP
● anthracite 85 lm	**233625**	**65.00**
○ white 155 lm	**233621**	**65.00**

DOWNUNDER OUT L
EL



IP55 IK02 25000h L70B50

220-240 V ~50/60 Hz | 300 mA
Total wattage: 4 W
Material: aluminium/plastic

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included

INSIDE CRI 80

Down	85 lm | 3000 K

Options	Prod. no.	GBP
● anthracite	**233615**	**77.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

233660 955

233650 955

BRICK MESH
EL



IP65 IK08 50000 h L80B50 64

220-240 V ~50/60 Hz | 500 mA
Total wattage: 5 W
Material: stainless steel 304

- Light does not need to be opened from the front for connection
- Recessed fixing kit with break-out openings of different sizes
- Recessed fixing kit included

LED INSIDE CRI 80

Down 150 lm|3000 K

Options	Prod. no.	GBP
stainless steel	**1008481**	**207.00**

BRICK
EL, symmetrical



IP65 IK02 40° 25000 h L70B50 20

220-240 V ~50/60 Hz | 144 mA
Total wattage: 9.5 W
Material: aluminium/stainless steel 316

- Recessed fixing kit included

LED INSIDE CRI 80

Down 950 lm|3000 K

Options	Prod. no.	GBP
stainless steel	**233650**	**267.00**

BRICK
EL, asymmetrical



IP65 IK02 25000 h L70B50 20

220-240 V ~50/60 Hz | 144 mA
Total wattage: 9.5 W
Material: aluminium/stainless steel 316

- Recessed fixing kit included

LED INSIDE CRI 80

Down 850 lm|3000 K

Options	Prod. no.	GBP
stainless steel	**233660**	**267.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

BRICK DOWNUNDER
EL, E14



IP44 IK02 10

220-240 V ~50/60 Hz
Material: aluminium/glass

- No recessed fixing kit required

SOCKET INSIDE 40 W

Base: 1xE14 | max. Ø: 4.3 cm | L: 12 cm

Options	Prod. no.	GBP
grey	**229062**	**36.00**

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F
5 kW/1000h

Prod. no.: **1005284** **6.00 GBP**

BRICK DOWNUNDER
EL



IP54 IK02 20000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 1.4 W
Material: aluminium/glass

- Recessed fixing kit included

LED INSIDE CRI 80

30 lm | 3000 K

Options	Prod. no.	GBP
grey	**229702**	**59.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

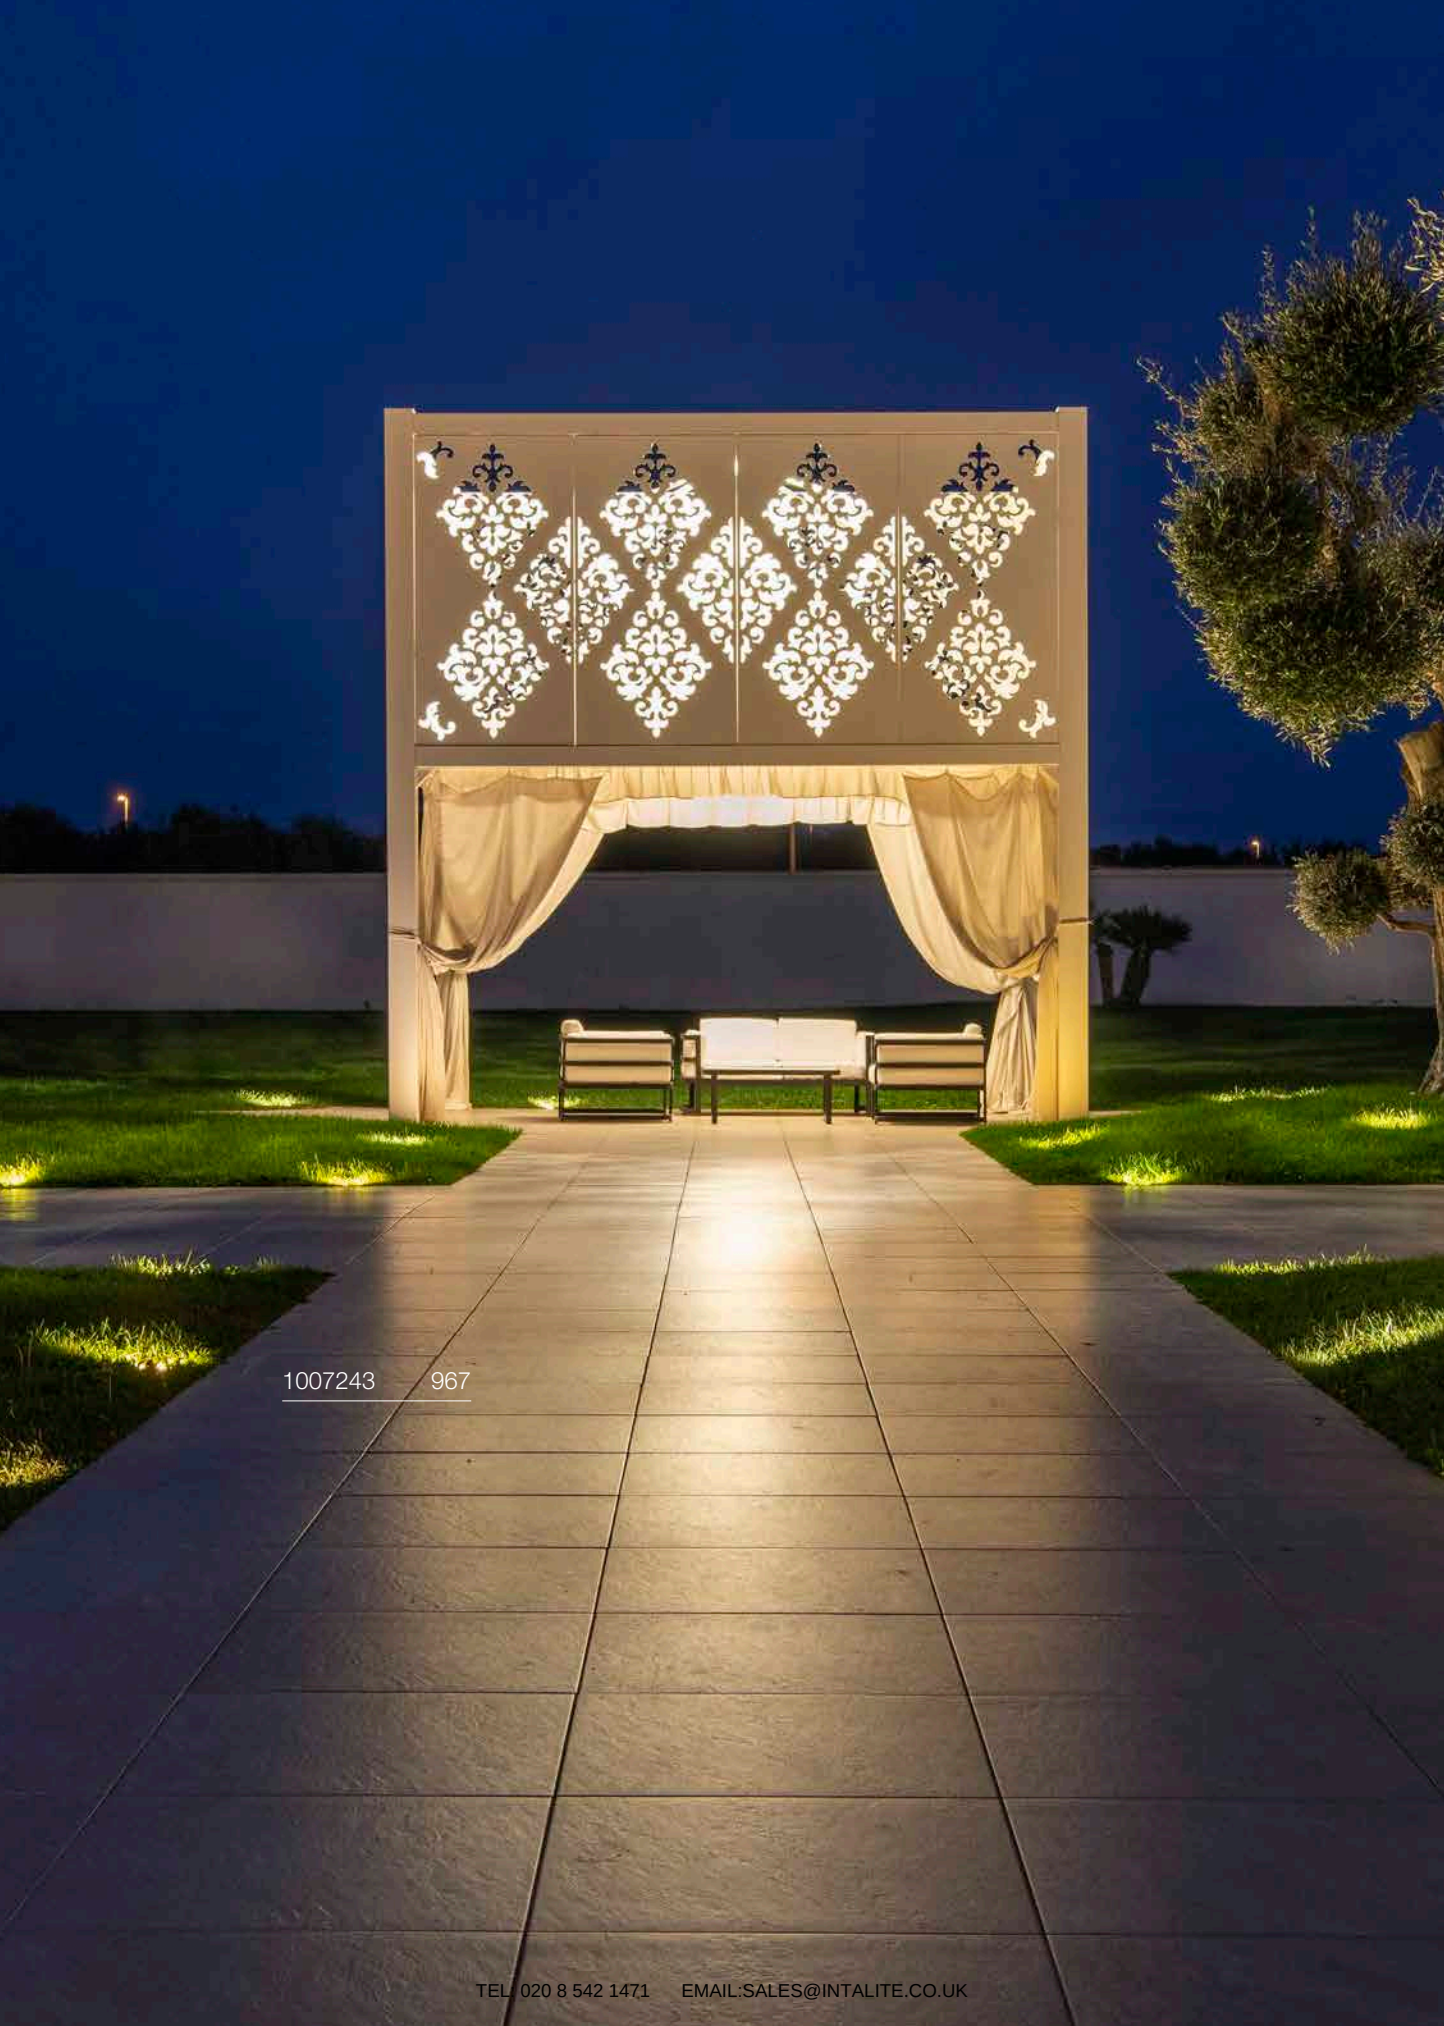

1007243 967

DASAR® | 961

DASAR® | 963–973

DASAR® FLAT | 975

DASAR® 255 | 975

DASAR® 920 | 977

DASAR® 115 | 979

DASAR® EXACT 116 | 981

DASAR® 215 | 983

DASAR® 215 | 983

DASAR® 370 | 983

TRAIL–LITE® 60 | 985

POWER TRAIL–LITE® | 987

SMALL PLOT | 989

BIG PLOT | 991

ROCCI | 993

ROCCI 200 | 995

SOLASTO | 997

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007196 961

DASAR® 600
EL



220-240 V ~50/60 Hz | 550 mA
Total wattage: 18 W
Material: stainless steel 316

- marked installation direction
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

2200 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007195**	**471.00**

Product	Prod. no.	GBP
Recessed fixing kit		
black	**1007198**	**25.00**

DASAR® 1200
EL



220-240 V ~50/60 Hz | 900 mA
Total wattage: 34 W
Material: stainless steel 316

- marked installation direction
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

4100 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007196**	**626.00**

Product	Prod. no.	GBP
Recessed fixing kit		
black	**1007197**	**43.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007680 963

DASAR® S
RL, round



220-240 V ~50/60 Hz | 200 mA
Total wattage: 4 W
Material: aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80

350 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007680**	**180.00**

⊕

Product	Prod. no.	GBP
Recessed floor fixing kit S		
black	**1007682**	**43.00**
Reflector 15°		
silver	**1007683**	**6.00**
Reflector 36°		
silver	**1007684**	**6.00**
Reflector 50°		
silver	**1007685**	**6.00**

DASAR® S
RL, square



220-240 V ~50/60 Hz | 200 mA
Total wattage: 4 W
Material: aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80

350 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007681**	**180.00**

⊕

Product	Prod. no.	GBP
Recessed floor fixing kit S		
black	**1007682**	**43.00**
Reflector 15°		
silver	**1007683**	**6.00**
Reflector 36°		
silver	**1007684**	**6.00**
Reflector 50°		
silver	**1007685**	**6.00**

DASAR® M
RL, round



220-240 V ~50/60 Hz | 300 mA
Total wattage: 6.5 W
Material: aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80

450 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007810**	**299.00**

Product	Prod. no.	GBP
Reflector 15°		
silver	**1007683**	**6.00**
Reflector 36°		
silver	**1007684**	**6.00**
Reflector 50°		
silver	**1007685**	**6.00**
Recessed floor fixing kit M		
black	**1007822**	**68.00**

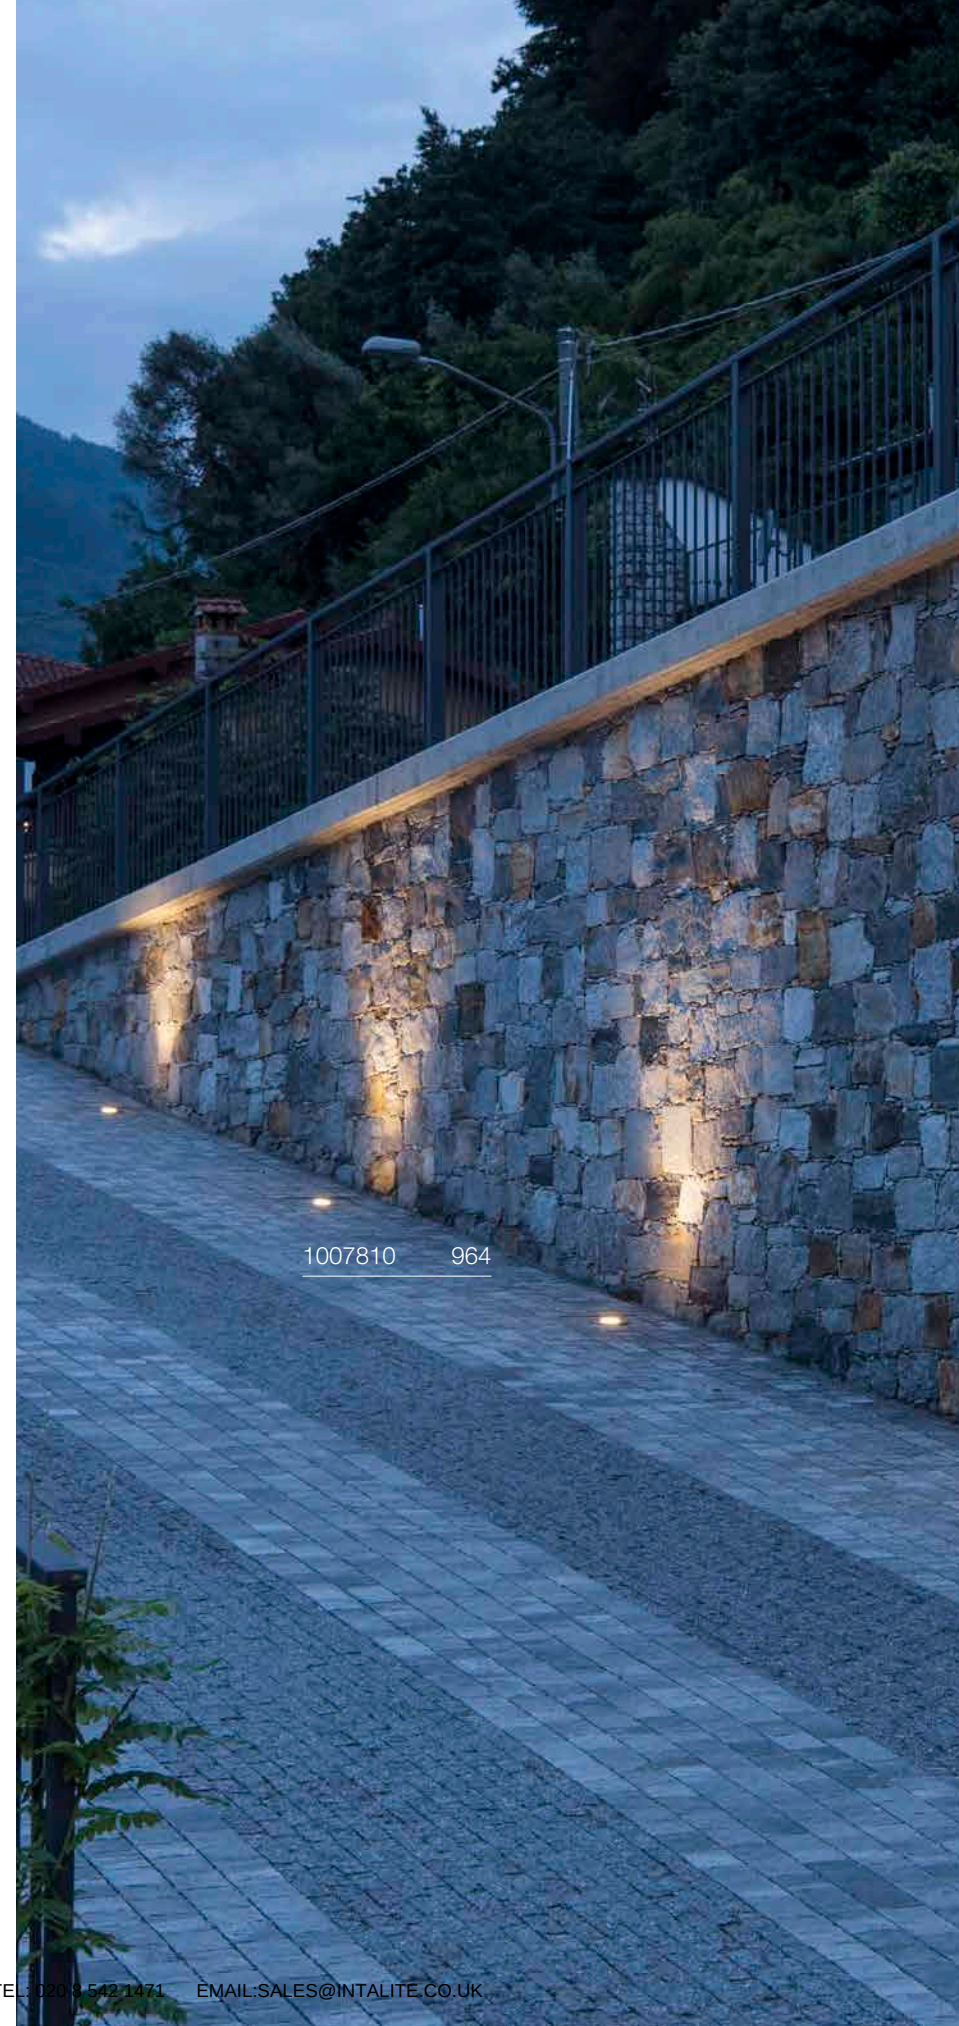

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DASAR® M
RL, square





220-240 V ~50/60 Hz | 300 mA
Total wattage: 6.5 W
Material: aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80

450 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007811**	**299.00**

⊕

Product	Prod. no.	GBP
Reflector 15°		
silver	**1007683**	**6.00**
Reflector 36°		
silver	**1007684**	**6.00**
Reflector 50°		
silver	**1007685**	**6.00**
Recessed floor fixing kit M		
black	**1007822**	**68.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007243 967

1007244 967

DASAR® L
RL, round



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box

LED INSIDE CRI 80

1950 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007243**	**411.00**

⊕

Product	Prod. no.	GBP
Reflector 15° for L / XL		
silver	**1007238**	**11.00**
Reflector 36° for L / XL		
silver	**1007239**	**11.00**
Reflector 60° for L / XL		
silver	**1007240**	**11.00**
Recessed fixing kit for DASAR L		
black	**1007245**	**43.00**

DASAR® L
RL, square



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box

LED INSIDE CRI 80

1950 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007244**	**411.00**

⊕

Product	Prod. no.	GBP
Reflector 15° for L / XL		
silver	**1007238**	**11.00**
Reflector 36° for L / XL		
silver	**1007239**	**11.00**
Reflector 60° for L / XL		
silver	**1007240**	**11.00**
Recessed fixing kit for DASAR L		
black	**1007245**	**43.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009169 969

DASAR® L
RL, asym, round, DALI



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: stainless steel 316/glass/aluminium

- IP connection box
- Recessed fixing kit incl. cover can be ordered separately

LED INSIDE CRI 80

Asymetrical 1800 lm|3000 K

Options	Prod. no.	GBP
stainless steel/black	1009168	408.00

Product	Prod. no.	GBP
Recessed fixing kit for DASAR L		
black	1007245	43.00

DASAR® L
RL, asym, square, DALI



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: stainless steel 316/glass/aluminium

- IP connection box
- Recessed fixing kit incl. cover can be ordered separately

LED INSIDE CRI 80

Asymetrical 1800 lm|3000 K

Options	Prod. no.	GBP
stainless steel/black	1009169	408.00

Product	Prod. no.	GBP
Recessed fixing kit for DASAR L		
black	1007245	43.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DASAR® XL
RL, round





220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box

LED INSIDE CRI 80

2790 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007241**	**497.00**

⊕

Product	Prod. no.	GBP
Reflector 15° for L / XL		
silver	**1007238**	**11.00**
Reflector 36° for L / XL		
silver	**1007239**	**11.00**
Reflector 60° for L / XL		
silver	**1007240**	**11.00**
Recessed fixing kit for DASAR XL		
black	**1007246**	**51.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DASAR® XL
RL, square





220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box

LED INSIDE CRI 80

2790 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1007242**	**497.00**

Product	Prod. no.	GBP
Reflector 15° for L / XL		
silver	**1007238**	**11.00**
Reflector 36° for L / XL		
silver	**1007239**	**11.00**
Reflector 60° for L / XL		
silver	**1007240**	**11.00**
Recessed fixing kit for DASAR XL		
black	**1007246**	**51.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009170 973

DASAR® XL,
RL, asym, round, DALI

DALI

NEW



220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: stainless steel 316/glass/aluminium

- IP connection box
- Recessed fixing kit incl. cover can be ordered separately

LED INSIDE CRI 80

Asymetrical 2600 lm | 3000 K

Options	Prod. no.	GBP
stainless steel/black	1009170	493.00

Product	Prod. no.	GBP
Recessed fixing kit for DASAR XL		
black	1007246	51.00

DASAR® XL,
RL, asym, square, DALI

DALI

NEW



220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: stainless steel 316/glass/aluminium

- IP connection box
- Recessed fixing kit incl. cover can be ordered separately

LED INSIDE CRI 80

Asymetrical 2600 lm | 3000 K

Options	Prod. no.	GBP
stainless steel/black	1009171	493.00

Product	Prod. no.	GBP
Recessed fixing kit for DASAR XL		
black	1007246	51.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

228412 975

229383 975

DASAR® FLAT 80
EL



IP65/ IP67 · IK08 · 30000 h L70B50 · 150 · 0,5 t

220-240 V ~50/60 Hz
Total wattage: 3.5 W
Material: stainless steel 304/glass

- Recessed fixing kit included
- This light is suitable for installation in wood
- open cable end

LED INSIDE · CRI 80

Up — 140 lm|3000 K

Options	Prod. no.	GBP
stainless steel	**228412**	**94.00**

⊕

Product	Prod. no.	GBP
Connection box IP68, 3-pole		
black	**228730**	**16.00**

DASAR® FLAT 120
EL



IP65/ IP67 · IK08 · 30000 h L70B50 · 150 · 0,5 t

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7 W
Material: stainless steel 304/aluminium

- Recessed fixing kit included
- open cable end

LED INSIDE · CRI 80

490 lm|3000 K

Options	Prod. no.	GBP
stainless steel	**1006106**	**130.00**

DASAR® 255
EL



IP65/ IP67 · IK08 · 50000 h L70B50 · 2 t

220-240 V ~50/60 Hz | 750 mA
Total wattage: 31 W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE · CRI 90

1660 lm|3000 K
1720 lm|4000 K

Options	Prod. no.	GBP
stainless steel 1720 lm|4000 K	**229381**	**346.00**
stainless steel 1660 lm|3000 K	**229383**	**346.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

233500 977

DASAR® 920
EL



12-24 V
Total wattage: 6.5 W
Material: stainless steel 316/glass

- Recessed fixing kit included
- open cable end

520 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**233500**	**129.00**

⊕

Product	Prod. no.	GBP
LED power supply, 15W | 12V		
○ white	**1005444**	**25.00**
LED power supply, 15 W | 24V		
○ white	**1005445**	**25.00**

DASAR® 920
EL



220-240 V ~50/60 Hz | 400 mA
Total wattage: 5.5 W
Material: stainless steel 316/glass

- Recessed fixing kit included
- open cable end

300 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**233520**	**169.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

229320 979

DASAR® 115
RL, round, QPAR51



IP67 IK08 90° 30° 2 t

220-240 V ~50/60 Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 35 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

Options	Prod. no.	GBP
stainless steel	**229320**	**98.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000 h

Prod. no.: 1007230 5.00 GBP

DASAR® 115
RL, square, QPAR51



IP67 IK08 90° 30° 2 t

220-240 V ~50/60 Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 35 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

Options	Prod. no.	GBP
stainless steel	**229324**	**98.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000 h

Prod. no.: 1007230 5.00 GBP

DASAR® 115
RL, square, QPAR51



IP67 IK08 90° 30° 2 t

220-240 V ~50/60 Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 35 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

Options	Prod. no.	GBP
stainless steel	**229374**	**98.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000 h

Prod. no.: 1007230 5.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

228430 981

DASAR® EXACT 116
EL, round, QPAR51



IP67 IK08 90° 30° 2 t

220-240 V ~50/60 Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 35 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Options	Prod. no.	GBP
stainless steel	**228430**	**106.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000 h

Prod. no.: **1007230** **5.00 GBP**

DASAR® EXACT 116
EL, square, QPAR51



IP67 IK08 90° 30° 2 t

220-240 V ~50/60 Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 35 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Options	Prod. no.	GBP
stainless steel	**228434**	**106.00**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E
3 kW/1000 h

Prod. no.: **1007230** **5.00 GBP**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

229230 983

DASAR® 215
RL, round, QPAR111



IP67 IK08 20 2 t

220-240 V ~50/60 Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
stainless steel	**229230**	**230.00**

GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F
13 kW/1000 h

Prod. no.: **1005278** **48.00 GBP**

DASAR® 215
RL, square, QPAR111



IP67 IK08 20 2 t

220-240 V ~50/60 Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 75 W

Base: 1xGU10

Options	Prod. no.	GBP
stainless steel	**229234**	**230.00**

GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F
13 kW/1000 h

Prod. no.: **1005278** **48.00 GBP**

DASAR® 370
EL, round



IP67 IK08 30° 25000 h L70B50 150 0,25 t

12-24 V
Power consumption: 2W
Material: stainless steel 316/glass

- This light is suitable for installation in wood
- open cable end

LED INSIDE CRI 80

120 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**233540**	**147.00**

Product	Prod. no.	GBP
LED power supply, 15W | 12V		
white	**1005444**	**25.00**
LED power supply, 15 W | 24V		
white	**1005445**	**25.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

227462 985

TRAIL-LITE® 60
EL



IP65 | IK08 | 40 | 20000 h L70B50

12 V 50/60 Hz
Power consumption: 0.3W
Material: stainless steel 316/glass

- Only operate with conventional transformer
- Recessed fixing kit included
- This light is suitable for installation in wood

LED INSIDE | CRI 80

4 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**227462**	**61.00**

TRAIL-LITE® 60
EL

NEW

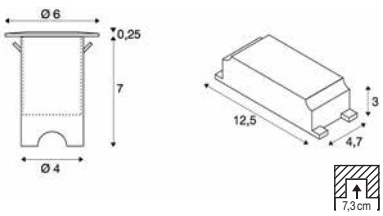

IP44/IP67 | IK08 | 30000 h L70B50 | 800

220-240 V ~50/60 Hz | 24 V
Total wattage: 4.6 W
Material: stainless steel 316/aluminium

- Set consisting of 4 lights, connector, cable and plug-in power supply unit
- This light is suitable for installation in wood
- IP44 safety plug

LED INSIDE | CRI 80

25 lm | 3000 K

Options	Prod. no.	GBP
stainless steel/ aluminium	**1008841**	**254.00**

TRAIL-LITE® 60
EL, single

NEW



IP67 | IK08 | 30000 h L70B50

24 V
Power consumption: 0.9 W
Material: stainless steel 316/aluminium

- Recessed fixing kit included
- This light is suitable for installation in wood
- Low-voltage secondary connection female

LED INSIDE

Up | 25 lm | 3000 K

Options	Prod. no.	GBP
stainless steel/ aluminium	**1008842**	**59.00**

⊕

Product	Prod. no.	GBP
LED power supply | 12.6 W		
black	**1008843**	**42.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

228332 987

POWER TRAIL-LITE®
EL, square



350 mA
Power consumption: 1W
Material: stainless steel 316/glass

- Operate only with 350mA driver. Only wire together multiple power LEDs in series! Installation sleeve incl.
- This light is suitable for installation in wood
- open cable end

LED INSIDE CRI 90

45 lm|3000 K

Options	Prod. no.	GBP
stainless steel	**228342**	**69.00**

⊕

Product	Prod. no.	GBP
LED driver 3W | 350W		
○ white	**1005248**	**13.00**

POWER TRAIL-LITE®
EL, round



350 mA
Power consumption: 1W
Material: stainless steel 316/glass

- Operate only with 350mA driver. Only wire together multiple power LEDs in series!
- This light is suitable for installation in wood
- open cable end

LED INSIDE CRI 90

45 lm|3000 K

Options	Prod. no.	GBP
stainless steel	**228332**	**69.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006171+1006173 989

SMALL PLOT
Modules



IP67 IK06 180° 40000h L70B50 50

24 V
Power consumption: 2.6W
Material: aluminium/polymethylmethacrylate (PMMA)

- This product is delivered without a cover
- open cable end

LED INSIDE CRI 80

240 lm | 3000 K

Options	Prod. no.	GBP
aluminium	**1006172**	**68.00**

⊕

Product	Prod. no.	GBP
LED power supply, 12/20 W | 24V incl. strain relief		
○ white	**1005381**	**34.00**
LED power supply, 15 W | 24V		
○ white	**1005445**	**25.00**

SMALL PLOT
Modules



IP67 IK06 180° 40000h L70B50 50

24 V
Power consumption: 2.6W
Material: stainless steel/polymethylacrylate (PMMA)

- This product is delivered without a cover
- open cable end

LED INSIDE CRI 80

240 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1006171**	**81.00**

⊕

Product	Prod. no.	GBP
LED power supply, 12/20 W | 24V incl. strain relief		
○ white	**1005381**	**34.00**
LED power supply, 15 W | 24V		
○ white	**1005445**	**25.00**

SMALL PLOT
Cover, 2-pack

500kg

Ø: 10.3 cm
H: 1.7 cm
Material: stainless steel

Options	Prod. no.	GBP
anthracite	**1006174**	**37.00**
stainless steel	**1006173**	**120.00**

SMALL PLOT
Cover, 4-pack

800kg

Ø: 10.3 cm
H: 1.7 cm
Material: stainless steel

Options	Prod. no.	GBP
anthracite	**1006176**	**37.00**
stainless steel	**1006175**	**120.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008001+1001255 989

BIG PLOT
Modules



IP67 IK06 180° 35000h L70B50 150

220-240 V ~50/60 Hz
Total wattage: 4.9 W
Material: aluminium/polymethylmethacrylate (PMMA)

- This product is delivered without a cover
- open cable end

INSIDE CRI 80

540 lm|3000 K

Options	Prod. no.	GBP
aluminium	**1008000**	**79.00**

⊕

Product	Prod. no.	GBP
T-connector box		
black	**228726**	**28.00**
Connection box IP68, 3-pole		
black	**228730**	**16.00**
Aluminium cover two light emissions		
anthracite	**1001262**	**49.00**
Aluminium cover four light emissions		
anthracite	**1001263**	**49.00**

BIG PLOT
Modules



IP67 IK06 180° 35000h L70B50 150

220-240 V ~50/60 Hz
Total wattage: 4.9 W
Material: stainless steel/polymethylacrylate (PMMA)

- This product is delivered without a cover
- open cable end

INSIDE CRI 80

540 lm|3000 K

Options	Prod. no.	GBP
stainless steel	**1008001**	**115.00**

⊕

Product	Prod. no.	GBP
T-connector box		
black	**228726**	**28.00**
Connection box IP68, 3-pole		
black	**228730**	**16.00**
SST316L cover two light emissions		
stainless steel	**1001254**	**170.00**
SST316L cover four light emissions		
stainless steel	**1001255**	**170.00**

BIG PLOT
Cover, 2-pack

Ø: 17 cm
H: 2 cm
Material: stainless steel 316

- 1001262 loadable up to 0.5t
- 1001254 loadable up to 0.8t

Options	Prod. no.	GBP
anthracite	**1001262**	**49.00**
stainless steel	**1001254**	**170.00**

BIG PLOT
Cover, 4-pack

Ø: 17 cm
H: 2 cm
Material: stainless steel 316

- 1001255 loadable up to 0.8t
- 1001263 loadable up to 0.8t

Options	Prod. no.	GBP
anthracite	**1001263**	**49.00**
stainless steel	**1001255**	**170.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

227604 993

ROCCI
EL, square



IP67 IK08 120° 40 000 h L70B50 0,5t

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.6 W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE CRI 80

580 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**227604**	**142.00**

ROCCI
EL, round



IP67 IK08 120° 40 000 h L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.6 W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE CRI 80

580 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**227600**	**144.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006105 995

ROCCI 200
EL, square



100-277 V ~50/60 Hz | 350 mA
Total wattage: 16 W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE CRI 80

1530 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1006105**	**161.00**

ROCCI 200
EL, round



100-277 V ~50/60 Hz | 350 mA
Total wattage: 16 W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE CRI 80

1530 lm | 3000 K

Options	Prod. no.	GBP
stainless steel	**1006104**	**161.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

227680 997

SOLASTO
EL, round



IP67 IK08 0,6t

220-240 V ~50/60 Hz
Material: stainless steel 304/glass

- Recessed fixing kit included

SOCKET INSIDE 6 W

Base: 1xGU10

Options	Prod. no.	GBP
stainless steel	**227680**	**59.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kW/1000 h

Prod. no.: 1005079 7.00 GBP

SOLASTO
EL, square



IP67 IK08 0,6t

220-240 V ~50/60 Hz
Material: stainless steel 304/glass

- Recessed fixing kit included

SOCKET INSIDE 6 W

Base: 1xGU10

Options	Prod. no.	GBP
stainless steel	**227684**	**59.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F
6 kW/1000 h

Prod. no.: 1005079 7.00 GBP

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED QT14 | 1000

LED C35 | 1000–1001

LED QT–DE12 | 1000

LED G45 GOLD | 1000

LED C35 GOLD | 1000

LED TCR–TSE | 1001

LED QR51 | 1001

LED A60 | 1001, 1004, 1007

LED T32 | 1002

LED QPAR51 | 1002

LED QPAR111 | 1003

LED A19 | 1003

LED GLOBE 150 | 1004–1005

LED GLOBE 125 | 1004–1005, 1007

LED GLOBE 200 | 1005



LED GLOBE 300 | 1005

LED T32 | 1006

LED T38 | 1006

LED T45 | 1006

LED ST64 | 1006–1007

LED ST65 | 1007

LED ST58 | 1007

NEW

SLVconnect® LED A60 SMART | 1008

NEW

SLVconnect® LED QPAR111 SMART | 1008

NEW

SLVconnect® LED ST19 SMART | 1009

NEW

SLVconnect® LED QPAR51 SMART | 1009

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED QT14
G9

IP20 300° 10000h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm L: 10 cm

Colour rendering	90
Output	3.6 W
Energy consumption/1000 h	4 kWh

Options	Prod. no.	GBP
○ transparent 400 lm | 3000 K	**1005286**	**8.00**
○ transparent 450 lm | 2700 K	**1007455**	**8.00**

LED C35
G9

C IP20 330° 20000h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 3.5 cm L: 9.5 cm

Manufacturer	Segula
Luminous flux	260 lm
Colour rendering	90
Output	3 W
Energy consumption/1000 h	3 kWh

Options	Prod. no.	GBP
○ transparent 2200 K	**1008158**	**29.00**

LED QT-DE12
R7S, 78 mm

C 330° 25000h L70B50

220-240 V ~50/60 Hz
Material: polycarbonate (PC)
Ø: 2.9 cm | L: 2.9 cm

Luminous flux	1050 lm
Colour rendering	90
Output	9 W
Energy consumption/1000 h	9 kWh

Options	Prod. no.	GBP
○ transparent 3000 K	**1005287**	**21.00**

LED QT-DE12
R7S, 118 mm

C 330° 25000h L70B50

220-240 V ~50/60 Hz
Material: polycarbonate (PC)
Ø: 2.9 cm L: 11.8 cm

Luminous flux	2000 lm
Colour rendering	90
Output	15 W
Energy consumption/1000 h	15 kWh

Options	Prod. no.	GBP
○ transparent 3000 K	**1005288**	**25.00**

LED G45 gold
E14

C IP20 325° 25000h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 4.5 cm L: 7.5 cm

Colour rendering	80
Output	2 W
Energy consumption/1000 h	2 kWh

Options	Prod. no.	GBP
○ gold/transparent 70 lm | 1800 K	**1008649**	**4.20**
○ gold/transparent 75 lm | 2200 K	**1008650**	**4.20**

LED C35 gold
E14

IP20 325° 25000h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 3.5 cm | L: 9.8 cm

Luminous flux	80 lm
Colour rendering	80
Output	2 W
Energy consumption/1000 h	2 kWh

Options	Prod. no.	GBP
○ gold/transparent 1800 K	**1008647**	**4.50**
○ gold/transparent 2200 K	**1008648**	**4.50**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED C35
E14

220-240 V ~50/60 Hz
Material: glass
Ø: 3.5 cm | L: 9.8 cm

Luminous flux	380 lm
Colour rendering	90
Output	4.2 W
Energy consumption/1000 h	5 kWh

Options	Prod. no.	GBP
○ transparent 2700 K	**1005284**	**6.00**

LED C35
E14

220-240 V ~50/60 Hz
Material: glass
Ø: 3.5 cm | L: 9.8 cm

Luminous flux	350 lm
Colour rendering	90
Output	4.2 W
Energy consumption/1000 h	5 kWh

Options	Prod. no.	GBP
○ transparent 2700 K	**1005285**	**8.00**

LED TCR-TSE
GX53

230 V 50/60 Hz
Material: polycarbonate (PC)
Ø: 7.5 cm | L: 2.4 cm

Colour rendering	90
Output	6.1 W
Energy consumption/1000 h	7 kWh

Options	Prod. no.	GBP
○ white 520 lm | 4000 K	**1005269**	**10.00**
○ white 490 lm | 3000 K	**1005271**	**10.00**
○ white 490 lm | 2700 K	**1005272**	**10.00**

LED QR51
GU5.3

12 V
Material: glass
Ø: 5 cm | L: 4.5 cm

Colour rendering	90
Output	5.8 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
○ transparent 450 lm | 2700 K	**1001574**	**30.00**
○ transparent 460 lm | 3000 K	**1001575**	**30.00**

LED A60
GU10

220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 11 cm

Manufacturer	Segula
Luminous flux	400 lm
Colour rendering	90
Output	5 W
Energy consumption/1000 h	5 kWh

Options	Prod. no.	GBP
○ transparent 2200 K	**1008154**	**38.00**

LED A60
GU10

220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 11 cm

Manufacturer	Segula
Luminous flux	650 lm
Colour rendering	90
Output	6.5 W
Energy consumption/1000 h	7 kWh

Options	Prod. no.	GBP
○ transparent 2700 K	**1008375**	**38.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED T32
GU10

220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm L: 10 cm

Manufacturer	Segula
Luminous flux	270 lm
Colour rendering	90
Output	3.2 W
Energy consumption/1000 h	4 kWh

Options	Prod. no.	GBP
○ transparent 2700 K	**1006321**	**42.00**

LED QPAR51
GU10

220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm | L: 5 cm

Luminous flux	360 lm
Colour rendering	90
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
○ silver 2200 K	**1005273**	**9.00**

LED QPAR51
GU10

220-240 V ~50/60 Hz
Material: plastic PC

Colour rendering	90
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
● black 450 lm	2700 K	**1005077**	**7.00**
● black 470 lm	3000 K	**1005080**	**7.00**
● black 490 lm	4000 K	**1005083**	**7.00**

LED QPAR51
GU10

220-240 V ~50/60 Hz
Material: plastic PC

Luminous flux	450 lm
Colour rendering	90
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
○ white 450 lm	2700 K	**1005076**	**7.00**
○ white 470 lm	3000 K	**1005079**	**7.00**
○ white 490 lm	4000 K	**1005082**	**7.00**

LED QPAR51
GU10

220-240 V ~50/60 Hz
Material: plastic PC

Luminous flux	450 lm
Colour rendering	90
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
● grey 450 lm	2700 K	**1005075**	**7.00**
● grey 470 lm	3000 K	**1005078**	**7.00**
● grey 490 lm	4000 K	**1005081**	**7.00**

LED QPAR51
GU10

220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm | L: 5.4 cm

Luminous flux	230 lm
Colour rendering	80
Output	2.4 W
Energy consumption/1000 h	3 kWh

Options	Prod. no.	GBP
○ transparent 2700 K	**1007230**	**5.00**
○ transparent 3000 K	**1007231**	**5.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED QPAR111
GU10

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11 cm | L: 7 cm

Colour rendering	90
Output	12 W
Energy consumption/1000 h	12 kWh

Options	Prod. no.	GBP
aluminium 670 lm | 2700 K	**1005297**	**73.00**
aluminium 680 lm | 3000 K	**1005298**	**73.00**
aluminium 750 lm | 4000 K	**1005299**	**73.00**

LED QPAR111
GU10

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11.1 cm | L: 7 cm

Colour rendering	90
Output	12.5 W
Energy consumption/1000 h	13 kWh

Options	Prod. no.	GBP
silver 900 lm | 2700 K | 10°	**1005275**	**48.00**
silver 650 lm | 3000 K | 12°	**1005278**	**48.00**
silver 1000 lm | 4000 K | 10°	**1005281**	**48.00**

LED QPAR111
GU10

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11.1 cm | L: 7 cm

Colour rendering	90
Output	12.5 W
Energy consumption/1000 h	13 kWh

Options	Prod. no.	GBP
silver 950 lm | 2700 K	**1005276**	**43.00**
silver 950 lm | 3000 K	**1005279**	**43.00**
silver 1000 lm | 4000 K	**1005282**	**43.00**

LED QPAR111
GU10

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11.1 cm | L: 7 cm

Luminous flux	1000 lm
Colour rendering	90
Output	12.5 W
Energy consumption/1000 h	13 kWh

Options	Prod. no.	GBP
silver 1000 lm | 2700 K	**1005277**	**43.00**
silver 1000 lm | 3000 K	**1005280**	**43.00**
silver 1100 lm | 4000 K	**1005283**	**43.00**

LED QPAR111
GU10

220-240 V ~50/60 Hz
Material: glass
Ø: 11.1 cm | L: 6.1 cm

Luminous flux	680 lm
Colour rendering	90
Output	8 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
transparent 2700 K	**1005274**	**26.00**

LED A19
E27

220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 11 cm

Luminous flux	570 lm
Colour rendering	90
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
transparent 2200 K	**1008153**	**46.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED A60
E27

220-240 V ~50/60 Hz
Material: plastic
Ø: 6 cm | L: 12 cm

Luminous flux	1300 lm
Colour rendering	90
Output	13.2 W
Energy consumption/1000 h	14 kWh

Options	Prod. no.	GBP
○ white 2700 K	**1005302**	**11.00**

LED A60
E27, High Efficiency

220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.8 cm

Colour rendering	80
Output	3.8 W
Energy consumption/1000 h	4 kWh

Options	Prod. no.	GBP
○ transparent 830 lm | 2700 K	**1008641**	**6.50**
○ transparent 860 lm | 3000 K	**1008642**	**6.50**

LED A60
E27

220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.8 cm

Luminous flux	810 lm
Colour rendering	80
Output	8 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
○ transparent 2700 K	**1008643**	**2.75**
○ transparent 3000 K	**1008644**	**2.75**

LED A60
E27

220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.5 cm

Luminous flux	800 lm
Colour rendering	90
Output	7.5 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
○ transparent 2700 K	**1005303**	**9.00**

LED GLOBE 150
E27, Twisted Smokey Grey

220-240 V ~50/60 Hz
Material: glass
Ø: 15 cm | L: 18.5 cm

Manufacturer	Segula
Luminous flux	230 lm
Colour rendering	85
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
● smoky grey 1900 K	**1008151**	**72.00**

LED GLOBE 125
E27, Soft Curve Smokey

220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	400 lm
Colour rendering	90
Output	8 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
● smoky grey 1900 K	**1008159**	**77.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED GLOBE 125
E27, Slanting Top Smokey

220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	350 lm
Colour rendering	90
Output	5 W
Energy consumption/1000 h	5 kWh

Options	Prod. no.	GBP
smoky grey 2200 K	1008160	68.00

LED GLOBE 125
E27, Crescent Slanting Smokey

220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	310 lm
Colour rendering	90
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
smoky grey 1900 K	1008161	59.00

LED GLOBE 125
E27, Black Smokey

220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 16.5 cm

Manufacturer	Segula
Luminous flux	220 lm
Colour rendering	85
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
smoky grey 1900 K	1008155	59.00

LED GLOBE 150
E27, Black Smokey

220-240 V ~50/60 Hz
Material: glass
Ø: 15 cm | L: 18.5 cm

Manufacturer	Segula
Luminous flux	260 lm
Colour rendering	85
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
smoky grey 1900 K	1008163	72.00

LED GLOBE 200
E27, Black Smokey

220-240 V ~50/60 Hz
Material: glass
Ø: 20 cm | L: 23 cm

Manufacturer	Segula
Luminous flux	300 lm
Colour rendering	85
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
smoky grey 1900 K	1008164	89.00

LED GLOBE 300
E27, Black Smokey

220-240 V ~50/60 Hz
Material: glass
Ø: 30 cm | L: 32 cm

Manufacturer	Segula
Luminous flux	350 lm
Colour rendering	85
Output	8 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
smoky grey 1900 K	1008165	214.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED T32
E27, Soft Spiral

220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm | L: 19 cm

Manufacturer	Segula
Luminous flux	570 lm
Colour rendering	90
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
○ transparent 2200 K	**1008152**	**55.00**

LED T32
E27, Soft Tube

220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm | L: 30 cm

Manufacturer	Segula
Luminous flux	400 lm
Colour rendering	90
Output	8 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
○ transparent 1900 K	**1008374**	**42.00**

LED T38
E27

220-240 V ~50/60 Hz
Material: plastic
Ø: 3.8 cm | L: 11.6 cm

Luminous flux	880 lm
Colour rendering	90
Output	8 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
○ white 3000 K	**1005289**	**9.00**

LED T45
E27

220-240 V ~50/60 Hz
Material: plastic
Ø: 4.5 cm | L: 14 cm

Luminous flux	1520 lm
Colour rendering	90
Output	13.5 W
Energy consumption/1000 h	14 kWh

Options	Prod. no.	GBP
○ white 3000 K	**1005307**	**11.00**

LED T32
E27, Slim Tube

220-240 V ~50/60 Hz
Material: glass
Ø: 5.2 cm L: 17.5 cm

Manufacturer	Segula
Luminous flux	1250 lm
Colour rendering	90
Output	11 W
Energy consumption/1000 h	11 kWh

Options	Prod. no.	GBP
○ transparent 2700 K	**1008162**	**72.00**

LED ST64
E27, Gold

220-240 V ~50/60 Hz
Material: glass
Ø: 6.4 cm | L: 14.5 cm

Luminous flux	700 lm
Colour rendering	90
Output	7.5 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
● gold 2500 K	**1005265**	**23.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED ST65
E27, Soft Cage

C · IP20 · 330° · 20000 h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 6.5 cm | L: 14.5 cm

Manufacturer	Segula
Luminous flux	570 lm
Colour rendering	90
Output	6 W
Energy consumption/1000 h	6 kWh

Options	Prod. no.	GBP
transparent 2200 K	1008156	46.00

LED ST64
E27, Gold Curly Filament

A–G: G

IP20 · 325° · 25000 h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 6.4 cm | L: 14.2 cm

Colour rendering	80
Output	4 W
Energy consumption/1000 h	4 kWh

Options	Prod. no.	GBP
gold/transparent 250 lm | 1800 K	1008645	5.00
gold/transparent 300 lm | 2000 K	1008646	5.00

LED ST58
E27

A–G: F

320° · 15000 h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 5.8 cm | L: 14.2 cm

Luminous flux	800 lm
Colour rendering	90
Output	7.5 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
transparent 2700 K	1005268	11.00

LED A60
E27, Mirrorhead Chrom

A–G: F

180° · 15000 h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.5 cm

Luminous flux	720 lm
Colour rendering	90
Output	7.5 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
chrome 2700 K	1005305	17.00

LED GLOBE 125
E27

A–G: F

C · 320° · 15000 h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 17.8 cm

Luminous flux	800 lm
Colour rendering	90
Output	7.5 W
Energy consumption/1000 h	8 kWh

Options	Prod. no.	GBP
transparent 2700 K	1005310	16.00

LED GLOBE 125
E27, Half Moon

A–G: F

C · IP20 · 330° · 20000 h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	650 lm
Colour rendering	90
Output	6.5 W
Energy consumption/1000 h	7 kWh

Options	Prod. no.	GBP
frosted 2700 K	1008157	42.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SLVconnect®
LED A60 Smart
E27, Tunable White

NEW

IP20 190°

220-240 V ~50/60 Hz
Material: aluminium/plastic/PC
Ø: 6 cm

Luminous flux	1100 lm
Colour rendering	90
Output	8.5 W
Energy consumption/1000 h	9 kWh

Options	Prod. no.	GBP
○ white 2200-6500 K	1010465	30.00

SLVconnect®
LED A60 Smart
E27, RGBW

NEW

IP20 190°

220-240 V ~50/60 Hz
Material: aluminium/plastic/PC
Ø: 6 cm

Luminous flux	1100 lm
Colour rendering	90
Output	9.5 W
Energy consumption/1000 h	10 kWh

Options	Prod. no.	GBP
○ white 1800-6500 K	1010466	36.00

SLVconnect®
LED QPAR111 Smart
GU10, Tunable White

NEW

IP20 24°

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11.1 cm

Luminous flux	750 lm
Colour rendering	90
Output	10 W
Energy consumption/1000 h	10 kWh

Options	Prod. no.	GBP
○ white 2200-6500 K	1010467	50.00

SLVconnect®
LED ST19 Smart
E27, Tunable White

NEW

IP20 300°

220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm

Luminous flux	640 lm
Colour rendering	90
Output	7 W
Energy consumption/1000 h	7 kWh

Options	Prod. no.	GBP
● amber 2200-4000 K	1010484	27.00

SLVconnect®
LED A60 Smart
E27, Tunable White

NEW

IP20 300°

220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm

Luminous flux	640 lm
Colour rendering	90
Output	7 W
Energy consumption/1000 h	7 kWh

Options	Prod. no.	GBP
● amber 2200-4000 K	1010486	24.00

SLVconnect®
LED QPAR51 Smart
GU10, Tunable White

NEW

IP20 36°

220-240 V ~50/60 Hz
Material: aluminium/PC
Ø: 5 cm

Luminous flux	420 lm
Colour rendering	90
Output	5 W
Energy consumption/1000 h	5 kWh

Options	Prod. no.	GBP
○ white 2200-6500 K	1010470	33.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SLVconnect®
LED QPAR51 Smart
GU10, RGBW

NEW

220-240 V ~50/60 Hz
Material: aluminium/PC
Ø: 5 cm

Luminous flux	400 lm
Colour rendering	90
Output	5 W
Energy consumption/1000 h	5 kWh

Options	Prod. no.	GBP
○ white 2200-6500 K	**1010471** ●	**39.00**

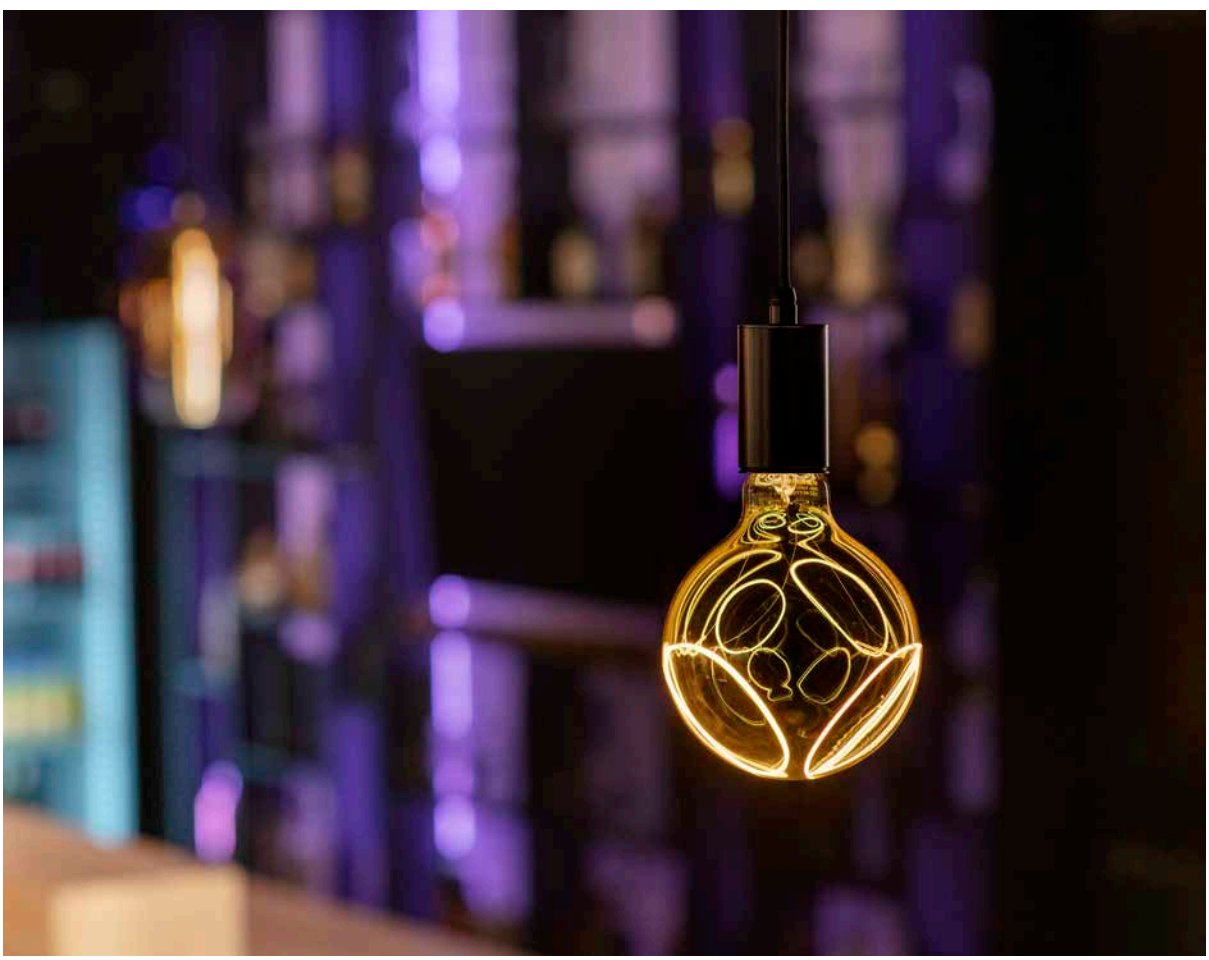

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

E-TRANS-
FORMER | 1012

TENSEO TRANS-
FORMER | 1012

DALI
INTERFACE | 1012

CONVERTER | 1012

LED POWER SUPPLY |
1013–1015

LED POWER SUPPLY
DIMMABLE | 1015

LED DRIVER |
1015–1019

CONTROLLER | 1020

EMERGENCY LIGHT
FEATURE | 1020

CEILING HOOK | 1021

CABLE CLAMP | 1021

CEILING ROSETTE |
1021

TEXTILE CABLE | 1021

GU10 LED CONNEC-
TION BOX | 1021

CABLE | 1021

GU10 FITTING | 1022

REMOTE
CONTROL | 1022

CONNECTION
BOX | 1022

REMOTE CONTROL |
1022

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

E-TRANSFORMER
60W | 12V dimmable

220-240 V ~50/60 Hz
L: 10.6 cm | W: 3.3 cm | H: 2.2 cm

Output voltage	11.2V-11.5V
Output from	3 W
Output up to	60 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008675**	**24.00**

TENSEO TRANSFORMER
12V AC | 50VA conventional

220-240 V ~50/60 Hz
Ø: 11.1 cm | H: 11 cm
Material: steel/brass

Output voltage	12 V AC
Output up to	60 W
Thermal protection	130°C
Number of sec. outputs	1

Options	Prod. no.	GBP
● black	**1002691**	**96.00**
○ white	**1002692**	**96.00**
◑ chrome	**1002693**	**99.00**

TENSEO TRANSFORMER
12V AC | 105VA conventional

220-240 V ~50/60 Hz
Ø: 11.1 cm | H: 11 cm
Material: steel/brass

Output voltage	12 V AC
Output up to	105 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**138981**	**116.00**
◑ chrome	**138982**	**127.00**

TENSEO TRANSFORMER
12V AC | 210VA conventional

220-240 V ~50/60 Hz
Ø: 13.5 cm | H: 11 cm
Material: steel/brass

Output voltage	12 V AC
Output up to	210 W
Thermal protection	130°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**138991**	**175.00**
◑ chrome	**138992**	**183.00**

DALI INTERFACE
1-10V + on/off

L: 5.9 cm | W: 3.25 cm | H: 1.5 cm
Material: plastic

- Suitable for controlling electronic ballasts with 1-10V control input
- Galvanic isolation of DALI input and 1-10V output

max. nominal load	1000 W

Options	Prod. no.	GBP
● grey	**1002218**	**240.00**

CONVERTER
Phase dim -> Dali

L: 4.6 cm | W: 4.5 cm | H: 2 cm
Material: polycarbonate (PC)

Output voltage	100-240 V
max. nominal load	200 W

Options	Prod. no.	GBP
○ white	**1006452**	**68.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED POWER SUPPLY
24V | 24W

IP20

220-240 V ~50/60 Hz
L: 13.7 cm | W: 5 cm | H: 1.55 cm

- Extra-flat design
- Strain relief included

Output voltage	24 V DC
Output up to	30 W
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008653**	**34.00**

LED POWER SUPPLY
24V | 36W

IP20

220-240 V ~50/60 Hz
L: 17 cm | W: 5.7 cm | H: 1.8 cm

- Extra-flat design
- Strain relief included

Output voltage	24 V
Output up to	36 W
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008654**	**47.00**

LED POWER SUPPLY
24V | 60W

DALI

Dali IP20

220-240 V ~50/60 Hz
L: 17 cm | W: 5.7 cm | H: 1.8 cm

- Extra-flat design
- Strain relief included

Output voltage	24 V
Output up to	60 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008655**	**56.00**

LED POWER SUPPLY
12V | 24W, round

IP20

220-240 V ~50/60 Hz
Ø: 5.5 cm | H: 2.5 cm

- Suitable for box installation
- Strain relief not included

Output voltage	12 V
Output from	1.2 W
Output up to	24 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008651**	**23.00**

LED POWER SUPPLY 24
24V | 25W, round

IP20

220-240 V ~50/60 Hz
Ø: 5.5 cm | H: 2.5 cm

- Suitable for box installation
- Strain relief not included

Output voltage	24 V
Output from	1.2 W
Output up to	25 W
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008652**	**23.00**

LED POWER SUPPLY
30W | 24V DC Strain relief included

IP20

220-240 V ~50/60 Hz
L: 30 cm | W: 3 cm | H: 1.6 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	0 W
Output up to	30 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1007250**	**43.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED POWER SUPPLY
100W | 24V DC Strain relief included

220-240 V ~50/60 Hz
L: 35 cm | W: 3 cm | H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V
Output from	0 W
Output up to	100 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1007251**	**69.00**

LED POWER SUPPLY
150W | 24V DC Strain relief included

220-240 V ~50/60 Hz
L: 35 cm | W: 3 cm | H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V
Output from	0 W
Output up to	150 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1007252**	**86.00**

LED POWER SUPPLY
250W | 24V DC Strain relief included

220-240 V ~50/60 Hz
L: 40 cm | W: 4 cm | H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24V
Output up to	250 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1007253**	**103.00**

LED POWER SUPPLY
25W | 24V

220-240 V ~50/60 Hz
L: 12.8 cm | W: 5.2 cm | H: 3 cm
Material: polycarbonate (PC)

Output voltage	24V
Output from	9.6 W
Output up to	25 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
◯● white/grey	**1006336**	**30.00**

POWER ADAPTER
50W | 24V

220-240 V ~50/60 Hz
L: 18.4 cm | W: 6.1 cm | H: 3.2 cm
Material: polycarbonate (PC)

Output voltage	24V
Output from	12 W
Output up to	50 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
◯● white/blue	**1003104**	**43.00**

POWER ADAPTER
100W | 24V DC

220-240 V ~50/60 Hz
L: 21 cm | W: 6.7 cm | H: 3.4 cm
Material: polycarbonate (PC)

Output voltage	24V
Output from	33 W
Output up to	100 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
◯● white/blue	**1003105**	**104.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED POWER SUPPLY
30W | 24V DC Dali dimmable
including strain relief

220-240 V ~50/60 Hz
L: 30 cm | W: 3 cm | H: 1.6 cm
Material: polycarbonate (PC)

Output voltage	24V
Output from	12 W
Output up to	30 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1007254**	**52.00**

LED POWER SUPPLY
100W | 24V DC Dali dimmable
including strain relief

220-240 V ~50/60 Hz
L: 35 cm | W: 3 cm | H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V
Output from	30 W
Output up to	100 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1007255**	**95.00**

LED POWER SUPPLY
150W | 24V DC Dali dimmable
including strain relief

220-240 V ~50/60 Hz
L: 35 cm | W: 3 cm | H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V
Output from	45 W
Output up to	150 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1007256**	**121.00**

LED POWER SUPPLY
250W | 24V DC Dali dimmable
including strain relief

220-240 V ~50/60 Hz
L: 40 cm | W: 4 cm | H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	75 W
Output up to	250 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1007257**	**138.00**

LED DRIVER
4W | 350 mA



220-240 V ~ 50/60Hz
L: 4.75 cm | W: 2.72 cm | H: 2 cm
Material: plastic PC

• Output current constant 350 mA

Output voltage	2.7-9.5 V
Output from	1 W
Output up to	3.32 W
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008656**	**16.00**

LED DRIVER
4W | 700 mA

220-240 V ~ 50/60Hz
L: 4.75 cm | W: 2.72 cm | H: 2 cm
Material: plastic PC

• Output current constant 700 mA

Output voltage	2.7-4.5 V
Output from	1.9 W
Output up to	3.15 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008657**	**16.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED DRIVER
10W |350 mA round

IP20

220-240V ~ 50/60Hz
L: 202 cm | Ø: 4.23 cm
Material: plastic PC

• Output current constant 700 mA

Output voltage	19-28 V
Output from	6.5 W
Output up to	15 W
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	1008658	25.00

LED DRIVER
15W | 700 mA round

IP44

220-240V ~ 50/60Hz
L: 2.1 cm | Ø: 5 cm
Material: plastic PC

• Output current constant 700 mA

Output voltage	13-21 V
Output from	9.1 W
Output up to	14.7 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	1008659	25.00

LED DRIVER
20 W | 350 mA

IP20

220-240 V ~50/60 Hz
L: 11.6 cm | W: 4.1 cm | H: 2.5 cm
Material: polycarbonate (PC)

• Output current adjustable 350 mA

Output voltage	2-54 V
Output from	0.7 W
Output up to	19 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	1007225	26.00

LED DRIVER
21W | 150-500 mA

NEW

220-240 V ~50/60 Hz
L: 9.8 cm | W: 4.4 cm | H: 2.3 cm
Material: plastic PC

• Output current adjustable 150-500 mA

Output voltage	15-45 V
Output from	2.3 W
Output up to	22.5 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	1008699	20.00

LED DRIVER
21W | 500 mA Strain relief included

IP20

220-240 V ~50/60 Hz
L: 11.6 cm | W: 4.1 cm | H: 2.5 cm
Material: polycarbonate (PC)

• Output current adjustable 5000 mA

Output voltage	2-4 V
Output from	1 W
Output up to	21 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	1007226	26.00

LED DRIVER
20W | 350 mA | PHASE

IP20

220-240 V ~50/60 Hz
L: 11.6 cm | W: 4.1 cm | H: 2.5 cm
Material: polycarbonate (PC)

• Output current constant 350 mA

Output voltage	28-50 V
Output from	9.8 W
Output up to	17.5 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	1007228	35.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED DRIVER
20W | 350 mA/500 mA | PHASE

220-240 V ~50/60 Hz
L: 11.6 cm | W: 4.1 cm | H: 2.5 cm
Material: polycarbonate (PC)

• Output current adjustable 350/500 mA

Output voltage	10-30 V
Output from	3.5 W
Output up to	15 W
Control gear power factor	0.95
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1007227**	**35.00**

LED DRIVER
10W | 180-270 mA PHASE

220-240 V ~50/60 Hz
L: 12.2 cm | W: 4.1 cm | H: 2.3 cm
Material: plastic (PC)

• Output current adjustable 180-270 mA

Output voltage	26-38 V
Output from	4.68 W
Output up to	10 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008660**	**28.00**

LED DRIVER
10W | 500-700 mA PHASE

220-240 V ~50/60 Hz
L: 12.2 cm | W: 4.1 cm | H: 2.3 cm
Material: plastic (PC)

• Output current adjustable 500-700 mA

Output voltage	8-14 V
Output from	4 W
Output up to	9.8 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008661**	**31.00**

LED DRIVER
15W | 200-350 mA PHASE

220-240 V ~50/60 Hz
L: 12.2 cm | W: 4.1 cm | H: 2.3 cm
Material: plastic (PC)

• Output current adjustable 200-350 mA

Output voltage	12-42 V
Output from	5.2 W
Output up to	14.7 W
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008662**	**35.00**

LED DRIVER
20W | 350-500 mA PHASE

220-240 V ~50/60 Hz
L: 13.76 cm | W: 4.4 cm | H: 3 cm
Material: plastic (PC)

• Output current adjustable 300-500 mA

Output voltage	26-38 V
Output from	9.1 W
Output up to	19 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008663**	**40.00**

LED DRIVER
30W | 500-700 mA PHASE

220-240 V ~50/60 Hz
L: 13.76 cm | W: 4.4 cm | H: 3 cm
Material: plastic (PC)

• Output current adjustable 500-700 mA

Output voltage	26-42 V
Output from	13 W
Output up to	30 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008664**	**45.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED DRIVER
40W | 700-1050 mA PHASE

220-240 V ~50/60 Hz
L: 17.23 cm | W: 4.4 cm | H: 3 cm
Material: plastic (PC)

• Output current adjustable 750-1050 mA

Output voltage	27-38 V
Output from	26.6 W
Output up to	39.9 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008665**	**49.00**

LED DRIVER
25W | 150-700 mA | DALI dimmable

220-240 V ~50/60 Hz
L: 11.9 cm | W: 5.2 cm | H: 2.25 cm
Material: polycarbonate (PC)

• Output current adjustable 150-700 mA

Output voltage	2-42 V
Output from	0.3 W
Output up to	25 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1007229**	**61.00**

LED DRIVER
15W | 100-700 mA DALI

220-240 V ~50/60 Hz
L: 10.35 cm | W: 3 cm | H: 2.1 cm
Material: plastic (PC)

• Output current adjustable 100-700 mA

Output voltage	2.5-46 V
Output from	0.25 W
Output up to	14.7 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008666**	**61.00**

LED DRIVER
23W | 100-700 mA DALI

220-240 V ~50/60 Hz
L: 10.34 cm | W: 3 cm | H: 2.1 cm
Material: plastic (PC)

• Output current adjustable 100-700 mA

Output voltage	2.5-46 V
Output from	0.25 W
Output up to	23.1 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008667**	**66.00**

LED DRIVER
36W | 100-900 mA DALI

220-240 V ~50/60 Hz
L: 12.8 cm | W: 4.4 cm | H: 3 cm
Material: plastic (PC)

• Output current adjustable 100-900 mA

Output voltage	2.5-50 V
Output from	0.37 W
Output up to	36 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008668**	**71.00**

LED DRIVER
53W | 650-1400 mA DALI

220-240 V ~50/60 Hz
Material: plastic PC

• Output current adjustable 650-1400 mA

Output voltage	2.5-44 V
Output from	1.62 W
Output up to	53.2 W
Thermal protection	110°C
Number of sec. outputs	1

Options	Prod. no.	GBP
○ white	**1008669**	**79.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

LED DRIVER
Strain relief standard

L: 3.4 cm | W: 3 cm | H: 2.1 cm
Material: plastic PC

- For DALI dimmable drivers: 1008666, 1008667, 1008668

Options	Prod. no.	GBP
○ white	**1008672**	**0.70**

LED DRIVER
Strain relief standard

L: 3.8 cm | W: 3.5 cm | H: 3 cm
Material: plastic PC

- For DALI dimmable drivers: 1008669

Options	Prod. no.	GBP
○ white	**1008674**	**0.70**

LED DRIVER
Strain relief through-wirable

L: 9.8 cm | W: 5.8 cm | H: 2.3 cm
Material: plastic PC

- For DALI dimmable drivers: 1008666, 1008667, 1008668

Options	Prod. no.	GBP
○ white	**1008673**	**2.00**

LED DRIVER
Strain relief standard

NEW

L: 3.4 cm | W: 3.6 cm | H: 2.3 cm
Material: plastic PC

- For DALI dimmable drivers: 1008666, 1008667, 1008668

Options	Prod. no.	GBP
○ white	**1008670** ●	**0.70**

LED DRIVER
Strain relief through-wirable

NEW

L: 10.6 cm | W: 5.6 cm | H: 2.1 cm
Material: plastic PC

- For DALI dimmable drivers: 1008666, 1008667, 1008668

Options	Prod. no.	GBP
○ white	**1008671** ●	**2.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

CONTROLLER
DALI, DT8, 5 CHANNEL

12-36 V
L: 17 cm | W: 5.34 cm | H: 2.8 cm
Material: polycarbonate (PC)

Output voltage	12-36 V
Output from	60 W
Output up up to	180 W
Number of sec. outputs	5

Options	Prod. no.	GBP
○ white	**1007997**	**103.20**

EMERGENCY LIGHT FEATURE
DALI 2

Material: polycarbonate (PC)

Options	Prod. no.	GBP
○ white	**1007892**	**110.00**

FITU
Ceiling hook

IP20

Ø: 1.8 cm | L: 4.6 cm
Material: aluminium

Options	Prod. no.	GBP
● black	**132670**	**17.00**
○ white	**132671**	**17.00**

FITU
Cable clamp

IP20

Ø: 1.4 cm | L: 3.1 cm
Material: aluminium

Options	Prod. no.	GBP
● black	**132680**	**11.00**
○ white	**132681**	**11.00**

GLENOS®
Ceiling rosette

IP20

L: 8.5 cm | W: 8.5 cm | H: 2.7 cm
Material: aluminium

Max. current load 8.5 A

Options	Prod. no.	GBP
● black	**210060**	**28.00**
○ white	**210061**	**28.00**

TEXTILE CABLE
10 m

IP20

Ø: 0.6 cm | L: 1000 cm
Material: polyvinyl chloride (PVC)/textile

Max. voltage 300 V

Options	Prod. no.	GBP
● black	**961270**	**54.00**

GU10 LED CONNECTION BOX
with base, max. 10 W

IP20

220-240V ~50/60 Hz
L: 3.8 cm | W: 3.1 cm | H: 1.7 cm
Material: plastic

Options	Prod. no.	GBP
● black	**1007283**	**6.00**

CABLE
3-pin, 3 x 0,75 mmA^2, 10 m

L: 1000 cm

Max. voltage 300 V

Options	Prod. no.	GBP
	961250	**24.00**

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GU10 fitting

IP20

220-240 V ~50/60 Hz
Ø: 2.8 cm | H: 1.6 cm
Material: ceramic

Options	Prod. no.	GBP
○ white	955135	2.00

CONNECTION BOX
IP68, 3-pin

IP68

220-240V ~50/60 Hz
Ø: 2.7 cm | L: 11.5 cm
Material: polyamide (PA)

Max. voltage	450 V
Max. current load	17.5 A

Options	Prod. no.	GBP
● black	228730	16.00

CONNECTION BOX Y
IP68, 3-pin

IP68

220-240V ~50/60 Hz
L: 11 cm | W: 6.4 cm | H: 3 cm
Material: polyamide (PA)

Max. voltage	450 V
Max. current load	17.5 A

Options	Prod. no.	GBP
● black	228726	28.00

CONNECTION BOX
IP68, 5-pin

IP68

220-240V ~50/60 Hz
Ø: 3.2 cm | L: 13 cm
Material: polyamide (PA)

Max. voltage	450 V
Max. current load	32 A

Options	Prod. no.	GBP
● black	228725	17.00

CONNECTION BOX Y
5 poles, DALI

IP68

220-240V ~50/60 Hz
L: 18 cm | W: 6.3 cm | H: 3.3 cm
Material: polyamide 66 (PA)

Max. voltage	450 V
Max. current load	32 A

Options	Prod. no.	GBP
● black	1006453	31.00

REMOTE CONTROL
Zigbee, CCT/RGBW

CCT
RGB +W
ZIGBEE

IP20

L: 14 cm | w: 4.4 cm | H: 1.7 cm
Material: polycarbonate (PC)

- Battery operation

Options	Prod. no.	GBP
○ white	1007827	68.00

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

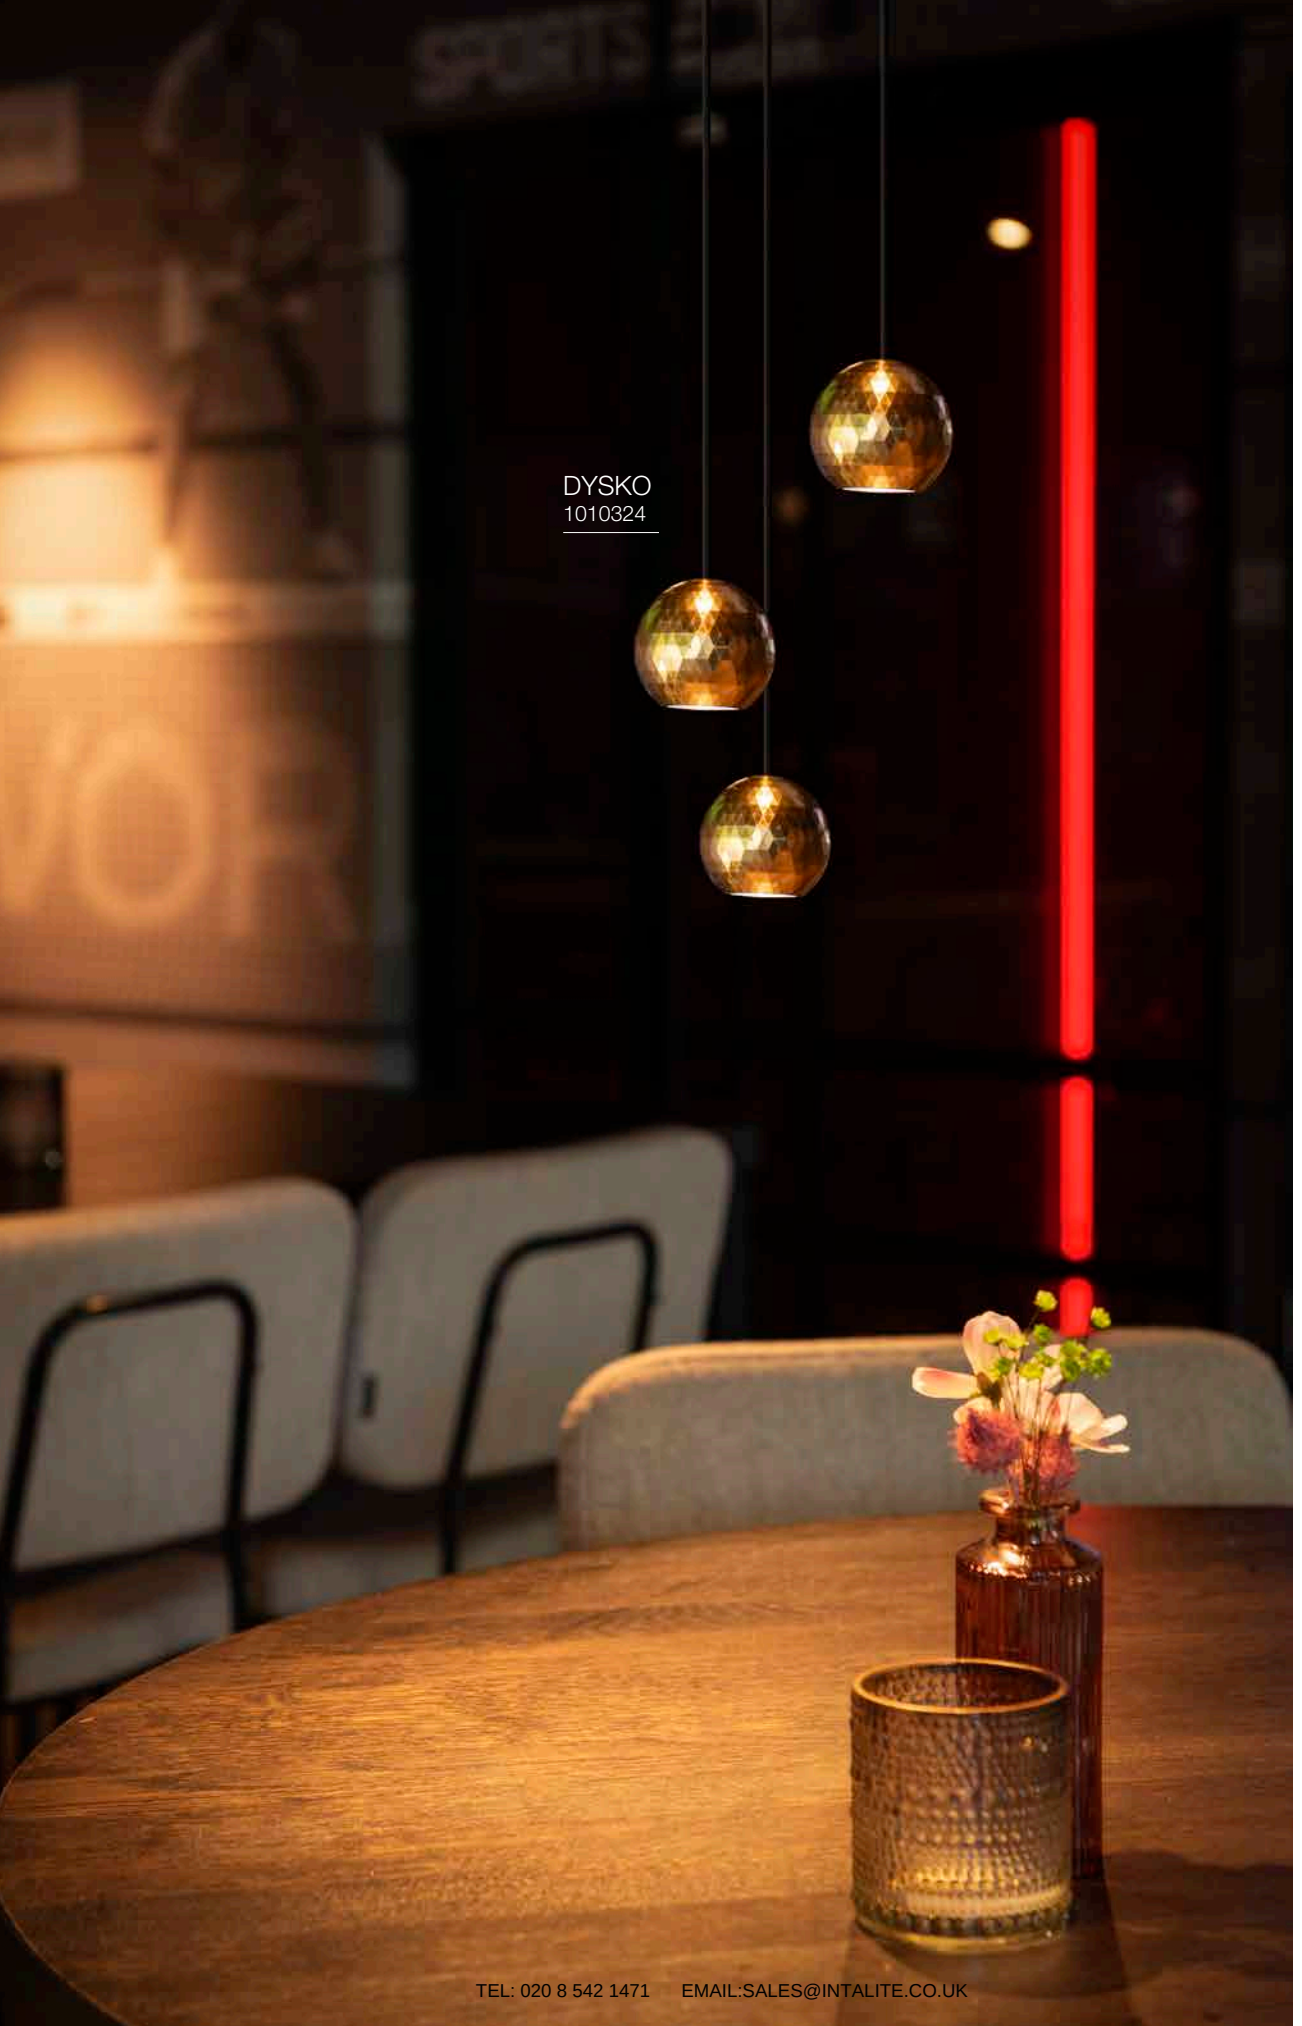

DYSKO
1010324

CONCRETE 35
1008838

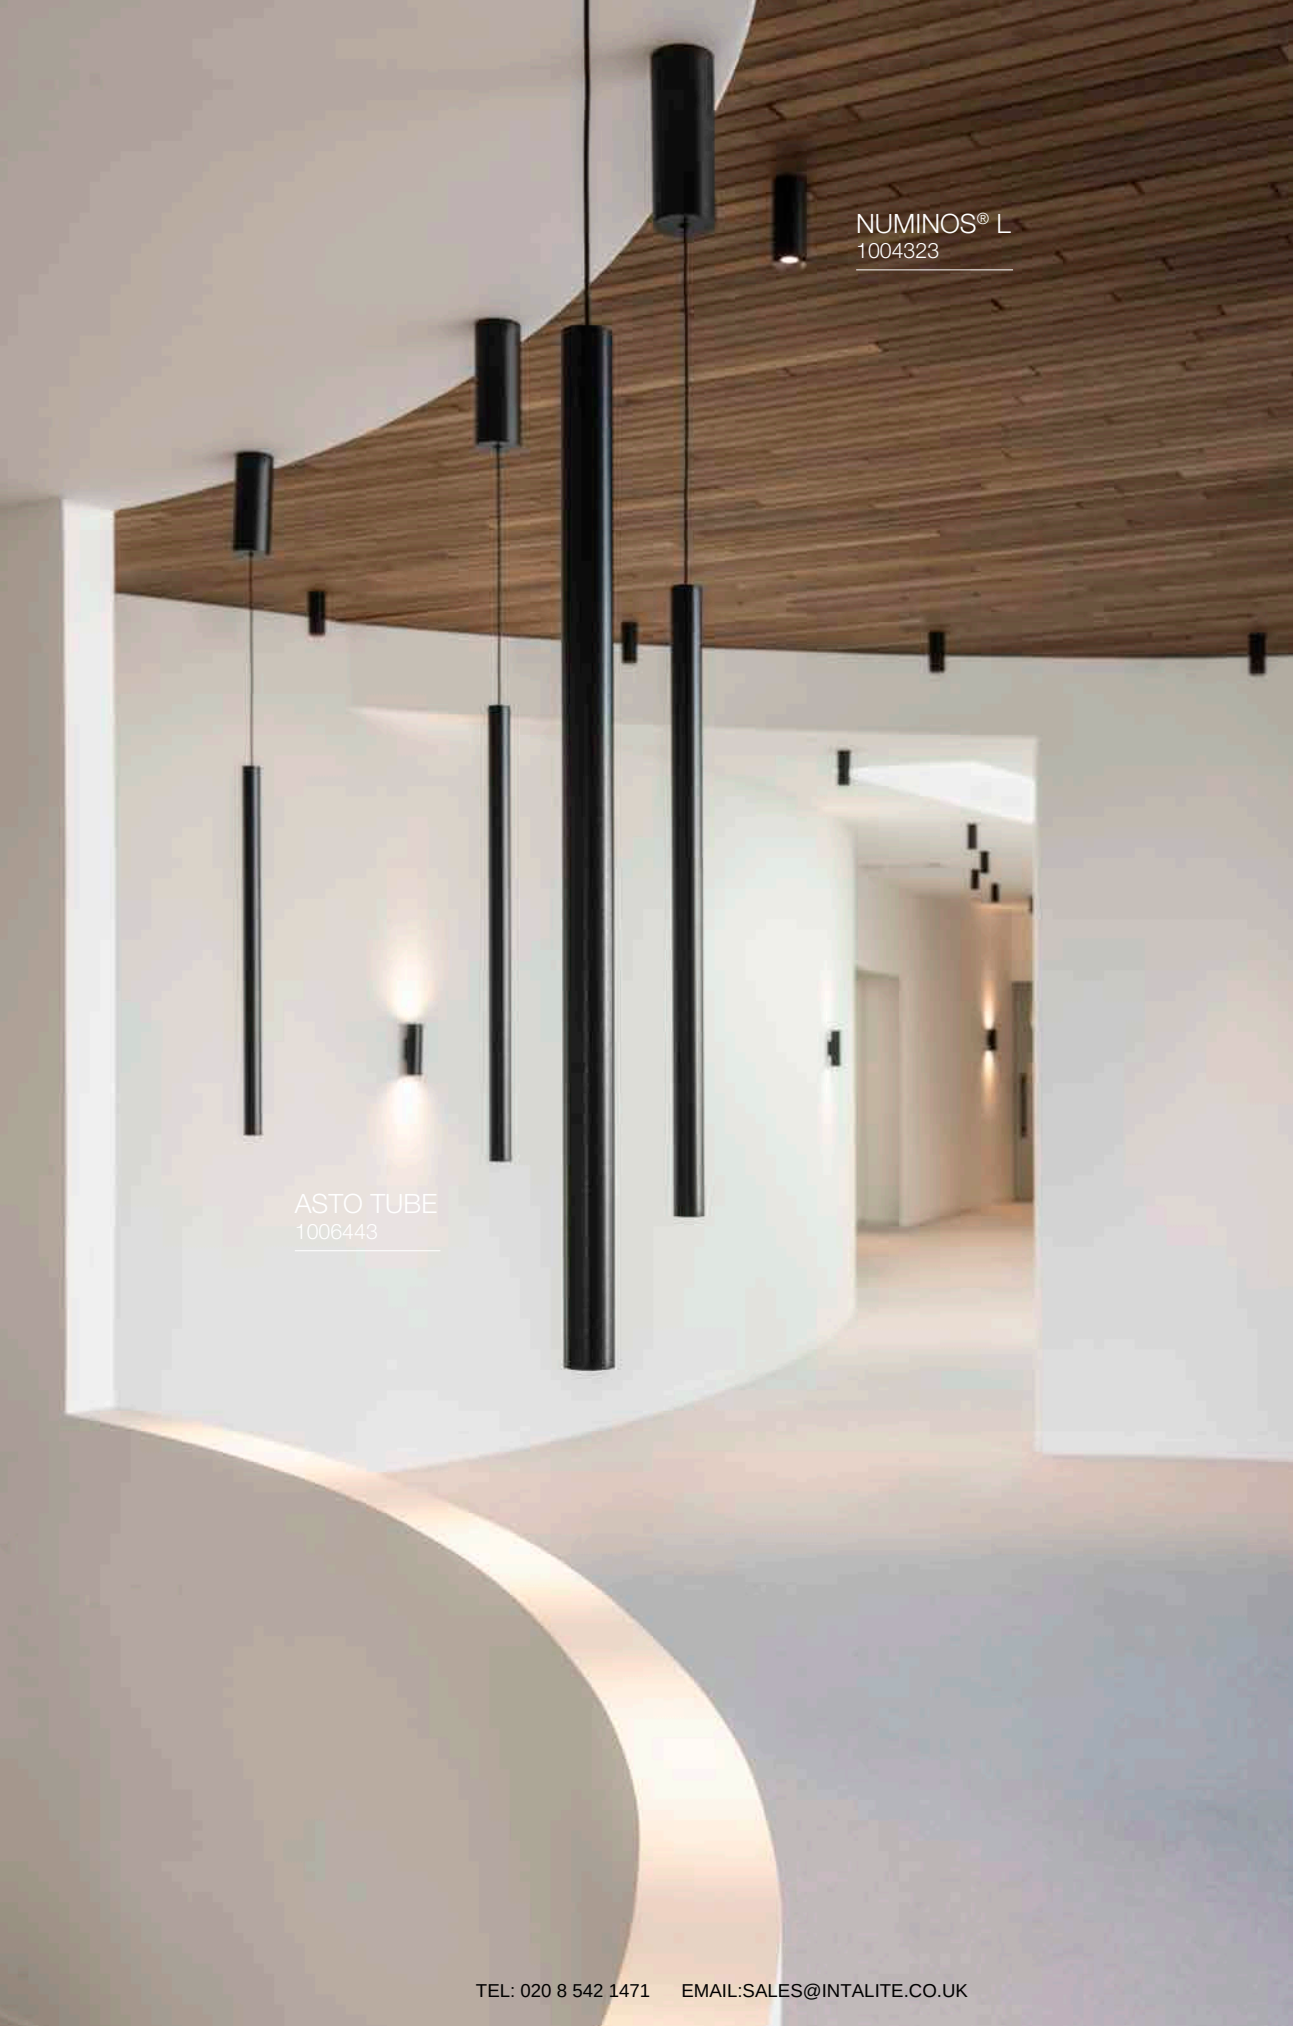
NUMINOS® L
1004323
ASTO TUBE
1006443

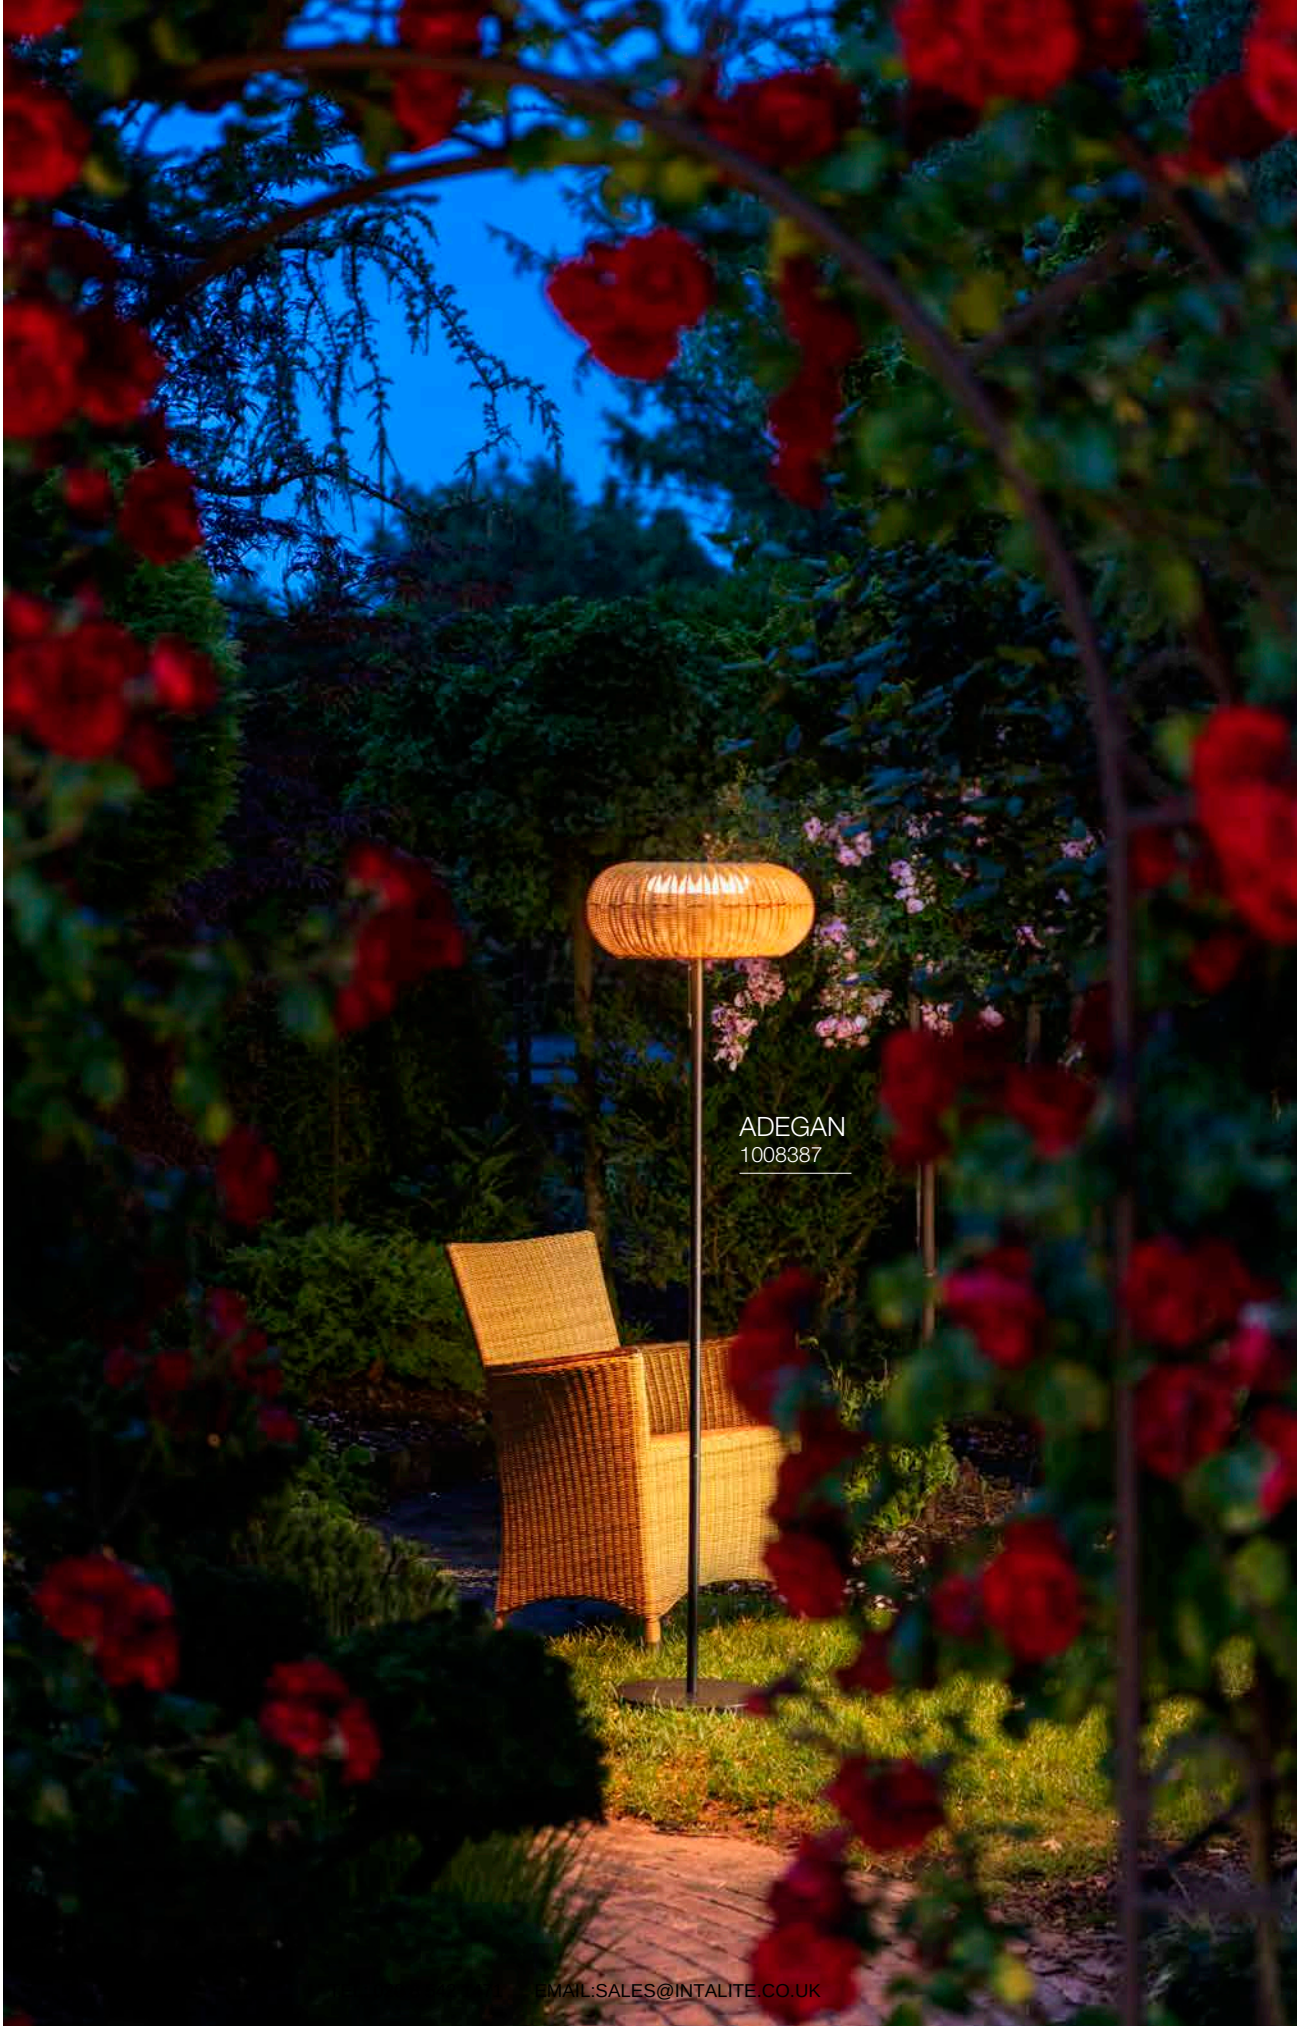
ADEGAN
1008387

UNIVERSAL DOWNLIGHT | 15

KADUX | 18–19

KADUX | 21

KADUX | 22

KADUX | 22–23

NUMINOS® | 24–33

NUMINOS® MOVE | 34–43

NUMINOS® GIMBLE | 44–53

NEW

DYSKO | 61

NEW TRIA® 68 | 62–67, 70–87

NEW TRIA® UNIVERSAL | 68–69

NEW TRIA® | 90

NEW TRIA® | 91

NEW

GLENOS® PRO | 91

MEDO® | 92–95

HORN MINI | 96

HORN | 97–98

HORN 1 | 98

HORN T | 99

HORN MAGNA | 99

SENSER | 101–103

VERLUX | 105

DL 126 | 105

PIKA | 106

OCULUS | 107

OCCULDAS | 109

KARPO | 109

GRIP! | 111

PLASTRA | 112

SOCKET

VARU | 113

SOCKET

DOLIX OUT | 114

KINI | 115

AKALO D83 | 115

FRAME BASIC | 116

FRAME CURVE | 117

NOTAPO | 119

DOWNUNDER PUR | 120

MOBALA | 121

WORO | 121

PATTA–I | 122–123

PATTA–I | 122–123



PATTA–F | 124–125

OUTDOOR RECESSED WALL LIGHTS



CONCRETO | 951

ADI | 952

DOWNUNDER OUT | 953



BRICK MESH | 955

BRICK | 955

SOCKET

BRICK DOWNUNDER | 957

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

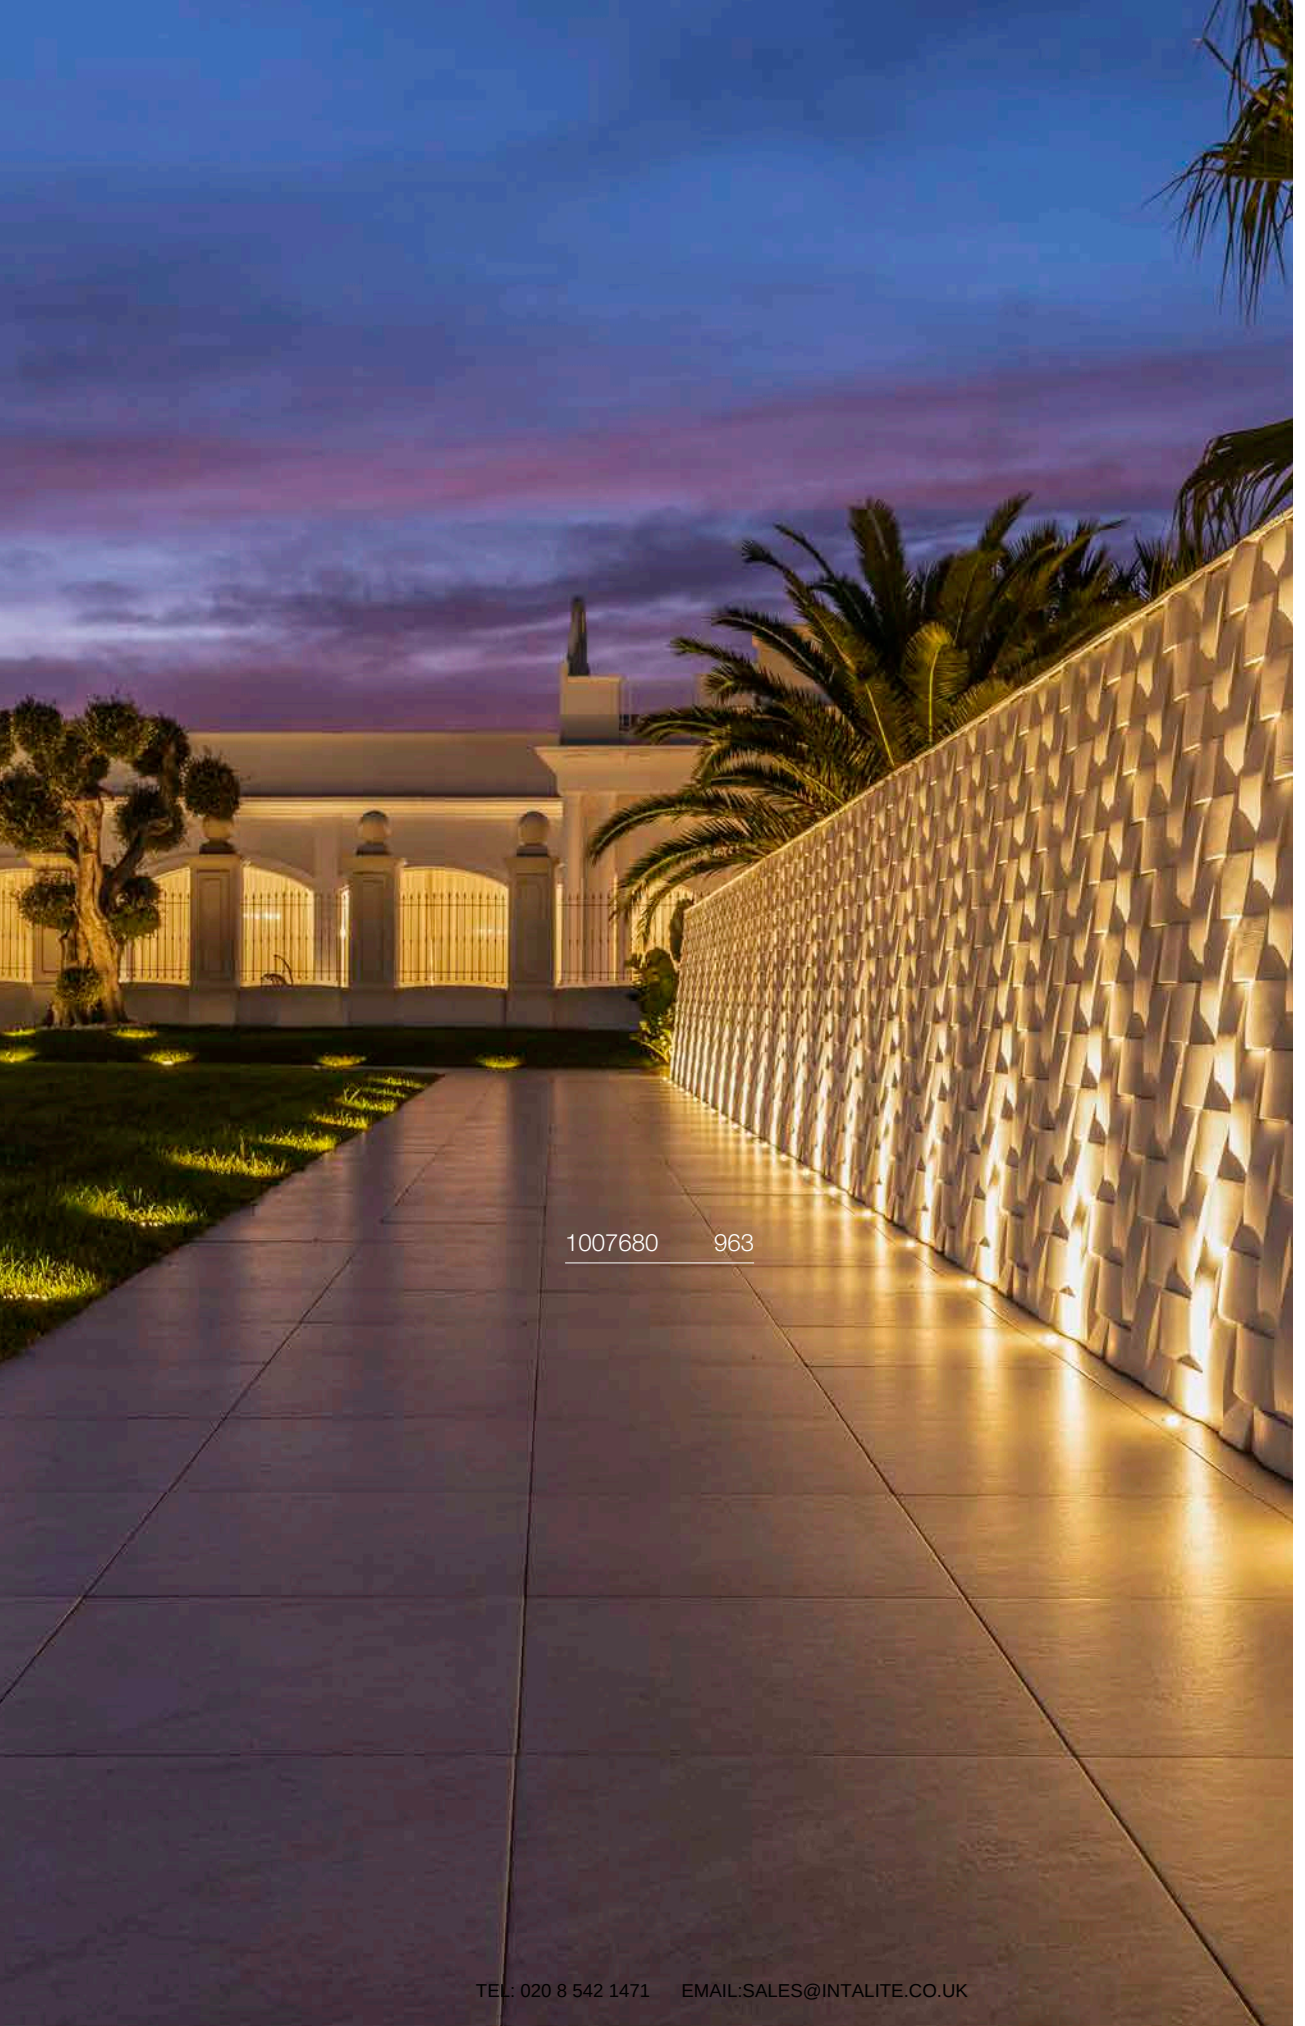

1007680 963

OUTDOOR RECESSED FLOOR LIGHTS

DASAR® | 961

NEW

DASAR® | 963–973

DASAR® FLAT | 975

DASAR® 255 | 975

DASAR® 920 | 977

DASAR® 115 | 979

DASAR® EXACT 116 | 981

DASAR® 215 | 983

DASAR® 215 | 983

DASAR® 370 | 983

TRAIL–LITE® 60 | 985

NEW

POWER TRAIL–LITE® | 987

SMALL PLOT | 989

BIG PLOT | 991

ROCCI | 993

ROCCI 200 | 995

SOLASTO | 997

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SOCKET

SUN | 128, 129

SOCKET MIX match

VARYT | 131

LED

TRILEDO | 135

LED

TRILEDO | 135

SOCKET

TRILEDO | 137

SOCKET

TRILEDO | 137

LED

NUMINOS® | 138–144

LED SOCKET

GRIP! | 147–151

LED

OCULUS CL | 153

SOCKET

ENOLA® B | 154

LED

ENOLA® C | 154

ANELA | 155

SOCKET

ASTO TUBE | 157

LED

OCCULDAS | 158

SOCKET

ALTRA DICE | 159

SOCKET

ALTRA DICE | 159

SOCKET

KARDAMOD | 161

SOCKET MIX match

FENDA | 163

SOCKET

TENORA | 164

SOCKET

SOPRANA | 165

SOCKET

PLASTRA | 166

LED

PLASTRA | 167

SOCKET

PLASTRA 105 | 167

SOCKET

PLASTRA 104 | 167

LED

FERA 25 | 168–169

LED

DECONA | 171–177

LED

MARONA | 178

NEW

LED

GLENOS® PRO | 179

LED

PANEL 60 | 181

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

OUTDOOR CEILING LIGHTS

SOCKET

PHOTONI | 827

SOCKET

CUBE | 828



ESKINA FRAME | 829

ENOLA® OCULUS | 830

ENOLA® ROUND | 831

ENOLA® SQUARE | 832

SOCKET

BIG THEO | 833



OVALISK | 834

SOCKET

MOLAT | 835

SITRA | 836

ROX | 837

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

QUIMERA | 187

SOCKET MIX match

VARYT | 189

WUD | 191

SOCKET

SUN | 192–195

NEW

SOCKET

OLYPSO | 197

SOCKET

MAGICO | 199

NUMINOS® | 200–207

GRIP! S | 209

MEDO® RING | 210–211

MEDO® PRO | 212–219

MEDO® | 220–221

NEW

LALU® SET | 224–229

ONE FLAT | 231

ONE VERTICAL | 233

ONE CUBE | 235

ONE | 237–239

ONE DOUBLE | 240

ONE TRIPLE | 241

ONE LINEAR | 243

SOCKET

PANTILO ROPE | 245

SOCKET

PANTILO OVAL | 247

SOCKET

PANTILO | 247

SOCKET

PANTILO CONVEX | 248–249

SOCKET

LIGHT EYE® | 251

SOCKET

ASTO TUBE | 253

NEW

GLENOS® PRO | 255

WORKLIGHT | 257

WORKLIGHT PRO | 257

PANEL 60 | 259



GLENOS® | 261

Q–LINE® | 263

GRIP! FLAT | 265

OCULUS | 266–267

NEW

SOCKET MIX match

FITU | 269

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SOCKET MIX match

FENDA | 272–273

LED

HELIA | 276–277

SOCKET

ENOLA® B | 279

SOCKET

ENOLA® | 279

LED

ANELA | 279

SOCKET

PARA CONE | 281

SOCKET

PHELIA | 283

SOCKET

FORCHINI | 284–285

SOCKET

ROTOBALL | 287

SOCKET

PARA DOME | 288

SOCKET

PARA 380 | 289

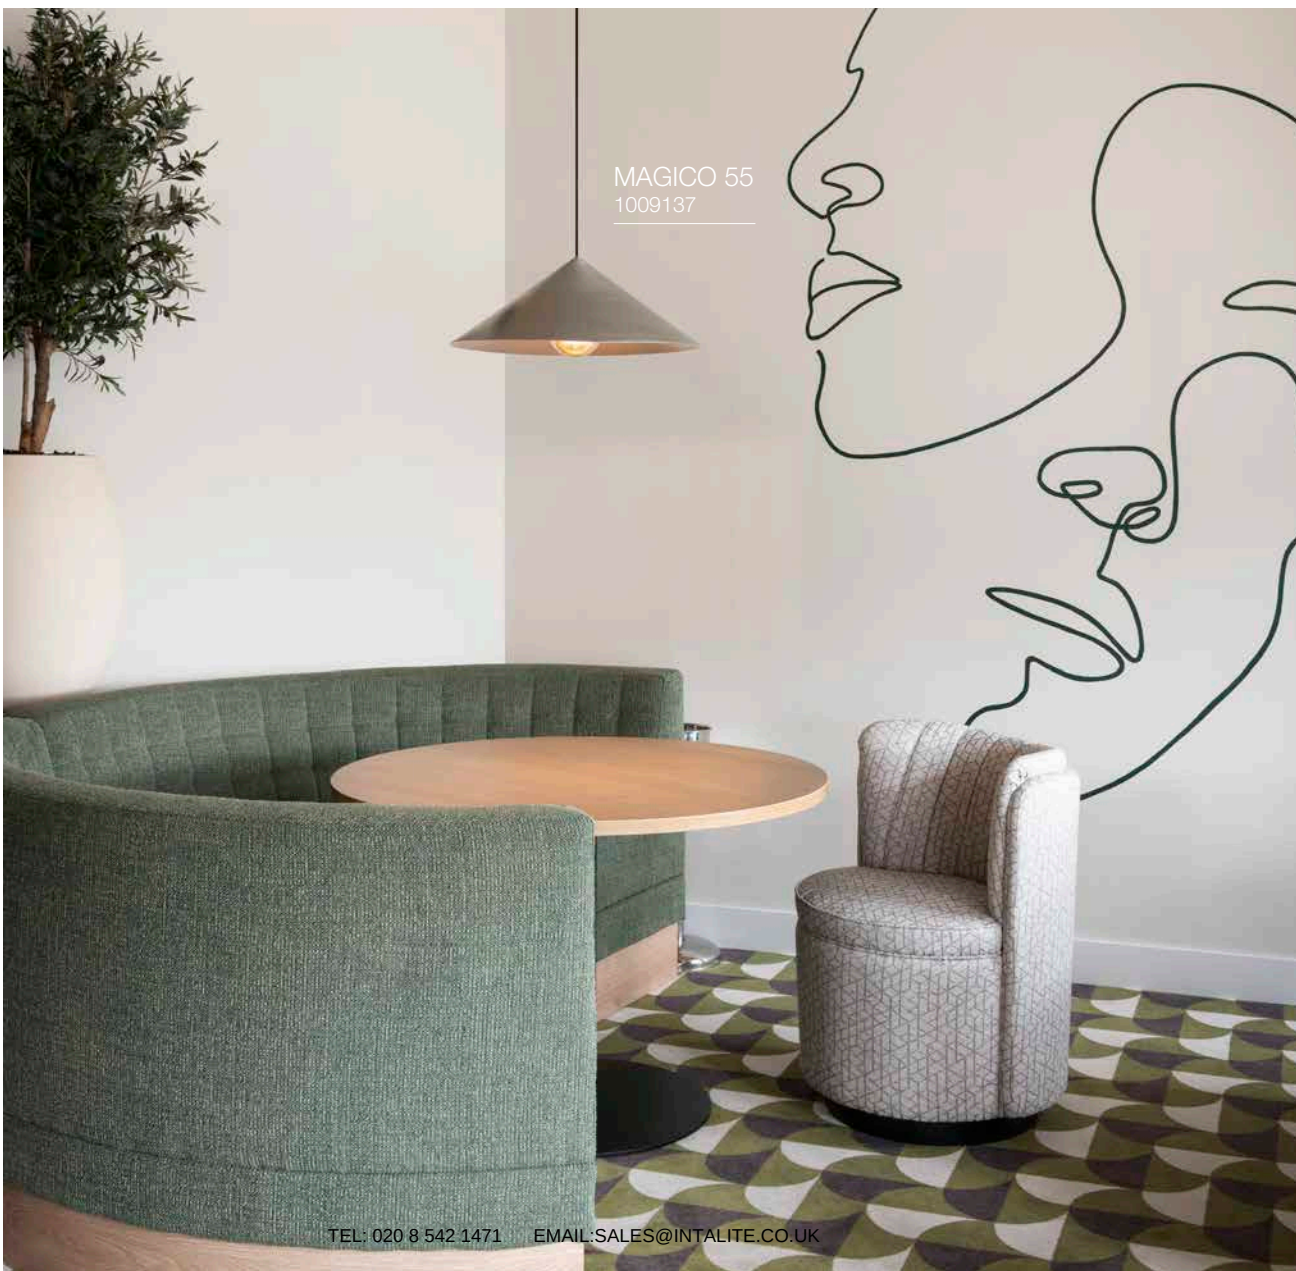

QUIMERA | 295

LYGANT | 297

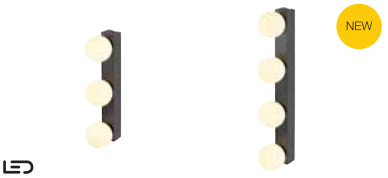

SUN MIRROR | 299

VARYT | 301

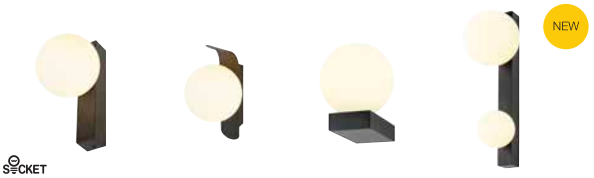

SUN | 302–305

DYSKO | 306–307

NUMINOS® | 308–315

MEDO® PRO | 316–323

MEDO® | 234–325

ONE | 326–327

ONE LINEAR | 328–329

ONE | 331

TRUKKO | 332

TRUKKO | 332–333

TRUKKO | 333

SEDO | 334

ARLINA | 335

WL 106 | 336

MIBO UP/DOWN | 337

MAGANDA | 337

DORISA | 339

GLENOS® 60 | 339

Q–LINE® | 340

L–LINE | 341

PANTILO ROPE | 345

ASTO TUBE | 347

MANA | 349–351

OCULUS | 353

PLASTRA | 354

PLASTRA | 355

PLASTRA | 355

PLASTRA | 357

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SOCKET
PLASTRA | 357

SOCKET
PLASTRA 101 | 359

SOCKET
PLASTRA | 359

SOCKET
PLASTRA 104 | 359

NEW

SOCKET
WUD WL | 361

LOGS IN | 362

LOGS IN L | 363

QUAD FRAME | 365

SOCKET
WL 149 | 367

SHELL 30 | 367

ASSO 300 | 368–369

SOCKET
OSSA | 369

CARISO | 370

CHROMBO | 371

DIRETO 60 | 373

SOCKET
DENA 30 | 373

SOCKET
BASKET | 373

FITU | 375

SOCKET
THEO UP/DOWN | 375

SOCKET
SOLID CUBE | 375

SOCKET
ENOLA® B | 377

SOCKET
FENDA | 378

SOCKET
KENKUA SPOT | 379

SOCKET
COUPA | 379

KARPO MAGN | 380

KARPO GOOSE | 380

KARPO 30 | 381

KARPO | 381

SOMNILA SPOT |
382–383

SOMNILA FLEX | 383

SOCKET
DIO FLEX PLATE | 385

SOCKET
DISPLAY ADL 50 | 385

SOCKET
PHELIA | 386

MERADO FLOOD | 386

KARPO 30 | 387

SOCKET
PURI 2.0 TUBE | 388–389

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SOCKET

PURI 2.0 CONE | 390–391

SOCKET

PURI 2.0 DOME | 392–393

SOCKET

PURI | 397

LED

NOBLO® | 399–401

NEW

LED

KALU 2.0 | 403

NEW

LED

KALU 2.0 | 403

SOCKET

PANTILO ROPE | 405

NEW

LED

CYFT | 406–409

SOCKET

ASTO TUBE | 411

SOCKET

ASTO TUBE | 411

SOCKET

KALU | 413

NEW

LED

GRIP! FLAT | 415

SOCKET

ENOLA® B | 417

SOCKET

ALTRA DICE | 418

SOCKET

SPOT 79 | 419

LED

SENSER | 421–423

SOCKET

MELAN | 424

LED

SIMA | 425

LED

LIPSY® | 426–429

LED

BATTEN | 431

LED

SIGHT 115 | 431

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

OUTDOOR WALL AND CEILING LIGHTS

R–CUBE | 843

S–CUBE | 843

PHOTONI | 844

MODELA | 845

LID I | 846



LID I | 846



LID II | 847

Q–RING | 848

I–RING | 849

D–RING | 849–850

OVAL | 851

CONCRETO | 852

RASTERLYS | 853

T–TUBE | 854–855

S–TUBE | 857

NEW

FLATT II | 858–859

FLATT | 860–861

THEO | 863–864

BIG THEO | 863–865

NEW

THEO PRO | 867–871

NEW

HELIA PRO | 873–877

SITRA | 879–881

SITRA CUBE | 881

BIG QUAD | 883

QUAD | 884

RUSTY® UP/DOWN | 885

RUSTY® UP/DOWN | 885

ENOLA® OCULUS | 887

ENOLA® ROUND | 889–891

ENOLA® SQUARE | 893–894

GRAFIT | 898–899

SQUARE | 900

QUADRULO | 901–903

MERIDIAN BOX | 904–905

MERIDIAN | 904

ESKINA FRAME | 907

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK



ESKINA FRAME | 907

BOOKAT | 908

NEW

TAHA II | 908

OVALISK | 909

PEMA® | 910



PEMA® | 911

ASTINA | 912

ASTINA STEEL | 912

ANGOLUX | 913

VILUA | 915

VILUA | 915

MYRA UP/DOWN | 916

SITRA | 917

ROX | 919

DELWA | 919

WALLYX | 920

DOWNUNDER OUT | 921

ABRIDOR | 923–925

ORDI II | 926

ORDI | 927

BOX–L | 929



BOX | 929

LOGS | 931

OUT–BEAM UP/
FLOOD DOWN | 931

L–LINE OUT | 931

PHOTONIA | 933

MOLAT | 933

GLOO PURE | 933

F–POL | 934

IPERI | 934

QUADRASYL | 935

SQUARE TURN | 935

TODAY PRO | 936

ESKINA D | 937

MYRA DISPLAY | 937

MYRA | 937

LED SPOT | 939

NAUTILUS | 939

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SOCKET

MYRA | 939

LED

ESKINA SPOT | 941

SOCKET

SITRA 360 | 942

SOCKET

THEO BRACKET | 942

LED

HELIA | 943

LED

AINOS | 944–945

LED

RUBA | 946

LED

TERANG 200 | 946

SOCKET

BULAN | 947

SOCKET

BULAN GRID | 947

ENOLA® ROUND L
1003442

BIG THEO
234515

QUIMERA
1008038

INDOOR TABLE AND FLOOR LAMPS

SOCKET

WUD TL | 435

SOCKET

MIX match

VARYT | 436–437

LED

QUIMERA | 439

LED

ONE STRAIGHT | 441

LED

ONE BOW | 441

LED

VINOLINA ONE | 443

LED

VINOLINA | 443

LED

VINOLINA TWO | 445

LED

TAHA | 447

SOCKET

SUN | 449

SOCKET

TINY SUN | 451

SOCKET

PANTILO | 453–455



SOCKET

PANTILO | 453

SOCKET

PANTILO ROPE | 454–455

SOCKET

MIX match

FENDA | 457–459

LED

KARPO | 460

SOCKET

PHELIA | 461

LED

WORKLIGHT EASY | 463

LED

WORKLIGHT PRO | 463

LED

WORKLIGHT | 465

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRID SUN | 691

GRID CUBE | 691

ADEGAN | 693

VINOLINA ONE | 695

VINOLINA | 695

VINOLINA TWO | 697

TAHA | 699

TUBE 32 | 701

S–TUBE 75 | 701

T–TUBE 70 | 702–703

PHOTONI CYL | 705

PHOTONI | 705

S–CUBE | 708

R–CUBE | 709

I–RING 65 | 710

LID I | 711

NEW

QUAD PRO | 713

M–POL | 714–723

NEW

CONCRETE | 726–727

CONCRETO | 729

RASTERLYS 70 | 731

NEW

FLATT II | 733

FLATT | 734–735

ESKINA FRAME | 737–739

LOGS | 741

GRAFIT | 743

GRAFIT | 744

QUADRULO | 747

RUSTY® SLOT | 748–749

RUSTY® PATHLIGHT | 750–751

RUSTY® | 752–753

RUSTY® CONE | 755

RUSTY® | 756

ARROCK GRANITE | 757

ARROCK ARC | 758

ARROCK STONE | 759

ARROCK SLOT | 759

L–LINE OUT | 760–761

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TAHA II | 763

OVALISK | 765

GLOO PURE | 767

ROTOBALL | 769

PHOTONIA | 771

OTOS GLAS | 771

CUBIX | 772

CONE | 772

MOLAT | 773

LISENNE | 774–775

ALPA MUSHROOM | 777

ALPA CONE | 777

APONI | 778

TRUST | 779

BIG NAILS | 780

ROX ACRYL | 781

VAP SLIM | 783

C–POL 90 | 784

F–POL 85 | 784

SQUARE | 785

SLOTS | 787

H–POL | 788–789

SLOTBOX | 791

ORDI II | 793

ABRIDOR HYBRID | 794

ABRIDOR | 795

IPERI 50 | 796

QUADRASYL 75 | 797

QUAD | 798

BOOKAT | 798

MYRA SPOT | 799

SITRA 360 | 799

THEO PATHLIGHT 73 | 801

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

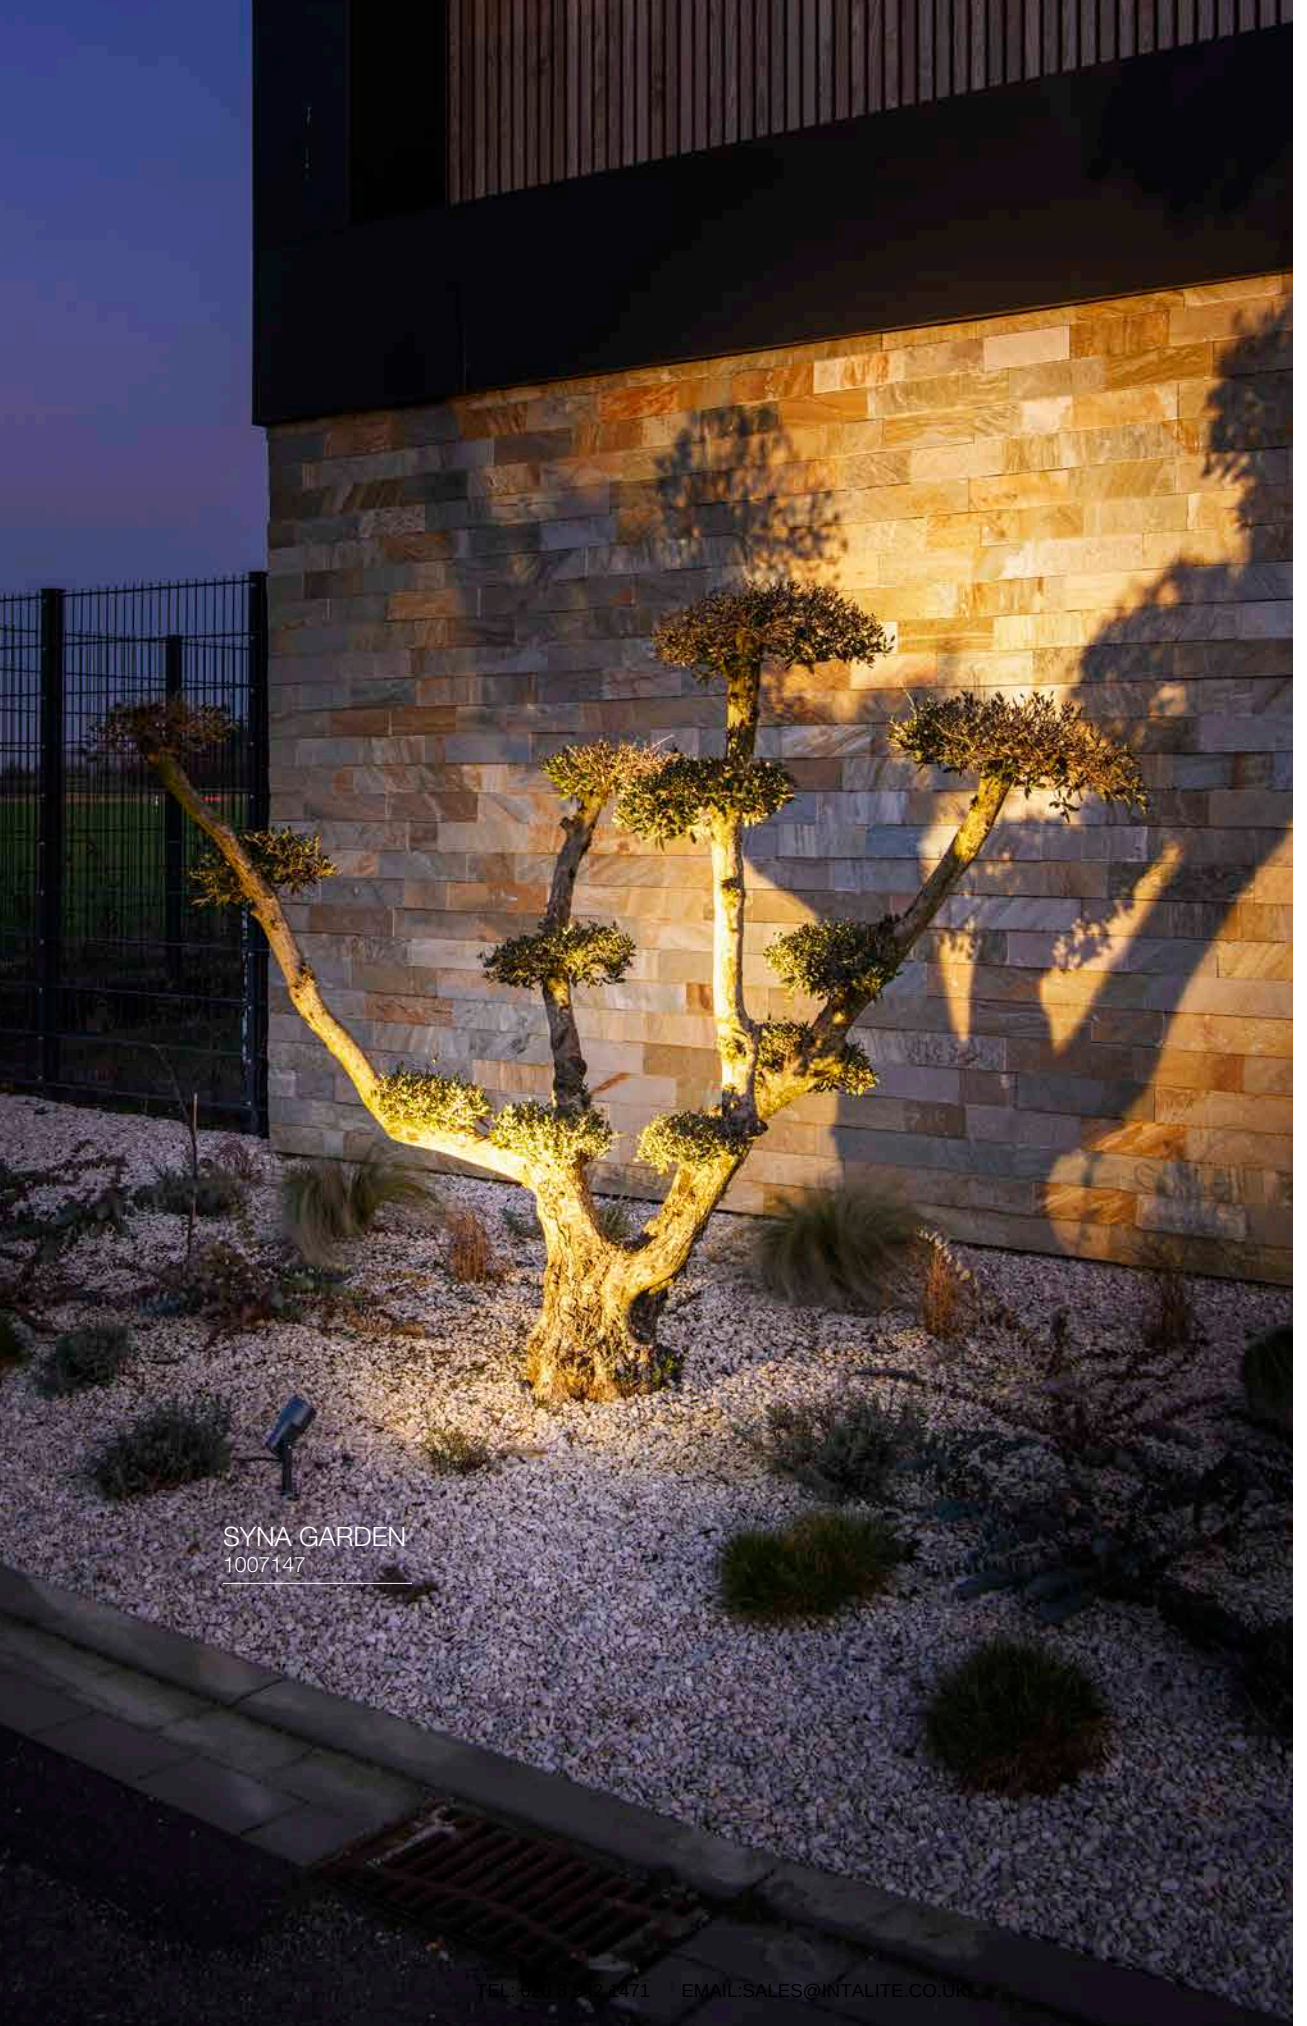

SYNA GARDEN
1007147

OUTDOOR SPOTLIGHTS

SYNA WIDE | 804

SYNA SHADE | 805

SYNA PLANT | 807

SYNA GARDEN | 807

SYNA | 807

GALEN 60 | 808

GALEN 120 | 808

GALEN PRO | 809

HELIA SPOT | 810–811

FLAC BEAM | 811

SAMRINA | 811

NAUTILUS 10 | 812–813

BIG NAUTILUS | 813

NAUTILUS 10 | 814

NAUTILUS | 815

NAUTILUS 10 SPOT | 815

DASAR® PROJECTOR | 817

DASAR® 920 | 817

HELIA SLIM | 819

THEO BRACKET | 821

LED SPIKE | 821

SITRA 360 SPIKE | 823

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

DYSKO
1010336

INDOOR 48 V SYSTEMS

KALU 2.0 | 480

LIGHT EYE® 2.0 | 481

DYSKO | 483

GRIP! FLAT | 485

GRIP! FLAT | 485

NUMINOS® | 486–493

IN–LINE | 495–499

FIX–IT! | 501–505

GRIP! S | 506–509

LALU® SET | 510–511

INDOOR LOW-VOLTAGE SYSTEMS

ASMARA | 520

TELESKOP | 520

COSMIC | 521

DURNO | 523

NOBLO® SPOT | 523

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

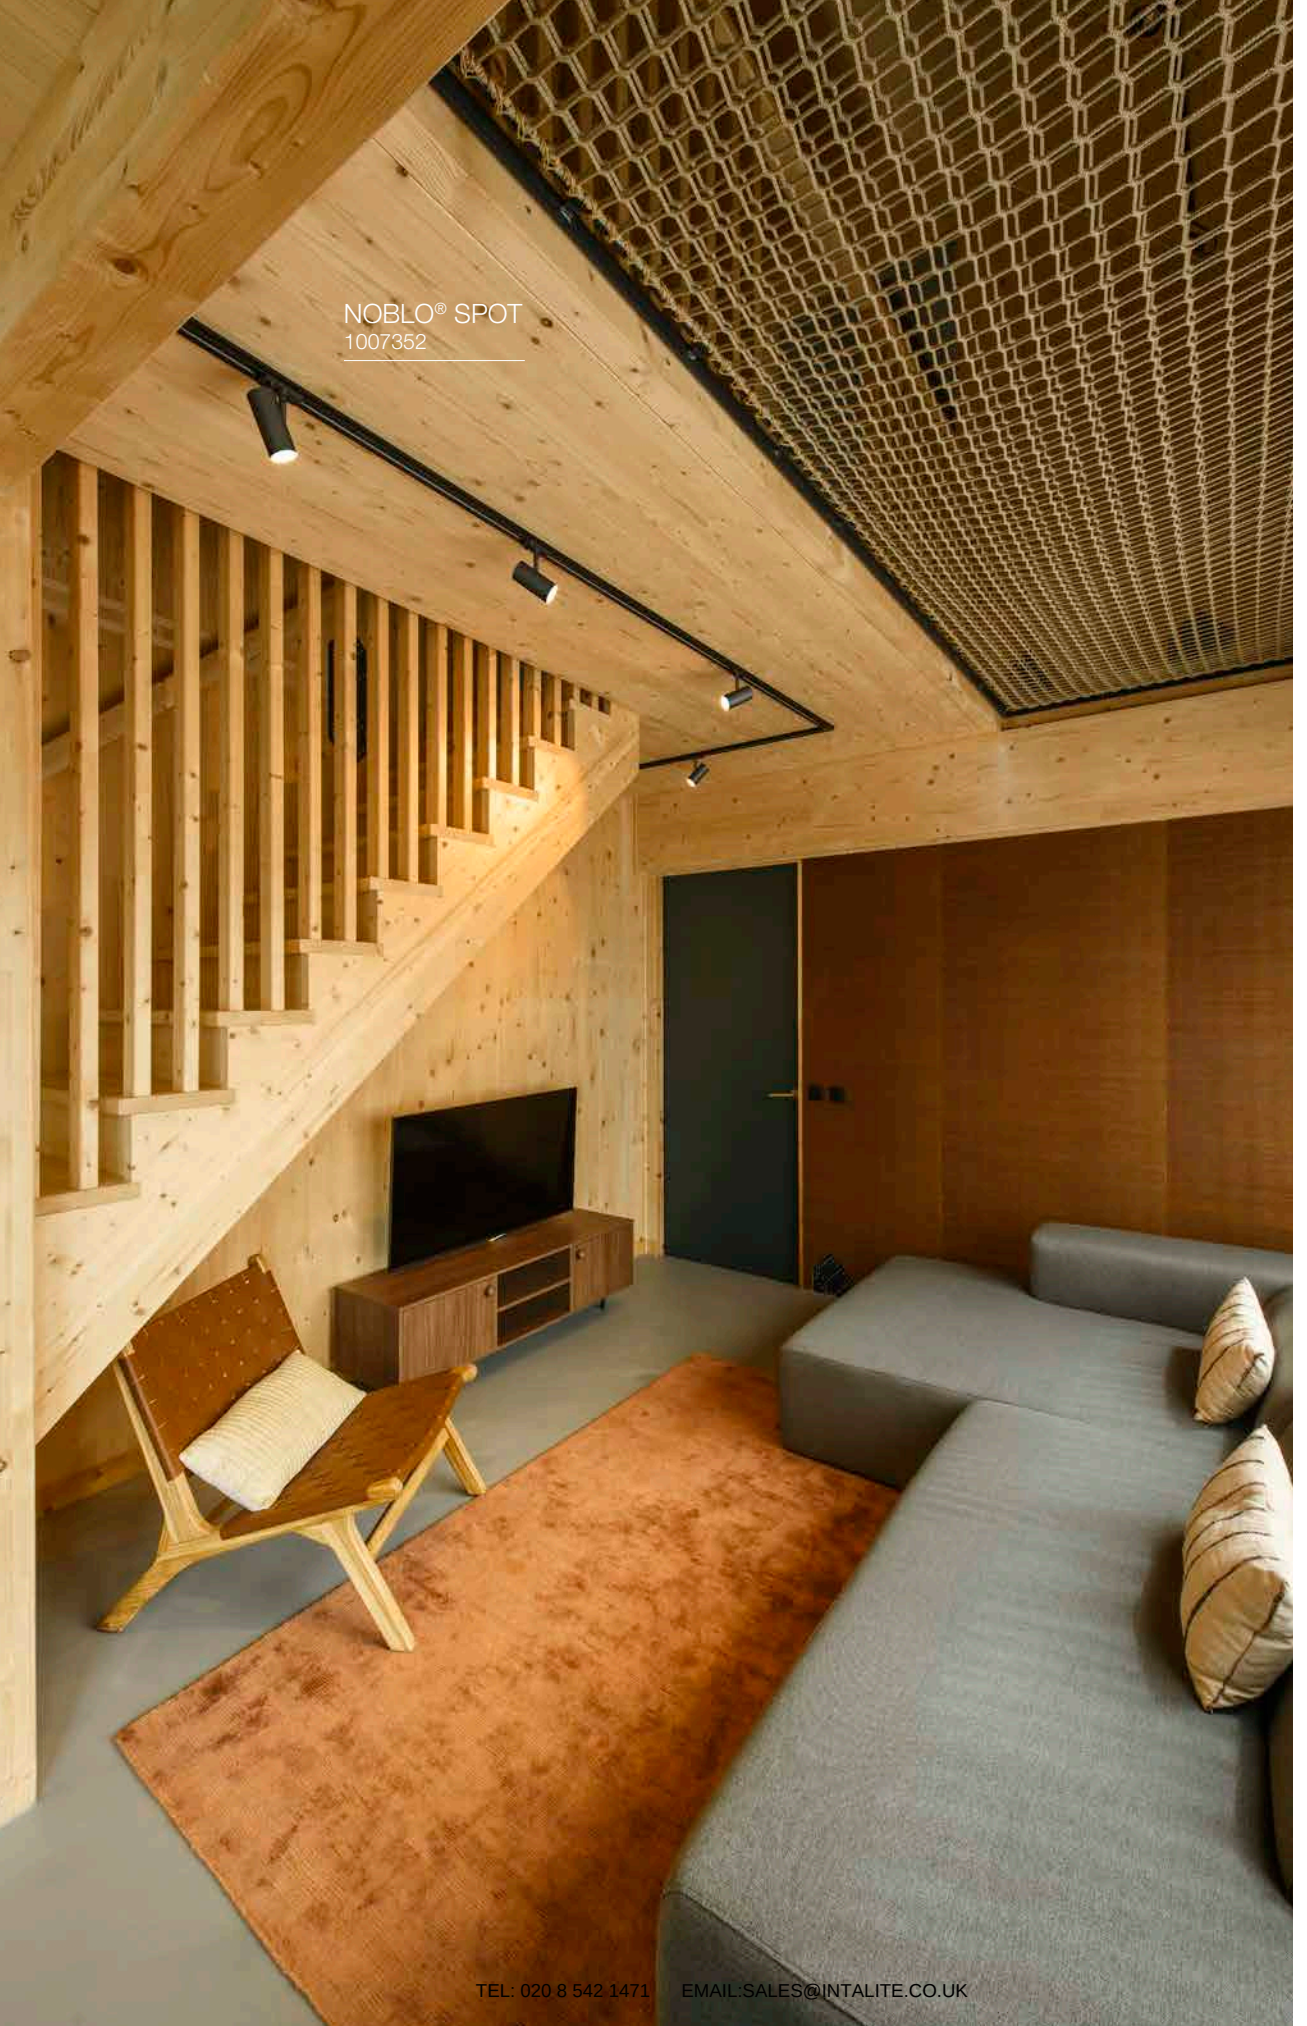
NOBLO® SPOT
1007352

INDOOR 1-PHASE SYSTEMS

QUIMERA | 533

FORCHINI M 40 TRACK | 535

LALU® SET | 537–539

PURI 2.0 TUBE | 541–543

PURI 2.0 CONE | 541–543

PURI 2.0 DOME | 541–543

PURI 2.0 | 544

PURI TRACK | 547

GRIP! | 549–553

DYSKO | 557

LIGHT EYE® | 558–561

LIGHT EYE® 2.0 | 562–563

KALU 2.0 | 565

KALU TRACK | 565

GRIP! FLAT | 567

NOBLO® SPOT | 568–569

ASTO TUBE | 570–571

PARA CONE GL | 573

PARA CONE 14 | 573

HELIA 50 TRACK | 575

PANEL TRACK | 575

ENOLA® C TRACK | 576

ENOLA® B TRACK | 577

ENOLA® B | 577

BIMA | 579

EURO SPOT TRACK | 580

ALTRA DICE TRACK | 581

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

TRACKSPOT V
1007655

INDOOR 3-PHASE SYSTEMS

SOCKET

PURI 2.0 TUBE | 607

SOCKET

PURI 2.0 CONE | 607

SOCKET

PURI 2.0 DOME | 607

SOCKET

PURI TRACK | 613

SOCKET

GRIP! | 614–617

LED

NUMINOS® | 620–627

LED

NUMINOS® ZOOM M | 628

NEW

LED

UNIVERSAL TRACKSPOT | 631

LED

ONE 40 TRACK | 633

LED

NOBLO® SPOT | 635

NEW

LED

SIGHT EVO | 637–639

NEW

LED

SIGHT PANEL | 640

LED

SIGHT EASY | 641

LED

SIGHT TRACK | 642

LED

SIGHT MOVE | 643

NEW

SOCKET

PARA CONE 14 | 645

SOCKET

PARA CONE GL | 647

SOCKET

FORCHINI M 40 TRACK | 649

SOCKET

LIGHT EYE® | 650–651

SOCKET

EURO SPOT TRACK | 562

LED

EURO CUBE | 653

NEW

LED

KALU 2.0 | 655

SOCKET

KALU TRACK | 655

SOCKET

BIMA | 656

SOCKET

BIMA | 657

LED

HELIA 50 TRACK | 657

LED

ENOLA® C TRACK | 657

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

GRAZIA IP
FLEXSTRIP
1004737

PROFILES

GRAZIA 10 SURFACE-MOUNTED PROFILE | 663



GRAZIA 10 RECESSED PROFILE | 663



GRAZIA 10 EDGE | 666



GRAZIA 20 SURFACE-MOUNTED PROFILE | 669

GRAZIA 20 RECESSED PROFILE | 669



GRAZIA 60 SURFACE-MOUNTED PROFILE | 673



GRAZIA 60 RECESSED PROFILE | 673

GRAZIA 10 ACCESSORIES | 665

GRAZIA 10 EDGE ACCESSORIES | 667

GRAZIA 20 ACCESSORIES | 670–671

GRAZIA 60 ACCESSORIES | 674–675

LED STRIPS

GRAZIA LED STRIP VALUE ADDITIONAL LIGHTING AND ACCESSORIES | 676

GRAZIA LED STRIP VALUE MAIN LIGHTING AND ACCESSORIES | 677

GRAZIA LED STRIP VALUE MAIN LIGHTING + AND ACCESSORIES | 678

GRAZIA LED STRIP CORE MAIN LIGHTING AND ACCESSORIES | 679

GRAZIA PRO MAX FLEXSTRIP AND ACCESSORIES | 680

GRAZIA PRO MAX FLEXSTRIP AND ACCESSORIES | 681

GRAZIA PRO FLEXSTRIP TUNABLE WHITE AND ACCESSORIES | 682

GRAZIA PRO FLEXSTRIP RGBW AND ACCESSORIES | 683

GRAZIA IP FLEXSTRIP | 684

GRAZIA IP FLEXSTRIP TUNABLE WHITE AND ACCESSORIES | 685

GRAZIA IP FLEXSTRIP RGBW AND ACCESSORIES | 685

MANA 40
1008205

NUMINOS®
ZOOM M
1004737

Please note: 7-digit product no. can be found from page 1061

111000
111262 116
111292 117
111382 91

112000
112221 105
112222 105
112225 105
112682 105
112692 105
112720 116
112721 116
112780 116, 117
112781 116, 117
112910 98
112911 98

113000
113140 97
113141 97
113150 97
113151 97
113160 98
113161 98
113170 99
113171 99
113262 116
113292 117
113540 90
113541 91
113550 90
113830 91
113840 91
113841 91
113930 135
113931 135
113940 135
113941 135

114000
114420 123
114421 123
114426 123
114430 123
114431 123
114436 123
114440 124
114441 124
114450 125
114451 125

115000
115510 22
115511 22
115520 22
115521 22
115530 22
115531 22
115540 23
115541 23
115550 23
115551 23

117000
117100 161
117101 161
117110 161
117111 161
117311 109
117321 158
117331 109
117351 158

132000
132020 419
132021 419
132024 419
132600 192, 193, 199, 271, 288
132601 192, 193, 199, 271
132605 271
132610 271
132611 271
132660 272
132661 272
132662 272
132670 271, 1021
132671 271, 1021
132680 271, 1021
132681 271, 1021
132690 269
132691 269

135000
135250 212, 213, 214, 215, 216, 217
135251 212, 213, 214, 215, 216, 217
135254 316, 317, 318, 319, 320, 321

138000
138981 519, 1012
138982 519, 1012
138991 519, 1012
138992 519, 1012

139000
139024 516
139026 517
139030 516
139031 516
139050 517
139051 517
139070 520
139071 520
139072 520
139080 520
139081 520
139082 520
139090 521
139091 521
139092 521

143000
143010 527
143011 527
143012 527
143020 527
143021 527
143022 527
143030 528
143031 528
143032 528
143040 528
143041 528
143042 528
143050 529
143051 529
143052 529
143060 529
143061 529
143062 529
143070 529
143071 529
143072 529
143080 529
143081 529
143082 529
143090 529
143091 529
143092 529
143100 529
143101 529
143102 529
143110 529
143111 529
143112 529
143120 271, 528, 531
143121 271, 528, 531
143124 271, 528, 531
143130 529
143131 529
143132 529
143151 529
143152 529
143160 529
143161 529
143162 529
143169 529
143170 528, 531
143171 528, 531
143172 528, 531
143221 531
143230 531
143231 531
143241 531
143251 531
143261 531
143271 531
143281 531
143350 581
143351 581
143390 547
143391 547
143392 547
143430 579
143431 579
143432 579
143440 579
143441 579
143442 579
143540 565
143541 565
143544 565
143580 575
143581 575
143811 580
143941 576
143951 576
143960 577
143961 577

145000
145100 601
145102 601
145200 601
145202 601
145300 601
145302 601
145510 602
145514 602
145520 602

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

145524 602
145530 602
145534 602
145551 605
145560 603
145564 603
145580 603
145584 603
145590 603
145594 603
145600 603
145604 603
145630 603
145634 603
145640 603
145644 603
145660 602
145664 602
145670 603
145674 603
145680 603
145684 603
145690 603
145694 603
145700 603
145710 603
145714 603
145720 603
145724 603
145730 603
145734 603
145830 603
145834 603
145990 271, 603
145994 271, 603

146000
146332 385
146682 385
146692 385

147000
147301 413
147306 413
147311 413
147316 413
147321 413
147326 413
147360 397
147361 397
147370 397
147371 397
147380 397
147381 397
147529 373

148000
148001 167
148002 167
148004 166
148005 167
148010 355
148012 359
148013 359
148016 359
148018 354
148019 357
148060 357
148070 112
148071 112
148091 357
148540 386

149000
149452 379
149471 367
149511 367
149762 333
149772 333

151000
151049 251, 561, 651
151271 368
151275 368
151282 337
151320 362
151321 362
151410 369
151411 369
151450 369
151451 369
151511 159
151531 159, 418
151591 373
151710 370
151711 370
151740 370
151741 370
151781 334
151786 334
151791 334
151796 334
151800 377
151801 377
151803 377
151810 154
151811 154
151830 417
151831 417
151840 154, 377, 417
151850 279
151851 279
151853 279
151950 120
151952 120
151960 120
151962 120

152000
152010 417
152011 417
152020 417
152021 417
152101 154
152230 657
152231 657
152232 657
152240 656
152241 656
152242 656
152330 387
152331 387
152340 381
152341 381
152360 276
152370 277
152380 109
152381 109
152430 657
152431 657
152610 655
152611 655
152750 653
152751 653
152780 653
152781 653
152960 657
152961 657

153000
153420 652
153421 652
153560 613
153561 613
153564 613
153850 652
153851 652

155000
155156 178
155236 424
155373 165
155550 163
155551 163
155570 273
155582 163, 273, 459
155583 163, 273, 459
155592 163, 273, 459

156000
156050 164
156051 164
156100 163, 273, 459
156111 163, 273, 459
156113 163, 273, 459
156122 163, 273, 459

158000
158400 276
158410 277

161000
161461 169

165000
165359 289
165390 287
165400 287
165410 287

175000
175010 589
175020 589
175030 589
175050 590
175060 591, 595
175070 591
175080 591, 595
175090 591
175100 591
175110 590
175120 590
175130 590
175140 590
175150 591
175160 591, 595
175180 591, 595
175190 591, 595
175200 591
175210 591, 595

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

181000
181530 519
181531 519
181532 519

184000
184290 288

186000
186300 519
186301 519
186302 519
186310 519
186311 519
186312 519
186330 519
186331 519
186332 519
186340 519
186341 519
186342 519
186350 519
186351 519
186352 519
186360 519
186361 519
186362 519
186640 519
186641 519
186642 519

210000
210060 288, 1021
210061 1021

227000
227195 920
227462 985
227600 993
227604 993
227680 997
227684 997
227922 779, 780

228000
228100 779
228110 779
228130 779
228332 987
228342 987
228412 975
228430 981
228434 981
228560 811
228712 765, 777, 799
228722 765, 777
228725 1022
228726 1022
228730 1022
228752 777, 799
228753 710, 771
228754 741, 745
228771 912
228775 912
228776 912
228925 777
228935 777
228945 777

229000
229020 756
229021 756
229022 756
229062 957
229071 947
229072 947
229075 947
229081 947
229085 947
229090 815
229162 780
229172 780
229230 983
229234 983
229320 979
229324 979
229374 979
229381 975
229383 975
229410 749
229411 749
229420 753
229421 753
229422 750, 751, 752, 753, 757, 774, 775
229423 755
229430 755
229431 755
229432 755
229524 864
229525 864
229531 863
229532 863
229535 863
229551 833
229554 833
229555 833
229564 865
229565 865
229574 863
229575 863
229664 931
229665 931
229702 957
229741 815
229931 946
229935 946
229961 944
229965 944
229971 945
229975 945

230000
230030 911
230034 911
230044 904
230045 904
230060 773, 783, 799
230061 783
230063 783
230066 783
230069 783
230085 905
230090 750
230355 917
230365 917
230435 772
230444 904
230445 904
230465 771
230655 905
230657 905

231000
231010 910
231012 910
231015 910
231205 899
231215 745
231225 745
231230 741, 745, 748, 749
231231 796
231233 758
231234 767, 781, 785
231235 759
231305 796
231315 934
231351 913
231355 913
231370 759
231371 759
231410 757
231411 757
231420 758
231440 759
231455 787
231457 787
231475 784
231505 799
231515 942
231541 836
231545 836
231585 934
231595 784
231815 787
231817 787
231960 808
231961 808

232000
232045 933
232075 771
232085 771
232101 931
232105 931
232115 741
232119 741
232125 741
232135 791
232145 791
232155 788
232165 788
232185 789
232195 788, 789
232285 935
232294 797
232295 797
232431 883
232435 883
232441 884
232445 884
232461 884
232465 884
232485 929
232491 929
232495 929
232497 929
232531 881, 882
232535 881, 882
232537 881, 882
232905 927
232915 927

233000
233095 937
233104 939
233105 939

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

233114 916
233115 916
233134 937
233135 937
233145 799
233165 799
233185 799
233214 916, 937, 939
233245 943
233255 943
233302 912
233427 752
233437 753
233447 748
233457 748
233500 977
233520 977
233540 983
233570 817
233580 817
233582 817
233601 953
233605 953
233615 953
233621 953
233625 953
233635 952
233639 952
233650 955
233660 955

234000
234354 809
234505 864
234515 863
234525 865
234535 833

900000
900011 815, 817

955000
955135 1022

961000
961250 1021
961270 1021

1000300
1000327 375
1000329 375
1000330 375
1000332 837
1000334 919
1000335 935
1000336 900
1000339 837
1000340 919
1000342 919
1000343 785
1000344 785
1000345 785
1000346 785
1000398 773

1000400
1000423 367
1000449 779
1000458 663
1000459 663
1000461 663
1000462 663
1000464 663
1000465 663
1000466 665, 667
1000468 665, 667
1000469 665, 667
1000473 665
1000474 665
1000476 665
1000477 665
1000479 665
1000480 665
1000487 665
1000489 665
1000497 669
1000498 669

1000500
1000524 669
1000525 669
1000533 669
1000534 669
1000535 671
1000536 671
1000540 670
1000546 670
1000549 670
1000557 671
1000558 671
1000560 670
1000561 670
1000566 670
1000567 670
1000571 670
1000574 117
1000575 117
1000576 116
1000577 116
1000579 163, 273, 459
1000580 163, 273, 459

1000600
1000634 369
1000638 362
1000639 362
1000665 774
1000666 775
1000668 340
1000669 340
1000670 340
1000682 778
1000683 778

1000700
1000702 413
1000703 413
1000704 413
1000711 576
1000712 576
1000714 106
1000715 106
1000716 106
1000717 106
1000718 106
1000719 106
1000720 106
1000721 106
1000729 377
1000730 377
1000736 799, 810
1000773 273
1000777 339
1000780 339

1000800
1000807 155
1000809 155, 279
1000810 155, 279
1000811 155, 279
1000812 155, 279
1000813 279
1000820 933
1000822 773
1000823 835
1000833 115
1000880 936
1000881 936

1000900
1000910 375
1000911 375
1000914 96
1000915 96
1000917 96
1000926 263
1000927 263
1000929 263
1000930 263
1000932 263
1000933 263
1000935 263
1000936 263
1000957 163, 273, 459

1001100
1001165 114
1001166 114
1001167 114
1001168 114
1001169 114
1001171 114
1001172 114

1001200
1001254 991
1001255 991
1001262 991
1001263 991
1001264 115
1001272 378
1001273 378
1001274 378
1001275 378
1001276 378
1001286 431
1001287 431
1001299 341

1001300
1001300 341
1001303 341
1001304 341
1001309 263
1001310 263
1001375 589
1001376 589
1001377 589
1001378 590
1001379 590
1001380 591, 595
1001381 591
1001382 591, 595
1001383 591
1001384 591
1001385 590
1001386 590

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1001387 590
1001388 590
1001389 591
1001390 591, 595
1001392 591, 595
1001393 591, 595
1001394 591
1001395 591, 595

1001400
1001400 261
1001403 261
1001406 261
1001409 261
1001468 386
1001472 386
1001488 781
1001489 781
1001490 781
1001494 781

1001500
1001510 601
1001511 601
1001512 601
1001513 602
1001514 602
1001515 602
1001516 603
1001517 602
1001518 603
1001519 603
1001520 603
1001521 603
1001522 603
1001523 603
1001524 603
1001525 603
1001526 603
1001527 603
1001528 603
1001529 603
1001530 603
1001531 605
1001532 605
1001533 605
1001534 605
1001536 605
1001537 605
1001538 605
1001539 605
1001542 271, 603
1001574 1001
1001575 1001

1001800
1001861 580

1001900
1001930 113
1001931 113
1001939 169
1001950 212, 213, 214, 215, 216, 217
1001951 316, 317, 318, 319, 320, 321
1001952 212, 213, 214, 215, 216, 217
1001963 815
1001969 913
1001970 913
1001999 767

1002000
1002000 767
1002001 767
1002002 933
1002003 135
1002004 137
1002005 137
1002006 137
1002008 135
1002010 137
1002011 137
1002012 137
1002013 137
1002015 137
1002020 426
1002021 426
1002022 426
1002023 413
1002024 413
1002025 413
1002029 397
1002030 397
1002032 879
1002033 879
1002034 879
1002035 929
1002069 911
1002070 911
1002075 427
1002076 428
1002077 428
1002098 122
1002099 122

1002100
1002100 122
1002101 122
1002102 122
1002110 577
1002111 577
1002113 577
1002118 385
1002140 381
1002151 527
1002152 527
1002153 527
1002163 192, 193, 271

1002200
1002216 159
1002218 1012
1002228 336
1002229 336
1002238 354
1002239 335
1002240 335
1002402 901

1002400
1002403 903
1002430 385
1002431 385

1002500
1002503 915
1002504 915
1002505 915
1002591 99
1002592 99
1002594 99
1002596 99

1002600
1002602 516
1002603 516
1002604 516
1002607 385
1002608 385
1002631 593
1002632 593
1002633 593
1002634 593
1002635 593
1002636 593
1002637 594
1002638 595
1002639 594
1002640 595
1002641 595, 599
1002642 595, 599
1002643 595
1002644 595
1002645 595
1002646 595
1002655 595
1002656 595
1002657 591, 595
1002658 591, 595
1002659 595, 599
1002660 595, 599
1002691 519, 1012
1002692 519, 1012
1002693 519, 1012
1002694 523
1002695 523
1002696 523
1002697 519
1002698 519
1002699 519

1002700
1002700 519
1002701 519
1002702 519
1002703 519
1002704 519
1002705 519

1002800
1002842 363
1002844 363
1002845 529, 591, 595, 603
1002853 887, 889, 891, 893, 894, 933
1002855 379
1002860 385
1002861 523
1002862 523
1002863 523
1002867 939
1002868 921
1002869 921
1002871 801
1002884 939

1002900
1002903 941
1002904 941
1002905 937
1002909 237
1002910 237
1002911 239
1002912 239
1002913 241
1002914 241
1002915 331
1002917 331

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1002918 331
1002922 121
1002928 363
1002929 363
1002940 429
1002941 429
1002949 283
1002950 283
1002951 283
1002952 860
1002953 860
1002954 861
1002955 861
1002956 734
1002957 734
1002958 735
1002959 735
1002967 168
1002968 168
1002979 119
1002980 119
1002981 119
1002982 121
1002983 121
1002984 121
1002989 925
1002990 925
1002991 795
1002992 795

1003000
1003001 798
1003004 247
1003005 247
1003006 247
1003007 247
1003008 101
1003009 101
1003010 101
1003011 103
1003012 103
1003013 103
1003014 423
1003015 423
1003016 423
1003017 421
1003018 421
1003019 421

1003100
1003104 677, 679, 1014
1003105 678, 1014
1003106 682

1003300
1003316 371

1003400
1003416 893
1003417 893
1003418 894
1003419 894
1003420 832
1003421 832
1003422 889
1003423 889
1003424 891
1003425 891
1003426 831
1003427 831
1003437 893
1003438 894
1003440 889
1003441 891
1003442 831
1003443 248
1003444 249
1003447 808
1003448 808
1003449 945
1003450 945
1003451 945
1003452 945
1003453 911
1003454 911
1003455 382
1003456 383
1003457 382
1003458 383
1003459 383
1003460 383
1003467 365
1003468 365
1003479 830, 831, 832

1003500
1003506 339
1003507 339
1003508 339
1003535 761
1003536 760
1003537 761
1003538 761
1003539 931

1004000
1004074 620
1004098 308

1004100
1004122 138
1004146 200, 202
1004170 622
1004194 310

1004200
1004218 140
1004266 624
1004290 312

1004300
1004314 142
1004338 204
1004362 620
1004386 308

1004400
1004410 138
1004434 200, 202
1004458 622
1004482 310

1004500
1004506 140
1004554 624
1004578 312

1004600
1004602 142
1004626 204
1004649 939
1004650 885
1004651 885
1004653 942
1004660 350
1004661 350
1004662 350
1004663 350
1004666 153
1004667 153
1004668 107
1004669 107
1004670 353
1004671 353
1004672 266
1004673 266
1004674 271
1004675 271
1004677 834
1004678 909
1004679 909
1004680 765
1004681 765
1004682 375
1004684 591, 595
1004685 591, 595
1004686 643
1004687 643
1004688 643
1004689 643
1004690 643
1004691 643
1004692 643
1004693 643
1004694 101
1004695 101
1004696 101
1004697 103
1004698 103
1004699 103

1004700
1004700 423
1004701 423
1004702 423
1004705 421
1004706 380
1004720 680
1004721 680
1004722 681
1004723 681
1004725 682
1004726 685
1004727 683
1004730 332
1004731 332
1004732 355
1004734 684
1004735 684
1004736 684
1004737 685
1004740 373
1004741 373
1004744 271
1004745 271
1004747 907
1004748 907
1004749 737
1004750 737
1004751 737
1004759 237
1004760 237
1004761 237
1004762 237
1004763 239
1004764 239

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1004765 240
1004766 240
1004767 240
1004768 240
1004772 633
1004773 273, 459
1004774 163, 273, 459
1004775 163, 273, 459
1004783 529
1004784 529
1004785 529
1004786 488, 492
1004787 488, 492
1004788 488, 492
1004789 488, 492

1004800
1004889 666
1004890 666
1004893 667
1004894 667
1004895 667
1004896 673
1004897 673
1004898 673
1004899 673

1004900
1004900 674
1004901 674
1004902 675
1004903 675
1004904 675
1004905 673
1004906 673
1004907 673
1004908 673
1004909 674
1004910 674
1004911 675
1004912 674
1004913 674
1004914 674
1004915 674
1004916 674
1004917 674
1004932 671
1004933 575
1004934 575
1004935 575
1004936 575
1004937 593
1004938 593
1004939 591, 595
1004940 591, 595
1004957 939
1004969 350
1004971 337

1005000
1005075 1002
1005076 1002
1005077 1002
1005078 1002
1005079 1002
1005080 1002
1005081 1002
1005082 1002
1005083 1002
1005087 425
1005088 425
1005089 946
1005090 946

1005100
1005125 883
1005126 883
1005148 879
1005149 879
1005150 879
1005151 881
1005153 881
1005154 881
1005155 881
1005156 881
1005157 881
1005177 237
1005178 240

1005200
1005201 901
1005202 903
1005205 895
1005206 895
1005207 895
1005214 288
1005215 288
1005216 288
1005217 288
1005218 288
1005248 121
1005262 895
1005263 895
1005265 1006
1005268 1007
1005269 1001
1005271 1001
1005272 1001
1005273 1002
1005274 1003
1005275 1003
1005276 1003
1005277 1003
1005278 833, 837, 863, 865, 983, 1003
1005279 1003
1005280 1003
1005281 1003
1005282 1003
1005283 1003
1005284 1001
1005285 1001
1005286 1000
1005287 1000
1005288 1000
1005289 1006
1005297 1003
1005298 1003
1005299 1003

1005300
1005302 1004
1005303 1004
1005305 1007
1005307 1006
1005310 1007
1005390 465
1005391 465
1005392 465
1005394 465
1005395 257
1005396 257
1005397 642
1005399 642

1005400
1005400 642
1005401 642
1005402 642
1005435 98
1005436 98
1005439 739
1005440 739
1005441 798
1005442 747
1005443 908
1005444 817
1005445 817

1005600
1005612 25, 35, 45, 486, 490
1005613 25, 35, 45, 486, 490
1005614 25, 35, 45, 486, 490
1005615 25, 35, 45, 486, 490
1005687 144

1005700
1005705 206
1005723 626
1005741 314
1005759 144
1005777 206
1005795 626

1006000
1006083 314

1006100
1006104 995
1006105 995
1006106 975
1006108 628
1006114 628
1006121 97
1006122 97
1006123 431
1006124 431
1006125 431
1006126 431
1006127 431
1006128 431
1006133 682, 685
1006134 685
1006136 58
1006138 58
1006140 58
1006142 58
1006144 58
1006146 58
1006148 58
1006150 58
1006152 58
1006154 58
1006155 573
1006156 573
1006157 647
1006158 647
1006159 647
1006160 647
1006161 380
1006162 380
1006167 138, 308, 620
1006168 140, 310, 622
1006169 142, 312, 624

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006170 144, 314, 626
1006171 989
1006172 989
1006173 989
1006174 989
1006175 989
1006176 989
1006178 898
1006179 898
1006180 743
1006181 743
1006182 743
1006183 899
1006184 745
1006185 243
1006188 243
1006189 243
1006190 243

1006300
1006307 353
1006308 353
1006314 907
1006316 829
1006319 349
1006321 1002
1006327 830
1006328 887
1006329 887
1006336 1014
1006343 465
1006344 465
1006345 257
1006346 751
1006347 751
1006348 1024
1006377 271
1006378 271
1006379 723
1006380 723
1006381 723
1006382 722, 723
1006383 716
1006384 719
1006385 718
1006386 721
1006387 717
1006388 720
1006389 717
1006390 719
1006391 718
1006392 721
1006393 717
1006394 720
1006395 247
1006396 247
1006397 247
1006398 247
1006399 247

1006400
1006400 247
1006402 247
1006403 247
1006404 852
1006405 852
1006406 951
1006407 951
1006410 288
1006423 411
1006424 411
1006425 411
1006426 411
1006427 411
1006428 411
1006429 411
1006430 411
1006431 253
1006433 253
1006434 253
1006435 253
1006436 253
1006437 253
1006438 253
1006439 157
1006440 157
1006441 347
1006442 347
1006443 347
1006444 347
1006445 570
1006446 570
1006449 157, 253, 347, 411, 571
1006450 157, 253, 347, 411, 571
1006451 157, 253, 347, 411, 571
1006452 1012
1006453 1022

1006500
1006511 597
1006512 597
1006513 597
1006514 597
1006515 597
1006516 597
1006517 597
1006518 597
1006519 599
1006520 599
1006521 599
1006522 599
1006523 599
1006524 599
1006525 599
1006526 599
1006527 599
1006528 599
1006529 599
1006530 599
1006531 599
1006532 599
1006533 599
1006534 599
1006535 599
1006536 599
1006537 599
1006538 599
1006539 599
1006540 599
1006541 469
1006542 469
1006543 469
1006544 469
1006545 469
1006546 469
1006547 469
1006548 469
1006549 473
1006550 473
1006551 473
1006552 473
1006553 473
1006554 473
1006555 473
1006556 473
1006557 477
1006558 477
1006559 477
1006560 477
1006561 477
1006562 477
1006563 477
1006564 477
1006565 470, 474, 478
1006566 470, 474, 478
1006567 470, 474, 478
1006568 470, 474, 478
1006569 471, 475, 479
1006570 471, 475, 479
1006571 470, 474, 478
1006572 470, 474, 478
1006573 471, 475, 479
1006574 471, 475, 479
1006575 470
1006576 470
1006577 470
1006578 470
1006579 470
1006580 470
1006581 474
1006582 474
1006583 474
1006584 474
1006585 474
1006586 474
1006587 478
1006588 478
1006589 478
1006590 478
1006591 478
1006592 478
1006593 471
1006594 471
1006595 475
1006596 475
1006597 479
1006598 479
1006599 471, 475, 479

1006600
1006600 471, 475, 479
1006601 471, 475, 479
1006602 471, 475, 475
1006603 471, 475, 479
1006604 471, 475, 479
1006605 471, 475, 479
1006606 471, 475, 479
1006607 471, 475, 479
1006608 471, 475, 479
1006609 471, 475
1006610 479
1006611 471
1006612 471
1006613 471, 475, 479
1006614 471, 475, 479
1006615 495
1006616 495
1006617 495
1006618 495
1006619 495
1006620 495
1006621 497
1006622 497

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1006623 497
1006624 497
1006625 497
1006626 497
1006627 495
1006628 495
1006629 495
1006630 495
1006631 495
1006632 495
1006633 497
1006634 497
1006635 497
1006636 497
1006637 497
1006638 497
1006639 499
1006640 499
1006641 499
1006642 499
1006643 499
1006644 499
1006645 499
1006646 499
1006647 499
1006648 499
1006649 499
1006650 499
1006651 486

1006700
1006705 488
1006759 490
1006813 492

1007000
1007091 15
1007092 15
1007093 15

1007100
1007142 851
1007143 851
1007144 851
1007145 851
1007184 15
1007185 15
1007186 15
1007188 475, 479
1007189 475, 479
1007190 157, 253, 347, 411, 571
1007191 15
1007194 15
1007195 961
1007196 961
1007197 961
1007198 961

1007200
1007200 333
1007201 332
1007202 333
1007207 901
1007225 1016
1007226 1016
1007227 1017
1007228 1016
1007229 1018
1007230 1002
1007231 1002
1007232 714
1007233 714
1007234 715
1007235 715
1007236 849
1007237 710
1007238 967, 970, 971
1007240 967, 970, 971
1007241 970
1007242 971
1007243 967
1007244 967
1007245 967, 969
1007250 1013
1007251 1014
1007252 1014
1007253 1014
1007254 1015
1007255 1015
1007256 1015
1007257 1015
1007281 847
1007282 847
1007283 1021
1007284 212, 316
1007285 212, 316
1007286 216, 320
1007287 216, 320
1007288 212, 316
1007289 212, 316
1007290 216, 320
1007291 216, 320
1007292 213, 317
1007293 213, 317
1007294 217, 321
1007295 217, 321
1007296 213, 317
1007297 213, 317
1007298 217, 321
1007299 217, 321

1007300
1007300 214, 318
1007301 214, 318
1007302 218, 322
1007303 218, 322
1007304 214, 318
1007305 214, 318
1007306 218, 322
1007307 218, 322
1007308 215, 319
1007309 215, 319
1007310 219, 323
1007311 219, 323
1007312 215, 319
1007313 215, 319
1007314 219, 323
1007315 219, 323
1007316 220, 324
1007317 220, 324
1007318 220, 324
1007319 220, 324
1007320 220, 324
1007321 220, 324
1007322 221, 325
1007323 221, 325
1007324 221, 325
1007325 221, 325
1007326 221, 325
1007327 221, 325
1007328 80
1007329 80
1007330 80
1007331 80
1007332 80
1007333 80
1007334 80
1007335 80
1007336 81
1007337 81
1007338 81
1007339 81
1007340 82
1007341 82
1007342 82
1007343 82
1007344 82
1007345 81
1007346 81
1007347 81
1007348 81
1007349 82
1007350 82
1007351 82
1007352 569
1007353 569
1007354 569
1007355 635
1007356 635
1007357 443, 695
1007358 443, 695
1007359 443, 695
1007360 443, 695
1007361 443, 695
1007362 443, 695
1007368 73
1007369 73
1007370 73
1007371 73
1007372 73
1007373 73
1007374 75
1007375 75
1007376 75
1007377 75
1007378 75
1007379 75
1007381 79
1007382 79
1007383 79
1007384 79
1007385 63
1007386 63
1007387 63
1007388 63
1007389 63
1007390 63
1007391 63
1007392 63
1007393 63
1007394 63
1007395 63
1007396 63
1007397 63
1007398 63
1007399 63

1007400
1007400 63
1007401 65
1007402 65
1007403 65
1007404 65
1007405 65
1007406 65
1007407 65

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007408 65
1007409 85
1007410 85
1007411 85
1007412 85
1007421 79
1007422 79
1007423 67
1007424 67
1007425 67
1007426 67
1007427 67
1007428 67
1007429 67
1007430 67
1007431 79
1007432 79
1007433 69
1007434 69
1007435 69
1007436 69
1007437 69
1007438 69
1007439 69
1007440 69
1007441 69
1007442 69
1007443 85
1007444 85
1007445 85
1007446 85
1007447 85
1007448 85
1007449 82
1007450 82
1007451 81
1007452 85
1007453 81
1007454 85
1007455 1000
1007458 843
1007459 708
1007460 708
1007461 828
1007462 463
1007463 463
1007464 463
1007465 463
1007466 463
1007467 463
1007468 257
1007469 257
1007470 257
1007471 257
1007472 257
1007473 257
1007488 82
1007489 82

1007500

1007511 843
1007512 709
1007513 709
1007551 21
1007552 21
1007559 21
1007560 21
1007567 21
1007568 21
1007580 707
1007581 844
1007582 827
1007583 707
1007584 707
1007585 844
1007586 827
1007587 707
1007588 245
1007589 245
1007590 405
1007591 405
1007592 405
1007593 405
1007594 345
1007595 345
1007596 245
1007597 245
1007598 245
1007599 245

1007600

1007608 407
1007609 407
1007610 407
1007611 407
1007612 297
1007614 297
1007615 297
1007616 297
1007618 297
1007619 297
1007624 75
1007625 75
1007626 75
1007627 75
1007628 75
1007629 75
1007630 83
1007631 83
1007632 83
1007633 83
1007634 83
1007635 83
1007636 83
1007637 83
1007638 569
1007639 569
1007640 569
1007641 569
1007642 569
1007643 569
1007644 635
1007645 635
1007646 635
1007647 635
1007648 635
1007649 635
1007651 701
1007652 701
1007653 857
1007654 631
1007655 631
1007656 631
1007657 631
1007661 235
1007662 235
1007663 235
1007664 235
1007665 235
1007666 235
1007667 846
1007668 846
1007669 711
1007670 711
1007671 235
1007672 235
1007673 568
1007674 568
1007680 963
1007681 963
1007682 963, 964, 965
1007684 963, 964, 965
1007685 963, 964, 965
1007692 445, 697
1007693 445, 697
1007694 445, 697
1007695 445, 697
1007696 445, 697
1007697 445, 697
1007698 445, 697

1007700

1007701 231
1007702 231
1007703 231
1007746 235, 239

1007800

1007806 845
1007807 845
1007808 845
1007809 845
1007810 964
1007811 965
1007816 594
1007817 594
1007818 594
1007819 594
1007820 594
1007821 594
1007827 1022
1007855 231
1007856 231
1007857 231
1007858 131, 189, 301, 437
1007859 131, 189, 301, 437
1007860 131, 189, 301, 437
1007868 819
1007869 819
1007874 471, 475, 479
1007875 471, 475, 479
1007876 249
1007877 249
1007878 249
1007879 248
1007880 248
1007881 248
1007891 235, 239
1007892 1020

1007900

1007911 849
1007912 849
1007913 850
1007914 850
1007916 848
1007917 848
1007918 848
1007919 848
1007926 529
1007927 529
1007928 529
1007931 729
1007932 729
1007933 772
1007934 817

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1007936 459
1007937 457
1007938 457
1007939 457
1007942 811
1007943 811
1007944 810
1007945 460
1007946 460
1007948 460
1007949 821
1007950 821
1007954 773
1007955 813
1007956 812
1007957 813
1007958 814
1007959 815
1007960 813
1007961 441
1007962 441
1007963 441
1007964 441
1007965 441
1007966 441
1007967 461
1007969 769
1007970 769
1007971 769
1007972 811
1007973 823
1007974 823
1007977 807
1007978 807
1007979 807
1007980 447, 699
1007981 821
1007982 451
1007983 451
1007997 1020

1008000

1008000 991
1008001 991
1008002 233
1008003 233
1008004 233
1008005 87
1008006 87
1008007 87
1008008 87
1008009 87
1008010 854
1008011 854
1008012 855
1008013 855
1008014 702
1008015 702
1008016 703
1008017 703
1008023 131, 189, 301, 437
1008024 406
1008025 407
1008026 407
1008029 445, 697
1008030 813
1008032 187
1008033 187
1008034 187
1008035 295
1008036 295
1008037 295
1008041 533
1008042 533
1008043 533
1008045 191
1008047 191
1008052 573
1008053 573
1008054 573
1008055 645
1008056 645
1008057 645
1008058 573
1008059 573
1008060 573
1008061 645
1008062 645
1008063 645
1008065 15
1008067 15
1008068 15
1008069 15
1008070 15
1008071 371
1008081 329
1008082 329
1008083 329
1008084 328
1008085 328
1008086 328
1008095 15
1008096 15
1008097 15
1008098 15
1008099 131

1008100

1008100 131
1008101 131
1008102 131
1008103 131
1008104 301
1008105 301
1008106 301
1008107 301
1008108 301
1008114 189
1008115 189
1008116 189
1008117 189
1008118 189
1008119 131, 189, 301, 437
1008123 302
1008124 303
1008125 128
1008126 128
1008127 129
1008128 129
1008129 281
1008130 281
1008131 281
1008132 281
1008133 279
1008134 279
1008135 279
1008136 193
1008137 193
1008138 192
1008139 192
1008140 138, 308, 620
1008141 140, 310, 622
1008142 142, 312, 624
1008143 144, 314, 626
1008144 138, 308, 620
1008145 140, 310, 622
1008146 142, 312, 624
1008147 144, 314, 626
1008148 529
1008149 529
1008150 529
1008151 1004
1008152 1006
1008153 1003
1008154 1001
1008155 1005
1008156 1007
1008157 1007
1008158 1000
1008159 1004
1008160 1005
1008161 1005
1008162 1006
1008163 1005
1008164 1005
1008165 1005
1008168 561
1008169 561
1008170 650
1008171 650
1008172 251
1008173 251
1008174 561
1008175 561
1008176 651
1008177 651
1008178 251
1008179 251
1008180 558
1008181 558
1008182 559
1008183 559
1008184 651
1008185 651
1008186 251, 561, 651
1008187 251, 561, 651
1008188 251, 561, 651
1008189 251, 561, 651
1008190 251, 561, 651
1008191 251, 561, 651
1008192 251, 561, 651
1008193 705
1008194 705
1008195 705
1008196 705
1008197 844
1008198 844
1008199 827

1008200

1008200 827
1008201 351
1008202 351
1008203 351
1008204 351
1008205 351
1008206 351
1008213 395, 545, 611
1008214 395, 545, 611
1008215 395, 545, 611
1008216 395, 545, 611
1008217 395, 545, 611
1008218 395, 545, 611
1008219 395, 545, 611
1008220 395, 545, 611
1008221 395, 545, 611

1008222 395, 545, 611
1008223 395, 545, 611
1008224 395, 545, 611
1008225 395, 545, 611
1008226 395, 545, 611
1008227 395, 545, 611
1008242 541
1008243 541
1008244 541
1008245 541
1008246 541
1008247 541
1008248 541
1008249 541
1008250 541
1008251 541
1008252 541
1008253 541
1008254 543
1008255 543
1008256 543
1008257 543
1008258 543
1008259 543
1008260 543
1008261 543
1008262 543
1008263 543
1008264 543
1008265 543
1008266 607
1008267 607
1008268 607
1008269 607
1008270 607
1008271 607
1008272 607
1008273 607
1008274 607
1008275 609
1008276 609
1008277 609
1008278 609
1008279 609
1008280 609
1008281 609
1008282 609
1008283 609
1008284 389
1008285 389
1008286 389
1008287 389
1008288 391
1008289 391
1008290 391
1008291 391
1008292 393
1008293 393
1008294 393
1008295 393
1008296 389
1008297 389
1008298 389
1008299 389

1008300

1008300 391
1008301 391
1008302 391
1008303 391
1008304 393
1008305 393
1008306 393
1008307 393
1008308 389
1008309 389
1008310 389
1008311 389
1008312 391
1008313 391
1008314 391
1008315 391
1008316 393
1008317 393
1008318 393
1008319 393
1008320 389
1008321 389
1008322 389
1008323 389
1008324 391
1008325 391
1008326 391
1008327 391
1008328 393
1008329 393
1008330 393
1008331 393
1008332 389
1008333 389
1008334 389
1008335 389
1008336 391
1008337 391
1008338 391
1008339 391
1008340 393
1008341 393
1008342 393
1008343 393
1008344 389
1008345 389
1008346 389
1008347 389
1008348 391
1008349 391
1008350 391
1008351 391
1008352 393
1008353 393
1008354 393
1008355 393
1008361 388
1008362 388
1008363 388
1008364 388
1008365 390
1008366 390
1008367 390
1008368 390
1008369 392
1008370 392
1008371 392
1008372 392
1008374 1006
1008375 1001
1008376 395, 545, 611
1008377 395, 545, 611
1008378 395, 545, 611
1008379 676
1008380 676
1008381 676
1008382 471, 475, 479
1008383 471, 475, 479
1008384 853
1008385 731
1008386 693
1008387 693
1008388 693
1008389 693
1008390 549
1008392 549
1008393 549
1008394 549
1008395 549
1008397 549
1008398 549
1008399 549

1008400

1008400 549
1008402 549
1008403 549
1008404 549
1008405 506
1008407 506
1008408 506
1008409 506
1008410 506
1008412 506
1008413 506
1008414 506
1008415 507
1008417 507
1008418 507
1008419 507
1008420 551
1008422 551
1008423 551
1008424 551
1008425 551
1008427 551
1008428 551
1008429 551
1008430 551
1008432 551
1008433 551
1008434 551
1008435 614
1008436 614
1008437 614
1008438 614
1008439 614
1008440 614
1008441 615
1008442 615
1008443 615
1008444 615
1008445 615
1008446 615
1008447 553
1008449 553
1008450 553
1008451 553
1008452 617
1008453 617
1008454 509
1008456 509
1008457 509
1008458 509
1008459 509
1008461 509
1008462 509
1008463 509
1008464 509
1008466 509

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008467 509
1008468 509
1008469 553
1008471 553
1008472 553
1008473 553
1008474 722
1008475 722
1008476 691
1008477 691
1008478 804
1008479 804
1008480 805
1008481 955
1008482 399, 401, 569, 635
1008483 399, 401, 569, 635
1008484 399, 401, 569, 635
1008485 399, 401, 569, 635
1008486 399, 401, 569, 635
1008487 399, 401, 569, 635
1008488 111, 147, 209, 506, 507, 509
1008489 111, 147, 209, 506, 507, 509
1008490 111, 147, 209, 506, 507, 509
1008491 111, 147, 209, 506, 507, 509
1008492 148, 149, 555, 614, 615, 617
1008493 148, 149, 555, 614, 615, 617
1008494 148, 149, 555, 614, 615, 617
1008495 148, 149, 555, 614, 615, 617
1008496 151, 555, 617
1008497 151, 555, 617
1008498 151, 555, 617
1008499 151, 555, 617

1008500

1008500 199
1008501 199
1008502 199
1008503 199
1008504 199
1008505 199
1008506 199
1008507 199
1008508 199
1008509 77
1008510 77
1008511 77
1008512 77
1008513 77
1008514 77
1008515 677
1008516 677
1008517 677
1008518 678
1008519 678
1008520 678
1008521 679
1008522 679
1008523 679
1008524 679
1008533 195
1008534 195
1008535 284
1008536 285
1008537 285
1008538 284
1008539 535
1008540 535
1008541 649
1008542 923
1008543 794
1008544 794
1008545 326
1008546 326
1008547 326
1008548 326
1008549 326
1008550 326
1008551 327
1008552 327
1008553 327
1008554 327
1008555 327
1008556 327
1008567 18
1008568 18
1008569 18
1008570 18
1008571 19
1008572 19
1008573 19
1008574 19
1008577 171
1008578 171
1008579 171
1008580 171
1008581 175
1008582 175
1008583 175
1008584 175
1008585 177
1008586 177
1008587 177
1008588 177
1008589 210
1008590 210
1008591 211
1008592 211
1008593 211
1008594 211
1008595 211
1008596 211

1008600

1008612 353
1008613 353
1008614 353
1008615 267
1008616 267
1008617 267
1008618 153
1008619 153
1008620 153
1008629 92
1008630 94
1008631 92
1008632 94
1008633 93
1008634 95
1008635 93
1008636 95
1008641 1004
1008642 1004
1008643 1004
1008644 1004
1008645 269, 1007
1008646 1007
1008647 1000
1008648 1000
1008649 1000
1008650 1000
1008651 1013
1008652 1013
1008653 1013
1008654 1013
1008655 1013
1008656 1015
1008657 1015
1008658 1016
1008659 1016
1008660 1017
1008661 1017
1008662 1017
1008663 1017
1008664 1017
1008665 1018
1008666 1018
1008667 1018
1008668 1018
1008669 1018
1008670 1019
1008671 1019
1008672 1019
1008673 1019
1008674 1019
1008675 1012
1008676 641
1008677 641
1008678 641
1008679 641
1008699 1016

1008700

1008701 93, 95
1008702 93, 95
1008703 399
1008704 399
1008705 399
1008706 399
1008707 399
1008708 399
1008709 401
1008710 401
1008711 401
1008712 401
1008713 401
1008714 401
1008715 401
1008716 401
1008717 401
1008718 401
1008719 401
1008720 401
1008721 926
1008722 926
1008723 926
1008724 926
1008725 793
1008726 793
1008727 793
1008728 641
1008729 641
1008730 641
1008731 641
1008740 439
1008741 439
1008742 439
1008743 436
1008744 436
1008745 436
1008746 436
1008747 436

1008800

1008838 726
1008839 727
1008841 985

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1008842 985
1008843 985

1008900
1008902 544
1008903 544
1008904 544
1008917 173
1008918 173
1008919 173
1008920 173
1008921 176
1008922 176
1008923 176
1008924 176
1008925 171
1008926 173
1008927 175
1008928 177
1008941 406
1008943 407
1008944 407
1008945 501
1008946 501
1008947 501
1008948 501
1008949 501
1008950 501
1008951 501
1008952 501
1008953 501
1008954 501
1008955 501
1008956 501
1008957 501
1008958 501
1008959 501
1008960 501
1008961 501
1008962 501
1008963 501
1008964 501
1008965 503
1008966 503
1008967 503
1008968 503
1008969 503
1008970 503
1008971 503
1008972 503
1008973 503
1008974 503
1008975 503
1008976 503
1008977 503
1008978 503
1008979 503
1008980 503
1008981 505
1008982 505
1008983 505
1008984 505
1008985 505
1008986 505
1008987 505
1008988 505
1008989 505
1008990 505
1008991 505
1008992 505
1008993 501, 503
1008994 501, 503
1008995 501, 503
1008996 501, 503
1008997 503, 505
1008998 503, 505
1008999 503, 505

1009000
1009000 503, 505
1009001 471, 475, 479
1009002 76
1009003 76
1009004 76
1009005 76
1009012 471, 475, 479
1009014 265
1009015 265
1009016 485
1009017 485
1009018 485
1009019 485
1009020 71
1009021 71
1009022 71
1009023 71
1009024 507
1009025 507
1009026 507
1009027 507
1009028 507
1009029 507
1009030 507
1009031 507
1009032 507
1009033 507
1009034 507
1009035 507
1009036 147
1009037 147
1009038 147
1009039 147
1009040 147
1009041 147
1009042 147
1009043 147
1009044 147
1009045 147
1009046 147
1009047 147
1009048 147
1009049 147
1009050 147
1009051 147
1009052 111
1009053 111
1009054 111
1009055 111
1009056 111
1009057 111
1009058 111
1009059 111
1009060 209
1009061 209
1009062 209
1009063 209
1009064 209
1009065 209
1009066 209
1009067 209
1009068 148
1009069 148
1009070 148
1009071 148
1009072 148
1009073 148
1009074 148
1009075 148
1009076 149
1009077 149
1009078 149
1009079 149
1009080 149
1009081 149
1009082 149
1009083 149
1009084 111
1009085 111
1009086 111
1009087 111
1009088 111
1009089 111
1009090 111
1009091 111
1009092 151
1009093 151
1009094 151
1009095 151
1009096 151
1009097 151
1009098 151
1009099 151

1009100
1009100 415
1009101 415
1009102 265, 415, 485
1009103 265
1009104 265
1009107 809
1009108 809
1009131 567
1009132 567
1009133 567
1009134 567
1009135 199
1009136 199
1009137 199
1009138 573
1009139 645
1009140 573
1009141 645
1009142 449
1009143 449
1009144 305
1009145 305
1009146 640
1009147 640
1009148 640
1009149 640
1009150 640
1009151 640
1009152 640
1009153 640
1009168 969
1009169 969
1009170 973
1009171 973

1009200
1009271 24

1009300
1009325 34
1009379 46

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1009400
1009433 26
1009487 36

1009500
1009541 48
1009595 28

1009600
1009649 38

1009700
1009703 50
1009757 30
1009810 40

1009800
1009864 52

1009900
1009918 32
1009972 42

1010000
1010026 44
1010099 571

1010100
1010100 571
1010101 858
1010102 858
1010103 733
1010104 733
1010105 733
1010106 733
1010107 859
1010108 859
1010125 24, 34, 44
1010126 24, 34, 44
1010127 26, 36, 46
1010128 26, 36, 46
1010129 28, 38, 48
1010130 28, 38, 48
1010131 30, 40, 50
1010132 30, 40, 50
1010133 32, 42, 52
1010134 32, 42, 52
1010135 403, 480, 565, 655
1010136 403, 480, 565, 655
1010138 403, 480, 565, 655
1010139 403, 480, 565, 655
1010140 403, 480, 565, 655
1010141 403, 480, 565, 655
1010142 403, 480, 565, 655
1010143 403, 480, 565, 655
1010144 637
1010145 637
1010146 637
1010147 637
1010148 637
1010149 637
1010150 637
1010151 637
1010152 637
1010153 637
1010154 637
1010155 637
1010156 639
1010157 639
1010158 639
1010159 639
1010161 873
1010162 873
1010163 873
1010164 873
1010165 874
1010166 874
1010167 874
1010168 874
1010169 875
1010170 875
1010171 875
1010172 875
1010173 877
1010174 877
1010175 877
1010176 877
1010177 867
1010178 867
1010179 867
1010180 867
1010181 869
1010182 869
1010183 869
1010184 869
1010185 869
1010186 869
1010187 870
1010188 870
1010189 871
1010190 871
1010191 871
1010192 871
1010193 299
1010194 299
1010195 908
1010196 908
1010197 763
1010198 763
1010199 763

1010200
1010200 763
1010201 763
1010202 713
1010203 713
1010204 713
1010205 713
1010206 455
1010207 455
1010208 454
1010209 454
1010210 409
1010211 409
1010212 409
1010213 409
1010214 409
1010215 409
1010222 565
1010224 565
1010226 565
1010228 565
1010230 565
1010232 565
1010234 655
1010236 655
1010237 655
1010239 655
1010240 655
1010242 655
1010243 655
1010245 655
1010246 655
1010248 655
1010249 655
1010251 655
1010252 480
1010254 480
1010255 480
1010257 480
1010258 403
1010260 403
1010261 403
1010263 403
1010264 403
1010266 403
1010267 403
1010269 403
1010270 403
1010272 403
1010273 403
1010275 403

1010300
1010300 306
1010301 306
1010306 307
1010307 307
1010312 307
1010313 307
1010318 557
1010319 557
1010324 557
1010325 557
1010330 483
1010331 483
1010336 483
1010337 483
1010345 453
1010346 453
1010347 453
1010348 453
1010349 453
1010350 453
1010351 453
1010352 453
1010353 61
1010354 61
1010375 483
1010376 483
1010381 639
1010382 639
1010383 639
1010384 639
1010385 639
1010386 639
1010387 639
1010388 639
1010393 463
1010394 463

1010400
1010401 361
1010402 435
1010403 265, 485, 567
1010404 265, 485, 567
1010405 265, 485, 567
1010406 265, 485, 567
1010407 265, 485, 567
1010408 265, 485, 567
1010413 197
1010414 197
1010415 197
1010416 197
1010417 269
1010418 269

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

1010419 269
1010420 269
1010421 269
1010422 181
1010423 181
1010424 181
1010425 181
1010426 259
1010427 259
1010428 259
1010429 259
1010446 471, 479
1010447 471, 479
1010448 562
1010449 562
1010450 562
1010451 562
1010452 563
1010453 563
1010454 563
1010455 563
1010456 481
1010457 481
1010458 481
1010459 481
1010460 481
1010461 481
1010462 481
1010463 481
1010465 1008
1010466 1008
1010467 1008
1010470 1009
1010471 1009
1010472 1008
1010473 1024
1010474 1024
1010475 1024
1010476 1024
1010481 1024
1010484 1009
1010486 1009
1010488 1025
1010489 1025
1010490 1025
1010491 1025

1010500

1010509 255
1010510 255
1010511 255
1010512 255
1010513 255
1010514 255
1010515 255
1010516 255
1010517 179
1010518 179
1010519 179
1010520 179
1010521 91
1010522 91
1010523 91
1010524 91

1010600

1010679 27, 37, 47
1010680 27, 37, 47
1010681 27, 37, 47
1010682 27, 37, 47
1010683 29, 39, 49
1010684 29, 39, 49
1010685 29, 39, 49
1010686 29, 39, 49
1010687 31, 41, 51
1010688 31, 41, 51
1010689 31, 41, 51
1010690 31, 41, 51
1010691 33, 43, 53
1010692 33, 43, 53
1010693 33, 43, 53
1010694 33, 43, 53
1010695 54
1010696 55
1010697 56
1010698 57
1010699 54

1010700

1010700 55
1010701 56
1010702 57
1010703 54
1010704 55
1010705 56
1010706 57
1010785 224
1010786 225
1010787 225
1010788 225
1010789 226
1010790 226
1010791 227
1010792 227
1010793 228
1010794 229
1010795 229
1010796 229
1010797 537
1010798 537
1010799 538

1010800

1010800 539
1010801 510
1010802 511
1010803 511
1010804 511

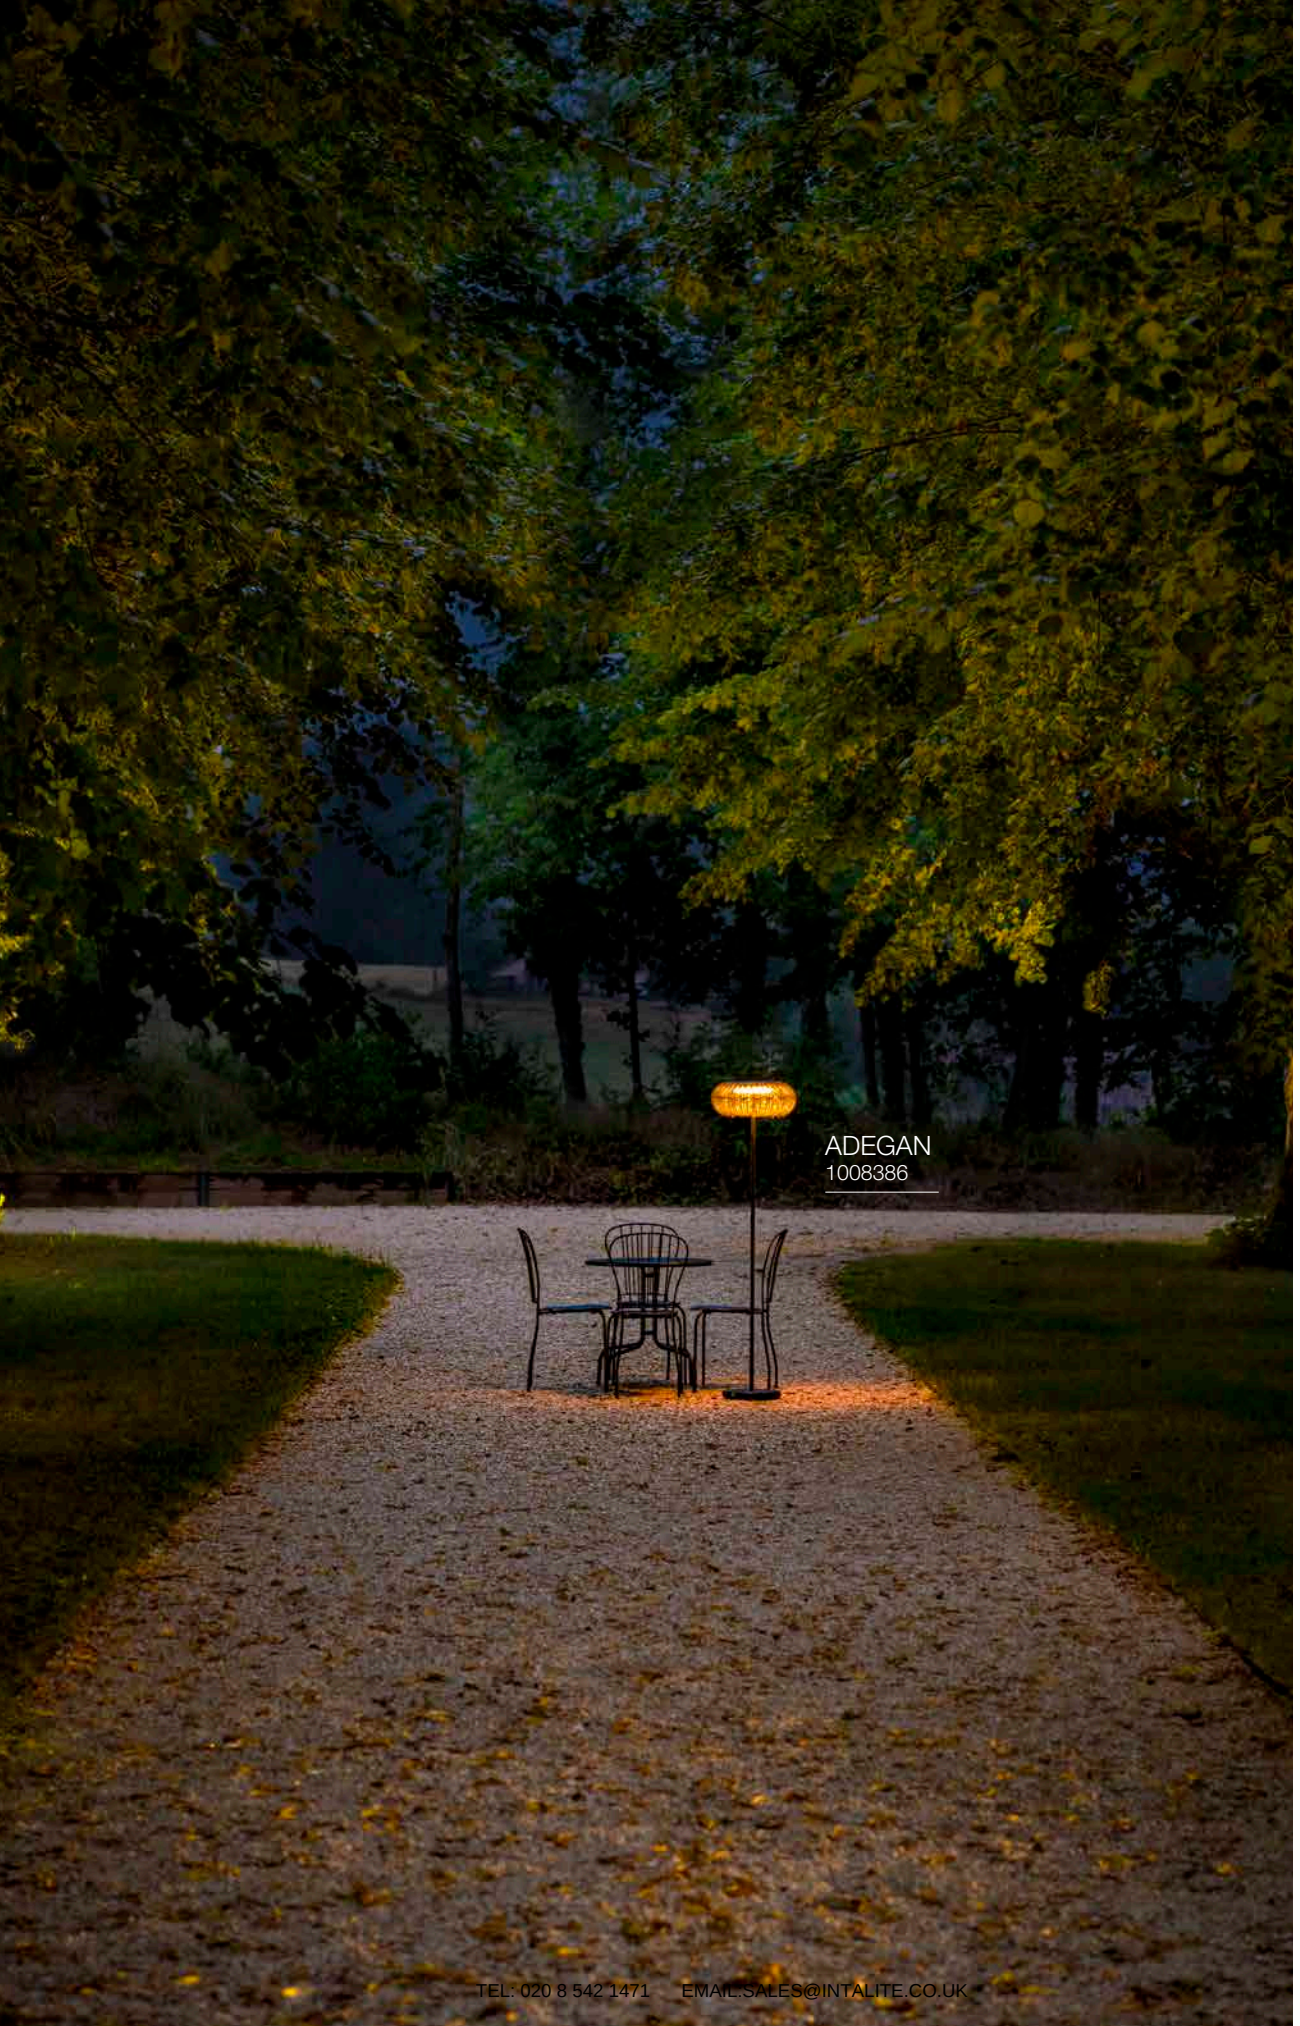

ADEGAN
1008386

1-PHASE

1-PHASE SURFACE-MOUNTED TRACK 527
1-PHASE SURFACE-MOUNTED TRACK ACCESSORIES 528, 529
1-PHASE RECESSED TRACK 531
1-PHASE RECESSED TRACK ACCESSORIES 531

3-PHASE

EUTRAC® 3-PHASE SURFACE-MOUNTED TRACK 601
EUTRAC® 3-PHASE SURFACE-MOUNTED TRACK ACCESSORIES 601
EUTRAC® 3-PHASE RECESSED TRACK 605
EUTRAC® 3-PHASE RECESSED TRACK ACCESSORIES 605
S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, ON/OFF 589
S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, ON/OFF ACCESSORIES 590, 591
S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI 593
S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI ACCESSORIES 594, 595
S-TRACK 3-PHASE RECESSED TRACK, PHASE & DALI 597
S-TRACK 3-PHASE RECESSED TRACK, PHASE & DALI ACCESSORIES 598, 590

48V SYSTEMS

48V TRACK SYSTEM SURFACE-MOUNTED TRACK DEEP, DALI 473
48V TRACK SYSTEM SURFACE-MOUNTED TRACK DEEP, DALI ACCESSORIES 474, 475
48V TRACK SYSTEM SURFACE-MOUNTED TRACK, DALI 469
48V TRACK SYSTEM SURFACE-MOUNTED TRACK, DALI ACCESSORIES 470, 471
48V TRACK SYSTEM, RECESSED TRACK, DALI 477
48V TRACK SYSTEM SURFACE-MOUNTED TRACK, DALI ACCESSORIES 478, 479

A

ABRIDOR 100 POLE 795
ABRIDOR 60 POLE 795
ABRIDOR HYBRID 100 POLE 794
ABRIDOR HYBRID 60 POLE 794
ABRIDOR HYBRID WL 923
ABRIDOR SENSOR WL 925
ABRIDOR WL 925
ADEGAN FL, FLAT SOLAR 693
ADEGAN FL, SOLAR 693
ADI EL 952
AINOS CW 944
AINOS CW, SQUARE 945
AINOS CW, SENSOR 945
AINOS CW, SENSOR, SQUARE 945
AKALO D83 EL 115
ALPA CONE 100 POLE, E27 777
ALPA MUSHROOM 45 POLE, E27 777
ALPA MUSHROOM 75 POLE, E27 777
ALTRA DICE CL, QPAR51 159
ALTRA DICE CW, DOUBLE, QPAR51 159, 418
ALTRA DICE TRACK 1-PHASE, QPAR51 581
ANELA CL, PHASE 155
ANELA PD, PHASE 279
ANGOLUX SENSOR WL 913
ANGOLUX WL 913
APONI 120 POLE, PHASE 778
APONI 90 POLE, PHASE 778
ARLINA 130 WL 335
ARLINA 60 WL 335
ARROCK ARC POLE, QPAR51 758
ARROCK GRANITE 40 POLE, SQUARE, E27 757
ARROCK GRANITE 70 POLE, SQUARE, E27 757
ARROCK SLOT POLE, QPAR51 759
ARROCK STONE 50 POLE 759
ARROCK STONE 75 POLE 759
ASMARA LV, QR-C51 520
ASSO 300 WL, PHASE 368, 369
ASTINA STEEL WL, QPAR51 912
ASTINA WL, QPAR51 912
ASTO TUBE 1-PHASE, GU10 570
ASTO TUBE 1-PHASE, PD, GU10 571
ASTO TUBE CL, SINGLE, GU10 157
ASTO TUBE CW, DOUBLE, GU10 411
ASTO TUBE CW, GU10 411
ASTO TUBE CW, QUADRUPLE, GU10 411
ASTO TUBE CW, SINGLE, GU10 411
ASTO TUBE CW, TRIPLE, GU10 411
ASTO TUBE DECORATIVE REFLECTOR 157, 253, 347, 411, 571
ASTO TUBE PD, DOUBLE, GU10 253
ASTO TUBE PD, GU10 253
ASTO TUBE PD, QUADRUPLE, GU10 253
ASTO TUBE PD, SINGLE, GU10 253
ASTO TUBE PD, TRIPLE, GU10 253
ASTO TUBE WL, GU10 347
ASTO TUBE WL, UP/DOWN, GU10 347

ACCESSORIES

CABLE, 3-POLE, 3 X 0,75 MMA, 10 M 1021
CONNECTION BOX Y IP68, 3-POLE 1022
CONNECTION BOX, 5 POLES, DALI 1022
CONVERTER PHASE DIM -> DALI 1012
DALI CONTROLLER, DT8, 5-CHANNEL 1020
DALI INTERFACE 1-10V + ON/OFF 1012
E-TRANSFORMER 60W | 12V DIMMABLE 1012
EMERGENCY LIGHT FEATURE DALI 2 1020
FITU CABLE CLAMP 1021
FITU CEILING HOOK 1021
GLENOS® CEILING ROSETTE 1021
GU10 FITTING 1022
GU10 LED CONNECTION BOX WITH BASE, MAX. 10W 1021
IP68 CONNECTION BOX, 3-POLE 1022
IP68 CONNECTION BOX, 5-POLE 1022
LED DRIVER 10W | 180-270MA PHASE 1017
LED DRIVER 10W | 500-700MA PHASE 1017
LED DRIVER 10W |350MA ROUND 1016
LED DRIVER 15W | 100-700MA DALI 1018
LED DRIVER 15W | 200-350MA PHASE 1017
LED DRIVER 15W | 700MA ROUND 1016
LED DRIVER 20 W | 350MA 1016
LED DRIVER 20W | 350-500MA PHASE 1017
LED DRIVER 20W | 350MA | PHASE 1016
LED DRIVER 20W | 350MA/500MA | PHASE 1017
LED DRIVER 21W | 150-500MA 1016
LED DRIVER 21W | 500MA INCLUDING STRAIN RELIEF 1016
LED DRIVER 23W | 100-700MA DALI 1018
LED DRIVER 25W | 150-700MA | DALI DIMMABLE 1018
LED DRIVER 30W | 500-700MA PHASE 1017
LED DRIVER 36W | 100-900MA DALI 1018
LED DRIVER 40W | 700-1050MA PHASE 1018
LED DRIVER 4W | 350MA 1015
LED DRIVER 4W | 700MA 1015
LED DRIVER 53W | 650-1400MA DALI 1018
LED DRIVER STRAIN RELIEF STANDARD 1019
LED DRIVER STRAIN RELIEF THROUGH-WIRABLE 1019
LED POWER SUPPLY 100W | 24 DC INCL. STRAIN RELIEF 796 1014
LED POWER SUPPLY 100W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF 1015
LED POWER SUPPLY 12V | 24W, ROUND 1013
LED POWER SUPPLY 150W | 24 DC INCL. STRAIN RELIEF 1014
LED POWER SUPPLY 150W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF 1015
LED POWER SUPPLY 24V | 24W 1013
LED POWER SUPPLY 24V | 25W, ROUND 1013
LED POWER SUPPLY 24V | 36W 1013
LED POWER SUPPLY 24V | 60W 1013
LED POWER SUPPLY 250W | 24 DC INCL. STRAIN RELIEF 1014
LED POWER SUPPLY 250W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF 1015
LED POWER SUPPLY 25W | 24V 1014
LED POWER SUPPLY 30W | 24 DC INCL. STRAIN RELIEF 1013
LED POWER SUPPLY 30W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF 1015
POWER ADAPTER 100W | 24V DC 1014
POWER ADAPTER 50W | 24V 1014
REMOTE CONTROL ZIGBEE, CCT/RGBW 1022
SLVconnect® 4-IN-1 MOTION DETECTOR ZIGBEE 1025
SLVconnect® DIMMER SOCKET ZIGBEE 1025
SLVconnect® DIMMER ZIGBEE 1025
SLVconnect® HUB ZIGBEE, THREAD, MATTER 1024
SLVconnect® LED DRIVER 20W | 150-450 MA | ZIGBEE 1024
SLVconnect® LED DRIVER 40W | 500-1050 MA | ZIGBEE 1024
SLVconnect® LED STRIP CONTROLLER CCT / RGBW 1024
SLVconnect® RADIO SWITCH BOX ON OFF, ZIGBEE 1025
SLVconnect® RADIO TRANSMITTER WITH DIMMER FUNCTION, ZIGBEE 1024
SLVconnect® REMOTE CONTROL 1024
TENSEO TRANSFORMER 12V AC | 105VA CONVENTIONAL 1012
TENSEO TRANSFORMER 12V AC | 210VA CONVENTIONAL 1012
TENSEO TRANSFORMER 12V AC | 50VA CONVENTIONAL 1012
TEXTILE CABLE 10M 1021

B

BASKET WL, E27 373
BATTEN 120 CW 431
BATTEN 60 CW 431
BIG NAILS 50 POLE, E27 780
BIG NAILS 80 POLE, E27 780
BIG NAUTILUS SP, ROUND, QPAR51 813
BIG PLOT COVER, 2-PACK 991
BIG PLOT COVER, 4-PACK 991
BIG PLOT MODULES 991
BIG QUAD UP/DOWN WL 883
BIG QUAD WL 883
BIG THEO FLOOD UP/DOWN WL 864
BIG THEO CL 833
BIG THEO CL, QPAR111 833
BIG THEO UP/DOWN WL, QPAR111 863
BIG THEO WL 865
BIG THEO WL, BEAM UP/FLOOD DOWN 863
BIG THEO WL, QPAR111 865
BIMA 1-PHASE, DOUBLE, QPAR51 579
BIMA 1-PHASE, SINGLE, QPAR51 579
BIMA 3-PHASE, DOUBLE, QPAR51 657

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

BIMA 3-PHASE, SINGLE, QPAR51 656
BOOKAT POLE 798
BOOKAT WL 908
BOX WL, UP/DOWN, QT-DE12 929
BOX-L WL 929
BOX-L WL, E27 929
BRICK DOWNUNDER EL 957
BRICK DOWNUNDER EL, E14 957
BRICK EL, ASYMMETRICAL 955
BRICK EL, SYMMETRICAL 955
BRICK MESH EL 955
BULAN CW, E14 947
BULAN GRID CW, E27 947

BULBS

LED A19 E27 1003
LED A60 E27 1004
LED A60 E27, HIGH EFFICIENCY 1004
LED A60 E27, MIRRORHEAD CHROM 1007
LED A60 GU10 1001
LED C35 G9 1000
LED C35 GOLD E14 1000
LED G45 GOLD E14 1000
LED GLOBE 125 E27 1007
LED GLOBE 125 E27, BLACK SMOKEY 1005
LED GLOBE 125 E27,
CRESCENT SLANTING SMOKEY 1005
LED GLOBE 125 E27, HALF MOON 1007
LED GLOBE 125 E27,
SLANTING TOP SMOKEY 1005
LED GLOBE 125 E27,
SOFT CURVE SMOKEY 1004
LED GLOBE 150 E27, BLACK SMOKEY 1005
LED GLOBE 150 E27,
TWISTED SMOKEY GREY 1004
LED GLOBE 200 E27, BLACK SMOKEY 1005
LED GLOBE 300 E27, BLACK SMOKEY 1005
LED QPAR 111 GU10 1003
LED QPAR51 GU10 1002
LED QR51 GU5.3 1001
LED QT-DE12 R7S, 118 MM 1000
LED QT-DE12 R7S, 78 MM 1000
LED QT14 G9 1000
LED ST58 E27 1007
LED ST64 E27, GOLD 1006
LED ST64 E27, GOLD CURLY FILAMENT 1007
LED ST65 E27, SOFT CAGE 1007
LED T32 E27, SLIM TUBE 1006
LED T32 E27, SOFT SPIRAL 1006
LED T32 E27, SOFT TUBE 1006
LED T32 GU10 1002
LED T38 E27 1006
LED T45 E27 1006
LED TCR-TSE GX53 1001
SLVconnect® LED A60 SMART E27,
RGBW 1008
SLVconnect® LED A60 SMART E27,
TUNABLE WHITE 1008
SLVconnect® LED QPAR111 SMART GU10,
TUNABLE WHITE 1008
SLVconnect® LED QPAR51 SMART GU10,
RGBW 1009
SLVconnect® LED QPAR51 SMART GU10,
TUNABLE WHITE 1008
SLVconnect® LED ST19 SMART E27,
TUNABLE WHITE 1008

C

C-POL 90 POLE, E27 784
CARISO WL, PHASE 370
CHROMBO WL, PHASE 371
CONCRETE 35 POLE, PHASE 726
CONCRETE 55 POLE, PHASE 727
CONCRETO EL, CUT 951
CONCRETO EL, WING 951
CONCRETO FL, SQUARE, QPAR51 729
CONCRETO FL, ROUND, QPAR 51 729
CONCRETO L WL 852
CONCRETO M WL 852
CONE FL, E27 772
COSMIC LV, QR-C51 521
COUPA WL 379
CUBE CL, PHASE 828
CUBIX FL, QPAR51 772
CYFT CW, PHASE 407
CYFT DEKORING 407
CYFT DOME CW, PHASE 407
CYFT WAVE CW, PHASE 406
CYFT WAVE XL CW, PHASE 409
CYFT XL CW, PHASE 409
CYFT XL DECORATIVE RING 409

D

D-RING M WL, PHASE 850
D-RING S WL, PHASE 849
DASAR® 115 RL, SQUARE, QPAR51 979
DASAR® 115 RL, ROUND, QPAR51 979
DASAR® 1200 EL 961
DASAR® 215 RL, SQUARE, QPAR111 983
DASAR® 215 RL, ROUND, QPAR111 983
DASAR® 255 EL 975
DASAR® 370 EL, ROUND 983
DASAR® 600 EL 961
DASAR® 920 EL 977
DASAR® 920 SP, 230V 817
DASAR® EXACT 116 EL, SQUARE, QPAR51 981
DASAR® EXACT 116 EL, ROUND, QPAR51 981
DASAR® FLAT 120 EL 975
DASAR® FLAT 80 EL 975
DASAR® L RL, ASYM, SQUARE, DALI 969
DASAR® L RL, ASYM, ROUND, DALI 969
DASAR® L RL, SQUARE 967
DASAR® L RL, ROUND 967
DASAR® M RL, SQUARE 965
DASAR® M RL, ROUND 964
DASAR® PROJECTOR SP, 12/24V 817
DASAR® S RL, SQUARE 963
DASAR® S RL, ROUND 963
DASAR® XL RL, ASYM, SQUARE, DALI 973
DASAR® XL RL, ASYM, ROUND, DALI 973
DASAR® XL RL, SQUARE 971
DASAR® XL RL, ROUND 970
DECONA 30 CL, PHASE 171, 173
DECONA 30 CL, SENSOR 171, 173
DECONA 42 CL, PHASE 175, 176
DECONA 42 CL, SENSOR 175, 177
DECONA SUSPENSION KIT 1,50 M 177
DECONA MOUNTING FRAME 310 MM 177
DECONA MOUNTING FRAME 430 MM 177
DELWA WL 919
DENA 30 WL, E14 373
DIO FLEX PLATE WL 385
DIO FLEX PLATE WL QPAR51 385
DIRETO 60 WL, PHASE 373
DISPLAY ADL 50 QPAR51 385
DL 126 EL 105
DOLIX OUT EL, SQUARE, QPAR51 114
DOLIX OUT EL, ROUND, QPAR51 114
DORISA 30 WL 339
DORISA 50 WL 339
DOWNUNDER OUT L EL 953
DOWNUNDER OUT M EL 953
DOWNUNDER OUT S EL 953
DOWNUNDER OUT WL, SQUARE 921
DOWNUNDER OUT WL, ROUND 921
DOWNUNDER PUR 150 EL 120
DOWNUNDER PUR 80 EL 120
DURNO LV 523
DYSKO 1-PHASE, PD, PHASE 557
DYSKO 48V, DALI 483
DYSKO 48V, PD, DALI 483
DYSKO CW, DOUBLE, PHASE 307
DYSKO CW, SINGLE, PHASE 306
DYSKO CW, SWITCH, SINGLE, PHASE 307
DYSKO DL, ROUND, PHASE 61

E

ENOLA® B 1-PHASE, PD, QPAR51 577
ENOLA® B CL, QPAR51 154
ENOLA® B CW, DOUBLE, QPAR51 417
ENOLA® B CW, SINGLE, QPAR51 417
ENOLA® B PD, QPAR51 279
ENOLA® B TRACK 1-PHASE, QPAR51 577
ENOLA® B WL, QPAR51 377
ENOLA® C CL 154
ENOLA® C TRACK 1-PHASE 576
ENOLA® C TRACK 3-PHASE 657
ENOLA® M LENS 34° 895
ENOLA® M ASYMMETRICAL LENS 895
ENOLA® OCULUS CL 830
ENOLA® OCULUS WL, SINGLE 887
ENOLA® OCULUS WL, UP/DOWN 887
ENOLA® PD, E27 279
ENOLA® ROUND L CL 831
ENOLA® ROUND L WL, SINGLE 889
ENOLA® ROUND L WL, UP/DOWN 891
ENOLA® ROUND M CL 831
ENOLA® ROUND M WL, SINGLE 889
ENOLA® ROUND M WL, UP/DOWN 891
ENOLA® ROUND S CL 831
ENOLA® ROUND S WL, SINGLE 889
ENOLA® ROUND S WL, UP/DOWN 891
ENOLA® S/M/L REFLECTOR 895
ENOLA® SQUARE L WL, SINGLE 893
ENOLA® SQUARE L WL, UP/DOWN 894
ENOLA® SQUARE M CL 832
ENOLA® SQUARE M WL, SINGLE 893
ENOLA® SQUARE M WL, UP/DOWN 894
ENOLA® SQUARE S CL 832
ENOLA® SQUARE S WL, SINGLE 893
ENOLA® SQUARE S WL, UP/DOWN 894
ESKINA D DISPLAY, PHASE 937
ESKINA FRAME 125 POLE, DOUBLE 739
ESKINA FRAME 175 POLE, DOUBLE 739
ESKINA FRAME 45 POLE, SINGLE 737
ESKINA FRAME 78 POLE, DOUBLE 737
ESKINA FRAME 78 POLE, SINGLE 737
ESKINA FRAME CL, SINGLE, PHASE 829
ESKINA FRAME WL 907
ESKINA FRAME WL, DOUBLE 907
ESKINA SPOT CW, PHASE 941
ESKINA SPOT SENSOR CW, PHASE 941
EURO CUBE 3-PHASE 653
EURO SPOT TRACK 1-PHASE, QPAR51 580
EURO SPOT TRACK 3-PHASE, QPAR111 652
EURO SPOT TRACK 3-PHASE, QPAR51 652

F

F-POL 85 POLE, E27 784
F-POL WL, E27 934
FENDA 15 CM, ROUND 273, 459
FENDA 30 CM, ROUND 163, 459
FENDA 45 CM, ROUND 163
FENDA 70 CM, ROUND 163, 459
FENDA CEILING ROSETTE, E27 163
FENDA FL, E27 457, 459

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

FENDA GLASS SHADE 12.5 CM, ROUND 273
FENDA HALF SHADE 378
FENDA Ø 30 CM, ROUND 273
FENDA Ø 45 CM, ROUND 273, 459
FENDA Ø 70 CM, ROUND 273
FENDA PD, E27 272
FENDA TL, E27 457
FENDA WL, BASE, E27 378
FERA 25 CL 169
FERA 25 CL, DALI 168
FITU PD, E27 269
FITU PD, E27 RIBBED 269
FITU PD, E27 STONE 269
FITU WALL BRACKET 375
FIX-IT! 48V, DALI, ROUND,
DEEP SURFACE-MOUNTED TRACK 501, 503
FIX-IT! 48V, DALI, ROUND,
STANDARD SURFACE-MOUNTED TRACK 501
FIX-IT! 48V, DALI, SQUARE,
DEEP SURFACE-MOUNTED TRACK 505
FIX-IT! 48V, DALI, SQUARE,
STANDARD SURFACE-MOUNTED TRACK 503
FLAC BEAM SP 811
FLATT 100 POLE 735
FLATT 65 POLE 734
FLATT II 36 POLE, PHASE 733
FLATT II 62 POLE, PHASE 733
FLATT II WL, PHASE 858
FLATT II WL, SENSOR 859
FLATT SENSOR WL 861
FLATT WL 860
FLOOD DOWN WL 931
FORCHINI 50 PD, E27 284
FORCHINI 70 PD, E27 284
FORCHINI M 40 PD, E27 285
FORCHINI M 40 TRACK 1-PHASE, E27 535
FORCHINI M 40 TRACK 3-PHASE, PD, E27 649
FORCHINI M 50 PD, E27 285
FRAME BASIC RL 116
FRAME BASIC RL, HV 116
FRAME CURVE EL 117

G

GALEN 120 SP 808
GALEN 60 SP 808
GALEN PRO 120 WL, DALI 809
GALEN PRO 60 WL, DALI 809
GLENOS® 60 WL 339
GLENOS® PD, 1M, 1-10V 261
GLENOS® PD, 2M, 1-10V 261
GLENOS® PRO CL, 1,2 M, DALI, UGR19 179
GLENOS® PRO PD, 1,2M, DALI, UGR16 255
GLENOS® PRO PD, 1,5M, DALI, UGR16 255
GLENOS® PRO RL, 1,2 M, DALI, UGR19 91
GLOO PURE 27 POLE, E27 767
GLOO PURE 44 POLE, E27 767
GLOO PURE 70 POLE, E27 767
GLOO PURE WL, E27 933
GRAFIT 30 POLE, E27 745
GRAFIT 30 POLE, ROUND, E27 743
GRAFIT 60 POLE, E27 745
GRAFIT 60 POLE, ROUND, E27 743
GRAFIT 90 POLE, E27 745
GRAFIT 90 POLE, ROUND, E27 743
GRAFIT WL, E27 899
GRAFIT WL, SQUARE, SENSOR, E27 899
GRAFIT WL, ROUND, E27 898
GRAFIT WL, ROUND, SENSOR, E27 898
GRAZIA 10 SURFACE-MOUNTED PROFILE,
FLAT 2 M 663
GRAZIA 10 SURFACE-MOUNTED PROFILE,
STANDARD 663
GRAZIA 10 RECESSED PROFILE 663
GRAZIA 10 ACCESSORIES 665
GRAZIA 10 EDGE 2 M 666
GRAZIA 10 EDGE ACCESSORIES 667
GRAZIA 20 STANDARD SURFACE-MOUNTED
PROFILE, 3 M 669
GRAZIA 20 RECESSED PROFILE, 3 M 669
GRAZIA 20 ACCESSORIES 670, 671
GRAZIA 60 SURFACE MOUNTED PROFILE,
1.5 M 673
GRAZIA 60 RECESSED PROFILE, 1.5 M 673
GRAZIA 60 ACCESSORIES 674, 675
GRAZIA IP FLEXSTRIP 24V 684
GRAZIA IP FLEXSTRIP RGBW, 24V 685
GRAZIA IP FLEXSTRIP
TUNABLE WHITE, 24V 685
GRAZIA LED STRIP
CORE MAIN LIGHTING 679
GRAZIA LED STRIP
VALUE ADDITIONAL LIGHTING 676
GRAZIA LED STRIP VALUE MAIN
LIGHTING + 678
GRAZIA LED STRIP
VALUE MAIN LIGHTING 677
GRAZIA PRO FLEXSTRIP RGBW, 24V 683
GRAZIA PRO FLEXSTRIP
TUNABLE WHITE, 24V 682
GRAZIA PRO MAX FLEXSTRIP 24V 680, 681
GRID CUBE FL 691
GRID SUN FL 691
GRIP! FLAT 1-PHASE, PD, PHASE 567
GRIP! FLAT 1-PHASE, PHASE 567
GRIP! FLAT 48V, DALI 485
GRIP! FLAT 48V, PD, DALI 485
GRIP! FLAT CL, PHASE 415
GRIP! FLAT FELT SHADE
Ø 50 CM X 0,6 CM 265, 485, 567
GRIP! FLAT FELT SHADE
Ø 50 CM X 6,2 CM 265, 485, 567
GRIP! FLAT PD, PHASE 265
GRIP! L 1-PHASE, PD, QPAR51, Ø 5,7 CM 553
GRIP! L 1-PHASE, QPAR51, Ø 5,7CM 553
GRIP! L 3-PHASE, QPAR51, Ø 5,7 CM 617
GRIP! L 48V, PD, DALI, Ø 3 CM 509
GRIP! L CL, DOUBLE, QPAR51 Ø 5,7 CM 151
GRIP! L CL, SINGLE, QPAR51 Ø 5,7 CM 151
GRIP! L DECORATIVE RING Ø 5,4 CM 555, 617
GRIP! M 1-PHASE, PHASE, Ø 4,3CM 551
GRIP! M 3-PHASE, DALI, Ø 4,3 CM 614
GRIP! M 3-PHASE, PHASE, Ø 4,3 CM 615
GRIP! M CL, DOUBLE, PHASE, Ø 4,3 CM 149
GRIP! M CL, SINGLE, PHASE, Ø 4,3 CM 148
GRIP! M DECORATIVE RING Ø 4,0 CM 555, 617
GRIP! M EL, PHASE, Ø 4,3 CM 111
GRIP! S 1-PHASE, PHASE, Ø 3,0CM 549
GRIP! S 48V, DALI,
DEEP & RECESSED TRACK, Ø 3 CM 507, 509
GRIP! S 48V, DALI,
STANDARD TRACK, Ø 3 CM 506, 507
GRIP! S CL, DOUBLE, PHASE, Ø 3 CM 147
GRIP! S CL, SINGLE, PHASE, Ø 3 CM 147
GRIP! S DECORATIVE RING Ø 2,7 CM 555
GRIP! S EL, PHASE, Ø 3,0 CM 111
GRIP! S PD, PHASE, Ø 3 CM 209
GU10 LED CONNECTION BOX
WITH BASE, MAX. 10W 78

H

H-POL 30 POLE 788
H-POL 60 POLE 788
H-POL TWIN 60 POLE 789
HELIA 30 PD 276
HELIA 30 PD, PHASE 276
HELIA 40 PD 277
HELIA 40 PD, PHASE 277
HELIA 50 TRACK 1-PHASE 575
HELIA 50 TRACK 3-PHASE 657
HELIA CW, DOUBLE 943
HELIA CW, SINGLE 943
HELIA PRO L WL, SINGLE, DALI P1 875
HELIA PRO L WL, SINGLE, DALI P2 877
HELIA PRO L WL, UP/DOWN, DALI P1 875
HELIA PRO L WL, UP/DOWN, DALI P2 877
HELIA PRO S WL, SINGLE, DALI P1 873
HELIA PRO S WL, SINGLE, DALI P2 874
HELIA PRO S WL, UP/DOWN, DALI P1 873
HELIA PRO S WL, UP/DOWN, DALI P2 874
HELIA SLIM POLE, DOUBLE 819
HELIA SLIM POLE, SINGLE 819
HELIA SPOT L SP, SINGLE, PHASE 811
HELIA SPOT S SP, SINGLE 810
HORN 1 EL, SINGLE, QPAR51 98
HORN DL, DOUBLE, QPAR51 97
HORN DL, GU10, BLOWER DOOR TESTED 98
HORN DL, SINGLE, ASYMMETRICAL,
QPAR51 97
HORN DL, SINGLE, QPAR51 97, 98
HORN MAGNA EL 99
HORN MINI EL 96
HORN T EL, QPAR111 99

I

I-RING 65 POLE 710
I-RING WL 849
IN-LINE 22 48V,
DARKLIGHT REFLECTOR, DALI 495
IN-LINE 22 48V, OPAL, DALI 495
IN-LINE 24 48V, MOVE,
DARKLIGHT REFLECTOR, DALI 499
IN-LINE 44 48V,
DARKLIGHT REFLECTOR, DALI 497
IN-LINE 44 48V, OPAL, DALI 497
IN-LINE 46 48V, MOVE,
DARKLIGHT REFLECTOR, DALI 499
IPERI 50 POLE 796
IPERI WL 934

K

KADUX DL, DOUBLE, DALI 19
KADUX DL, DOUBLE, PHASE 21
KADUX DL, SINGLE, DALI 18
KADUX DL, SINGLE, PHASE 21
KADUX DL, TRIPLE, PHASE 21
KADUX EL, DOUBLE, QPAR111 23
KADUX EL, DOUBLE, QPAR51 22
KADUX EL, SINGLE, QPAR111 23
KADUX EL, SINGLE, QPAR51 22
KADUX EL, TRIPLE, QPAR51 22
KALU 2.0 1-PHASE, PHASE 565
KALU 2.0 3-PHASE, DALI 655
KALU 2.0 3-PHASE, PHASE 655
KALU 2.0 48V, DALI 480
KALU 2.0 CW, PHASE 403
KALU CW, DOUBLE, QPAR111 413
KALU CW, QPAR111 413
KALU CW, QUAD, QPAR111 413
KALU CW, SINGLE, QPAR111 413
KALU CW, TRIPLE, QPAR111 413
KALU TRACK 1-PHASE, QPAR111 565
KALU TRACK 3-PHASE, QPAR111 655
KARDAMOD CL, DOUBLE, SQUARE,
QPAR111 161
KARDAMOD CL, SINGLE, SQUARE,
QPAR111 161

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

KARPO 30 CW, SINGLE 387
KARPO 30 EL 109
KARPO 30 WL, SINGLE 381
KARPO FL 460
KARPO GOOSE WL 380
KARPO MAGN CW, SINGLE, PHASE 380
KARPO TL 460
KARPO WL 381
KENKUA SPOT WL, E27 379
KINI EL, PHASE 115

L

L-LINE 120 WL 341
L-LINE 60 WL 341
L-LINE OUT 30 FL, VERTICAL 760
L-LINE OUT 50 POLE, HORIZONTAL 761
L-LINE OUT 60 FL, VERTICAL 761
L-LINE OUT 80 POLE, HORIZONTAL 761
L-LINE OUT WL 931
LALU® SET 1-PHASE, PD, LED BASE, PHASE 537, 538, 539
LALU® SET 48V, PD, LED BASE, DALI 510, 511
LALU® SET PD, E27 BASE 224, 225
LALU® SET PD, LED BASE, PHASE 226, 227
LALU® SET PD, LED BASE, PHASE, RECESSED 228, 229
LED SPIKE SP 821
LED SPOT SP 939
LID I 45 POLE, SINGLE, PHASE 711
LID I 75 POLE, DOUBLE, PHASE 711
LID I WL, DOUBLE, PHASE 846
LID I WL, SINGLE, PHASE 846
LID II WL, SINGLE, PHASE 847
LID II WL. UP/DOWN, PHASE 847
LIGHT EYE® 150 1-PHASE, PD, QPAR111 561
LIGHT EYE® 150 1-PHASE, QPAR111 559
LIGHT EYE® 150 3-PHASE, PD, QPAR111 651
LIGHT EYE® 150 3-PHASE, QPAR111 651
LIGHT EYE® 150 DECORATIVE RING Ø 13,6 CM 251
LIGHT EYE® 150 DECORATIVE RING Ø 13,6CM 561
LIGHT EYE® 150 DECORATIVE RING Ø 13,6 CM 651
LIGHT EYE® 150 PD, QPAR111 251
LIGHT EYE® 2.0 1-PHASE, PD, Ø 7,5 CM 563
LIGHT EYE® 2.0 1-PHASE, PHASE, Ø 7,5 CM 562
LIGHT EYE® 2.0 48V, DALI, Ø 7,5CM 481
LIGHT EYE® 2.0 48V, PD, DALI, Ø 7,5 CM 481
LIGHT EYE® 90 1-PHASE, PD, QPAR51 561
LIGHT EYE® 90 1-PHASE, QPAR51 558
LIGHT EYE® 90 3-PHASE, PD, QPAR51 650
LIGHT EYE® 90 DECORATIVE RING Ø 5,7 CM 251
LIGHT EYE® 90 DECORATIVE RING Ø 5,7 CM 561
LIGHT EYE® 90 DECORATIVE RING 651
LIGHT EYE® 90 PD, QPAR51 251
LIPSY® 30 CW, DOME 426
LIPSY® 30 CW, DRUM 427
LIPSY® 40 CW, DOME 426
LIPSY® 40 CW, DRUM 428
LIPSY® 40 CW, DRUM, DALI 429
LIPSY® 50 CW, DOME 426
LIPSY® 50 CW, DRUM 428
LIPSY® 50 CW, DRUM, DALI 429
LISENNE 40 POLE, E27 774
LISENNE 70 POLE, E27 775
LOGS 40 POLE 741
LOGS 70 POLE 741
LOGS IN L WL, PHASE 363
LOGS IN WL 362
LOGS IN WL, PHASE 362
LOGS WL 931
LYGANT WL, DOUBLE 297
LYGANT WL, SINGLE 297

M

M-POL 30 POLE 723
M-POL 60 POLE 723
M-POL 90 POLE 723
M-POL COVER 722
M-POL M POLEHEAD 719
M-POL M POLEHEAD, DALI 719
M-POL M POLEHEAD, LOUVER 721
M-POL M POLEHEAD, LOUVER, DALI 721
M-POL M POLEHEAD, SHADER 720
M-POL M POLEHEAD, SHADER, DALI 720
M-POL POLE 60, SOCKET 722
M-POL S POLEHEAD 716
M-POL S POLEHEAD 180°, GLARE REDUCTION 715
M-POL S POLEHEAD 180°, GLARE REDUCTION, DALI 715
M-POL S POLEHEAD 360°, GLARE REDUCTION 714
M-POL S POLEHEAD 360°, GLARE REDUCTION, DALI 714
M-POL S POLEHEAD, DALI 717
M-POL S POLEHEAD, LOUVER 718
M-POL S POLEHEAD, LOUVER, DALI 718
M-POL S POLEHEAD, SHADER 717
M-POL S POLEHEAD, SHADER, DALI 717
MAGANDA WL 337
MAGICO 20 PD, E27 199
MAGICO 38 PD, E27 199
MAGICO 55 PD, E27 199
MANA 40 SHADE, ROUND 351
MANA 40 SHADE, ROUND, ACOUSTIC FELT 350
MANA 40 SHADE, ROUND, MOON STRUCTURE 351
MANA 60 SHADE, ROUND 351
MANA 60 SHADE, ROUND, ACOUSTIC FELT 350
MANA 60 SHADE, ROUND, MOON STRUCTURE 351
MANA BASE ROUND 350
MANA BASE WL, ROUND, PHASE 349
MARONA CL, PHASE 178
MEDO® 30 CW, PHASE 220, 324
MEDO® 30 RL, FRAME 92
MEDO® 30 RL, FRAMELESS 94
MEDO® 40 CW, PHASE 220, 324
MEDO® 40 RL, FRAME 92
MEDO® 40 RL, FRAMELESS 94
MEDO® 60 CW, PHASE 221, 325
MEDO® 60 RL, FRAME 93
MEDO® 60 RL, FRAMELESS 95
MEDO® 90 CL, PHASE 221, 325
MEDO® 90 RL, FRAME 93
MEDO® 90 RL, FRAMELESS 95
MEDO® PRO 30 CW, DALI 216, 320
MEDO® PRO 30 CW, DALI, UGR<19 212, 316
MEDO® PRO 30 CW, PHASE 216, 320
MEDO® PRO 30 CW, PHASE, UGR<19 212, 316
MEDO® PRO 40 CW, DALI 217, 321
MEDO® PRO 40 CW, DALI, UGR<19 213, 317
MEDO® PRO 40 CW, PHASE 217, 321
MEDO® PRO 40 CW, PHASE, UGR<19 213, 317
MEDO® PRO 60 CW, DALI 218, 322
MEDO® PRO 60 CW, DALI, UGR<19 214, 318
MEDO® PRO 60 CW, PHASE 218, 322
MEDO® PRO 60 CW, PHASE, UGR<19 214, 318
MEDO® PRO 90 CL, DALI 219, 323
MEDO® PRO 90 CL, DALI, UGR<19 215, 319
MEDO® PRO 90 CL, PHASE 219, 323
MEDO® PRO 90 CL, PHASE, UGR<19 215, 319
MEDO® RING 60 PD, DALI 210
MEDO® RING 60 PD, PHASE 211
MEDO® RING 90 PD, DALI 211
MEDO® RING 90 PD, PHASE 211
MELAN CW, E27 424
MERADO FLOOD WL, PHASE 386
MERIDIAN BOX SENSOR WL, E27 905
MERIDIAN BOX WL, E27 904, 905
MERIDIAN WL, E27 904
MIBO UP/DOWN WL, QT14 337
MOBALA EL 121
MODELA WL, UP/DOWN, PHASE 845
MOLAT 100 POLE, E27 773
MOLAT CL, E27 835
MOLAT PD, E27 773
MOLAT WL, E27 933
MYRA CW, SINGLE, QPAR51 939
MYRA DISPLAY WL, CURVED, QPAR51 937
MYRA SPOT DOUBLE, GU10 799
MYRA UP/DOWN WL, QPAR51 916
MYRA WL, DOUBLE, QPAR51 937

N

NAUTILUS 10 SP, SQUARE 814
NAUTILUS 10 SP, ROUND, QPAR51 812, 813
NAUTILUS 10 SPOT SP, LED 815
NAUTILUS 10 SPOT SP, QPAR51 815
NAUTILUS SP, QR-C51 815
NAUTILUS WL QPAR51 939
NEW TRIA® UNIVERSAL 68 DL, PHASE 68
NEW TRIA® 150 DL, ROUND, QPAR111 90
NEW TRIA® 155 DL, DOUBLE 77
NEW TRIA® 155 DL, DOUBLE, QPAR51 77
NEW TRIA® 155 RING, DOUBLE, SQUARE GU10/LED MODULES 87
NEW TRIA® 300 DL, SQUARE, QPAR111 91
NEW TRIA® 45 DL, ROUND 76
NEW TRIA® 68 DL, DTW, PHASE 66
NEW TRIA® 68 DL, PHASE 62, 64
NEW TRIA® 68 DL, PHASE, AIRTIGHT 70
NEW TRIA® 68 DL, QPAR51 72
NEW TRIA® 68 RING, ROUND, GU10/LED MODULES 81
NEW TRIA® 68 RING, ROUND, GU10/LED MODULES 80, 81
NEW TRIA® 68 RING, SQUARE, GU10/LED MODULES 81
NEW TRIA® 68 RING, SQUARE, GU10/LED MODULES 80, 81
NEW TRIA® 75 / XL DL, QPAR51 74
NEW TRIA® 75 DL, ROUND, PHASE 64
NEW TRIA® 75 RING, ROUND, GU10/LED MODULES 82
NEW TRIA® 75 RING, ROUND, GU10/LED MODULES 82
NEW TRIA® 75 RING, SQUARE, GU10/LED MODULES 82
NEW TRIA® 75 XL RING, ROUND, GU10/LED MODULES 83
NEW TRIA® 75 XL RING, SQUARE, GU10/LED MODULES 83
NEW TRIA® 95 RING, ROUND, LED MODULES 85
NEW TRIA® 95 RING, SQUARE, LED MODULES 85
NEW TRIA® DL, DOUBLE LED MODULE, PHASE 87
NEW TRIA® DL, DOUBLE, QPAR111 91
NEW TRIA® DL, LED MODULE, DTW, PHASE 79

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

NEW TRIA® DL, LED MODULE, PHASE 79, 85
NEW TRIA® UNIVERSAL DL, LED MODULE, PHASE 79
NOBLO® CW, DOUBLE, PHASE 401
NOBLO® CW, DOUBLE, PHASE, DTW 399
NOBLO® CW, SINGLE, PHASE 401
NOBLO® CW, SINGLE, PHASE, DTW 399
NOBLO® CW, TRIPLE, PHASE 401
NOBLO® CW, TRIPLE, PHASE, DTW 399
NOBLO® SPOT 1-PHASE, PHASE 569
NOBLO® SPOT 1-PHASE, TRIPLE TRACK SET 568
NOBLO® SPOT 3-PHASE, PHASE 635
NOBLO® SPOT LV, ROPE TRACK 523
NOTAPO L RL 119
NOTAPO S RL 119
NUMINOS® GIMBLE L DL 50
NUMINOS® GIMBLE M DL 48
NUMINOS® GIMBLE S DL 46
NUMINOS® GIMBLE XL DL 52
NUMINOS® GIMBLE XS DL 44
NUMINOS® L 3-PHASE, PHASE 624
NUMINOS® L CL, PHASE 142, 312
NUMINOS® L DL 30
NUMINOS® L PD, PHASE 204
NUMINOS® M 3-PHASE, PHASE 622
NUMINOS® M CL, PHASE 140, 310
NUMINOS® M DL 28
NUMINOS® M PD, PHASE 202
NUMINOS® MOVE L DL 40
NUMINOS® MOVE M DL 38
NUMINOS® MOVE S DL 36
NUMINOS® MOVE XL DL 42
NUMINOS® MOVE XS DL 34
NUMINOS® S 3-PHASE, PHASE 620
NUMINOS® S 48V, DALI 488, 492
NUMINOS® S CL, PHASE 138
NUMINOS® S CW, PHASE 308
NUMINOS® S DL 26
NUMINOS® S PD, PHASE 200
NUMINOS® XL 3-PHASE, PHASE 626
NUMINOS® XL CL, PHASE 144, 314
NUMINOS® XL DL 32
NUMINOS® XL PD, DALI 206
NUMINOS® XS 48V, DALI 486, 490
NUMINOS® XS DL 24
NUMINOS® ZOOM M 3-PHASE, PHASE 628

O

OCCULDAS 13 CL, INDIRECT, PHASE 158
OCCULDAS 14 EL, INDIRECT, PHASE 109
OCCULDAS 23 CL, INDIRECT, PHASE 158
OCCULDAS 23 EL, INDIRECT, PHASE 109
OCULUS CL DTW, PVD 153
OCULUS CL, MOVE, PHASE 107
OCULUS CL, PHASE 153
OCULUS PD DTW, PVD 267
OCULUS PD, SINGLE, PHASE 266
OCULUS UP/DOWN WL, DTW, PVD 353
OCULUS UP/DOWN WL, PHASE 353
OCULUS WL, SINGLE, PHASE 353
OLYPSO 40 PD, E27 197
OLYPSO 50 PD, E27 197
ONE 40 CW, DALI 331
ONE 40 CW, DALI, UP/DOWN 327
ONE 40 CW, PHASE, UP/DOWN 326
ONE 40 TRACK 3-PHASE, DALI 633
ONE 60 CW, DALI 331
ONE 60 CW, DALI, UP/DOWN 327
ONE 60 CW, PHASE, UP/DOWN 326
ONE 60 PD, DALI 237
ONE 60 PD, DALI, UP/DOWN 237
ONE 60 PD, PHASE, UP/DOWN 237
ONE 80 PD, DALI 239
ONE 80 PD, DALI, UP/DOWN 239
ONE BOW FL 441
ONE CUBE PD, DALI 235
ONE CUBE PD, DALI, UP/DOWN 235
ONE DOUBLE PD, DALI, UP/DOWN 240
ONE DOUBLE PD, PHASE, UP/DOWN 240
ONE FILZPLATTE, ACOUSTIC FELT, F. ONE 80/ ONE CUBE 235, 239
ONE FLAT PD, DALI, TRIPLE 231
ONE FLAT PD, PHASE, SINGLE 231
ONE LINEAR 100 PD, PHASE, UP/DOWN 243
ONE LINEAR 140 PD, PHASE, UP/DOWN 243
ONE LINEAR 50 WL, PHASE, UP/DOWN 328
ONE LINEAR 70 WL, PHASE, UP/DOWN 329
ONE STRAIGHT FL 441
ONE TRIPLE PD, DALI 241
ONE VERTICAL PD, PHASE 233
ORDI II 45 POLE, PHASE 793
ORDI II 70 POLE, PHASE 793
ORDI II 70 POLE, SENSOR 793
ORDI II SENSOR WL 926
ORDI II WL, PHASE 926
ORDI SENSOR WL 927
ORDI WL 927
OSSA 180 WL, QT-DE12 369
OSSA 300 WL, QT-DE12 369
OTOS GLAS POLE, E27 771
OUT-BEAM UP/ 931
OVAL 14 WL, UP/DOWN 851
OVAL 18 WL, UP/DOWN 851
OVALISK 100 POLE 765
OVALISK 75 POLE 765
OVALISK CL 834
OVALISK SENSOR WL 909
OVALISK WL 909

P

PANEL 60 CL, ROUND, DALI 181
PANEL 60 CL, ROUND, PHASE 181
PANEL 60 PD, ROUND, DALI 259
PANEL 60 PD, ROUND, PHASE 259
PANEL TRACK 1-PHASE, SQUARE 575
PANEL TRACK 1-PHASE, ROUND 575
PANTILO 28 PD, E27 247
PANTILO CONVEX 29 PD, E27 248
PANTILO CONVEX 40 PD, E27 249
PANTILO OVAL PD, E27 247
PANTILO PD, E27 247
PANTILO ROPE 19 TL, E27 454
PANTILO ROPE 19 CW, E27 405
PANTILO ROPE 19 PD, E27 245
PANTILO ROPE 20 PD, E27 245
PANTILO ROPE 27 CW, E27 405
PANTILO ROPE 27 FL, E27 455
PANTILO ROPE 27 PD, E27 245
PANTILO ROPE WL, G9 345
PANTILO SLIM TL, E27 453
PANTILO TL, E27 453
PARA 380 PD, E27 289
PARA CONE 14 1-PHASE, GU10 573
PARA CONE 14 1-PHASE, PD, GU10 573
PARA CONE 14 3-PHASE, GU10 645
PARA CONE 14 3-PHASE, PD, GU10 645
PARA CONE 20 PD, E27 281
PARA CONE 30 PD, E27 281
PARA CONE GL 1-PHASE, GU10 573
PARA CONE GL 3-PHASE, GU10 647
PARA CONE GL PD, GU10 647
PARA DOME PD, E27 288
PARA DOME SHADE 288
PATTA-F EL, SQUARE, PHASE 125
PATTA-F EL, ROUND, PHASE 124
PATTA-I 123
PATTA-I EL, SQUARE, PHASE 122
PATTA-I EL, SQUARE, PHASE 123
PATTA-I EL, ROUND, PHASE 122, 123
PEMA® WL 910, 911
PEMA® WL, E27 911
PHELIA 10 PD, E27 283
PHELIA 20 PD, E27 283
PHELIA FL, E27 461
PHELIA WL, QPAR51 386
PHOTONI 45 POLE, E27 707
PHOTONI 75 POLE, E27 707
PHOTONI CL, E27 827
PHOTONI CYL 45 POLE, E27 705
PHOTONI CYL 75 POLE, E27 705
PHOTONI CYL CL, E27 827
PHOTONI CYL WL, E27 844
PHOTONI WL, E27 844
PHOTONIA POLE, E27 771
PHOTONIA WL, E27 933
PIKA DL, ROUND, QPAR51, PIVOTING 106
PIKA DL, ROUND, QPAR51, RIGID 106
PLASTRA 101 WL, E14 359
PLASTRA 104 CL, E27 167
PLASTRA 104 WL, QT14 359
PLASTRA 105 CL, E27 167
PLASTRA CL 166
PLASTRA CL, PHASE 167
PLASTRA RL, SQUARE, QPAR51 112
PLASTRA RL, ROUND, QPAR51 112
PLASTRA WL, CUBE, QT14 354
PLASTRA WL, CURVE, QT-DE12 359
PLASTRA WL, E14 355
PLASTRA WL, SQUARE 357
PLASTRA WL, SEMICIRCULAR 355
PLASTRA WL, QPAR51 357
PLASTRA WL, RECTANGULAR, QT-DE12 354
PLASTRA WL, ROUND SHIELD 357
POWER TRAIL-LITE® EL, SQUARE 987
POWER TRAIL-LITE® EL, ROUND 987
PURI 2.0 1-PHASE, TRIPLE TRACK SET, QPAR51 544
PURI 2.0 CONE 1-PHASE, PD, QPAR51 543
PURI 2.0 CONE 1-PHASE, QPAR51 541
PURI 2.0 CONE 3-PHASE, PD, QPAR51 609
PURI 2.0 CONE 3-PHASE, QPAR51 607
PURI 2.0 CONE CW, DOUBLE ASYM., QPAR51 391
PURI 2.0 CONE CW, DOUBLE LONG, QPAR51 390
PURI 2.0 CONE CW, QPAR51 390
PURI 2.0 CONE CW, QUADRUPLE LONG, QPAR51 391
PURI 2.0 CONE CW, SWITCH, SINGLE, QPAR51 391
PURI 2.0 CONE CW, SINGLE, QPAR51 391
PURI 2.0 CONE CW, TRIPLE LONG, QPAR51 391
PURI 2.0 CONE CW, TRIPLE ROUND, QPAR51 391
PURI 2.0 CONE SHADE 395, 545, 611
PURI 2.0 DOME 1-PHASE, PD, QPAR51 543
PURI 2.0 DOME 1-PHASE, QPAR51 541
PURI 2.0 DOME 3-PHASE, PD, QPAR51 609
PURI 2.0 DOME 3-PHASE, QPAR51 607
PURI 2.0 DOME CW, DOUBLE ASYM., QPAR51 393
PURI 2.0 DOME CW, DOUBLE LONG, QPAR51 392
PURI 2.0 DOME CW, QPAR51 392

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

PURI 2.0 DOME CW, QUADRUPLE LONG, QPAR51 393
PURI 2.0 DOME CW, SWITCH, SINGLE, QPAR51 393
PURI 2.0 DOME CW, SINGLE, QPAR51 393
PURI 2.0 DOME CW, TRIPLE LONG, QPAR51 393
PURI 2.0 DOME CW, TRIPLE ROUND, QPAR51 393
PURI 2.0 DOME SHADE 395, 545, 611
PURI 2.0 TUBE 1-PHASE, PD, QPAR51 543
PURI 2.0 TUBE 1-PHASE, QPAR51 541
PURI 2.0 TUBE 3-PHASE, PD, QPAR51 609
PURI 2.0 TUBE 3-PHASE, QPAR51 607
PURI 2.0 TUBE CW, DOUBLE ASYM., QPAR51 389
PURI 2.0 TUBE CW, DOUBLE LONG, QPAR51 388
PURI 2.0 TUBE CW, QPAR51 388
PURI 2.0 TUBE CW, QUADRUPLE LONG, QPAR51 389
PURI 2.0 TUBE CW, SWITCH, SINGLE, QPAR51 389
PURI 2.0 TUBE CW, SINGLE, QPAR51 389
PURI 2.0 TUBE CW, TRIPLE LONG, QPAR51 389
PURI 2.0 TUBE CW, TRIPLE ROUND, QPAR51 389
PURI 2.0 TUBE SHADE 395, 545, 611
PURI CW, DOUBLE, QPAR51 397
PURI CW, QPAR51 397
PURI CW, QUAD, QPAR51 397
PURI CW, SINGLE, QPAR51 397
PURI CW, TRIPLE, QPAR51 397
PURI TRACK 1-PHASE, QPAR51 547
PURI TRACK 3-PHASE, QPAR51 613

Q

Q-LINE® PD 263
Q-LINE® PD, 1M, BAP, PHASE 263
Q-LINE® PD, 2M, BAP, PHASE 263
Q-LINE® WL 340
Q-RING WL, PHASE 848
Q-RING WL, SENSOR 848
QUAD FRAME 14 WL 365
QUAD FRAME 19 WL 365
QUAD POLE 798
QUAD PRO 60 POLE, DALI 713
QUAD PRO 90 POLE, DALI 713
QUAD UP/DOWN 15 WL 884
QUAD WL 884
QUADRASYL 75 POLE, TCR-TSE 797
QUADRASYL WL, TCR-TSE 935
QUADRULO CL 903
QUADRULO FL 747
QUADRULO SENSOR WL, E27 901
QUADRULO WL 901
QUADRULO WL, E27 903
QUIMERA PD, 1-PHASE 533
QUIMERA PD, PHASE 187
QUIMERA TL 439
QUIMERA WL, PHASE 295

R

R-CUBE 35 POLE, PHASE 709
R-CUBE 75 POLE, PHASE 709
R-CUBE WL, PHASE 843
RASTERLYS 70 POLE, PHASE 731
RASTERLYS WL, PHASE 853
ROCCI 200 EL, SQUARE 995
ROCCI 200 EL, ROUND 995
ROCCI EL, SQUARE 993
ROCCI EL, ROUND 993
ROTOBALL 25 FL, E27 769
ROTOBALL 25 PD, E27 287
ROTOBALL 40 FL, E27 769
ROTOBALL 40 PD, E27 287
ROTOBALL 50 FL, E27 769
ROTOBALL 50 PD, E27 287
ROX ACRYL 30 POLE, E27 781
ROX ACRYL 60 POLE, E27 781
ROX ACRYL 90 POLE, E27 781
ROX CL, GX53 837
ROX CL, QPAR111 837
ROX WL, UP/DOWN, QPAR111 919
RUBA CW 946
RUSTY® 40 POLE 752
RUSTY® 40 POLE, E27 753, 756
RUSTY® 70 POLE 753
RUSTY® 70 POLE, E27 753, 756
RUSTY® CONE 24 FL, E14 755
RUSTY® CONE 40 POLE, E27 755
RUSTY® CONE 70 POLE, E27 755
RUSTY® PATHLIGHT 40 POLE 751
RUSTY® PATHLIGHT 70 POLE 751
RUSTY® PATHLIGHT POLE, TCR-TSE 750
RUSTY® SLOT 50 POLE 748
RUSTY® SLOT 50 POLE, E27 749
RUSTY® SLOT 80 POLE 748
RUSTY® SLOT 80 POLE, E27 749
RUSTY® UP/DOWN WL, SQUARE 885
RUSTY® UP/DOWN WL, ROUND 885

S

S-CUBE 75 POLE, PHASE 708
S-CUBE CW, PHASE 843
S-CUBE POLE, PHASE 708
S-TUBE 32 POLE, GU10 701
S-TUBE 75 POLE, GU10 701
S-TUBE CW 857
SAMRINA SP, SINGLE, GU10 811
SEDO 14 WL 334
SEDO 21 WL 334
SENSER 12 CW, SQUARE, PHASE 421
SENSER 12 CW, ROUND, PHASE 423
SENSER 12 EL, SQUARE 103
SENSER 12 EL, ROUND 101
SENSER 18 CW, SQUARE, PHASE 421
SENSER 18 CW, ROUND, PHASE 423
SENSER 18 EL, SQUARE 103
SENSER 18 EL, ROUND 101
SENSER 24 CW, SQUARE, PHASE 421
SENSER 24 CW, ROUND, PHASE 423
SENSER 24 EL, SQUARE 103
SENSER 24 EL, ROUND 101
SHELL 30 WL, PHASE 367
SIGHT 115 CW 431
SIGHT EASY 3-PHASE 641
SIGHT EASY 3-PHASE, DALI 641
SIGHT EVO 3-PHASE 637
SIGHT EVO 3-PHASE, DALI 639
SIGHT MOVE 3-PHASE 643
SIGHT MOVE 3-PHASE, DALI 643
SIGHT PANEL 3-PHASE 640
SIGHT PANEL 3-PHASE, DALI 640
SIGHT TRACK 3-PHASE 642
SIGHT TRACK 3-PHASE, DALI 642
SIMA CW, SQUARE, PHASE 425
SIMA CW, SQUARE, SENSOR 425
SITRA 360 CW, TCR-TSE 942
SITRA 360 POLE, TCR-TSE 799
SITRA 360 SPIKE SP, DOUBLE, TCR-TSE 823
SITRA 360 SPIKE SP, SINGLE, TCR-TSE 823
SITRA CL, TCR-TSE 836
SITRA CUBE WL, TCR-TSE 881
SITRA L WL, UP/DOWN, SQUARE 881
SITRA M WL, UP/DOWN, SQUARE 881
SITRA S WL, SINGLE, SQUARE 879
SITRA WL, TCR-TSE 917
SITRA WL, UP/DOWN, TCR-TSE 917
SLOTBOX 40 POLE 791
SLOTBOX 70 POLE 791
SLOTS 45 POLE 787
SLOTS 65 POLE 787
SMALL PLOT COVER, 2-PACK 989
SMALL PLOT COVER, 4-PACK 989
SMALL PLOT MODULES 989
SOLASTO EL, SQUARE 997
SOLASTO EL, ROUND 997
SOLID CUBE WL, QT14 375
SOMNILA FLEX WL, LEFT 383
SOMNILA FLEX WL, RIGHT 383
SOMNILA SPOT WL, LEFT 382
SOMNILA SPOT WL, RIGHT 383
SOPRANA CL, E27 165
SPOT 79 CW, QPAR51 419
SQUARE POLE 30 POLE, E27 785
SQUARE POLE 60 POLE, E27 785
SQUARE POLE 90 POLE, E27 785
SQUARE TURN WL, G9 935
SQUARE WL, E27 900
SUN 20 CL, E27 128
SUN 20 PD, E27 192
SUN 30 CL, E27 129
SUN 30 PD, E27 193
SUN 40 PD, E27 195
SUN FL, G9 449
SUN MIRROR WL, QUAD 299
SUN MIRROR WL, TRIPLE 299
SUN TL, G9 449
SUN WL, DOUBLE, G9, SQUARE 305
SUN WL, G9, SQUARE 302
SUN WL, G9, ROUNDED 303
SUN WL, UP, G9, SQUARE 305
SYNA GARDEN SP 807
SYNA PLANT SP 807
SYNA SHADE SP, GU10 805
SYNA SP 807
SYNA WIDE SP 804

T

T-TUBE 70 POLE, GU10, DOUBLE 703
T-TUBE 70 POLE, GU10, DOUBLE, SENSOR 702
T-TUBE 70 POLE, GU10, SINGLE 703
T-TUBE 70 POLE, GU10, SINGLE, SENSOR 702
T-TUBE WL GU10, DOUBLE 855
T-TUBE WL GU10, DOUBLE, SENSOR 854
T-TUBE WL GU10, SINGLE 855
T-TUBE WL GU10, SINGLE, SENSOR 854
TAHA II 45 POLE, PHASE 763
TAHA II 70 POLE, SENSOR 763
TAHA II WL, PHASE 908
TAHA II WL, SENSOR 908
TAHA LIGHT SET, BATTERY-POWERED 447, 699
TELESKOP LV, QR-C51 520
TENORA CL, E27 164
TENSEO LOW-VOLTAGE CABLE 4 MMA 514, 515
TERANG 200 CW 946
THEO BRACKET CW 942
THEO BRACKET SP 821
THEO PATHLIGHT 73 POLE, DOUBLE 801
THEO PRO L WL, SINGLE, DALI P1 869
THEO PRO L WL, SINGLE, DALI P2 871
THEO PRO L WL, UP/DOWN, DALI P1 870

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

THEO PRO L WL, UP/DOWN, DALI P2 _____ 871
THEO PRO S WL, SINGLE, DALI P1 _____ 867
THEO PRO S WL, SINGLE, DALI P2 _____ 869
THEO PRO S WL, UP/DOWN, DALI P1 _____ 867
THEO PRO S WL, UP/DOWN, DALI P2 _____ 869
THEO UP/DOWN WL, QPAR51 _____ 375, 863
THEO WL, QPAR51 _____ 864
TINY SUN TL _____ 451
TODAY PRO DISPLAY _____ 936
TRAIL-LITE® 60 EL _____ 985
TRAIL-LITE® 60 EL, SINGLE _____ 985
TRILEDO CL, DOUBLE, SQUARE _____ 135
TRILEDO CL, DOUBLE, SQUARE, QPAR51 __ 137
TRILEDO CL, SINGLE, SQUARE _____ 135
TRILEDO CL, SINGLE, SQUARE, QPAR51 ___ 137
TRILEDO CL, SINGLE, ROUND _____ 135
TRILEDO CL, SINGLE, ROUND, QPAR51 ____ 137
TRUKKO 60 WL _____ 333
TRUKKO 80 WL, ROUND _____ 333
TRUKKO 90 WL _____ 333
TRUKKO WL, ROUND _____ 332
TRUKKO WL,RECTANGULAR _____ 332
TRUST 30 POLE _____ 779
TRUST 60 POLE _____ 779

U

UNIVERSAL DOWNLIGHT COVER, PIVOTING, SQUARE, IP20 _____ 15
UNIVERSAL DOWNLIGHT COVER, PIVOTING, ROUND, IP20 _____ 15
UNIVERSAL DOWNLIGHT COVER, RIGID, SQUARE, IP65 _____ 15
UNIVERSAL DOWNLIGHT COVER, RIGID, ROUND, IP65 _____ 15
UNIVERSAL DOWNLIGHT DL, PHASE _____ 15
UNIVERSAL TRACKSPOT L, 3-PHASE _____ 631
UNIVERSAL TRACKSPOT M, 3-PHASE _____ 631

V

VAP SLIM 30 POLE, E27 _____ 783
VAP SLIM 60 POLE, E27 _____ 783
VAP SLIM 90 POLE, E27 _____ 783
VARU EL, QPAR51 _____ 113
VARYT CL, E14 _____ 131
VARYT OPAL GLASS SHADE __ 131, 189, 301, 437
VARYT GLASS SHADE
FOR PD, WL, CL, TL _____ 131, 189, 301, 437
VARYT PD, E14 _____ 189
VARYT TL, E14 _____ 436
VARYT WL, E14 _____ 301
VERLUX EL, SQUARE, PHASE _____ 105
VILUA L WL _____ 915
VILUA S WL _____ 915
VILUA WL, UP/DOWN _____ 915
VINOLINA ONE TL, BATTERY _____ 443, 695
VINOLINA TL, BATTERY _____ 443, 695
VINOLINA TWO IEC CONNECTION
CABLE WITH SAFETY PLUG _____ 445, 697
VINOLINA TWO CHARGING BASE ____ 445, 697
VINOLINA TWO TL, BATTERY, DTW ___ 445, 697

W

WALLYX WL, QPAR51 _____ 920
WL 106 E14 _____ 336
WL 149 WL, PHASE _____ 367
WL 149 WL, QT-DE12 _____ 367
WORKLIGHT EASY FL 940 _____ 463
WORKLIGHT FL _____ 465
WORKLIGHT PD, DALI _____ 257
WORKLIGHT PRO 120 PD, DALI _____ 257
WORKLIGHT PRO 150 PD, DALI _____ 257
WORKLIGHT PRO FL DOUBLE _____ 463
WORKLIGHT PRO FL SINGLE _____ 463
WORKLIGHT TL _____ 465
WORO EL _____ 121
WUD PD, E27, CYLINDRICAL _____ 191
WUD PD, E27, SEMICIRCULAR _____ 191
WUD TL, E27 CYLINDRICAL _____ 435
WUD WL, E27 CYLINDRICAL _____ 361

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SYMBOLS KEY

Recommendations
Displays accessories and recommended bulbs for the chosen product

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of..."

Protection classes
- Protection class I/Protective conductor
- Protection class II/Protection by double or reinforced insulation
- Protection class III/Protection by extra-low voltage

Dimmable with:
- C = Trailing-edge phase dimmer
- L = Leading-edge phase dimmer
- Uni = Universal dimmer
- 1–10 V
- Dali = DALI bus system
- Switch = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

Impact resistance rating:
The impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on concrete installation.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Connected lighting:
- Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

- Products with integrated LEDs
- Products with light socket
- Identifies smart accessories and light sources that are compatible® with SLVconnect

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

STAY WELL-INFORMED

Scan the QR code, select your country and get our latest prices. Visit us at **slv.com**

Unless otherwise agreed, all deliveries and services are subject to our General Terms and Conditions, which can be viewed on our website at **slv.com**.

SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value-added tax or procurement prices.

*Please note the guarantee conditions available at
slv.com → Service → Downloads → Guarantee conditions.

Many of the products shown in this catalogue are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this catalogue are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. All product descriptions/information are therefore subject to change and errors excepted.
All of the products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This catalogue contains a general range and is not country-specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes.

The presentation of our lights with realistic photos showing them in use is possible thanks to the kind cooperation and agreement of the owners or designers of the environments depicted in the images. We would like to take this opportunity to thank all those who consented to having photos taken and used.

The publication of this catalogue invalidates the prices specified in previous lists and catalogues. SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value-added tax or procurement prices.

All prices are recommended retail prices (RRP) and indicated without VAT.

Publisher
SLV GmbH, Germany
Daimlerstrasse 21-23
52531 Übach-Palenberg
T +49 (0) 2451 4833 - 0
slv.com

Copyright
© SLV GmbH, 2025

FSC
www.fsc.org
MIX
Paper | Supporting responsible forestry
FSC® C011124

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

SLV GmbH | Daimlerstraße 21-23, 52531 Übach-Palenberg | Germany | +49 (0) 2451 4833 - 333 | info@slv.de
SLV Österreich GmbH | Zaunergasse 4/4. Stock, 1030 Wien | Austria | +49 (0)2451 4833 - 355 | info@slv.de
SLV Belgium N.V. | Herentalsebaan 429,2160 Wommelgem | Belgium | +32 (0)3 385 30 08 | info.be@slv.com
SLV France S.A.S. | 88 rue Henri Dépagneux, ZAC du Martelet - Bât B, 69400 Limas | France | +33 4 74 02 71 20 | info-fr@slv.com
SLV Lighting UK Ltd. | Unit E Chiltern Park, Boscombe Road, LU5 4LT Dunstable | UK | +44 (0)203 968 11 00 | info@uk.slv.com
SLV Italia s.r.l. | Via Lecco, 19/D, 23896 Bevera di Sirtori (LC) | Italy | +39 039 5983575 | infoit@slv.com
SLV Nederland BV | Sint Jansweg 15, 5928 RC Venlo | The Netherlands | +31 773204343 | info.nl@slv.com
SLV Poland sp. z.o.o. ul. | Aleje Jerozolimskie 200, 02-486 Warsaw | Poland | +48 22 722-49-75 | slv@slv.pl
SLV Portugal, LDA. | Rua Margarida de Abreu N°15 - B, Casal Vistoso, 1900-410 Lisboa | Portugal | +351 210 185 961 | info@pt.slv.com
SLV Swiss SA | Route du Bey 6, 1847 Rennaz | Switzerland | +41 218113232 | info@slv-swiss.ch
SLV d.o.o. | Barjanska cesta 50, 1000 Ljubljana | Slovenia | +386 1 2009 730 | info@slv.si
Soluciones Luminotécnicas Visulales, S.L. | Antic Camí Ral de Valencia, 38, L17, 8860 Castelldefels Barcelona | Spain | +34 931 168 161 | info@slv.es
SLV Czech s.r.o. | V Sedlci 28/17,160 00 Praha 6 - Sedlec | Czech | +420 739 282 151 | info@cz.slv.com
SLV Nordics | Daimlerstraße 21-23, 52531 Übach-Palenberg | Germany | +46 70 854 9770 | info@nordics.slv.com

slv.com

TEL: 020 8 542 1471 EMAIL:SALES@INTALITE.CO.UK

4024163324250
2000432