

PLEASE BE AWARE THAT THIS PDF HAS BEEN EDITED SUCH THAT  
THE STARTING INDEX PAGE NUMBERS JUMP TO THE PRODUCT  
PAGE AND THE PRODUCT SKU'S ARE HYPERLINKED TO THE  
PRODUCT WEBSITE FOR FURTHER INFORMATION, PLEASE HOLD  
'CTRL' (WINDOWS) OR 'CMD' (MAC) WHILE TO CLICKING PRODUCT  
HYPERLINKS TO OPEN PRODUCT IN NEW TAB

# BIG WHITE<sup>®</sup> 2027

SLV LIGHTING CATALOGUE



EXPERIENCE LIGHT

TEL: 020 8 542 1471 EMAIL: SALES@INTALITE.CO.UK

## PROFESSIONAL LIGHTING SOLUTIONS FOR YOUR DAY-TO-DAY PROJECTS

With SLVtec®, we bring together our technical expertise in a standalone portfolio for professional, project-based lighting. SLVtec® stands for functional and energy-efficient lighting solutions that have been specially developed for industrial, office and retail applications.

SLVtec® products combine uncompromising quality with innovative features, high availability and quick, straightforward installation. Whether it's a new build, a refurbishment or a special application: with SLVtec®, you can tackle any project with confidence and efficiency.



### PLANNED FROM AN ECONOMIC PERSPECTIVE

High efficiency, a long service life and reliable product quality ensure predictable project and operating costs.



### AVAILABLE SOON

High stock availability and fast delivery times ensure reliable project scheduling.



### EASY TO INSTALL

Intelligent mounting systems, tool-free cabling and innovative quick-release connectors make installation quick and easy, saving time and effort.



### FLEXIBLY ADAPTED

Multi-lumen and multi-colour functions allow for a wide range of options and make it easier to adapt to different project requirements.

**BROWSE ONLINE NOW AND ORDER THE NEW CATALOGUE – AT [SLV.COM](https://www.slv.com)**



## OUR HIGHLIGHTS



### EASYLIGHT & RETRO

LED continuous-row lighting systems with up to 200 lm/W, 100,000 h service life and tool-free installation



### TUBULAR

Robust wet-room lights with IP66 & IP69K ratings, HACCP compliance and up to 160 lm/W with a service life of 100,000 hours



### P LINE WORK LIGHT

Office lighting with a UGR < 19, separate up/downlight controls and a service life of 100,000 hours



## OUR BIG WHITE® 2027

### YOUR PORTFOLIO FOR MODERN LIGHTING PROJECTS

Nowadays, lighting projects require more than just products. You need flexible solutions that work reliably, can be installed quickly and are optimally tailored to the requirements of modern projects. That is precisely what BIG WHITE® 2027 stands for.

As SLV's ultimate portfolio showcase, this year's catalogue brings together tried-and-tested classics with innovative new products – designed for electricians, planners and partners. From indoor and outdoor lighting to residential and commercial applications, here you'll find the perfect lighting solution for each of your projects. In day-to-day project work, the time and budget for bespoke solutions are often lacking. That is why we offer you a wide range of ready-to-use lighting solutions that simplify your planning and significantly speed up your installations. The BIG WHITE® 2027 highlights include new products such as MEDO® SLIM, MEDO® HYVE, the new LED STRIPS range, ENOLA® 2.0 and the innovative curved 48 V track system. They epitomise SLV's commitment to bringing you functional performance, contemporary design and easy-to-install solutions, all from a single source.



Smart lighting is also becoming increasingly important. With SLVconnect®, you have access to an easily integrable smart lighting portfolio featuring products that fit seamlessly into your customers' existing smart home systems – for future-proof lighting concepts that make life easier. Our values – which have characterised SLV for decades – remain at the heart of what we do: reliable quality, practical solutions and strong partnerships. Many products are also available as handy sets comprising a light and a light bulb – making ordering easier and offering attractive price savings.



5-year  
guarantee



German  
engineering



Delivery within  
24 hours in Germany |  
48 hours in the EU



98% product  
availability

BIG WHITE® 2027 is more than just a catalogue. It is a practical tool, designed to help you implement lighting solutions efficiently, reliably and with maximum planning certainty.

# SLVconnect®

## SMART LIGHTING THAT INTEGRATES SEAMLESSLY INTO EXISTING SYSTEMS.

SLVconnect® is our smart lighting portfolio, designed for easy integration into existing systems. Thanks to open standards and compatible ecosystems, you can effortlessly integrate SLVconnect® into any of your customers existing smart home environments – with no additional planning effort and with hassle-free installation. This is how you can offer your customers reliable, smart lighting solutions and complete every project efficiently.

### WHY SLVconnect®?



#### Open & flexible

Compatible with leading smart home ecosystems and gateways.



#### Easy to integrate

Ideal for existing installations – with no need to change systems.



#### Easy to retrofit

Transforms conventional lighting into smart lighting solutions.



#### Designed for professionals

Professional lighting expertise meets modern connectivity.

### HOW IT WORKS



Works with  
**Apple Home**



**Google Home**



Your smart home system



Gateway / Hub



SLVconnect®

### THE SLVconnect® PORTFOLIO

The perfect solution for every requirement – from smart light bulbs to integrated lights:

#### Smart light bulbs

- Quick retrofit solutions
- Tunable white and RGBW options

#### Smart converters

- Connecting existing installations to smart ecosystems
- Compatible with DALI and phase dimming

#### Smart lights

- Integrated smart lighting solutions
- Integrated smart features

## SMART LIGHTING FOR MODERN PROJECTS

With SLVconnect®, you can add smart lighting control to new and existing installations – it's easy to integrate with no added fuss. This enables you to offer your customers greater convenience and flexibility, and set your projects apart with modern connected lighting solutions.



### Greater convenience. Less effort.

- Control via app, voice or automation
- Customised lighting scenarios
- Smart routines for everyday life
- Integration into existing infrastructures



### Energy-efficient and reliable

- Light only when it is needed
- Smart timing and automation
- Efficient LED technology
- Faster installation
- Reliable system operation



### Safety and greater control

- Presence simulation when nobody's in
- Automated indoor and outdoor lighting
- Remote access and control
- Compatible with leading ecosystems

## FROM CONVENTIONAL TO SMART


With SLVconnect®, you can seamlessly integrate professional lighting solutions into modern smart home environments – for intelligent lighting concepts that are easy to plan, install on the customer's premises and expand at any time.

# NAVIGATION

## CATEGORY OVERVIEW

Find the right light in the overview at the start of each chapter or in the application index

You can see the complete overview from page 922 onwards.




## NUMERICAL & ALPHABETICAL INDEX

You can also find your light quickly in the numerical or alphabetical index.



## PRODUCT CATEGORIES

New icons and colour codes allow you to navigate quickly to the relevant section.



# REACH YOUR GOAL FASTER

## RECOMMENDATIONS

Discover the right accessories and compatible light bulbs for your selected products.



## COMBINE TO SAVE

Many products are also available as handy sets comprising a light and a light bulb.



Better value  
as a set at  
[slv.com](http://slv.com)



## DISCOVER MORE ONLINE

At [slv.com](http://slv.com), you'll find our complete product range, including all the key product information, digital planning aids and stock availability, right through to configurators and costing tools.

**PLEASE NOTE:** all measurements are given in **cm**.

## INDOOR

|                                                                                   |                                        |     |
|-----------------------------------------------------------------------------------|----------------------------------------|-----|
|  | Recessed lights .....                  | 8   |
|  | Ceiling lights .....                   | 124 |
|  | Pendant lights .....                   | 170 |
|  | Wall and ceiling lights .....          | 274 |
|  | Table and floor lights .....           | 396 |
|  | 48 V system .....                      | 420 |
|  | Low-voltage cable system .....         | 468 |
|  | Single-phase high-voltage track .....  | 478 |
|  | Three phase high-voltage track .....   | 530 |
|  | Profile solutions and LED strips ..... | 606 |

## OUTDOOR

|                                                                                     |                                      |     |
|-------------------------------------------------------------------------------------|--------------------------------------|-----|
|  | Mobile lights and floor lights ..... | 634 |
|  | Spotlights .....                     | 730 |
|  | Ceiling lights .....                 | 752 |
|  | Wall and ceiling lights .....        | 766 |
|  | Recessed lights .....                | 862 |
|  | Recessed floor lights .....          | 870 |

## ACCESSORIES

|                                                                                     |                       |     |
|-------------------------------------------------------------------------------------|-----------------------|-----|
|  | Light bulbs .....     | 894 |
|  | Accessory parts ..... | 906 |

## NAVIGATION

|                          |     |
|--------------------------|-----|
| Application index .....  | 922 |
| Numerical index .....    | 959 |
| Alphabetical index ..... | 977 |







# INDOOR | RECESSED LIGHTS

|                                                                                          |                                                                                          |                                                                                          |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <br>NEW | <br>NEW | <br>NEW |    |    |    |
| LED<br>UNIVERSAL<br>DOWNLIGHT SLIM   12                                                  | LED<br>UNIVERSAL<br>DOWNLIGHT FIX   12                                                   | LED<br>UNIVERSAL<br>DOWNLIGHT MOVE   12                                                  | LED<br>KADUX   14                                                                   | LED<br>KADUX   15                                                                    |                                                                                       |
|         |         |         |   |   |                                                                                       |
| LED<br>KADUX   15                                                                        | SECKET<br>KADUX   16-17                                                                  |                                                                                          | LED<br>NUMINOS®   18-26                                                             | LED<br>NUMINOS® MOVE   28-36                                                         |                                                                                       |
|         |        |        |    |     |     |
| LED<br>NUMINOS® GIMBLE   38-46                                                           | LED<br>DYSKO   57                                                                        | LED<br>SECKET<br>NEW TRIA®   58-63, 66-73                                                |                                                                                     |                                                                                      |                                                                                       |
|       |       |       |  |   |   |
| LED<br>NEW TRIA® UNIVERSAL   64-65                                                       | SECKET<br>NEW TRIA®   86                                                                 |                                                                                          | SECKET<br>NEW TRIA®   87                                                            | LED<br>GLENOS® PRO   87                                                              |                                                                                       |
|       |       |       |  |   |   |
| LED<br>MEDO®   88-89                                                                     | LED<br>HORN MINI   90                                                                    | SECKET<br>HORN   91-93                                                                   |                                                                                     |                                                                                      | SECKET<br>HORN 1   92                                                                 |
|       |       |       |  |  |  |
| SECKET<br>HORN T   93                                                                    | LED<br>HORN MAGNA                                                                        | LED<br>SENSOR 2.0   94-101                                                               | LED<br>DOWNLIGHT VARIO   102-103                                                    |                                                                                      | VERLUX   104                                                                          |





LED

DL 126 | 105



SECKET

PIKA | 105



LED

OCULUS | 107



LED

OCCULDAS | 107



SECKET

ENOLA® 2.0 | 108-109



SECKET

ENOLA® 2.0 | 108-109



LED

KARPO | 110



LED

GRIP! | 111



LED

GRIP! | 111



SECKET

PLASTRA | 113



SECKET

VARU | 113



SECKET

DOLIX OUT | 114-115



LED

KINI | 115



LED

AKALO D83 | 115



LED

FRAME BASIC |  
116-117



LED

FRAME CURVE | 117



LED

NOTAPO | 119



LED

DOWNUNDER PUR |  
120-121



LED

MOBALA | 121



LED

WORO | 121




LED

PATTA-I | 122




LED

PATTA-I | 122-123




LED

PATTA-F | 123



## UNIVERSAL DOWNLIGHT SLIM RL, PHASE



220-240 V ~50/60 Hz | 185 mA  
Total Wattage: 6 W  
Material: Aluminium/Plastic PC


- Airtight and suitable for installation in insulation
- Complies with the requirements of RE2020 and NF C15-100



| 6 W | 2700 K | 3000 K | 4000 K |
|-----|--------|--------|--------|
|     | 560 lm | 590 lm | 580 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1012624   | 24.00 |
| ○ white | 1012623   | 24.00 |

## UNIVERSAL DOWNLIGHT FIX RL, LED, PHASE, IP65



220-240 V ~50/60 Hz | 60 mA  
Total Wattage: 5 W / 7 W  
Material: Steel/PC plastic


- Airtight and suitable for installation in insulation.
- Tested for use in specified fire-retardant suspended ceilings
- Lockable springs for easier installation



| 5 W | 2700 K | 3000 K | 4000 K | 6500 K |
|-----|--------|--------|--------|--------|
|     | 470 lm | 490 lm | 500 lm | 490 lm |
| 7 W | 2700 K | 3000 K | 4000 K | 6500 K |
|     | 670 lm | 680 lm | 690 lm | 680 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011209   | 26.00 |
| ○ white | 1011208   | 26.00 |

## UNIVERSAL DOWNLIGHT MOVE RL, LED, PHASE



220-240 V ~50/60 Hz | 60 mA  
Total Wattage: 5 W / 7 W  
Material: Steel/PC plastic

- Tested for use in specified fire-retardant suspended ceilings,
- Lockable springs for easier installation



| 5 W | 2700 K | 3000 K | 4000 K | 6500 K |
|-----|--------|--------|--------|--------|
|     | 470 lm | 490 lm | 500 lm | 490 lm |
| 7 W | 2700 K | 3000 K | 4000 K | 6500 K |
|     | 670 lm | 680 lm | 690 lm | 680 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011211   | 26.00 |
| ○ white | 1011210   | 26.00 |



## UNIVERSAL DOWNLIGHT COVER, RIGID, ROUND, IP65



Ø: 8.8 cm  
H: 0.5 cm  
Material: Polycarbonate (PC)

- IP65 in conjunction with the universal downlight module

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1008067   | 3.00 |
| ○ white  | 1008068   | 3.00 |
| ● gold   | 1008070   | 4.00 |
| ● chrome | 1008069   | 4.00 |

## UNIVERSAL DOWNLIGHT COVER, RIGID, SQUARE, IP65



L: 8.8 cm  
W: 8.8 cm  
H: 0.6 cm  
Material: Plastic PC

- IP65 in conjunction with the universal downlight module

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1008096   | 3.00 |
| ○ white  | 1008095   | 3.00 |
| ● gold   | 1008098   | 4.00 |
| ● chrome | 1008097   | 4.00 |

## UNIVERSAL DOWNLIGHT COVER, PIVOTING, ROUND, IP20



Ø: 8.8 cm  
H: 0.4 cm  
Material: Polycarbonate (PC)

| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1007091   | 3.00 |
| ○ white     | 1007092   | 3.00 |
| ● gold      | 1007191   | 4.00 |
| ● aluminium | 1007093   | 4.00 |

## UNIVERSAL DOWNLIGHT COVER, PIVOTING, SQUARE, IP20




L: 8.8 cm  
W: 8.8 cm  
H: 0.4 cm  
Material: Polycarbonate (PC)

| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1007184   | 4.00 |
| ○ white     | 1007185   | 4.00 |
| ● gold      | 1007194   | 5.00 |
| ● aluminium | 1007186   | 5.00 |


1008571 14

## KADUX DL, SINGLE, DALI

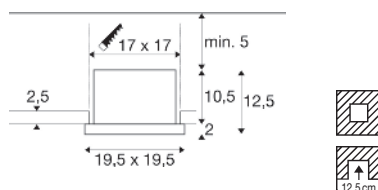

220-240 V ~50/60 Hz | 700 mA  
Total wattage: 27 W  
Material: Aluminium/Steel

## KADUX DL, DOUBLE, DALI

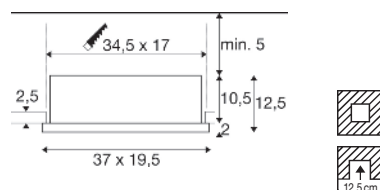

220-240 V ~50/60 Hz | 1400 mA  
Total wattage: 54 W  
Material: Aluminium/Steel



|         |      |         |
|---------|------|---------|
| 1008567 | Down | 3000 K  |
| 1008568 |      | 3050 lm |
| 1008569 | Down | 4000 K  |
| 1008570 |      | 3350 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black 3000 K | 1008568   | 201.00 |
| ● black 4000 K | 1008570   | 201.00 |
| ○ white 3000 K | 1008567   | 201.00 |
| ○ white 4000 K | 1008569   | 201.00 |




|         |      |         |
|---------|------|---------|
| 1008571 | Down | 3000 K  |
|         |      | 3150 lm |
| 1008572 | Down | 3000 K  |
|         |      | 3250 lm |
| 1008573 | Down | 4000 K  |
|         |      | 3400 lm |
| 1008574 | Down | 4000 K  |
|         |      | 3400 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black 3000 K | 1008572   | 348.00 |
| ● black 4000 K | 1008574   | 348.00 |
| ○ white 3000 K | 1008571   | 348.00 |
| ○ white 4000 K | 1008573   | 348.00 |



## KADUX

DL, SINGLE, PHASE

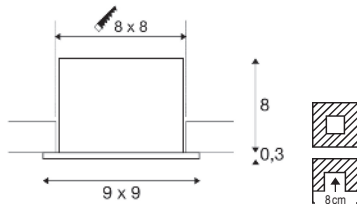

220-240 V ~50/60 Hz | 350 mA  
Total wattage: 8.3 W  
Material: Aluminium/Acrylic

- Spring clips




3000 K  
770 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007551   | 73.00 |
| ○ white | 1007552   | 73.00 |

## KADUX

DL, DOUBLE, PHASE

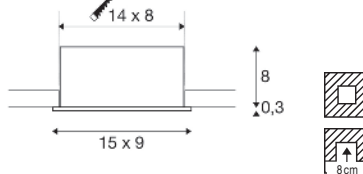

220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 14 W  
Material: Aluminium/Steel

- Spring clips




Down 3000 K  
775 lm

Down 3000 K  
775 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007559   | 138.00 |
| ○ white | 1007560   | 138.00 |

## KADUX

DL, TRIPLE, PHASE

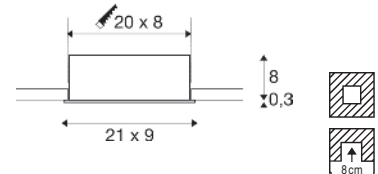

220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 20 W  
Material: Aluminium/Steel

- Spring clips



Down 3000 K  
775 lm


Down 3000 K  
775 lm

Down 3000 K  
775 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007567   | 184.00 |
| ○ white | 1007568   | 184.00 |

# KADUX

EL, SINGLE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Steel

- Spring clips




Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 115510    | 29.00 |
| ○ white | 115511    | 29.00 |

# KADUX

EL, DOUBLE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Steel

- Spring clips




Base: 2xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 115520    | 53.00 |
| ○ white | 115521    | 53.00 |

# KADUX

EL, TRIPLE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Steel

- Spring clips



Base: 3xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 115530    | 72.00 |
| ○ white | 115531    | 72.00 |



GU10 | 6 W | 36°  
360lm | 2200 K-2700 K | EEC = G



Prod. no.: 1005273 9.00 GBP



GU10 | 6 W | 38°  
450lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 6 W | 38°  
450lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5 W | 45°  
350lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP








## KADUX

EL, SINGLE, QPAR111

## KADUX

EL, DOUBLE, QPAR111



220-240 V ~50/60 Hz  
Material: Aluminium/Steel

- Spring clips



220-240 V ~50/60 Hz  
Material: Aluminium/Steel

- Spring clips



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 115540    | 92.00 |
| ○ white | 115541    | 92.00 |



Base: 2xGU10

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 115550    | 142.00 |
| ○ white | 115551    | 142.00 |



GU10 | 12 W | 55°  
670 lm | 2700 K | EEC = G



Prod. no.: 1005297 73.00 GBP



GU10 | 8 W | 38°  
680 lm | 2700 K | EEC = F



Prod. no.: 1005274 26.00 GBP

# NUMINOS® XS DL




- 200 mA  
Power Consumption: 6.9 W  
Material: Aluminium/Plastic PC
- Material thickness of mounting surface: max. 25 mm
  - Low-voltage plug
  - Driver not included

| Variant         | GBP   |
|-----------------|-------|
| All XS versions | 60.00 |

⊕

| Product              | Prod. no. | GBP  |
|----------------------|-----------|------|
| Decorative reflector |           |      |
| ● gold               | 1010125   | 8.00 |
| ● copper             | 1010126   | 8.00 |


**Note:**  
Suitable drivers and reducer rings  
can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White



|  |  |  |  |  | Prod. no. |                                                                                     |
|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|
|  | 2700 K                                                                            | 900 lm                                                                            | 20°                                                                               | 19                                                                                | 1009271   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009274   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 25                                                                                | 1009277   |                                                                                     |
|  | 3000 K                                                                            | 950 lm                                                                            | 20°                                                                               | 19                                                                                | 1009289   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009292   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 25                                                                                | 1009295   |                                                                                     |
|  | 4000 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009307   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009310   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 25                                                                                | 1009313   |                                                                                     |
|  | 2700 K                                                                            | 900 lm                                                                            | 20°                                                                               | 19                                                                                | 1009280   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009283   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 25                                                                                | 1009286   |                                                                                     |
|  | 3000 K                                                                            | 950 lm                                                                            | 20°                                                                               | 19                                                                                | 1009298   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009301   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 25                                                                                | 1009304   |                                                                                     |
|  | 4000 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009316   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009319   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 25                                                                                | 1009322   |                                                                                     |
|  | 2700 K                                                                            | 900 lm                                                                            | 20°                                                                               | 19                                                                                | 1009281   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009284   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 25                                                                                | 1009287   |                                                                                     |
|  | 3000 K                                                                            | 950 lm                                                                            | 20°                                                                               | 19                                                                                | 1009299   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009302   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 25                                                                                | 1009305   |                                                                                     |
|  | 4000 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009317   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009320   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 25                                                                                | 1009323   |                                                                                     |

Configure further  
items and colours  
at [slv.com](http://slv.com)

## DIFFUSERS


|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Elliptical<br>diffuser                                                              | Prismatic<br>diffuser                                                               | Frosted<br>diffuser                                                                 | Honeycomb<br>diffuser                                                               |

XS

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1005612 | 1005613 | 1005614 | 1005615 |
| GBP       | 5.00    | 5.00    | 5.00    | 8.00    |

# NUMINOS® S

## DL



200 mA  
 Power Consumption: 6.7 W  
 Material: Aluminium/Plastic PC


- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

| Variant        | GBP   |
|----------------|-------|
| All S Versions | 62.00 |



| Product              | Prod. no. | GBP  |
|----------------------|-----------|------|
| Decorative reflector |           |      |
| ● gold               | 1010127   | 8.00 |
| ● copper             | 1010128   | 8.00 |


**Note:**  
 Suitable drivers and reducer rings  
 can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White



|  |  |  |  |  | Prod. no. |                                                                                     |
|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|
|  | 2700 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009433   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009436   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009439   |                                                                                     |
|  | 3000 K                                                                            | 1050 lm                                                                           | 20°                                                                               | 19                                                                                | 1009451   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009454   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009457   |                                                                                     |
|  | 4000 K                                                                            |                                                                                   | 20°                                                                               | 19                                                                                | 1009469   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009472   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009475   |                                                                                     |
|  | 2700 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009442   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009445   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009448   |                                                                                     |
|  | 3000 K                                                                            | 1050 lm                                                                           | 20°                                                                               | 19                                                                                | 1009460   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009463   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009466   |                                                                                     |
|  | 4000 K                                                                            |                                                                                   | 20°                                                                               | 19                                                                                | 1009478   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009481   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009484   |                                                                                     |
|  | 2700 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009443   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009446   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009449   |                                                                                     |
|  | 3000 K                                                                            | 1050 lm                                                                           | 20°                                                                               | 19                                                                                | 1009461   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009464   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009467   |                                                                                     |
|  | 4000 K                                                                            |                                                                                   | 20°                                                                               | 19                                                                                | 1009479   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009482   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009485   |                                                                                     |

Configure further  
items and colours  
at [slv.com](http://slv.com)


## DIFFUSERS

|                        |                       |                     |                       |
|------------------------|-----------------------|---------------------|-----------------------|
|                        |                       |                     |                       |
| Elliptical<br>diffuser | Prismatic<br>diffuser | Frosted<br>diffuser | Honeycomb<br>diffuser |

S

| Prod. no. | 1010682 | 1010680 | 1010681 | 1010679 |
|-----------|---------|---------|---------|---------|
| GBP       | 5.00    | 5.00    | 5.00    | 8.00    |

NUMINOS® M  
DL




350 mA  
Power consumption: 12 W  
Material: Aluminium/Plastic PC

- Material thickness of mounting surface:  
max. 25 mm
- Low-voltage plug
- Driver not included

| Variant        | GBP   |
|----------------|-------|
| All M Versions | 75.00 |




| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Decorative reflector |           |       |
| ● gold               | 1010129   | 10.00 |
| ● copper             | 1010130   | 9.00  |



● Black



● Black



○ White



● Black



○ White

**Note:**  
Suitable drivers and reducer rings  
can be found on pages 50-55.



|  |  |  |  |  | Prod. no. |                                                                                     |
|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|
|  | 2700 K                                                                            | 1700 lm                                                                           | 20°                                                                               | 19                                                                                | 1009595   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009598   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009601   |                                                                                     |
|  | 3000 K                                                                            | 1800 lm                                                                           | 20°                                                                               | 19                                                                                | 1009613   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009616   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009619   |                                                                                     |
|  | 4000 K                                                                            | 1900 lm                                                                           | 20°                                                                               | 19                                                                                | 1009631   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009634   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009637   |                                                                                     |
|  | 2700 K                                                                            | 1700 lm                                                                           | 20°                                                                               | 19                                                                                | 1009604   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009607   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009610   |                                                                                     |
|  | 3000 K                                                                            | 1800 lm                                                                           | 20°                                                                               | 19                                                                                | 1009622   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009625   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009628   |                                                                                     |
|  | 4000 K                                                                            | 1900 lm                                                                           | 20°                                                                               | 19                                                                                | 1009640   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009643   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009646   |                                                                                     |
|  | 2700 K                                                                            | 1700 lm                                                                           | 20°                                                                               | 19                                                                                | 1009605   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009608   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009611   |                                                                                     |
|  | 3000 K                                                                            | 1800 lm                                                                           | 20°                                                                               | 19                                                                                | 1009623   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009626   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009629   |                                                                                     |
|  | 4000 K                                                                            | 1900 lm                                                                           | 20°                                                                               | 19                                                                                | 1009641   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009644   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009647   |                                                                                     |

Configure further  
items and colours  
at [slv.com](http://slv.com)

## DIFFUSERS

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Elliptical<br>diffuser                                                              | Prismatic<br>diffuser                                                               | Frosted<br>diffuser                                                                 | Honeycomb<br>diffuser                                                               |


M

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1010686 | 1010684 | 1010685 | 1010683 |
| GBP       | 5.00    | 6.00    | 6.00    | 12.00   |



# NUMINOS® L

## DL

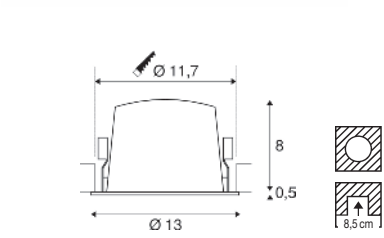

500 mA  
 Power Consumption: 17 W  
 Material: Aluminium/Plastic PC


- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

| Variant        | GBP   |
|----------------|-------|
| All L Versions | 92.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Decorative Reflector |           |       |
| gold                 | 1010131   | 10.00 |
| copper               | 1010132   | 9.00  |

**Note:**  
 Suitable drivers and reducer rings  
 can be found on pages 50-55.

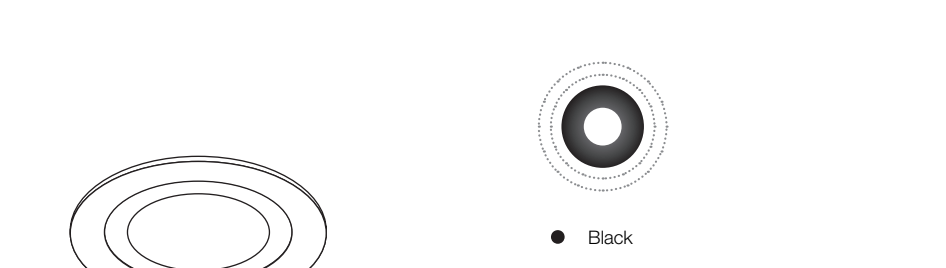



|  |  |  |  |  | Prod. no. |                                                                                     |
|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|
|  | 2700 K                                                                            | 2400 lm                                                                           | 20°                                                                               | 19                                                                                | 1009757   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1010160   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009762   |                                                                                     |
|  | 3000 K                                                                            | 2500 lm                                                                           | 20°                                                                               | 19                                                                                | 1009774   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009777   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009780   |                                                                                     |
|  | 4000 K                                                                            | 2700 lm                                                                           | 20°                                                                               | 19                                                                                | 1009792   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009795   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009798   |                                                                                     |
|  | 2700 K                                                                            | 2400 lm                                                                           | 20°                                                                               | 19                                                                                | 1009765   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009768   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009771   |                                                                                     |
|  | 3000 K                                                                            | 2500 lm                                                                           | 20°                                                                               | 19                                                                                | 1009783   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009786   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009789   |                                                                                     |
|  | 4000 K                                                                            | 2700 lm                                                                           | 20°                                                                               | 19                                                                                | 1009801   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009804   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009807   |                                                                                     |
|  | 2700 K                                                                            | 2400 lm                                                                           | 20°                                                                               | 19                                                                                | 1009766   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009769   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009772   |                                                                                     |
|  | 3000 K                                                                            | 2500 lm                                                                           | 20°                                                                               | 19                                                                                | 1009784   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009787   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009790   |                                                                                     |
|  | 4000 K                                                                            | 2700 lm                                                                           | 20°                                                                               | 19                                                                                | 1009802   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 22                                                                                | 1009805   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009808   |                                                                                     |

Configure further  
items and colours  
at [slv.com](http://slv.com)


## DIFFUSERS

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Elliptical<br>diffuser                                                              | Prismatic<br>diffuser                                                               | Frosted<br>diffuser                                                                 | Honeycomb<br>diffuser                                                               |

L

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1010690 | 1010688 | 1010689 | 1010687 |
| GBP       | 5.00    | 6.00    | 6.00    | 16.00   |

# NUMINOS® XL DL

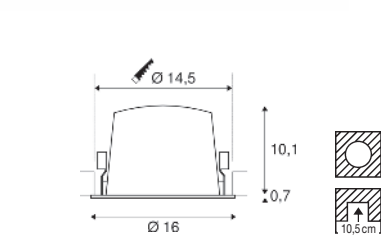

700 mA  
Power consumption: 24 W  
Material: Aluminium/Plastic PC


- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

| Variant         | GBP    |
|-----------------|--------|
| All XL Versions | 113.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Decorative reflector |           |       |
| ● gold               | 1010133   | 10.00 |
| ● copper             | 1010134   | 11.00 |


**Note:**  
Suitable drivers and reducer rings  
can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White



|  |  |  |  |  | Prod. no. |                                                                                     |
|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|
|  | 2700 K                                                                            | 3500 lm                                                                           | 20°                                                                               | 19                                                                                | 1009918   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009921   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009924   |                                                                                     |
|  | 3000 K                                                                            | 3600 lm                                                                           | 20°                                                                               | 19                                                                                | 1009936   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009939   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009942   |                                                                                     |
|  | 4000 K                                                                            | 3800 lm                                                                           | 20°                                                                               | 19                                                                                | 1009954   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009957   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009960   |                                                                                     |
|  | 2700 K                                                                            | 3500 lm                                                                           | 20°                                                                               | 19                                                                                | 1009927   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009930   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009933   |                                                                                     |
|  | 3000 K                                                                            | 3600 lm                                                                           | 20°                                                                               | 19                                                                                | 1009945   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009948   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009951   |                                                                                     |
|  | 4000 K                                                                            | 3800 lm                                                                           | 20°                                                                               | 19                                                                                | 1009963   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009966   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009969   |                                                                                     |
|  | 2700 K                                                                            | 3500 lm                                                                           | 20°                                                                               | 19                                                                                | 1009928   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009931   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009934   |                                                                                     |
|  | 3000 K                                                                            | 3600 lm                                                                           | 20°                                                                               | 19                                                                                | 1009946   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009949   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009952   |                                                                                     |
|  | 4000 K                                                                            | 3800 lm                                                                           | 20°                                                                               | 19                                                                                | 1009964   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009967   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009970   |                                                                                     |

Configure further  
items and colours  
at [slv.com](http://slv.com)


## DIFFUSERS

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Elliptical<br>diffuser                                                              | Prismatic<br>diffuser                                                               | Frosted<br>diffuser                                                                 | Honeycomb<br>diffuser                                                               |

**XL**

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1010694 | 1010692 | 1010693 | 1010691 |
| GBP       | 6.00    | 7.00    | 7.00    | 20.00   |

# NUMINOS® MOVE XS DL



200 mA  
Power consumption: 6.9 W  
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

| Variant         | GBP   |
|-----------------|-------|
| All XS Versions | 73.00 |



| Product              | Prod. no. | GBP  |
|----------------------|-----------|------|
| Decorative reflector |           |      |
| ● gold               | 1010125   | 8.00 |
| ● copper             | 1010126   | 8.00 |

**Note:**  
Leaf springs are included with the product and can be replaced.


Suitable drivers and reducer rings can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White



|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 900 lm  | 20° | 19 | 1009325   |  |
|  |        |         | 40° | 22 | 1009328   |  |
|  |        |         | 55° | 25 | 1009331   |  |
|  | 3000 K | 950 lm  | 20° | 19 | 1009343   |  |
|  |        |         | 40° | 22 | 1009346   |  |
|  |        |         | 55° | 25 | 1009349   |  |
|  | 4000 K | 1000 lm | 20° | 19 | 1009361   |  |
|  |        |         | 40° | 22 | 1009364   |  |
|  |        |         | 55° | 25 | 1009367   |  |
|  | 2700 K | 900 lm  | 20° | 19 | 1009334   |  |
|  |        |         | 40° | 22 | 1009337   |  |
|  |        |         | 55° | 25 | 1009340   |  |
|  | 3000 K | 950 lm  | 20° | 19 | 1009352   |  |
|  |        |         | 40° | 22 | 1009355   |  |
|  |        |         | 55° | 25 | 1009358   |  |
|  | 4000 K | 1000 lm | 20° | 19 | 1009370   |  |
|  |        |         | 40° | 22 | 1009373   |  |
|  |        |         | 55° | 25 | 1009376   |  |
|  | 2700 K | 900 lm  | 20° | 19 | 1009335   |  |
|  |        |         | 40° | 22 | 1009338   |  |
|  |        |         | 55° | 25 | 1009341   |  |
|  | 3000 K | 950 lm  | 20° | 19 | 1009353   |  |
|  |        |         | 40° | 22 | 1009356   |  |
|  |        |         | 55° | 25 | 1009359   |  |
|  | 4000 K | 1000 lm | 20° | 19 | 1009371   |  |
|  |        |         | 40° | 22 | 1009374   |  |
|  |        |         | 55° | 25 | 1009377   |  |

Configure further  
items and colours  
at [slv.com](http://slv.com)


## DIFFUSERS

|                        |                       |                     |                       |
|------------------------|-----------------------|---------------------|-----------------------|
|                        |                       |                     |                       |
| Elliptical<br>diffuser | Prismatic<br>diffuser | Frosted<br>diffuser | Honeycomb<br>diffuser |

XS

| Prod. no. | 1005612 | 1005613 | 1005614 | 1005615 |
|-----------|---------|---------|---------|---------|
| GBP       | 5.00    | 5.00    | 5.00    | 8.00    |

# NUMINOS® MOVE S DL



200 mA  
Power Consumption: 6.7 W  
Material: Aluminium/Plastic PC

- Material thickness of mounting surface:  
max. 25 mm
- Low-voltage plug
- Driver not included

| Variant        | GBP   |
|----------------|-------|
| All S Versions | 79.00 |



| Product              | Prod. no. | GBP  |
|----------------------|-----------|------|
| Decorative reflector |           |      |
| ● gold               | 1010127   | 8.00 |
| ● copper             | 1010128   | 8.00 |

**Note:**  
Leaf springs are included with the product and can be replaced.


Suitable drivers and reducer rings can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White



|  |  |  |  |  | Prod. no. |                                                                                     |
|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|
|  | 2700 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009487   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009490   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009493   |                                                                                     |
|  | 3000 K                                                                            | 1050 lm                                                                           | 20°                                                                               | 19                                                                                | 1009505   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009508   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009511   |                                                                                     |
|  | 4000 K                                                                            |                                                                                   | 20°                                                                               | 19                                                                                | 1009523   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009526   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009529   |                                                                                     |
|  | 2700 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009496   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009499   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009502   |                                                                                     |
|  | 3000 K                                                                            | 1050 lm                                                                           | 20°                                                                               | 19                                                                                | 1009514   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009517   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009520   |                                                                                     |
|  | 4000 K                                                                            |                                                                                   | 20°                                                                               | 19                                                                                | 1009532   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009535   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009538   |                                                                                     |
|  | 2700 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009497   |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009500   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009503   |                                                                                     |
|  | 3000 K                                                                            | 1050 lm                                                                           | 20°                                                                               | 19                                                                                | 1009515   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009518   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009521   |                                                                                     |
|  | 4000 K                                                                            |                                                                                   | 20°                                                                               | 19                                                                                | 1009533   |                                                                                     |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009536   |                                                                                     |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009539   |                                                                                     |

Configure further  
items and colours  
at [slv.com](http://slv.com)

## DIFFUSERS


|                        |                       |                     |                       |
|------------------------|-----------------------|---------------------|-----------------------|
|                        |                       |                     |                       |
| Elliptical<br>diffuser | Prismatic<br>diffuser | Frosted<br>diffuser | Honeycomb<br>diffuser |

S

| Prod. no. | 1010682 | 1010680 | 1010681 | 1010679 |
|-----------|---------|---------|---------|---------|
| GBP       | 5.00    | 5.00    | 5.00    | 8.00    |



# NUMINOS® MOVE M DL

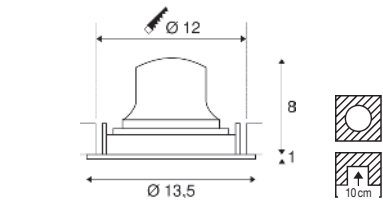

350 mA  
Power Consumption: 12 W  
Material: Aluminium/Plastic PC

- Material thickness of mounting surface:  
max. 25 mm
- Low-voltage plug
- Driver not included

| Variant        | GBP   |
|----------------|-------|
| All M Versions | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Decorative reflector |           |       |
| ● gold               | 1010129   | 10.00 |
| ● copper             | 1010130   | 9.00  |


**Note:**  
Suitable drivers and reducer rings  
can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White



|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 1700 lm | 20° | 19 | 1009649   |  |
|  |        |         | 40° | 19 | 1009652   |  |
|  |        |         | 55° | 22 | 1009655   |  |
|  | 3000 K | 1800 lm | 20° | 19 | 1009667   |  |
|  |        |         | 40° | 19 | 1009670   |  |
|  |        |         | 55° | 22 | 1009673   |  |
|  | 4000 K | 1900 lm | 20° | 19 | 1009685   |  |
|  |        |         | 40° | 19 | 1009688   |  |
|  |        |         | 55° | 22 | 1009691   |  |
|  | 2700 K | 1700 lm | 20° | 19 | 1009658   |  |
|  |        |         | 40° | 19 | 1009661   |  |
|  |        |         | 55° | 22 | 1009664   |  |
|  | 3000 K | 1800 lm | 20° | 19 | 1009676   |  |
|  |        |         | 40° | 19 | 1009679   |  |
|  |        |         | 55° | 22 | 1009682   |  |
|  | 4000 K | 1900 lm | 20° | 19 | 1009694   |  |
|  |        |         | 40° | 19 | 1009697   |  |
|  |        |         | 55° | 22 | 1009700   |  |
|  | 2700 K | 1700 lm | 20° | 19 | 1009659   |  |
|  |        |         | 40° | 19 | 1009662   |  |
|  |        |         | 55° | 22 | 1009665   |  |
|  | 3000 K | 1800 lm | 20° | 19 | 1009677   |  |
|  |        |         | 40° | 19 | 1009680   |  |
|  |        |         | 55° | 22 | 1009683   |  |
|  | 4000 K | 1900 lm | 20° | 19 | 1009695   |  |
|  |        |         | 40° | 19 | 1009698   |  |
|  |        |         | 55° | 22 | 1009701   |  |

Configure further  
items and colours  
at [slv.com](http://slv.com)


## DIFFUSERS

|                        |                       |                     |                       |
|------------------------|-----------------------|---------------------|-----------------------|
|                        |                       |                     |                       |
| Elliptical<br>diffuser | Prismatic<br>diffuser | Frosted<br>diffuser | Honeycomb<br>diffuser |

**M**

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1010686 | 1010684 | 1010685 | 1010683 |
| GBP       | 5.00    | 6.00    | 6.00    | 12.00   |

# NUMINOS® MOVE L DL

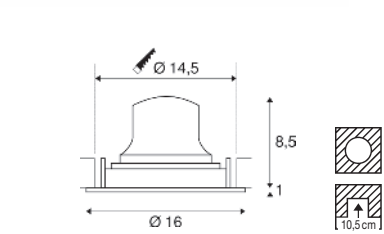

500 mA  
Power Consumption: 17 W  
Material: Aluminium/Plastic PC


- Material thickness of mounting surface:  
max. 25 mm
- Low-voltage plug
- Driver not included

| Variant        | GBP    |
|----------------|--------|
| All L Versions | 105.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Decorative reflector |           |       |
| ● gold               | 1010131   | 10.00 |
| ● copper             | 1010132   | 9.00  |

**Note:**  
Suitable drivers and reducer rings  
can be found on pages 50-55.

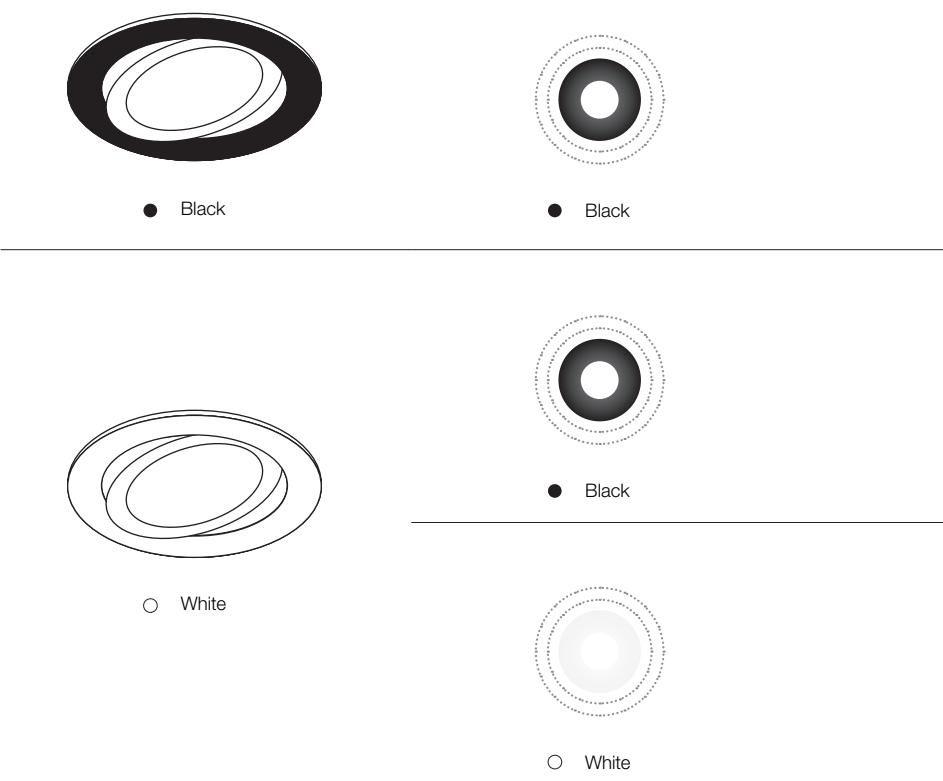



|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 2400 lm | 20° | 19 | 1009810   |  |
|  |        |         | 40° | 22 | 1009813   |  |
|  |        |         | 55° | 22 | 1009816   |  |
|  | 3000 K | 2500 lm | 20° | 19 | 1009828   |  |
|  |        |         | 40° | 22 | 1009831   |  |
|  |        |         | 55° | 22 | 1009834   |  |
|  | 4000 K | 2700 lm | 20° | 19 | 1009846   |  |
|  |        |         | 40° | 22 | 1009849   |  |
|  |        |         | 55° | 22 | 1009852   |  |
|  | 2700 K | 2400 lm | 20° | 19 | 1009819   |  |
|  |        |         | 40° | 22 | 1009822   |  |
|  |        |         | 55° | 22 | 1009825   |  |
|  | 3000 K | 2500 lm | 20° | 19 | 1009837   |  |
|  |        |         | 40° | 22 | 1009840   |  |
|  |        |         | 55° | 22 | 1009843   |  |
|  | 4000 K | 2700 lm | 20° | 19 | 1009855   |  |
|  |        |         | 40° | 22 | 1009858   |  |
|  |        |         | 55° | 22 | 1009861   |  |
|  | 2700 K | 2400 lm | 20° | 19 | 1009820   |  |
|  |        |         | 40° | 22 | 1009823   |  |
|  |        |         | 55° | 22 | 1009826   |  |
|  | 3000 K | 2500 lm | 20° | 19 | 1009838   |  |
|  |        |         | 40° | 22 | 1009841   |  |
|  |        |         | 55° | 22 | 1009844   |  |
|  | 4000 K | 2700 lm | 20° | 19 | 1009856   |  |
|  |        |         | 40° | 22 | 1009859   |  |
|  |        |         | 55° | 22 | 1009862   |  |

Configure further  
items and colours  
at [slv.com](http://slv.com)


## DIFFUSERS

|                     |                    |                  |                    |
|---------------------|--------------------|------------------|--------------------|
|                     |                    |                  |                    |
| Elliptical diffuser | Prismatic diffuser | Frosted diffuser | Honeycomb diffuser |

L

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1010690 | 1010688 | 1010689 | 1010687 |
| GBP       | 5.00    | 6.00    | 6.00    | 16.00   |

NUMINOS® MOVE XL  
DL




700 mA  
Power Consumption: 24 W  
Material: Aluminium/Plastic PC

- Material thickness of mounting surface:  
max. 25 mm
- Low-voltage plug
- Driver not included

| Variant         | GBP    |
|-----------------|--------|
| All XL Versions | 134.00 |




| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Decorative reflector |           |       |
| ● gold               | 1010133   | 10.00 |
| ● copper             | 1010134   | 11.00 |



● Black



● Black



○ White



● Black



○ White

**Note:**  
Suitable drivers and reducer rings  
can be found on pages 50-55.



|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 3500 lm | 20° | 19 | 1009972   |  |
|  |        |         | 40° | 19 | 1009975   |  |
|  |        |         | 55° | 22 | 1009978   |  |
|  | 3000 K | 3600 lm | 20° | 19 | 1009990   |  |
|  |        |         | 40° | 19 | 1009993   |  |
|  |        |         | 55° | 22 | 1009996   |  |
|  | 4000 K | 3800 lm | 20° | 19 | 1010008   |  |
|  |        |         | 40° | 19 | 1010011   |  |
|  |        |         | 55° | 22 | 1010014   |  |
|  | 2700 K | 3500 lm | 20° | 19 | 1009981   |  |
|  |        |         | 40° | 19 | 1009984   |  |
|  |        |         | 55° | 22 | 1009987   |  |
|  | 3000 K | 3600 lm | 20° | 19 | 1009999   |  |
|  |        |         | 40° | 19 | 1010002   |  |
|  |        |         | 55° | 22 | 1010005   |  |
|  | 4000 K | 3800 lm | 20° | 19 | 1010017   |  |
|  |        |         | 40° | 19 | 1010020   |  |
|  |        |         | 55° | 22 | 1010023   |  |
|  | 2700 K | 3500 lm | 20° | 19 | 1009982   |  |
|  |        |         | 40° | 19 | 1009985   |  |
|  |        |         | 55° | 22 | 1009988   |  |
|  | 3000 K | 3600 lm | 20° | 19 | 1010000   |  |
|  |        |         | 40° | 19 | 1010003   |  |
|  |        |         | 55° | 22 | 1010006   |  |
|  | 4000 K | 3800 lm | 20° | 19 | 1010018   |  |
|  |        |         | 40° | 19 | 1010021   |  |
|  |        |         | 55° | 22 | 1010024   |  |

Configure further  
items and colours  
at [slv.com](http://slv.com)


## DIFFUSERS

|                        |                       |                     |                       |
|------------------------|-----------------------|---------------------|-----------------------|
|                        |                       |                     |                       |
| Elliptical<br>diffuser | Prismatic<br>diffuser | Frosted<br>diffuser | Honeycomb<br>diffuser |

**XL**

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1010694 | 1010692 | 1010693 | 1010691 |
| GBP       | 6.00    | 7.00    | 7.00    | 20.00   |

# NUMINOS® GIMBLE XS DL



200 mA  
Power Consumption: 6 W  
Material: Aluminium/Plastic PC

- Material thickness of mounting surface:  
max. 25 mm
- Low-voltage plug
- Driver not included


| Variant         | GBP   |
|-----------------|-------|
| All XS Versions | 80.00 |



| Product              | Prod. no. | GBP  |
|----------------------|-----------|------|
| Decorative reflector |           |      |
| ● gold               | 1010125   | 8.00 |
| ● copper             | 1010126   | 8.00 |

**Note:**  
Leaf springs are included with the product and can be replaced.


Suitable drivers and reducer rings can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White



|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 900 lm  | 20° | 19 | 1010026   |  |
|  |        |         | 40° | 22 | 1010029   |  |
|  |        |         | 55° | 25 | 1010032   |  |
|  | 3000 K | 950 lm  | 20° | 19 | 1010044   |  |
|  |        |         | 40° | 22 | 1010047   |  |
|  |        |         | 55° | 25 | 1010050   |  |
|  | 4000 K | 1000 lm | 20° | 19 | 1010062   |  |
|  |        |         | 40° | 22 | 1010065   |  |
|  |        |         | 55° | 25 | 1010068   |  |
|  | 2700 K | 900 lm  | 20° | 19 | 1010035   |  |
|  |        |         | 40° | 22 | 1010038   |  |
|  |        |         | 55° | 25 | 1010041   |  |
|  | 3000 K | 950 lm  | 20° | 19 | 1010053   |  |
|  |        |         | 40° | 22 | 1010056   |  |
|  |        |         | 55° | 25 | 1010059   |  |
|  | 4000 K | 1000 lm | 20° | 19 | 1010071   |  |
|  |        |         | 40° | 22 | 1010074   |  |
|  |        |         | 55° | 25 | 1010077   |  |
|  | 2700 K | 900 lm  | 20° | 19 | 1010036   |  |
|  |        |         | 40° | 22 | 1010039   |  |
|  |        |         | 55° | 25 | 1010042   |  |
|  | 3000 K | 950 lm  | 20° | 19 | 1010054   |  |
|  |        |         | 40° | 22 | 1010057   |  |
|  |        |         | 55° | 25 | 1010060   |  |
|  | 4000 K | 1000 lm | 20° | 19 | 1010072   |  |
|  |        |         | 40° | 22 | 1010075   |  |
|  |        |         | 55° | 25 | 1010078   |  |

Configure further  
items and colours  
at [slv.com](http://slv.com)

## DIFFUSERS


|                        |                       |                     |                       |
|------------------------|-----------------------|---------------------|-----------------------|
|                        |                       |                     |                       |
| Elliptical<br>diffuser | Prismatic<br>diffuser | Frosted<br>diffuser | Honeycomb<br>diffuser |

XS

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1005612 | 1005613 | 1005614 | 1005615 |
| GBP       | 5.00    | 5.00    | 5.00    | 8.00    |



NUMINOS® GIMBLE S  
DL



200 mA  
Power Consumption: 6.7 W  
Material: Aluminium/Plastic PC

- Material thickness of mounting surface:  
max. 25 mm
- Low-voltage plug
- Driver not included


| Variant        | GBP   |
|----------------|-------|
| All S Versions | 92.00 |



| Product              | Prod. no. | GBP  |
|----------------------|-----------|------|
| Decorative reflector |           |      |
| ● gold               | 1010127   | 8.00 |
| ● copper             | 1010128   | 8.00 |

**Note:**  
Leaf springs are included with  
the product and can be replaced.


Suitable drivers and reducer rings  
can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White



|  |  |  |  |  | Prod. no. |                                                                                     |  |
|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|--|
|  | 2700 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009379   |  |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009382   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009385   |                                                                                     |  |
|  | 3000 K                                                                            | 1050 lm                                                                           | 20°                                                                               | 19                                                                                | 1009397   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009400   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009403   |                                                                                     |  |
|  | 4000 K                                                                            |                                                                                   | 20°                                                                               | 19                                                                                | 1009415   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009418   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009421   |                                                                                     |  |
|  | 2700 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009388   |  |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009391   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009394   |                                                                                     |  |
|  | 3000 K                                                                            | 1050 lm                                                                           | 20°                                                                               | 19                                                                                | 1009406   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009409   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009412   |                                                                                     |  |
|  | 4000 K                                                                            |                                                                                   | 20°                                                                               | 19                                                                                | 1009424   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009427   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009430   |                                                                                     |  |
|  | 2700 K                                                                            | 1000 lm                                                                           | 20°                                                                               | 19                                                                                | 1009389   |  |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009392   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009395   |                                                                                     |  |
|  | 3000 K                                                                            | 1050 lm                                                                           | 20°                                                                               | 19                                                                                | 1009407   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009410   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009413   |                                                                                     |  |
|  | 4000 K                                                                            |                                                                                   | 20°                                                                               | 19                                                                                | 1009425   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 40°                                                                               | 19                                                                                | 1009428   |                                                                                     |  |
|  |                                                                                   |                                                                                   | 55°                                                                               | 22                                                                                | 1009431   |                                                                                     |  |

Configure further  
items and colours  
at [slv.com](http://slv.com)


## DIFFUSERS

|                        |                       |                     |                       |
|------------------------|-----------------------|---------------------|-----------------------|
|                        |                       |                     |                       |
| Elliptical<br>diffuser | Prismatic<br>diffuser | Frosted<br>diffuser | Honeycomb<br>diffuser |

S

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1010682 | 1010680 | 1010681 | 1010679 |
| GBP       | 5.00    | 5.00    | 5.00    | 8.00    |

# NUMINOS® GIMBLE M DL



350 mA  
 Power Consumption: 12 W  
 Material: Aluminium/Plastic PC


- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

| Variant        | GBP    |
|----------------|--------|
| All M Versions | 100.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Decorative reflector |           |       |
| ● gold               | 1010129   | 10.00 |
| ● copper             | 1010130   | 9.00  |


**Note:**  
 Suitable drivers and reducer rings  
 can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White



|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 1700 lm | 20° | 19 | 1009541   |  |
|  |        |         | 40° | 19 | 1009544   |  |
|  |        |         | 55° | 22 | 1009547   |  |
|  | 3000 K | 1800 lm | 20° | 19 | 1009559   |  |
|  |        |         | 40° | 19 | 1009562   |  |
|  |        |         | 55° | 22 | 1009565   |  |
|  | 4000 K | 1900 lm | 20° | 19 | 1009577   |  |
|  |        |         | 40° | 19 | 1009580   |  |
|  |        |         | 55° | 22 | 1009583   |  |
|  | 2700 K | 1700 lm | 20° | 19 | 1009550   |  |
|  |        |         | 40° | 19 | 1009553   |  |
|  |        |         | 55° | 22 | 1009556   |  |
|  | 3000 K | 1800 lm | 20° | 19 | 1009568   |  |
|  |        |         | 40° | 19 | 1009571   |  |
|  |        |         | 55° | 22 | 1009574   |  |
|  | 4000 K | 1900 lm | 20° | 19 | 1009586   |  |
|  |        |         | 40° | 19 | 1009589   |  |
|  |        |         | 55° | 22 | 1009592   |  |
|  | 2700 K | 1700 lm | 20° | 19 | 1009551   |  |
|  |        |         | 40° | 19 | 1009554   |  |
|  |        |         | 55° | 22 | 1009557   |  |
|  | 3000 K | 1800 lm | 20° | 19 | 1009569   |  |
|  |        |         | 40° | 19 | 1009572   |  |
|  |        |         | 55° | 22 | 1009575   |  |
|  | 4000 K | 1900 lm | 20° | 19 | 1009587   |  |
|  |        |         | 40° | 19 | 1009590   |  |
|  |        |         | 55° | 22 | 1009593   |  |

Configure further  
items and colours  
at [slv.com](http://slv.com)


## DIFFUSERS

|                        |                       |                     |                       |
|------------------------|-----------------------|---------------------|-----------------------|
|                        |                       |                     |                       |
| Elliptical<br>diffuser | Prismatic<br>diffuser | Frosted<br>diffuser | Honeycomb<br>diffuser |

M

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1010686 | 1010684 | 1010685 | 1010683 |
| GBP       | 5.00    | 6.00    | 6.00    | 12.00   |

# NUMINOS® GIMBLE L DL



500 mA  
Power Consumption: 17 W  
Material: Aluminium/Plastic PC


- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

| Variant        | GBP    |
|----------------|--------|
| All L Versions | 117.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Decorative reflector |           |       |
| ● gold               | 1010131   | 10.00 |
| ● copper             | 1010132   | 9.00  |


**Note:**  
Suitable drivers and reducer rings  
can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White



|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 2400 lm | 20° | 19 | 1009703   |  |
|  |        |         | 40° | 22 | 1009706   |  |
|  |        |         | 55° | 22 | 1009709   |  |
|  | 3000 K | 2500 lm | 20° | 19 | 1009721   |  |
|  |        |         | 40° | 22 | 1009724   |  |
|  |        |         | 55° | 22 | 1009727   |  |
|  | 4000 K | 2700 lm | 20° | 19 | 1009739   |  |
|  |        |         | 40° | 22 | 1009742   |  |
|  |        |         | 55° | 22 | 1009745   |  |
|  | 2700 K | 2400 lm | 20° | 19 | 1009712   |  |
|  |        |         | 40° | 22 | 1009715   |  |
|  |        |         | 55° | 22 | 1009718   |  |
|  | 3000 K | 2500 lm | 20° | 19 | 1009730   |  |
|  |        |         | 40° | 22 | 1009733   |  |
|  |        |         | 55° | 22 | 1009736   |  |
|  | 4000 K | 2700 lm | 20° | 19 | 1009748   |  |
|  |        |         | 40° | 22 | 1009751   |  |
|  |        |         | 55° | 22 | 1009754   |  |
|  | 2700 K | 2400 lm | 20° | 19 | 1009713   |  |
|  |        |         | 40° | 22 | 1009716   |  |
|  |        |         | 55° | 22 | 1009719   |  |
|  | 3000 K | 2500 lm | 20° | 19 | 1009731   |  |
|  |        |         | 40° | 22 | 1009734   |  |
|  |        |         | 55° | 22 | 1009737   |  |
|  | 4000 K | 2700 lm | 20° | 19 | 1009749   |  |
|  |        |         | 40° | 22 | 1009752   |  |
|  |        |         | 55° | 22 | 1009755   |  |

Configure further  
items and colours  
at [slv.com](http://slv.com)


## DIFFUSERS

|                        |                       |                     |                       |
|------------------------|-----------------------|---------------------|-----------------------|
|                        |                       |                     |                       |
| Elliptical<br>diffuser | Prismatic<br>diffuser | Frosted<br>diffuser | Honeycomb<br>diffuser |

L

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1010690 | 1010688 | 1010689 | 1010687 |
| GBP       | 5.00    | 6.00    | 6.00    | 16.00   |

# NUMINOS® GIMBLE XL DL

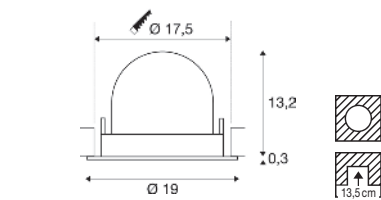

700 mA  
Power consumption: 24 W  
Material: Aluminium/Plastic PC






- Material thickness of mounting surface:  
max. 25 mm
- Low-voltage plug
- Driver not included

| Variant         | GBP    |
|-----------------|--------|
| All XL Versions | 134.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Decorative reflector |           |       |
| ● gold               | 1010133   | 10.00 |
| ● copper             | 1010134   | 11.00 |

**Note:**  
Suitable drivers and reducer rings  
can be found on pages 50-55.





|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 3500 lm | 20° | 19 | 1009864   |  |
|  |        |         | 40° | 19 | 1009867   |  |
|  |        |         | 55° | 22 | 1009870   |  |
|  | 3000 K | 3600 lm | 20° | 19 | 1009882   |  |
|  |        |         | 40° | 19 | 1009885   |  |
|  |        |         | 55° | 22 | 1009888   |  |
|  | 4000 K | 3800 lm | 20° | 19 | 1009900   |  |
|  |        |         | 40° | 19 | 1009903   |  |
|  |        |         | 55° | 22 | 1009906   |  |
|  | 2700 K | 3500 lm | 20° | 19 | 1009873   |  |
|  |        |         | 40° | 19 | 1009876   |  |
|  |        |         | 55° | 22 | 1009879   |  |
|  | 3000 K | 3600 lm | 20° | 19 | 1009891   |  |
|  |        |         | 40° | 19 | 1009894   |  |
|  |        |         | 55° | 22 | 1009897   |  |
|  | 4000 K | 3800 lm | 20° | 19 | 1009909   |  |
|  |        |         | 40° | 19 | 1009912   |  |
|  |        |         | 55° | 22 | 1009915   |  |
|  | 2700 K | 3500 lm | 20° | 19 | 1009874   |  |
|  |        |         | 40° | 19 | 1009877   |  |
|  |        |         | 55° | 22 | 1009880   |  |
|  | 3000 K | 3600 lm | 20° | 19 | 1009892   |  |
|  |        |         | 40° | 19 | 1009895   |  |
|  |        |         | 55° | 22 | 1009898   |  |
|  | 4000 K | 3800 lm | 20° | 19 | 1009910   |  |
|  |        |         | 40° | 19 | 1009913   |  |
|  |        |         | 55° | 22 | 1009916   |  |

Configure further  
items and colours  
at [slv.com](http://slv.com)

## DIFFUSOREN

|                        |                       |                     |                       |
|------------------------|-----------------------|---------------------|-----------------------|
|                        |                       |                     |                       |
| Elliptical<br>diffuser | Prismatic<br>diffuser | Frosted<br>diffuser | Honeycomb<br>diffuser |

**XL**

|           |         |         |         |         |
|-----------|---------|---------|---------|---------|
| Prod. no. | 1010694 | 1010692 | 1010693 | 1010691 |
| GBP       | 6.00    | 7.00    | 7.00    | 20.00   |





## Driver assignment XS, S



LED DRIVER  
21W | 200mA



LED DRIVER  
10W | 200mA  
dimmable



LED DRIVER  
23W | 200mA DALI  
dimmable



|                        |                     |           |            |
|------------------------|---------------------|-----------|------------|
| Material               | Polycarbonate (PC)  |           |            |
| Colour                 | White               |           |            |
| Prim. voltage          | 220-240 V ~50/60 Hz |           |            |
| Sec. voltage           | 15-45V DC           | 26-38V DC | 2.5-46V DC |
| Output Current         | 200mA               |           |            |
| Number of sec. outputs | 1                   |           |            |
| Output from            | 3 W                 | 4.7 W     | 0.5 W      |
| Output up to           | 9 W                 | 7.6 W     | 9.2 W      |
| Ambient temp. min      | -20°C               | -25°C     | -20°C      |
| Ambient temp. max.     | 45°C                | 50°C      |            |
| Thermal protection     | 110°C               |           |            |
| IP protection class    | IP20                |           |            |
| Dimmable               | –                   | PHASE C   | DALI       |
| Length                 | 13.8 cm             | 12.2 cm   | 13.9 cm    |
| Width                  | 4.4 cm              | 4.1cm     | 3 cm       |
| Height                 | 2.3 cm              | 2.3 cm    | 2.1 cm     |
| Prod. no.              | 1010695             | 1010699   | 1010703    |
| GBP                    | 22.00               | 26.00     | 57.00      |



## Driver assignment M

|                                                                                   |                                                                                   |                                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |  |
| LED DRIVER<br>21W   350mA                                                         | LED DRIVER<br>20W   350mA<br>dimmable                                             | LED DRIVER<br>23W   350mA DALI<br>dimmable                                        |

M



|                        |                     |           |            |
|------------------------|---------------------|-----------|------------|
| Material               | Polycarbonate (PC)  |           |            |
| Colour                 | White               |           |            |
| Prim. voltage          | 220-240 V ~50/60 Hz |           |            |
| Sec. voltage           | 15-45V DC           | 26-38V DC | 2.5-46V DC |
| Output current         | 350mA               |           |            |
| Number of sec. outputs | 1                   |           |            |
| Output from            | 5.3 W               | 9.1 W     | 0.87 W     |
| Output up to           | 15.8 W              | 13.3 W    | 16.1 W     |
| Ambient temp. min      | -20°C               | -25°C     | -20°C      |
| Ambient temp. max.     | 45°C                | 50°C      |            |
| Thermal protection     | 110°C               |           |            |
| IP protection class    | IP20                |           |            |
| Dimmable               | –                   | PHASE C   | DALI       |
| Length                 | 19.2 cm             | 13.8 cm   | 21 cm      |
| Width                  | 5.9 cm              | 4 cm      | 5.7 cm     |
| Height                 | 2.3 cm              | 3 cm      | 2.1 cm     |
| Prod. no.              | 1010696             | 1010700   | 1010704    |
| GBP                    | 22.00               | 31.00     | 57.00      |



## Driver Assignment L



LED DRIVER  
21W | 500mA



LED DRIVER  
20W | 500mA  
dimmable



LED DRIVER  
36W | 500mA DALI  
dimmable



|                        |                     |           |                   |
|------------------------|---------------------|-----------|-------------------|
| Material               | Polycarbonate (PC)  |           |                   |
| Colour                 | White               |           |                   |
| Prim. voltage          | 220-240 V ~50/60 Hz |           |                   |
| Sec. voltage           | 15-45V DC           | 26-38V DC | 2.5-50V DC        |
| Output current         | 700 mA              | 500 mA    | 250/350/500/700mA |
| Number of sec. outputs | 1                   |           |                   |
| Output from            | 7.5 W               | 9.1 W     | 1.25 W            |
| Output up to           | 22.5 W              | 19 W      | 25 W              |
| Ambient temp. min      | -20°C               | -25°C     | -20°C             |
| Ambient temp. max.     | 45°C                | 50°C      |                   |
| Thermal protection     | 110°C               |           |                   |
| IP protection class    | IP20                |           |                   |
| Dimmable               | –                   | PHASE C   | DALI              |
| Length                 | 19.2 cm             | 13.8 cm   | 24 cm             |
| Width                  | 5.9 cm              | 4 cm      | 5.7 cm            |
| Height                 | 2.3 cm              | 3 cm      | 2.1 cm            |
| Prod. no.              | 1010697             | 1010701   | 1010705           |
| GBP                    | 22.00               | 31.00     | 61.00             |



## Driver Assignment XL

|                                                                                   |                                                                                   |                                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |  |
| LED DRIVER<br>30W   700mA                                                         | LED DRIVER<br>30W   700mA<br>dimmable                                             | LED DRIVER<br>30W   700mA DALI<br>dimmable                                        |

XL



|                        |                     |           |            |
|------------------------|---------------------|-----------|------------|
| Material               | Polycarbonate (PC)  |           |            |
| Colour                 | White               |           |            |
| Prim. voltage          | 220-240 V ~50/60 Hz |           |            |
| Sec. voltage           | 27-45V DC           | 26-42V DC | 2.5-50V DC |
| Output current         | 1050 mA             | 700 mA    | 1050 mA    |
| Number of sec. outputs | 1                   |           |            |
| Output from            | 18.9 W              | 18.2 W    | 1.75 W     |
| Output up to           | 31.5 W              | 29.4 W    | 35 W       |
| Ambient temp. min      | -25°C               | -20°C     | -25°C      |
| Ambient temp. max.     | 45°C                |           | 50°C       |
| Thermal protection     | 110°C               |           |            |
| IP protection class    | IP20                |           |            |
| Dimmable               | –                   | PHASE C   | DALI       |
| Length                 | 19.2 cm             | 13.8 cm   | 24 cm      |
| Width                  | 5.9 cm              | 4 cm      | 5.7 cm     |
| Height                 | 2.3 cm              | 3 cm      | 2.1 cm     |
| Prod. no.              | 1010698             | 1010702   | 1010706    |
| GBP                    | 24.00               | 35.00     | 61.00      |





Reducer ring, round

|                    |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                    |  |  |  |  |  |  |  |
| Material           | steel                                                                             |                                                                                   | steel                                                                             | steel                                                                             | steel                                                                             | steel                                                                              | steel                                                                               |
| External Ø         | 16 cm                                                                             |                                                                                   | 16 cm                                                                             | 24 cm                                                                             | 24 cm                                                                             | 24 cm                                                                              | 24 cm                                                                               |
| Height             | 5.3 cm                                                                            |                                                                                   | 5.3 cm                                                                            | 5.3 cm                                                                            | 5.3 cm                                                                            | 5.3 cm                                                                             | 5.3 cm                                                                              |
| Internal Ø         | 7 cm                                                                              |                                                                                   | 10 cm                                                                             | 12 cm                                                                             | 15 cm                                                                             | 18 cm                                                                              | 18 cm                                                                               |
| Ceiling cut-out    | 8.5 - 13 cm                                                                       |                                                                                   | 12 - 15 cm                                                                        | 14 - 18 cm                                                                        | 17 - 20 cm                                                                        | 20 - 22 cm                                                                         | 20 - 22 cm                                                                          |
| Material thickness | 3 cm                                                                              |                                                                                   | 3 cm                                                                              | 3 cm                                                                              | 3 cm                                                                              | 3 cm                                                                               | 3 cm                                                                                |
| Prod. no. black    | <b>1006135</b>                                                                    |                                                                                   | <b>1006139</b>                                                                    | <b>1006143</b>                                                                    | <b>1006147</b>                                                                    | <b>1006151</b>                                                                     | <b>1006151</b>                                                                      |
| Prod. no. white    | <b>1006136</b>                                                                    |                                                                                   | <b>1006140</b>                                                                    | <b>1006144</b>                                                                    | <b>1006148</b>                                                                    | <b>1006152</b>                                                                     | <b>1006152</b>                                                                      |
| GBP                | <b>16.00</b>                                                                      |                                                                                   | <b>14.00</b>                                                                      | <b>17.00</b>                                                                      | <b>16.00</b>                                                                      | <b>16.00</b>                                                                       | <b>16.00</b>                                                                        |



Reducer ring, square

|                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                    |                                                                                     |                                                                                      |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                    |  |  |  |  |  |  |  |
| Material           | Steel                                                                               |                                                                                     | Steel                                                                               | Steel                                                                               | Steel                                                                              | Steel                                                                               | Steel                                                                                |
| Length             | 16 cm                                                                               |                                                                                     | 16 cm                                                                               | 24 cm                                                                               | 24 cm                                                                              | 24 cm                                                                               | 24 cm                                                                                |
| Width              | 16 cm                                                                               |                                                                                     | 16 cm                                                                               | 24 cm                                                                               | 24 cm                                                                              | 24 cm                                                                               | 24 cm                                                                                |
| Height             | 5.3 cm                                                                              |                                                                                     | 5.3 cm                                                                              | 5.3 cm                                                                              | 5.3 cm                                                                             | 5.3 cm                                                                              | 5.3 cm                                                                               |
| Internal Ø         | 7 cm                                                                                |                                                                                     | 10 cm                                                                               | 12 cm                                                                               | 15 cm                                                                              | 18 cm                                                                               | 18 cm                                                                                |
| Ceiling cut-out    | 8.5 - 13 cm                                                                         |                                                                                     | 12 - 15 cm                                                                          | 14 - 18 cm                                                                          | 17 - 20 cm                                                                         | 20 - 22 cm                                                                          | 20 - 22 cm                                                                           |
| Material thickness | 3 cm                                                                                |                                                                                     | 3 cm                                                                                | 3 cm                                                                                | 3 cm                                                                               | 3 cm                                                                                | 3 cm                                                                                 |
| Prod. no. black    | <b>1006137</b>                                                                      |                                                                                     | <b>1006141</b>                                                                      | <b>1006145</b>                                                                      | <b>1006149</b>                                                                     | <b>1006153</b>                                                                      | <b>1006153</b>                                                                       |
| Prod. no. white    | <b>1006138</b>                                                                      |                                                                                     | <b>1006142</b>                                                                      | <b>1006146</b>                                                                      | <b>1006150</b>                                                                     | <b>1006154</b>                                                                      | <b>1006154</b>                                                                       |
| GBP                | <b>16.00</b>                                                                        |                                                                                     | <b>14.00</b>                                                                        | <b>17.00</b>                                                                        | <b>16.00</b>                                                                       | <b>16.00</b>                                                                        | <b>16.00</b>                                                                         |

# CONFIGURE YOUR NUMINOS®



---

SELECT YOUR


SYSTEM

COLOUR

- NUMINOS® DL
- NUMINOS® MOVE
- NUMINOS® GIMBLE

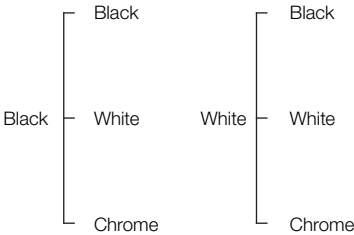


- NUMINOS® PD
- NUMINOS® CL
- NUMINOS® SPOT



Black White

- NUMINOS® TRACK
- NUMINOS® ZOOM



Black White

The NUMINOS® lighting system delivers consistent lighting performance and a contemporary design across all applications – from hotels and offices to commercial and residential spaces. From application and technology through to the finest design details, the modular downlights and spotlights can be configured precisely to meet the requirements of your project and the conditions of the space. Thanks to consistent lighting quality throughout the system, all NUMINOS variants can be seamlessly combined within a project, regardless of the installation type. The more complex your project, the more you will benefit from the NUMINOS® lighting system.



Discover NUMINOS®  
Lights also suitable  
for the 48V system  
pp. 442–449

## SIZE

## PERFORMANCE

## DIFFUSERS



|           |                                  |
|-----------|----------------------------------|
| <b>XS</b> | 200mA<br>Power Consumption: 7 W  |
| <b>S</b>  | 200mA<br>Power Consumption: 7 W  |
| <b>M</b>  | 350mA<br>Power Consumption: 12 W |
| <b>L</b>  | 500mA<br>Power Consumption: 17 W |
| <b>XL</b> | 700mA<br>Power Consumption: 24 W |

**ELLIPTICAL**  
Vertically distributed light, reduced glare,  
perfect for use in corridors

**PRISMATIC**  
Wide beam, reduced glare,  
ideal for lights at specific distances

**FROSTED**  
Wide beam, superior illumination,  
perfect for low ceilings

**HONEYCOMB**  
Narrow beam, reduced glare,  
perfect for computer work



|           |                                 |
|-----------|---------------------------------|
| <b>S</b>  | 200mA<br>Power Consumption: 11W |
| <b>M</b>  | 350mA<br>Power Consumption: 20W |
| <b>L</b>  | 500mA<br>Power Consumption: 28W |
| <b>XL</b> | 700mA<br>Power Consumption: 36W |




NUMINOS® Zoom only available in size M





DYSKO  
DL, ROUND, PHASE



220-240 V ~50/60 Hz | 150 mA  
Total Wattage: 6.4 W  
Material: Aluminium


- Including external LED driver



2700 K  
750 lm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1010355   | 121.00 |
| ● black/gold  | 1010353   | 118.00 |
| ● white/black | 1010354   | 118.00 |

DYSKO  
PD, PHASE

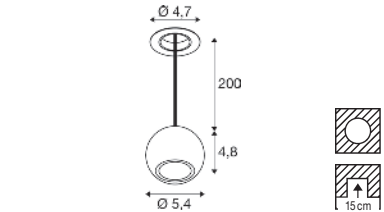

220-240 V ~50/60 Hz | 100 mA  
Total Wattage: 4.4 W  
Material: Aluminium

- Including external LED driver



2700 K  
500 lm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black/gold  | 1010359   | 127.00 |
| ● white/black | 1010360   | 127.00 |

# NEW TRIA® 68

## DL, PHASE



1



● Black



○ White

2




● Black




○ White

1



2



220-240V ~50/60Hz | 200mA

Total Wattage: 8.3W

Material: Aluminium

- Material thickness of mounting surface:  
max. 20 mm






|  |  |  |  | Prod. no. | GBP   |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------|-------------------------------------------------------------------------------------|
| IP 20                                                                             | 2700K                                                                             | 705lm                                                                             | 38°                                                                               | 1007386   | 47.00 |  |
|                                                                                   | 2700K                                                                             | 705lm                                                                             | 60°                                                                               | 1007388   | 47.00 |                                                                                     |
|                                                                                   | 3000K                                                                             | 750lm                                                                             | 38°                                                                               | 1007390   | 47.00 |                                                                                     |
|                                                                                   | 3000K                                                                             | 750lm                                                                             | 60°                                                                               | 1007392   | 47.00 |                                                                                     |
| IP 20                                                                             | 2700K                                                                             | 705lm                                                                             | 38°                                                                               | 1007385   | 47.00 |  |
|                                                                                   | 2700K                                                                             | 705lm                                                                             | 60°                                                                               | 1007387   | 47.00 |                                                                                     |
|                                                                                   | 3000K                                                                             | 750lm                                                                             | 38°                                                                               | 1007389   | 47.00 |                                                                                     |
|                                                                                   | 3000K                                                                             | 750lm                                                                             | 60°                                                                               | 1007391   | 47.00 |                                                                                     |
| IP 20                                                                             | 2700K                                                                             | 705lm                                                                             | 38°                                                                               | 1007394   | 47.00 |  |
|                                                                                   | 2700K                                                                             | 705lm                                                                             | 60°                                                                               | 1007396   | 47.00 |                                                                                     |
|                                                                                   | 3000K                                                                             | 750lm                                                                             | 38°                                                                               | 1007398   | 47.00 |                                                                                     |
|                                                                                   | 3000K                                                                             | 750lm                                                                             | 60°                                                                               | 1007400   | 47.00 |                                                                                     |
| IP 20                                                                             | 2700K                                                                             | 705lm                                                                             | 38°                                                                               | 1007393   | 47.00 |  |
|                                                                                   | 2700K                                                                             | 705lm                                                                             | 60°                                                                               | 1007395   | 47.00 |                                                                                     |
|                                                                                   | 3000K                                                                             | 750lm                                                                             | 38°                                                                               | 1007397   | 47.00 |                                                                                     |
|                                                                                   | 3000K                                                                             | 750lm                                                                             | 60°                                                                               | 1007399   | 47.00 |                                                                                     |

## NEW TRIA® 68

DL, PHASE



220-240V ~50/60Hz | 200mA  
Total Wattage: 8.3 W  
Material: Aluminium

- Material thickness of mounting surface:  
max. 20 mm





● Black



○ White

## NEW TRIA® 75

DL, ROUND, PHASE



220-240V ~50/60Hz | 200mA  
Total Wattage: 8.3W  
Material: Aluminium

- Material thickness of mounting surface:  
max. 20 mm




● Black



○ White

|  |  |  |  | Prod. no. | GBP   |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------|-------------------------------------------------------------------------------------|
| IP 20/<br>IP 65*                                                                  | 2700K                                                                             | 460lm                                                                             | 38°                                                                               | 1007406   | 60.00 |  |
|                                                                                   | 3000K                                                                             | 500lm                                                                             | 38°                                                                               | 1007408   | 59.00 |                                                                                     |
| IP 20/<br>IP 65*                                                                  | 2700K                                                                             | 530lm                                                                             | 38°                                                                               | 1007405   | 60.00 |  |
|                                                                                   | 3000K                                                                             | 570lm                                                                             | 38°                                                                               | 1007407   | 60.00 |                                                                                     |

\*IP65 room side


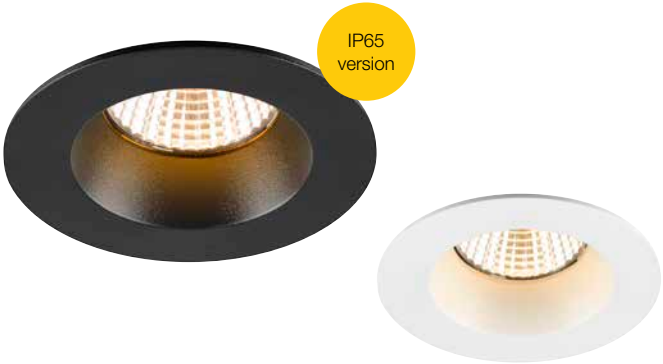


|  |  |  |  | Prod. no. | GBP   |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------|-------|---------------------------------------------------------------------------------------|
| IP 20                                                                               | 2700K                                                                               | 705lm                                                                               | 38°                                                                                 | 1007402   | 55.00 |  |
|                                                                                     | 3000K                                                                               | 750lm                                                                               | 38°                                                                                 | 1007404   | 55.00 |                                                                                       |
| IP 20                                                                               | 2700K                                                                               | 705lm                                                                               | 38°                                                                                 | 1007401   | 55.00 |  |
|                                                                                     | 3000K                                                                               | 750lm                                                                               | 38°                                                                                 | 1007403   | 55.00 |                                                                                       |



# NEW TRIA® 68

DL, DTW, PHASE

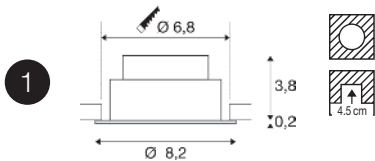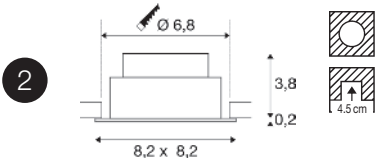

220-240V ~50/60Hz | 250mA  
Total Wattage: 11W  
Material: Aluminium

- Material thickness of mounting surface:  
max. 20 mm

1



● Black



○ White


2



● Black



○ White

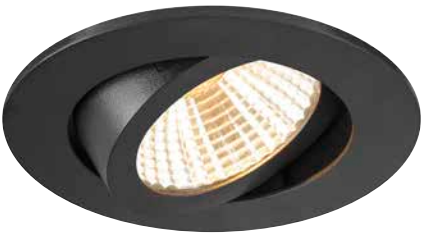






|  |  |  |  |  | Prod. no. | GBP   |                                                                                     |
|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------|-------------------------------------------------------------------------------------|
|  | IP 20                                                                             | 1800K-3000K                                                                       | 70lm-700lm                                                                        | 38°                                                                               | 1007424   | 60.00 |  |
|  |                                                                                   |                                                                                   |                                                                                   | 60°                                                                               | 1007426   | 60.00 |                                                                                     |
|  | IP 20                                                                             | 1800K-3000K                                                                       | 70lm-700lm                                                                        | 38°                                                                               | 1007423   | 60.00 |  |
|  |                                                                                   |                                                                                   |                                                                                   | 60°                                                                               | 1007425   | 60.00 |                                                                                     |
|  | IP 20                                                                             | 1800K-3000K                                                                       | 70lm-700lm                                                                        | 38°                                                                               | 1007428   | 60.00 |  |
|  |                                                                                   |                                                                                   |                                                                                   | 60°                                                                               | 1007430   | 60.00 |                                                                                     |
|  | IP 20                                                                             | 1800K-3000K                                                                       | 70lm-700lm                                                                        | 38°                                                                               | 1007427   | 60.00 |  |
|  |                                                                                   |                                                                                   |                                                                                   | 60°                                                                               | 1007429   | 60.00 |                                                                                     |



1007426 62



# NEW TRIA® UNIVERSAL 68 DL, PHASE

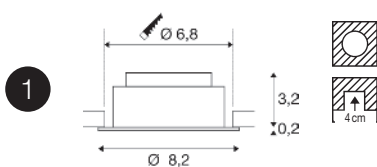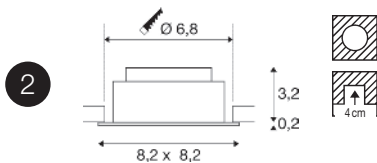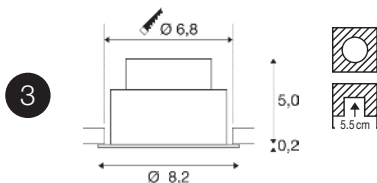

220-240V ~50/60Hz | 100-180mA  
Total Wattage: 8.6W  
Material: Aluminium

- Material thickness of mounting surface:  
max. 20 mm



- Black



- White



- Black



- White



- Black



- White




|  |  |  |  |  | Prod. no. | GBP   |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|-------|-------------------------------------------------------------------------------------|
| 30°                                                                               | IP 20                                                                             | 2500K<br>3000K<br>4000K                                                           | 540lm<br>600lm<br>600lm                                                           | 38°                                                                               | 1007434   | 77.00 |  |
|                                                                                   |                                                                                   |                                                                                   |                                                                                   | 60°                                                                               | 1007436   | 77.00 |                                                                                     |
| 30°                                                                               | IP 20                                                                             | 2500K<br>3000K<br>4000K                                                           | 540lm<br>600lm<br>600lm                                                           | 38°                                                                               | 1007433   | 77.00 |  |
|                                                                                   |                                                                                   |                                                                                   |                                                                                   | 60°                                                                               | 1007435   | 77.00 |                                                                                     |
| 30°                                                                               | IP 20                                                                             | 2500K<br>3000K<br>4000K                                                           | 540lm<br>600lm<br>600lm                                                           | 38°                                                                               | 1007438   | 77.00 |  |
|                                                                                   |                                                                                   |                                                                                   |                                                                                   | 60°                                                                               | 1007440   | 77.00 |                                                                                     |
| 30°                                                                               | IP 20                                                                             | 2500K<br>3000K<br>4000K                                                           | 540lm<br>600lm<br>600lm                                                           | 38°                                                                               | 1007437   | 77.00 |  |
|                                                                                   |                                                                                   |                                                                                   |                                                                                   | 60°                                                                               | 1007439   | 77.00 |                                                                                     |
| –                                                                                 | IP 20<br>IP 65*                                                                   | 2500K<br>3000K<br>4000K                                                           | 370lm<br>410lm<br>410lm                                                           | 38°                                                                               | 1007442   | 85.00 |  |
| –                                                                                 | IP 20<br>IP 65*                                                                   | 2500K<br>3000K<br>4000K                                                           | 370lm<br>410lm<br>410lm                                                           | 38°                                                                               | 1007441   | 85.00 |  |

\*IP65 room side



# NEW TRIA® 68

DL, PHASE, AIRTIGHT



● Black




○ White



220-240 V ~50/60 Hz | 180 mA  
Total Wattage: 7.5 W  
Material: Aluminium/PC

- Meets the requirements of RE2020

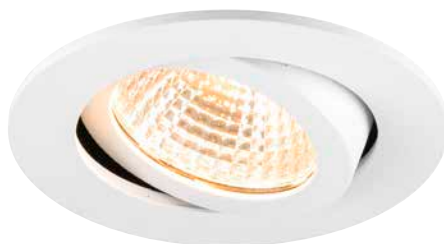




Prod. no.

GBP

|     |             |        |        |     |    |         |       |
|-----|-------------|--------|--------|-----|----|---------|-------|
| 20° | IP 20/IP 23 | 2700 K | 591 lm | 36° | 22 | 1009021 | 46.00 |
|     |             | 3000 K | 621 lm |     |    | 1009023 | 46.00 |



|     |             |        |        |     |    |         |       |
|-----|-------------|--------|--------|-----|----|---------|-------|
| 20° | IP 20/IP 23 | 2700 K | 591 lm | 36° | 22 | 1009020 | 46.00 |
|     |             | 3000 K | 621 lm |     |    | 1009022 | 46.00 |

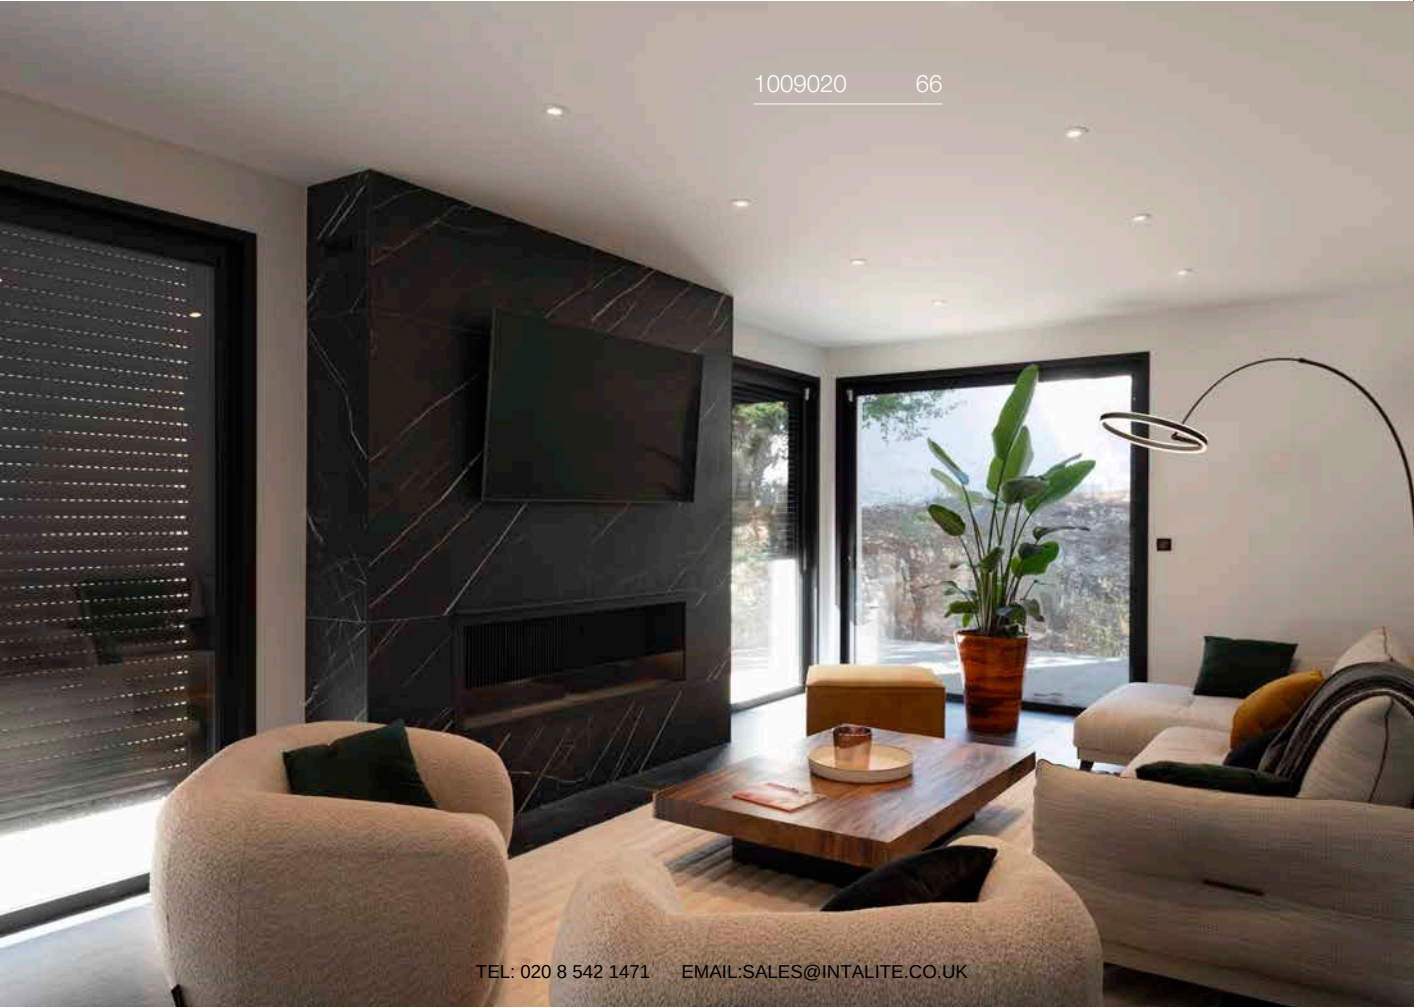

1009020 66

NEW TRIA® 68  
DL, QPAR51



1



● Black



○ White



● Aluminium

2





● Black



○ White



● Aluminium



220-240V ~50/60Hz  
Material: Aluminium

- Material thickness of mounting surface:  
max. 20 mm



GU10 | 6W | 38°  
450lm | 2700K | EEC = F







Prod. no.: 1005077 7.00 GBP



|  |       |              | Prod. no. | GBP   |                                                                                     |
|-----------------------------------------------------------------------------------|-------|--------------|-----------|-------|-------------------------------------------------------------------------------------|
|                                                                                   | IP 20 | Base: 1xGU10 | 1007369   | 18.00 |  |
|                                                                                   | IP 20 | Base: 1xGU10 | 1007368   | 18.00 |  |
|                                                                                   | IP 20 | Base: 1xGU10 | 1007370   | 23.00 |  |
|                                                                                   | IP 20 | Base: 1xGU10 | 1007372   | 18.00 |  |
|                                                                                   | IP 20 | Base: 1xGU10 | 1007371   | 18.00 |  |
|                                                                                   | IP 20 | Base: 1xGU10 | 1007373   | 23.00 |  |



NEW TRIA® 75 / XL  
DL, QPAR51



● Black

○ White

● Aluminium

● Black

○ White

● Aluminium



● Black, XL

○ White, XL

● Aluminium, XL

● Black, XL

○ White, XL

● Aluminium, XL



220-240V ~50/60Hz  
Material: Aluminium

• Material thickness of mounting surface:  
max. 20 mm



GU10 | 6W | 38°  
450lm | 2700K | EEC = F




Prod. no.: 1005077 7.00 GBP



Prod. no.

GBP

|  |       |              |         |       |                                                                                       |
|--|-------|--------------|---------|-------|---------------------------------------------------------------------------------------|
|  | IP 20 | Base: 1xGU10 | 1007375 | 23.00 |    |
|  | IP 20 | Base: 1xGU10 | 1007374 | 23.00 |    |
|  | IP 20 | Base: 1xGU10 | 1007376 | 26.00 |    |
|  | IP 20 | Base: 1xGU10 | 1007378 | 23.00 |    |
|  | IP 20 | Base: 1xGU10 | 1007377 | 23.00 |    |
|  | IP 20 | Base: 1xGU10 | 1007379 | 26.00 |    |
|  | IP 20 | Base: 1xGU10 | 1007625 | 27.00 |   |
|  | IP 20 | Base: 1xGU10 | 1007624 | 27.00 |  |
|  | IP 20 | Base: 1xGU10 | 1007626 | 30.00 |  |
|  | IP 20 | Base: 1xGU10 | 1007628 | 27.00 |  |
|  | IP 20 | Base: 1xGU10 | 1007627 | 27.00 |  |
|  | IP 20 | Base: 1xGU10 | 1007629 | 30.00 |  |










## NEW TRIA® 45

### DL, ROUND

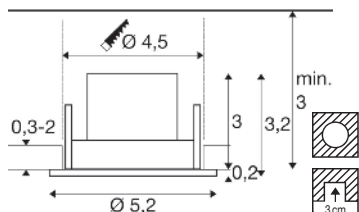


220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 4 W

- Including external LED driver

## NEW TRIA® 155


### DL, DOUBLE, QPAR51

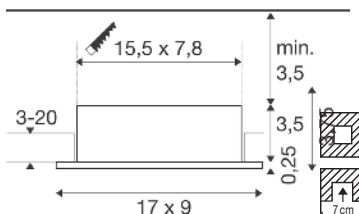

220-240 V ~50/60 Hz  
Material: Aluminium

## NEW TRIA® 155

### DL, DOUBLE

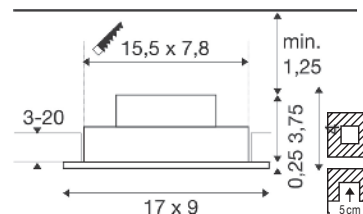

220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 13.6 W  
Material: Aluminium



|         |      |        |
|---------|------|--------|
| 1009002 | Down | 2700 K |
| 1009003 |      | 360 lm |
| 1009004 | Down | 3000 K |
| 1009005 |      | 360 lm |

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black 2700 K | 1009003   | 43.00 |
| ● black 3000 K | 1009005   | 43.00 |
| ○ white 2700 K | 1009002   | 43.00 |
| ○ white 3000 K | 1009004   | 43.00 |



Base: 2xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008510   | 42.00 |
| ○ white | 1008509   | 42.00 |



|         |      |         |
|---------|------|---------|
| 1008511 | Down | 2700 K  |
| 1008512 |      | 1220 lm |
| 1008513 | Down | 3000 K  |
| 1008514 |      | 1280 lm |

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black 2700 K | 1008512   | 96.00 |
| ● black 3000 K | 1008514   | 96.00 |
| ○ white 2700 K | 1008511   | 96.00 |
| ○ white 3000 K | 1008513   | 96.00 |



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005079 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F




Prod. no.: 1012469 23.00 GBP

COMBINE OTHER ITEMS FROM  
THE FOLLOWING PAGES





GU10 base or LED module

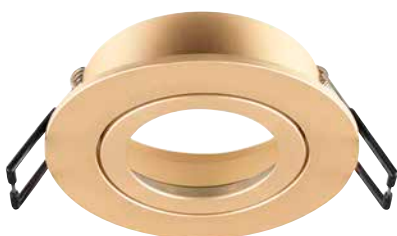

Mounting ring available in black,  
white, pink gold and aluminium



## GU10 LED CONNECTION BOX WITH BASE, MAX. 10W



220-240 V ~50/60 Hz  
Material: Plastic



Base: 1xGU10

| Variant | Prod. no. | GBP  |
|---------|-----------|------|
| ● black | 1007283   | 6.00 |




GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005080 7.00 GBP




## NEW TRIA® DL, LED MODULE, PHASE




220-240 V ~50/60 Hz | 200 mA  
Total Wattage: 8.3 W  
Material: Aluminium

## NEW TRIA® DL, LED MODULE, DTW, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total Wattage: 11 W  
Material: Aluminium

## NEW TRIA® UNIVERSAL DL, LED MODULE, PHASE



220-240 V ~50/60 Hz | 100 - 180 mA  
Total Wattage: 8.6 W  
Material: Aluminium



|         |        |
|---------|--------|
| 1007381 | 2700 K |
| 1007382 | 705 lm |
| 1007383 | 3000 K |
| 1007384 | 750 lm |

| Variant              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| ● black 2700 K   38° | 1007381   | 39.00 |
| ● black 2700 K   60° | 1007382   | 39.00 |
| ● black 3000 K   38° | 1007383   | 39.00 |
| ● black 3000 K   60° | 1007384   | 39.00 |



|         |        |        |
|---------|--------|--------|
| 1007421 | 1800 K | 3000 K |
| 1007422 | 70 lm  | 700 lm |

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black 38° | 1007421   | 49.00 |
| ● black 60° | 1007422   | 49.00 |



|         |        |        |        |
|---------|--------|--------|--------|
| 1007431 | 2500 K | 3000 K | 4000 K |
| 1007432 | 540 lm | 600 lm | 600 lm |

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black 38° | 1007431   | 66.00 |
| ● black 60° | 1007432   | 66.00 |



1007381 + 1007334 75 + 76

## NEW TRIA® 68

RING, ROUND,  
GU10/LED MODULES



Ø: 8.2 cm  
H: 2.6 cm  
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface:  
max. 20 mm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1007332   | 13.00 |
| ○ white     | 1007333   | 13.00 |
| ● aluminium | 1007335   | 18.00 |
| ● Pink gold | 1007334   | 22.00 |

## NEW TRIA® 68

RING, SQUARE,  
GU10/LED MODULES



L: 8.2 cm  
W: 8.20 cm  
H: 2.6 cm  
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface:  
max. 20 mm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1007329   | 13.00 |
| ○ white     | 1007328   | 13.00 |
| ● aluminium | 1007330   | 18.00 |
| ● Pink gold | 1007331   | 22.00 |



## NEW TRIA® 68

RING, ROUND,  
GU10/LED MODULES



Ø: 8.2 cm  
H: 4.4 cm  
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007451   | 14.00 |
| ○ white | 1007453   | 14.00 |

## NEW TRIA® 68

RING, ROUND,  
GU10/LED MODULES



Ø: 8.2 cm  
H: 3.4 cm  
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007345   | 22.00 |
| ○ white | 1007346   | 22.00 |

## NEW TRIA® 68

RING, SQUARE,  
GU10/LED MODULES



L: 8.2 cm  
W: 8.20 cm  
H: 3.4 cm  
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007347   | 22.00 |
| ○ white | 1007348   | 22.00 |

## NEW TRIA® 68

RING, ROUND,  
GU10/LED MODULES



Ø: 8.3 cm  
H: 3.55 cm  
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007336   | 31.00 |
| ○ white | 1007337   | 31.00 |

## NEW TRIA® 68

RING, SQUARE,  
GU10/LED MODULES



L: 8.3 cm  
W: 8.30 cm  
H: 3.55 cm  
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007338   | 31.00 |
| ○ white | 1007339   | 31.00 |



## POISSONNERIE

## À RESERVER

## PLATEAU DE FRUITS DE MER

- 8 huîtres creuses 80€/2 pers
- 8 crevettes roses
- 4 bulots
- 1 homard canadien + mayonnaise + citron
- 60€/1 pers + vinaigre ichabou

turbot, soles, calamars  
coquilles de mer,  
thon, sardines...

→ à commander  
selon disponibilité

502

## LES HUÎTRES

- OUVERTES OU FERMÉES
- FINES DE LAIRE 14€/pc
- PRAT AR. CUM 25€/pc
- ST. VAAST 45€/pc

## SAUMON

FILÉ SAUMON 24€/kg  
SAUMON 14€/kg  
SAUCE

## CRUSTACÉS

- HOMARD BRETAGNE 45€/kg
- HOMARD CANADIEN 30€/kg
- COQUILLES ST. JACQUES
- PINCES DE CRABE
- BULOT
- ÉCARTONNEUX
- COQUILLES BRETAGNE

## À EMPORTER

- BISQUE DE HOMARD 18€/
- SOPE DE POISSON ROULÉE + COQUILLES

## COUSQUETTES

- COUSQUETTES 3€/
- LAPEREUSE 45€/

## SAUCES

- SAUCES
- GRUYERE
- PESTO BLANC
- AÏOLI (avec échalote râpée) 65€/

MAYONNAISE





## NEW TRIA® 75 RING, ROUND, GU10/LED MODULES



Ø: 9.3 cm  
H: 2.6 cm  
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1007343   | 18.00 |
| ○ white     | 1007342   | 18.00 |
| ● aluminium | 1007351   | 21.00 |
| ● Pink gold | 1007344   | 25.00 |

## NEW TRIA® 75 RING, SQUARE, GU10/LED MODULES



L: 9 cm  
W: 9.00 cm  
H: 2.6 cm  
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1007340   | 18.00 |
| ○ white     | 1007349   | 18.00 |
| ● aluminium | 1007350   | 21.00 |
| ● Pink gold | 1007341   | 25.00 |

## NEW TRIA® 75 XL RING, ROUND, GU10/LED MODULES



Ø: 11 cm  
H: 2.6 cm  
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1007631   | 22.00 |
| ○ white     | 1007630   | 22.00 |
| ● aluminium | 1007632   | 25.00 |
| ● Pink gold | 1007633   | 30.00 |

## NEW TRIA® 75 RING, ROUND, GU10/LED MODULES



Ø: 8.2 cm  
H: 4.9 cm  
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007449   | 17.00 |
| ○ white | 1007450   | 17.00 |

## NEW TRIA® 75 RING, ROUND, GU10/LED MODULES



Ø: 8.2 cm  
H: 4.3 cm  
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007488   | 13.00 |
| ○ white | 1007489   | 13.00 |

## NEW TRIA® 75 XL RING, SQUARE, GU10/LED MODULES



L: 11 cm  
W: 11.00 cm  
H: 2.6 cm  
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm


| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1007635   | 22.00 |
| ○ white     | 1007634   | 22.00 |
| ● aluminium | 1007636   | 25.00 |
| ● Pink gold | 1007637   | 30.00 |



## CREATE YOUR NEW TRIA 95 DOWNLIGHT



LED module

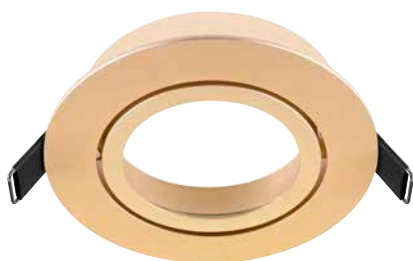

Version-95 mounting rings  
available in black, white,  
pink gold and aluminium




1007412+ 1007444

81



## NEW TRIA® DL, LED MODULE, PHASE

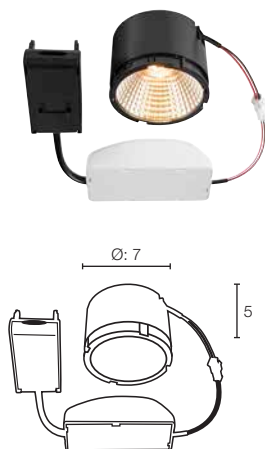

220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 13.3 W  
Material: Aluminium

## NEW TRIA® 95 RING, ROUND, LED MODULES



Ø: 11 cm  
H: 2.6 cm  
Material: Aluminium

- Installation Diameter: 95 mm
- Material thickness of mounting surface:  
max. 20 mm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1007444   | 26.00 |
| ○ white     | 1007443   | 26.00 |
| ● aluminium | 1007445   | 30.00 |
| ● Pink gold | 1007447   | 35.00 |

## NEW TRIA® 95 RING, ROUND, LED MODULES



Ø: 10.3 cm  
H: 5.5 cm  
Material: Aluminium

- Installation Diameter: 95 mm
- Material thickness of mounting surface:  
max. 20 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007452   | 26.00 |
| ○ white | 1007454   | 26.00 |



|         |         |
|---------|---------|
| 1007409 | 2700 K  |
| 1007411 | 1130 lm |
| 1007410 | 3000 K  |
| 1007412 | 1200 lm |

## NEW TRIA® 95 RING, SQUARE, LED MODULES



L: 11 cm  
W: 11.00 cm  
H: 2.6 cm  
Material: Aluminium

- Installation Diameter: 95 mm
- Material thickness of mounting surface:  
max. 20 mm


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007446   | 26.00 |
| ○ white | 1007448   | 26.00 |

| Variant                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| ● black<br>2700 K   38° | 1007409   | 81.00 |
| ● black<br>3000 K   38° | 1007410   | 81.00 |
| ● black<br>3000 K   60° | 1007412   | 82.00 |
| ○ white<br>2700 K   60° | 1007411   | 81.00 |



NEW TRIA®  
DL, DOUBLE, LED MODULE,  
PHASE

NEW TRIA® 155  
RING, DOUBLE, SQUARE GU10/  
LED MODULE



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 13.6 W  
Material: Aluminium



L: 17 cm  
W: 9.00 cm  
H: 3.75 cm  
Material: Aluminium

- Spring clips

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1008007   | 33.00 |
| ○ white     | 1008008   | 33.00 |
| ● aluminium | 1008009   | 33.00 |



|         |        |
|---------|--------|
| 1008005 | 2700K  |
|         | 1220lm |
| 1008006 | 3000K  |
|         | 1280lm |

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● black<br>2700 K | 1008005   | 65.00 |
| ● black<br>3000 K | 1008006   | 65.00 |

# CONFIGURE YOUR NEW TRIA®

---

For greater flexibility, the NEW TRIA offers the option of configuring customised sets from the modular system in addition to the existing sets. Simply choose the right options and benefit from rapid installation.


## CHOOSE YOUR PREFERRED MOUNTING RING ...

- 1 Installation diameter: 68, 75, 95 mm
- 2 Pivoting, rotating and pivoting, IP65
- 3 Colour  
*black, white, pink gold or aluminium*
- 4 round or square

## CHOOSE YOUR PREFERRED MODULE...

- 5 Colour temperature  
*2700K or 3000K, 1800 — 3000K or CCT 2500 / 3000 / 4000K*
- 6 Beam angle  
*38° / 60°*

DONE!

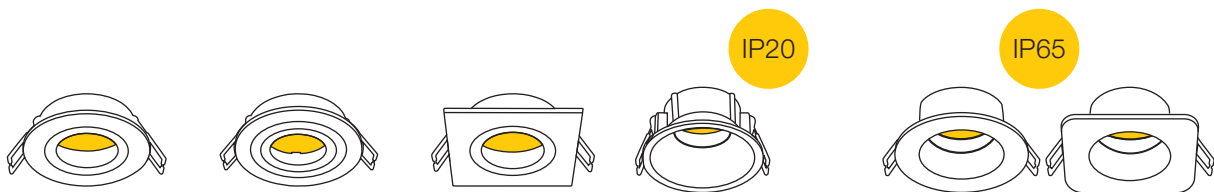


Mounting ring


Available as a pivoting, rotating and pivoting, or IP65 version  
with 68, 75 or 95 mm installation diameter

Available in black, white, pink gold or aluminium


Available in round or square design



GU10



LED MODULE



LED MODULE

**NEW TRIA® 68**

**NEW TRIA® 75**

**NEW TRIA® 95**

Colour temperature  
2700 / 3000K, DTW 1800 - 3000K or multi CCT

Colour temperature  
2700 / 3000K


Beam angle  
38° / 60°

Beam angle  
38° / 60°



113830 87

## NEW TRIA® 150 DL, ROUND, QPAR111



220-240 V ~50/60 Hz  
Material: Aluminium

- Leaf springs



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 113550    | 45.00 |
| ○ white | 113540    | 45.00 |



GU10 | 12 W | 55°  
670 lm | 2700 K | EEC = G




Prod. no.: 1005297 73.00 GBP



## NEW TRIA® 300

DL, ANGULAR, QPAR111



220-240 V ~50/60 Hz  
Material: Aluminium

- Leaf springs



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 113830    | 45.00 |
| ○ white | 113541    | 45.00 |




GU10 | 8 W | 38°  
680 lm | 2700 K | EEC = F



Prod. no.: 1005274 26.00 GBP

## NEW TRIA®

DL, DOUBLE, QPAR111



220-240 V ~50/60 Hz  
Material: Aluminium

- Spring clips



Base: 2xGU10

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 113840    | 90.00 |
| ○ white     | 113841    | 90.00 |
| ● aluminium | 111382    | 99.00 |




GU10 | 13 W | 10°  
900 lm | 2700 K | EEC = G



Prod. no.: 1005275 48.00 GBP

## GLENOS® PRO

RL, 1,2 M, DALI, UGR19



220-240 V ~0/50/60 Hz | 750 mA  
Total Wattage: 30 W  
Material: Aluminium/Plastic PC




|         |         |
|---------|---------|
| 1010521 | 3000 K  |
| 1010522 | 3650 lm |
| 1010523 | 4000 K  |
| 1010524 | 3900 lm |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black<br>3650 lm   3000 K       | 1010522   | 399.00 |
| ● black<br>3900 lm   4000 K       | 1010524   | 399.00 |
| ● white/black<br>3650 lm   3000 K | 1010521   | 399.00 |
| ● white/black<br>3900 lm   4000 K | 1010523   | 399.00 |



# MEDO® 30

## RL, FRAME

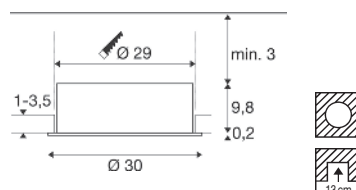

250 mA

Power consumption: 8 W

Material: Steel



|      | 3000 K  | 4000 K  |
|------|---------|---------|
| Down | 1150 lm | 1200 lm |

| Variant | Prod. no.      | GBP           |
|---------|----------------|---------------|
| ○ white | <b>1008629</b> | <b>142.00</b> |




| Product                                                  | Prod. no.      | GBP          |
|----------------------------------------------------------|----------------|--------------|
| LED driver 10 W   180-270 mA PHASE                       |                |              |
| ○ white                                                  | <b>1008660</b> | <b>28.00</b> |
| LED driver 15 W   100-700 mA DALI                        |                |              |
| ○ white                                                  | <b>1008666</b> | <b>63.00</b> |
| Strain relief for non-dimmable drivers, standard         |                |              |
| ○ white                                                  | <b>1008670</b> | <b>1.00</b>  |
| Strain relief for non-dimmable drivers, through-wirable  |                |              |
| ○ white                                                  | <b>1008671</b> | <b>3.00</b>  |
| Strain relief for DALI dimmable drivers, standard        |                |              |
| ○ white                                                  | <b>1008672</b> | <b>1.00</b>  |
| Strain relief for DALI dimmable drivers, through-wirable |                |              |
| ○ white                                                  | <b>1008673</b> | <b>3.00</b>  |
| LED driver 21 W   150-500 mA                             |                |              |
| ○ white                                                  | <b>1008699</b> | <b>20.00</b> |



## MEDO® 40

RL, FRAME

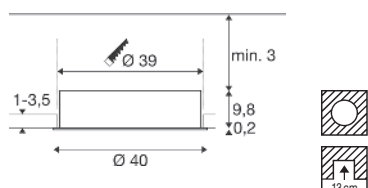

500 mA  
Power Consumption: 16 W  
Material: Steel



|      | 3000 K  | 4000 K  |
|------|---------|---------|
| Down | 2350 lm | 2450 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1008631   | 176.00 |



| Product                                                  | Prod. no. | GBP   |
|----------------------------------------------------------|-----------|-------|
| LED driver 20 W   350-500 mA PHASE                       |           |       |
| ○ white                                                  | 1008663   | 42.00 |
| LED driver 23 W   100-700 mA DALI                        |           |       |
| ○ white                                                  | 1008667   | 68.00 |
| Strain relief for non-dimmable drivers, standard         |           |       |
| ○ white                                                  | 1008670   | 1.00  |
| Strain relief for non-dimmable drivers, through-wirable  |           |       |
| ○ white                                                  | 1008671   | 3.00  |
| Strain relief for DALI dimmable drivers, standard        |           |       |
| ○ white                                                  | 1008672   | 1.00  |
| Strain relief for DALI dimmable drivers, through-wirable |           |       |
| ○ white                                                  | 1008673   | 3.00  |
| LED driver 21 W   150-500 mA                             |           |       |
| ○ white                                                  | 1008699   | 20.00 |

## MEDO® 60

RL, FRAME

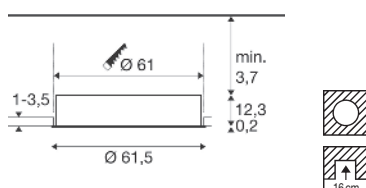

1000 mA  
Power Consumption: 33 W  
Material: Steel



|      | 3000 K  | 4000 K  |
|------|---------|---------|
| Down | 4600 lm | 4600 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1008633   | 399.00 |



| Product                                                         | Prod. no. | GBP   |
|-----------------------------------------------------------------|-----------|-------|
| LED driver 40 W   700-1050 mA PHASE                             |           |       |
| ○ white                                                         | 1008665   | 50.00 |
| LED driver 53 W   650-1400 mA DALI                              |           |       |
| ○ white                                                         | 1008669   | 80.00 |
| Strain relief for non-dimmable drivers, standard                |           |       |
| ○ white                                                         | 1008670   | 1.00  |
| Strain relief for non-dimmable drivers, through-wirable         |           |       |
| ○ white                                                         | 1008671   | 3.00  |
| Strain relief for DALI dimmable driver 1008669, standard        |           |       |
| ○ white                                                         | 1008674   | 1.00  |
| LED driver 44 W   700-1050 mA                                   |           |       |
| ○ white                                                         | 1008701   | 29.00 |
| Strain relief for DALI dimmable driver 1008669, through-wirable |           |       |
| ○ white                                                         | 1008702   | 3.00  |

## MEDO® 90

RL, FRAME

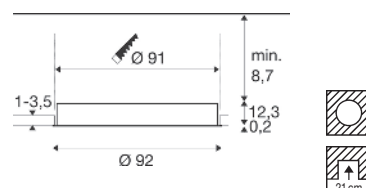

1000 mA  
Power consumption: 66 W  
Material: Aluminium



|      | 3000 K  | 4000 K  |
|------|---------|---------|
| Down | 9200 lm | 9500 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1008635   | 798.00 |




| Product                                                         | Prod. no. | GBP   |
|-----------------------------------------------------------------|-----------|-------|
| LED driver 40 W   700-1050 mA PHASE                             |           |       |
| ○ white                                                         | 1008665   | 50.00 |
| LED driver 53 W   650-1400 mA DALI                              |           |       |
| ○ white                                                         | 1008669   | 80.00 |
| Strain relief for non-dimmable drivers, standard                |           |       |
| ○ white                                                         | 1008670   | 1.00  |
| Strain relief for non-dimmable drivers, through-wirable         |           |       |
| ○ white                                                         | 1008671   | 3.00  |
| Strain relief for DALI dimmable driver 1008669, standard        |           |       |
| ○ white                                                         | 1008674   | 1.00  |
| LED driver 44 W   700-1050 mA                                   |           |       |
| ○ white                                                         | 1008701   | 29.00 |
| Strain relief for DALI dimmable driver 1008669, through-wirable |           |       |
| ○ white                                                         | 1008702   | 3.00  |



1000914 90

## HORN MINI EL



350 mA  
Power Consumption: 1 W  
Material: Aluminium/Polycarbonate (PC)

- Spring clips
- inc. AMP plug
- Different light colour with golden reflector



|         |        |
|---------|--------|
| 1000914 | 3000 K |
| 1000915 | 70 lm  |
| 1000917 | 2900 K |
|         | 70 lm  |

| Variant                | Prod. no. | GBP   |
|------------------------|-----------|-------|
| ● black/gold<br>2900 K | 1000917   | 39.00 |
| ● black<br>3000 K      | 1000915   | 36.00 |
| ○ white<br>3000 K      | 1000914   | 36.00 |




| Product                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| LED driver 4 W   350 mA |           |       |
| ○ white                 | 1008656   | 17.00 |



## HORN

DL, SINGLE, QPAR51




220-240 V ~50/60 Hz  
Material: Aluminium

- Spring clips

## HORN

DL, DOUBLE, QPAR51




220-240 V ~50/60 Hz  
Material: Aluminium

- Spring clips

## HORN

DL, SINGLE, ASYMMETRICAL, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium

- Spring clips



Base: 1xGU10



Base: 2xGU10



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 113140    | 46.00 |
| ○ white | 113141    | 46.00 |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006121   | 66.00 |
| ○ white | 1006122   | 66.00 |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 113150    | 50.00 |
| ○ white | 113151    | 50.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F




Prod. no.: 1012469 23.00 GBP



## HORN

DL, SINGLE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium


- Spring clips



Base: 1xGU10

## HORN 1

EL, SINGLE, QPAR51



220-240 V ~50/60 Hz  
Material: Steel

- Spring clips



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.4 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 113160    | 31.00 |
| ○ white | 113161    | 31.00 |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 112910    | 25.00 |
| ○ white | 112911    | 25.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F




Prod. no.: 1012469 23.00 GBP



## HORN

DL, GU10, BLOWER DOOR  
TESTED



220-240 V ~50/60 Hz  
Material: Aluminium

- Spring clips
- The downlight is compliant with RT2012 standards.



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1005435   | 24.00 |
| ○ white | 1005436   | 24.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## HORN T

EL, QPAR111



220-240 V ~50/60 Hz  
Material: Steel

- Spring clips



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 113170    | 61.00 |
| ○ white | 113171    | 61.00 |




GU10 | 12 W | 55°  
670 lm | 2700 K | EEC = G



Prod. no.: 1005297 73.00 GBP

## HORN MAGNA

EL



500 mA  
Power Consumption: 9 W  
Material: Aluminium/Polycarbonate (PC)

- Spring clips
- Different light colour with golden reflector
- open cable end



|         |                  |
|---------|------------------|
| 1002591 | 3000 K<br>550 lm |
| 1002592 | 3000 K<br>445 lm |
| 1002594 | 3000 K<br>570 lm |

| Variant                | Prod. no. | GBP   |
|------------------------|-----------|-------|
| ● black/gold<br>570 lm | 1002594   | 68.00 |
| ● black<br>445 lm      | 1002592   | 66.00 |
| ○ white<br>550 lm      | 1002591   | 66.00 |



| Product                                                                        | Prod. no. | GBP   |
|--------------------------------------------------------------------------------|-----------|-------|
| Honeycomb module                                                               |           |       |
| ● black                                                                        | 1002596   | 4.00  |
| LED driver 21 W   500 mA including strain relief                               |           |       |
| ○ white                                                                        | 1007226   | 26.00 |
| LED driver 20 W   350 mA/500 mA Phase control dimmable including strain relief |           |       |
| ○ white                                                                        | 1007227   | 36.00 |
| LED driver 25 W   150-700 mA DALI dimmable including strain relief             |           |       |
| ○ white                                                                        | 1007229   | 62.00 |

1012199


94



## SENDER 2.0 12

RL, SQUARE, PHASE

NEW



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 8.4 W  
Material: Aluminium/Plastic PC



| 1012199 Down | 3000 K | 4000 K |
|--------------|--------|--------|
|              | 650 lm | 650 lm |


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012199 ● | 42.00 |



## SENDER 2.0 18

RL, SQUARE, PHASE

NEW



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 12 W  
Material: Aluminium/Plastic PC




| 1012201 | Down | 3000 K  | 4000 K  |
|---------|------|---------|---------|
|         |      | 1100 lm | 1150 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012201   | 60.00 |

## SENDER 2.0 24

RL, SQUARE, PHASE

NEW



UGR 22

220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 20 W  
Material: Aluminium/Plastic PC




| 1012203 | Down | 3000 K  | 4000 K  |
|---------|------|---------|---------|
|         |      | 1900 lm | 2000 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012203   | 68.00 |

## SENDER 2.0 30

RL, SQUARE, PHASE

NEW



UGR 19


220-240 V ~50/60 Hz | 500 mA  
Total Wattage: 25 W  
Material: Aluminium/Plastic PC



| 1012205 | Down | 3000 K  | 4000 K  |
|---------|------|---------|---------|
|         |      | 2550 lm | 2700 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012205   | 92.00 |



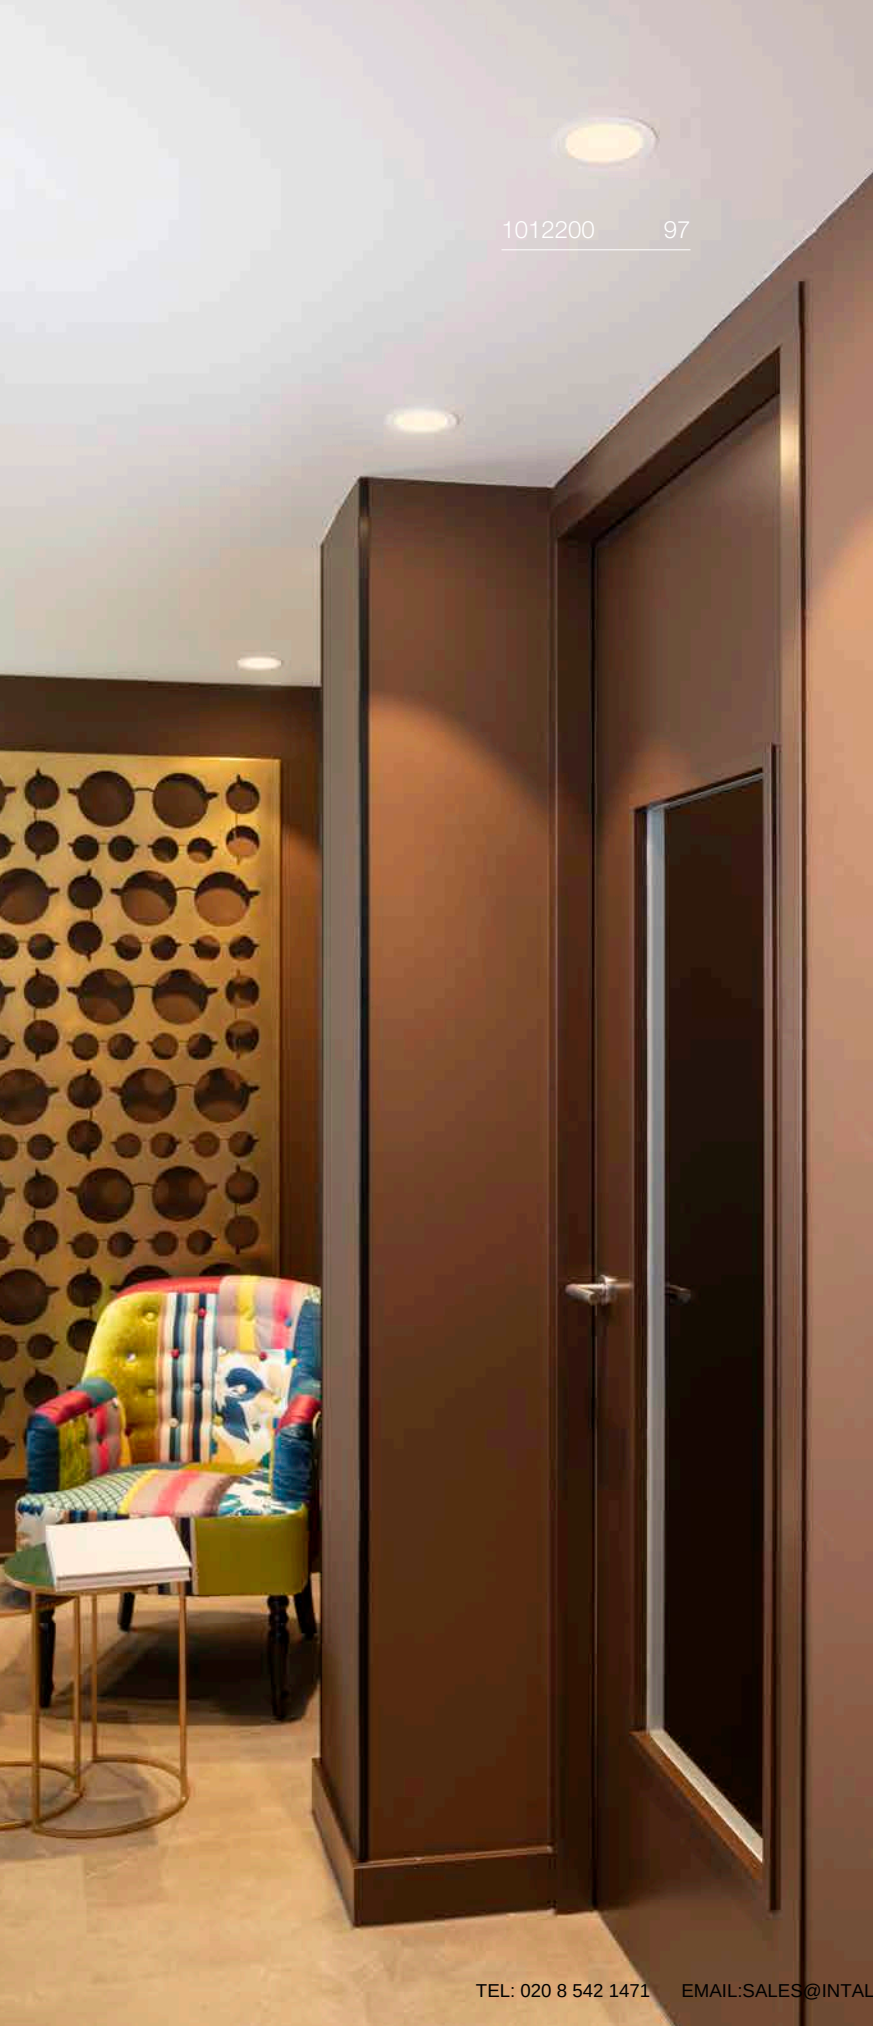


1012200

97

## SENSER 2.0 12

RL, ROUND, PHASE

NEW



220-240 V ~50/60 Hz | 350 mA

Total Wattage: 8 W

Material: Aluminium/Plastic PC



1012198 Down

3000 K  
600 lm

4000 K  
650 lm


| Variant | Prod. no. | GBP     |
|---------|-----------|---------|
| ○ white | 1012198   | ● 42.00 |



## SENSE 2.0 18

RL, ROUND, PHASE

NEW



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 12 W  
Material: Aluminium/Plastic PC




|              | 3000 K  | 4000 K  |
|--------------|---------|---------|
|              | 1100 lm | 1200 lm |
| 1012200 Down |         |         |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012200   | 60.00 |

## SENSE 2.0 24

RL, ROUND, PHASE

NEW



UGR 25

220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 18 W  
Material: Aluminium/Plastic PC




|              | 3000 K  | 4000 K  |
|--------------|---------|---------|
|              | 1800 lm | 1900 lm |
| 1012202 Down |         |         |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012202   | 68.00 |

## SENSE 2.0 30

RL, ROUND, PHASE

NEW



UGR 22

220-240 V ~50/60 Hz | 500 mA  
Total Wattage: 25 W  
Material: Aluminium/Plastic PC




|              | 3000 K  | 4000 K  |
|--------------|---------|---------|
|              | 2450 lm | 2600 lm |
| 1012204 Down |         |         |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012204   | 92.00 |

## SENER 2.0 12

RL, SQUARE, DALI

NEW



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 7 W  
Material: Aluminium/Plastic PC



|              |        |        |
|--------------|--------|--------|
| 1012207 Down | 3000 K | 4000 K |
|              | 650 lm | 650 lm |


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012207 ● | 77.00 |



## SENDER 2.0 18

RL, SQUARE, DALI

NEW



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 12 W  
Material: Aluminium/Plastic PC




|         |      |         |         |
|---------|------|---------|---------|
| 1012229 | Down | 3000 K  | 4000 K  |
|         |      | 1100 lm | 1150 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012229   | 96.00 |

## SENDER 2.0 24

RL, SQUARE, DALI

NEW



UGR 22

220-240 V ~50/60 Hz | 500 mA  
Total Wattage: 18 W  
Material: Aluminium/Plastic PC




|         |      |         |         |
|---------|------|---------|---------|
| 1012210 | Down | 3000 K  | 4000 K  |
|         |      | 1900 lm | 2000 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1012210   | 105.00 |

## SENDER 2.0 30

RL, SQUARE, DALI

NEW



UGR 19

220-240 V ~50/60 Hz | 500 mA  
Total Wattage: 24 W  
Material: Aluminium/Plastic PC




|         |      |         |         |
|---------|------|---------|---------|
| 1012212 | Down | 3000 K  | 4000 K  |
|         |      | 2550 lm | 2700 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1012212   | 126.00 |

## SENER 2.0 12

RL, ROUND, DALI

NEW



220-240 V ~50/60 Hz | 350 mA

Total Wattage: 7 W

Material: Aluminium/Plastic PC



1012206 Down

3000 K  
600 lm

4000 K  
650 lm


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012206 ● | 77.00 |



## SENDER 2.0 18

RL, ROUND, DALI

NEW



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 12 W  
Material: Aluminium/Plastic PC




| 1012208 Down | 3000 K  | 4000 K  |
|--------------|---------|---------|
|              | 1100 lm | 1200 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012208   | 96.00 |

## SENDER 2.0 24

RL, ROUND, DALI

NEW



UGR 25

220-240 V ~50/60 Hz | 500 mA  
Total Wattage: 18 W  
Material: Aluminium/Plastic PC




| 1012209 Down | 3000 K  | 4000 K  |
|--------------|---------|---------|
|              | 1800 lm | 1900 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1012209   | 105.00 |

## SENDER 2.0 30

RL, ROUND, DALI

NEW



UGR 22

220-240 V ~50/60 Hz | 500 mA  
Total Wattage: 24 W  
Material: Aluminium/Plastic PC




| 1012211 Down | 3000 K  | 4000 K  |
|--------------|---------|---------|
|              | 2450 lm | 2600 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1012211   | 126.00 |

## DOWNLIGHT VARIO 220

22 830/840 WH ML

NEW



220-240 V ~50/60 Hz | 100 / 190 mA  
 Total Wattage: 9 W / 18 W  
 Material: Plastic PC

- For installation in ceiling cut-outs measuring 65–195 mm
- Also suitable for surface mounting
- BEG-eligible




|      |         |         |
|------|---------|---------|
| 9 W  | 3000 K  | 4000 K  |
|      | 1150 lm | 1200 lm |
| 18 W | 3000 K  | 4000 K  |
|      | 2200 lm | 2250 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1010397 ● | 42.00 |



## DOWNLIGHT VARIO 290

28 830/840 WH ML

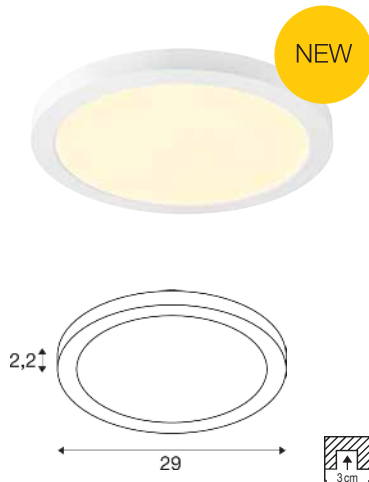

220-240 V ~50/60 Hz | 80 / 170 mA  
Total Wattage: 11 W / 23 W  
Material: Plastic PC

- For installation in ceiling cut-outs measuring 65–265 mm
- Also suitable for surface mounting
- BEG-eligible



|      |         |         |
|------|---------|---------|
| 11 W | 3000 K  | 4000 K  |
|      | 1550 lm | 1600 lm |
| 23 W | 3000 K  | 4000 K  |
|      | 2950 lm | 3000 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1010398   | 59.00 |

## DOWNLIGHT VARIO 220

22 830/840 WH ML PIR



220-240 V ~50/60 Hz | 90 / 180 mA  
Total Wattage: 9 W / 18 W  
Material: Plastic PC

- For installation in ceiling cut-outs measuring 65–195 mm
- Also suitable for surface mounting
- BEG-eligible




|      |         |         |         |
|------|---------|---------|---------|
| 9 W  | 3000 K  | 3500 K  | 4000 K  |
|      | 1150 lm | 1175 lm | 1200 lm |
| 18 W | 3000 K  | 3500 K  | 4000 K  |
|      | 2200 lm | 2225 lm | 2250 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1010399   | 50.00 |

## DOWNLIGHT VARIO 290

28 830/840 WH ML PIR

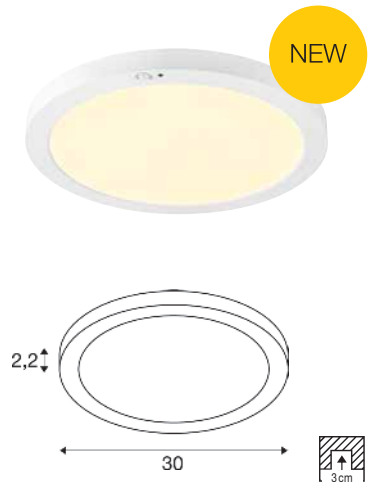

220-240 V ~50/60 Hz | 80 / 160 mA  
Total Wattage: 11 W / 23 W  
Material: Plastic PC

- For installation in ceiling cut-outs measuring 65–265 mm
- Also suitable for surface mounting
- BEG-eligible




|      |         |         |         |
|------|---------|---------|---------|
| 11 W | 3000 K  | 3500 K  | 4000 K  |
|      | 1550 lm | 1575 lm | 1600 lm |
| 23 W | 3000 K  | 3500 K  | 4000 K  |
|      | 2950 lm | 2975 lm | 3000 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1010400   | 67.00 |



VERLUX  
EL, SQUARE, PHASE

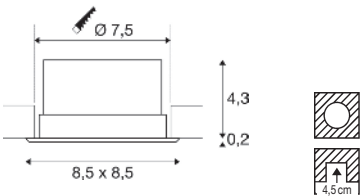

220-240 V ~50/60 Hz | 500 mA  
Total Wattage: 11 W  
Material: Aluminium/Plastic


- Spring clips
- Material thickness of mounting surface: max. 20 mm



3000 K  
940 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 112682    | 79.00 |

VERLUX  
EL, SQUARE, PHASE

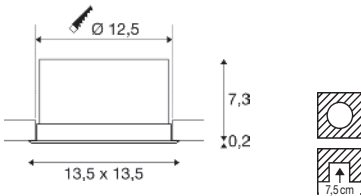

220-240 V ~50/60 Hz | 500 mA  
Total Wattage: 22 W  
Material: Aluminium/Plastic

- Spring clips
- Material thickness of mounting surface: max. 20 mm




3000 K  
1800 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 112692    | 117.00 |



## DL 126 EL



12 V  
Power consumption: 2.8 W  
Material: Aluminium/Plastic

- Spring clips




3000 K  
170 lm

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ○ white  | 112221    | 31.00 |
| ● chrome | 112222    | 37.00 |
| ● grey   | 112225    | 31.00 |



| Product                             | Prod. no. | GBP   |
|-------------------------------------|-----------|-------|
| LED power supply 12 V   24 W, round |           |       |
| ○ white                             | 1008651   | 23.00 |

## PIKA DL, ROUND, QPAR51, RIGID



220-240 V ~50/60 Hz  
Material: Aluminium

- Spring clips



Base: 1xGU10

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ○ white  | 1000714   | 12.00 |
| ● brass  | 1000716   | 16.00 |
| ● chrome | 1000715   | 17.00 |
| ● grey   | 1000717   | 12.00 |




GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP

## PIKA DL, ROUND, QPAR51, PIVOTING



220-240 V ~50/60 Hz  
Material: Aluminium

- Spring clips



Base: 1xGU10

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ○ white  | 1000718   | 17.00 |
| ● brass  | 1000720   | 19.00 |
| ● chrome | 1000719   | 19.00 |
| ● grey   | 1000721   | 16.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F




Prod. no.: 1012469 23.00 GBP





## OCULUS CL, MOVE, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total Wattage: 11 W  
Material: Aluminium


- Spring clips
- Additional frosted lens included



|        |        |
|--------|--------|
| 2000 K | 3000 K |
| 36 lm  | 780 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004668   | 147.00 |
| ○ white | 1004669   | 147.00 |

## OCCULDAS 14 EL, INDIRECT, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 15 W  
Material: Aluminium/Steel


- Spring clips



|        |        |
|--------|--------|
| 117331 | 3000 K |
|        | 810 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 117331    | 147.00 |

## OCCULDAS 23 EL, INDIRECT, PHASE



220-240 V ~50/60 Hz | 700 mA  
Total Wattage: 23 W  
Material: Aluminium/Steel

- Spring clips




|        |         |
|--------|---------|
| 117311 | 3000 K  |
|        | 1500 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 117311    | 268.00 |

## ENOLA® 2.0 S RL, SINGLE, GU10 MINI, PAR11


NEW



220-240 V ~50/60 Hz  
Material: Aluminium/Steel/Plastic PC

## ENOLA® 2.0 S RL, DOUBLE, GU10 MINI, PAR11

NEW



220-240 V ~50/60 Hz  
Material: Aluminium/Steel/Plastic PC

## ENOLA® 2.0 S DECORATIVE RING

NEW



Ø: 3.9 cm  
H: 1.1 cm  
Material: Plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011753   | 4.00 |
| ○ white  | 1011754   | 4.00 |
| ● gold   | 1011755   | 4.00 |
| ● copper | 1011756   | 4.00 |



Base: 1xGU10 max. Ø: 3.6 cm L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011919   | 42.00 |
| ○ white | 1011920   | 42.00 |



Base: 2xGU10 max. Ø: 3.6 cm L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011921   | 88.00 |
| ○ white | 1011922   | 88.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP



| Product                 | Prod. no. | GBP  |
|-------------------------|-----------|------|
| ENOLA® 2.0 S, Deco Ring |           |      |
| ● black                 | 1011753   | 4.00 |
| ○ white                 | 1011754   | 4.00 |
| ● gold                  | 1011755   | 4.00 |
| ● copper                | 1011756   | 4.00 |




| Product                 | Prod. no. | GBP  |
|-------------------------|-----------|------|
| ENOLA® 2.0 S, Deco Ring |           |      |
| ● black                 | 1011753   | 4.00 |
| ○ white                 | 1011754   | 4.00 |
| ● gold                  | 1011755   | 4.00 |
| ● copper                | 1011756   | 4.00 |



## ENOLA® 2.0 M RL, SINGLE, GU10, QPAR51



NEW




220-240 V ~50/60 Hz  
Material: Aluminium/Steel/Plastic PC

## ENOLA® 2.0 M RL, DOUBLE, GU10, QPAR51



NEW



220-240 V ~50/60 Hz  
Material: Aluminium/Steel/Plastic PC

## ENOLA® 2.0/BIMA 2.0 M DECORATIVE RING



NEW

Ø: 5.4 cm  
H: 2 cm  
Material: Plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011749   | 4.00 |
| ○ white  | 1011750   | 4.00 |
| ● gold   | 1011751   | 4.00 |
| ● copper | 1011752   | 4.00 |



Base: 1xGU10 max. Ø: 5.1 cm L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011899   | 52.00 |
| ○ white | 1011900   | 52.00 |



Base: 2xGU10 max. Ø: 5.1 cm L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011901   | 92.00 |
| ○ white | 1011902   | 92.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



| Product                          | Prod. no. | GBP  |
|----------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Deco Ring |           |      |
| ● black                          | 1011749   | 4.00 |
| ○ white                          | 1011750   | 4.00 |
| ● gold                           | 1011751   | 4.00 |
| ● copper                         | 1011752   | 4.00 |




| Product                          | Prod. no. | GBP  |
|----------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Deco Ring |           |      |
| ● black                          | 1011749   | 4.00 |
| ○ white                          | 1011750   | 4.00 |
| ● gold                           | 1011751   | 4.00 |
| ● copper                         | 1011752   | 4.00 |



## KARPO 30 EL



1009053 111



500 mA

Power Consumption: 7.5 W

Material: Aluminium/Steel

- When connecting several lights, make sure they are connected in series!
- When using different drivers, the lights can be combined with the Veleto system.
- Driver not included



|        |        |
|--------|--------|
|        | 3000 K |
| 152380 | 450 lm |
|        | 3000 K |
| 152381 | 470 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 152380    | 109.00 |
| ○ white | 152381    | 109.00 |



| Product                                                                        | Prod. no. | GBP   |
|--------------------------------------------------------------------------------|-----------|-------|
| LED driver 21 W   500 mA including strain relief                               |           |       |
| ○ white                                                                        | 1007226   | 26.00 |
| LED driver 20 W   350 mA/500 mA Phase control dimmable including strain relief |           |       |
| ○ white                                                                        | 1007227   | 36.00 |
| LED driver 25 W   150-700 mA DALI dimmable including strain relief             |           |       |
| ○ white                                                                        | 1007229   | 62.00 |




## GRIP! S

WL, RECESSED, Ø 3,0 CM



NEW



220-240 V ~50/60 Hz | 12 V  
Total Wattage: 4.2 W  
Material: Aluminium

- Honeycomb accessories included
- Includes a USB-C charger and dimmer switch



2700 K  
190 lm


| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1012364   | 189.00 |
| ● white/black  | 1012363   | 189.00 |
| ● bronze/black | 1012365   | 189.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| GRIP! S, Deco Ring + Spacer |           |       |
| ○ white                     | 1011829   | 16.00 |
| ● black                     | 1011830   | 16.00 |
| ● Nickel                    | 1011831   | 16.00 |
| ● gold                      | 1011832   | 16.00 |
| HONEYCOMB + Spacer          |           |       |
| ● black                     | 1011837   | 8.00  |

## GRIP! S

EL, PHASE, Ø 3,0 CM



220-240 V ~50/60 Hz | 250 mA  
Total Wattage: 10 W  
Material: Steel

- Honeycomb accessories included
- Including external LED driver




|         |      |        |
|---------|------|--------|
| 1009052 | Down | 2700 K |
| 1009054 |      | 590 lm |
| 1009056 |      |        |
| 1009058 |      |        |
| 1009053 | Down | 3000 K |
| 1009055 |      | 620 lm |
| 1009057 |      |        |
| 1009059 |      |        |

| Variant         | Prod. no. | GBP    |
|-----------------|-----------|--------|
| ● black/gold    |           |        |
| 590 lm   2700 K | 1009054   | 113.00 |
| ● black/gold    |           |        |
| 620 lm   3000 K | 1009055   | 113.00 |
| ● white/black   |           |        |
| 590 lm   2700 K | 1009052   | 113.00 |
| ● white/black   |           |        |
| 620 lm   3000 K | 1009053   | 113.00 |
| ● gold/black    |           |        |
| 590 lm   2700 K | 1009058   | 113.00 |
| ● gold/black    |           |        |
| 620 lm   3000 K | 1009059   | 113.00 |
| ● bronze/black  |           |        |
| 590 lm   2700 K | 1009056   | 113.00 |
| ● bronze/black  |           |        |
| 620 lm   3000 K | 1009057   | 113.00 |

## GRIP! M

EL, PHASE, Ø 4,3 CM



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 14 W  
Power Consumption: 17 W  
Material: Steel

- Honeycomb accessories included
- Including external LED driver



|         |      |         |
|---------|------|---------|
| 1009084 | Down | 2700 K  |
| 1009086 |      | 1460 lm |
| 1009088 |      |         |
| 1009090 |      |         |
| 1009085 | Down | 3000 K  |
| 1009087 |      | 1460 lm |
| 1009089 |      |         |
| 1009091 |      |         |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   |           |        |
| 2700 K         | 1009086   | 147.00 |
| ● black/gold   |           |        |
| 3000 K         | 1009087   | 147.00 |
| ● white/black  |           |        |
| 2700 K         | 1009084   | 147.00 |
| ● white/black  |           |        |
| 3000 K         | 1009085   | 147.00 |
| ● gold/black   |           |        |
| 2700 K         | 1009090   | 147.00 |
| ● gold/black   |           |        |
| 3000 K         | 1009091   | 147.00 |
| ● bronze/black |           |        |
| 2700 K         | 1009088   | 147.00 |
| ● bronze/black |           |        |
| 3000 K         | 1009089   | 147.00 |



| Product            | Prod. no. | GBP   |
|--------------------|-----------|-------|
| GRIP! M, Deco Ring |           |       |
| ○ white            | 1011833   | 18.00 |
| ● black            | 1011834   | 18.00 |
| ● nickel           | 1011835   | 18.00 |
| ● gold             | 1011836   | 18.00 |
| HONEYCOMB + Spacer |           |       |
| ● black            | 1011838   | 10.00 |








## PLASTRA

RL, ROUND, QPAR51



220-240 V ~50/60 Hz  
Material: Plaster/Steel

- Spring clips



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 148070    | 37.00 |




GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP

## PLASTRA

RL, SQUARE, QPAR51



220-240 V ~50/60 Hz  
Material: Plaster/Steel

- Spring clips



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 148071    | 37.00 |




GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP

## VARU

EL, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Spring clips



Base: 1xGU10 max. Ø: 5.1 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1001930   | 37.00 |
| ○ white | 1001931   | 37.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F




Prod. no.: 1005077 7.00 GBP



1001166 114

DOLIX OUT  
EL, ROUND, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Spring clips



Base: 1xGU10

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ○ white  | 1001165   | 31.00 |
| ○ silver | 1001168   | 35.00 |
| ● chrome | 1001166   | 35.00 |
| ● grey   | 1001167   | 31.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F




Prod. no.: 1005077 7.00 GBP



## DOLIX OUT

EL, SQUARE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Spring clips



Base: 1xGU10

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ○ white  | 1001169   | 31.00 |
| ○ silver | 1001172   | 35.00 |
| ● grey   | 1001171   | 31.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: 1012470 29.00 GBP

## KINI

EL, PHASE



220-240 V ~50/60 Hz | 260 mA  
Total Wattage: 12 W  
Material: Aluminium/Polycarbonate (PC)

- Spring clips




3000 K  
850 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1000833   | 92.00 |

## AKALO D83

EL



220-240 V ~50/60 Hz | 120 mA  
Total Wattage: 9 W  
Material: Aluminium/Polycarbonate (PC)


- Spring clips



|        |        |        |
|--------|--------|--------|
| 3000 K | 4000 K | 5700 K |
| 800 lm | 880 lm | 850 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1001264   | 37.00 |


## FRAME BASIC RL



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 8.3 W  
Material: Aluminium/Acrylic

- Spring clips

## FRAME BASIC RL, HV



100-240 V ~50/60 Hz | 350 mA  
Total Wattage: 3 W  
Material: Aluminium

- Leaf springs

1000577 116



3000K  
600lm



2700K  
170lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 112720    | 47.00 |
| ○ white | 112721    | 47.00 |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1000576   | 62.00 |
| ● grey  | 1000577   | 62.00 |




| Product     | Prod. no. | GBP   |
|-------------|-----------|-------|
| Flush frame |           |       |
| ● gold      | 112780    | 6.00  |
| Wall box    |           |       |
| ● black     | 112781    | 10.00 |



## FRAME BASIC

RL



350 mA  
Power Consumption: 1 W  
Material: Aluminium/Glass

- Leaf springs
- When connecting several lights, make sure they are connected in series!
- AMP connector included / driver not included



3000 K  
40 lm


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 113262    | 35.00 |
| ● grey  | 111262    | 35.00 |



| Product             | Prod. no. | GBP   |
|---------------------|-----------|-------|
| Flush frame         |           |       |
| ● gold              | 112780    | 6.00  |
| Wall Box            |           |       |
| ● black             | 112781    | 10.00 |
| LED driver 4W 350mA |           |       |
| ○ white             | 1008656   | 17.00 |

## FRAME CURVE

EL



100-240 V ~50/60 Hz | 350 mA  
Total Wattage: 3 W  
Material: Aluminium

- Leaf springs



2700 K  
140 lm


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1000574   | 67.00 |
| ● grey  | 1000575   | 67.00 |



| Product     | Prod. no. | GBP   |
|-------------|-----------|-------|
| Flush Frame |           |       |
| ● gold      | 112780    | 6.00  |
| Wall Box    |           |       |
| ● black     | 112781    | 10.00 |

## FRAME CURVE

EL



350 mA  
Power consumption: 1 W  
Material: Aluminium

- When connecting several lights, make sure they are connected in series!
- When using different drivers, the lights can be combined with the Veletto system.
- AMP connector included / driver not included



3000 K  
60 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 113292    | 47.00 |
| ● grey  | 111292    | 47.00 |





| Product             | Prod. no. | GBP   |
|---------------------|-----------|-------|
| Flush Frame         |           |       |
| ● gold              | 112780    | 6.00  |
| Wall Box            |           |       |
| ● black             | 112781    | 10.00 |
| LED driver 4W 350mA |           |       |
| ○ white             | 1008656   | 17.00 |



1002980 119



## NOTAPO S RL



700 mA  
Power Consumption: 2.2 W  
Material: Aluminium

- Leaf springs
- When connecting several lights, make sure they are connected in series!
- Open cable end




3000 K  
6 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1002979   | 52.00 |



| Product                                                            | Prod. no. | GBP   |
|--------------------------------------------------------------------|-----------|-------|
| NOTAPO   mounting frame                                            |           |       |
| ● black                                                            | 1002981   | 21.00 |
| LED driver 25 W   150-700 mA DALI dimmable including strain relief |           |       |
| ○ white                                                            | 1007229   | 62.00 |
| LED Driver 4 W   700 mA                                            |           |       |
| ○ white                                                            | 1008657   | 17.00 |

## NOTAPO L RL



700 mA  
Power Consumption: 2.2 W  
Material: Aluminium

- Leaf springs
- When connecting several lights, make sure they are connected in series!
- Open cable end



3000 K  
6 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1002980   | 72.00 |




| Product                                                            | Prod. no. | GBP   |
|--------------------------------------------------------------------|-----------|-------|
| NOTAPO   mounting frame                                            |           |       |
| ● black                                                            | 1002981   | 21.00 |
| LED driver 25 W   150-700 mA DALI dimmable including strain relief |           |       |
| ○ white                                                            | 1007229   | 62.00 |
| LED Driver 4 W   700 mA                                            |           |       |
| ○ white                                                            | 1008657   | 17.00 |





## DOWNUNDER PUR 80 EL



350 mA  
Power Consumption: 3.6 W  
Material: Aluminium/Steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Low-voltage secondary socket



Down 3000 K  
180 lm


| Variant | Prod. no.     | GBP          |
|---------|---------------|--------------|
| ○ white | <b>151950</b> | <b>52.00</b> |



| Product                 | Prod. no.      | GBP          |
|-------------------------|----------------|--------------|
| Mounting frame          |                |              |
| ● grey                  | <b>151960</b>  | <b>9.00</b>  |
| LED driver 4 W   350 mA |                |              |
| ○ white                 | <b>1008656</b> | <b>17.00</b> |



## DOWNUNDER PUR 150 EL



500 mA  
Power Consumption: 5.2 W  
Material: Aluminium/Steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Low-voltage secondary socket




Down 3000 K  
230 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 151952    | 75.00 |



| Product                                                                        | Prod. no. | GBP   |
|--------------------------------------------------------------------------------|-----------|-------|
| Mounting frame                                                                 |           |       |
| ● grey                                                                         | 151962    | 12.00 |
| LED driver 20 W   350 mA/500 mA Phase control dimmable including strain relief |           |       |
| ○ white                                                                        | 1007227   | 36.00 |
| LED driver 25 W   150-700 mA DALI dimmable including strain relief             |           |       |
| ○ white                                                                        | 1007229   | 62.00 |

## MOBALA EL



100-240 V ~50/60 Hz | 24 V  
Power consumption: 1.3 W  
Material: Aluminium

- The mounting frame (1002984) or wall box (1002983) are required for assembly.
- Leaf springs




3000 K  
14 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1002982   | 63.00 |



| Product                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| MOBALA   wall box       |           |       |
| ● black                 | 1002983   | 13.00 |
| MOBALA   mounting frame |           |       |
| ● black                 | 1002984   | 13.00 |

## WORDO EL



350 mA  
Power Consumption: 1.2 W  
Material: Steel

- When connecting several lights, make sure they are connected in series!
- This item is suitable for installation in cavity walls and flush-mounted sockets for switches/sockets.
- Leaf springs
- Open cable end




3000 K  
50 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1002922   | 62.00 |



| Product                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| LED driver 3W   350mA   |           |       |
| ○ white                 | 1005248   | 13.00 |
| LED driver 4 W   350 mA |           |       |
| ○ white                 | 1008656   | 17.00 |

PATTA-I  
EL, ROUND, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 7.3 W  
Material: Aluminium/Glass


- Spring clips and leaf springs are included with the product



1800 K - 3000 K  
44 lm - 440 lm

| Variant               | Prod. no. | GBP   |
|-----------------------|-----------|-------|
| ● black<br>44 lm      | 1002098   | 74.00 |
| ○ white<br>44 lm      | 1002099   | 74.00 |
| ● aluminium<br>440 lm | 1002100   | 78.00 |

PATTA-I  
DL, ANGULAR, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total Wattage: 7.3 W  
Material: Aluminium/Glass


- Spring clips and leaf springs are included with the product



1800 K - 3000 K  
44 lm - 440 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1002101   | 74.00 |
| ○ white | 1002102   | 74.00 |

PATTA-I  
EL, ROUND, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total Wattage: 10 W  
Material: Aluminium/Glass

- Spring clips




3000 K  
870 lm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 114420    | 74.00 |
| ○ white     | 114421    | 74.00 |
| ● aluminium | 114426    | 78.00 |



## PATTA-I EL, SQUARE, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total Wattage: 10 W  
Material: Aluminium/Glass


- Spring clips



3000 K  
870 lm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 114430    | 74.00 |
| ○ white     | 114431    | 74.00 |
| ● aluminium | 114436    | 78.00 |

## PATTA-F EL, ROUND, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total Wattage: 11 W  
Material: Aluminium/Glass

- Spring clips



114440


3000 K  
745 lm

114441

3000 K  
860 lm

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● black<br>745 lm | 114440    | 84.00 |
| ○ white<br>860 lm | 114441    | 84.00 |

## PATTA-F EL, SQUARE, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total Wattage: 11 W  
Material: Aluminium/Glass

- Spring clips



114450

3000 K  
745 lm

114451

3000 K  
860 lm

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● black<br>745 lm | 114450    | 84.00 |
| ○ white<br>860 lm | 114451    | 84.00 |


1009049 144



# INDOOR | CEILING LIGHTS



SUN 20  
CL, E27



220-240 V ~50/60 Hz  
Material: steel



Base: 1xE27      max. Ø: 4.5 cm      L: 12 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008125   | 96.00  |
| ● gold  | 1008126   | 100.00 |




E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.      1005289      10.00 GBP

SUN 30  
CL, E27



220-240 V ~50/60 Hz  
Material: steel



Base: 1xE27      max. Ø: 4.5 cm      L: 14 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008127   | 105.00 |
| ● gold  | 1008128   | 109.00 |




E27 | 11 W | 330°  
1250 lm | 2700 K | EEC = E



Prod. no.      1008162      72.00 GBP



## VARYT CL, E14



220-240 V ~50/60 Hz  
Material: aluminium

- IP44 in combination with one of the shades



Base: 1xE14 max. Ø: 11 cm | L: 3.8 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● black  | 1008099   | 88.00  |
| ○ white  | 1008100   | 88.00  |
| ● brass  | 1008102   | 113.00 |
| ● chrome | 1008101   | 105.00 |
| ● copper | 1008103   | 113.00 |



E14 | 4 W | 320°  
380 lm | 2700 K | EEC = F



Prod. no. 1005284 6.00 GBP

## VARYT GLOBE GLASS SHADE



Ø: 12 cm  
H: 12.8 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008119   | 52.00 |

## VARYT DIAMOND GLASS SHADE



Ø: 12 cm  
H: 12.7 cm  
Material: glass

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● smoky grey | 1007858   | 69.00 |
| ● amber      | 1008023   | 69.00 |

## VARYT LINED GLASS SHADE



Ø: 12 cm  
H: 13 cm  
Material: glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007859   | 61.00 |

## VARYT PLEATED GLASS SHADE




Ø: 11.5 cm  
H: 13.5 cm  
Material: glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007860   | 66.00 |



TRILEDO  
CL, SINGLE, ROUND



220-240 V ~50/60 Hz | 160 mA  
Total wattage: 6.4 W  
Material: aluminium




Down

3000 K  
580 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 113930    | 100.00 |
| ○ white | 113931    | 100.00 |

TRILEDO  
CL, SINGLE, SQUARE



220-240 V ~50/60 Hz | 160 mA  
Total wattage: 6.4 W  
Material: aluminium




Down

3000 K  
580 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 113940    | 100.00 |
| ○ white | 113941    | 100.00 |

TRILEDO CL  
CL, DOUBLE, SQUARE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: aluminium



Down


3000 K  
1280 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1002003   | 142.00 |
| ○ white | 1002008   | 142.00 |



## TRILEDO

CL, SINGLE, ROUND, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1002010   | 63.00 |
| ○ white     | 1002011   | 63.00 |
| ● aluminium | 1002012   | 68.00 |




GU10 | 6 W | 36°  
360 lm | 2200 K-2700 K | EEC = G

Prod. no. 1005273 9.00 GBP

## TRILEDO

CL, SINGLE, SQUARE, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1002013   | 63.00 |
| ○ white     | 1002015   | 63.00 |
| ● aluminium | 1002004   | 68.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F

Prod. no. 1005077 7.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469 23.00 GBP

## TRILEDO

CL, DOUBLE, SQUARE, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium



Base: 2xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1002005   | 92.00 |
| ○ white | 1002006   | 92.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F

Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469 23.00 GBP

# NUMINOS® S CL



● black



220-240 V ~50/60 Hz | 200 mA  
Total wattage: 8 W  
Material: aluminium

| Variant             | GBP    |
|---------------------|--------|
| All S versions      | 88.00  |
| All S versions DALI | 130.00 |



○ white

Note:  
Decorative ring also  
available in white,  
gold and copper



| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Front ring S |           |      |
| ○ white      | 1006167   | 2.00 |
| ● copper     | 1008140   | 8.00 |
| ● gold       | 1008144   | 8.00 |



|                                                                                                                                                                         |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                | 1004122   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004123   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004124   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                | 1004130   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004131   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004132   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                | 1004138   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004139   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004140   |                                                                                       |
|       | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                | 1004410   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004411   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004412   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                | 1004418   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004419   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004420   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                | 1004426   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004427   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004428   |                                                                                       |
|                                                                                        | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                | 1004126   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004127   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004128   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                | 1004134   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004135   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004136   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                | 1004142   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004143   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004144   |                                                                                       |
|   | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                | 1004414   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004415   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004416   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                | 1004422   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004423   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004424   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                | 1004430   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004431   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004432   |                                                                                       |

# NUMINOS® M CL



● black



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: aluminium

| Variant             | GBP    |
|---------------------|--------|
| All M versions      | 109.00 |
| All M versions DALI | 134.00 |



○ white

Note:  
Decorative ring also  
available in white,  
gold and copper



| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Front ring M |           |      |
| ○ white      | 1006168   | 3.00 |
| ● copper     | 1008141   | 8.00 |
| ● gold       | 1008145   | 8.00 |



|                                                                                                                                                                         |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                | 1004218   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004219   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004220   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                | 1004226   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004227   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004228   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                | 1004234   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004235   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004236   |                                                                                       |
|       | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                | 1004506   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004507   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004508   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                | 1004514   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004515   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004516   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                | 1004522   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004523   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004524   |                                                                                       |
|                                                                                        | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                | 1004222   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004223   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004224   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                | 1004230   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004231   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004232   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                | 1004238   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004239   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004240   |                                                                                       |
|   | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                | 1004510   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004511   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004512   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                | 1004518   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004519   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004520   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                | 1004526   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004527   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004528   |                                                                                       |

NUMINOS® L  
CL




● black



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: aluminium

| Variant             | GBP    |
|---------------------|--------|
| All L versions      | 126.00 |
| All L versions DALI | 172.00 |



○ white

Note:  
Decorative ring also  
available in white,  
gold and copper



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Front ring L |           |       |
| ○ white      | 1006169   | 3.00  |
| ● copper     | 1008142   | 10.00 |
| ● gold       | 1008146   | 10.00 |



|                                                                                                                                                                         |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                | 1004314   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004315   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004316   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                | 1004322   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004323   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004324   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                | 1004330   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004331   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004332   |                                                                                       |
|       | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                | 1004602   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004603   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004604   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                | 1004610   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004611   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004612   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                | 1004618   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004619   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004620   |                                                                                       |
|                                                                                        | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                | 1004318   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004319   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004320   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                | 1004326   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004327   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004328   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                | 1004334   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004335   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004336   |                                                                                       |
|   | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                | 1004606   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004607   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004608   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                | 1004614   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004615   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004616   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                | 1004622   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004623   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004624   |                                                                                       |



NUMINOS® XL  
CL



● black



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 28 W  
Material: aluminium

| Variant              | GBP    |
|----------------------|--------|
| All XL versions      | 151.00 |
| All XL versions DALI | 205.00 |



○ white

Note:  
Decorative ring also  
available in white,  
gold and copper



| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Front ring XL |           |       |
| ○ white       | 1006170   | 4.00  |
| ● copper      | 1008143   | 10.00 |
| ● gold        | 1008147   | 10.00 |




|                                                                                                                                                                         |  |  |  |  | Prod. no.      |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005687</b> |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005688</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005689</b> |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005693</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005694</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005695</b> |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 3900 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005699</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005700</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005701</b> |                                                                                       |
|       | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005759</b> |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005760</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005761</b> |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005765</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005766</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005767</b> |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 3900 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005771</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005772</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005773</b> |                                                                                       |
|                                                                                        | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005690</b> |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005691</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005692</b> |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005696</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005697</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005698</b> |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 3900 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005702</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005703</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005704</b> |                                                                                       |
|   | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005762</b> |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005763</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005764</b> |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005768</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005769</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005770</b> |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 3900 lm                                                                           | 24°                                                                               | 16                                                                                | <b>1005774</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | <b>1005775</b> |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | <b>1005776</b> |                                                                                       |

1011931 138

## ENOLA® 2.0 S

CL, DOUBLE, GU10 MINI, PAR11

NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC

SOCKET  
INSIDE

5  
W

Base: 2xGU10 max. Ø: 3.6 cm | L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011931   | 82.00 |
| ○ white | 1011932   | 82.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no. 1011670 10.00 GBP




| Product                 | Prod. no. | GBP  |
|-------------------------|-----------|------|
| ENOLA® 2.0 S, Deco Ring |           |      |
| ● black                 | 1011753   | 4.00 |
| ○ white                 | 1011754   | 4.00 |
| ● gold                  | 1011755   | 4.00 |
| ● copper                | 1011756   | 4.00 |



## ENOLA® 2.0 S


CL, DOUBLE, GU10 MINI, PAR11,  
LONG



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC

## ENOLA® 2.0 S

CL, TRIPLE, GU10 MINI, PAR11,  
LONG



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC

## ENOLA® 2.0 S

DECORATIVE RING



Ø: 3.9 cm  
H: 1.1 cm  
Material: plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011753   | 4.00 |
| ○ white  | 1011754   | 4.00 |
| ● gold   | 1011755   | 4.00 |
| ● copper | 1011756   | 4.00 |



Base: 2xGU10 max. Ø: 3.6 cm | L: 4.6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011911   | 100.00 |
| ○ white | 1011912   | 100.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP



| Product                 | Prod. no. | GBP  |
|-------------------------|-----------|------|
| ENOLA® 2.0 S, Deco Ring |           |      |
| ● black                 | 1011753   | 4.00 |
| ○ white                 | 1011754   | 4.00 |
| ● gold                  | 1011755   | 4.00 |
| ● copper                | 1011756   | 4.00 |



Base: 3xGU10 max. Ø: 3.6 cm | L: 4.6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011913   | 134.00 |
| ○ white | 1011914   | 134.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP




| Product                 | Prod. no. | GBP  |
|-------------------------|-----------|------|
| ENOLA® 2.0 S, Deco Ring |           |      |
| ● black                 | 1011753   | 4.00 |
| ○ white                 | 1011754   | 4.00 |
| ● gold                  | 1011755   | 4.00 |
| ● copper                | 1011756   | 4.00 |

1011720 140

## ENOLA® 2.0 M

CL, SINGLE, GU10, QPAR51

NEW



220-240 V ~50/60 Hz  
Material: aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011719   | 48.00 |
| ○ white | 1011720   | 48.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP



| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, decorative ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |






## ENOLA® 2.0 M

CL, DOUBLE, GU10, QPAR51



NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC



Base: 2xGU10 max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011897   | 88.00 |
| ○ white | 1011898   | 88.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP




| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, decorative ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |

## ENOLA® 2.0 M

CL, DOUBLE, GU10, QPAR51, LONG



NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC



Base: 2xGU10 max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011885   | 105.00 |
| ○ white | 1011886   | 105.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP




| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, decorative ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |

## ENOLA® 2.0 M

CL, TRIPLE, GU10, QPAR51, LONG



NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC



Base: 3xGU10 max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011887   | 138.00 |
| ○ white | 1011888   | 138.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP



| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, decorative ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |

1011889 143

1011887 141






## ENOLA® 2.0 M

CL, QUAD., GU10, QPAR51, LONG

NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC



Base: 4xGU10 max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011889   | 205.00 |
| ○ white | 1011890   | 205.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP




| Product                          | Prod. no. | GBP  |
|----------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Deco Ring |           |      |
| ● black                          | 1011749   | 4.00 |
| ○ white                          | 1011750   | 4.00 |
| ● gold                           | 1011751   | 4.00 |
| ● copper                         | 1011752   | 4.00 |

## ENOLA® 2.0 M

CL, SIX., GU10, QPAR51, LONG

NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC



Base: 6xGU10 max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011891   | 302.00 |
| ○ white | 1011892   | 302.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP



| Product                          | Prod. no. | GBP  |
|----------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Deco Ring |           |      |
| ● black                          | 1011749   | 4.00 |
| ○ white                          | 1011750   | 4.00 |
| ● gold                           | 1011751   | 4.00 |
| ● copper                         | 1011752   | 4.00 |

## ENOLA® 2.0/BIMA 2.0 M

DECORATIVE RING

NEW




Ø: 5.4 cm  
H: 2 cm  
Material: plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011749   | 4.00 |
| ○ white  | 1011750   | 4.00 |
| ● gold   | 1011751   | 4.00 |
| ● copper | 1011752   | 4.00 |




## GRIP! S CL, SINGLE, PHASE, Ø 3,0 CM



220-240 V ~50/60 Hz | 260 mA  
Total wattage: 11 W  
Material: aluminium

- Honeycomb accessories included

## GRIP! S CL, DOUBLE, PHASE, Ø 3,0 CM



220-240 V ~50/60 Hz | 260 mA  
Total wattage: 21 W  
Material: aluminium

- Honeycomb accessories included

## GRIP! S CL, DOUBLE, PHASE, Ø 3,0 CM



NEW

Ø: 2.7 cm  
H: 1.1 cm  
Material: aluminium

- Front panel with spacer
- No honeycomb insert included

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1011830   | 16.00 |
| ○ white  | 1011829   | 16.00 |
| ● gold   | 1011832   | 16.00 |
| ● nickel | 1011831   | 16.00 |



|         |        |
|---------|--------|
| 1009043 | 3000 K |
| 1009041 | 650 lm |
| 1009039 |        |
| 1009037 |        |

|         |        |
|---------|--------|
| 1009042 | 2700 K |
| 1009040 | 600 lm |
| 1009038 |        |
| 1009036 |        |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black/gold<br>600 lm   2700 K   | 1009038   | 138.00 |
| ● black/gold<br>650 lm   3000 K   | 1009039   | 138.00 |
| ○ white/black<br>600 lm   2700 K  | 1009036   | 138.00 |
| ○ white/black<br>650 lm   3000 K  | 1009037   | 138.00 |
| ● gold/black<br>600 lm   2700 K   | 1009042   | 138.00 |
| ● gold/black<br>650 lm   3000 K   | 1009043   | 138.00 |
| ● bronze/black<br>600 lm   2700 K | 1009040   | 138.00 |
| ● bronze/black<br>650 lm   3000 K | 1009041   | 138.00 |



| Product            | Prod. no. | GBP  |
|--------------------|-----------|------|
| HONEYCOMB + Spacer |           |      |
| ● black            | 1011837   | 8.00 |



|         |        |
|---------|--------|
| 1009051 | 3000 K |
| 1009049 | 650 lm |
| 1009047 |        |
| 1009045 |        |

|         |        |
|---------|--------|
| 1009050 | 2700 K |
| 1009048 | 600 lm |
| 1009046 |        |
| 1009044 |        |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black/gold<br>600 lm   2700 K   | 1009046   | 231.00 |
| ● black/gold<br>650 lm   3000 K   | 1009047   | 231.00 |
| ○ white/black<br>600 lm   2700 K  | 1009044   | 231.00 |
| ○ white/black<br>650 lm   3000 K  | 1009045   | 231.00 |
| ● gold/black<br>600 lm   2700 K   | 1009050   | 231.00 |
| ● gold/black<br>650 lm   3000 K   | 1009051   | 231.00 |
| ● bronze/black<br>600 lm   2700 K | 1009048   | 231.00 |
| ● bronze/black<br>650 lm   3000 K | 1009049   | 231.00 |




| Product            | Prod. no. | GBP  |
|--------------------|-----------|------|
| HONEYCOMB + Spacer |           |      |
| ● black            | 1011837   | 8.00 |



## GRIP! M

### CL, SINGLE, PHASE, Ø 4,3 CM




220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: aluminium

- Honeycomb accessories included

## GRIP! M

### CL, DOUBLE, PHASE, Ø 4,3 CM



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 28 W  
Material: aluminium

- Honeycomb accessories included

## GRIP! M

### DECORATIVE RING



NEW

Ø: 4 cm  
H: 1.4 cm  
Material: aluminium

- Front panel with spacer
- No honeycomb insert included

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1011834   | 18.00 |
| ○ white  | 1011833   | 18.00 |
| ● gold   | 1011836   | 18.00 |
| ● nickel | 1011835   | 18.00 |



|         |         |
|---------|---------|
| 1009075 | 3000 K  |
| 1009073 | 1540 lm |
| 1009071 |         |
| 1009069 |         |

|         |         |
|---------|---------|
| 1009074 | 2700 K  |
| 1009072 | 1450 lm |
| 1009070 |         |
| 1009068 |         |

| Variant                            | Prod. no. | GBP    |
|------------------------------------|-----------|--------|
| ● black/gold<br>1450 lm   2700 K   | 1009070   | 155.00 |
| ● black/gold<br>1540 lm   3000 K   | 1009071   | 155.00 |
| ○ white/black<br>1450 lm   2700 K  | 1009068   | 155.00 |
| ○ white/black<br>1540 lm   3000 K  | 1009069   | 155.00 |
| ● gold/black<br>1450 lm   2700 K   | 1009074   | 155.00 |
| ● gold/black<br>1540 lm   3000 K   | 1009075   | 155.00 |
| ● bronze/black<br>1450 lm   2700 K | 1009072   | 155.00 |
| ● bronze/black<br>1540 lm   3000 K | 1009073   | 155.00 |



| Product            | Prod. no. | GBP   |
|--------------------|-----------|-------|
| HONEYCOMB + Spacer |           |       |
| ● black            | 1011838   | 10.00 |



|         |         |
|---------|---------|
| 1009083 | 3000 K  |
| 1009081 | 1520 lm |
| 1009079 |         |
| 1009077 |         |

|         |         |
|---------|---------|
| 1009082 | 2700 K  |
| 1009080 | 1460 lm |
| 1009078 |         |
| 1009076 |         |

| Variant                            | Prod. no. | GBP    |
|------------------------------------|-----------|--------|
| ● black/gold<br>1460 lm   2700 K   | 1009078   | 256.00 |
| ● black/gold<br>1520 lm   3000 K   | 1009079   | 256.00 |
| ○ white/black<br>1460 lm   2700 K  | 1009076   | 256.00 |
| ○ white/black<br>1520 lm   3000 K  | 1009077   | 256.00 |
| ● gold/black<br>1460 lm   2700 K   | 1009082   | 256.00 |
| ● gold/black<br>1520 lm   3000 K   | 1009083   | 256.00 |
| ● bronze/black<br>1460 lm   2700 K | 1009080   | 256.00 |
| ● bronze/black<br>1520 lm   3000 K | 1009081   | 256.00 |




| Product            | Prod. no. | GBP   |
|--------------------|-----------|-------|
| HONEYCOMB + Spacer |           |       |
| ● black            | 1011838   | 10.00 |





## GRIP! L

CL, SINGLE, QPAR51, Ø 5,7 CM



220-240 V ~50/60 Hz  
Material: aluminium

- Honeycomb accessories included



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/gold   | 1009093   | 88.00 |
| ● white/black  | 1009092   | 88.00 |
| ● gold/black   | 1009095   | 88.00 |
| ● bronze/black | 1009094   | 88.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F




Prod. no. 1005076 7.00 GBP



| Product            | Prod. no. | GBP   |
|--------------------|-----------|-------|
| GRIP! L, Deco Ring |           |       |
| ○ white            | 1008496   | 21.00 |
| ● black            | 1008497   | 21.00 |
| ● nickel           | 1008498   | 21.00 |
| ● gold             | 1008499   | 21.00 |
| HONEYCOMB + Spacer |           |       |
| ● black            | 1011839   | 11.00 |

## GRIP! L

CL, DOUBLE, QPAR51, Ø 5,7 CM



220-240 V ~50/60 Hz  
Material: aluminium

- Honeycomb accessories included



Base: 2xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1009097   | 147.00 |
| ● white/black  | 1009096   | 147.00 |
| ● gold/black   | 1009099   | 147.00 |
| ● bronze/black | 1009098   | 147.00 |



GU10 | 6W | 38°  
470 lm | 3000 K | EEC = F



Prod. no. 1005079 7.00 GBP




| Product            | Prod. no. | GBP   |
|--------------------|-----------|-------|
| GRIP! L, Deco Ring |           |       |
| ○ white            | 1008496   | 21.00 |
| ● black            | 1008497   | 21.00 |
| ● nickel           | 1008498   | 21.00 |
| ● gold             | 1008499   | 21.00 |
| HONEYCOMB + Spacer |           |       |
| ● black            | 1011839   | 11.00 |

## GRIP! L

CL, QPAR51, Ø 5,7 CM

NEW



220-240 V ~50/60 Hz  
Material: aluminium

- Honeycomb accessories included



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/gold   | 1011847   | 88.00 |
| ● white/black  | 1011846   | 88.00 |
| ● gold/black   | 1011849   | 88.00 |
| ● bronze/black | 1011848   | 88.00 |



GU10 | 6W | 38°  
470 lm | 3000 K | EEC = F



Prod. no. 1005080 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F




Prod. no. 1012469 23.00 GBP



| Product            | Prod. no. | GBP   |
|--------------------|-----------|-------|
| GRIP! L, Deco Ring |           |       |
| ○ white            | 1008496   | 21.00 |
| ● black            | 1008497   | 21.00 |
| ● nickel           | 1008498   | 21.00 |
| ● gold             | 1008499   | 21.00 |

OCULUS CL  
DTW, PVD




220-240 V ~50/60 Hz | 250 mA  
Total wattage: 11 W  
Material: aluminium



Down                      2000 K - 3000 K  
                                 36 lm - 780 lm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● brass       | 1008619   | 247.00 |
| ● dark bronze | 1008618   | 247.00 |
| ● dark copper | 1008620   | 247.00 |

OCULUS  
CL, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 11 W  
Material: aluminium

- Additional frosted lens included




                                 2000 K - 3000 K  
                                 36 lm - 780 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004666   | 197.00 |
| ○ white | 1004667   | 197.00 |



## ASTO TUBE CL, SINGLE, GU10

## ASTO TUBE DECORATIVE REFLECTOR



Ø: 6.8 cm  
H: 4 cm  
Material: polycarbonate (PC)



220-240 V ~50/60 Hz  
Material: aluminium

| Variant        | Prod. no. | GBP  |
|----------------|-----------|------|
| ● black/chrome | 1007190   | 4.00 |
| ● gold         | 1006450   | 4.00 |
| ● chrome       | 1006449   | 4.00 |
| ● copper       | 1006451   | 4.00 |

- Decorative rings available as accessories



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006439   | 43.00 |
| ○ white | 1006440   | 43.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP




| Product              | Prod. no. | GBP  |
|----------------------|-----------|------|
| Decorative reflector |           |      |
| ● chrome             | 1006449   | 4.00 |
| ● gold               | 1006450   | 4.00 |
| ● copper             | 1006451   | 4.00 |
| ● black/chrome       | 1007190   | 4.00 |



117321 151

## OCCULDAS 13

CL, INDIRECT, PHASE



220-240 V ~50/60 Hz | 350 mA

Total wattage: 15 W

Material: aluminium



3000 K

810lm


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 117351    | 176.00 |





## OCCULDAS 23

CL, INDIRECT, PHASE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 24 W  
Material: aluminium/steel




3000 K  
1500 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 117321    | 289.00 |

## ALTRA DICE

CL, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium/steel



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1002216   | 55.00 |
| ○ white | 151511    | 55.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP

## ALTRA DICE

CW, DOUBLE, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium/steel



Base: 2xGU10

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 151531    | 100.00 |



GU10 | 6 W | 36°  
360 lm | 2200 K-2700 K | EEC = G



Prod. no. 1005273 9.00 GBP



117110

153






## KARDAMOD

CL, SINGLE, SQUARE, QPAR111

## KARDAMOD

CL, DOUBLE, SQUARE, QPAR111



220-240 V ~50/60 Hz  
Material: steel



Base: 1xGU10


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 117100    | 121.00 |
| ○ white | 117101    | 121.00 |



GU10 | 13 W | 10°  
900 lm | 2700 K | EEC = G



Prod. no. 1005275 48.00 GBP



220-240 V ~50/60 Hz  
Material: steel



Base: 2xGU10

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 117110    | 218.00 |
| ○ white | 117111    | 218.00 |



GU10 | 12 W | 55°  
670 lm | 2700 K | EEC = G




Prod. no. 1005297 73.00 GBP





## FENDA CEILING ROSETTE, E27



220-240 V ~50/60 Hz  
Material: steel



Base: 1xE27

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 155550    | 42.00 |
| ○ white | 155551    | 42.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP

## FENDA 30 CM, ROUND



Ø: 30 cm  
H: 20 cm  
Material: textile/steel

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/copper | 155592    | 62.00 |
| ○ white        | 155582    | 47.00 |
| ● grey         | 1004774   | 47.00 |
| ● beige        | 155583    | 47.00 |

## FENDA 45 CM, ROUND



Ø: 45.5 cm  
H: 28 cm  
Material: textile/steel

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/copper | 156122    | 77.00 |
| ○ white        | 156111    | 73.00 |
| ● grey         | 1004775   | 73.00 |
| ● beige        | 156113    | 73.00 |



| Product                                 | Prod. no. | GBP   |
|-----------------------------------------|-----------|-------|
| Acrylic glass cover for FENDA Ø 45.5 cm |           |       |
| ○ white                                 | 156100    | 39.00 |

## FENDA 70 CM, ROUND



Ø: 70 cm  
H: 36 cm  
Material: textile/steel

• Not suitable for Fenda Bow

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/copper | 1000580   | 113.00 |
| ○ white        | 1000579   | 100.00 |



| Product                                | Prod. no. | GBP   |
|----------------------------------------|-----------|-------|
| Acrylic glass cover, for FENDA Ø 70 cm |           |       |
| ○ white                                | 1000957   | 82.00 |



156050

157







## TENORA

CL, E27

## SOPRANA

CL, E27



220-240 V ~50/60 Hz  
Material: steel/textile



220-240 V ~50/60 Hz  
Material: steel/textile



Base: 3XE27

L: 14.8 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 156050    | 163.00 |
| ○ white | 156051    | 163.00 |



Base: 3XE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● beige | 155373    | 180.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



E27 | 13 W | 220°  
1300 lm | 2700 K | EEC = F



Prod. no. 1005302 11.00 GBP




E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP

PLASTRA  
CL, QPAR51

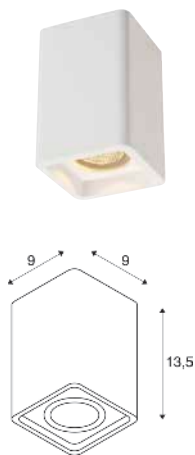

220-240 V ~50/60 Hz  
Material: plaster/steel



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 148004    | 58.00 |



GU10 | 6W | 38°  
450lm | 2700K | EEC = F



Prod. no. 1005076 7.00 GBP

PLASTRA  
CL, PHASE




220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: plaster/glass



3000K  
990lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 148005    | 117.00 |

PLASTRA 105  
CL, E27

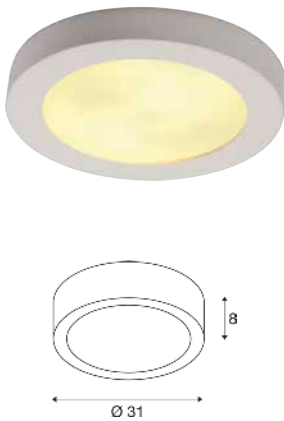

220-240 V ~50/60 Hz  
Material: plaster/glass



Base: 2xE27 max. Ø: 5.1 cm | L: 14 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 148001    | 79.00 |



E27 | 8W | 240°  
880lm | 3000K | EEC = E




Prod. no. 1005289 10.00 GBP



## PLASTRA 104

CL, E27



220-240 V ~50/60 Hz  
Material: plaster/glass



Base: 2xE27 max. Ø: 5.1 cm | L: 14 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 148002    | 73.00 |




E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no. 1005289 10.00 GBP

## FERA 25

CL, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: aluminium




| 3000 K  | 4000 K  |
|---------|---------|
| 1580 lm | 1650 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1002968   | 239.00 |
| ○ white | 1002967   | 239.00 |

## FERA 25

CL



220-240 V ~50/60 Hz | 550 mA  
Total wattage: 23 W  
Material: aluminium/polystyrene (PS)




| 3000 K  |
|---------|
| 1800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1001939   | 176.00 |
| ○ white | 161461    | 176.00 |




## DECONA 30 CL, PHASE




220-240 V ~50/60 Hz | 230 mA  
Total wattage: 18 W  
Material: aluminium/PC

## DECONA 30 CL, PHASE



220-240 V ~50/60 Hz | 230 mA  
Total wattage: 17 W  
Material: aluminium/PC

## DECONA 30 CL, SENSOR



220-240 V ~50/60 Hz | 220 mA  
Total wattage: 17 W  
Material: aluminium/PC



|         |         |         |
|---------|---------|---------|
| 1008580 | 2700 K  | 3000 K  |
|         | 1560 lm | 1560 lm |
| 1008578 | 2700 K  | 3000 K  |
|         | 1450 lm | 1450 lm |
| 1008579 | 2700 K  | 3000 K  |
|         | 1530 lm | 1530 lm |
| 1008577 | 2700 K  | 3000 K  |
|         | 1600 lm | 1600 lm |

| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black/gold<br>1560 lm | 1008580   | 105.00 |
| ● black<br>1450 lm      | 1008578   | 105.00 |
| ● white/gold<br>1530 lm | 1008579   | 105.00 |
| ○ white<br>1600 lm      | 1008577   | 105.00 |



|         |         |         |
|---------|---------|---------|
| 1008920 | 3000 K  | 4000 K  |
|         | 1680 lm | 1760 lm |
| 1008918 | 3000 K  | 4000 K  |
|         | 1650 lm | 1710 lm |
| 1008919 | 3000 K  | 4000 K  |
|         | 1710 lm | 1800 lm |
| 1008917 | 3000 K  | 4000 K  |
|         | 1900 lm | 2000 lm |

| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black/gold<br>1680 lm | 1008920   | 105.00 |
| ● black<br>1650 lm      | 1008918   | 105.00 |
| ● white/gold<br>1710 lm | 1008919   | 105.00 |
| ○ white<br>1900 lm      | 1008917   | 105.00 |




|  |         |         |
|--|---------|---------|
|  | 2700 K  | 3000 K  |
|  | 1680 lm | 1840 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1008925   | 121.00 |



## DECONA 30


CL, SENSOR



220-240 V ~50/60 Hz | 220 mA  
Total wattage: 17 W  
Material: aluminium/PC

## DECONA 42


CL, PHASE



220-240 V ~50/60 Hz | 300 mA  
Total wattage: 23 W  
Material: aluminium/PC

## DECONA 42

CL, SENSOR



220-240 V ~50/60 Hz | 305 mA  
Total wattage: 23 W  
Material: aluminium/PC



| 3000 K  | 4000 K  |
|---------|---------|
| 1880 lm | 1970 lm |



|         | 2700 K  | 3000 K  |
|---------|---------|---------|
| 1008584 | 2170 lm | 2170 lm |
| 1008582 | 2260 lm | 2260 lm |
| 1008583 | 2020 lm | 2020 lm |
| 1008581 | 2140 lm | 2140 lm |



| 2700 K  | 3000 K  |
|---------|---------|
| 2450 lm | 2710 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1008926   | 121.00 |


| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black/gold<br>2170 lm | 1008584   | 130.00 |
| ● black<br>2260 lm      | 1008582   | 130.00 |
| ● white/gold<br>2020 lm | 1008583   | 130.00 |
| ○ white<br>2140 lm      | 1008581   | 130.00 |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1008927   | 147.00 |



| Product               | Prod. no. | GBP   |
|-----------------------|-----------|-------|
| Mounting frame 310 mm |           |       |
| ○ white               | 1008585   | 52.00 |
| Suspension kit 1.50 m |           |       |
| ○ white               | 1008588   | 25.00 |

# DECONA 42 CL, PHASE

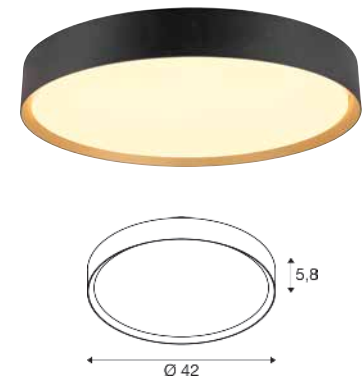









220-240 V ~50/60 Hz | 300 mA  
 Total wattage: 23 W  
 Material: aluminium/PC



|         |         |         |
|---------|---------|---------|
| 1008924 | 3000 K  | 4000 K  |
|         | 2550 lm | 2680 lm |
| 1008922 | 3000 K  | 4000 K  |
|         | 2540 lm | 2680 lm |
| 1008923 | 3000 K  | 4000 K  |
|         | 2600 lm | 2730 lm |
| 1008921 | 3000 K  | 4000 K  |
|         | 2770 lm | 2930 lm |

| Variant                | Prod. no. | GBP    |
|------------------------|-----------|--------|
| ● black/gold<br>2550lm | 1008924   | 130.00 |
| ● black<br>2540lm      | 1008922   | 130.00 |
| ● white/gold<br>2600lm | 1008923   | 130.00 |
| ○ white<br>2770lm      | 1008921   | 130.00 |

# DECONA 42 CL, SENSOR

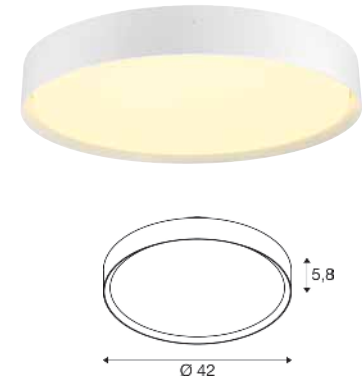








220-240 V ~50/60 Hz | 305 mA  
 Total wattage: 23 W  
 Material: aluminium/PC



|  |         |         |
|--|---------|---------|
|  | 3000 K  | 4000 K  |
|  | 2680 lm | 2850 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1008928   | 147.00 |

# DECONA MOUNTING FRAME 310 MM



Ø: 31.3 cm  
 H: 7.5 cm  
 Material: aluminium

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008585   | 52.00 |



## DECONA MOUNTING FRAME 430 MM




Ø: 43.3 cm  
H: 7.5 cm  
Material: aluminium

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008586   | 60.00 |

## MOTUNA CW, PHASE




NEW



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Power consumption: 8 W  
Material: aluminium

## MARONA CL, PHASE



220-240 V ~50/60 Hz | 430 mA  
Total wattage: 15 W  
Material: polymethylacrylate (PMMA)/steel

## DECONA SUSPENSION KIT 1,50 M



Material: steel



|         |                   |
|---------|-------------------|
| 1010365 | 2700 K<br>1000 lm |
| 1010217 | 2700 K<br>750 lm  |

| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black/gold<br>750 lm  | 1010217   | 172.00 |
| ○ white/gold<br>1000 lm | 1010365   | 172.00 |



|  |                   |
|--|-------------------|
|  | 3000 K<br>1200 lm |
|--|-------------------|

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 155156    | 105.00 |


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008587   | 25.00 |
| ○ white | 1008588   | 25.00 |

1011993 165

## OVANA 30

CL, LED, ZIGBEE, TW

NEW



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: steel/polycarbonate (PE)




|              |         |         |
|--------------|---------|---------|
| 1012000 Down | 2200 K  | 6500 K  |
|              | 1120 lm | 1260 lm |
| 1011999 Down | 2200 K  | 6500 K  |
|              | 920 lm  | 1030 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black<br>920 lm  | 1011999   | 231.00 |
| ○ white<br>1120 lm | 1012000   | 231.00 |



## OVANA 44

CL, LED, ZIGBEE, TW



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: steel/polycarbonate (PE)




|         |      |         |         |
|---------|------|---------|---------|
| 1012002 | Down | 2200 K  | 6500 K  |
|         |      | 1710 lm | 1900 lm |
| 1012001 | Down | 2200 K  | 6500 K  |
|         |      | 1490 lm | 1650 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black<br>1490 lm | 1012001   | 247.00 |
| ○ white<br>1710 lm | 1012002   | 247.00 |

## OVANA 30

CL, LED, PHASE, CCT



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 11 W  
Material: steel/polycarbonate (PE)




|         |      |         |         |         |
|---------|------|---------|---------|---------|
| 1011994 | Down | 2700 K  | 3000 K  | 4000 K  |
|         |      | 1200 lm | 1320 lm | 1330 lm |
| 1011993 | Down | 2700 K  | 3000 K  | 4000 K  |
|         |      | 990 lm  | 1030 lm | 1040 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black<br>990 lm  | 1011993   | 197.00 |
| ○ white<br>1200 lm | 1011994   | 197.00 |

## OVANA 44

CL, LED, PHASE, CCT



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: steel/polycarbonate (PE)



|         |      |         |         |         |
|---------|------|---------|---------|---------|
| 1011996 | Down | 2700 K  | 3000 K  | 4000 K  |
|         |      | 1860 lm | 1870 lm | 1900 lm |
| 1011995 | Down | 2700 K  | 3000 K  | 4000 K  |
|         |      | 1620 lm | 1650 lm | 1680 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black<br>1620 lm | 1011995   | 214.00 |
| ○ white<br>1860 lm | 1011996   | 214.00 |










## GLENOS® 2.0

CL, 1,2 M, DALI, UGR22

## GLENOS® PRO

CL, 1,2 M, DALI, UGR19

NEW



200-240 V ~0/50/60 Hz | 450 mA  
Total wattage: 17 W  
Material: aluminium



220-240 V ~0/50/60 Hz | 750 mA  
Total wattage: 30 W  
Material: aluminium/plastic PC



|         |         |
|---------|---------|
| 1012165 | 4000 K  |
|         | 2100 lm |
| 1012164 | 4000 K  |
|         | 2400 lm |
| 1012163 | 3000 K  |
|         | 2050 lm |
| 1012162 | 3000 K  |
|         | 2350 lm |



|         |         |
|---------|---------|
| 1010520 | 4000 K  |
|         | 3900 lm |
| 1010518 | 3000 K  |
|         | 3650 lm |

| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ● black<br>2050 lm   3000 K | 1012163   | 285.00 |
| ● black<br>2100 lm   4000 K | 1012165   | 285.00 |
| ○ white<br>2350 lm   3000 K | 1012162   | 285.00 |
| ○ white<br>2400 lm   4000 K | 1012164   | 285.00 |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black<br>3650 lm   3000 K       | 1010518   | 382.00 |
| ● black<br>3900 lm   4000 K       | 1010520   | 382.00 |
| ● white/black<br>3650 lm   3000 K | 1010517   | 382.00 |
| ● white/black<br>3900 lm   4000 K | 1010519   | 382.00 |



1010425 169







## PANEL 60

CL, ROUND, PHASE

## PANEL 60

CL, ROUND, DALI



220-240 V ~50/60 Hz | 750 mA  
Total wattage: 29 W  
Material: aluminium/steel

220-240 V ~50/60 Hz | 750 mA  
Total wattage: 29 W  
Material: aluminium/steel



| 3000 K  | 4000 K  |
|---------|---------|
| 3050 lm | 3300 lm |

| 3000 K  | 4000 K  |
|---------|---------|
| 3050 lm | 3300 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1010422   | 252.00 |
| ● grey  | 1010423   | 252.00 |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1010424   | 260.00 |
| ● grey  | 1010425   | 260.00 |

1010366 197





1007703 223

# INDOOR | PENDANT LIGHTS

|                                                                                                   |                                                                                                    |                                                                                                            |                                                                                                   |                                                                                      |                                                                                                   |
|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
|  <div>NEW</div>  |                   |  <div>MIX<br/>match</div> |                  |    |                |
| SECKET<br>HAVEN   175                                                                             | LED<br>QUIMERA   177                                                                               | SECKET<br>VARYT   179                                                                                      | SECKET<br>WUD   181                                                                               |                                                                                      | SECKET<br>SUN   182                                                                               |
|                  |                   |                           |                  |     |  <div>NEW</div> |
| SECKET<br>OLYPSO   183                                                                            | SECKET<br>MAGICO   185                                                                             |                                                                                                            | LED<br>NUMINOS®   186-193                                                                         | LED<br>GRIP! S   195                                                                 | LED<br>MOTUNA   197                                                                               |
|  <div>NEW</div> |  <div>NEW</div>  |  <div>NEW</div>          |  <div>NEW</div> |   |               |
| LED<br>OVANA 44   197                                                                             | LED<br>SLVconnect®<br>OVANA 44   197                                                               | LED<br>MEDO® 2 SLIM  <br>198-201                                                                           | LED<br>MEDO® HYVE  <br>202-203                                                                    | LED<br>MEDO® RING  <br>206-207                                                       | LED<br>MEDO® PRO   208-213                                                                        |
|                |                 |                         |                |   |               |
| LED<br>SECKET<br>LALU® SET   216-221                                                              |                                                                                                    |                                                                                                            | LED<br>DYSKO   221                                                                                | LED<br>ONE FLAT   223                                                                |                                                                                                   |
|                |                 |                         |                |  |              |
| LED<br>ONE VERTICAL   224                                                                         | LED<br>ONE CUBE   225                                                                              | LED<br>ONE CUBE UP/DOWN  <br>225                                                                           | LED<br>ONE   227-229                                                                              | LED<br>ONE DOUBLE   231                                                              | LED<br>ONE TRIPLE   231                                                                           |
|                |  <div>NEW</div> |                         |                |  |              |
| LED<br>ONE LINEAR   233                                                                           | LED<br>LINIUS   234-237                                                                            | SECKET<br>PANTILO ROPE   239                                                                               | SECKET<br>PANTILO OVAL   240                                                                      | SECKET<br>PANTILO   240                                                              | SECKET<br>PANTILO CONVEX   241                                                                    |





LIGHT EYE® | 243



ENOLA® 2.0 | 244-245



ASTO TUBE | 247



GLENOS® 2.0 | 248-249



GLENOS® PRO | 249



WORKLIGHT PRO | 251



WORKLIGHT | 251



PANEL | 253



GRIP! FLAT | 255



OCULUS | 257



FITU | 258



FENDA | 260-261



HELIA | 264-265



PARA CONE | 265



PHELIA | 267



FORCHINI | 268-269



ROTOBALL | 271



PARA DOME | 273



PARA 380 PD | 273

1011682 175






## HAVEN 35

PD, E27



NEW



220-240 V ~50/60 Hz  
Material: steel



Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011684   | 247.00 |
| ○ white | 1011685   | 247.00 |
| ● gold  | 1011686   | 256.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F




Prod. no. 1005303 9.00 GBP

## HAVEN 50

PD, E27



NEW



220-240 V ~50/60 Hz  
Material: steel



Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011681   | 302.00 |
| ○ white | 1011682   | 302.00 |
| ● gold  | 1011683   | 310.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP






1008033 177



## QUIMERA PD, PHASE



220-240 V ~50/60 Hz | 700 mA

Total wattage: 8.5 W

Material: aluminium/glass



|          |        |        |
|----------|--------|--------|
| Indirect | 2700 K | 3000 K |
|          | 330 lm | 350 lm |

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| brass       | 1008033   | 323.00 |
| dark bronze | 1008032   | 323.00 |
| dark copper | 1008034   | 323.00 |




1008118 + 1008023 179





## VARYT

PD, E14



220-240 V ~50/60 Hz  
Material: aluminium



Base: 1xE14 max. Ø: 11 cm | L: 3.8 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● black  | 1008114   | 96.00  |
| ○ white  | 1008115   | 96.00  |
| ● brass  | 1008117   | 121.00 |
| ● chrome | 1008116   | 105.00 |
| ● copper | 1008118   | 121.00 |



E14 | 4 W | 320°  
380 lm | 2700 K | EEC = F



Prod. no.: 1005284 6.00 GBP



| Product                        | Prod. no. | GBP   |
|--------------------------------|-----------|-------|
| Glass shade for PD, WL, CL, TL |           |       |
| ● smoky grey                   | 1007858   | 69.00 |
| ○ white                        | 1007859   | 61.00 |
| ○ white                        | 1007860   | 66.00 |
| ● amber                        | 1008023   | 69.00 |
| Glass shade for CL, WL, TL, PD |           |       |
| ○ white                        | 1008119   | 52.00 |

## VARYT

GLOBE GLASS SHADE



Ø: 12 cm  
H: 12.8 cm  
Material: glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008119   | 52.00 |

## VARYT

DIAMOND GLASS SHADE



Ø: 12 cm  
H: 12.7 cm  
Material: glass

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● smoky grey | 1007858   | 69.00 |
| ● amber      | 1008023   | 69.00 |

## VARYT

LINED GLASS SHADE



Ø: 12 cm  
H: 13 cm  
Material: glass

## VARYT

PLEATED GLASS SHADE



Ø: 11.5 cm  
H: 13.5 cm  
Material: glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007859   | 61.00 |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007860   | 66.00 |





1008047 181



## WUD PD, E27, HALF ROUND



220-240 V ~50/60 Hz  
Material: steel/wood

- open cable end



Base: 1xE27

| Variant   | Prod. no. | GBP    |
|-----------|-----------|--------|
| ● natural | 1008045   | 155.00 |



E27 | 8 W | 330°  
400 lm | 1900 K |




Prod. no. 1008159 77.00 GBP



| Product                         | Prod. no. | GBP   |
|---------------------------------|-----------|-------|
| Fitu   Single ceiling rosette   |           |       |
| ● black                         | 132600    | 23.00 |
| ○ white                         | 132601    | 23.00 |
| ● gold                          | 1002163   | 26.00 |
| ● chrome                        | 132605    | 26.00 |
| 1-phase light adapter           |           |       |
| ● black                         | 143120    | 14.00 |
| ○ white                         | 143121    | 14.00 |
| ● grey                          | 143124    | 14.00 |
| 3-phase light adapter           |           |       |
| ● black                         | 145990    | 18.00 |
| ● grey                          | 145994    | 18.00 |
| ○ white                         | 1001542   | 18.00 |
| Recessed ceiling rosette        |           |       |
| ● black                         | 1004674   | 21.00 |
| ○ white                         | 1004675   | 21.00 |
| Surface-mounted ceiling rosette |           |       |
| ● black                         | 1004744   | 31.00 |

## WUD PD, E27, CLYLINDRICAL



220-240 V ~50/60 Hz  
Material: steel/wood

- open cable end



Base: 1xE27

| Variant   | Prod. no. | GBP    |
|-----------|-----------|--------|
| ● natural | 1008047   | 126.00 |



E27 | 6 W | 330°  
570 lm | 2200 K | EEC = F



Prod. no. 1008152 55.00 GBP



| Product                         | Prod. no. | GBP   |
|---------------------------------|-----------|-------|
| Fitu   Single ceiling rosette   |           |       |
| ● black                         | 132600    | 23.00 |
| ○ white                         | 132601    | 23.00 |
| ● gold                          | 1002163   | 26.00 |
| ● chrome                        | 132605    | 26.00 |
| 1-phase light adapter           |           |       |
| ● black                         | 143120    | 14.00 |
| ○ white                         | 143121    | 14.00 |
| ● grey                          | 143124    | 14.00 |
| 3-phase light adapter           |           |       |
| ● black                         | 145990    | 18.00 |
| ● grey                          | 145994    | 18.00 |
| ○ white                         | 1001542   | 18.00 |
| Recessed ceiling rosette        |           |       |
| ● black                         | 1004674   | 21.00 |
| ○ white                         | 1004675   | 21.00 |
| Surface-mounted ceiling rosette |           |       |
| ● black                         | 1004744   | 31.00 |

## SUN 20

PD, E27



220-240 V ~50/60 Hz  
Material: aluminium

- open cable end



Base: 1xE27 max. Ø: 4.5 cm | L: 12 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008139   | 88.00 |
| ● gold  | 1008138   | 88.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E




Prod. no. 1005289 10.00 GBP



| Product                       | Prod. no. | GBP   |
|-------------------------------|-----------|-------|
| Fitu   Single ceiling rosette |           |       |
| ● black                       | 132600    | 23.00 |
| ○ white                       | 132601    | 23.00 |
| ● gold                        | 1002163   | 26.00 |
| ● chrome                      | 132605    | 26.00 |
| 1-phase light adapter         |           |       |
| ● black                       | 143120    | 14.00 |
| ○ white                       | 143121    | 14.00 |
| ● grey                        | 143124    | 14.00 |
| 3-phase light adapter         |           |       |
| ● black                       | 145990    | 18.00 |
| ● grey                        | 145994    | 18.00 |
| ○ white                       | 1001542   | 18.00 |

## SUN 30

PD, E27



220-240 V ~50/60 Hz  
Material: aluminium

- open cable end



Base: 1xE27 max. Ø: 4.5 cm | L: 22 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008137   | 130.00 |
| ● gold  | 1008136   | 130.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E




Prod. no. 1005289 10.00 GBP



| Product                       | Prod. no. | GBP   |
|-------------------------------|-----------|-------|
| Fitu   Single ceiling rosette |           |       |
| ● black                       | 132600    | 23.00 |
| ○ white                       | 132601    | 23.00 |
| ● gold                        | 1002163   | 26.00 |
| ● chrome                      | 132605    | 26.00 |
| 1-phase light adapter         |           |       |
| ● black                       | 143120    | 14.00 |
| ○ white                       | 143121    | 14.00 |
| ● grey                        | 143124    | 14.00 |
| 3-phase light adapter         |           |       |
| ● black                       | 145990    | 18.00 |
| ● grey                        | 145994    | 18.00 |
| ○ white                       | 1001542   | 18.00 |

## SUN 40

PD, E27

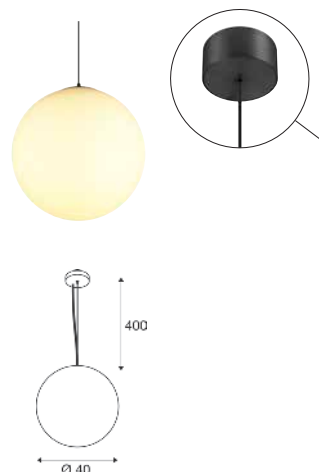

220-240 V ~50/60 Hz



Base: 1xE27 max. Ø: 4.5 cm | L: 22 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008534   | 168.00 |
| ● gold  | 1008533   | 168.00 |



E27 | 14 W | 240°  
1520 lm | 3000 K | EEC = E



Prod. no. 1005307 11.00 GBP




| Product                       | Prod. no. | GBP   |
|-------------------------------|-----------|-------|
| Fitu   Single ceiling rosette |           |       |
| ● black                       | 132600    | 23.00 |
| ○ white                       | 132601    | 23.00 |
| ● gold                        | 1002163   | 26.00 |
| ● chrome                      | 132605    | 26.00 |
| 1-phase light adapter         |           |       |
| ● black                       | 143120    | 14.00 |
| ○ white                       | 143121    | 14.00 |
| ● grey                        | 143124    | 14.00 |
| 3-phase light adapter         |           |       |
| ● black                       | 145990    | 18.00 |
| ● grey                        | 145994    | 18.00 |
| ○ white                       | 1001542   | 18.00 |





## OLYPSO 40

PD, E27

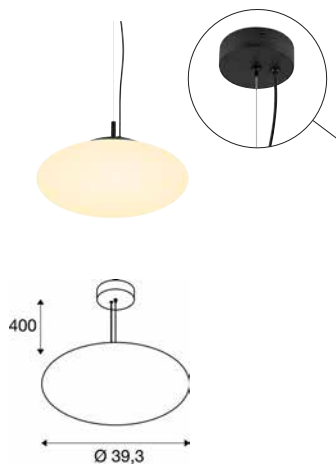

220-240 V ~50/60 Hz  
Material: steel/glass



Base: 1xE27    max. Ø: 8 cm    L: 12 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010413   | 180.00 |
| ● gold  | 1010414   | 184.00 |




E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289    10.00 GBP

## OLYPSO 50

PD, E27

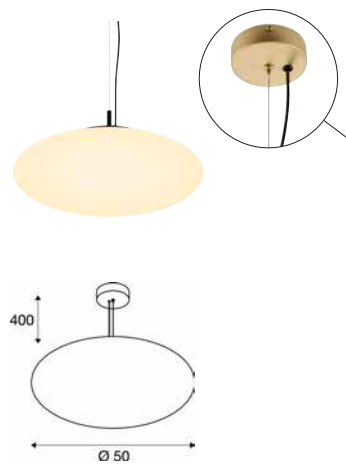

220-240 V ~50/60 Hz  
Material: steel/glass



Base: 1xE27    max. Ø: 12 cm    L: 16 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010415   | 222.00 |
| ● gold  | 1010416   | 226.00 |



E27 | 14 W | 240°  
1520 lm | 3000 K | EEC = E



Prod. no.: 1005307    11.00 GBP

1009136 185





## MAGICO 20

PD, E27



220-240 V ~50/60 Hz  
Material: aluminium

- open cable end



Base: 1xE27

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1008502   | 163.00 |
| ● black      | 1008500   | 163.00 |
| ○ white      | 1008501   | 163.00 |
| ● aluminium  | 1009135   | 168.00 |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F



Prod. no. 1005265 23.00 GBP



| Product                         | Prod. no. | GBP   |
|---------------------------------|-----------|-------|
| Fitu   Single ceiling rosette   |           |       |
| ● black                         | 132600    | 23.00 |
| ○ white                         | 132601    | 23.00 |
| 1-phase light adapter           |           |       |
| ● black                         | 143120    | 14.00 |
| ○ white                         | 143121    | 14.00 |
| ● grey                          | 143124    | 14.00 |
| 3-phase light adapter           |           |       |
| ● black                         | 145990    | 18.00 |
| ● grey                          | 145994    | 18.00 |
| ○ white                         | 1001542   | 18.00 |
| Recessed ceiling rosette        |           |       |
| ● black                         | 1004674   | 21.00 |
| ○ white                         | 1004675   | 21.00 |
| Surface-mounted ceiling rosette |           |       |
| ● black                         | 1004744   | 31.00 |

## MAGICO 38

PD, E27



220-240 V ~50/60 Hz  
Material: aluminium

- open cable end



Base: 1xE27

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1008505   | 172.00 |
| ● black      | 1008503   | 172.00 |
| ○ white      | 1008504   | 172.00 |
| ● aluminium  | 1009136   | 180.00 |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F



Prod. no. 1005265 23.00 GBP



| Product                         | Prod. no. | GBP   |
|---------------------------------|-----------|-------|
| Fitu   Single ceiling rosette   |           |       |
| ● black                         | 132600    | 23.00 |
| ○ white                         | 132601    | 23.00 |
| 1-phase light adapter           |           |       |
| ● black                         | 143120    | 14.00 |
| ○ white                         | 143121    | 14.00 |
| ● grey                          | 143124    | 14.00 |
| 3-phase light adapter           |           |       |
| ● black                         | 145990    | 18.00 |
| ● grey                          | 145994    | 18.00 |
| ○ white                         | 1001542   | 18.00 |
| Recessed ceiling rosette        |           |       |
| ● black                         | 1004674   | 21.00 |
| ○ white                         | 1004675   | 21.00 |
| Surface-mounted ceiling rosette |           |       |
| ● black                         | 1004744   | 31.00 |

## MAGICO 55

PD, E27



220-240 V ~50/60 Hz  
Material: aluminium

- open cable end



Base: 1xE27

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1008508   | 180.00 |
| ● black      | 1008507   | 180.00 |
| ○ white      | 1008506   | 180.00 |
| ● aluminium  | 1009137   | 184.00 |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F




Prod. no. 1005265 23.00 GBP



| Product                         | Prod. no. | GBP   |
|---------------------------------|-----------|-------|
| Fitu   Single ceiling rosette   |           |       |
| ● black                         | 132600    | 23.00 |
| ○ white                         | 132601    | 23.00 |
| 1-phase light adapter           |           |       |
| ● black                         | 143120    | 14.00 |
| ○ white                         | 143121    | 14.00 |
| ● grey                          | 143124    | 14.00 |
| 3-phase light adapter           |           |       |
| ● black                         | 145990    | 18.00 |
| ● grey                          | 145994    | 18.00 |
| ○ white                         | 1001542   | 18.00 |
| Recessed ceiling rosette        |           |       |
| ● black                         | 1004674   | 21.00 |
| ○ white                         | 1004675   | 21.00 |
| Surface-mounted ceiling rosette |           |       |
| ● black                         | 1004744   | 31.00 |

# NUMINOS® S PD

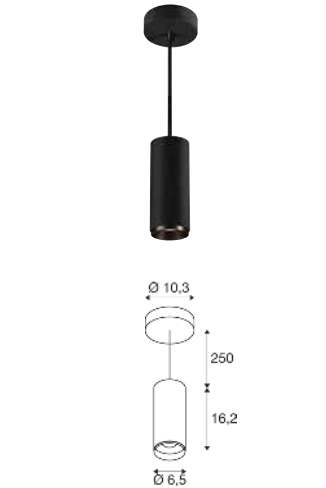

220-240 V ~50/60 Hz | 200 mA  
Total wattage: 8 W  
Material: aluminium/PC

| Variant             | GBP    |
|---------------------|--------|
| All S versions      | 121.00 |
| All S versions DALI | 172.00 |

Note:  
Decorative ring also  
available in white,  
gold and copper



| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Front ring S |           |      |
| ○ white      | 1006167   | 2.00 |
| ● copper     | 1008140   | 8.00 |
| ● gold       | 1008144   | 8.00 |



● black




○ white



|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 950 lm  | 24° | 16 | 1004146   |  |
|  |        |         | 36° | 16 | 1004147   |  |
|  |        |         | 60° | 19 | 1004148   |  |
|  | 3000 K | 1050 lm | 24° | 16 | 1004154   |  |
|  |        |         | 36° | 16 | 1004155   |  |
|  |        |         | 60° | 19 | 1004156   |  |
|  | 4000 K | 1100 lm | 24° | 16 | 1004162   |  |
|  |        |         | 36° | 16 | 1004163   |  |
|  |        |         | 60° | 19 | 1004164   |  |
|  | 2700 K | 950 lm  | 24° | 16 | 1004434   |  |
|  |        |         | 36° | 16 | 1004435   |  |
|  |        |         | 60° | 19 | 1004436   |  |
|  | 3000 K | 1050 lm | 24° | 16 | 1004442   |  |
|  |        |         | 36° | 16 | 1004443   |  |
|  |        |         | 60° | 19 | 1004444   |  |
|  | 4000 K | 1100 lm | 24° | 16 | 1004450   |  |
|  |        |         | 36° | 16 | 1004451   |  |
|  |        |         | 60° | 19 | 1004452   |  |
|  | 2700 K | 950 lm  | 24° | 16 | 1004150   |  |
|  |        |         | 36° | 16 | 1004151   |  |
|  |        |         | 60° | 19 | 1004152   |  |
|  | 3000 K | 1050 lm | 24° | 16 | 1004158   |  |
|  |        |         | 36° | 16 | 1004159   |  |
|  |        |         | 60° | 19 | 1004160   |  |
|  | 4000 K | 1100 lm | 24° | 16 | 1004166   |  |
|  |        |         | 36° | 16 | 1004167   |  |
|  |        |         | 60° | 19 | 1004168   |  |
|  | 2700 K | 950 lm  | 24° | 16 | 1004438   |  |
|  |        |         | 36° | 16 | 1004439   |  |
|  |        |         | 60° | 19 | 1004440   |  |
|  | 3000 K | 1050 lm | 24° | 16 | 1004446   |  |
|  |        |         | 36° | 16 | 1004447   |  |
|  |        |         | 60° | 19 | 1004448   |  |
|  | 4000 K | 1100 lm | 24° | 16 | 1004454   |  |
|  |        |         | 36° | 16 | 1004455   |  |
|  |        |         | 60° | 19 | 1004456   |  |

# NUMINOS® M PD

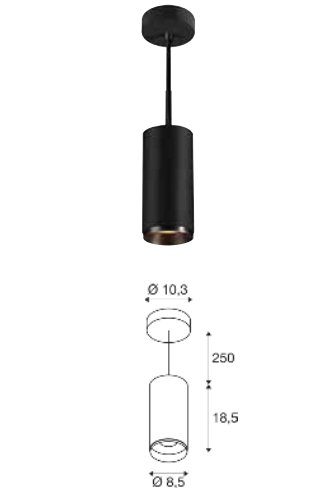

220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: aluminium/PC

| Variant             | GBP    |
|---------------------|--------|
| All M versions      | 138.00 |
| All M versions DALI | 180.00 |

Note:  
Decorative ring also  
available in white,  
gold and copper



| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Front ring M |           |      |
| ○ white      | 1006168   | 3.00 |
| ● copper     | 1008141   | 8.00 |
| ● gold       | 1008145   | 8.00 |



● black




○ white



|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 1750 lm | 24° | 16 | 1004242   |  |
|  |        |         | 36° | 16 | 1004243   |  |
|  |        |         | 60° | 22 | 1004244   |  |
|  | 3000 K | 1800 lm | 24° | 16 | 1004250   |  |
|  |        |         | 36° | 16 | 1004251   |  |
|  |        |         | 60° | 22 | 1004252   |  |
|  | 4000 K | 1950 lm | 24° | 16 | 1004258   |  |
|  |        |         | 36° | 16 | 1004259   |  |
|  |        |         | 60° | 22 | 1004260   |  |
|  | 2700 K | 1750 lm | 24° | 16 | 1004530   |  |
|  |        |         | 36° | 16 | 1004531   |  |
|  |        |         | 60° | 22 | 1004532   |  |
|  | 3000 K | 1800 lm | 24° | 16 | 1004538   |  |
|  |        |         | 36° | 16 | 1004539   |  |
|  |        |         | 60° | 22 | 1004540   |  |
|  | 4000 K | 1950 lm | 24° | 16 | 1004546   |  |
|  |        |         | 36° | 16 | 1004547   |  |
|  |        |         | 60° | 22 | 1004548   |  |
|  | 2700 K | 1750 lm | 24° | 16 | 1004246   |  |
|  |        |         | 36° | 16 | 1004247   |  |
|  |        |         | 60° | 22 | 1004248   |  |
|  | 3000 K | 1800 lm | 24° | 16 | 1004254   |  |
|  |        |         | 36° | 16 | 1004255   |  |
|  |        |         | 60° | 22 | 1004256   |  |
|  | 4000 K | 1950 lm | 24° | 16 | 1004262   |  |
|  |        |         | 36° | 16 | 1004263   |  |
|  |        |         | 60° | 22 | 1004264   |  |
|  | 2700 K | 1750 lm | 24° | 16 | 1004534   |  |
|  |        |         | 36° | 16 | 1004535   |  |
|  |        |         | 60° | 22 | 1004536   |  |
|  | 3000 K | 1800 lm | 24° | 16 | 1004542   |  |
|  |        |         | 36° | 16 | 1004543   |  |
|  |        |         | 60° | 22 | 1004544   |  |
|  | 4000 K | 1950 lm | 24° | 16 | 1004550   |  |
|  |        |         | 36° | 16 | 1004551   |  |
|  |        |         | 60° | 22 | 1004552   |  |



# NUMINOS® L PD

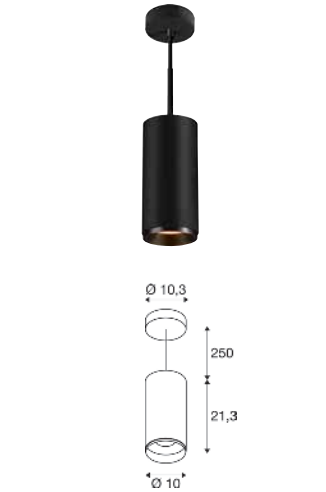

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: aluminium/PC

| Variant             | GBP    |
|---------------------|--------|
| All L versions      | 151.00 |
| All L versions DALI | 197.00 |

Note:  
Decorative ring also  
available in white,  
gold and copper



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Front ring L |           |       |
| ○ white      | 1006169   | 3.00  |
| ● copper     | 1008142   | 10.00 |
| ● gold       | 1008146   | 10.00 |



● black




○ white



|  |        |         |     |    | Prod. no. |  |
|--|--------|---------|-----|----|-----------|--|
|  | 2700 K | 2300 lm | 24° | 16 | 1004338   |  |
|  |        |         | 36° | 16 | 1004339   |  |
|  |        |         | 60° | 19 | 1004340   |  |
|  | 3000 K | 2400 lm | 24° | 16 | 1004346   |  |
|  |        |         | 36° | 16 | 1004347   |  |
|  |        |         | 60° | 19 | 1004348   |  |
|  | 4000 K | 2600 lm | 24° | 16 | 1004354   |  |
|  |        |         | 36° | 16 | 1004355   |  |
|  |        |         | 60° | 19 | 1004356   |  |
|  | 2700 K | 2300 lm | 24° | 16 | 1004626   |  |
|  |        |         | 36° | 16 | 1004627   |  |
|  |        |         | 60° | 19 | 1004628   |  |
|  | 3000 K | 2400 lm | 24° | 16 | 1004634   |  |
|  |        |         | 36° | 16 | 1004635   |  |
|  |        |         | 60° | 19 | 1004636   |  |
|  | 4000 K | 2600 lm | 24° | 16 | 1004642   |  |
|  |        |         | 36° | 16 | 1004643   |  |
|  |        |         | 60° | 19 | 1004644   |  |
|  | 2700 K | 2300 lm | 24° | 16 | 1004342   |  |
|  |        |         | 36° | 16 | 1004343   |  |
|  |        |         | 60° | 19 | 1004344   |  |
|  | 3000 K | 2400 lm | 24° | 16 | 1004350   |  |
|  |        |         | 36° | 16 | 1004351   |  |
|  |        |         | 60° | 19 | 1004352   |  |
|  | 4000 K | 2600 lm | 24° | 16 | 1004358   |  |
|  |        |         | 36° | 16 | 1004359   |  |
|  |        |         | 60° | 19 | 1004360   |  |
|  | 2700 K | 2300 lm | 24° | 16 | 1004630   |  |
|  |        |         | 36° | 16 | 1004631   |  |
|  |        |         | 60° | 19 | 1004632   |  |
|  | 3000 K | 2400 lm | 24° | 16 | 1004638   |  |
|  |        |         | 36° | 16 | 1004639   |  |
|  |        |         | 60° | 19 | 1004640   |  |
|  | 4000 K | 2600 lm | 24° | 16 | 1004646   |  |
|  |        |         | 36° | 16 | 1004647   |  |
|  |        |         | 60° | 19 | 1004648   |  |

# NUMINOS® XL PD

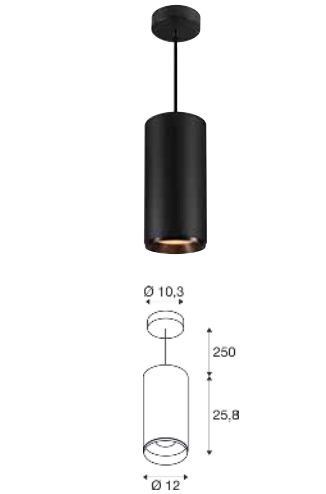

220-240 V ~50/60 Hz | 700 mA  
Total wattage: 27 W  
Material: aluminium/PC

| Variant              | GBP    |
|----------------------|--------|
| All XL versions      | 172.00 |
| All XL versions DALI | 218.00 |

Note:  
Decorative ring also  
available in white,  
gold and copper



| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Front ring XL |           |       |
| ○ white       | 1006170   | 4.00  |
| ● copper      | 1008143   | 10.00 |
| ● gold        | 1008147   | 10.00 |




● black



○ white



|      |        |         |     |    | Prod. no. |  |
|------|--------|---------|-----|----|-----------|--|
|      | 2700 K | 3550 lm | 24° | 16 | 1005705   |  |
|      |        |         | 36° | 16 | 1005706   |  |
|      |        |         | 60° | 22 | 1005707   |  |
|      | 3000 K | 3550 lm | 24° | 16 | 1005711   |  |
|      |        |         | 36° | 16 | 1005712   |  |
|      |        |         | 60° | 22 | 1005713   |  |
|      | 4000 K | 3900 lm | 24° | 16 | 1005717   |  |
|      |        |         | 36° | 16 | 1005718   |  |
|      |        |         | 60° | 22 | 1005719   |  |
| <br> | 2700 K | 3550 lm | 24° | 16 | 1005777   |  |
|      |        |         | 36° | 16 | 1005778   |  |
|      |        |         | 60° | 22 | 1005779   |  |
|      | 3000 K | 3550 lm | 24° | 16 | 1005783   |  |
|      |        |         | 36° | 16 | 1005784   |  |
|      |        |         | 60° | 22 | 1005785   |  |
|      | 4000 K | 3900 lm | 24° | 16 | 1005789   |  |
|      |        |         | 36° | 16 | 1005790   |  |
|      |        |         | 60° | 22 | 1005791   |  |
|      | 2700 K | 3550 lm | 24° | 16 | 1005708   |  |
|      |        |         | 36° | 16 | 1005709   |  |
|      |        |         | 60° | 22 | 1005710   |  |
|      | 3000 K | 3550 lm | 24° | 16 | 1005714   |  |
|      |        |         | 36° | 16 | 1005715   |  |
|      |        |         | 60° | 22 | 1005716   |  |
|      | 4000 K | 3900 lm | 24° | 16 | 1005720   |  |
|      |        |         | 36° | 16 | 1005721   |  |
|      |        |         | 60° | 22 | 1005722   |  |
| <br> | 2700 K | 3550 lm | 24° | 16 | 1005780   |  |
|      |        |         | 36° | 16 | 1005781   |  |
|      |        |         | 60° | 22 | 1005782   |  |
|      | 3000 K | 3550 lm | 24° | 16 | 1005786   |  |
|      |        |         | 36° | 16 | 1005787   |  |
|      |        |         | 60° | 22 | 1005788   |  |
|      | 4000 K | 3900 lm | 24° | 16 | 1005792   |  |
|      |        |         | 36° | 16 | 1005793   |  |
|      |        |         | 60° | 22 | 1005794   |  |

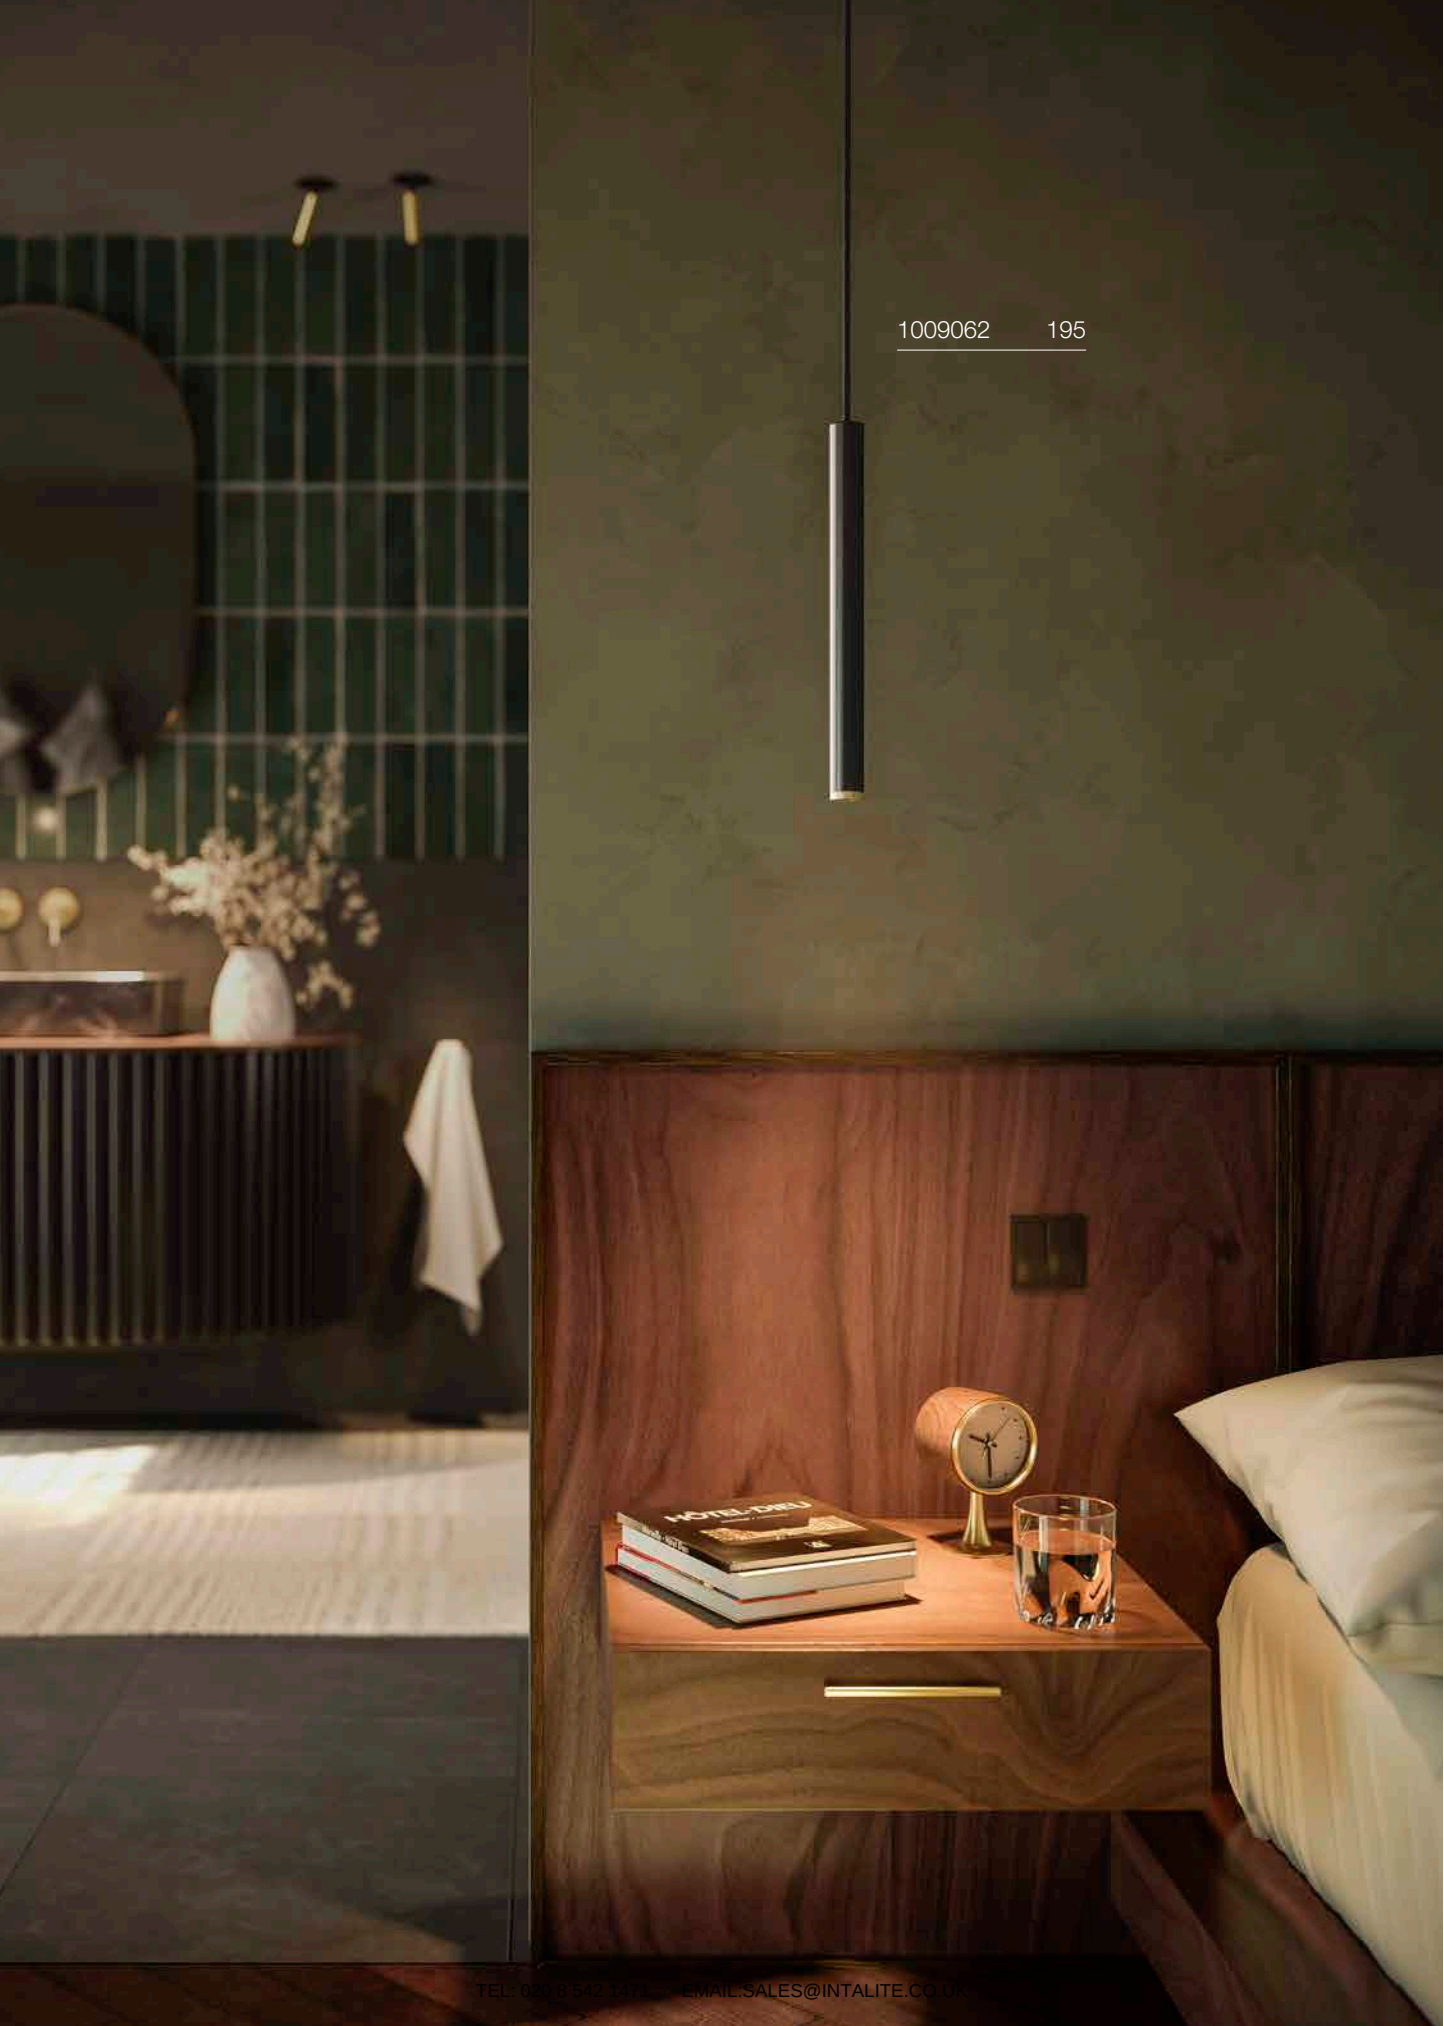


1009062 195



## GRIP! S

PD, PHASE, Ø 3,0 CM

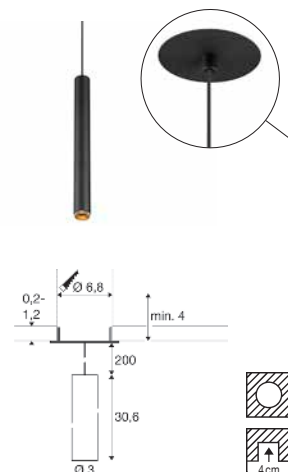

220-240 V ~50/60 Hz | 250 mA

Total wattage: 10 W

Material: steel

- Honeycomb accessories included
- Including external LED driver



|         |        |
|---------|--------|
| 1009060 | 2700 K |
| 1009062 |        |
| 1009064 | 590 lm |
| 1009066 |        |
| 1009061 | 3000 K |
| 1009063 |        |
| 1009065 | 620 lm |
| 1009067 |        |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black/gold<br>590 lm   2700 K   | 1009062   | 138.00 |
| ● black/gold<br>620 lm   3000 K   | 1009063   | 138.00 |
| ● white/black<br>590 lm   2700 K  | 1009060   | 138.00 |
| ● white/black<br>620 lm   3000 K  | 1009061   | 138.00 |
| ● gold/black<br>590 lm   2700 K   | 1009066   | 138.00 |
| ● gold/black<br>620 lm   3000 K   | 1009067   | 138.00 |
| ● bronze/black<br>590 lm   2700 K | 1009064   | 138.00 |
| ● bronze/black<br>620 lm   3000 K | 1009065   | 138.00 |



| Product                | Prod. no. | GBP   |
|------------------------|-----------|-------|
| Decorative ring, white |           |       |
| ● black                | 1011829   | 16.00 |
| ○ white                | 1011830   | 16.00 |
| ● gold                 | 1011831   | 16.00 |
| ● nickel               | 1011832   | 16.00 |
| HONEYCOMB + Spacer     |           |       |
| ● black                | 1011837   | 8.00  |










## MOTUNA

PD, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: aluminium



|         |         |
|---------|---------|
| 1010216 | 2700 K  |
|         | 750 lm  |
| 1010366 | 2700 K  |
|         | 1000 lm |

| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black/gold<br>750 lm  | 1010216   | 189.00 |
| ○ white/gold<br>1000 lm | 1010366   | 189.00 |

## OVANA 44

PD, LED, PHASE, CCT



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: steel/polycarbonate (PE)



|              |         |         |         |
|--------------|---------|---------|---------|
| 1011991 Down | 2700 K  | 3000 K  | 4000 K  |
|              | 1620 lm | 1650 lm | 1680 lm |
| 1011992 Down | 2700 K  | 3000 K  | 4000 K  |
|              | 1860 lm | 1870 lm | 1900 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black<br>1620 lm | 1011991   | 247.00 |
| ○ white<br>1860 lm | 1011992   | 247.00 |

## SLVconnect® OVANA 44

PD, LED, ZIGBEE, TW



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: steel/polycarbonate (PE)




|              |                   |
|--------------|-------------------|
| 1011997 Down | 2200 K - 6500 K   |
|              | 1490 lm - 1650 lm |
| 1011998 Down | 2200 K - 6500 K   |
|              | 1710 lm - 1900 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black<br>1490 lm | 1011997   | 285.00 |
| ○ white<br>1710 lm | 1011998   | 285.00 |

# MEDO® 2.0 SLIM 30

## CL, PHASE

NEW



220-240 V ~50/60 Hz | 200 mA

Total wattage: 8 W

Material: aluminium/steel

1011695 + 1011699 199



|      | 3000 K  | 4000 K  |
|------|---------|---------|
| Down | 1000 lm | 1000 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011693   | 201.00 |
| ○ white | 1011694   | 201.00 |




| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |



## MEDO® 2.0 SLIM 40 CL, PHASE

NEW

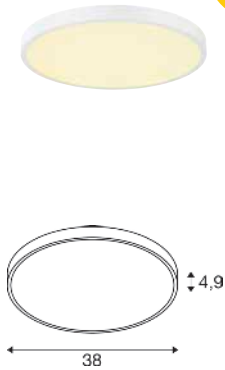

220-240 V ~50/60 Hz | 400 mA  
Total wattage: 15.5 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 1900 lm | 1900 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011695   | 239.00 |
| ○ white | 1011696   | 239.00 |



| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |

## MEDO® 2.0 SLIM 60 CL, PHASE

NEW

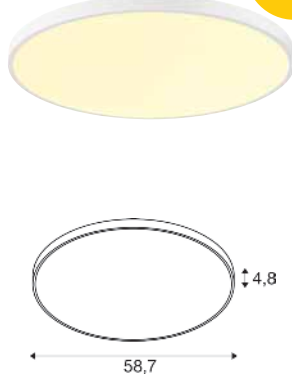

220-240 V ~50/60 Hz | 900 mA  
Total wattage: 35 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 4200 lm | 4200 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011697   | 394.00 |
| ○ white | 1011698   | 394.00 |



| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |

## MEDO® 2.0 SLIM 80 CL, PHASE

NEW

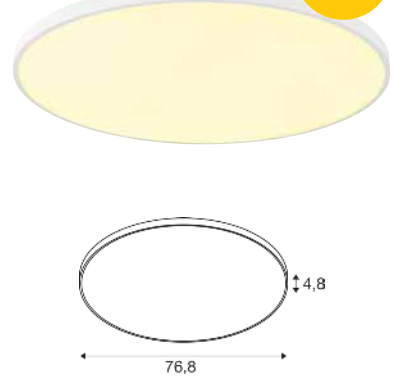

220-240 V ~50/60 Hz | 1200 mA  
Total wattage: 45 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 5900 lm | 5900 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011699   | 579.00 |
| ○ white | 1011700   | 579.00 |




| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |

# MEDO® 2.0 SLIM 30

CL, DALI

NEW



220-240 V ~0/50/60 Hz | 200 mA

Total wattage: 8.6 W

Material: aluminium/steel



Down

|         |         |
|---------|---------|
| 3000 K  | 4000 K  |
| 1000 lm | 1000 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011701   | 243.00 |
| ○ white | 1011702   | 243.00 |



| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |




## MEDO® 2.0 SLIM 40

CL, DALI



NEW



220-240 V ~0/50/60 Hz | 400 mA  
Total wattage: 15.5 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 1900 lm | 1900 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011703   | 268.00 |
| ○ white | 1011704   | 268.00 |




| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |

## MEDO® 2.0 SLIM 60

CL, DALI



NEW



220-240 V ~0/50/60 Hz | 900 mA  
Total wattage: 34 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 4200 lm | 4200 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011705   | 420.00 |
| ○ white | 1011706   | 420.00 |




| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |

## MEDO® 2.0 SLIM 80

CL, DALI



NEW



200-240 V ~0/50/60 Hz | 1200 mA  
Total wattage: 45 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 5900 lm | 5900 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011707   | 604.00 |
| ○ white | 1011708   | 604.00 |




| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |

## MEDO® 2.0 HYVE 40 CL, PHASE



NEW



220-240 V ~50/60 Hz | 400 mA  
Total wattage: 16 W  
Material: aluminium/steel



|      | 3000 K  | 4000 K  |
|------|---------|---------|
| Down | 2100 lm | 2100 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011851   | 268.00 |
| ○ white | 1011850   | 268.00 |




| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |

## MEDO® 2.0 HYVE 40 CL, DALI



NEW



200-240 V ~0/50/60 Hz | 400 mA  
Total wattage: 17 W  
Material: aluminium/steel



|      | 3000 K  | 4000 K  |
|------|---------|---------|
| Down | 2100 lm | 2100 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011853   | 302.00 |
| ○ white | 1011852   | 302.00 |




| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |

## MEDO® 2.0 HYVE 60 CL, PHASE



NEW



220-240 V ~50/60 Hz | 900 mA  
Total wattage: 35 W  
Material: aluminium/steel



|      | 3000 K  | 4000 K  |
|------|---------|---------|
| Down | 4800 lm | 4800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011855   | 529.00 |
| ○ white | 1011854   | 529.00 |




| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |





## MEDO® 2.0 HYVE 60

CL, DALI

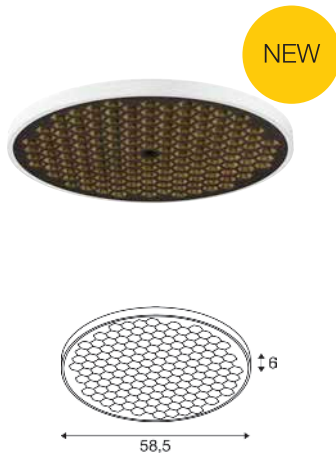

200-240 V ~0/50/60 Hz | 900 mA  
Total wattage: 33 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 4800 lm | 4800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011857   | 562.00 |
| ○ white | 1011856   | 562.00 |



| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |

## MEDO® 2.0 HYVE 80

CL, PHASE



220-240 V ~50/60 Hz | 1800 mA  
Total wattage: 70 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 9700 lm | 9700 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011859   | 789.00 |
| ○ white | 1011858   | 789.00 |



| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |

## MEDO® 2.0 HYVE 80

CL, DALI



200-240 V ~0/50/60 Hz | 1800 mA  
Total wattage: 67 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 9700 lm | 9700 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011861   | 823.00 |
| ○ white | 1011860   | 823.00 |



| Product                          | Prod. no. | GBP   |
|----------------------------------|-----------|-------|
| Pendant suspension 1.5 m central |           |       |
| ● black                          | 1011779   | 52.00 |
| ○ white                          | 1011780   | 52.00 |
| Pendant suspension 5 m central   |           |       |
| ● black                          | 1011781   | 92.00 |
| ○ white                          | 1011782   | 92.00 |
| Pendant suspension 3 m parallel  |           |       |
| ● black                          | 1011783   | 78.00 |
| ○ white                          | 1011784   | 78.00 |



1011699 199



## MEDO® 2.0 SUSPENSION KIT

PENDANT SUSPENSION, 1.5 M CENTRAL



NEW



Ø: 13 cm  
H: 3 cm  
Material: steel

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011779   | 52.00 |
| ○ white | 1011780   | 52.00 |

## MEDO® 2.0 SUSPENSION KIT

PENDANT SUSPENSION, 5 M CENTRAL



NEW



Ø: 13 cm  
H: 3 cm  
Material: steel

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011781   | 92.00 |
| ○ white | 1011782   | 92.00 |

## MEDO® 2.0 SUSPENSION KIT

PENDANT SUSPENSION, 3 M PARALLEL



NEW



Ø: 8 cm  
H: 3 cm  
Material: steel


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011783   | 78.00 |
| ○ white | 1011784   | 78.00 |



1008590 206

## MEDO® RING 60

PD, DALI



220-240 V ~50/60 Hz | 700 mA

Total wattage: 26 W

Material: aluminium/steel




|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 3750 lm | 4000 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008589   | 688.00 |
| ○ white | 1008590   | 688.00 |



## MEDO® RING 60

PD, PHASE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 27 W  
Material: aluminium/steel



| Down | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 3750 lm | 4000 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008591   | 663.00 |
| ○ white | 1008592   | 663.00 |

## MEDO® RING 90

PD, DALI



220-240 V ~50/60 Hz | 1200 mA  
Total wattage: 42 W  
Material: aluminium/steel





| Down | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 5000 lm | 5300 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008593   | 865.00 |
| ○ white | 1008594   | 865.00 |

## MEDO® RING 90

PD, PHASE

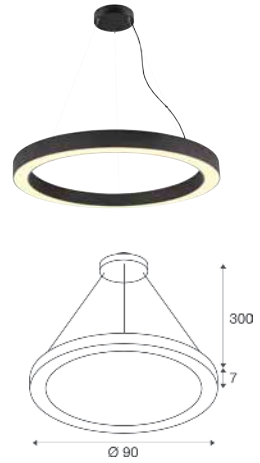

220-240 V ~50/60 Hz | 1200 mA  
Total wattage: 43 W  
Material: aluminium/steel



| Down | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 5000 lm | 5300 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008595   | 831.00 |
| ○ white | 1008596   | 831.00 |

# MEDO® PRO 30

CW, DALI, UGR<19



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: aluminium/steel

# MEDO® PRO 30

CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: aluminium/steel

# MEDO® PRO 40

CW, DALI, UGR<19



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 1150 lm | 1150 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 100 lm  | 100 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007284   | 285.00 |
| ○ white | 1007285   | 285.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 1150 lm | 1150 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 100 lm  | 100 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007288   | 257.00 |
| ○ white | 1007289   | 257.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 2200 lm | 2300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 200 lm  | 200 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007292   | 344.00 |
| ○ white | 1007293   | 344.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



## MEDO® PRO 40

CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: aluminium/steel

## MEDO® PRO 60

CW, DALI, UGR<19



220-240 V ~0/50/60 Hz | 1000 mA  
Total wattage: 39 W  
Material: aluminium/steel

## MEDO® PRO 60

CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 37 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 2200 lm | 2300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 200 lm  | 200 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007296   | 300.00 |
| ○ white | 1007297   | 300.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 4600 lm | 4700 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 400 lm  | 400 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007300   | 604.00 |
| ○ white | 1007301   | 604.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 4600 lm | 4700 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 400 lm  | 400 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007304   | 540.00 |
| ○ white | 1007305   | 540.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



# MEDO® PRO 90

CL, DALI, UGR<19



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 75 W  
Material: aluminium/steel

# MEDO® PRO 90

CL, PHASE, UGR<19



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 74 W  
Material: aluminium/steel

# MEDO® PRO 30

CW, DALI



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 8800 lm | 9100 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 600 lm  | 600 lm  |

| Variant | Prod. no. | GBP      |
|---------|-----------|----------|
| ● black | 1007308   | 1,201.00 |
| ○ white | 1007309   | 1,201.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 8800 lm | 9100 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 600 lm  | 600 lm  |

| Variant | Prod. no. | GBP      |
|---------|-----------|----------|
| ● black | 1007312   | 1,072.00 |
| ○ white | 1007313   | 1,072.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 1300 lm | 1300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 50 lm   | 50 lm   |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007286   | 277.00 |
| ○ white | 1007287   | 277.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |





## MEDO® PRO 30

CW, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: aluminium/steel

## MEDO® PRO 40

CW, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: aluminium/steel

## MEDO® PRO 40

CW, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 1300 lm | 1300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 50 lm   | 50 lm   |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007290   | 249.00 |
| ○ white | 1007291   | 249.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 2550 lm | 2550 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 100 lm  | 100 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007294   | 336.00 |
| ○ white | 1007295   | 336.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 2550 lm | 2550 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 100 lm  | 100 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007298   | 292.00 |
| ○ white | 1007299   | 292.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |




| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |

1007284 208

## MEDO® PRO 60

CW, DALI



220-240 V ~0/50/60 Hz | 1000 mA  
Total wattage: 39 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 5250 lm | 5300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 200 lm  | 200 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007302   | 588.00 |
| ○ white | 1007303   | 588.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



## MEDO® PRO 60

CW, PHASE



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 37 W  
Material: aluminium/steel

## MEDO® PRO 90

CL, DALI



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 75 W  
Material: aluminium/steel

## MEDO® PRO 90

CL, PHASE



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 74 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 5250 lm | 5300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 200 lm  | 200 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007306   | 524.00 |
| ○ white | 1007307   | 524.00 |



|          |          |          |
|----------|----------|----------|
| Direct   | 3000 K   | 4000 K   |
|          | 10550 lm | 10750 lm |
| Indirect | 3000 K   | 4000 K   |
|          | 450 lm   | 450 lm   |

| Variant | Prod. no. | GBP      |
|---------|-----------|----------|
| ● black | 1007310   | 1,184.00 |
| ○ white | 1007311   | 1,184.00 |



|          |          |          |
|----------|----------|----------|
| Direct   | 3000 K   | 4000 K   |
|          | 10550 lm | 10750 lm |
| Indirect | 3000 K   | 4000 K   |
|          | 450 lm   | 450 lm   |

| Variant | Prod. no. | GBP      |
|---------|-----------|----------|
| ● black | 1007314   | 1,057.00 |
| ○ white | 1007315   | 1,057.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |




| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| Suspension kit 1.5 m |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| Suspension kit 5 m   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |


# MEDO®

# OVERVIEW


---

NEW





NEW




MEDO® SLIM 2.0  
CW

MEDO® PRO  
CW


MEDO® HYVE  
CW

|                |                                          |                          |                                          |
|----------------|------------------------------------------|--------------------------|------------------------------------------|
| Sizes          | 30   40   60   80                        | 30   40   60   90        | 40   60   80                             |
| UGR            | 19                                       | 19   25                  | 13   16                                  |
| Control        | Phase   DALI 2                           | Phase   DALI 2           | Phase   DALI 2                           |
| CCT Switch     | 3000K   4000K                            | 3000K   4000K            | 3000K   4000K                            |
| EasyBase       | ✓                                        | ✓                        | ✓                                        |
| Suspension kit | 1.5   5 m (not included)<br>3 m parallel | 1.5   5 m (not included) | 1.5   5 m (not included)<br>3 m parallel |

LED drivers are not included  
and must be ordered separately



**MEDO®**  
MOUNTING FRAME



**MEDO® RING**  
PD


| 30   40   60   90 | 60   90        |
|-------------------|----------------|
| 19                | 25             |
| *                 | Phase   DALI 2 |
| 3000K   4000K     | 3000K   4000K  |
| -                 | -              |
| -                 | 3 m (included) |

\*Requires driver




Easy and fast  
to install thanks  
to EasyBase



## CEILING LIGHTS



Screw EasyBase  
to the ceiling



Wire  
EasyBase




Select the colour temperature using  
the CCT switch on the light, look for  
the green markings

MEDO® 60 and MEDO® 90 are also  
attached using the safety chain provided



1010785 216

## LALU® SET PD, E27 BASE



220-240 V ~50/60 Hz  
Material: aluminium/steel

- E27 lamp included



Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010785   | 142.00 |



E27 | 4 W | 280°  
830 lm | 2700 K | EEC = A




Prod. no. 1008641 7.00 GBP





## LALU® SET

PD, E27 BASE



220-240 V ~50/60 Hz  
Material: aluminium/steel

- E27 lamp included




Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010786   | 176.00 |

## LALU® SET

PD, E27 BASE



220-240 V ~50/60 Hz  
Material: aluminium/steel

- E27 lamp included




Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010787   | 205.00 |

## LALU® SET

PD, E27 BASE



220-240 V ~50/60 Hz  
Material: aluminium/steel

- E27 lamp included



Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010788   | 176.00 |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F



Prod. no. 1005265 23.00 GBP



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F



Prod. no. 1005265 23.00 GBP



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F



Prod. no. 1005265 23.00 GBP



Discover more LALU  
colours and shapes®  
at [slv.com](http://slv.com)






1010791

219

## LALU® SET

PD, LED BASE, PHASE



220-240 V ~50/60 Hz | 500 mA

Total wattage: 9.5 W

Material: aluminium/steel

- Including colour temperature switch  
2700 K/3000 K




|      | 2700 K | 3000 K |
|------|--------|--------|
| Down | 550 lm | 600 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010789   | 231.00 |



## LALU® SET

PD, LED BASE, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.5 W  
Material: aluminium/steel

- Including colour temperature switch  
2700 K/3000 K




| Down | 2700 K | 3000 K |
|------|--------|--------|
|      | 650 lm | 700 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010790   | 235.00 |

## LALU® SET

PD, LED BASE, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.5 W  
Material: aluminium/steel

- Including colour temperature switch  
2700 K/3000 K




| Down | 2700 K | 3000 K |
|------|--------|--------|
|      | 700 lm | 800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010791   | 256.00 |

## LALU® SET

PD, LED BASE, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.5 W  
Material: aluminium/steel

- Including colour temperature switch  
2700 K/3000 K



| Down | 2700 K | 3000 K |
|------|--------|--------|
|      | 700 lm | 700 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010792   | 205.00 |



Discover more LALU  
colours and shapes®  
at [slv.com](http://slv.com)

## LALU® SET

PD, LED BASE, PHASE, RECESSED




220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.5 W  
Material: aluminium/steel

- Including colour temperature switch  
2700 K/3000 K

## LALU® SET

PD, LED BASE, PHASE, RECESSED




220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.5 W  
Material: aluminium/steel

- Including colour temperature switch  
2700 K/3000 K

## LALU® SET

PD, LED BASE, PHASE, RECESSED



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.5 W  
Material: aluminium/steel

- Including colour temperature switch  
2700 K/3000 K



| Down | 2700 K | 3000 K |
|------|--------|--------|
|      | 550 lm | 600 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010793   | 222.00 |



| Down | 2700 K | 3000 K |
|------|--------|--------|
|      | 650 lm | 700 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010794   | 226.00 |




| Down | 2700 K | 3000 K |
|------|--------|--------|
|      | 700 lm | 800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010795   | 247.00 |

## LALU® SET

PD, LED BASE, PHASE, RECESSED



220-240 V ~50/60 Hz | 500 mA

Total wattage: 9.5 W

Material: aluminium/steel

- Including colour temperature switch  
2700 K/3000 K



|      |        |        |
|------|--------|--------|
| Down | 2700 K | 3000 K |
|      | 700 lm | 700 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010796   | 197.00 |

INDOOR | PENDANT LIGHTS



## DYSKO

PD, PHASE

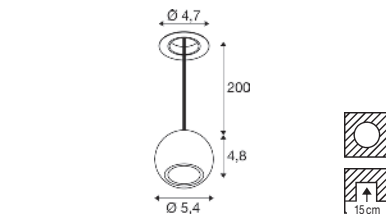

220-240 V ~50/60 Hz | 100 mA

Total wattage: 4.4 W

Material: aluminium

- Including external LED driver



|  |        |
|--|--------|
|  | 2700 K |
|  | 500 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black/white      | 1010360   | 127.00 |
| ● gold/black/white | 1010359   | 127.00 |
| ● gold/black/gold  | 1010361   | 130.00 |


1007703 223





## ONE FLAT


PD, DALI, TRIPLE



220-240 V ~50/60 Hz | 1700 mA  
Total wattage: 58 W  
Material: aluminium/steel

## ONE FLAT

PD, PHASE, SINGLE



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 23 W  
Material: aluminium/steel



|  | 2700 K  | 3000 K  |
|--|---------|---------|
|  | 3500 lm | 3700 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007701   | 991.00 |
| ○ white | 1007702   | 991.00 |
| ● brass | 1007703   | 991.00 |



|         | 2700 K  | 3000 K  |
|---------|---------|---------|
| 1007856 | 1900 lm | 2050 lm |
| 1007855 | 1300 lm | 1350 lm |
| 1007857 | 1700 lm | 1750 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007855   | 417.00 |
| ○ white | 1007856   | 417.00 |
| ● brass | 1007857   | 417.00 |



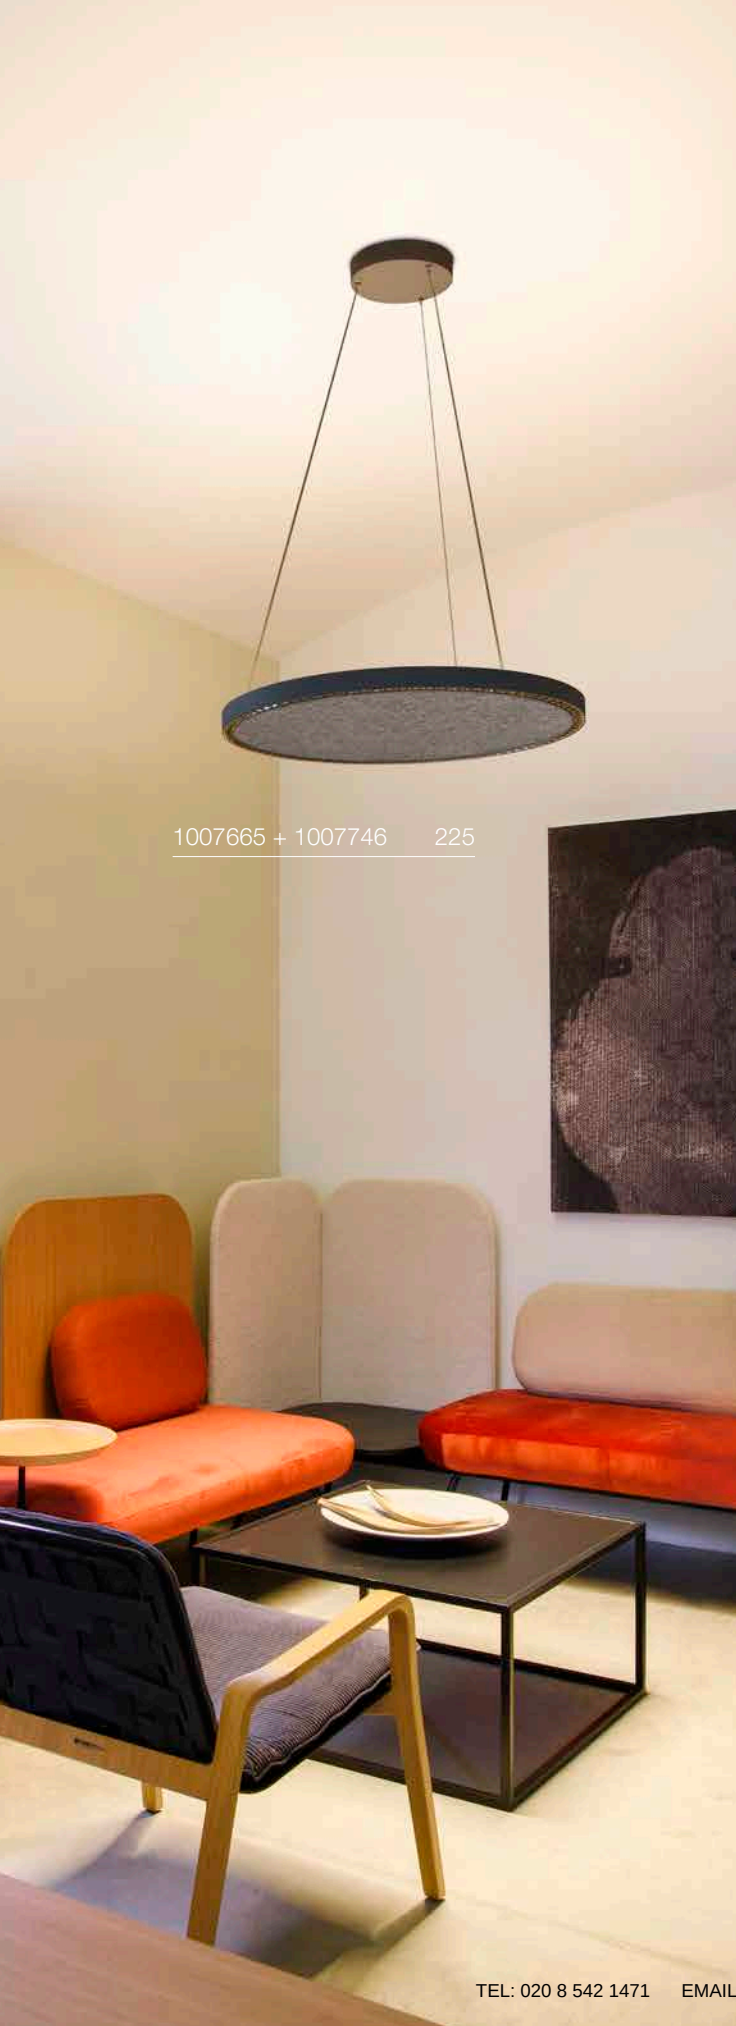

1007665 + 1007746 225

## ONE VERTICAL PD, PHASE

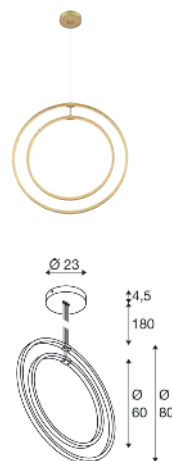

220-240 V ~50/60 Hz | 1050 mA  
Total wattage: 40 W  
Material: aluminium/steel



|         |         |
|---------|---------|
| 2700 K  | 3000 K  |
| 2400 lm | 2550 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008002   | 416.00 |
| ○ white | 1008003   | 416.00 |
| ● brass | 1008004   | 416.00 |






## ONE CUBE PD, DALI



220-240 V ~50/60 Hz | 1400 mA  
Total wattage: 54 W  
Material: aluminium/steel

## ONE CUBE UP/DOWN PD, DALI, UP/DOWN

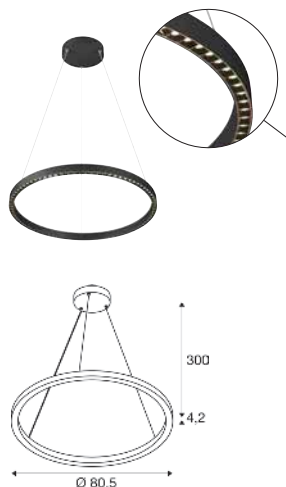

220-240 V ~50/60 Hz | 2100 mA  
Total wattage: 80 W  
Material: aluminium/steel

## ONE FELT PLATE, ACOUSTIC FELT, FOR ONE 80/ONE CUBE



Ø: 75.5 cm  
H: 3.8 cm

- Fits all One light rings with Ø 80 cm

| Variant | Prod. no.      | GBP          |
|---------|----------------|--------------|
| ● grey  | <b>1007746</b> | <b>96.00</b> |
| ● beige | <b>1007891</b> | <b>96.00</b> |



|                |         |
|----------------|---------|
| <b>1007661</b> | 3000 K  |
| <b>1007662</b> | 4000 lm |
| <b>1007663</b> | 4000 K  |
| <b>1007664</b> | 4300 lm |



|                |         |
|----------------|---------|
| Down           | 3000 K  |
| Down           | 4000 lm |
| <b>1007665</b> |         |
| <b>1007666</b> |         |
| Up             | 3000 K  |
| Up             | 2000 lm |
| Down           | 4000 K  |
| Down           | 4300 lm |
| <b>1007671</b> |         |
| <b>1007672</b> |         |
| Up             | 4000 K  |
| Up             | 2200 lm |

| Variant        | Prod. no.      | GBP           |
|----------------|----------------|---------------|
| ● black 3000 K | <b>1007661</b> | <b>540.00</b> |
| ● black 4000 K | <b>1007663</b> | <b>539.00</b> |
| ○ white 3000 K | <b>1007662</b> | <b>540.00</b> |
| ○ white 4000 K | <b>1007664</b> | <b>539.00</b> |

| Variant        | Prod. no.      | GBP           |
|----------------|----------------|---------------|
| ● black 3000 K | <b>1007665</b> | <b>604.00</b> |
| ● black 4000 K | <b>1007671</b> | <b>604.00</b> |
| ○ white 3000 K | <b>1007666</b> | <b>604.00</b> |
| ○ white 4000 K | <b>1007672</b> | <b>604.00</b> |


1005177 227





## ONE 60

PD, DALI



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 24 W  
Material: aluminium/steel



|         |         |
|---------|---------|
| 3000 K  | 4000 K  |
| 1480 lm | 1550 lm |

## ONE 60

PD, DALI, UP/DOWN



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 25 W  
Material: aluminium/steel




|      |        |        |
|------|--------|--------|
| Up   | 3000 K | 4000 K |
|      | 400 lm | 410 lm |
| Down | 3000 K | 4000 K |
|      | 400 lm | 410 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004761   | 459.00 |
| ○ white | 1004762   | 459.00 |

## ONE 60

PD, PHASE, UP/DOWN



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 24 W  
Material: aluminium/steel



|         |        |        |
|---------|--------|--------|
| Up      | 2700 K | 3000 K |
|         | 750 lm | 800 lm |
| 1005177 |        |        |
| Down    | 2700 K | 3000 K |
|         | 750 lm | 800 lm |
| Up      | 2700 K | 3000 K |
|         | 800 lm | 850 lm |
| 1004760 |        |        |
| Down    | 2700 K | 3000 K |
|         | 800 lm | 850 lm |
| Up      | 2700 K | 3000 K |
|         | 575 lm | 600 lm |
| 1004759 |        |        |
| Down    | 2700 K | 3000 K |
|         | 575 lm | 600 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004759   | 416.00 |
| ○ white | 1004760   | 416.00 |
| ● brass | 1005177   | 433.00 |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1002909   | 361.00 |
| ○ white | 1002910   | 361.00 |

1004763 229





## ONE 80

PD, DALI



220-240 V ~50/60 Hz | 800 mA  
Total wattage: 32 W  
Material: aluminium/steel




| 3000 K  | 4000 K  |
|---------|---------|
| 1930 lm | 2140 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1002911   | 403.00 |
| ○ white | 1002912   | 403.00 |

## ONE 80

PD, DALI, UP/DOWN

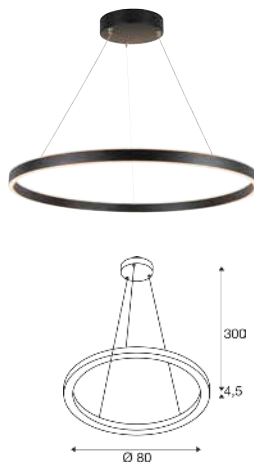

220-240 V ~50/60 Hz | 800 mA  
Total wattage: 34 W  
Material: aluminium/steel



| Up   | 3000 K | 4000 K |
|------|--------|--------|
|      | 615 lm | 635 lm |
| Down | 3000 K | 4000 K |
|      | 615 lm | 635 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004763   | 554.00 |
| ○ white | 1004764   | 554.00 |

## ONE

FELT PLATE, ACOUSTIC FELT,  
FOR ONE 80/ONE CUBE



Ø: 75.5 cm  
H: 3.8 cm

- Fits all One light rings with Ø 80 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● grey  | 1007746   | 96.00 |
| ● beige | 1007891   | 96.00 |




1005178 231





## ONE DOUBLE PD, DALI, UP/DOWN




220-240 V ~50/60 Hz | 1400 mA  
Total wattage: 55 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Up   | 3000 K  | 4000 K  |
|      | 1050 lm | 1060 lm |
| Down | 3000 K  | 4000 K  |
|      | 1050 lm | 1060 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004767   | 940.00 |
| ○ white | 1004768   | 940.00 |

## ONE DOUBLE PD, PHASE, UP/DOWN




220-240 V ~50/60 Hz | 900 mA  
Total wattage: 35 W  
Material: aluminium/steel



|      |        |        |
|------|--------|--------|
| Up   | 2700 K | 3000 K |
|      | 615 lm | 635 lm |
| Down | 2700 K | 3000 K |
|      | 615 lm | 635 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004765   | 697.00 |
| ○ white | 1004766   | 697.00 |
| ● brass | 1005178   | 728.00 |

## ONE TRIPLE PD, DALI



220-240 V ~50/60 Hz | 1700 mA  
Total wattage: 64 W  
Material: aluminium/steel



|  |         |         |
|--|---------|---------|
|  | 3000 K  | 4000 K  |
|  | 4040 lm | 4200 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1002913   | 966.00 |
| ○ white | 1002914   | 966.00 |




1006188 233





## ONE LINEAR 100



PD, PHASE, UP/DOWN



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 24 W  
Material: aluminium/steel

## ONE LINEAR 140

PD, PHASE, UP/DOWN



220-240 V ~50/60 Hz | 900 mA  
Total wattage: 35 W  
Material: aluminium/steel



|      |        |        |
|------|--------|--------|
| Up   | 2700 K | 3000 K |
|      | 550 lm | 580 lm |
| Down | 2700 K | 3000 K |
|      | 700 lm | 670 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1006185   | 268.00 |




|      |        |         |
|------|--------|---------|
| Up   | 2700 K | 3000 K  |
|      | 830 lm | 860 lm  |
| Down | 2700 K | 3000 K  |
|      | 980 lm | 1015 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1006188   | 316.00 |
| ○ white | 1006189   | 316.00 |
| ● brass | 1006190   | 333.00 |

# LINIUS 120

PD, PHASE, CANOPY

NEW

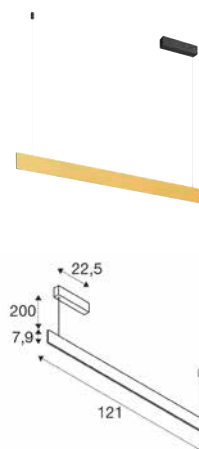

220-240 V ~50/60 Hz | 900 mA  
Total wattage: 34 W  
Material: aluminium/steel




|                    |      |                   |
|--------------------|------|-------------------|
| 1011934<br>1011935 | Up   | 2700 K<br>1350 lm |
|                    | Down | 2700 K<br>1650 lm |
| 1011936<br>1011937 | Up   | 3000 K<br>1400 lm |
|                    | Down | 3000 K<br>1700 lm |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● black<br>2700 K | 1011934 ● | 520.00 |
| ● black<br>3000 K | 1011936 ● | 520.00 |
| ● brass<br>2700 K | 1011935 ● | 546.00 |
| ● brass<br>3000 K | 1011937 ● | 546.00 |



## LINIUS 120

PD, PHASE, RECESSED

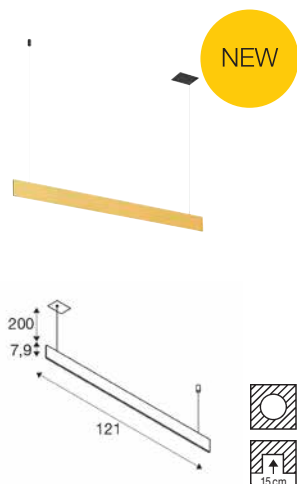

220-240 V ~50/60 Hz | 900 mA  
Total wattage: 34 W  
Material: aluminium/steel




|                    |      |         |
|--------------------|------|---------|
| 1011938<br>1011939 | Up   | 2700 K  |
|                    |      | 1350 lm |
|                    | Down | 2700 K  |
|                    |      | 1650 lm |

|                    |      |         |
|--------------------|------|---------|
| 1011940<br>1011941 | Up   | 3000 K  |
|                    |      | 1400 lm |
|                    | Down | 3000 K  |
|                    |      | 1700 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black 2700 K | 1011938   | 487.00 |
| ● black 3000 K | 1011940   | 487.00 |
| ● brass 2700 K | 1011939   | 512.00 |
| ● brass 3000 K | 1011941   | 512.00 |

## LINIUS 120

PD, DALI, CANOPY

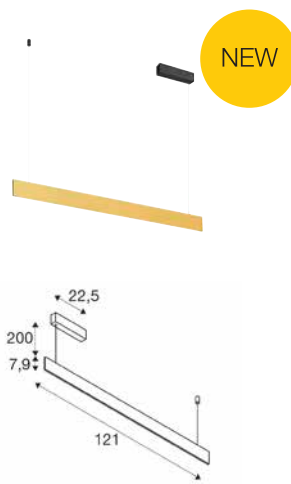

220-240 V ~0/50/60 Hz | 900 mA  
Total wattage: 34 W  
Material: aluminium/steel




|                    |      |         |
|--------------------|------|---------|
| 1011950<br>1011951 | Up   | 2700 K  |
|                    |      | 1350 lm |
|                    | Down | 2700 K  |
|                    |      | 1650 lm |

|                    |      |         |
|--------------------|------|---------|
| 1011952<br>1011953 | Up   | 3000 K  |
|                    |      | 1400 lm |
|                    | Down | 3000 K  |
|                    |      | 1700 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black 2700 K | 1011950   | 546.00 |
| ● black 3000 K | 1011952   | 546.00 |
| ● brass 2700 K | 1011951   | 571.00 |
| ● brass 3000 K | 1011953   | 571.00 |

## LINIUS 120

PD, DALI, RECESSED

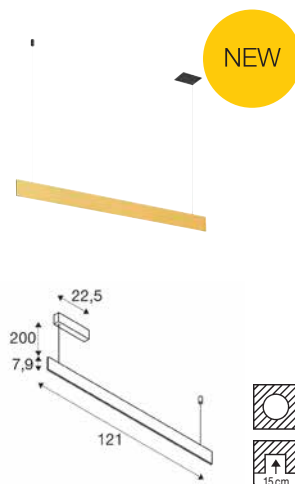

220-240 V ~0/50/60 Hz | 900 mA  
Total wattage: 34 W  
Material: aluminium/steel



|                    |      |         |
|--------------------|------|---------|
| 1011954<br>1011955 | Up   | 2700 K  |
|                    |      | 1350 lm |
|                    | Down | 2700 K  |
|                    |      | 1650 lm |

|                    |      |         |
|--------------------|------|---------|
| 1011956<br>1011957 | Up   | 3000 K  |
|                    |      | 1400 lm |
|                    | Down | 3000 K  |
|                    |      | 1700 lm |


| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black 2700 K | 1011954   | 520.00 |
| ● black 3000 K | 1011956   | 520.00 |
| ● brass 2700 K | 1011955   | 546.00 |
| ● brass 3000 K | 1011957   | 546.00 |



## LINIUS 150

PD, PHASE, CANOPY

NEW

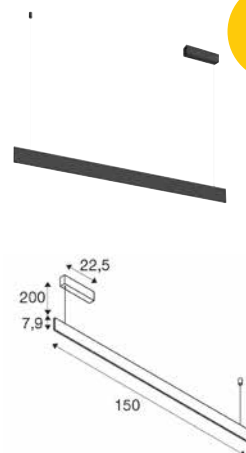

220-240 V ~50/60 Hz | 1050 mA

Total wattage: 40 W

Material: aluminium/steel




|                    |      |         |
|--------------------|------|---------|
| 1011938<br>1011939 | Up   | 2700 K  |
|                    |      | 1550 lm |
| 1011940<br>1011941 | Down | 2700 K  |
|                    |      | 1800 lm |
| 1011940<br>1011941 | Up   | 3000 K  |
|                    |      | 1600 lm |
| 1011940<br>1011941 | Down | 3000 K  |
|                    |      | 1850 lm |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● black<br>2700 K | 1011942 ● | 604.00 |
| ● black<br>3000 K | 1011944 ● | 604.00 |
| ● brass<br>2700 K | 1011943 ● | 646.00 |
| ● brass<br>3000 K | 1011945 ● | 646.00 |



## LINIUS 150


PD, PHASE, RECESSED

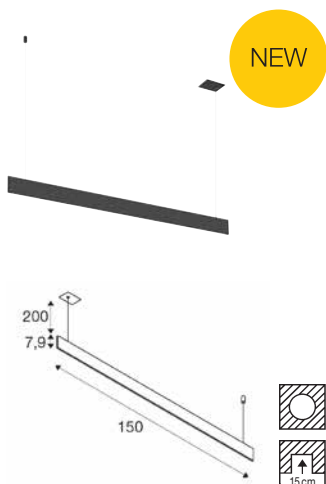

220-240 V ~50/60 Hz | 1050 mA  
Total wattage: 40 W  
Material: aluminium/steel

## LINIUS 150


PD, DALI, CANOPY

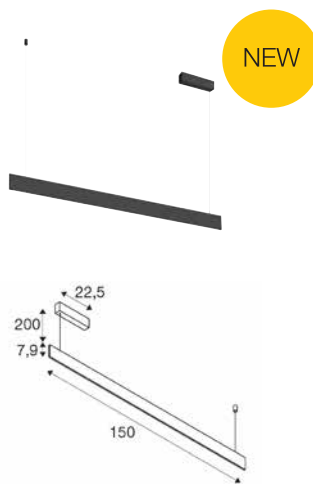

220-240 V ~0/50/60 Hz | 1050 mA  
Total wattage: 40 W  
Material: aluminium/steel

## LINIUS 150

PD, DALI, RECESSED

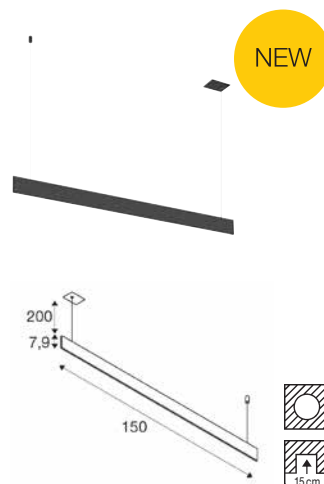

220-240 V ~0/50/60 Hz | 1050 mA  
Total wattage: 40 W  
Material: aluminium/steel



|         |         |
|---------|---------|
| Up      | 2700 K  |
| 1011946 | 1550 lm |
| 1011947 | 2700 K  |
| Down    | 1800 lm |

|         |         |
|---------|---------|
| Up      | 3000 K  |
| 1011948 | 1600 lm |
| 1011949 | 3000 K  |
| Down    | 1850 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black 2700 K | 1011946   | 588.00 |
| ● black 3000 K | 1011948   | 588.00 |
| ● brass 2700 K | 1011947   | 604.00 |
| ● brass 3000 K | 1011949   | 604.00 |



|         |         |
|---------|---------|
| Up      | 2700 K  |
| 1011958 | 1550 lm |
| 1011959 | 2700 K  |
| Down    | 1800 lm |

|         |         |
|---------|---------|
| Up      | 3000 K  |
| 1011960 | 1600 lm |
| 1011961 | 3000 K  |
| Down    | 1850 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black 2700 K | 1011958   | 630.00 |
| ● black 3000 K | 1011960   | 630.00 |
| ● brass 2700 K | 1011959   | 655.00 |
| ● brass 3000 K | 1011961   | 655.00 |



|         |         |
|---------|---------|
| Up      | 2700 K  |
| 1011962 | 1550 lm |
| 1011963 | 2700 K  |
| Down    | 1800 lm |

|         |         |
|---------|---------|
| Up      | 3000 K  |
| 1011964 | 1600 lm |
| 1011965 | 3000 K  |
| Down    | 1850 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black 2700 K | 1011962   | 604.00 |
| ● black 3000 K | 1011964   | 604.00 |
| ● brass 2700 K | 1011963   | 630.00 |
| ● brass 3000 K | 1011965   | 630.00 |

1007588 239








## PANTILO ROPE 19

PD, E27




220-240 V ~50/60 Hz  
Material: glass

- open cable end
- Matching accessories can be found on page 259

## PANTILO ROPE 20


PD, E27



220-240 V ~50/60 Hz  
Material: glass

## PANTILO ROPE 27

PD, E27



220-240 V ~50/60 Hz  
Material: glass



Base: 1xE27 max. Ø: 10 cm | L: 11 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● gold   | 1007597   | 172.00 |
| ○ silver | 1007596   | 172.00 |



Base: 1xE27 max. Ø: 10 cm | L: 18 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● gold   | 1007589   | 205.00 |
| ○ silver | 1007588   | 205.00 |



Base: 1xE27 max. Ø: 15 cm | L: 11 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● gold   | 1007599   | 222.00 |
| ○ silver | 1007598   | 222.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP

## PANTILO OVAL

PD, E27



220-240 V ~50/60 Hz  
Material: glass

- open cable end
- Matching accessories can be found on page 259



Base: 1xE27

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ○ white  | 1006402   | 134.00 |
| ● gold   | 1006403   | 151.00 |
| ● chrome | 1006398   | 151.00 |
| ● copper | 1006400   | 151.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP

## PANTILO 20

PD, E27



220-240 V ~50/60 Hz  
Material: glass

- open cable end
- Matching accessories can be found on page 259



Base: 1xE27

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ○ white  | 1006396   | 134.00 |
| ● gold   | 1006395   | 151.00 |
| ● chrome | 1003004   | 151.00 |
| ● copper | 1003005   | 151.00 |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F



Prod. no. 1005265 23.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP

## PANTILO 28

PD, E27



220-240 V ~50/60 Hz  
Material: glass

- open cable end
- Matching accessories can be found on page 259



Base: 1xE27

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ○ white  | 1006399   | 163.00 |
| ● gold   | 1006397   | 184.00 |
| ● chrome | 1003006   | 184.00 |
| ● copper | 1003007   | 184.00 |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F



Prod. no. 1005265 23.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F




Prod. no. 1012471 14.00 GBP



## PANTILO CONVEX 29

PD, E27



220-240 V ~50/60 Hz  
Material: glass

- open cable end
- Matching accessories can be found on page 259



Base: E27 max. Ø: 10 cm | L: 20 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ○ white  | 1007881   | 197.00 |
| ● gold   | 1007880   | 214.00 |
| ● chrome | 1003443   | 214.00 |
| ● copper | 1007879   | 214.00 |



E27 | 6 W | 330°  
570 lm | 2200 K | EEC = F



Prod. no. 1008152 55.00 GBP

## PANTILO CONVEX 40

PD, E27



220-240 V ~50/60 Hz  
Material: glass



Base: E27 max. Ø: 15 cm | L: 30 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ○ white  | 1007878   | 294.00 |
| ● gold   | 1007877   | 315.00 |
| ● chrome | 1003444   | 306.00 |
| ● copper | 1007876   | 315.00 |



E27 | 6 W | 330°  
570 lm | 2200 K | EEC = F



Prod. no. 1008152 55.00 GBP


1008178 + 1008192 243





## LIGHT EYE® 90


PD, QPAR51



220-240 V ~50/60 Hz  
Material: steel

## LIGHT EYE® 150

PD, QPAR111



220-240 V ~50/60 Hz  
Material: steel

## LIGHT EYE® 90

DECORATIVE RING Ø 5.7 CM



Ø: 5.9 cm  
H: 1.4 cm  
Material: steel

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1008186   | 8.00  |
| ○ white  | 1008187   | 8.00  |
| ● gold   | 1008188   | 13.00 |
| ● chrome | 151049    | 13.00 |



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.35 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008172   | 73.00 |
| ○ white | 1008173   | 73.00 |



Base: 1xGU10 max. Ø: 11.1 cm | L: 7 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008178   | 113.00 |
| ○ white | 1008179   | 113.00 |

## LIGHT EYE® 150

DECORATIVE RING Ø 13.6 CM



Ø: 13.6 cm  
H: 2.3 cm  
Material: steel



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no. 1005079 7.00 GBP



GU10 | 12 W | 55°  
680 lm | 3000 K | EEC = G



Prod. no. 1005298 73.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F




Prod. no. 1012469 23.00 GBP

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1008189   | 31.00 |
| ○ white  | 1008190   | 31.00 |
| ● gold   | 1008192   | 39.00 |
| ● chrome | 1008191   | 39.00 |

1011929 244

## ENOLA® 2.0 S PD, SINGLE, GU10 MINI, PAR11

NEW



220-240 V ~50/60 Hz

Material: aluminium/steel/plastic PC

SOCKET  
INSIDE



Base: 1xGU10 max. Ø: 3.6 cm | L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011929   | 52.00 |
| ○ white | 1011930   | 52.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no. 1011670 10.00 GBP




| Product                       | Prod. no. | GBP   |
|-------------------------------|-----------|-------|
| Fitu   Single ceiling rosette |           |       |
| ○ white                       | 1004745   | 31.00 |
| ENOLA® 2.0 S, decorative ring |           |       |
| ● black                       | 1011753   | 4.00  |
| ○ white                       | 1011754   | 4.00  |
| ● gold                        | 1011755   | 4.00  |
| ● copper                      | 1011756   | 4.00  |



## ENOLA® 2.0 M


PD, SINGLE, GU10, QPAR51

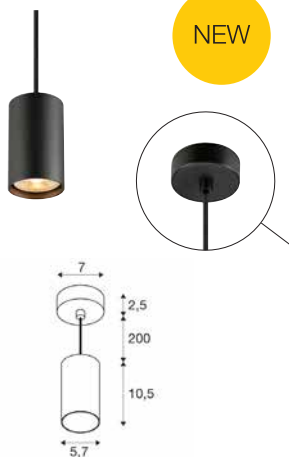

220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC

## ENOLA® 2.0 M

PD, SIX. LONG, GU10, QPAR51

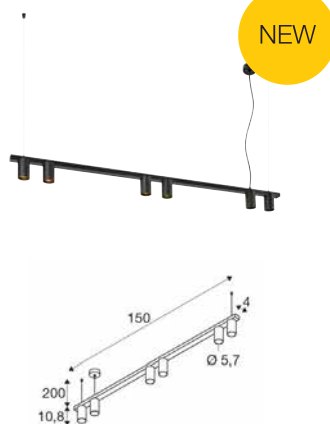

220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC

## ENOLA® 2.0 S

DECORATIVE RING



Ø: 3.9 cm  
H: 1.1 cm  
Material: plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011753   | 4.00 |
| ○ white  | 1011754   | 4.00 |
| ● gold   | 1011755   | 4.00 |
| ● copper | 1011756   | 4.00 |



Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011909   | 60.00 |
| ○ white | 1011910   | 60.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



Base: 6xGU10 max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011907   | 310.00 |
| ○ white | 1011908   | 310.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP

## ENOLA® 2.0/BIMA 2.0 M

DECORATIVE RING



Ø: 5.4 cm  
H: 2 cm  
Material: plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011749   | 4.00 |
| ○ white  | 1011750   | 4.00 |
| ● gold   | 1011751   | 4.00 |
| ● copper | 1011752   | 4.00 |



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP



| Product                                | Prod. no. | GBP   |
|----------------------------------------|-----------|-------|
| Fitu   Single ceiling rosette          |           |       |
| ○ white                                | 1004745   | 31.00 |
| ENOLA® 2.0/BIMA 2.0 M, decorative ring |           |       |
| ● black                                | 1011749   | 4.00  |
| ○ white                                | 1011750   | 4.00  |
| ● gold                                 | 1011751   | 4.00  |
| ● copper                               | 1011752   | 4.00  |



| Product                                | Prod. no. | GBP   |
|----------------------------------------|-----------|-------|
| Fitu   Single ceiling rosette          |           |       |
| ○ white                                | 1004745   | 31.00 |
| ENOLA® 2.0/BIMA 2.0 M, decorative ring |           |       |
| ● black                                | 1011749   | 4.00  |
| ○ white                                | 1011750   | 4.00  |
| ● gold                                 | 1011751   | 4.00  |
| ● copper                               | 1011752   | 4.00  |



1006438

247





## ASTO TUBE

PD, GU 10



220-240 V ~50/60 Hz

Material: aluminium

- Decorative rings available as accessories



Base: 1-4xGU10



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no. 1012469 23.00 GBP

## ASTO TUBE


PD, SINGLE, GU 10



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006431   | 52.00 |
| ○ white | 1006432   | 52.00 |

## ASTO TUBE

PD, DOUBLE, GU 10



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006433   | 96.00 |
| ○ white | 1006434   | 96.00 |

## ASTO TUBE

DECORATIVE REFLECTOR




Ø: 6.8 cm

H: 4 cm

Material: polycarbonate (PC)

## ASTO TUBE



PD, TRIPLE, GU 10



| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1006435   | 138.00 |
| ○ white | 1006436   | 138.00 |

## ASTO TUBE

PD, QUADRUPLE, GU 10



| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1006437   | 168.00 |
| ○ white | 1006438   | 168.00 |


| Variant        | Prod. no. | GBP  |
|----------------|-----------|------|
| ● black/chrome | 1007190   | 4.00 |
| ● gold         | 1006450   | 4.00 |
| ● chrome       | 1006449   | 4.00 |
| ● copper       | 1006451   | 4.00 |



# GLENOS® 2.0

PD, 1,2 M, DALI, UGR19

NEW



200-240 V ~0/50/60 Hz | 1050 mA  
Total wattage: 38 W  
Material: aluminium




|         |      |                   |
|---------|------|-------------------|
| 1012154 | Down | 3000 K<br>2050 lm |
|         | Up   | 3000 K<br>3900 lm |
| 1012155 | Down | 3000 K<br>1800 lm |
|         | Up   | 3000 K<br>3850 lm |
| 1012156 | Down | 4000 K<br>2100 lm |
|         | Up   | 4000 K<br>4150 lm |
| 1012157 | Down | 4000 K<br>1850 lm |
|         | Up   | 4000 K<br>3950 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black 3000 K | 1012155   | 302.00 |
| ● black 4000 K | 1012157   | 302.00 |
| ○ white 3000 K | 1012154   | 302.00 |
| ○ white 4000 K | 1012156   | 302.00 |



## GLENOS® 2.0

PD, 1,5 M, DALI, UGR19

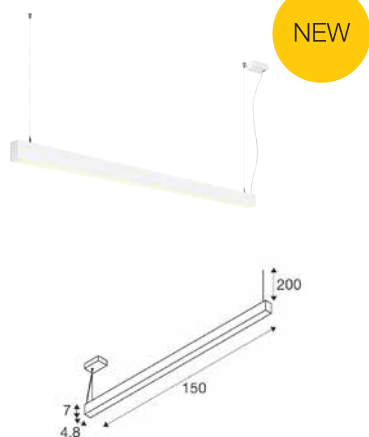

200-240 V ~0/50/60 Hz | 1250 mA  
Total wattage: 46 W  
Material: aluminium

## GLENOS® PRO

PD, 1,2 M, DALI, UGR16



220-240 V ~0/50/60 Hz | 1600 mA  
Total wattage: 60 W  
Material: Aluminium/Plastic PC

## GLENOS® PRO

PD, 1,5M, DALI, UGR16



220-240 V ~0/50/60 Hz | 1850 mA  
Total wattage: 70 W  
Material: Aluminium/Plastic PC



|         |      |                  |
|---------|------|------------------|
| 1012158 | Down | 3000K<br>2700 lm |
|         | Up   | 3000K<br>4800 lm |
| 1012159 | Down | 3000K<br>2350 lm |
|         | Up   | 3000K<br>4350 lm |
| 1012160 | Down | 4000K<br>2800 lm |
|         | Up   | 4000K<br>4850 lm |
| 1012161 | Down | 4000K<br>2400 lm |
|         | Up   | 4000K<br>4800 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black 3000 K | 1012159   | 344.00 |
| ● black 4000 K | 1012161   | 344.00 |
| ○ white 3000 K | 1012158   | 344.00 |
| ○ white 4000 K | 1012160   | 344.00 |



|                    |      |                  |
|--------------------|------|------------------|
| 1010509<br>1010510 | Down | 3000K<br>3200 lm |
|                    | Up   | 3000K<br>4300 lm |
| 1010511<br>1010512 | Down | 4000K<br>3400 lm |
|                    | Up   | 4000K<br>4400 lm |

| Variant              | Prod. no. | GBP    |
|----------------------|-----------|--------|
| ● black 3000 K       | 1010510   | 399.00 |
| ● black 4000 K       | 1010512   | 399.00 |
| ○ white/black 3000 K | 1010509   | 399.00 |
| ○ white/black 4000 K | 1010511   | 399.00 |



|                    |      |                  |
|--------------------|------|------------------|
| 1010513<br>1010514 | Down | 3000K<br>3600 lm |
|                    | Up   | 3000K<br>4900 lm |
| 1010515<br>1010516 | Down | 4000K<br>3850 lm |
|                    | Up   | 4000K<br>5550 lm |

| Variant              | Prod. no. | GBP    |
|----------------------|-----------|--------|
| ● black 3000 K       | 1010514   | 436.00 |
| ● black 4000 K       | 1010516   | 436.00 |
| ○ white/black 3000 K | 1010513   | 436.00 |
| ○ white/black 4000 K | 1010515   | 436.00 |

1006345 251



## WORKLIGHT PRO 120

PD, DALI



220-240 V ~50/60 Hz | 1200 mA  
Total wattage: 50 W  
Material: aluminium/steel

## WORKLIGHT PRO 150


PD, DALI



220-240 V ~50/60 Hz | 1400 mA  
Total wattage: 59 W  
Material: aluminium/steel

## WORKLIGHT

PD, DALI

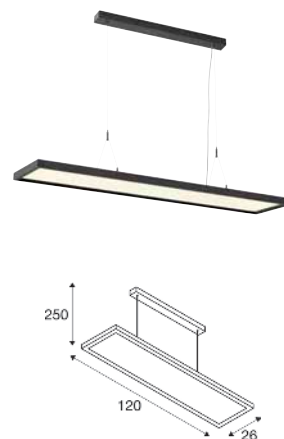

220-240 V ~50/60 Hz | 1550 mA  
Total wattage: 57 W  
Material: aluminium

• Safety plug



|      |         |
|------|---------|
| Down | 4000 K  |
|      | 3300 lm |
| Up   | 4000 K  |
|      | 2800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007468   | 436.00 |
| ○ white | 1007469   | 436.00 |
| ● grey  | 1007470   | 436.00 |



|      |         |
|------|---------|
| Down | 4000 K  |
|      | 3900 lm |
| Up   | 4000 K  |
|      | 3300 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007471   | 520.00 |
| ○ white | 1007472   | 520.00 |
| ● grey  | 1007473   | 520.00 |



|      |         |
|------|---------|
| Down | 4000 K  |
|      | 3000 lm |
| Up   | 4000 K  |
|      | 2000 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1005395   | 407.00 |
| ○ white | 1005396   | 407.00 |
| ● grey  | 1006345   | 407.00 |



1010429 253









PANEL 60

PD, ROUND, PHASE

PANEL 60

PD, ROUND, DALI

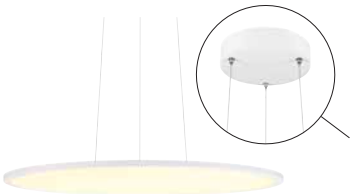

220-240 V ~50/60 Hz | 750 mA  
Total wattage: 29 W  
Material: aluminium/steel

220-240 V ~50/60 Hz | 750 mA  
Total wattage: 29 W  
Material: aluminium/steel



|         |         |
|---------|---------|
| 3000 K  | 4000 K  |
| 3050 lm | 3300 lm |

|         |         |
|---------|---------|
| 3000 K  | 4000 K  |
| 3050 lm | 3300 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1010426   | 273.00 |
| ● grey  | 1010427   | 273.00 |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1010428   | 281.00 |
| ● grey  | 1010429   | 281.00 |


1009014 + 1010408 255





## GRIP! FLAT

PD, PHASE



220-240 V ~50/60 Hz | 500 mA

Total wattage: 16 W

- Including colour temperature switch 2700K/3000K
- Honeycomb included



Down

| 2700 K | 3000 K |
|--------|--------|
| 400 lm | 430 lm |


| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black/gold  | 1009014   | 247.00 |
| ● white/black | 1009015   | 247.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| GRIP! FLAT, decorative ring |           |       |
| ● black                     | 1009102   | 28.00 |
| ○ white                     | 1009103   | 28.00 |
| ● gold                      | 1009104   | 28.00 |

## GRIP! FLAT

FELT SHADE Ø 50 CM X 6.2 CM




Ø: 50 cm  
H: 6.2 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010403   | 121.00 |
| ● grey       | 1010404   | 121.00 |
| ● ochre      | 1010405   | 121.00 |

## GRIP! FLAT

FELT SHADE Ø 50 CM X 0.6 CM



Ø: 50 cm  
H: 0.6 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1010406   | 88.00 |
| ● grey       | 1010407   | 88.00 |
| ● ochre      | 1010408   | 88.00 |

1008617 257







## OCULUS

PD, SINGLE, PHASE

## OCULUS

PD, DTW, PVD



220-240 V ~50/60 Hz | 250 mA

Total wattage: 11 W

Material: aluminium

220-240 V ~50/60 Hz | 250 mA

Total wattage: 11 W

Material: aluminium

- Additional frosted lens included
- Matching accessories can be found on page 259
- open cable end



Down

2000 K - 3000 K  
36 lm - 780 lm

Down

2000 K - 3000 K  
36 lm - 780 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004672   | 180.00 |
| ○ white | 1004673   | 180.00 |

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● brass       | 1008616   | 256.00 |
| ● dark bronze | 1008615   | 256.00 |
| ● dark copper | 1008617   | 256.00 |

# FITU

PD, E27




220-240 V ~50/60 Hz  
Material: aluminium

- Textile cable
- Matching accessories can be found on page 259
- open cable end



Base: 1xE27

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 132690    | 52.00 |
| ○ white | 132691    | 52.00 |



Prod. no. 1005303 9.00 GBP




E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

# FITU

PD, E27 STONE




220-240 V ~50/60 Hz  
Material: stone

- open cable end



Base: 1xE27


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1010417   | 73.00 |
| ● grey  | 1010419   | 73.00 |
| ● beige | 1010418   | 73.00 |



Prod. no. 1008163 72.00 GBP

# FITU

PD, E27 RIBBED




220-240 V ~50/60 Hz  
Material: aluminium

- open cable end



Base: 1xE27

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1010420   | 52.00 |
| ● gold  | 1010421   | 52.00 |



Prod. no. 1008645 6.00 GBP





**Fitu | Single ceiling rosette**

16A max.  
H: 3.9 cm  
Material: steel  
Strain relief included



| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 132600    | 23.00 |
| ○ white  | 132601    | 23.00 |
| ● gold   | 1002163   | 26.00 |
| ● chrome | 132605    | 26.00 |

**Fitu | triple ceiling rose**

16A max.  
H: 5.4 cm  
Material: steel  
Strain relief included



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 132610    | 55.00 |
| ○ white | 132611    | 55.00 |

**FITU | Surface-mounted ceiling rosette**

16A max.  
H: 2.6 cm  
Ø: 9 cm  
Material: steel



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1004744   | 31.00 |
| ○ white | 1004745   | 31.00 |
| ● gold  | 1006377   | 33.00 |

**FITU | Recessed ceiling rosette**

16A max.  
H: 3.3 cm  
Material: steel/polyamide  
66 (PA)



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1004674   | 21.00 |
| ○ white | 1004675   | 21.00 |
| ● gold  | 1006378   | 24.00 |

**FITU | Ceiling hook**

L: 4.6 cm  
Material: aluminium



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 132670    | 17.00 |
| ○ white | 132671    | 17.00 |

**1-phase light adapter**

6A max.  
H: 3.2 cm  
L: 8.5 cm  
W: 3.5 cm  
Material: polycarbonate (PC)



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 143120    | 14.00 |
| ○ white | 143121    | 14.00 |
| ● grey  | 143124    | 14.00 |

**3-phase light adapter**

10A max.  
H: 4.5 cm  
L: 9.6 cm  
W: 3.5 cm  
Material: plastic



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 145990    | 18.00 |
| ○ white | 1001542   | 18.00 |
| ● grey  | 145994    | 18.00 |

**FITU | Cable clamp**


L: 3.1 cm  
Material: aluminium



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 132680    | 11.00 |
| ○ white | 132681    | 11.00 |

132661 + 1000579 260 + 261

## FENDA PD, E27



220-240 V ~50/60 Hz  
Material: steel/plastic

- Matching accessories can be found on page 259
- open cable end



Base: 1xE27

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 132660    | 26.00 |
| ○ white | 132661    | 26.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



## FENDA 30 CM, ROUND



Ø: 30 cm  
H: 20 cm  
Material: textile/steel

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/copper | 155592    | 62.00 |
| ○ white        | 155582    | 47.00 |
| ● grey         | 1004774   | 47.00 |
| ● beige        | 155583    | 47.00 |

## FENDA Ø 45 CM, ROUND



Ø: 45.5 cm  
H: 28 cm  
Material: textile/steel

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/copper | 156122    | 77.00 |
| ○ white        | 156111    | 73.00 |
| ● grey         | 1004775   | 73.00 |
| ● beige        | 156113    | 73.00 |



| Product                                  | Prod. no. | GBP   |
|------------------------------------------|-----------|-------|
| Acrylic glass cover, for FENDA Ø 45.5 cm |           |       |
| ○ white                                  | 156100    | 39.00 |

## FENDA Ø 70 CM, ROUND



Ø: 70 cm  
H: 36 cm  
Material: textile/steel

• Not suitable for Fenda Bow

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/copper | 1000580   | 113.00 |
| ○ white        | 1000579   | 100.00 |



| Product                                | Prod. no. | GBP   |
|----------------------------------------|-----------|-------|
| Acrylic glass cover, for FENDA Ø 70 cm |           |       |
| ○ white                                | 1000957   | 82.00 |

## FENDA GLASS SHADE 12.5 CM, ROUND



Ø: 12.5 cm  
H: 20 cm  
Material: glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● brown | 1000773   | 57.00 |

# MIX & MATCH

## FENDA & FITU

---

The modular components of the FENDA and FITU ranges can be combined flexibly to create a wide variety of configurations. A wide selection of shades and bases enables bespoke lighting solutions for a broad range of applications.

### FENDA TL

● 155780



### FENDA FL

● 155790





### FENDA TL

● 155540




### FENDA FL

● 155490




### FENDA Ø15

● 156152  
○ 156141  
● 156143



### FENDA Ø30

● 155592  
○ 155582  
● 155583  
● 1004774



### FENDA Ø45

● 156122  
○ 156111  
● 156113  
● 1004775

All SLV Mix & Match products are identified by the corresponding symbol.



**FENDA PD**

- 132660
- 132661



**FENDA CL**

- 155550
- 155551



**FITU CRANE BASE**

- 1004682



**FITU PD**

- 132690
- 132691




*Stone*

- 1010417
- 1010418
- 1010419

*Metal*

- 1010420
- 1010421



**FENDA Ø70**

- 1000580
- 1000579



**FENDA Ø12,5**


- Glass Shade*
- 1000773



1008130 265

## HELIA 30

PD, PHASE

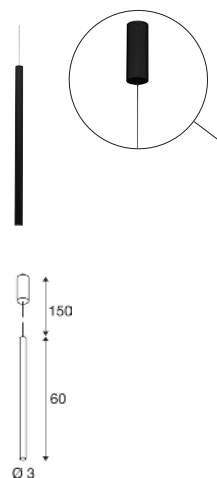

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.2 W  
Material: aluminium



3000 K  
590 lm


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 152360    | 193.00 |





## HELIA 40

PD, PHASE

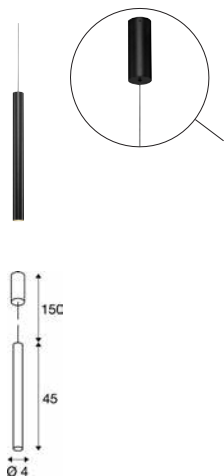

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 10 W  
Material: aluminium




3000 K  
730 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 152370    | 218.00 |

## PARA CONE 20

PD, E27

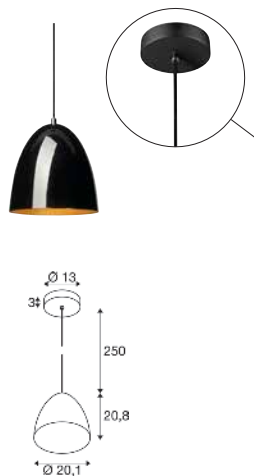

220-240 V ~50/60 Hz  
Material: aluminium/steel



Base: 1xE27

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1008129   | 100.00 |
| ● copper/white | 1008130   | 142.00 |




E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP

## PARA CONE 30

PD, E27

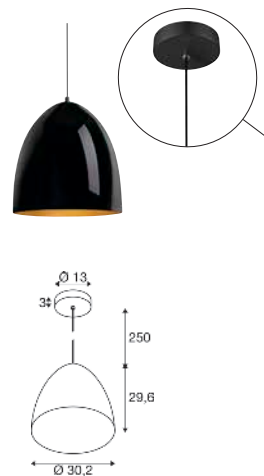

220-240 V ~50/60 Hz  
Material: aluminium/steel



Base: 1xE27

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1008131   | 172.00 |
| ● copper/white | 1008132   | 193.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP


1002950 + 1002949 + 1002951 267





## PHELIA 10

PD, E27



220-240 V ~50/60 Hz  
Material: aluminium

- Textile cable



Base: 1xE27

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1002951   | 113.00 |



E27 | 8 W | 180°  
720 lm | 2700 K | EEC = F



Prod. no. 1005305 17.00 GBP




E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP

## PHELIA 25

PD, E27



220-240 V ~50/60 Hz  
Material: aluminium

- Textile cable



Base: 1xE27

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1002949   | 138.00 |



E27 | 8 W | 180°  
720 lm | 2700 K | EEC = F



Prod. no. 1005305 17.00 GBP




E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP

## PHELIA 30

PD, E27



220-240 V ~50/60 Hz  
Material: aluminium

- Textile cable



Base: 1xE27

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1002950   | 163.00 |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F



Prod. no. 1005265 23.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F




Prod. no. 1012471 14.00 GBP



1008537 269

## FORCHINI 50

PD, E27



220-240 V ~50/60 Hz  
Material: GRP



Base: 1xE27

L: 20 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1008535   | 197.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F




Prod. no. 1005303 9.00 GBP



## FORCHINI 70

PD, E27



220-240 V ~50/60 Hz  
Material: GRP



Base: 1xE27 | L: 20 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1008538   | 352.00 |




E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005268 11.00 GBP

## FORCHINI M 40

PD, E27



220-240 V ~50/60 Hz  
Material: Steel/Aluminium



Base: 1xE27 | L: 15.2 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1008536   | 197.00 |




E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005268 11.00 GBP

## FORCHINI M 50

PD, E27



220-240 V ~50/60 Hz  
Material: Steel/Aluminium



Base: 1xE27 | L: 18 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1008537   | 218.00 |



E27 | 8 W | 330°  
400 lm | 1900 K |



Prod. no. 1008159 77.00 GBP








## ROTOBALL 25


PD, E27

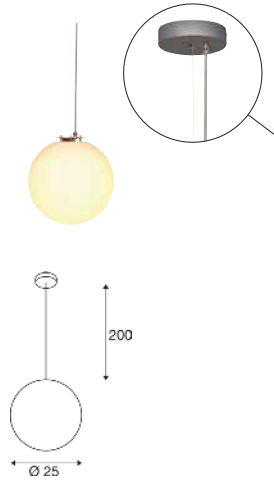

220-240 V ~50/60 Hz  
Material: Steel/Polyethylene (PE)

## ROTOBALL 40


PD, E27

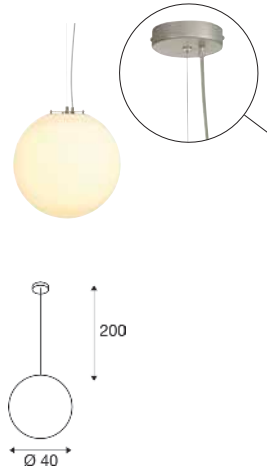

220-240 V ~50/60 Hz  
Material: Steel/Polyethylene (PE)

## ROTOBALL 50

PD, E27

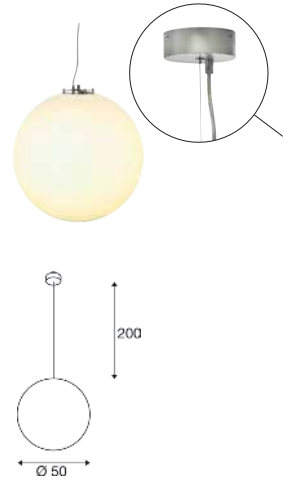

220-240 V ~50/60 Hz  
Material: Steel/Polyethylene (PE)



Base: 1xE27 max. Ø: 7 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 165390    | 138.00 |



Base: 1xE27 max. Ø: 9.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 165410    | 155.00 |



Base: 1xE27 max. Ø: 9.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 165400    | 193.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



E27 | 13 W | 220°  
1300 lm | 2700 K | EEC = F



Prod. no. 1005302 11.00 GBP



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no. 1012471 14.00 GBP






1005216 273



## PARA DOME

PD, E27



220-240 V ~50/60 Hz  
Material: aluminium

- open cable end



Base: 1xE27

max. Ø: 7 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1005214   | 71.00 |
| ● grey  | 1005215   | 71.00 |



E27 | 11 W | 330°  
1250 lm | 2700 K | EEC = E



Prod. no. 1008162 72.00 GBP



| Product                       | Prod. no. | GBP   |
|-------------------------------|-----------|-------|
| Fitu   Single ceiling rosette |           |       |
| ● chrome                      | 132605    | 26.00 |
| 1-phase light adapter         |           |       |
| ● grey                        | 143124    | 14.00 |
| 3-phase light adapter         |           |       |
| ● grey                        | 145994    | 18.00 |
| Ceiling rosette               |           |       |
| ● grey                        | 210064    | 28.00 |
| Recessed ceiling rosette      |           |       |
| ● chrome                      | 1004676   | 24.00 |
| PARA DOME   Shade             |           |       |
| ● black                       | 1005216   | 88.00 |
| ● grey                        | 1005217   | 88.00 |
| ○ transparent                 | 1005218   | 88.00 |
| PARA DOME, Shade              |           |       |
| ● black/gold                  | 1006410   | 88.00 |

## PARA DOME

SHADE




Ø: 30.8 cm  
H: 20.6 cm  
Material: aluminium

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black/gold | 1006410   | 88.00 |
| ● black      | 1005216   | 88.00 |
| ● grey       | 1005217   | 88.00 |

## PARA 380

PD, E27



220-240 V ~50/60 Hz  
Material: aluminium



Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 165359    | 142.00 |



E27 | 13 W | 220°  
1300 lm | 2700 K | EEC = F



Prod. no. 1005302 11.00 GBP



Ø: 31.5 cm  
H: 20 cm  
Material: polycarbonate (PC)

| Variant       | Prod. no. | GBP   |
|---------------|-----------|-------|
| ○ transparent | 1005218   | 88.00 |

1005286 287



# INDOOR | WALL AND CEILING LIGHTS





LED  
OCULUS |



SECKET  
PLASTRA | 338-339



LED  
PLASTRA | 340



SECKET  
PLASTRA | 340



SECKET  
PLASTRA 101 | 341




SECKET  
PLASTRA | 341



SECKET  
PLASTRA 104 | 341



SECKET  
WUD | 343



LED  
LOGS IN | 344-345



LED  
QUAD FRAME | 346



LED  
SECKET  
WL 149 | 347



LED  
SHELL 30 | 347



LED  
ASSO 300 | 348-349



SECKET  
OSSA7 349



LED  
CARISO | 351



LED  
CHROMBO | 351



LED  
DIRETO 60 | 353



SECKET  
DENA 30 | 353



SECKET  
BASKET | 353



FITU | 354



SECKET  
THEO UP/DOWN | 354



SECKET  
SOLID CUBE | 354



SECKET  
FENDA | 355



LED  
SECKET  
KENKUJA SPOT | 355



LED  
SECKET  
COUPA | 356



LED  
KARPO MAGN | 356



LED  
KARPO GOOSE | 356



LED  
KARPO 30 | 357



LED  
KARPO | 357



LED  
SOMNILA SPOT | 358



LED  
SOMNILA FLEX |  
358-359



LED  
SECKET  
DIO FLEX PLATE | 359



SECKET  
PHELIA | 361



LED  
MERADO FLOOD | 361



SECKET  
DISPLAY ADL 50 | 361



SECKET  
PURI 2.0 TUBE | 362-363



PURI 2.0 CONE | 364–365



PURI 2.0 DOME | 366–367



NOBLO® | 371–373



KALU 2.0 | 374



PANTILO ROPE | 375



NEW



MOTUNA | 375



CYFT | 376–379



ASTO TUBE | 381



KALU | 383



KALU | 383



ALTRA DICE | 385



SPOT 79 | 385



SENSOR 2.0 | 386–389



NEW



LIPSY® 2.0 | 390–393



SIMA | 394



MELAN | 395




BATTEN | 395







## QUIMERA WL, PHASE




220-240 V ~50/60 Hz | 700 mA  
Total wattage: 8.5 W  
Material: aluminium



|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 330 lm | 350 lm |

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● brass       | 1008036   | 310.00 |
| ● dark bronze | 1008035   | 310.00 |
| ● dark copper | 1008037   | 310.00 |

## LYGANT WL, SINGLE




220-240 V ~50/60 Hz | 700 mA  
Total wattage: 8 W  
Material: aluminium



|        |
|--------|
| 3000 K |
| 560 lm |

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● black  | 1007614   | 218.00 |
| ● brass  | 1007612   | 243.00 |
| ● chrome | 1007615   | 243.00 |

## LYGANT WL, DOUBLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: aluminium



|        |
|--------|
| 3000 K |
| 800 lm |

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● black  | 1007618   | 310.00 |
| ● brass  | 1007616   | 336.00 |
| ● chrome | 1007619   | 336.00 |




1010194 281





## SUN MIRROR WL, QUAD




220-240 V ~50/60 Hz | 600 mA  
Total wattage: 18 W  
Material: steel



| 2700 K  | 3000 K  | 4000 K  |
|---------|---------|---------|
| 1200 lm | 1300 lm | 1400 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010193   | 239.00 |

## SUN MIRROR WL, TRIPLE



220-240 V ~50/60 Hz | 450 mA  
Total wattage: 13 W  
Material: steel



| 2700 K | 3000 K | 4000 K  |
|--------|--------|---------|
| 900 lm | 950 lm | 1000 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010194   | 205.00 |

# MIX & MATCH VARYT

---

The modular components of the VARYT range can be combined flexibly to create a wide variety of configurations.

A wide selection of lampshades and light bases enables bespoke lighting solutions for a broad range of applications.

## VARYT PD

- 1008114
- 1008115
- 1008117
- 1008116
- 1008118

## VARYT CL


- 1008099
- 1008100
- 1008102
- 1008101
- 1008103

## VARYT WL

- 1008104
- 1008105
- 1008107
- 1008106
- 1008108


## VARYT TL

- 1008109
- 1008110
- 1008112
- 1008111
- 1008113




## VARYT KUGEL Ø12

- 1008119







## VARYT LINIE Ø12

- 1007859



## VARYT PLISSEE Ø11.5

- 1007860

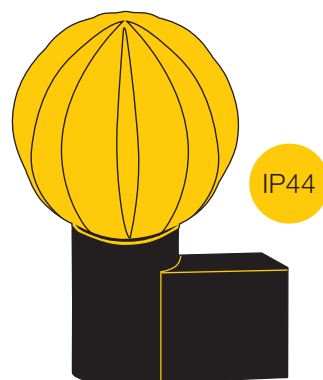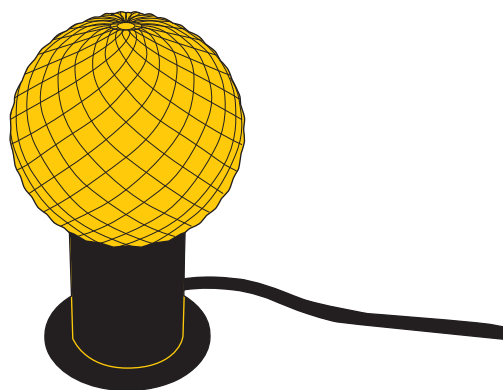

## VARYT DIAMONT Ø11

- 1007858
- 1008023

All SLV Mix & Match products are identified by the corresponding symbol.


> **MIX**  
match







## VARYT WL, E14



220-240 V ~50/60 Hz  
Material: steel

- IP44 in combination with one of the shades



Base: 1 x E14 max. Ø: 11 cm | L: 3.8 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● black  | 1008104   | 78.00  |
| ○ white  | 1008105   | 78.00  |
| ● brass  | 1008107   | 105.00 |
| ● chrome | 1008106   | 88.00  |
| ● copper | 1008108   | 105.00 |



E14 | 4 W | 320°  
380 lm | 2700 K | EEC = F



Prod. no.: 1005284 6.00 GBP

## VARYT KUGEL GLASS SHADE



Ø: 12 cm  
H: 12.8 cm  
Material: glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008119   | 52.00 |

## VARYT DIAMANT GLASS SHADE



Ø: 12 cm  
H: 12.7 cm  
Material: glass

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● smoky grey | 1007858   | 69.00 |
| ● amber      | 1008023   | 69.00 |

## VARYT LINIE GLASS SHADE



Ø: 12 cm  
H: 13 cm  
Material: glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007859   | 61.00 |


## VARYT PLISSEE GLASS SHADE



Ø: 11.5 cm  
H: 13.5 cm  
Material: glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007860   | 66.00 |

## SUN WL, G9, ANGULAR



220-240 V ~50/60 Hz  
Material: steel



Base: 1 × G69    max. Ø: 1.9 cm    L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008123   | 96.00 |



G9 | 4 W | 300°  
450 lm | 2700 K | EEC = E




Prod. no.:    1007455    8.00 GBP

1008124    287



## SUN

WL, G9, CURVED



220-240 V ~50/60 Hz  
Material: steel



Base: 1 × G69 max. Ø: 1.9 cm | L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008124   | 96.00 |




G9 | 4 W | 300°  
450 lm | 2700 K | EEC = E

Prod. no.: 1007455 8.00 GBP

## SUN

WL, UP, G9, ANGULAR



220-240 V ~50/60 Hz  
Material: steel



Base: 1 × G69 max. Ø: 1.9 cm | L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1009144   | 96.00 |




G9 | 4 W | 300°  
400 lm | 3000 K | EEC = E

Prod. no.: 1005286 8.00 GBP

## SUN

WL, DOUBLE, G9, ANGULAR



220-240 V ~50/60 Hz  
Material: steel



Base: 1 × G69 max. Ø: 1.9 cm | L: 6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1009145   | 113.00 |



G9 | 4 W | 300°  
400 lm | 3000 K | EEC = E

Prod. no.: 1005286 8.00 GBP






1010306 289





## DYSKO CW, SINGLE, PHASE




220-240 V ~50/60 Hz | 150 mA  
Total wattage: 6.7 W  
Material: aluminium



2700 K  
750 lm

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| black/gold  | 1010300   | 127.00 |
| black/black | 1010302   | 130.00 |
| white/black | 1010301   | 127.00 |

## DYSKO CW, DOUBLE, PHASE



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 13 W  
Material: aluminium




Spot 1  
  
Spot 2

2700 K  
750 lm

2700 K  
750 lm

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| black/gold  | 1010306   | 229.00 |
| black/black | 1010308   | 231.00 |
| white/black | 1010307   | 229.00 |

## DYSKO CW, SWITCH, SINGLE, PHASE



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 6.7 W  
Material: aluminium

• incl. on/off switch




2700 K  
750 lm

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| black/gold  | 1010312   | 132.00 |
| white/black | 1010313   | 132.00 |



# NUMINOS® S CW




● black



220-240 V ~50/60 Hz | 200 mA  
Total wattage: 8 W  
Material: aluminium/PC

| Variant             | GBP    |
|---------------------|--------|
| All S versions      | 100.00 |
| All DALI S versions | 142.00 |



○ white

Please note:  
decorative ring also  
available in white,  
gold and copper





| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Front ring S |           |      |
| ○ white      | 1006167   | 2.00 |
| ● copper     | 1008140   | 8.00 |
| ● gold       | 1008144   | 8.00 |



|                                                                                                                                                                         |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                | 1004098   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004099   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004100   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                | 1004106   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004107   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004108   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                | 1004114   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004115   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004116   |                                                                                       |
|       | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                | 1004386   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004387   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004388   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                | 1004394   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004395   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004396   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                | 1004402   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004403   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004404   |                                                                                       |
|                                                                                        | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                | 1004102   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004103   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004104   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                | 1004110   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004111   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004112   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                | 1004118   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004119   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004120   |                                                                                       |
|   | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                | 1004390   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004391   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004392   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                | 1004398   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004399   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004400   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                | 1004406   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004407   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004408   |                                                                                       |

# NUMINOS® M CL




● black



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: aluminium/PC

| Variant             | GBP    |
|---------------------|--------|
| All M versions      | 126.00 |
| All DALI M versions | 172.00 |



○ white

Please note:  
decorative ring also  
available in white,  
gold and copper





| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Front ring M |           |      |
| ○ white      | 1006168   | 3.00 |
| ● copper     | 1008141   | 8.00 |
| ● gold       | 1008145   | 8.00 |



|                                                                                                                                                                         |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                | 1004194   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004195   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004196   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                | 1004202   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004203   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004204   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                | 1004210   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004211   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004212   |                                                                                       |
|       | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                | 1004482   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004483   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004484   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                | 1004490   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004491   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004492   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                | 1004498   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004499   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004500   |                                                                                       |
|                                                                                        | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                | 1004198   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004199   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004200   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                | 1004206   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004207   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004208   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                | 1004214   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004215   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004216   |                                                                                       |
|   | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                | 1004486   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004487   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004488   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                | 1004494   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004495   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004496   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                | 1004502   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004503   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1004504   |                                                                                       |

# NUMINOS® L

## CL




● black



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: aluminium/PC

| Variant             | GBP    |
|---------------------|--------|
| All L versions      | 134.00 |
| All DALI L versions | 184.00 |



○ white

Please note:  
decorative ring also  
available in white,  
gold and copper





| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Front ring L |           |       |
| ○ white      | 1006169   | 3.00  |
| ● copper     | 1008142   | 10.00 |
| ● gold       | 1008146   | 10.00 |



|                                                                                                                                                                         |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                | 1004290   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004291   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004292   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                | 1004298   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004299   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004300   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                | 1004306   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004307   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004308   |                                                                                       |
|       | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                | 1004578   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004579   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004580   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                | 1004586   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004587   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004588   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                | 1004594   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004595   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004596   |                                                                                       |
|                                                                                        | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                | 1004294   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004295   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004296   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                | 1004302   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004303   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004304   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                | 1004310   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004311   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004312   |                                                                                       |
|   | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                | 1004582   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004583   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004584   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                | 1004590   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004591   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004592   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                | 1004598   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1004599   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                | 1004600   |                                                                                       |



# NUMINOS® XL CL




● black



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 27 W  
Material: aluminium/PC

| Variant              | GBP    |
|----------------------|--------|
| All XL versions      | 142.00 |
| All DALI XL versions | 201.00 |



○ white

Please note:  
decorative ring also  
available in white,  
gold and copper



| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Front ring XL |           |       |
| ○ white       | 1006170   | 4.00  |
| ● copper      | 1008143   | 10.00 |
| ● gold        | 1008147   | 10.00 |




|                                                                                     |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|    | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | 1005741   |    |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1005742   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1005743   |                                                                                       |
|                                                                                     | 3000 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | 1005747   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1005748   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1005749   |                                                                                       |
|                                                                                     | 4000 K                                                                            | 3900 lm                                                                           | 24°                                                                               | 16                                                                                | 1005753   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1005754   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1005755   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                   |           |                                                                                       |
|    | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | 1006083   |    |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1006084   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1006085   |                                                                                       |
|                                                                                     | 3000 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | 1006089   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1006090   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1006091   |                                                                                       |
|                                                                                     | 4000 K                                                                            | 3900 lm                                                                           | 24°                                                                               | 16                                                                                | 1006095   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1006096   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1006097   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                   |           |                                                                                       |
|    | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | 1005744   |    |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1005745   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1005746   |                                                                                       |
|                                                                                     | 3000 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | 1005750   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1005751   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1005752   |                                                                                       |
|                                                                                     | 4000 K                                                                            | 3900 lm                                                                           | 24°                                                                               | 16                                                                                | 1005756   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1005757   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1005758   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                   |           |                                                                                       |
|  | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | 1006086   |  |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1006087   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1006088   |                                                                                       |
|                                                                                     | 3000 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                | 1006092   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1006093   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1006094   |                                                                                       |
|                                                                                     | 4000 K                                                                            | 3900 lm                                                                           | 24°                                                                               | 16                                                                                | 1006098   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                | 1006099   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                | 1006100   |                                                                                       |
|                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                   |           |                                                                                       |

# MEDO® 2.0 SLIM 30

## CL, PHASE

NEW



220-240 V ~50/60 Hz | 200 mA

Total wattage: 8 W

Material: aluminium/steel



|      | 3000 K  | 4000 K  |
|------|---------|---------|
| Down | 1000 lm | 1000 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011693   | 201.00 |
| ○ white | 1011694   | 201.00 |




| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |



## MEDO® 2.0 SLIM 40 CL, PHASE



NEW



220-240 V ~50/60 Hz | 400 mA  
Total wattage: 15.5 W  
Material: aluminium/steel



| Down | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 1900 lm | 1900 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011695   | 239.00 |
| ○ white | 1011696   | 239.00 |




| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |

## MEDO® 2.0 SLIM 60 CL, PHASE



NEW



220-240 V ~50/60 Hz | 900 mA  
Total wattage: 35 W  
Material: aluminium/steel



| Down | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 4200 lm | 4200 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011697   | 394.00 |
| ○ white | 1011698   | 394.00 |




| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |

## MEDO® 2.0 SLIM 80 CL, PHASE



NEW



220-240 V ~50/60 Hz | 1200 mA  
Total wattage: 45 W  
Material: aluminium/steel



| Down | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 5900 lm | 5900 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011699   | 579.00 |
| ○ white | 1011700   | 579.00 |



| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |

## MEDO® 2.0 SLIM 30

CL, DALI



220-240 V ~0/50/60 Hz | 200 mA  
Total wattage: 8.6 W  
Material: aluminium/steel



|      | 3000 K  |  | 4000 K  |  |
|------|---------|--|---------|--|
|      | 1000 lm |  | 1000 lm |  |
| Down |         |  |         |  |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011701   | 243.00 |
| ○ white | 1011702   | 243.00 |



| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |

## MEDO® 2.0 SLIM 40

CL, DALI



220-240 V ~0/50/60 Hz | 400 mA  
Total wattage: 15.5 W  
Material: aluminium/steel



|      | 3000 K  |  | 4000 K  |  |
|------|---------|--|---------|--|
|      | 1900 lm |  | 1900 lm |  |
| Down |         |  |         |  |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011703   | 268.00 |
| ○ white | 1011704   | 268.00 |



| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |

## MEDO® 2.0 SLIM 60

CL, DALI



220-240 V ~0/50/60 Hz | 900 mA  
Total wattage: 34 W  
Material: aluminium/steel



|      | 3000 K  |  | 4000 K  |  |
|------|---------|--|---------|--|
|      | 4200 lm |  | 4200 lm |  |
| Down |         |  |         |  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011705   | 420.00 |
| ○ white | 1011706   | 420.00 |



| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |



## MEDO® 2.0 SLIM 80

CL, DALI



200-240 V ~0/50/60 Hz | 1200 mA  
Total wattage: 45 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 5900 lm | 5900 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011707   | 604.00 |
| ○ white | 1011708   | 604.00 |



| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |

## MEDO® 2.0

### SUSPENSION KIT

3 M PARALLEL SUSPENSION SET



Ø: 8 cm  
H: 3 cm  
Material: steel

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011783   | 78.00 |
| ○ white | 1011784   | 78.00 |

## MEDO® 2.0

### SUSPENSION KIT

1.5 M CENTRAL SUSPENSION KIT



Ø: 13 cm  
H: 3 cm  
Material: steel

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011779   | 52.00 |
| ○ white | 1011780   | 52.00 |

## MEDO® 2.0

### SUSPENSION KIT

5 M CENTRAL SUSPENSION KIT



Ø: 13 cm  
H: 3 cm  
Material: steel


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011781   | 92.00 |
| ○ white | 1011782   | 92.00 |



## MEDO® 2.0 HYVE 40 CL, PHASE



NEW



220-240 V ~50/60 Hz | 400 mA  
Total wattage: 16 W  
Material: aluminium/steel



| Down | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 2100 lm | 2100 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011851   | 268.00 |
| ○ white | 1011850   | 268.00 |




| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |

## MEDO® 2.0 HYVE 40 CL, DALI



NEW



200-240 V ~0/50/60 Hz | 400 mA  
Total wattage: 17 W  
Material: aluminium/steel



| Down | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 2100 lm | 2100 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011853   | 302.00 |
| ○ white | 1011852   | 302.00 |




| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |

## MEDO® 2.0 HYVE 60 CL, PHASE



NEW



220-240 V ~50/60 Hz | 900 mA  
Total wattage: 35 W  
Material: aluminium/steel



| Down | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 4800 lm | 4800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011855   | 529.00 |
| ○ white | 1011854   | 529.00 |



| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |



## MEDO® 2.0 HYVE 60 CL, DALI



200-240 V ~0/50/60 Hz | 900 mA  
Total wattage: 33 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 4800 lm | 4800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011857   | 562.00 |
| ○ white | 1011856   | 562.00 |



| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |

## MEDO® 2.0 HYVE 80 CL, PHASE



220-240 V ~50/60 Hz | 1800 mA  
Total wattage: 70 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 9700 lm | 9700 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011859   | 789.00 |
| ○ white | 1011858   | 789.00 |



| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |

## MEDO® 2.0 HYVE 80 CL, DALI



200-240 V ~0/50/60 Hz | 1800 mA  
Total wattage: 67 W  
Material: aluminium/steel



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 9700 lm | 9700 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011861   | 823.00 |
| ○ white | 1011860   | 823.00 |




| Product                      | Prod. no. | GBP   |
|------------------------------|-----------|-------|
| 1.5 m central suspension kit |           |       |
| ● black                      | 1011779   | 52.00 |
| ○ white                      | 1011780   | 52.00 |
| 5 m central suspension kit   |           |       |
| ● black                      | 1011781   | 92.00 |
| ○ white                      | 1011782   | 92.00 |
| 3 m parallel suspension set  |           |       |
| ● black                      | 1011783   | 78.00 |
| ○ white                      | 1011784   | 78.00 |



1007293 305

## MEDO® PRO 30

CW, DALI, UGR<19



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 1150 lm | 1150 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 100 lm  | 100 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007284   | 285.00 |
| ○ white | 1007285   | 285.00 |




| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



## MEDO® PRO 30


CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: aluminium/steel

## MEDO® PRO 40


CW, DALI, UGR<19



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: aluminium/steel

## MEDO® PRO 40

CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 1150 lm | 1150 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 100 lm  | 100 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007288   | 257.00 |
| ○ white | 1007289   | 257.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 2200 lm | 2300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 200 lm  | 200 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007292   | 344.00 |
| ○ white | 1007293   | 344.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 2200 lm | 2300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 200 lm  | 200 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007296   | 300.00 |
| ○ white | 1007297   | 300.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |




| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |

## MEDO® PRO 60


CW, DALI, UGR<19



220-240 V ~0/50/60 Hz | 1000 mA  
Total wattage: 39 W  
Material: aluminium/steel

## MEDO® PRO 60


CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 37 W  
Material: aluminium/steel

## MEDO® PRO 90

CL, DALI, UGR<19



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 75 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 4600 lm | 4700 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 400 lm  | 400 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007300   | 604.00 |
| ○ white | 1007301   | 604.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 4600 lm | 4700 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 400 lm  | 400 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007304   | 540.00 |
| ○ white | 1007305   | 540.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 8800 lm | 9100 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 600 lm  | 600 lm  |

| Variant | Prod. no. | GBP      |
|---------|-----------|----------|
| ● black | 1007308   | 1,201.00 |
| ○ white | 1007309   | 1,201.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



## MEDO® PRO 90


CL, PHASE, UGR<19



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 74 W  
Material: aluminium/steel

## MEDO® PRO 30


CW, DALI

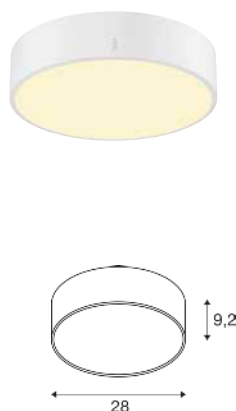

220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: aluminium/steel

## MEDO® PRO 30

CW, PHASE

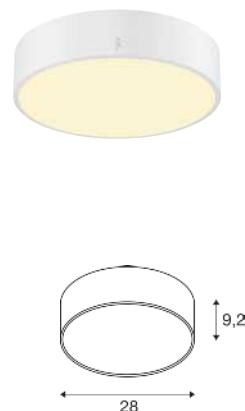

220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 8800 lm | 9100 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 600 lm  | 600 lm  |

| Variant | Prod. no. | GBP      |
|---------|-----------|----------|
| ● black | 1007312   | 1,072.00 |
| ○ white | 1007313   | 1,072.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 1300 lm | 1300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 50 lm   | 50 lm   |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007286   | 277.00 |
| ○ white | 1007287   | 277.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 1300 lm | 1300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 50 lm   | 50 lm   |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007290   | 249.00 |
| ○ white | 1007291   | 249.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |




| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



## MEDO® PRO 40


CW, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: aluminium/steel

## MEDO® PRO 40


CW, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: aluminium/steel

## MEDO® PRO 60

CW, DALI



220-240 V ~0/50/60 Hz | 1000 mA  
Total wattage: 39 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 2550 lm | 2550 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 100 lm  | 100 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007294   | 336.00 |
| ○ white | 1007295   | 336.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 2550 lm | 2550 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 100 lm  | 100 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007298   | 292.00 |
| ○ white | 1007299   | 292.00 |



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 5250 lm | 5300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 200 lm  | 200 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007302   | 588.00 |
| ○ white | 1007303   | 588.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |




| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



## MEDO® PRO 60


CW, PHASE



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 37 W  
Material: aluminium/steel

## MEDO® PRO 90


CL, DALI



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 75 W  
Material: aluminium/steel

## MEDO® PRO 90

CL, PHASE



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 74 W  
Material: aluminium/steel



|          |         |         |
|----------|---------|---------|
| Direct   | 3000 K  | 4000 K  |
|          | 5250 lm | 5300 lm |
| Indirect | 3000 K  | 4000 K  |
|          | 200 lm  | 200 lm  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007306   | 524.00 |
| ○ white | 1007307   | 524.00 |



|          |          |          |
|----------|----------|----------|
| Direct   | 3000 K   | 4000 K   |
|          | 10550 lm | 10750 lm |
| Indirect | 3000 K   | 4000 K   |
|          | 450 lm   | 450 lm   |

| Variant | Prod. no. | GBP      |
|---------|-----------|----------|
| ● black | 1007310   | 1,184.00 |
| ○ white | 1007311   | 1,184.00 |



|          |          |          |
|----------|----------|----------|
| Direct   | 3000 K   | 4000 K   |
|          | 10550 lm | 10750 lm |
| Indirect | 3000 K   | 4000 K   |
|          | 450 lm   | 450 lm   |

| Variant | Prod. no. | GBP      |
|---------|-----------|----------|
| ● black | 1007314   | 1,057.00 |
| ○ white | 1007315   | 1,057.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |




| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| 1.5 m suspension kit |           |       |
| ● black              | 135250    | 40.00 |
| ○ white              | 135251    | 40.00 |
| 5 m suspension kit   |           |       |
| ○ white              | 1001950   | 88.00 |
| ● black              | 1001952   | 88.00 |



1008556 311

## ONE 40

CW, PHASE, UP/DOWN



220-240 V ~50/60 Hz | 350 mA

Total wattage: 14 W

Material: aluminium/steel




|      |        |        |
|------|--------|--------|
| Up   | 2700 K | 3000 K |
|      | 450 lm | 450 lm |
| Down | 2700 K | 3000 K |
|      | 450 lm | 450 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008547   | 283.00 |
| ○ white | 1008546   | 283.00 |
| ● brass | 1008545   | 283.00 |



## ONE 60


CW, PHASE, UP/DOWN



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 23 W  
Material: aluminium/steel

## ONE 40


CW, DALI, UP/DOWN



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: aluminium/steel

## ONE 60

CW, DALI, UP/DOWN



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 23 W  
Material: aluminium/steel



|         |      |                  |                  |
|---------|------|------------------|------------------|
| 1008550 | Up   | 2700 K<br>550 lm | 3000 K<br>550 lm |
|         | Down | 2700 K<br>750 lm | 3000 K<br>800 lm |
| 1008549 | Up   | 2700 K<br>750 lm | 3000 K<br>800 lm |
|         | Down | 2700 K<br>750 lm | 3000 K<br>800 lm |
| 1008548 | Up   | 2700 K<br>750 lm | 3000 K<br>800 lm |
|         | Down | 2700 K<br>750 lm | 3000 K<br>800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008550   | 335.00 |
| ○ white | 1008549   | 335.00 |
| ● brass | 1008548   | 335.00 |



|      |                  |                  |
|------|------------------|------------------|
| Up   | 2700 K<br>450 lm | 3000 K<br>450 lm |
|      | 2700 K<br>450 lm | 3000 K<br>450 lm |
| Down | 2700 K<br>450 lm | 3000 K<br>450 lm |
|      | 2700 K<br>450 lm | 3000 K<br>450 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008553   | 343.00 |
| ○ white | 1008552   | 343.00 |
| ● brass | 1008551   | 343.00 |




|         |      |                  |                  |
|---------|------|------------------|------------------|
| 1008556 | Up   | 2700 K<br>550 lm | 3000 K<br>550 lm |
|         | Down | 2700 K<br>750 lm | 3000 K<br>800 lm |
| 1008555 | Up   | 2700 K<br>750 lm | 3000 K<br>850 lm |
|         | Down | 2700 K<br>750 lm | 3000 K<br>800 lm |
| 1008554 | Up   | 2700 K<br>750 lm | 3000 K<br>850 lm |
|         | Down | 2700 K<br>750 lm | 3000 K<br>800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008556   | 403.00 |
| ○ white | 1008555   | 403.00 |
| ● brass | 1008554   | 403.00 |



1002915 313

## ONE LINEAR 50 WL, PHASE, UP/DOWN



220-240 V ~50/60 Hz | 350 mA

Total wattage: 14 W

Material: aluminium/acrylic




|         |      |                  |                  |
|---------|------|------------------|------------------|
| 1008086 | Up   | 2700 K<br>450 lm | 3000 K<br>500 lm |
|         | Down | 2700 K<br>450 lm | 3000 K<br>500 lm |
| 1008085 | Up   | 2700 K<br>450 lm | 3000 K<br>500 lm |
|         | Down | 2700 K<br>450 lm | 3000 K<br>500 lm |
| 1008084 | Up   | 2700 K<br>365 lm | 3000 K<br>405 lm |
|         | Down | 2700 K<br>365 lm | 3000 K<br>405 lm |

| Variant       | Prod. no.      | GBP           |
|---------------|----------------|---------------|
| ● white/black | <b>1008084</b> | <b>172.00</b> |
| ○ white       | <b>1008085</b> | <b>172.00</b> |
| ● white/brass | <b>1008086</b> | <b>172.00</b> |



## ONE LINEAR 70


WL, PHASE, UP/DOWN



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: aluminium/acrylic

## ONE 40


CW, DALI



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: aluminium/steel

## ONE 60

CW, DALI



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 24 W  
Material: aluminium/steel



|         |      | 2700 K           | 3000 K           |
|---------|------|------------------|------------------|
|         |      | 625 lm           | 675 lm           |
| 1008083 | Up   | 2700 K<br>625 lm | 3000 K<br>675 lm |
|         | Down | 2700 K<br>625 lm | 3000 K<br>675 lm |
| 1008082 | Up   | 2700 K<br>625 lm | 3000 K<br>675 lm |
|         | Down | 2700 K<br>625 lm | 3000 K<br>675 lm |
| 1008081 | Up   | 2700 K<br>495 lm | 3000 K<br>550 lm |
|         | Down | 2700 K<br>495 lm | 3000 K<br>550 lm |

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● white/black | 1008081   | 206.00 |
| ○ white       | 1008082   | 206.00 |
| ● white/brass | 1008083   | 206.00 |



|  | 3000 K | 4000 K |
|--|--------|--------|
|  | 700 lm | 730 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1002915   | 294.00 |
| ○ white | 1002917   | 289.00 |



|  | 3000 K  | 4000 K  |
|--|---------|---------|
|  | 1350 lm | 1430 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1002918   | 352.00 |



149772

315

## TRUKKO WL, RECTANGULAR

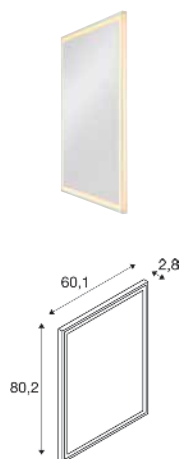

220-240 V ~50/60 Hz | 24 V  
Total wattage: 25 W  
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function



| 3000 K  | 4000 K  | 6500 K  |
|---------|---------|---------|
| 1080 lm | 1290 lm | 1250 lm |

| Variant              | Prod. no.      | GBP           |
|----------------------|----------------|---------------|
| ☐ transparent/opaque | <b>1004730</b> | <b>331.00</b> |

## TRUKKO WL, ROUND



220-240 V ~50/60 Hz | 24 V  
Total wattage: 25 W  
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function



| 3000 K | 4000 K | 6500 K |
|--------|--------|--------|
| 730 lm | 710 lm | 720 lm |


| 3000 K  | 4000 K  | 6500 K  |
|---------|---------|---------|
| 1270 lm | 1260 lm | 1260 lm |

| Variant              | Prod. no.      | GBP           |
|----------------------|----------------|---------------|
| ● transparent/black  | <b>1007201</b> | <b>348.00</b> |
| ☐ transparent/opaque | <b>1004731</b> | <b>348.00</b> |



## TRUKKO 80

WL, ROUND



220-240 V ~50/60 Hz | 24 V  
Total wattage: 23 W  
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function




|         |         |         |         |
|---------|---------|---------|---------|
|         | 3000 K  | 4000 K  | 6500 K  |
| 1007202 | 730 lm  | 740 lm  | 790 lm  |
|         | 3000 K  | 4000 K  | 6500 K  |
| 1007200 | 1100 lm | 1130 lm | 1210 lm |

| Variant              | Prod. no. | GBP    |
|----------------------|-----------|--------|
| ● transparent/black  | 1007202   | 487.00 |
| ○ transparent/opaque | 1007200   | 487.00 |

## TRUKKO 60

WL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.2 W  
Material: aluminium/plastic




|  |        |
|--|--------|
|  | 3000 K |
|  | 750 lm |

| Variant              | Prod. no. | GBP    |
|----------------------|-----------|--------|
| ○ transparent/opaque | 149762    | 142.00 |

## TRUKKO 90

WL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 12 W  
Material: aluminium/plastic




|  |         |
|--|---------|
|  | 3000 K  |
|  | 1040 lm |

| Variant              | Prod. no. | GBP    |
|----------------------|-----------|--------|
| ○ transparent/opaque | 149772    | 168.00 |



151781 316

## SEDO 14 WL



220-240 V ~50/60 Hz | 500 mA

Total wattage: 18 W

Material: aluminium/glass




3000 K  
1300 lm

| Variant     | Prod. no.     | GBP           |
|-------------|---------------|---------------|
| ○ white     | <b>151781</b> | <b>210.00</b> |
| ● aluminium | <b>151786</b> | <b>222.00</b> |



## SEDO 21 WL




220-240 V ~50/60 Hz | 700 mA  
Total wattage: 30 W  
Material: aluminium/glass



3000 K  
2500 lm

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| ○ white     | 151791    | 256.00 |
| ● aluminium | 151796    | 256.00 |

## ARLINA 60 WL




220-240 V ~50/60 Hz | 500 mA  
Total wattage: 23 W  
Material: aluminium/glass



3000 K  
1550 lm

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| ● aluminium | 1002239   | 226.00 |

## ARLINA 130 WL



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 28 W  
Material: aluminium/glass




3000 K  
2400 lm

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| ● aluminium | 1002240   | 289.00 |



1002228 318

## WL 106 E14



220-240 V ~50/60 Hz  
Material: aluminium/glass



Base: 1 x E14 max. Ø: 3.6 cm | L: 11 cm

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ○ chrome/white | 1002228   | 79.00 |



E14 | 4 W | 320°  
350 lm | 2700 K | EEC = G




Prod. no.: 1005285 8.00 GBP



## WL 106

### E14



220-240 V ~50/60 Hz  
Material: aluminium/glass



Base: 2 x E14 max. Ø: 3.6 cm L: 11 cm

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ○ chrome/white | 1002229   | 142.00 |




E14 | 4 W | 320°  
380 lm | 2700 K | EEC = F



Prod. no.: 1005284 6.00 GBP

## MIBO UP/DOWN

### WL, QT14



220-240 V ~50/60 Hz  
Material: aluminium/glass



Base: 2 x G69

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● chrome | 151282    | 81.00 |




G9 | 4 W | 300°  
400 lm | 3000 K | EEC = E

Prod. no.: 1005286 8.00 GBP

## MAGANDA

### WL



100-240 V ~50/60 Hz | 12 V  
Total wattage: 4.8 W  
Material: steel/glass

- Light colour can be adjusted via the housing switch.




| 2700 K | 3000 K | 4000 K |
|--------|--------|--------|
| 45 lm  | 48 lm  | 51 lm  |

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● chrome | 1004971   | 172.00 |



# DORISA 30 WL

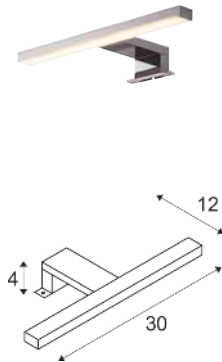


220-240 V ~50/60 Hz | 120 mA  
Total wattage: 5.2 W  
Material: aluminium/plastic



|         |        |
|---------|--------|
|         | 4000 K |
| 1011757 | 370 lm |
|         | 4000 K |
| 1000777 | 420 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black<br>370 lm  | 1011757   | 100.00 |
| ● chrome<br>420 lm | 1000777   | 100.00 |

# DORISA 50 WL

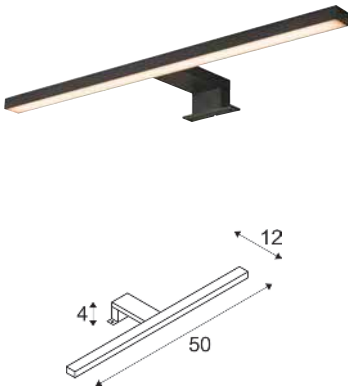


220-240 V ~50/60 Hz | 145 mA  
Total wattage: 6 W  
Material: aluminium/plastic



|         |        |
|---------|--------|
|         | 4000 K |
| 1011758 | 430 lm |
|         | 4000 K |
| 1000780 | 490 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black<br>430 lm  | 1011758   | 109.00 |
| ● chrome<br>490 lm | 1000780   | 113.00 |

# GLENOS® 2.0 WL, 1,5 M, DALI, UGR22

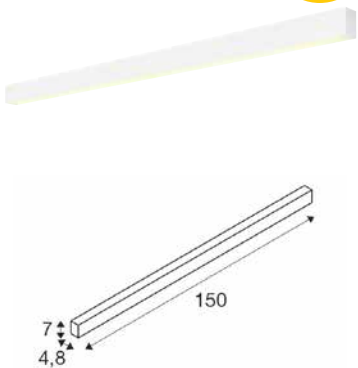

200-240 V ~0/50/60 Hz | 550 mA  
Total wattage: 20 W  
Material: aluminium





|         |      |        |         |
|---------|------|--------|---------|
| 1012169 | Down | 4000 K | 2700 lm |
| 1012168 | Down | 4000 K | 2950 lm |
| 1012167 | Down | 3000 K | 2650 lm |
| 1012166 | Down | 3000 K | 2900 lm |

| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ● black<br>2650 lm   3000 K | 1012167   | 302.00 |
| ● black<br>2700 lm   4000 K | 1012169   | 302.00 |
| ○ white<br>2900 lm   3000 K | 1012166   | 302.00 |
| ○ white<br>2950 lm   4000 K | 1012168   | 302.00 |



## Q-LINE® WL




220-240 V ~50/60 Hz | 700 mA  
Total wattage: 45 W  
Material: aluminium/acrylic



3000 K  
3800 lm

## L-LINE 60 WL




220-240 V ~50/60 Hz | 350 mA  
Total wattage: 10 W  
Material: aluminium/polycarbonate (PC)



3000 K  
820 lm

## L-LINE 120 WL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 26 W  
Power consumption: 14 W  
Material: aluminium/polycarbonate (PC)



**1001303** 3000 K  
2250 lm

**1001304** 3000 K  
1650 lm


| Variant | Prod. no.      | GBP           |
|---------|----------------|---------------|
| ● black | <b>1000669</b> | <b>398.00</b> |
| ○ white | <b>1000668</b> | <b>398.00</b> |
| ● grey  | <b>1000670</b> | <b>398.00</b> |

| Variant  | Prod. no.      | GBP           |
|----------|----------------|---------------|
| ○ white  | <b>1001299</b> | <b>210.00</b> |
| ○ silver | <b>1001300</b> | <b>210.00</b> |

| Variant             | Prod. no.      | GBP           |
|---------------------|----------------|---------------|
| ○ white<br>2250 lm  | <b>1001303</b> | <b>285.00</b> |
| ○ silver<br>1650 lm | <b>1001304</b> | <b>285.00</b> |

## PANTILO ROPE

WL, G9



220-240 V ~50/60 Hz  
Material: glass



Base: 1 x G69 max. Ø: 3 cm | L: 6 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| anthracite/silver | 1007594   | 155.00 |
| amber/gold        | 1007595   | 155.00 |



G9 | 4 W | 300°  
400 lm | 3000 K | EEC = E



Prod. no.: 1005286 8.00 GBP




## ENOLA® 2.0 S

CW, SINGLE, GU10 MINI, PAR11,  
ROUND



NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC



Base: 1 × GU10 max. Ø: 3.6 cm | L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011915   | 47.00 |
| ○ white | 1011916   | 47.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP




| Product                       | Prod. no. | GBP  |
|-------------------------------|-----------|------|
| ENOLA® 2.0 S, decorative ring |           |      |
| ● black                       | 1011753   | 4.00 |
| ○ white                       | 1011754   | 4.00 |
| ● gold                        | 1011755   | 4.00 |
| ● copper                      | 1011756   | 4.00 |

## ENOLA® 2.0 S

CW, SINGLE, GU10 MINI, PAR11,  
SQUARE



NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC



Base: 1 × GU10 max. Ø: 3.6 cm | L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011917   | 47.00 |
| ○ white | 1011918   | 47.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP




| Product                       | Prod. no. | GBP  |
|-------------------------------|-----------|------|
| ENOLA® 2.0 S, decorative ring |           |      |
| ● black                       | 1011753   | 4.00 |
| ○ white                       | 1011754   | 4.00 |
| ● gold                        | 1011755   | 4.00 |
| ● copper                      | 1011756   | 4.00 |

## ENOLA® 2.0 S

WL, SINGLE, GU10 MINI, PAR11,  
BEDSIDE, USBC



NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic

• USB type-C port: 5 V 2 A, max. 10 W



Base: 1 × GU10 max. Ø: 3.6 cm | L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011923   | 77.00 |
| ○ white | 1011924   | 77.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP



| Product                       | Prod. no. | GBP  |
|-------------------------------|-----------|------|
| ENOLA® 2.0 S, decorative ring |           |      |
| ● black                       | 1011753   | 4.00 |
| ○ white                       | 1011754   | 4.00 |
| ● gold                        | 1011755   | 4.00 |
| ● copper                      | 1011756   | 4.00 |



1011915 323

1011929 244






## ENOLA® 2.0 S

WL, SINGLE, GU10 MINI, PAR11



NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel



Base: 1 × GU10 max. Ø: 3.6 cm | L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011925   | 48.00 |
| ○ white | 1011926   | 48.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP




| Product                       | Prod. no. | GBP  |
|-------------------------------|-----------|------|
| ENOLA® 2.0 S, decorative ring |           |      |
| ● black                       | 1011753   | 4.00 |
| ○ white                       | 1011754   | 4.00 |
| ● gold                        | 1011755   | 4.00 |
| ● copper                      | 1011756   | 4.00 |

## ENOLA® 2.0 S

WL, DOUBLE, GU10 MINI, PAR11



NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel



Base: 2 × GU10 max. Ø: 3.6 cm | L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011927   | 65.00 |
| ○ white | 1011928   | 65.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP



| Product                       | Prod. no. | GBP  |
|-------------------------------|-----------|------|
| ENOLA® 2.0 S, decorative ring |           |      |
| ● black                       | 1011753   | 4.00 |
| ○ white                       | 1011754   | 4.00 |
| ● gold                        | 1011755   | 4.00 |
| ● copper                      | 1011756   | 4.00 |

## ENOLA® 2.0 S

DECORATIVE RING




NEW

Ø: 3.9 cm  
H: 1.1 cm  
Material: plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011753   | 4.00 |
| ○ white  | 1011754   | 4.00 |
| ● gold   | 1011755   | 4.00 |
| ● copper | 1011756   | 4.00 |



ENOLA® 2.0 M  
CW, SINGLE, GU10, QPAR51,  
ROUND



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC



Base: 1 × GU10    max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011893   | 52.00 |
| ○ white | 1011894   | 52.00 |



GU10 | 6W | 38°  
450lm | 2700 K | EEC = F




Prod. no.: 1005076    7.00 GBP



| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, decorative ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |

ENOLA® 2.0 M  
CW, SINGLE, GU10, QPAR51,  
SQUARE



220-240 V ~50/60 Hz  
Material: aluminium/steel/plastic PC



Base: 1 × GU10    max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011895   | 52.00 |
| ○ white | 1011896   | 52.00 |



GU10 | 6W | 38°  
450lm | 2700 K | EEC = F



Prod. no.: 1005076    7.00 GBP



| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, decorative ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |




## ENOLA® 2.0 M

WL, SINGLE, GU10, QPAR51



NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel



Base: 1 × GU10 max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011903   | 52.00 |
| ○ white | 1011904   | 52.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP




| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, decorative ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |

## ENOLA® 2.0 M

WL, DOUBLE, GU10, QPAR51



NEW



220-240 V ~50/60 Hz  
Material: aluminium/steel



Base: 2 × GU10 max. Ø: 5.1 cm | L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011905   | 68.00 |
| ○ white | 1011906   | 68.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP



| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, decorative ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |

## ENOLA® 2.0/BIMA 2.0 M

DECORATIVE RING



NEW

Ø: 5.4 cm  
H: 2 cm  
Material: plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011749   | 4.00 |
| ○ white  | 1011750   | 4.00 |
| ● gold   | 1011751   | 4.00 |
| ● copper | 1011752   | 4.00 |




1009100 329

## GRIP! S

WL, Ø 3,0 CM, ON/OFF SWITCH

NEW

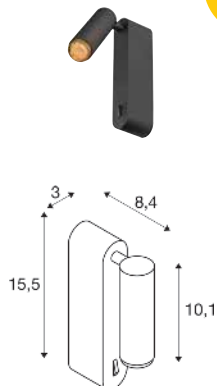

220-240 V ~50/60 Hz | 100 mA  
Total wattage: 4.6 W  
Material: aluminium

- Honeycomb accessories included
- On/off switch included



2700 K  
260 lm

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1012179   | 147.00 |
| ● white/black  | 1012178   | 147.00 |
| ● bronze/black | 1012180   | 147.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! S, decorative ring |           |       |
| ○ white                  | 1011829   | 16.00 |
| ● black                  | 1011830   | 16.00 |
| ● nickel                 | 1011831   | 16.00 |
| ● gold                   | 1011832   | 16.00 |
| HONEYCOMB + spacer       |           |       |
| ● black                  | 1011837   | 8.00  |

## GRIP! S

WL, PHASE, UP/DOWN, Ø 3,0 CM

NEW



220-240 V ~50/60 Hz | 300 mA  
Total wattage: 12 W  
Material: aluminium

- Honeycomb accessories included



Up  
2700 K  
370 lm

Down  
2700 K  
370 lm

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1012175   | 172.00 |
| ● white/black  | 1012174   | 172.00 |
| ● bronze/black | 1012176   | 172.00 |




| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! S, decorative ring |           |       |
| ○ white                  | 1011829   | 16.00 |
| ● black                  | 1011830   | 16.00 |
| ● nickel                 | 1011831   | 16.00 |
| ● gold                   | 1011832   | 16.00 |
| HONEYCOMB + spacer       |           |       |
| ● black                  | 1011837   | 8.00  |



## GRIP! L

WL, UP OR DOWN, 1X QPAR51,  
Ø 5,7 CM

NEW



220-240 V ~50/60 Hz  
Material: aluminium

- Honeycomb accessories included



Base: 1 x GU10 max. Ø: 5.1 cm L: 5.5 cm

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/gold   | 1011878   | 88.00 |
| ● white/black  | 1011877   | 88.00 |
| ● gold/black   | 1011880   | 88.00 |
| ● bronze/black | 1011879   | 88.00 |



GU10 | 6W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005080 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP




| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! L, decorative ring |           |       |
| ○ white                  | 1008496   | 21.00 |
| ● black                  | 1008497   | 21.00 |
| ● nickel                 | 1008498   | 21.00 |
| ● gold                   | 1008499   | 21.00 |
| HONEYCOMB + spacer       |           |       |
| ● black                  | 1011839   | 11.00 |

## GRIP! L

WL, UP/DOWN, 2X QPAR51,  
Ø 5,7 CM

NEW



220-240 V ~50/60 Hz  
Material: aluminium

- Honeycomb accessories included



Base: 2 x GU10 max. Ø: 5.1 cm L: 5.5 cm

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1011882   | 113.00 |
| ● white/black  | 1011881   | 113.00 |
| ● gold/black   | 1011884   | 113.00 |
| ● bronze/black | 1011883   | 113.00 |



GU10 | 6W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005080 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: 1012469 23.00 GBP



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! L, decorative ring |           |       |
| ○ white                  | 1008496   | 21.00 |
| ● black                  | 1008497   | 21.00 |
| ● nickel                 | 1008498   | 21.00 |
| ● gold                   | 1008499   | 21.00 |
| HONEYCOMB + spacer       |           |       |
| ● black                  | 1011839   | 11.00 |

## GRIP! FLAT

CL, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 15 W  
Material: aluminium

- 2700 K/3000 K colour temperature switch included
- Contains honeycomb structure



|      | 2700 K | 3000 K |
|------|--------|--------|
| Down | 400 lm | 430 lm |

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1009100   | 214.00 |
| ● white/black | 1009101   | 214.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| GRIP! FLAT, decorative ring |           |       |
| ● black                     | 1009102   | 28.00 |
| ○ white                     | 1009103   | 28.00 |
| ● gold                      | 1009104   | 28.00 |


1006441 331





## ASTO TUBE

WL, SINGLE, GU10




220-240 V ~50/60 Hz  
Material: aluminium

- Decorative rings available as accessory

## ASTO TUBE

WL, UP/DOWN, GU10



220-240 V ~50/60 Hz  
Material: aluminium

- Decorative rings available as accessory

## ASTO TUBE

DECORATIVE REFLECTOR



Ø: 6.8 cm  
H: 4 cm  
Material: polycarbonate (PC)

| Variant        | Prod. no. | GBP  |
|----------------|-----------|------|
| ● black/chrome | 1007190   | 4.00 |
| ● gold         | 1006450   | 4.00 |
| ● chrome       | 1006449   | 4.00 |
| ● copper       | 1006451   | 4.00 |



Base: 1 × GU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006441   | 52.00 |
| ○ white | 1006442   | 52.00 |



Base: 2 × GU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006443   | 69.00 |
| ○ white | 1006444   | 69.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



| Product              | Prod. no. | GBP  |
|----------------------|-----------|------|
| Decorative reflector |           |      |
| ● chrome             | 1006449   | 4.00 |
| ● gold               | 1006450   | 4.00 |
| ● copper             | 1006451   | 4.00 |
| ● black/chrome       | 1007190   | 4.00 |



| Product              | Prod. no. | GBP  |
|----------------------|-----------|------|
| Decorative reflector |           |      |
| ● chrome             | 1006449   | 4.00 |
| ● gold               | 1006450   | 4.00 |
| ● copper             | 1006451   | 4.00 |
| ● black/chrome       | 1007190   | 4.00 |







1008204 335

1008201 335

1008205 335

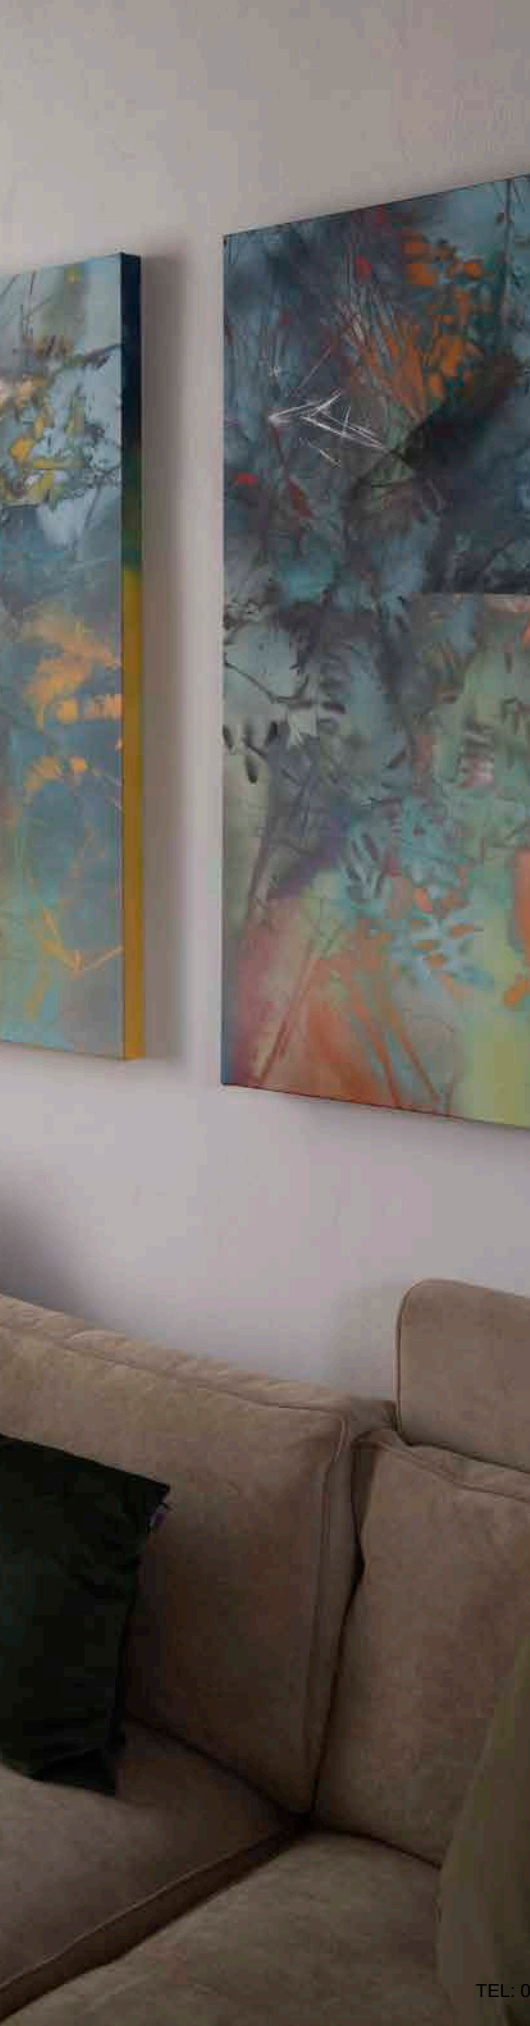

## MANA BASE WL, ROUND, PHASE



220-240 V ~50/60 Hz | 350 mA


Total wattage: 15 W

Material: aluminium/polycarbonate (PC)




| 2700 K  | 3000 K  |
|---------|---------|
| 1070 lm | 1100 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006319   | 163.00 |

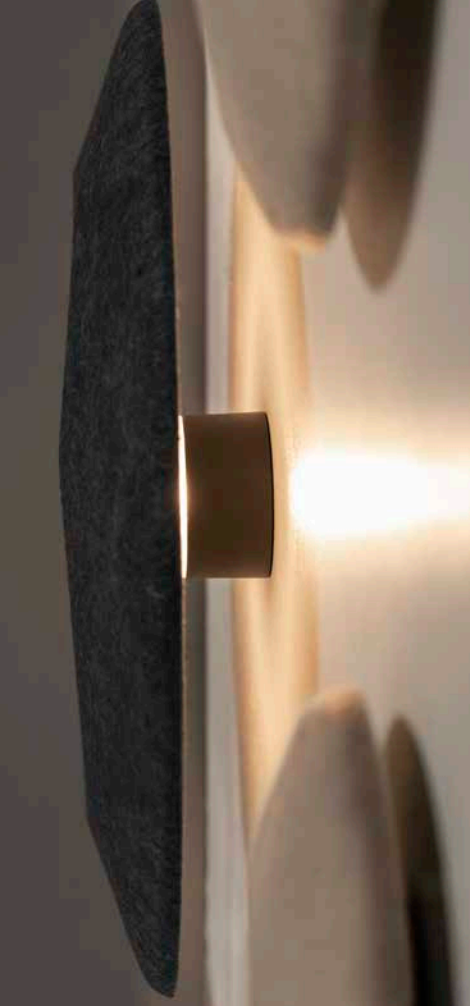

## MANA BASE ROUND



Material: aluminium/polycarbonate (PC)

- Non-illuminated base for round shades in the MANA series

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1004969   | 23.00 |

## MANA 40 SHADE, ROUND, ACOUSTIC FELT



Ø: 40 cm  
H: 6 cm  
Material: felt/aluminium

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● grey  | 1004661   | 88.00 |
| ● beige | 1004660   | 88.00 |



## MANA 60 SHADE, ROUND, ACOUSTIC FELT



Ø: 60 cm  
H: 6 cm  
Material: felt/aluminium

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 1004663   | 126.00 |
| ● beige | 1004662   | 126.00 |



## MANA 40 SHADE, ROUND



Ø: 40 cm  
H: 2.2 cm  
Material: steel

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008201   | 69.00 |

## MANA 40 SHADE, ROUND



Ø: 40 cm  
H: 2.2 cm  
Material: steel

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008203   | 69.00 |

## MANA 40 SHADE, ROUND, MOON STRUCTURE



Ø: 40 cm  
H: 2.2 cm  
Material: steel

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● gold  | 1008205   | 88.00 |

## MANA 60 SHADE, ROUND



Ø: 60 cm  
H: 4.2 cm  
Material: steel

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008202   | 109.00 |

## MANA 60 SHADE, ROUND



Ø: 60 cm  
H: 4.2 cm  
Material: steel

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1008204   | 109.00 |

## MANA 60 SHADE, ROUND, MOON STRUCTURE



Ø: 60 cm  
H: 4.2 cm  
Material: steel

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● gold  | 1008206   | 126.00 |




1004670 337





## OCULUS WL, SINGLE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 8.5 W  
Material: aluminium


- Additional frosted lens included



2000 K - 3000 K  
57 lm - 570 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1006307   | 197.00 |
| ○ white | 1006308   | 197.00 |

## OCULUS UP/DOWN WL, PHASE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 15 W  
Material: aluminium

- Additional frosted lens included




Up  
2000 K - 3000 K  
22 lm - 555 lm

Down  
2000 K - 3000 K  
22 lm - 555 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004670   | 214.00 |
| ○ white | 1004671   | 214.00 |

## OCULUS WL UP/DOWN DTW, PVD



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 15 W  
Material: aluminium

- Additional frosted lens included



Up  
2000 K - 3000 K  
22 lm - 555 lm


Down  
2000 K - 3000 K  
22 lm - 555 lm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1008613   | 319.00 |
| ● dark bronze | 1008612   | 319.00 |
| ● dark copper | 1008614   | 319.00 |



1002238 339

## PLASTRA WL, CUBE, QT14



IP20

220-240 V ~50/60 Hz  
Material: plaster/steel



Base: 1 x G69

| Variant                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| <input type="radio"/> white | 148018    | 47.00 |



G9 | 4 W | 300°  
400 lm | 3000 K | EEC = E




Prod. no.: 1005286 8.00 GBP



## PLASTRA

WL, RECTANGULAR, QT-DE12



220-240 V ~50/60 Hz  
Material: plaster/steel



Base: 1 x R7s 118 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1002238   | 68.00 |




R7s 118 mm | 15 W | 330°  
2000 lm | 3000 K | EEC = E



Prod. no.: 1005288 25.00 GBP

## PLASTRA

WL, E14



220-240 V ~50/60 Hz  
Material: plaster/steel



Base: 1 x E14

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 148010    | 46.00 |




E14 | 4 W | 320°  
350 lm | 2700 K | EEC = G



Prod. no.: 1005285 8.00 GBP

## PLASTRA

WL, SEMICIRCULAR



220-240 V ~50/60 Hz  
Material: plaster/steel



Base: max. Ø: 2 cm L: 11.8 cm  
1 x R7s 118 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1004732   | 63.00 |



R7s 118 mm | 15 W | 330°  
2000 lm | 3000 K | EEC = E



Prod. no.: 1005288 25.00 GBP

PLASTRA  
WL, ROUND SHIELD




100-240 V ~50/60 Hz | 12 V  
Total wattage: 6.5 W  
Material: plaster/steel



3000 K  
375 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 148091    | 147.00 |

PLASTRA  
WL, ANGULAR

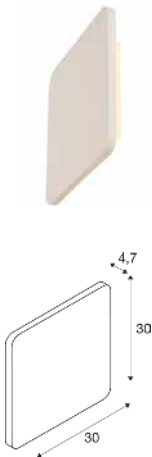


100-240 V ~50/60 Hz | 12 V  
Total wattage: 10.5 W  
Material: plaster/steel



3000 K  
650 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 148019    | 189.00 |

PLASTRA  
WL, QPAR51

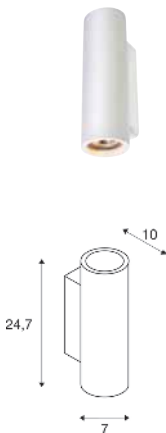

220-240 V ~50/60 Hz  
Material: plaster/steel



Base: 2 x GU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 148060    | 58.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F




Prod. no.: 1005076 7.00 GBP



## PLASTRA 101

WL, E14



220-240 V ~50/60 Hz  
Material: plaster/steel



Base: 1 x E14 max. Ø: 4.5 cm | L: 11 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 148013    | 47.00 |




E14 | 4 W | 320°  
350 lm | 2700 K | EEC = G



Prod. no.: 1005285 8.00 GBP

## PLASTRA

WL, CURVE, QT-DE12



220-240 V ~50/60 Hz  
Material: plaster/steel



Base: 1 x R7s 78 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 148012    | 63.00 |




R7s 78 mm | 9 W | 330°  
1050 lm | 3000 K | EEC = E



Prod. no.: 1005287 21.00 GBP

## PLASTRA 104

WL, QT14



220-240 V ~50/60 Hz  
Material: plaster/steel



Base: 1 x G69

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 148016    | 47.00 |



G9 | 4 W | 300°  
400 lm | 3000 K | EEC = E



Prod. no.: 1005286 8.00 GBP






1010401 343







## WUD WL, E27, CYLINDRICAL



220-240 V ~50/60 Hz

Material: wood/steel

- Natural material



Base: 1 x E27      max. Ø: 12 cm | L: 18 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● brown | 1010401   | 109.00 |



E27 | 6 W | 330°  
570 lm | 2200 K | EEC = F





Prod. no.:      1008152      55.00 GBP



## LOGS IN WL

## LOGS IN WL, PHASE



100-240 V ~50/60 Hz | 500 mA  
Total wattage: 6 W  
Material: aluminium



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 11 W  
Material: aluminium

1002928 345



|        |        |
|--------|--------|
| 151320 | 3000 K |
|        | 300 lm |
| 151321 | 3000 K |
|        | 470 lm |




|         |                 |
|---------|-----------------|
| 1000638 | 2000 K - 3000 K |
|         | 43 lm - 430 lm  |
| 1000639 | 2000 K - 3000 K |
|         | 69 lm - 690 lm  |

| Variant                | Prod. no. | GBP    |
|------------------------|-----------|--------|
| ● black/gold<br>300 lm | 151320    | 105.00 |
| ○ white<br>470 lm      | 151321    | 105.00 |

| Variant               | Prod. no. | GBP    |
|-----------------------|-----------|--------|
| ● black/gold<br>43 lm | 1000638   | 138.00 |
| ○ white<br>69 lm      | 1000639   | 138.00 |




## LOGS IN L WL, PHASE





220-240 V ~50/60 Hz | 500 mA  
Total wattage: 18 W  
Material: aluminium

## LOGS IN L WL, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 21 W  
Material: aluminium

## LOGS IN L WL, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: aluminium/steel



|         |         |
|---------|---------|
| 1002842 | 3000 K  |
|         | 1100 lm |
| 1002844 | 3000 K  |
|         | 1600 lm |

| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black/gold<br>1100 lm | 1002842   | 176.00 |
| ○ white<br>1600 lm      | 1002844   | 176.00 |



|         |                  |
|---------|------------------|
| 1002928 | 2000 K - 3000 K  |
|         | 100 lm - 1000 lm |
| 1002929 | 2000 K - 3000 K  |
|         | 140 lm - 1390 lm |


| Variant                | Prod. no. | GBP    |
|------------------------|-----------|--------|
| ● black/gold<br>100 lm | 1002928   | 239.00 |
| ○ white<br>140 lm      | 1002929   | 239.00 |



|         |         |
|---------|---------|
| 1011866 | 3000 K  |
|         | 2000 lm |
| 1011865 | 3000 K  |
|         | 1400 lm |

| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black/gold<br>1400 lm | 1011865   | 210.00 |
| ○ white<br>2000 lm      | 1011866   | 210.00 |

QUAD FRAME 14  
WL




100-240 V ~50/60 Hz | 350 mA  
Total wattage: 4.4 W  
Material: aluminium



|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 165 lm | 175 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1003467   | 85.00 |

QUAD FRAME 19  
WL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: aluminium




|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 580 lm | 640 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1003468   | 103.00 |



## WL 149


WL, QT-DE12



220-240 V ~50/60 Hz  
Material: steel/glass

## WL 149


WL, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: steel/glass

## SHELL 30

WL, PHASE



220-240 V ~50/60 Hz | 1300 mA  
Total wattage: 50 W  
Material: aluminium/acrylic



Base: R7s 78 mm



149511

3000 K  
1080 lm

1011747

3000 K  
600 lm



3000 K  
5650 lm

| Variant         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| ● black/frosted | 1011748   | 61.00 |
| ○ white/frosted | 149471    | 62.00 |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black<br>600 lm  | 1011747   | 130.00 |
| ○ white<br>1080 lm | 149511    | 134.00 |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1000423   | 331.00 |




R7s 78 mm | 9 W | 330°  
1050 lm | 3000 K | EEC = E



Prod. no.: 1005287 21.00 GBP

151410 349

## ASSO 300 WL, PHASE



220-240 V ~50/60 Hz | 500 mA

Total wattage: 12 W

Material: aluminium/steel



3000 K


975 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ○ white           | 151271    | 193.00 |
| ● aluminium/white | 151275    | 201.00 |



## ASSO 300


WL, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 21 W  
Material: aluminium/steel

## OSSA 180


WL, QT-DE12



220-240 V ~50/60 Hz  
Material: aluminium/steel

## OSSA 300

WL, QT-DE12



220-240 V ~50/60 Hz  
Material: aluminium/steel



2000 K - 3000 K  
135 lm - 1340 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1000634   | 222.00 |



Base: 1 x R7s 78 mm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 151450    | 84.00 |
| ○ white | 151451    | 84.00 |



R7s 78 mm | 9 W | 330°  
1050 lm | 3000 K | EEC = E



Prod. no.: 1005287 21.00 GBP



Base: 1 x R7s 118 mm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 151410    | 105.00 |
| ○ white | 151411    | 105.00 |



R7s 118 mm | 15 W | 330°  
2000 lm | 3000 K | EEC = E



Prod. no.: 1005288 25.00 GBP






1008071 351




## CARISO WL, PHASE




220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.8 W  
Material: aluminium/steel

## CARISO WL, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 21 W  
Material: aluminium/steel

## CHROMBO WL, PHASE



220-240 V ~50/60 Hz | 200 mA  
Total wattage: 8 W  
Material: steel/glass



| 2700 K | 3000 K |
|--------|--------|
| 290 lm | 630 lm |



151740

| 1700 K | 2700 K |
|--------|--------|
| 58 lm  | 580 lm |

151741

| 1700 K | 2700 K  |
|--------|---------|
| 100 lm | 1030 lm |



| 3000 K |
|--------|
| 790 lm |

| Variant                         | Prod. no. | GBP    |
|---------------------------------|-----------|--------|
| ● black/gold<br>290 lm   2700 K | 151710    | 151.00 |
| ○ white<br>630 lm   3000 K      | 151711    | 147.00 |

| Variant                        | Prod. no. | GBP    |
|--------------------------------|-----------|--------|
| ● black/gold<br>58 lm   1700 K | 151740    | 260.00 |
| ○ white<br>100 lm   2000 K     | 151741    | 252.00 |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008071   | 147.00 |
| ○ white | 1003316   | 147.00 |




1004740 353





## DIRETO 60

WL, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 14 W  
Material: aluminium




|      |        |        |
|------|--------|--------|
| Up   | 2700 K | 3000 K |
|      | 590 lm | 625 lm |
| Down | 2700 K | 3000 K |
|      | 590 lm | 625 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004740   | 184.00 |
| ○ white | 1004741   | 184.00 |

## DENA 30

WL, E14



220-240 V ~50/60 Hz  
Material: aluminium



Base: 2 × E14 max. Ø: 5.1 cm | L: 9.6 cm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● aluminium | 147529    | 92.00 |




E14 | 4 W | 320°  
350 lm | 2700 K | EEC = G

Prod. no.: 1005285 8.00 GBP



## BASKET

WL, E27



220-240 V ~50/60 Hz  
Material: glass



Base: 1 × E27 max. Ø: 5.2 cm | L: 15.2 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 151591    | 88.00 |




E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E

Prod. no.: 1005289 10.00 GBP




## FITU WALL BRACKET

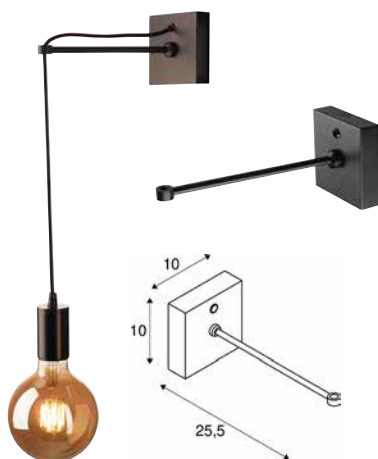


Material: steel

## THEO UP/DOWN WL, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium

## SOLID CUBE WL, QT14

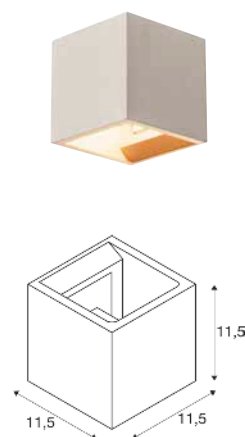

220-240 V ~50/60 Hz  
Material: concrete

• See page 258 for matching pendant lights



Base: 2xGU10



Base: 1xG9

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1004682   | 56.00 |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1000330   | 96.00  |
| ○ white      | 1000327   | 96.00  |
| ● aluminium  | 1000329   | 105.00 |

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● grey            | 1000910   | 84.00 |
| ● black sandstone | 1000911   | 84.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



G9 | 4 W | 300°  
400 lm | 3000 K | EEC = E



Prod. no.: 1005286 8.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



## FENDA WL, BASE, E27



220-240 V ~50/60 Hz  
Material: steel/plastic



Base: 1 x E27 max. Ø: 5.1 cm | L: 20 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1001272   | 46.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289 10.00 GBP



| Product        | Prod. no. | GBP   |
|----------------|-----------|-------|
| Lampshade      |           |       |
| ● black        | 1001273   | 34.00 |
| ● black/copper | 1001274   | 40.00 |
| ○ white        | 1001275   | 34.00 |
| ● beige        | 1001276   | 34.00 |

## FENDA WL, BASE, E27




W: 23 cm  
H: 30 cm  
Material: textile/steel



| Product | Prod. no. | GBP   |
|---------|-----------|-------|
| Base    |           |       |
| ○ white | 1001272   | 46.00 |

## KENKUA SPOT WL, E27



100-240 V ~50/60 Hz | 700 mA  
Total wattage: 2 W  
Material: steel/glass

- Light sources can be switched on/off separately at the light.



Base: 1 x E27 max. Ø: 6.5 cm | L: 12 cm

Spot 3000 K  
200 lm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● chrome | 1002855   | 189.00 |




E27 | 4 W | 280°  
830 lm | 2700 K | EEC = A



Prod. no.: 1008641 7.00 GBP



COUPA  
WL

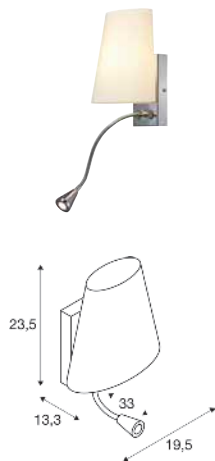

220-240 V ~50/60 Hz | 700 mA  
Total wattage: 3.4 W  
Material: steel/glass

- Light sources can be switched on/off separately at the light.




|               |                  |
|---------------|------------------|
| Base: 1 x G69 | L: 9 cm          |
| Spot          | 3000 K<br>240 lm |

| Variant         | Prod. no. | GBP    |
|-----------------|-----------|--------|
| ● chrome/opaque | 149452    | 180.00 |

 G9 | 4 W | 300°  
450 lm | 2700 K | EEC = E

Prod. no.: 1007455 8.00 GBP

KARPO MAGN  
CW, SINGLE, PHASE

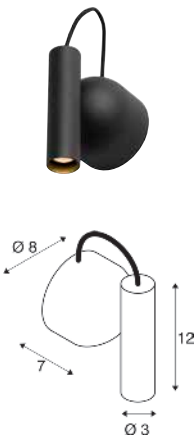

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 6.2 W  
Material: steel/aluminium


- Light head position can be adjusted via the magnetic bracket



|                  |
|------------------|
| 3000 K<br>350 lm |
|------------------|

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1004706   | 172.00 |

KARPO GOOSE  
WL

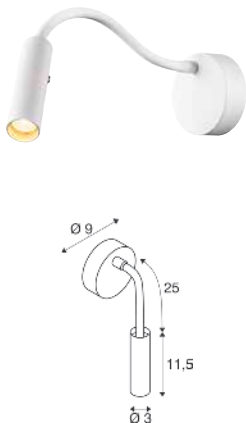

220-240 V ~50/60 Hz | 12 V  
Total wattage: 6 W  
Material: aluminium/steel

- Light can be dimmed via switch on the light head




|         |                  |
|---------|------------------|
| 1006161 | 3000 K<br>420 lm |
| 1006162 | 3000 K<br>380 lm |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● black<br>380 lm | 1006162   | 155.00 |
| ○ white<br>420 lm | 1006161   | 155.00 |




## KARPO 30 CW, SINGLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.3 W  
Material: aluminium/steel


## KARPO 30 WL, SINGLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 5.7 W  
Material: aluminium/steel

- Switch on light housing

## KARPO WL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 6.8 W  
Material: aluminium

- 2 USB connections max. 1.5 A
- 3 dimming levels via switch on base



|        |                  |
|--------|------------------|
| 152330 | 3000 K<br>560 lm |
| 152331 | 3000 K<br>680 lm |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● black<br>560 lm | 152330    | 113.00 |
| ○ white<br>680 lm | 152331    | 113.00 |



|        |                  |
|--------|------------------|
| 152340 | 3000 K<br>450 lm |
| 152341 | 3000 K<br>470 lm |


| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● black<br>450 lm | 152340    | 109.00 |
| ○ white<br>470 lm | 152341    | 109.00 |



|  |                  |
|--|------------------|
|  | 3000 K<br>390 lm |
|--|------------------|

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1002140   | 210.00 |

SOMNILA SPOT  
WL, LEFT



100-240 V ~50/60 Hz | 12 V  
Total wattage: 15 W  
Material: aluminium/steel


- 1 USB type-C | 5 V 2.0 A
- Light sources can be switched on/off separately on the housing



|         |          |        |
|---------|----------|--------|
| 1003455 | Spot     | 3000 K |
|         |          | 120 lm |
|         | Indirect | 3000 K |
|         |          | 370 lm |
| 1003457 | Spot     | 3000 K |
|         |          | 120 lm |
|         | Indirect | 3000 K |
|         |          | 650 lm |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● black<br>120 lm | 1003455   | 201.00 |
| ○ white<br>120 lm | 1003457   | 201.00 |

SOMNILA SPOT  
WL, RIGHT



100-240 V ~50/60 Hz | 12 V  
Total wattage: 15 W  
Material: aluminium/steel


- 1 USB type-C | 5 V 2.0 A
- Light sources can be switched on/off separately on the housing



|         |          |        |
|---------|----------|--------|
| 1003456 | Spot     | 3000 K |
|         |          | 120 lm |
|         | Indirect | 3000 K |
|         |          | 370 lm |
| 1003458 | Spot     | 3000 K |
|         |          | 120 lm |
|         | Indirect | 3000 K |
|         |          | 650 lm |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● black<br>120 lm | 1003456   | 201.00 |
| ○ white<br>120 lm | 1003458   | 201.00 |

SOMNILA FLEX  
WL, LEFT



100-240 V ~50/60 Hz | 12 V  
Material: aluminium

- Light sources can be switched on/off separately on the housing.





|      |        |
|------|--------|
| Spot | 3000 K |
|      | 120 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1003459   | 210.00 |



## SOMNILA FLEX WL, RIGHT

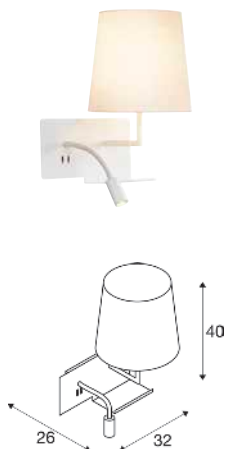

100-240 V ~50/60 Hz | 12 V  
Material: aluminium

- Light sources can be switched on/off separately on the housing.




Spot

3000 K  
120 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1003460   | 210.00 |

## DIO FLEX PLATE WL QPAR51



220-240 V ~50/60 Hz  
Material: aluminium

- Switch on light housing



Base: 1 x GU10

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1002608   | 50.00 |
| ○ white  | 1002607   | 50.00 |
| ● chrome | 146692    | 58.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F




Prod. no.: 1005076 7.00 GBP



| Product                       | Prod. no. | GBP   |
|-------------------------------|-----------|-------|
| Lamp decorative ring Ø 5.7 cm |           |       |
| ● chrome                      | 151049    | 13.00 |

## DIO FLEX PLATE WL



100-240 V ~50/60 Hz | 350 mA  
Total wattage: 1.9 W  
Material: aluminium

- Switch on light housing



1002118

3000 K  
100 lm

1002430

2700 K  
100 lm

1002431

3000 K  
100 lm

146682

3000 K  
100 lm

| Variant         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| ● black 2700 K  | 1002430   | 88.00 |
| ● black 3000 K  | 1002431   | 88.00 |
| ○ white 3000 K  | 1002118   | 88.00 |
| ● chrome 3000 K | 146682    | 92.00 |





1002608 359



## PHELIA

WL, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium/steel

- Switch on lamp head



Base: 1 x GU10 max. Ø: 5.1 cm | L: 10.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 148540    | 113.00 |





GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP

## MERADO FLOOD

WL, PHASE



220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 40 W  
Material: aluminium




|         |                   |
|---------|-------------------|
| 1001472 | 4000 K<br>3200 lm |
| 1001468 | 3000 K<br>3000 lm |

| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ○ white<br>3000 lm   3000 K | 1001468   | 214.00 |
| ○ white<br>3200 lm   4000 K | 1001472   | 214.00 |

## DISPLAY ADL 50

QPAR51



220-240 V ~50/60 Hz  
Material: aluminium/brass

- open cable end



Base: 1 x GU10

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ○ white  | 1002860   | 43.00 |
| ● chrome | 146332    | 55.00 |



GU10 | 6W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005079 7.00 GBP



1008296 363



## PURI 2.0 TUBE CW, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium



Base: 1-4 x GU10 max. Ø: 5.1 cm | L: 5.5 cm



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## PURI 2.0 TUBE CW, DOUBLE LONG, QPAR51




| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008361   | 69.00 |
| ● black/gold | 1008362   | 69.00 |
| ○ white      | 1008363   | 69.00 |
| ● grey       | 1008364   | 69.00 |



## PURI 2.0 TUBE


CW, SINGLE, QPAR51



| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008284   | 41.00 |
| ● black/gold | 1008285   | 41.00 |
| ○ white      | 1008286   | 41.00 |
| ● grey       | 1008287   | 41.00 |

## PURI 2.0 TUBE


CW, SWITCH, SINGLE, QPAR51



| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008296   | 48.00 |
| ● black/gold | 1008297   | 48.00 |
| ○ white      | 1008298   | 48.00 |
| ● grey       | 1008299   | 48.00 |

## PURI 2.0 TUBE


CW, DOUBLE ASYM., QPAR51



| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008308   | 82.00 |
| ● black/gold | 1008309   | 82.00 |
| ○ white      | 1008310   | 82.00 |
| ● grey       | 1008311   | 82.00 |

## PURI 2.0 TUBE


CW, TRIPLE LONG, QPAR51



| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black      | 1008320   | 105.00 |
| ● black/gold | 1008321   | 105.00 |
| ○ white      | 1008322   | 105.00 |
| ● grey       | 1008323   | 105.00 |

## PURI 2.0 TUBE


CW, TRIPLE ROUND, QPAR51



| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black      | 1008332   | 121.00 |
| ● black/gold | 1008333   | 121.00 |
| ○ white      | 1008334   | 121.00 |
| ● grey       | 1008335   | 121.00 |

## PURI 2.0 TUBE

CW, QUADRUPLE LONG, QPAR51



| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black      | 1008344   | 147.00 |
| ● black/gold | 1008345   | 147.00 |
| ○ white      | 1008346   | 147.00 |
| ● grey       | 1008347   | 147.00 |

## PURI 2.0 CONE

CW, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium



Base: 1-4 x GU10 max. Ø: 5.1 cm | L: 5.5 cm



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## PURI 2.0 CONE

CW, DOUBLE LONG, QPAR51




| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008365   | 69.00 |
| ● black/gold | 1008366   | 69.00 |
| ○ white      | 1008367   | 69.00 |
| ● grey       | 1008368   | 69.00 |



## PURI 2.0 CONE


CW, SINGLE, QPAR51



| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008288   | 41.00 |
| ● black/gold | 1008289   | 41.00 |
| ○ white      | 1008290   | 41.00 |
| ● grey       | 1008291   | 41.00 |

## PURI 2.0 CONE


CW, SWITCH, SINGLE, QPAR51



| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008300   | 48.00 |
| ● black/gold | 1008301   | 48.00 |
| ○ white      | 1008302   | 48.00 |
| ● grey       | 1008303   | 48.00 |

## PURI 2.0 CONE


CW, DOUBLE ASYM., QPAR51



| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008312   | 82.00 |
| ● black/gold | 1008313   | 82.00 |
| ○ white      | 1008314   | 82.00 |
| ● grey       | 1008315   | 82.00 |

## PURI 2.0 CONE


CW, TRIPLE LONG, QPAR51



| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black      | 1008324   | 105.00 |
| ● black/gold | 1008325   | 105.00 |
| ○ white      | 1008326   | 105.00 |
| ● grey       | 1008327   | 105.00 |

## PURI 2.0 CONE


CW, TRIPLE ROUND, QPAR51



| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black      | 1008336   | 121.00 |
| ● black/gold | 1008337   | 121.00 |
| ○ white      | 1008338   | 121.00 |
| ● grey       | 1008339   | 121.00 |

## PURI 2.0 CONE

CW, QUADRUPLE LONG, QPAR51



| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black      | 1008348   | 147.00 |
| ● black/gold | 1008349   | 147.00 |
| ○ white      | 1008350   | 147.00 |
| ● grey       | 1008351   | 147.00 |



1008292 367



## PURI 2.0 DOME

CW, QPAR51



220-240 V ~50/60 Hz

Material: aluminium



Base: 1-4 x GU10 max. Ø: 5.1 cm | L: 5.5 cm



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## PURI 2.0 DOME

CW, DOUBLE LONG, QPAR51




| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008369   | 69.00 |
| ● black/gold | 1008370   | 69.00 |
| ○ white      | 1008371   | 69.00 |
| ● grey       | 1008372   | 69.00 |



## PURI 2.0 DOME


CW, SINGLE, QPAR51



| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008292   | 41.00 |
| ● black/gold | 1008293   | 41.00 |
| ○ white      | 1008294   | 41.00 |
| ● grey       | 1008295   | 41.00 |

## PURI 2.0 DOME


CW, SWITCH, SINGLE, QPAR51



| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008304   | 48.00 |
| ● black/gold | 1008305   | 48.00 |
| ○ white      | 1008306   | 48.00 |
| ● grey       | 1008307   | 48.00 |

## PURI 2.0 DOME


CW, DOUBLE ASYM., QPAR51



| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008316   | 82.00 |
| ● black/gold | 1008317   | 82.00 |
| ○ white      | 1008318   | 82.00 |
| ● grey       | 1008319   | 82.00 |

## PURI 2.0 DOME


CW, TRIPLE LONG, QPAR51



| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black      | 1008328   | 105.00 |
| ● black/gold | 1008329   | 105.00 |
| ○ white      | 1008330   | 105.00 |
| ● grey       | 1008331   | 105.00 |

## PURI 2.0 DOME


CW, TRIPLE ROUND, QPAR51



| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black      | 1008340   | 121.00 |
| ● black/gold | 1008341   | 121.00 |
| ○ white      | 1008342   | 121.00 |
| ● grey       | 1008343   | 121.00 |

## PURI 2.0 DOME

CW, QUADRUPLE LONG, QPAR51



| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black      | 1008352   | 147.00 |
| ● black/gold | 1008353   | 147.00 |
| ○ white      | 1008354   | 147.00 |
| ● grey       | 1008355   | 147.00 |



1008318 + 1008221 367 + 369





## PURI 2.0 TUBE SHADE



Ø: 5.5 cm  
H: 6.5 cm  
Material: aluminium

| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1008214   | 8.00 |
| ○ white     | 1008213   | 8.00 |
| ● gold      | 1008216   | 8.00 |
| ● grey      | 1008215   | 8.00 |
| ● bronze    | 1008217   | 8.00 |
| ● aluminium | 1008376   | 8.00 |

## PURI 2.0 CONE SHADE



Ø: 5.5 cm  
H: 6.5 cm  
Material: aluminium

| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1008219   | 8.00 |
| ○ white     | 1008218   | 8.00 |
| ● gold      | 1008221   | 8.00 |
| ● grey      | 1008220   | 8.00 |
| ● bronze    | 1008222   | 8.00 |
| ● aluminium | 1008377   | 8.00 |

## PURI 2.0 DOME SHADE



Ø: 5.5 cm  
H: 6.5 cm  
Material: aluminium


| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1008224   | 8.00 |
| ○ white     | 1008223   | 8.00 |
| ● gold      | 1008226   | 8.00 |
| ● grey      | 1008225   | 8.00 |
| ● bronze    | 1008227   | 8.00 |
| ● aluminium | 1008378   | 8.00 |








## NOBLO® CW, SINGLE, PHASE, DTW




220-240 V ~50/60 Hz | 350 mA  
Total wattage: 8 W  
Material: aluminium/steel

## NOBLO® CW, DOUBLE, PHASE, DTW



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: aluminium/steel

## NOBLO® CW, TRIPLE, PHASE, DTW



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 22 W  
Material: aluminium/steel



Down

2000 K - 3000 K  
10 lm - 450 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008706   | 102.00 |
| ○ white | 1008703   | 102.00 |



Down

2000 K - 3000 K  
10 lm - 940 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008707   | 163.00 |
| ○ white | 1008704   | 163.00 |



Down

2000 K - 3000 K  
10 lm - 1360 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008708   | 240.00 |
| ○ white | 1008705   | 240.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Decorative ring |           |      |
| ● black         | 1008482   | 6.00 |
| ○ white         | 1008483   | 6.00 |
| ● gold          | 1008484   | 6.00 |
| ● grey          | 1008485   | 6.00 |
| ● bronze        | 1008486   | 6.00 |
| ● copper        | 1008487   | 6.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Decorative ring |           |      |
| ● black         | 1008482   | 6.00 |
| ○ white         | 1008483   | 6.00 |
| ● gold          | 1008484   | 6.00 |
| ● grey          | 1008485   | 6.00 |
| ● bronze        | 1008486   | 6.00 |
| ● copper        | 1008487   | 6.00 |




| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Decorative ring |           |      |
| ● black         | 1008482   | 6.00 |
| ○ white         | 1008483   | 6.00 |
| ● gold          | 1008484   | 6.00 |
| ● grey          | 1008485   | 6.00 |
| ● bronze        | 1008486   | 6.00 |
| ● copper        | 1008487   | 6.00 |






## NOBLO® CW, SINGLE, PHASE

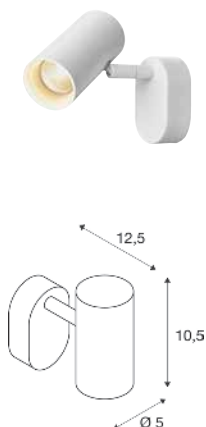


220-240 V ~50/60 Hz | 150 mA  
Total wattage: 6 W  
Material: aluminium/steel

## NOBLO® CW, DOUBLE, PHASE

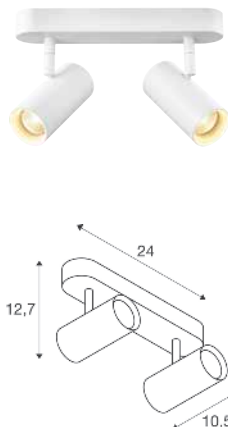

220-240 V ~50/60 Hz | 300 mA  
Total wattage: 12 W  
Material: aluminium/steel

## NOBLO® CW, TRIPLE, PHASE

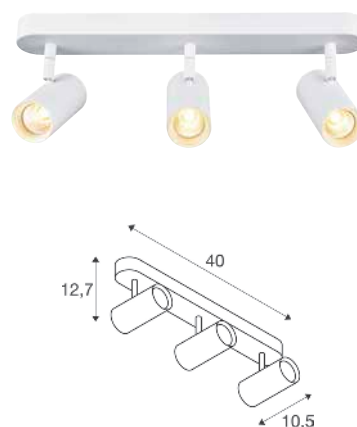

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: aluminium/steel



|         |      |        |
|---------|------|--------|
| 1008709 | Down | 3000 K |
| 1008712 |      | 750 lm |
| 1008715 | Down | 2700 K |
| 1008718 |      | 740 lm |

| Variant                    | Prod. no. | GBP    |
|----------------------------|-----------|--------|
| ● black<br>750 lm   3000 K | 1008712   | 102.00 |
| ● black<br>740 lm   2700 K | 1008718   | 102.00 |
| ○ white<br>750 lm   3000 K | 1008709   | 102.00 |
| ○ white<br>740 lm   2700 K | 1008715   | 102.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Decorative ring |           |      |
| ● black         | 1008482   | 6.00 |
| ○ white         | 1008483   | 6.00 |
| ● gold          | 1008484   | 6.00 |
| ● grey          | 1008485   | 6.00 |
| ● bronze        | 1008486   | 6.00 |
| ● copper        | 1008487   | 6.00 |



|         |      |         |
|---------|------|---------|
| 1008710 | Down | 3000 K  |
| 1008713 |      | 1460 lm |
| 1008716 | Down | 2700 K  |
| 1008719 |      | 1450 lm |

| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ● black<br>1460 lm   3000 K | 1008713   | 163.00 |
| ● black<br>1450 lm   2700 K | 1008719   | 163.00 |
| ○ white<br>1460 lm   3000 K | 1008710   | 163.00 |
| ○ white<br>1450 lm   2700 K | 1008716   | 163.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Decorative ring |           |      |
| ● black         | 1008482   | 6.00 |
| ○ white         | 1008483   | 6.00 |
| ● gold          | 1008484   | 6.00 |
| ● grey          | 1008485   | 6.00 |
| ● bronze        | 1008486   | 6.00 |
| ● copper        | 1008487   | 6.00 |



|         |      |         |
|---------|------|---------|
| 1008711 | Down | 3000 K  |
| 1008714 |      | 2360 lm |
| 1008717 | Down | 2700 K  |
| 1008720 |      | 2350 lm |


| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ● black<br>2360 lm   3000 K | 1008714   | 240.00 |
| ● black<br>2350 lm   2700 K | 1008720   | 240.00 |
| ○ white<br>2360 lm   3000 K | 1008711   | 240.00 |
| ○ white<br>2350 lm   2700 K | 1008717   | 240.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Decorative ring |           |      |
| ● black         | 1008482   | 6.00 |
| ○ white         | 1008483   | 6.00 |
| ● gold          | 1008484   | 6.00 |
| ● grey          | 1008485   | 6.00 |
| ● bronze        | 1008486   | 6.00 |
| ● copper        | 1008487   | 6.00 |



KALU 2.0  
CW, TRIPLE LONG, PHASE

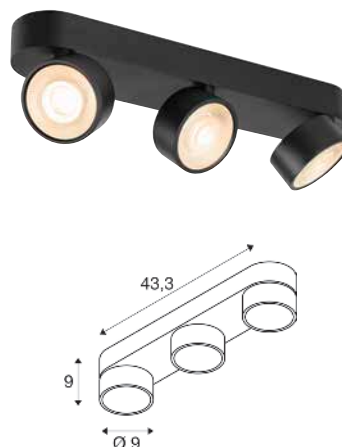

220-240 V ~50/60 Hz | 750 mA  
Total wattage: 28 W  
Material: aluminium

- Discover more lenses and decorative rings in the accessories section



|                |      |         |         |         |
|----------------|------|---------|---------|---------|
| <b>1010270</b> | Down | 2700 K  | 2700 K  | 2700 K  |
| <b>1010272</b> |      | 1350 lm | 1350 lm | 1350 lm |
| <b>1010273</b> | Down | 3000 K  | 3000 K  | 3000 K  |
| <b>1010275</b> |      | 1400 lm | 1400 lm | 1400 lm |

| Variant                      | Prod. no.      | GBP           |
|------------------------------|----------------|---------------|
| ● black<br>3×1350lm   2700 K | <b>1010270</b> | <b>254.00</b> |
| ● black<br>3×1400lm   3000 K | <b>1010273</b> | <b>254.00</b> |
| ○ white<br>3×1350lm   2700 K | <b>1010272</b> | <b>254.00</b> |
| ○ white<br>3×1400lm   3000 K | <b>1010275</b> | <b>254.00</b> |




| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Decorative ring   |           |       |
| ○ white           | 1010135   | 8.00  |
| ● black           | 1010136   | 8.00  |
| ● gold            | 1010138   | 8.00  |
| ● copper          | 1010139   | 8.00  |
| Lens              |           |       |
| ○ transparent 15° | 1010140   | 17.00 |
| ○ transparent 24° | 1010141   | 17.00 |
| ○ transparent 36° | 1010142   | 17.00 |
| ○ transparent 60° | 1010143   | 17.00 |



## PANTILO ROPE 19

CW, E27



220-240 V ~50/60 Hz  
Material: glass



Base: 1 x E27 max. Ø: 10 cm | L: 11 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● gold   | 1007592   | 138.00 |
| ○ silver | 1007593   | 138.00 |




E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP

## PANTILO ROPE 27

CW, E27



220-240 V ~50/60 Hz  
Material: glass



Base: 1 x E27 max. Ø: 15 cm | L: 11 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● gold   | 1007591   | 172.00 |
| ○ silver | 1007590   | 172.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP




E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F

Prod. no.: 1012471 14.00 GBP

## MOTUNA

CW, PHASE

NEW



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Power consumption: 8  
Material: aluminium




|         |                   |
|---------|-------------------|
| 1010217 | 2700 K<br>750 lm  |
| 1010365 | 2700 K<br>1000 lm |

| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black/gold<br>750 lm  | 1010217   | 172.00 |
| ● white/gold<br>1000 lm | 1010365   | 172.00 |



## CYFT WAVE CW, PHASE



220-240 V ~50/60 Hz | 500 mA

Total wattage: 6.5 W

Material: aluminium/acrylic

- Suitable for outdoor use

1008024 376

1007608 377




|                  |        |        |        |
|------------------|--------|--------|--------|
| 1008024 Indirect | 2700 K | 3000 K | 4000 K |
|                  | 240 lm | 260 lm | 280 lm |
| 1008941          | 2700 K | 3000 K | 4000 K |
|                  | 230 lm | 250 lm | 250 lm |

| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black/clear<br>240 lm | 1008024   | 172.00 |
| ● black/amber<br>230 lm | 1008941   | 172.00 |




## CYFT CW, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 6.5 W  
Material: aluminium/acrylic

## CYFT DOME CW, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 6.5 W  
Material: aluminium/glass

- Suitable for outdoor use

## CYFT DECORATIVE RING



Ø: 13.1 cm  
H: 2.5 cm  
Material: steel

- Grate ring suitable for outdoor use

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ○ white  | 1007611   | 16.00 |
| ● brass  | 1007610   | 26.00 |
| ● chrome | 1007609   | 22.00 |
| ● bronze | 1008025   | 26.00 |
| ● rust   | 1008943   | 26.00 |
| ● nickel | 1008026   | 22.00 |



Indirect

|        |        |        |
|--------|--------|--------|
| 2700 K | 3000 K | 4000 K |
| 330 lm | 350 lm | 380 lm |



|        |        |        |
|--------|--------|--------|
| 2700 K | 3000 K | 4000 K |
| 290 lm | 310 lm | 310 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007608   | 172.00 |


| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/opaque | 1008944   | 172.00 |



1010210 379



## CYFT XL CW, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 15 W  
Material: aluminium/glass


- Suitable for outdoor use



| 2700 K | 3000 K | 4000 K |
|--------|--------|--------|
| 810 lm | 920 lm | 930 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010210   | 218.00 |

## CYFT WAVE XL CW, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 15 W  
Material: aluminium/glass

- Suitable for outdoor use



| 2700 K | 3000 K | 4000 K |
|--------|--------|--------|
| 850 lm | 950 lm | 960 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010211   | 218.00 |

## CYFT XL DECORATIVE RING



Ø: 20 cm  
H: 2.3 cm  
Material: aluminium

- Grate ring suitable for outdoor use

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ○ white  | 1010213   | 35.00 |
| ● brass  | 1010214   | 35.00 |
| ● chrome | 1010215   | 35.00 |
| ● rust   | 1010212   | 35.00 |







## ASTO TUBE

CW, GU10



220-240 V ~50/60 Hz | 500 mA

Total wattage: 15 W

Material: aluminium/glass

- Decorative rings available as accessory



Base: 1-4 x GU10



GU10 | 6W | 38°

450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5W | 45°


350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## ASTO TUBE


CW, SINGLE, GU10



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006423   | 43.00 |
| ○ white | 1006424   | 43.00 |

## ASTO TUBE

CW, DOUBLE, GU10



| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006425   | 82.00 |
| ○ white | 1006426   | 82.00 |

## ASTO TUBE

DECORATIVE REFLECTOR




Ø: 6.8 cm

H: 4 cm

Material: polycarbonate (PC)

## ASTO TUBE


CW, TRIPLE, GU10



| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1006427   | 117.00 |
| ○ white | 1006428   | 117.00 |

## ASTO TUBE

CW, QUADRUPLE, GU10



| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1006429   | 142.00 |
| ○ white | 1006430   | 142.00 |

| Variant        | Prod. no. | GBP  |
|----------------|-----------|------|
| ● black/chrome | 1007190   | 4.00 |
| ● gold         | 1006450   | 4.00 |
| ● chrome       | 1006449   | 4.00 |
| ● copper       | 1006451   | 4.00 |





## KALU

### CW, QPAR111



220-240 V ~50/60 Hz  
Material: aluminium



Base: 1-4 x GU10




GU10 | 12 W | 55°  
670 lm | 2700 K | EEC = G



Prod. no.: 1005297 73.00 GBP

## KALU


### CW, SINGLE, QPAR111



| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● black     | 1000702   | 66.00 |
| ○ white     | 147301    | 66.00 |
| ● aluminium | 147306    | 68.00 |

## KALU


### CW, DOUBLE, QPAR111



| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| ● black     | 1000703   | 130.00 |
| ○ white     | 147311    | 130.00 |
| ● aluminium | 147316    | 138.00 |

## KALU


### CW, TRIPLE, QPAR111



| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| ● black     | 1000704   | 180.00 |
| ○ white     | 147321    | 180.00 |
| ● aluminium | 147326    | 189.00 |

## KALU

### CW, QUAD, QPAR111



| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| ● black     | 1002023   | 252.00 |
| ○ white     | 1002024   | 252.00 |
| ● aluminium | 1002025   | 260.00 |



132020


385





## ALTRA DICE

CW, DOUBLE, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium/steel



Base: 2 × GU10

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 151531    | 100.00 |




GU10 | 6 W | 36°  
360 lm | 2200 K-2700 K | EEC = G



Prod. no.: 1005273 9.00 GBP

## SPOT 79

CW, QPAR51



220-240 V ~50/60 Hz  
Material: aluminium



Base: 1 × GU10 max. Ø: 5.1 cm | L: 5.7 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 132020    | 29.00 |
| ○ white | 132021    | 29.00 |
| ● grey  | 132024    | 29.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F





Prod. no.: 1012469 23.00 GBP

1012220 387

## SENDER 2.0 12

CW, ROUND/SQUARE, PHASE

NEW



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 7.2 W  
Material: aluminium/plastic PC





|              |        |        |
|--------------|--------|--------|
| 1012214 Down | 3000 K | 4000 K |
|              | 500 lm | 500 lm |
| 1012213 Down | 3000 K | 4000 K |
|              | 550 lm | 600 lm |

| Variant         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| ○ white, round  | 1012213   | 60.00 |
| ○ white, square | 1012214   | 60.00 |



## SENDER 2.0 18

CW, ROUND/SQUARE, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 14 W  
Material: aluminium/plastic PC






|              |         |         |
|--------------|---------|---------|
| 1012216 Down | 3000 K  | 4000 K  |
|              | 1300 lm | 1350 lm |
| 1012215 Down | 3000 K  | 4000 K  |
|              | 1250 lm | 1350 lm |

| Variant         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| ○ white, round  | 1012215   | 77.00 |
| ○ white, square | 1012216   | 77.00 |

## SENDER 2.0 24

CW, ROUND/SQUARE, PHASE

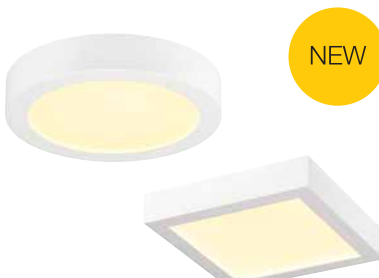

220-240 V | 700 mA  
Total wattage: 23 W  
Material: aluminium/plastic PC





|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 2250 lm | 2400 lm |

| Variant         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| ○ white, round  | 1012217   | 96.00 |
| ○ white, square | 1012218   | 96.00 |

## SENDER 2.0 30

CW, ROUND/SQUARE, PHASE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 28 W  
Material: aluminium/plastic PC




|              |         |         |
|--------------|---------|---------|
| 1012220 Down | 3000 K  | 4000 K  |
|              | 2650 lm | 2800 lm |
| 1012219 Down | 3000 K  | 4000 K  |
|              | 2700 lm | 2900 lm |

| Variant         | Prod. no. | GBP    |
|-----------------|-----------|--------|
| ○ white, round  | 1012219   | 113.00 |
| ○ white, square | 1012220   | 113.00 |



# SENDER 2.0 12 CW, ROUND/SQUARE, DALI

NEW



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 7 W  
Material: aluminium/plastic PC





|              |        |        |
|--------------|--------|--------|
| 1012222 Down | 3000 K | 4000 K |
|              | 500 lm | 500 lm |
| 1012221 Down | 3000 K | 4000 K |
|              | 550 lm | 600 lm |

| Variant         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| ○ white, round  | 1012221   | 96.00 |
| ○ white, square | 1012222   | 96.00 |



## SENDER 2.0 18




CW, ROUND/SQUARE, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 13 W  
Material: aluminium/plastic PC

## SENDER 2.0 24


CW, ROUND/SQUARE, DALI

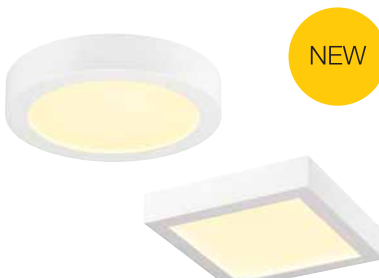

220-240 V | 700 mA  
Total wattage: 23 W  
Material: aluminium/plastic PC

## SENDER 2.0 30

CW, ROUND/SQUARE, DALI



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 27 W  
Material: aluminium/plastic PC



|         |      |         |         |
|---------|------|---------|---------|
| 1012224 | Down | 3000 K  | 4000 K  |
|         |      | 1300 lm | 1350 lm |
| 1012223 | Down | 3000 K  | 4000 K  |
|         |      | 1250 lm | 1350 lm |

| Variant         | Prod. no. | GBP    |
|-----------------|-----------|--------|
| ○ white, round  | 1012223   | 113.00 |
| ○ white, square | 1012224   | 113.00 |



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 2250 lm | 2400 lm |

| Variant         | Prod. no. | GBP    |
|-----------------|-----------|--------|
| ○ white, round  | 1012225   | 130.00 |
| ○ white, square | 1012226   | 130.00 |



|         |      |         |         |
|---------|------|---------|---------|
| 1012228 | Down | 3000 K  | 4000 K  |
|         |      | 2650 lm | 2800 lm |
| 1012227 | Down | 3000 K  | 4000 K  |
|         |      | 2700 lm | 2900 lm |

| Variant         | Prod. no. | GBP    |
|-----------------|-----------|--------|
| ○ white, round  | 1012227   | 147.00 |
| ○ white, square | 1012228   | 147.00 |

LIPSY® 2.0 30  
CW, DOME



220-240 V ~50/60 Hz | 160 / 230 mA  
Total wattage: 7.1 W / 11 W  
Material: steel/PMMA



|       |         |         |
|-------|---------|---------|
| 7.1 W | 3000 K  | 4000 K  |
|       | 900 lm  | 950 lm  |
| 11 W  | 3000 K  | 4000 K  |
|       | 1250 lm | 1300 lm |

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ○ white/opaque | 1012182 ● | 68.00 |

LIPSY® 2.0 30  
CW, HF, DOME



220-240 V ~50/60 Hz | 200 mA  
Total wattage: 13 W  
Material: steel/PMMA



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 1400 lm | 1500 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ○ white/opaque | 1012184 ● | 105.00 |




## LIPSY® 2.0 40

CW, DOME



NEW



220-240 V ~50/60 Hz | 75 / 105 / 150 mA  
Total wattage: 9 W / 18 W  
Material: steel/PMMA



|      |         |         |
|------|---------|---------|
| 9 W  | 3000 K  | 4000 K  |
|      | 1150 lm | 1250 lm |
| 18 W | 3000 K  | 4000 K  |
|      | 2200 lm | 2350 lm |


| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ○ white/opaque | 1012186   | 88.00 |

## LIPSY® 2.0 40

CW, HF, DOME



NEW



220-240 V ~50/60 Hz | 450 mA  
Total wattage: 18 W  
Material: steel/PMMA



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 2000 lm | 2150 lm |


| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ○ white/opaque | 1012188   | 130.00 |

## LIPSY® 2.0 40

CW, 3H EM, DOME



NEW



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19.5 W  
Material: steel/PMMA



|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 2000 lm | 2150 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ○ white/opaque | 1012190   | 214.00 |



LIPSY® 2.0 30  
CW, DRUM



220-240 V ~50/60 Hz | 160 / 230 mA  
Total wattage: 7.1 W / 11 W  
Material: steel/PMMA



|       |         |         |
|-------|---------|---------|
| 7.1 W | 3000 K  | 4000 K  |
|       | 900 lm  | 950 lm  |
| 11 W  | 3000 K  | 4000 K  |
|       | 1250 lm | 1300 lm |

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ○ white/opaque | 1012183 ● | 68.00 |

LIPSY® 2.0 30  
CW, HF, DRUM



220-240 V ~50/60 Hz | 200 mA  
Total wattage: 13 W  
Material: steel/PMMA




|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 1400 lm | 1500 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ○ white/opaque | 1012185 ● | 105.00 |




## LIPSY® 2.0 40

CW, DRUM

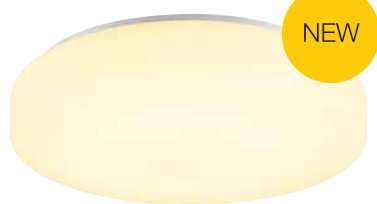

NEW



220-240 V ~50/60 Hz | 75 / 105 / 150 mA  
Total wattage: 9 W / 18 W  
Material: steel/PMMA




|      |         |         |
|------|---------|---------|
| 9 W  | 3000 K  | 4000 K  |
|      | 1150 lm | 1250 lm |
| 18 W | 3000 K  | 4000 K  |
|      | 2200 lm | 2350 lm |


| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ○ white/opaque | 1012187   | 88.00 |

## LIPSY® 2.0 40

CW, HF, DRUM

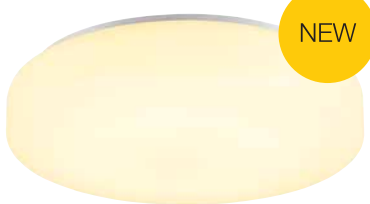

NEW



220-240 V ~50/60 Hz | 450 mA  
Total wattage: 18 W  
Material: steel/PMMA




|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 2000 lm | 2150 lm |


| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ○ white/opaque | 1012189   | 130.00 |

## LIPSY® 2.0 40

CW, 3H EM, DRUM

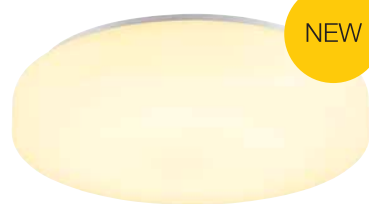

NEW



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19.5 W  
Material: steel/PMMA




|      |         |         |
|------|---------|---------|
| Down | 3000 K  | 4000 K  |
|      | 2000 lm | 2150 lm |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ○ white/opaque | 1012191   | 214.00 |



1005087    394

## SIMA CW, SQUARE, PHASE




220-240 V ~50/60 Hz | 320 mA  
Total wattage: 24 W  
Material: polycarbonate (PC)



3000 K  
2200 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1005087   | 135.00 |

## SIMA CW, SQUARE, SENSOR



220-240 V ~50/60 Hz | 320 mA  
Total wattage: 24 W  
Material: polycarbonate (PC)




3000 K  
2200 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1005088   | 156.00 |



## MELAN CW, E27



220-240 V ~50/60 Hz  
Material: aluminium/glass



Base: 1 x E27 max. Ø: 7 cm L: 16 cm

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| ● aluminium | 155236    | 109.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP




E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no.: 1012471 14.00 GBP

## BATTEN 60 CW



220-240 V ~50/60 Hz | 110 mA  
Total wattage: 9 W  
Material: polycarbonate (PC)


- Switch on light housing
- Feed-in not included



|         | 3000 K | 4000 K |
|---------|--------|--------|
| 1006123 | 940 lm | 980 lm |

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ○ white<br>940 lm | 1006123   | 47.00 |

## BATTEN 120 CW



220-240 V ~50/60 Hz | 220 mA  
Total wattage: 18 W  
Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included



|         | 3000 K  | 4000 K  |
|---------|---------|---------|
| 1006124 | 1900 lm | 1960 lm |

| Variant            | Prod. no. | GBP   |
|--------------------|-----------|-------|
| ○ white<br>1900 lm | 1006124   | 58.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Feed-in           |           |       |
| ○ white           | 1006125   | 10.00 |
| Mounting brackets |           |       |
| ○ white           | 1006126   | 2.00  |
| Connector         |           |       |
| ○ white           | 1006127   | 6.00  |
| Direct connector  |           |       |
| ○ white           | 1006128   | 3.00  |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Feed-in           |           |       |
| ○ white           | 1006125   | 10.00 |
| Mounting brackets |           |       |
| ○ white           | 1006126   | 2.00  |
| Connector         |           |       |
| ○ white           | 1006127   | 6.00  |
| Direct connector  |           |       |
| ○ white           | 1006128   | 3.00  |



1010206 409



# INDOOR | TABLE AND FLOOR LIGHTS



SECKET  
WUD TL | 399



SECKET  
VARYT | 401

MIX  
match



LED  
QUIMERA | 403



LED  
ONE STRAIGHT | 405



LED  
ONE BOW | 405



SECKET  
SUN | 407



SECKET  
PANTILLO SLIM | 408



SECKET  
PANTILLO | 409



SECKET  
PANTILLO ROPE | 409



SECKET  
FENDA | 411-413



MIX  
match



LED  
MECANICA 2.0 | 414

NEW



LED  
KARPO | 415



SECKET  
PHELIA | 415



LED  
WORKLIGHT EASY | 417



LED  
WORKLIGHT | 417



NEW



LED  
WORKLIGHT PRO | 419




1010402 399





## WUD

TL, E27, CYLINDRICAL



220-240 V ~50/60 Hz  
Material: Wood

- Natural material
- Euro plug and switch



Base: 1xE27      max. Ø: 12 cm | L: 18 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● beige | 1010402   | 121.00 |



E27 | 6W | 330°  
570 lm | 2200K | EEC = F




Prod. no.:      1008152      55.00 GBP



1008113 + 1008023 401



## VARYT TL, E14



220-240 V ~50/60 Hz  
Material: Aluminium

- Euro plug with switch in the supply cable



Base: 1xE14 max. Ø: 3.8 cm | L: 11 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● black  | 1008109   | 78.00  |
| ○ white  | 1008110   | 78.00  |
| ● brass  | 1008112   | 105.00 |
| ● chrome | 1008111   | 88.00  |
| ● copper | 1008113   | 105.00 |



E14 | 4 W | 320°  
380 lm | 2700 K | EEC = F



Prod. no.: 1005284 6.00 GBP



| Product                        | Prod. no. | GBP   |
|--------------------------------|-----------|-------|
| Glass shade for PD, WL, CL, TL |           |       |
| ● smoky grey                   | 1007858   | 69.00 |
| ○ white                        | 1007859   | 61.00 |
| ○ white                        | 1007860   | 66.00 |
| ● amber                        | 1008023   | 69.00 |
| Glass shade for CL, WL, TL, PD |           |       |
| ○ white                        | 1008119   | 52.00 |

## VARYT GLOBE GLASS SHADE



Ø: 12 cm  
H: 12.8 cm  
Material: Glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008119   | 52.00 |

## VARYT DIAMOND GLASS SHADE



Ø: 12 cm  
H: 12.7 cm  
Material: Glass

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● smoky grey | 1007858   | 69.00 |
| ● amber      | 1008023   | 69.00 |

## VARYT LINED GLASS SHADE



Ø: 12 cm  
H: 13 cm  
Material: Glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007859   | 61.00 |

## VARYT PLEATED GLASS SHADE




Ø: 11.5 cm  
H: 13.5 cm  
Material: Glass

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007860   | 66.00 |



1008033 177

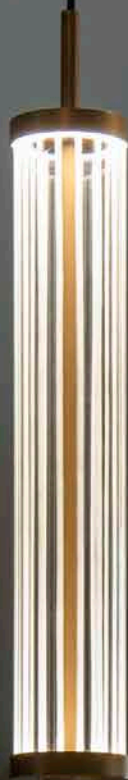


1008038 403





## QUIMERA TL



220-240 V ~50/60 Hz | 350 mA

Total wattage: 4 W

Material: Aluminium/Glass

- Power supply



Indirect

2700 K  
150 lm

3000 K  
160 lm

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| brass       | 1008741   | 285.00 |
| dark bronze | 1008740   | 285.00 |
| dark copper | 1008742   | 285.00 |




1006353

405



## ONE STRAIGHT FL



220-240 V ~50/60 Hz | 24 V  
Total wattage: 22 W  
Material: steel/polycarbonate (PC)


- Euro plug



|      |        |        |
|------|--------|--------|
| Up   | 2700 K | 3000 K |
|      | 600 lm | 600 lm |
| Down | 2700 K | 3000 K |
|      | 600 lm | 600 lm |

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1007966   | 722.00 |
| ● black/brass | 1007964   | 722.00 |
| ○ white       | 1007965   | 722.00 |

## ONE BOW FL



UGR  
22

220-240 V ~50/60 Hz | 24 V  
Total wattage: 22 W  
Material: steel/polycarbonate (PC)

- Euro plug



|      |        |        |
|------|--------|--------|
| Up   | 2700 K | 3000 K |
|      | 600 lm | 600 lm |
| Down | 2700 K | 3000 K |
|      | 600 lm | 600 lm |

| Variant       | Prod. no. | GBP      |
|---------------|-----------|----------|
| ● black       | 1007963   | 1,058.00 |
| ● black/brass | 1007961   | 1,058.00 |
| ○ white       | 1007962   | 1,058.00 |




1009143 407





## SUN TL, G9

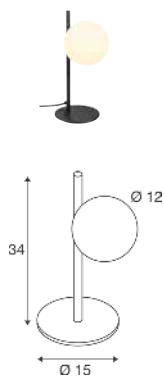

220-240 V ~50/60 Hz  
Material: Steel

- Euro plug with switch in the supply cable



Base: 1xG69 max. Ø: 1.9 cm | L: 6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1009143   | 105.00 |



G9 | 4 W | 300°  
400 lm | 3000 K | EEC = E

Prod. no.: 1005286 8.00 GBP

## SUN FL, G9



220-240 V ~50/60 Hz  
Material: Steel

- Euro plug with switch in the supply cable



Base: 1xG69 max. Ø: 1.9 cm | L: 6 cm


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1009142   | 172.00 |



G9 | 4 W | 300°  
400 lm | 3000 K | EEC = E

Prod. no.: 1005286 8.00 GBP

## PANTILO SLIM TL, E27



220-240 V ~50/60 Hz

Material: Steel

- Dimmable via the switch on the power cable
- Euro plug with switch in the supply cable



Base: 1xE27 max. Ø: 4.7 cm | L: 24 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ○ white  | 1010348   | 130.00 |
| ● gold   | 1010347   | 130.00 |
| ● chrome | 1010345   | 130.00 |
| ● copper | 1010346   | 130.00 |



E27 | 6 W | 330°  
570 lm | 2200 K | EEC = F




Prod. no.: 1008152 55.00 GBP

1010209 409




## PANTILO TL, E27



220-240 V ~50/60 Hz  
Material: Steel

- Euro plug with switch in the supply cable


## PANTILO ROPE 19 TL, E27



220-240 V ~50/60 Hz  
Material: Steel

- Euro plug with switch in the supply cable

## PANTILO ROPE 27 FL, E27



220-240 V ~50/60 Hz  
Material: Steel

- Euro plug with switch in the supply cable



Base: 1xE27 max. Ø: 6.8 cm | L: 14 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ○ white  | 1010352   | 130.00 |
| ● gold   | 1010351   | 130.00 |
| ● chrome | 1010349   | 130.00 |
| ● copper | 1010350   | 130.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP



Base: 1xE27 max. Ø: 6.8 cm | L: 12 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● gold   | 1010208   | 138.00 |
| ○ silver | 1010209   | 138.00 |



E27 | 4 W | 280°  
830 lm | 2700 K | EEC = A



Prod. no.: 1008641 7.00 GBP



Base: 1xE27 max. Ø: 6.8 cm | L: 12 cm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● gold   | 1010206   | 256.00 |
| ○ silver | 1010207   | 256.00 |



E27 | 4 W | 280°  
830 lm | 2700 K | EEC = A



Prod. no.: 1008641 7.00 GBP


155540 + 155592    411 + 413







## FENDA TL, E27

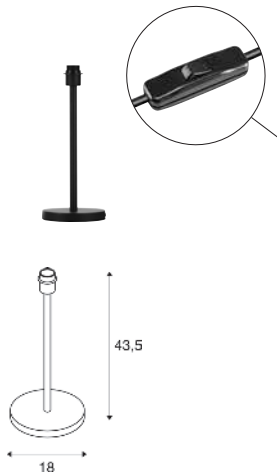

220-240 V ~50/60 Hz  
Material: Steel/Plastic

- Euro plug and switch



Base: 1xE27

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007938   | 70.00 |




E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP

## FENDA FL, E27

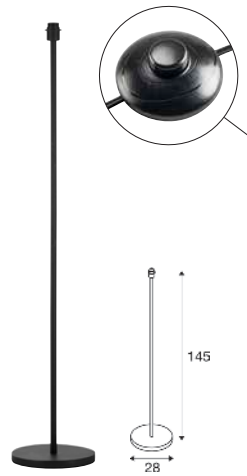

220-240 V ~50/60 Hz  
Material: Steel/Plastic

- Euro plug and switch



Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007939   | 126.00 |




E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP

## FENDA TL, E27

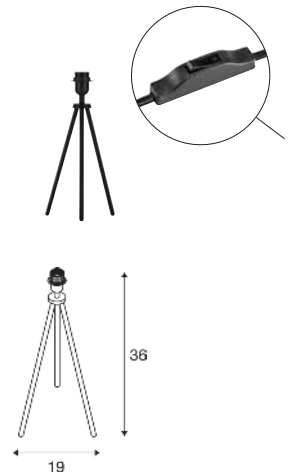

220-240 V ~50/60 Hz  
Material: Aluminium/Plastic

- Euro plug and switch



Base: 1xE27

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007937   | 70.00 |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F




Prod. no.: 1005265 23.00 GBP



155490 + 1004775 413



## FENDA FL, E27

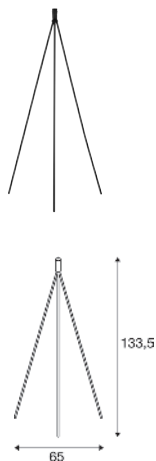

220-240 V ~50/60 Hz  
Material: Aluminium/Plastic

- Switch on light body
- Euro plug



Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007936   | 117.00 |



E27 | 13 W | 220°  
1300lm | 2700K | EEC = F



Prod. no.: 1005302 11.00 GBP

## FENDA 30 CM, ROUND



Ø: 30 cm  
H: 20 cm  
Material: Textile/Steel

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/copper | 155592    | 62.00 |
| ○ white        | 155582    | 47.00 |
| ● grey         | 1004774   | 47.00 |
| ● beige        | 155583    | 47.00 |

## FENDA 45 CM, ROUND



Ø: 45.5 cm  
H: 28 cm  
Material: Textile/Steel

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/copper | 156122    | 77.00 |
| ○ white        | 156111    | 73.00 |
| ● grey         | 1004775   | 73.00 |
| ● beige        | 156113    | 73.00 |



| Product                                  | Prod. no. | GBP   |
|------------------------------------------|-----------|-------|
| Acrylic glass cover, for FENDA Ø 45.5 cm |           |       |
| ○ white                                  | 156100    | 39.00 |

## FENDA 70 CM, ROUND



Ø: 70 cm  
H: 36 cm  
Material: Textile/Steel

- Not suitable for Fenda Bow.

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/copper | 1000580   | 113.00 |
| ○ white        | 1000579   | 100.00 |



| Product                               | Prod. no. | GBP   |
|---------------------------------------|-----------|-------|
| Acrylic glass cover for FENDA Ø 70 cm |           |       |
| ○ white                               | 1000957   | 82.00 |




1012005 414

## MECANICA 2.0

TL, LED, CCT



NEW



220-240 V ~50/60 Hz | 190 mA

Total wattage: 9 W

Material: Aluminium/Plastic




|        |        |        |
|--------|--------|--------|
| 2700 K | 4000 K | 6500 K |
| 460 lm | 520 lm | 570 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1012003   | 197.00 |
| ○ white | 1012004   | 197.00 |
| ● beige | 1012005   | 197.00 |



## KARPO TL

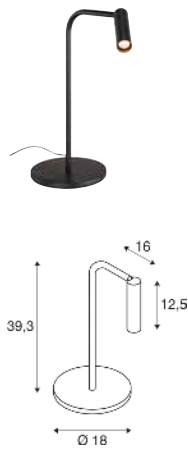

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 6.2 W  
Material: Aluminium


- Switch on light body
- Power supply



3000 K  
360 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007946   | 159.00 |

## KARPO FL

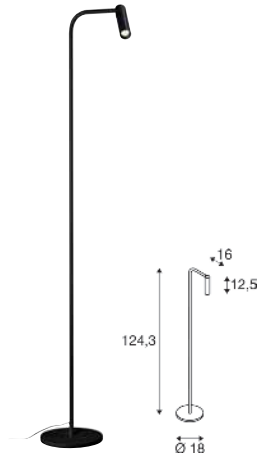

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 6.2 W  
Material: Aluminium


- Switch on light body
- Power supply



3000 K  
360 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007948   | 210.00 |

## PHELIA FL, E27

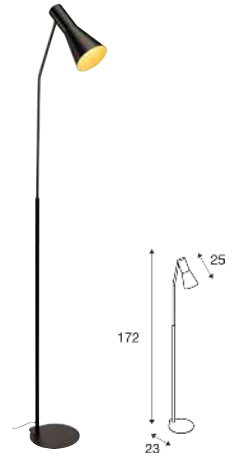

220-240 V ~50/60 Hz  
Material: Aluminium/Steel

- Switch on light body
- Safety plug and switch



Base: 1xE27 max. Ø: 5.3 cm | L: 18 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007967   | 210.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F




Prod. no.: 1005303 9.00 GBP



1010393 417



## WORKLIGHT EASY FL 940

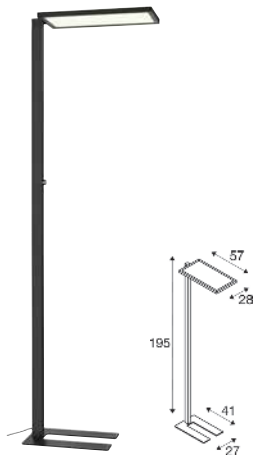

220-240 V ~0/50/60 Hz | 1500 mA  
Total wattage: 60 W  
Material: Aluminium/Steel


- Safety plug



|      |                  |
|------|------------------|
| Up   | 4000K<br>4230 lm |
| Down | 4000K<br>2920 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010393   | 478.00 |
| ○ white | 1010394   | 478.00 |

## WORKLIGHT TL

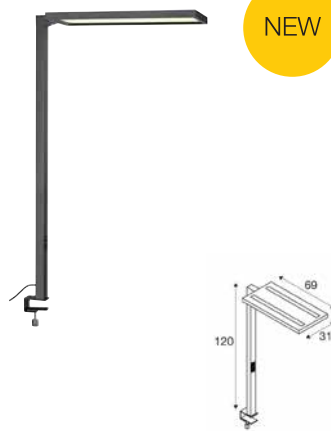

NEW



200-240 V ~50/60 Hz | 48 V  
Total wattage: 79 W  
Material: Aluminium


- Safety plug




|         |                  |
|---------|------------------|
| Down    | 4000K<br>2250 lm |
| 1012195 |                  |
| Up      | 4000K<br>9500 lm |
| Down    | 4000K<br>2100 lm |
| 1012196 |                  |
| Up      | 4000K<br>8850 lm |
| Down    | 4000K<br>2200 lm |
| 1012197 |                  |
| Up      | 4000K<br>9050 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1012196   | 604.00 |
| ○ white | 1012195   | 604.00 |
| ● grey  | 1012197   | 604.00 |

## WORKLIGHT FL

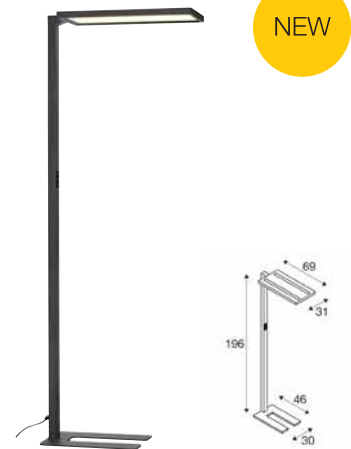

NEW



200-240 V ~50/60 Hz | 48 V  
Total wattage: 79 W  
Material: Aluminium

- Safety plug



|         |                  |
|---------|------------------|
| Down    | 4000K<br>2250 lm |
| 1012192 |                  |
| Up      | 4000K<br>9500 lm |
| Down    | 4000K<br>2100 lm |
| 1012193 |                  |
| Up      | 4000K<br>8850 lm |
| Down    | 4000K<br>2200 lm |
| 1012194 |                  |
| Up      | 4000K<br>9050 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1012193   | 730.00 |
| ○ white | 1012192   | 730.00 |
| ● grey  | 1012194   | 730.00 |






1007462 419



## WORKLIGHT PRO FL, SINGLE

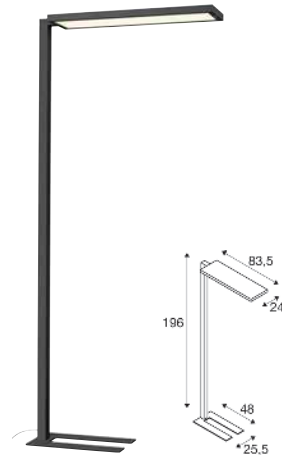

200-240 V ~50/60 Hz | 48 V

Total wattage: 100 W

Material: Aluminium/Steel


- Safety plug



|          |        |          |
|----------|--------|----------|
| Direct   | 4000 K | 2300 lm  |
| Indirect | 4000 K | 10700 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007462   | 823.00 |
| ○ white | 1007463   | 823.00 |
| ● grey  | 1007464   | 823.00 |

## WORKLIGHT PRO FL, DOUBLE

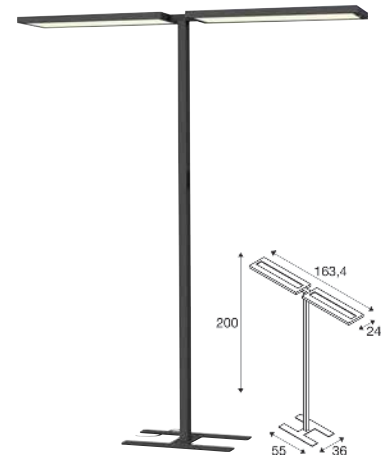

200-240 V ~50/60 Hz | 48 V

Total wattage: 150 W

Material: Aluminium/Steel

- Safety plug



|          |        |          |
|----------|--------|----------|
| Direct   | 4000 K | 4400 lm  |
| Indirect | 4000 K | 15600 lm |

| Variant | Prod. no. | GBP      |
|---------|-----------|----------|
| ● black | 1007465   | 1,520.00 |
| ○ white | 1007466   | 1,520.00 |
| ● grey  | 1007467   | 1,520.00 |



1010336 441





# INDOOR | 48 V SYSTEMS


|                                                                                    |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   |  |  |   |  |                                                                                     |
| LED<br>KALU 2.0   439                                                              | LED<br>LIGHT EYE® 2.0   439                                                       | LED<br>DYSKO   441                                                                | LED<br>NUMINOS®   442-449                                                           |                                                                                     |                                                                                     |
|   |  |  |    |   |  |
| LED<br>IN-LINE   450-453                                                           | LED<br>FIX-IT!   454-457                                                          |                                                                                   | LED<br>GRIP! FLAT   459                                                             | LED<br>GRIP! S   460-461                                                            |                                                                                     |
|  |  |  |  |                                                                                     |                                                                                     |
| LED<br>GRIP! S   463                                                               | LED<br>GRIP! S MINI   463                                                         | LED<br>GRIP! M   465                                                              | LED<br>LALU® SET   466-467                                                          |                                                                                     |                                                                                     |

# 48V TRACK SYSTEM

The 48V track system combines premium design with maximum flexibility. Different track geometries (straight, curved, L-, T- or X-shaped), together with surface-mounted, recessed and suspended installation options, offer extensive possibilities for a wide range of interior concepts..

The three-dimensional track layout enables seamless transitions from ceiling to wall. The integrated DALI control system enables individual control of each light and delivers flicker-free, precisely dimmable lighting.


The result is a future-proof track system for residential and commercial applications.

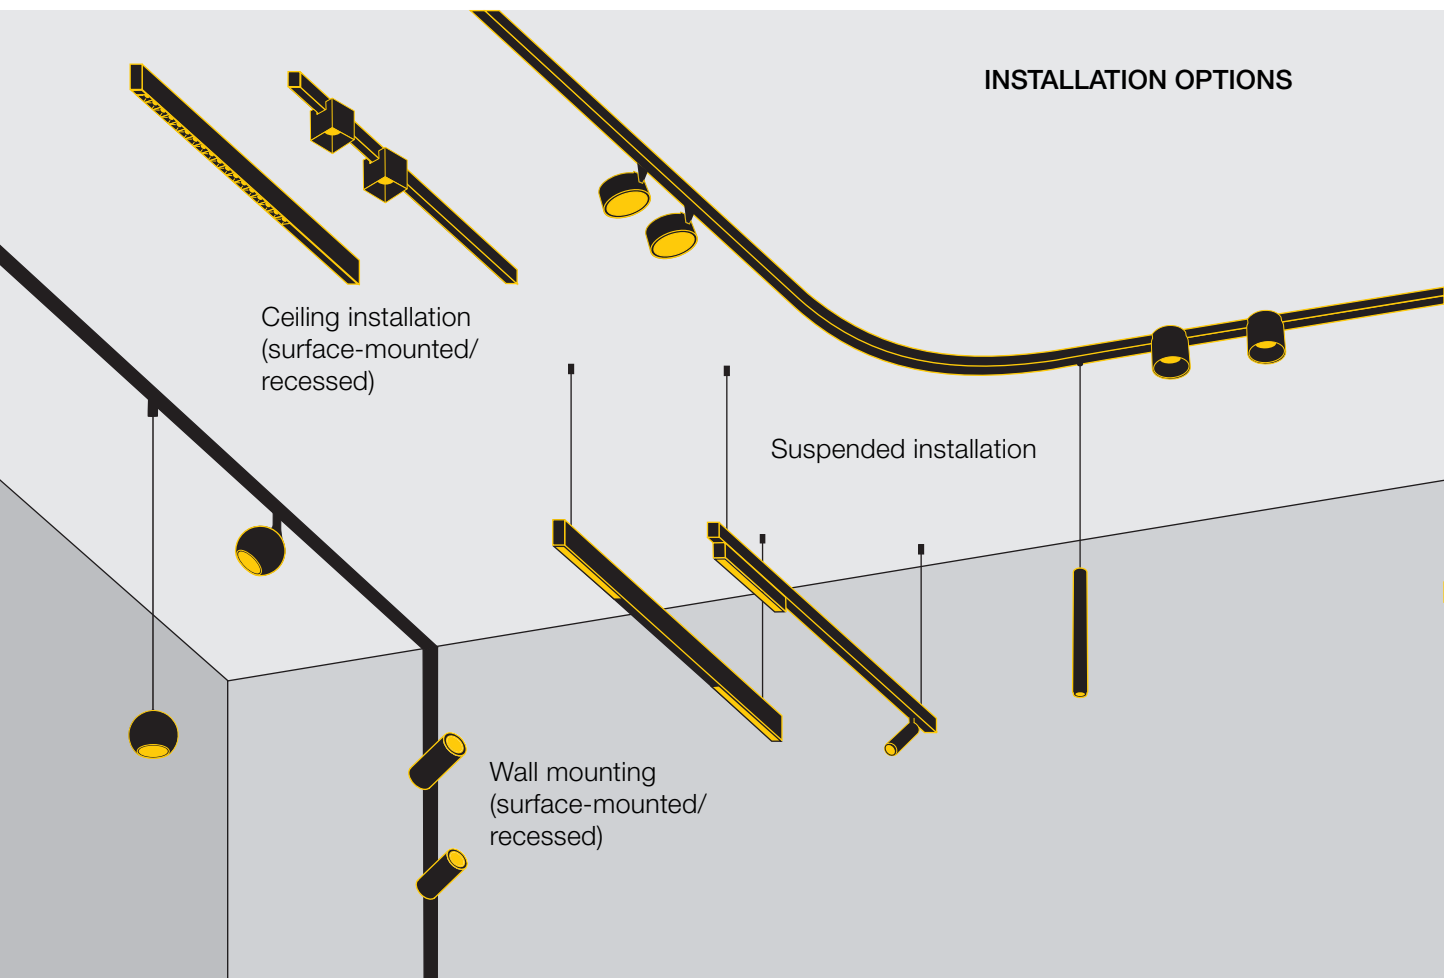


# SYSTEM STRUCTURE

## SELECT TRACK



Standard  
surface-mounted track



Deep  
surface-mounted track




Recessed track  
for plasterboard ceilings

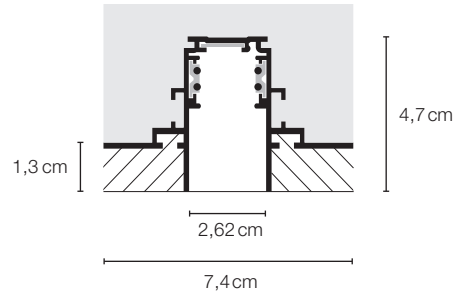

## DEFINE THE GEOMETRY

and select the appropriate accessories and LED drivers



## SELECT LIGHTS

Choose from a wide range of decorative and functional lights to tailor the lighting concept to your space.



**Spots** for directional accent lighting and highlighting objects



**Pendant lights** for decorative accents and zoned lighting

**Linear lights** for uniform general and area lighting

## 48V SYSTEM TRACK



### STANDARD SURFACE-MOUNTED TRACK, DALI



|                     | 100 cm                   | 100 cm                   | 200 cm                   | 200 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 48 V                     | 48 V                     | 48 V                     | 48 V                     |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 100 cm x 2.6 cm x 2.3 cm | 100 cm x 2.6 cm x 2.3 cm | 200 cm x 2.6 cm x 2.3 cm | 200 cm x 2.6 cm x 2.3 cm |
| Prod. no.           | <b>1006541</b>           | <b>1006542</b>           | <b>1006543</b>           | <b>1006544</b>           |
| GBP                 | <b>44.00</b>             | <b>44.00</b>             | <b>75.00</b>             | <b>75.00</b>             |

|                     | 300 cm                   | 300 cm                   | 400 cm                   | 400 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 48 V                     | 48 V                     | 48 V                     | 48 V                     |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 300 cm x 2.6 cm x 2.3 cm | 300 cm x 2.6 cm x 2.3 cm | 400 cm x 2.6 cm x 2.3 cm | 400 cm x 2.6 cm x 2.3 cm |
| Prod. no.           | <b>1006545</b>           | <b>1006546</b>           | <b>1006547</b>           | <b>1006548</b>           |
| GBP                 | <b>117.00</b>            | <b>117.00</b>            | <b>159.00</b>            | <b>159.00</b>            |




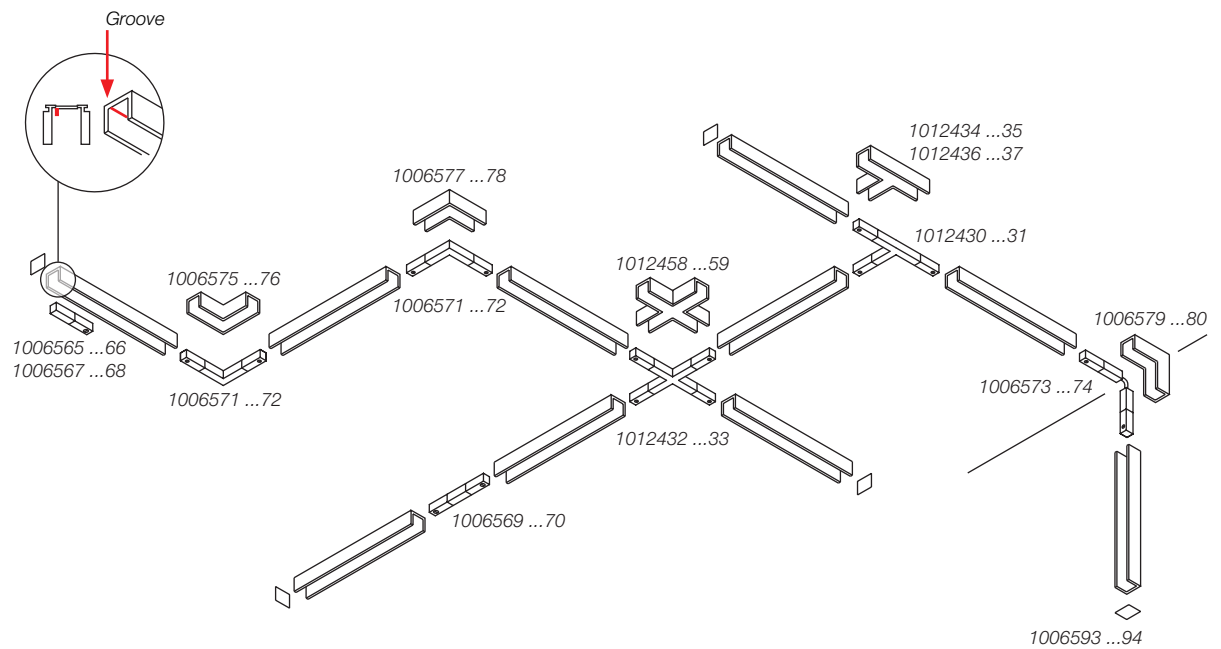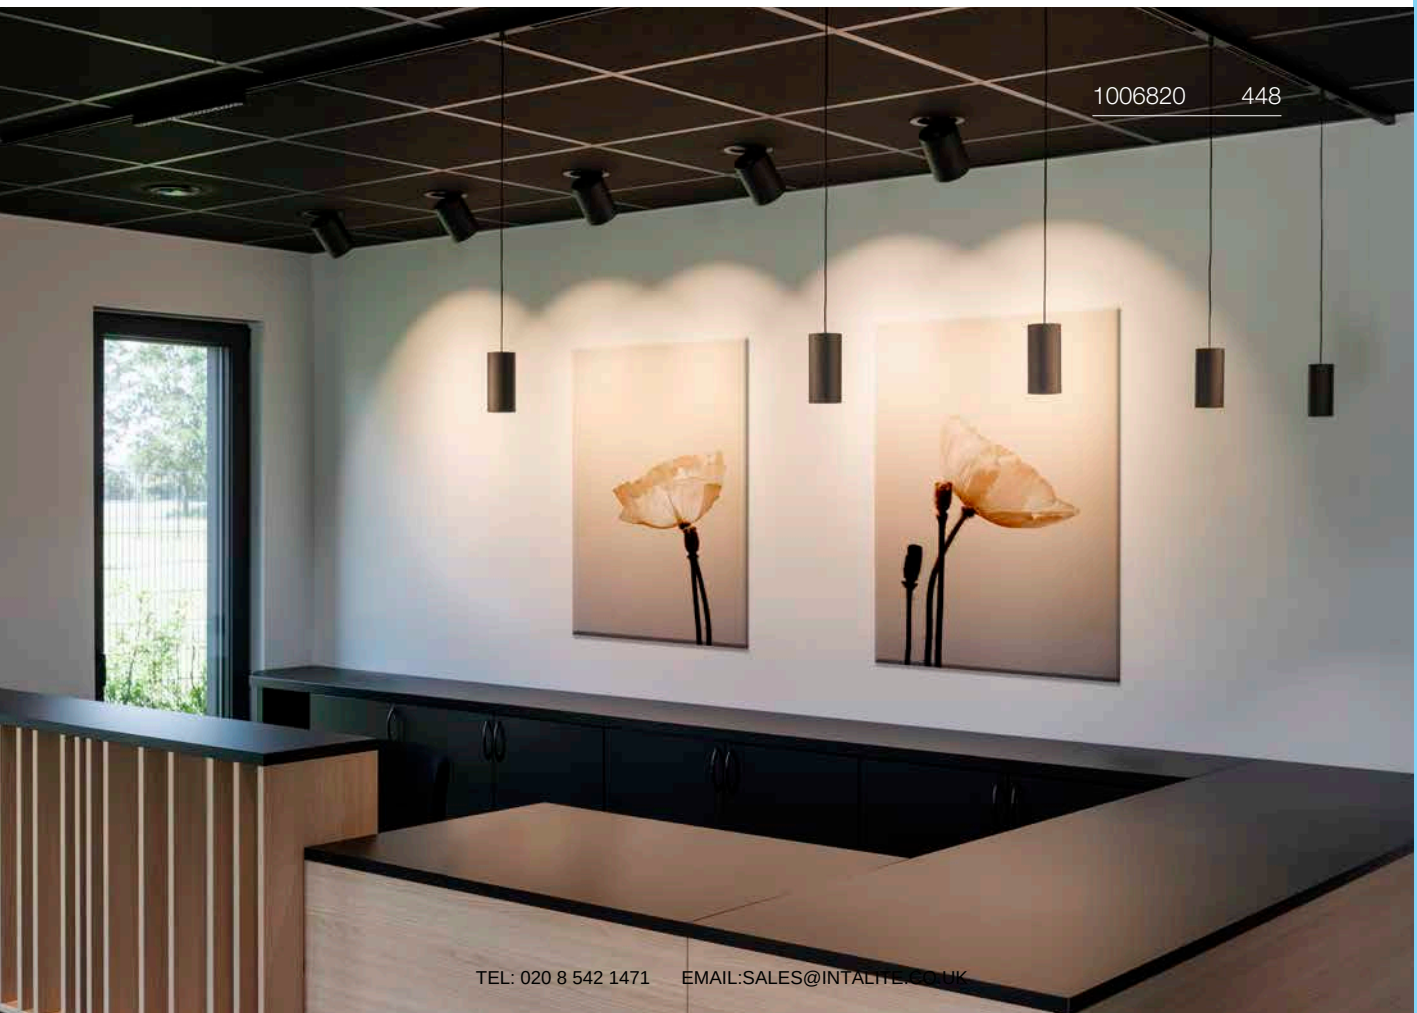

## 48V SYSTEM TRACK


### STANDARD SURFACE-MOUNTED TRACK, CURVED, DALI

NEW

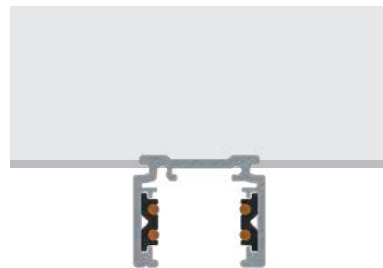


|                     | 79 cm                   | 79 cm                   | 79 cm                   | 79 cm                   |
|---------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Radius              | 50 cm                   | 50 cm                   | 50 cm                   | 50 cm                   |
| Orientation         | left                    | left                    | right                   | right                   |
| Nominal voltage (V) | 48 V                    | 48 V                    | 48 V                    | 48 V                    |
| Max. current (A)    | 16 A max.               | 16 A max.               | 16 A max.               | 16 A max.               |
| Colour              | ● black                 | ○ white                 | ● black                 | ○ white                 |
| Material            | Aluminium               | Aluminium               | Aluminium               | Aluminium               |
| L x W x H (cm)      | 79 cm x 2.6 cm x 2.3 cm | 79 cm x 2.6 cm x 2.3 cm | 79 cm x 2.6 cm x 2.3 cm | 79 cm x 2.6 cm x 2.3 cm |
| Prod. no.           | <b>1012415</b>          | <b>1012416</b>          | <b>1012417</b>          | <b>1012418</b>          |
| GBP                 | <b>82.00</b>            | <b>82.00</b>            | <b>82.00</b>            | <b>82.00</b>            |

|                     | 126 cm                   | 126 cm                   | 126 cm                   | 126 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Radius              | 80 cm                    | 80 cm                    | 80 cm                    | 80 cm                    |
| Orientation         | left                     | left                     | right                    | right                    |
| Nominal voltage (V) | 48 V                     | 48 V                     | 48 V                     | 48 V                     |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 126 cm x 2.6 cm x 2.3 cm | 126 cm x 2.6 cm x 2.3 cm | 126 cm x 2.6 cm x 2.3 cm | 126 cm x 2.6 cm x 2.3 cm |
| Prod. no.           | <b>1012586</b>           | <b>1012419</b>           | <b>1012420</b>           | <b>1012421</b>           |
| GBP                 | <b>109.00</b>            | <b>109.00</b>            | <b>109.00</b>            | <b>109.00</b>            |

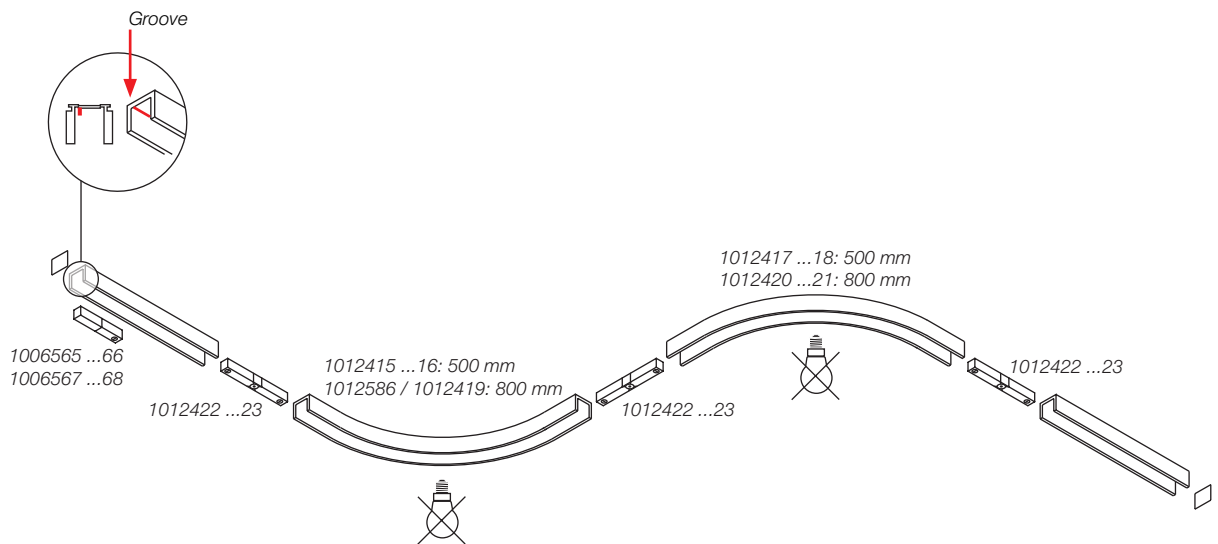

Curved tracks are currently not suitable for use with lights or power feed units.

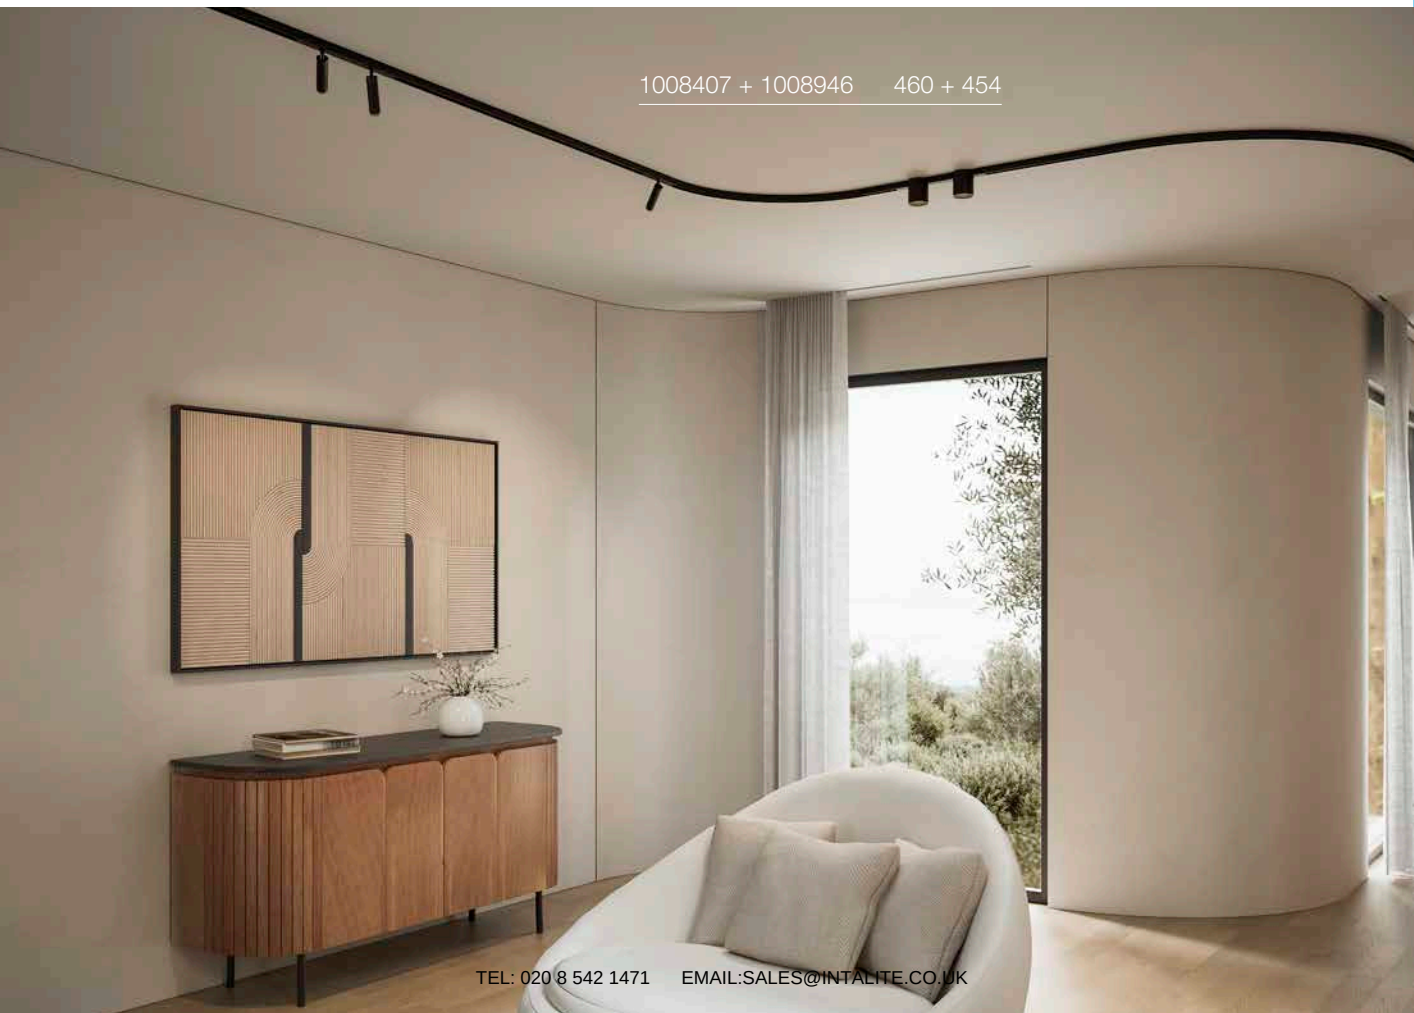

# 48V SYSTEM TRACK

## STANDARD SURFACE-MOUNTED TRACK, DALI, ACCESSORIES

### END FEED, LEFT



9.7 cm | Polycarbonate (PC)  
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006565** 13.00 GBP  
○ white Prod. no. **1006566** 13.00 GBP

### END FEED, RIGHT



9.7 cm | Polycarbonate (PC)  
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006567** 13.00 GBP  
○ white Prod. no. **1006568** 13.00 GBP

### MECHANICAL L-CONNECTOR FOR STANDARD SURFACE-MOUNTED TRACK, LEFT (FOR CEILING INSTALLATION)



7.1 cm | Aluminium  
L: 7.1 cm, W: 7.1 cm, H: 2.2 cm

● black Prod. no. **1006575** 20.00 GBP  
○ white Prod. no. **1006576** 20.00 GBP

### MECHANICAL L-CONNECTOR FOR STANDARD SURFACE-MOUNTED TRACK, RIGHT (FOR CEILING INSTALLATION)



7.1 cm | Aluminium  
L: 7.1 cm, W: 7.1 cm, H: 2.2 cm

● black Prod. no. **1006577** 20.00 GBP  
○ white Prod. no. **1006578** 20.00 GBP

### MECHANICAL L-CONNECTOR FOR STANDARD SURFACE-MOUNTED TRACK, STEREO, (WALL/CEILING)



8.4 cm | Aluminium  
L: 8.4 cm, W: 2.6 cm, H: 8.4 cm

● black Prod. no. **1006579** 20.00 GBP  
○ white Prod. no. **1006580** 20.00 GBP


### ELECTRICAL L-CONNECTOR, DALI



11.4 cm | Polycarbonate (PC)  
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm

● black Prod. no. **1006571** 25.00 GBP  
○ white Prod. no. **1006572** 25.00 GBP


### T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, LEFT 1



Aluminium  
W: 7.4 cm | H: 2.3 cm

● black Prod. no. **1012434** 37.00 GBP  
○ white Prod. no. **1012435** 37.00 GBP


### T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, LEFT 2



Aluminium  
W: 7.4 cm | H: 2.3 cm

● black Prod. no. **1012436** 37.00 GBP  
○ white Prod. no. **1012437** 37.00 GBP


### T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, RIGHT 1



Aluminium  
W: 7.4 cm | H: 2.3 cm

● black Prod. no. **1012438** 37.00 GBP  
○ white Prod. no. **1012439** 37.00 GBP

### T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, RIGHT 2



Aluminium  
W: 7.4 cm | H: 2.3 cm

● black Prod. no. **1012440** 37.00 GBP  
○ white Prod. no. **1012441** 37.00 GBP

### ELECTRICAL T-CONNECTOR, DALI



13.3 cm  
L: 13.3 cm | W: 7.5 cm | H: 1.8 cm

● black Prod. no. **1012430** 39.00 GBP  
○ white Prod. no. **1012431** 39.00 GBP

### X-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK



7.4 cm  
L: 7.4 cm | W: 7.4 cm | H: 2.3 cm

● black Prod. no. **1012458** 46.00 GBP  
○ white Prod. no. **1012459** 46.00 GBP

### ELECTRICAL X-CONNECTOR, DALI



133 cm | Plastic PC  
L: 133 cm | W: 13.3 cm | H: 1.8 cm

● black Prod. no. **1012432** 48.00 GBP  
○ white Prod. no. **1012433** 48.00 GBP

### Electrical longitudinal connector, DALI



14.4 cm | Polycarbonate (PC)  
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006569** 20.00 GBP  
○ white Prod. no. **1006570** 20.00 GBP



#### SHORT & FLEXIBLE LONGITUDINAL ELECTRICAL CONNECTOR, INCLUDING REINFORCEMENT PLATE FOR CURVED TRACKS, DALI

10.7 cm | Plastic PC  
L: 10.7 cm | W: 1.6 cm | H: 1.7 cm

● black Prod. no. **1012422** **33.00 GBP**  
○ white Prod. no. **1012423** **33.00 GBP**



#### FLEXIBLE CONNECTOR, ELECTRICAL, DALI

23 cm | Polycarbonate (PC)  
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006573** **26.00 GBP**  
○ white Prod. no. **1006574** **26.00 GBP**



#### EXTERNAL POWER ADAPTER 48 V | 60 W

18 cm | Polycarbonate (PC)  
L: 18 cm | W: 4.5 cm | H: 2.7 cm

○ white Prod. no. **1006613** **52.00 GBP**



#### EXTERNAL POWER ADAPTER 48 V | 150 W

19.1 cm | Metal/Polycarbonate (PC)  
L: 19.1 cm | W: 8.8 cm | H: 3.6 cm

● black Prod. no. **1006614** **113.00 GBP**



#### COVER, 20 MM FOR STANDARD TRACK ASSEMBLY, 2 M

200 mm, Aluminium/Polycarbonate (PC)  
L: 200 cm | W: 2 cm | H: 0.6 cm

● black Prod. no. **1006611** **10.00 GBP**  
○ white Prod. no. **1006612** **10.00 GBP**



#### END CAP FOR STANDARD SURFACE-MOUNTED TRACK

2.6 cm | Polycarbonate (PC)  
L: 2.6 cm | W: 0.2 cm | H: 2.2 cm

● black Prod. no. **1006593** **4.00 GBP**  
○ white Prod. no. **1006594** **4.00 GBP**



#### TRACK REINFORCEMENT PLATE FOR SURFACE-MOUNTED TRACK

5 cm | Steel  
L: 5 cm | W: 1.3 cm | H: 0.3 cm

● grey Prod. no. **1006609** **8.00 GBP**



#### TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 3M WIRE ROPE

12 cm | Steel  
L: 12 cm | W: 2.7 cm

● black Prod. no. **1006603** **20.00 GBP**  
○ white Prod. no. **1006604** **20.00 GBP**



#### TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 1M ROD

12 cm | Steel  
L: 12 cm | W: 2.7 cm

● black Prod. no. **1006601** **20.00 GBP**  
○ white Prod. no. **1006602** **20.00 GBP**



#### PENDANT SUSPENSION, 1M ROD

steel  
W: 2.9 cm


● black Prod. no. **1006605** **16.00 GBP**  
○ white Prod. no. **1006606** **16.00 GBP**



#### PENDANT SUSPENSION, 3M WIRE ROPE

steel  
W: 2.9 cm

● black Prod. no. **1006607** **16.00 GBP**  
○ white Prod. no. **1006608** **16.00 GBP**



#### MOUNTING BRACKET

3 cm | Aluminium  
L: 3 cm | W: 2.7 cm | H: 1.1 cm

● black Prod. no. **1006599** **7.00 GBP**  
○ white Prod. no. **1006600** **7.00 GBP**



#### INCLUDES CASAMBI TO DALI CONVERTER

28 cm | Plastic PC  
L: 28 cm | W: 2.3 cm | H: 4.4 cm  
The integrated Casambi-to-DALI module enables wireless control via the Casambi app and Casambi smart controllers.

● black Prod. no. **1008382** **343.00 GBP**  
○ white Prod. no. **1008383** **343.00 GBP**



#### ON/OFF

28 cm | Plastic PC  
L: 28 cm | W: 2.3 cm | H: 4.4 cm

● black Prod. no. **1007874** **163.00 GBP**  
○ white Prod. no. **1007875** **163.00 GBP**



#### INCLUDES DALI THROUGH-WIRING

29.8 cm | Plastic PC  
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1010446** **93.00 GBP**  
○ white Prod. no. **1010447** **93.00 GBP**



#### INCLUDES DALI THROUGH-WIRING


26.8 cm | Polycarbonate (PC)  
L: 26.8 cm | W: 2.2 cm | H: 4.4 cm

● black Prod. no. **1009012** **119.00 GBP**  
○ white Prod. no. **1009001** **119.00 GBP**




## 48V SYSTEM TRACK

### DALI DEEP SURFACE-MOUNTED TRACK

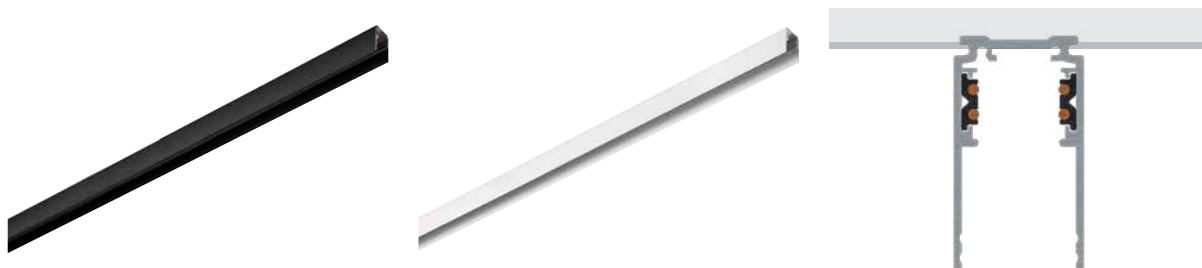

|                     | 100 cm                   | 100 cm                   | 200 cm                   | 200 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 48 V                     | 48 V                     | 48 V                     | 48 V                     |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 100 cm x 2.6 cm x 4.7 cm | 100 cm x 2.6 cm x 4.7 cm | 200 cm x 2.6 cm x 4.7 cm | 200 cm x 2.6 cm x 4.7 cm |
| Prod. no.           | <b>1006549</b>           | <b>1006550</b>           | <b>1006551</b>           | <b>1006552</b>           |
| GBP                 | <b>52.00</b>             | <b>52.00</b>             | <b>105.00</b>            | <b>105.00</b>            |

|                     | 300 cm                   | 300 cm                   | 400 cm                   | 400 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 48 V                     | 48 V                     | 48 V                     | 48 V                     |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 300 cm x 2.6 cm x 4.7 cm | 300 cm x 2.6 cm x 4.7 cm | 400 cm x 2.6 cm x 4.7 cm | 400 cm x 2.6 cm x 4.7 cm |
| Prod. no.           | <b>1006553</b>           | <b>1006554</b>           | <b>1006555</b>           | <b>1006556</b>           |
| GBP                 | <b>151.00</b>            | <b>151.00</b>            | <b>201.00</b>            | <b>201.00</b>            |

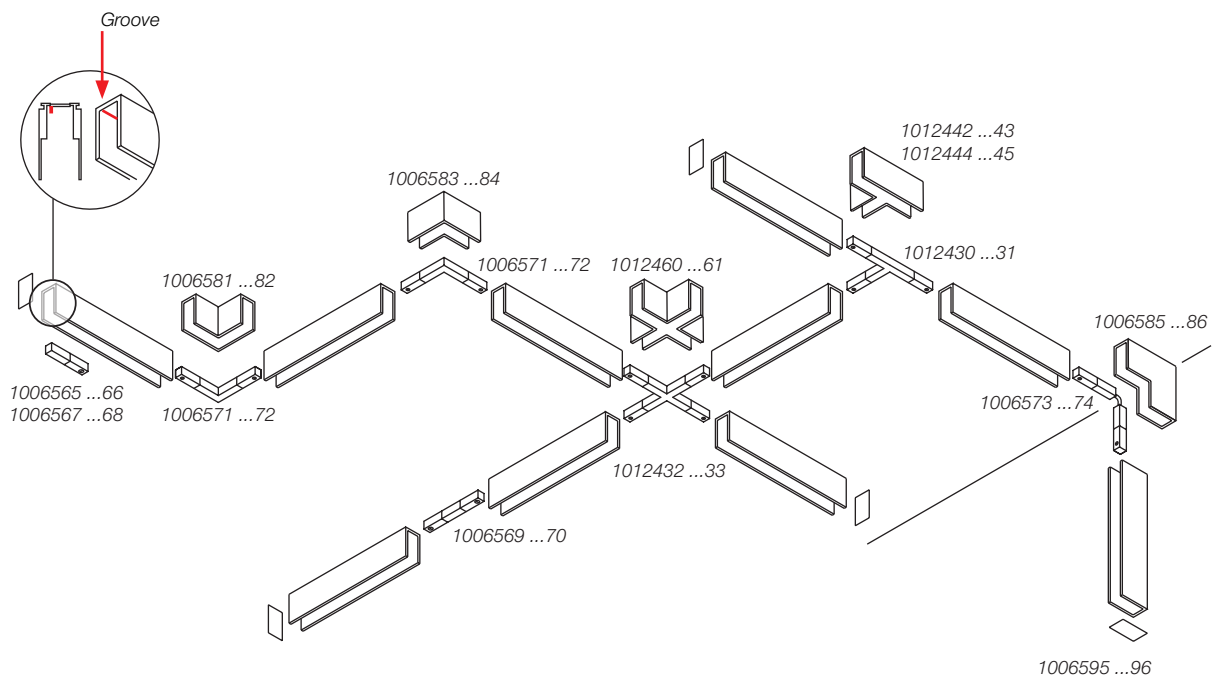

1006553 + 1006688 430 + 442

48V SYSTEM TRACK  
DEEP MOUNTING TRACK, DALI, ACCESSORIES

END FEED, LEFT



9.7 cm | Polycarbonate (PC)  
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006565 | 13.00 GBP |
| ○ white | Prod. no. | 1006566 | 13.00 GBP |

END FEED, RIGHT



9.7 cm | Polycarbonate (PC)  
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006567 | 13.00 GBP |
| ○ white | Prod. no. | 1006568 | 13.00 GBP |

MECHANICAL L-CONNECTOR FOR DEEP  
SURFACE-MOUNTED TRACK, LEFT  
(FOR CEILING INSTALLATION)



7.1 cm | Aluminium  
L: 7.1 cm | W: 7.1 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006581 | 26.00 GBP |
| ○ white | Prod. no. | 1006582 | 26.00 GBP |

MECHANICAL L-CONNECTOR FOR DEEP  
SURFACE-MOUNTED TRACK, RIGHT  
(FOR CEILING INSTALLATION)



7.1 cm | Aluminium  
L: 7.1 cm | W: 7.1 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006583 | 26.00 GBP |
| ○ white | Prod. no. | 1006584 | 26.00 GBP |

MECHANICAL L-CONNECTOR FOR  
SURFACE-MOUNTED TRACK, DEEP, STEREO  
(WALL/CEILING)



8.4 cm | Aluminium  
L: 8.4 cm | W: 8.4 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006585 | 26.00 GBP |
| ○ white | Prod. no. | 1006586 | 26.00 GBP |

ELECTRICAL L-CONNECTOR, DALI



11.4 cm | Polycarbonate (PC)  
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006571 | 25.00 GBP |
| ○ white | Prod. no. | 1006572 | 25.00 GBP |

T-CONNECTOR, MECHANICAL, FOR  
SURFACE-MOUNTED DEEP TRACK, LEFT 1



7.4 cm | Aluminium  
W: 7.4 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012442 | 42.00 GBP |
| ○ white | Prod. no. | 1012443 | 42.00 GBP |

T-CONNECTOR, MECHANICAL, FOR  
SURFACE-MOUNTED DEEP TRACK, LEFT 2



7.4 cm | Aluminium  
W: 7.4 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012444 | 42.00 GBP |
| ○ white | Prod. no. | 1012445 | 42.00 GBP |

T-CONNECTOR, MECHANICAL, FOR  
SURFACE-MOUNTED DEEP TRACK, RIGHT 1



7.4 cm | Aluminium  
W: 7.4 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012446 | 42.00 GBP |
| ○ white | Prod. no. | 1012447 | 42.00 GBP |

T-CONNECTOR, MECHANICAL, FOR  
SURFACE-MOUNTED DEEP TRACK, RIGHT 2



7.4 cm | Aluminium  
W: 7.4 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012448 | 42.00 GBP |
| ○ white | Prod. no. | 1012449 | 42.00 GBP |

ELECTRICAL T-CONNECTOR, DALI



13.3 cm  
L: 13.3 cm | W: 7.5 cm | H: 1.8 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012430 | 39.00 GBP |
| ○ white | Prod. no. | 1012431 | 39.00 GBP |

X-CONNECTOR, MECHANICAL, FOR  
SURFACE-MOUNTED DEEP TRACK



7.4 cm  
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012460 | 51.00 GBP |
| ○ white | Prod. no. | 1012461 | 51.00 GBP |

ELECTRICAL X-CONNECTOR, DALI



133 cm | Plastic PC  
L: 133 cm | W: 13.3 cm | H: 1.8 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012432 | 48.00 GBP |
| ○ white | Prod. no. | 1012433 | 48.00 GBP |

Electrical longitudinal connector, DALI



14.4 cm | Polycarbonate (PC)  
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006569 | 20.00 GBP |
| ○ white | Prod. no. | 1006570 | 20.00 GBP |

**FLEXIBLE CONNECTOR, ELECTRICAL, DALI**

23 cm | Polycarbonate (PC)  
L: 23 cm | W: 1.6 cm | H: 1.9 cm

- black      Prod. no. **1006573**    **26.00 GBP**
- white      Prod. no. **1006574**    **26.00 GBP**

**EXTERNAL POWER ADAPTER 48 V | 60 W**

18 cm | Polycarbonate (PC)  
L: 18 cm | W: 4.5 cm | H: 2.7 cm

- white      Prod. no. **1006613**    **52.00 GBP**

**EXTERNAL POWER ADAPTER 48 V | 150 W**

19.1 cm | Metal/Polycarbonate (PC)  
L: 19.1 cm | W: 8.8 cm | H: 3.6 cm

- black      Prod. no. **1006614**    **113.00 GBP**

**TRACK COVER, 26 MM, FOR DEEP AND RECESSED SURFACE-MOUNTED TRACK, 2 M**

200 cm | Polycarbonate (PC)  
L: 200 cm | W: 26 cm | H: 6 cm

- black      Prod. no. **1007188**    **11.00 GBP**
- white      Prod. no. **1007189**    **11.00 GBP**

**END CAP FOR DEEP SURFACE-MOUNTED TRACK**

2.6 cm | Polycarbonate (PC)  
L: 2.6 cm | W: 0.2 cm | H: 4.7 cm

- black      Prod. no. **1006595**    **6.00 GBP**
- white      Prod. no. **1006596**    **6.00 GBP**

**TRACK REINFORCEMENT PLATE FOR SURFACE-MOUNTED TRACK**

5 cm | Steel  
L: 5 cm | W: 1.3 cm | H: 0.3 cm

- grey      Prod. no. **1006609**    **8.00 GBP**

**TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 3M WIRE ROPE**

12 cm | Steel  
L: 12 cm | W: 2.7 cm

- black      Prod. no. **1006603**    **20.00 GBP**
- white      Prod. no. **1006604**    **20.00 GBP**

**TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 1M ROD**

12 cm | Steel  
L: 12 cm | W: 2.7 cm

- black      Prod. no. **1006601**    **20.00 GBP**
- white      Prod. no. **1006602**    **20.00 GBP**

**PENDANT SUSPENSION, 1M ROD**

steel  
W: 2.9 cm

- black      Prod. no. **1006605**    **16.00 GBP**
- white      Prod. no. **1006606**    **16.00 GBP**

**PENDANT SUSPENSION, 3M WIRE ROPE**

steel  
W: 2.9 cm

- black      Prod. no. **1006607**    **16.00 GBP**
- white      Prod. no. **1006608**    **16.00 GBP**

**MOUNTING BRACKET**

3 cm | Aluminium  
L: 3 cm | W: 2.7 cm | H: 1.1 cm

- black      Prod. no. **1006599**    **7.00 GBP**
- white      Prod. no. **1006600**    **7.00 GBP**

**INCLUDES CASAMBI TO DALI CONVERTER**

28 cm | Plastic PC  
L: 28 cm | W: 2.3 cm | H: 4.4 cm  
The integrated Casambi-to-DALI module enables wireless control via the Casambi app and Casambi smart controllers.

- black      Prod. no. **1008382**    **343.00 GBP**
- white      Prod. no. **1008383**    **343.00 GBP**

**ON/OFF**

28 cm | Plastic PC  
L: 28 cm | W: 2.3 cm | H: 4.4 cm

- black      Prod. no. **1007874**    **163.00 GBP**
- white      Prod. no. **1007875**    **163.00 GBP**

**INCLUDES DALI THROUGH-WIRING**

29.8 cm | Plastic PC  
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

- black      Prod. no. **1010446**    **93.00 GBP**
- white      Prod. no. **1010447**    **93.00 GBP**


**INCLUDES DALI THROUGH-WIRING**

26.8 cm | Polycarbonate (PC)  
L: 26.8 cm | W: 2.2 cm | H: 4.4 cm

- black      Prod. no. **1009012**    **119.00 GBP**
- white      Prod. no. **1009001**    **119.00 GBP**

## 48V SYSTEM TRACK



### RECESSED TRACK, DALI

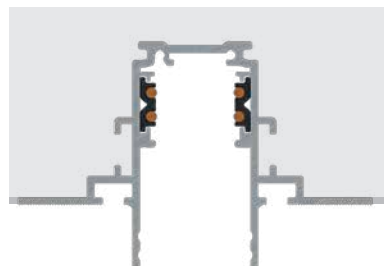

|                     | 100 cm                   | 100 cm                   | 200 cm                   | 200 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 48 V                     | 48 V                     | 48 V                     | 48 V                     |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 100 cm x 7.4 cm x 4.7 cm | 100 cm x 7.4 cm x 4.7 cm | 200 cm x 7.4 cm x 4.7 cm | 200 cm x 7.4 cm x 4.7 cm |
| Prod. no.           | <b>1006557</b>           | <b>1006558</b>           | <b>1006559</b>           | <b>1006560</b>           |
| GBP                 | <b>70.00</b>             | <b>70.00</b>             | <b>121.00</b>            | <b>121.00</b>            |

|                     | 300 cm                   | 300 cm                   | 400 cm                   | 400 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 48 V                     | 48 V                     | 48 V                     | 48 V                     |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 300 cm x 7.4 cm x 4.7 cm | 300 cm x 7.4 cm x 4.7 cm | 400 cm x 7.4 cm x 4.7 cm | 400 cm x 7.4 cm x 4.7 cm |
| Prod. no.           | <b>1006561</b>           | <b>1006562</b>           | <b>1006563</b>           | <b>1006564</b>           |
| GBP                 | <b>159.00</b>            | <b>159.00</b>            | <b>226.00</b>            | <b>226.00</b>            |



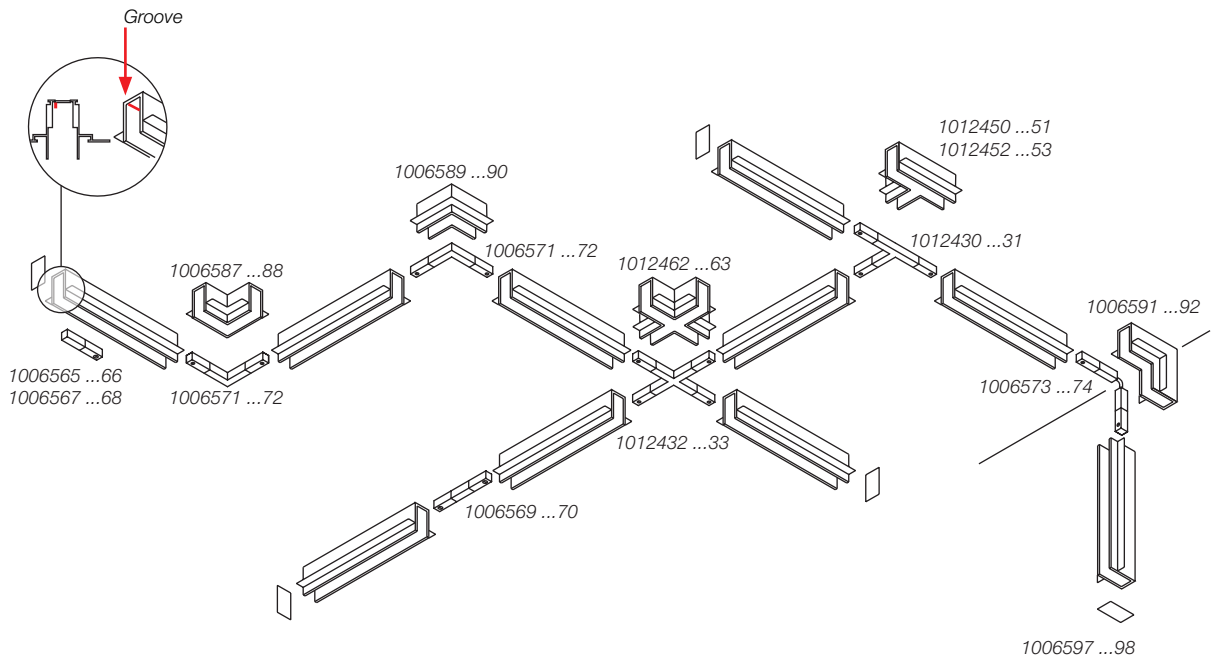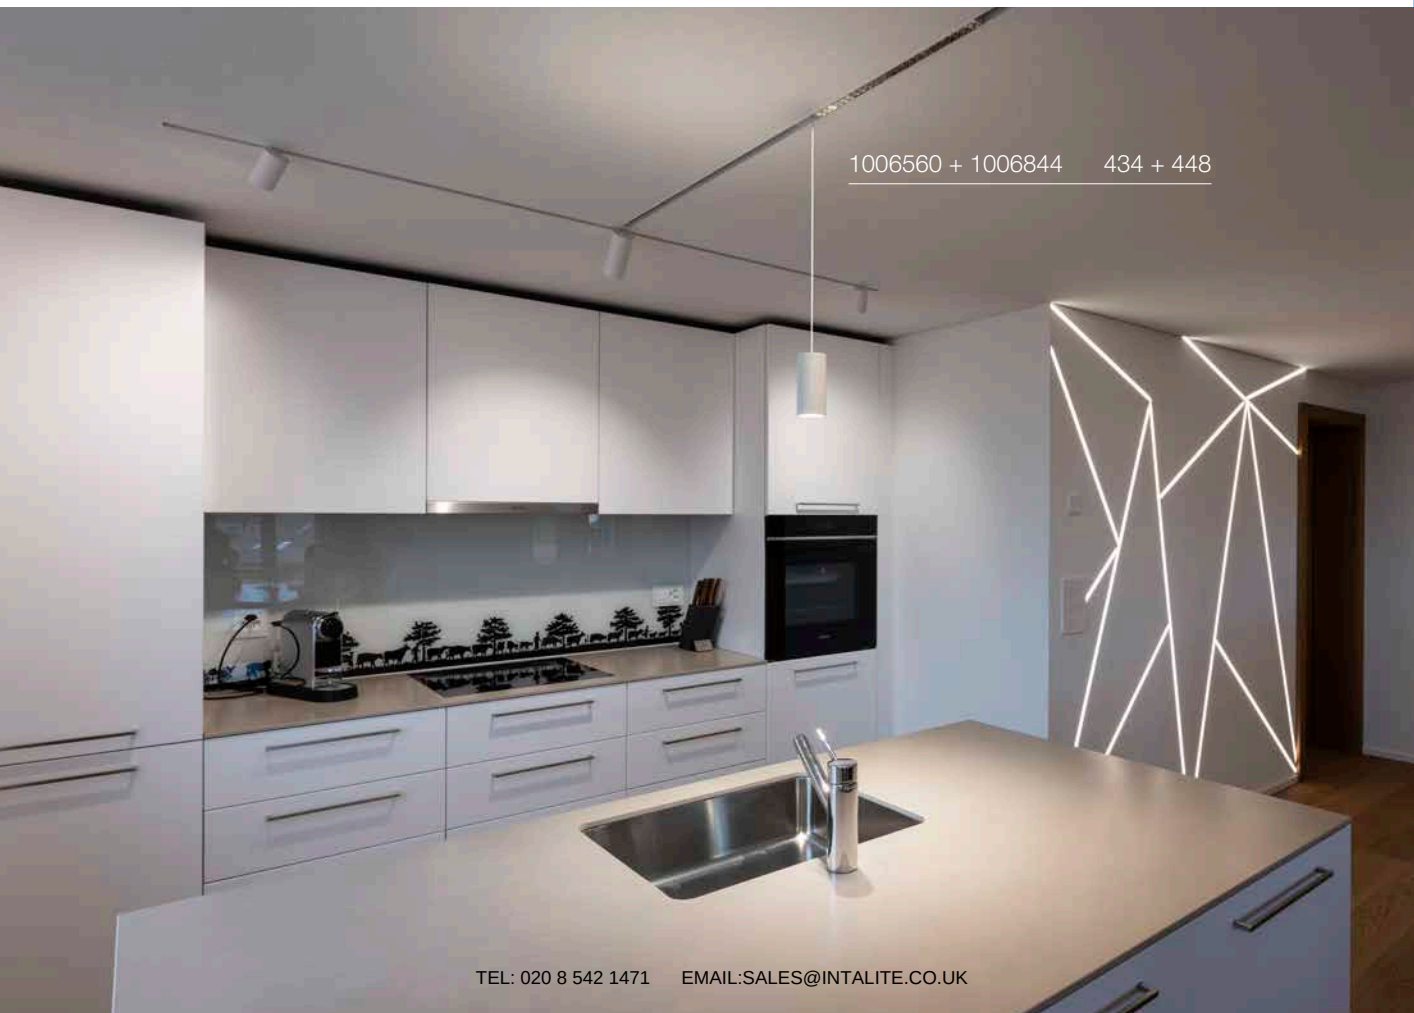

48V SYSTEM TRACK  
RECESSED TRACK, DALI, ACCESSORIES

END FEED, LEFT



9.7 cm | Polycarbonate (PC)  
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006565 | 13.00 GBP |
| ○ white | Prod. no. | 1006566 | 13.00 GBP |

END FEED, RIGHT



9.7 cm | Polycarbonate (PC)  
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006567 | 13.00 GBP |
| ○ white | Prod. no. | 1006568 | 13.00 GBP |

MECHANICAL L-CONNECTOR FOR DEEP  
SURFACE-MOUNTED TRACK, LEFT  
(FOR CEILING INSTALLATION)



9.5 cm | Aluminium  
L: 9.5 cm | W: 9.5 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006587 | 29.00 GBP |
| ○ white | Prod. no. | 1006588 | 29.00 GBP |

MECHANICAL L-CONNECTOR FOR DEEP  
SURFACE-MOUNTED TRACK, RIGHT  
(FOR CEILING INSTALLATION)



9.5 cm | Aluminium  
L: 9.5 cm | W: 9.5 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006589 | 29.00 GBP |
| ○ white | Prod. no. | 1006590 | 29.00 GBP |

L-CONNECTOR MECHANICAL, FOR RECESSED  
TRACK, DEEP, STEREO, (WALL/CEILING)



8.1 cm | Aluminium  
L: 8.1 cm | W: 7.4 cm | H: 8.1 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006591 | 29.00 GBP |
| ○ white | Prod. no. | 1006592 | 29.00 GBP |


ELECTRICAL L-CONNECTOR, DALI



11.4 cm | Polycarbonate (PC)  
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1006571 | 25.00 GBP |
| ○ white | Prod. no. | 1006572 | 25.00 GBP |


T-CONNECTOR, MECHANICAL,  
FOR RECESSED DEEP TRACK, LEFT 1



7.4 cm | Aluminium  
L: 7.4 cm | W: 7.4 cm | H: 4.6 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012450 | 51.00 GBP |
| ○ white | Prod. no. | 1012451 | 51.00 GBP |


T-CONNECTOR, MECHANICAL,  
FOR RECESSED DEEP TRACK, LEFT 2



7.4 cm | Aluminium  
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012452 | 51.00 GBP |
| ○ white | Prod. no. | 1012453 | 51.00 GBP |

T-CONNECTOR, MECHANICAL,  
FOR RECESSED DEEP TRACK, RIGHT 1



7.4 cm | Aluminium  
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012454 | 51.00 GBP |
| ○ white | Prod. no. | 1012455 | 51.00 GBP |

T-CONNECTOR, MECHANICAL,  
FOR RECESSED DEEP TRACK, RIGHT 2



7.4 cm | Aluminium  
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012456 | 51.00 GBP |
| ○ white | Prod. no. | 1012457 | 51.00 GBP |

ELECTRICAL T-CONNECTOR, DALI



13.3 cm  
L: 13.3 cm | W: 7.5 cm | H: 1.8 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012430 | 39.00 GBP |
| ○ white | Prod. no. | 1012431 | 39.00 GBP |

X-CONNECTOR, MECHANICAL,  
FOR RECESSED DEEP TRACK



7.4 cm | Aluminium  
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm

- |         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 1012462 | 59.00 GBP |
| ○ white | Prod. no. | 1012463 | 59.00 GBP |

**ELECTRICAL X-CONNECTOR, DALI**

133 cm | Plastic PC  
L: 133 cm | W: 13.3 cm | H: 1.8 cm

- black      Prod. no. **1012432**    **48.00 GBP**
- white      Prod. no. **1012433**    **48.00 GBP**

**ELECTRICAL LONGITUDINAL CONNECTOR, DALI**

14.4 cm | Polycarbonate (PC)  
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

- black      Prod. no. **1006569**    **20.00 GBP**
- white      Prod. no. **1006570**    **20.00 GBP**

**FLEXIBLE CONNECTOR, ELECTRICAL, DALI**

23 cm | Polycarbonate (PC)  
L: 23 cm | W: 1.6 cm | H: 1.9 cm

- black      Prod. no. **1006573**    **26.00 GBP**
- white      Prod. no. **1006574**    **26.00 GBP**

**EXTERNAL POWER ADAPTER 48 V | 60 W**

18 cm | Polycarbonate (PC)  
L: 18 cm | W: 4.5 cm | H: 2.7 cm

- white      Prod. no. **1006613**    **52.00 GBP**

**EXTERNAL POWER ADAPTER 48 V | 150 W**

19.1 cm | Metal/Polycarbonate (PC)  
L: 19.1 cm | W: 8.8 cm | H: 3.6 cm

- black      Prod. no. **1006614**    **113.00 GBP**

**TRACK COVER, 26 MM, FOR DEEP AND RECESSED SURFACE-MOUNTED TRACK, 2 M**

200 cm | Polycarbonate (PC)  
L: 200 cm | W: 26 cm | H: 6 cm

- black      Prod. no. **1007188**    **11.00 GBP**
- white      Prod. no. **1007189**    **11.00 GBP**

**END CAP FOR RECESSED TRACK**

3.4 cm | Polycarbonate (PC)  
L: 3.4 cm | W: 0.2 cm | H: 4.7 cm

- black      Prod. no. **1006597**    **4.00 GBP**
- white      Prod. no. **1006598**    **4.00 GBP**

**TRACK REINFORCEMENT PLATES SET FOR RECESSED TRACK**

6.3 cm | Steel  
L: 6.3 cm | W: 0.8 cm | H: 0.3 cm

- grey      Prod. no. **1006610**    **8.00 GBP**

**INCLUDES CASAMBI TO DALI CONVERTER**

28 cm | Plastic PC  
L: 28 cm | W: 2.3 cm | H: 4.4 cm  
The integrated Casambi-to-DALI module enables wireless control via the Casambi app and Casambi smart controllers.

- black      Prod. no. **1008382**    **343.00 GBP**
- white      Prod. no. **1008383**    **343.00 GBP**

**ON/OFF**

28 cm | Plastic PC  
L: 28 cm | W: 2.3 cm | H: 4.4 cm

- black      Prod. no. **1007874**    **163.00 GBP**
- white      Prod. no. **1007875**    **163.00 GBP**

**INCLUDES DALI THROUGH-WIRING**

29.8 cm | Plastic PC  
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

- black      Prod. no. **1010446**    **93.00 GBP**
- white      Prod. no. **1010447**    **93.00 GBP**

**INCLUDES DALI THROUGH-WIRING**

26.8 cm | Polycarbonate (PC)  
L: 26.8 cm | W: 2.2 cm | H: 4.4 cm


- black      Prod. no. **1009012**    **119.00 GBP**
- white      Prod. no. **1009001**    **119.00 GBP**





## KALU 2.0

48V, DALI, STANDARD SURFACE  
MOUNTED TRACK




48 V | 250 mA  
Total wattage: 9 W  
Material: aluminium

- Compatible only with the standard 48 V surface-mounted track
- BEG-eligible
- Discover more lenses and decorative rings in the accessories section

## LIGHT EYE® 2.0


48V, DALI, Ø 7,5 CM



48 V | 250 mA  
Total wattage: 10 W  
Material: aluminium

## LIGHT EYE® 2.0

48V, PD, DALI, Ø 7,5 CM



48 V | 250 mA  
Total wattage: 10 W  
Material: aluminium

- With easily adjustable cable length thanks to the quick-connect coupling



|         |      |        |
|---------|------|--------|
| 1010255 | Down | 3000K  |
| 1010257 |      | 1450lm |
| 1010252 | Down | 2700K  |
| 1010254 |      | 1400lm |

| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black<br>1400lm 2700K | 1010252   | 151.00 |
| ● black<br>1450lm 3000K | 1010255   | 151.00 |
| ○ white<br>1400lm 2700K | 1010254   | 151.00 |
| ○ white<br>1450lm 3000K | 1010257   | 151.00 |



|         |      |        |
|---------|------|--------|
| 1010458 | Down | 3000K  |
| 1010459 |      | 1200lm |
| 1010456 | Down | 2700K  |
| 1010457 |      | 1150lm |

| Variant                       | Prod. no. | GBP    |
|-------------------------------|-----------|--------|
| ● black<br>1150lm 2700K       | 1010456   | 134.00 |
| ● black<br>1200lm 3000K       | 1010458   | 134.00 |
| ○ white/black<br>1150lm 2700K | 1010457   | 134.00 |
| ○ white/black<br>1200lm 3000K | 1010459   | 134.00 |



|         |      |        |
|---------|------|--------|
| 1010462 | Down | 3000K  |
| 1010463 |      | 1200lm |
| 1010460 | Down | 2700K  |
| 1010461 |      | 1150lm |

| Variant                       | Prod. no. | GBP    |
|-------------------------------|-----------|--------|
| ● black<br>1150lm 2700K       | 1010460   | 147.00 |
| ● black<br>1200lm 3000K       | 1010462   | 147.00 |
| ○ white/black<br>1150lm 2700K | 1010461   | 147.00 |
| ○ white/black<br>1200lm 3000K | 1010463   | 147.00 |




1010336 441





## DYSKO

48V, DALI, STANDARD SURFACE  
MOUNTED TRACK



48 V | 150 mA  
Total wattage: 5.6 W  
Material: Plastic PC/Aluminium

- Compatible only with the standard 48 V surface-mounted track





2700 K  
750 lm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1010332   | 163.00 |
| ● black/gold  | 1010330   | 163.00 |
| ● white/black | 1010331   | 163.00 |

## DYSKO

48V, DALI, DEEP & RECESSED  
TRACK

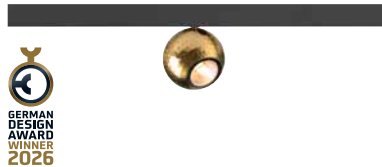

48 V | 150 mA  
Total wattage: 5.6 W  
Material: Plastic PC/Aluminium





2700 K  
750 lm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1010377   | 163.00 |
| ● black/gold  | 1010375   | 163.00 |
| ● white/black | 1010376   | 163.00 |

## DYSKO

48V, PD, DALI

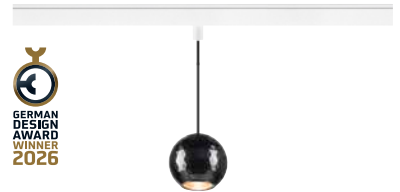


48 V | 150 mA  
Total wattage: 5.6 W  
Material: Plastic PC/Aluminium



2700 K  
750 lm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1010338   | 172.00 |
| ● black/gold  | 1010336   | 169.00 |
| ● white/black | 1010337   | 169.00 |

# NUMINOS® XS 48V, DALI




48 V | 200 mA  
 Total wattage: 8.7 W  
 Material: aluminium/polycarbonate (PC)

| Variant         | GBP    |
|-----------------|--------|
| All XS versions | 151.00 |



| Product             | Prod. no. | GBP  |
|---------------------|-----------|------|
| Elliptical diffuser |           |      |
| ○ transparent       | 1005612   | 5.00 |
| Prismatic diffuser  |           |      |
| ○ transparent       | 1005613   | 5.00 |
| Frosted diffuser    |           |      |
| ○ frosted           | 1005614   | 5.00 |
| Honeycomb diffuser  |           |      |
| ● black             | 1005615   | 8.00 |



● black



● black



○ white



● chrome




● black



○ white



● chrome




○ white



|  |        |  |        |     |    | Prod. no. |  |
|--|--------|--|--------|-----|----|-----------|--|
|  | 2700 K |  | 640 lm | 20° | 16 | 1006651   |  |
|  |        |  | 620 lm | 40° | 22 | 1006654   |  |
|  |        |  | 640 lm | 55° | 25 | 1006657   |  |
|  | 3000 K |  | 700 lm | 20° | 16 | 1006669   |  |
|  |        |  | 670 lm | 40° | 22 | 1006672   |  |
|  |        |  | 690 lm | 55° | 25 | 1006675   |  |
|  | 4000 K |  | 720 lm | 20° | 16 | 1006687   |  |
|  |        |  | 700 lm | 40° | 22 | 1006690   |  |
|  |        |  | 710 lm | 55° | 25 | 1006693   |  |
|  | 2700 K |  | 670 lm | 20° | 16 | 1006652   |  |
|  |        |  | 650 lm | 40° | 22 | 1006655   |  |
|  |        |  | 670 lm | 55° | 25 | 1006658   |  |
|  | 3000 K |  | 730 lm | 20° | 16 | 1006670   |  |
|  |        |  | 700 lm | 40° | 22 | 1006673   |  |
|  |        |  | 720 lm | 55° | 25 | 1006676   |  |
|  | 4000 K |  | 750 lm | 20° | 16 | 1006688   |  |
|  |        |  | 730 lm | 40° | 22 | 1006691   |  |
|  |        |  | 740 lm | 55° | 25 | 1006694   |  |
|  | 2700 K |  | 670 lm | 20° | 16 | 1006653   |  |
|  |        |  | 650 lm | 40° | 22 | 1006656   |  |
|  |        |  | 670 lm | 55° | 25 | 1006659   |  |
|  | 3000 K |  | 730 lm | 20° | 16 | 1006671   |  |
|  |        |  | 700 lm | 40° | 22 | 1006674   |  |
|  |        |  | 720 lm | 55° | 25 | 1006677   |  |
|  | 4000 K |  | 750 lm | 20° | 16 | 1006689   |  |
|  |        |  | 730 lm | 40° | 22 | 1006692   |  |
|  |        |  | 740 lm | 55° | 25 | 1006695   |  |
|  | 2700 K |  | 640 lm | 20° | 16 | 1006660   |  |
|  |        |  | 620 lm | 40° | 22 | 1006663   |  |
|  |        |  | 640 lm | 55° | 25 | 1006666   |  |
|  | 3000 K |  | 700 lm | 20° | 16 | 1006678   |  |
|  |        |  | 670 lm | 40° | 22 | 1006681   |  |
|  |        |  | 690 lm | 55° | 25 | 1006684   |  |
|  | 4000 K |  | 720 lm | 20° | 16 | 1006696   |  |
|  |        |  | 700 lm | 40° | 22 | 1006699   |  |
|  |        |  | 710 lm | 55° | 25 | 1006702   |  |
|  | 2700 K |  | 670 lm | 20° | 16 | 1006661   |  |
|  |        |  | 650 lm | 40° | 22 | 1006664   |  |
|  |        |  | 670 lm | 55° | 25 | 1006667   |  |
|  | 3000 K |  | 730 lm | 20° | 16 | 1006679   |  |
|  |        |  | 700 lm | 40° | 22 | 1006682   |  |
|  |        |  | 720 lm | 55° | 25 | 1006685   |  |
|  | 4000 K |  | 750 lm | 20° | 16 | 1006697   |  |
|  |        |  | 730 lm | 40° | 22 | 1006700   |  |
|  |        |  | 740 lm | 55° | 25 | 1006703   |  |
|  | 2700 K |  | 670 lm | 20° | 16 | 1006662   |  |
|  |        |  | 650 lm | 40° | 22 | 1006665   |  |
|  |        |  | 670 lm | 55° | 25 | 1006668   |  |
|  | 3000 K |  | 730 lm | 20° | 16 | 1006680   |  |
|  |        |  | 700 lm | 40° | 22 | 1006683   |  |
|  |        |  | 720 lm | 55° | 25 | 1006686   |  |
|  | 4000 K |  | 750 lm | 20° | 16 | 1006698   |  |
|  |        |  | 730 lm | 40° | 22 | 1006701   |  |
|  |        |  | 740 lm | 55° | 25 | 1006704   |  |

# NUMINOS® S 48V, DALI




48 V | 350 mA  
Total wattage: 16 W  
Material: aluminium/polycarbonate (PC)

| Variant        | GBP    |
|----------------|--------|
| All S versions | 159.00 |



| Product             | Prod. no. | GBP  |
|---------------------|-----------|------|
| Elliptical diffuser |           |      |
| ○ transparent       | 1004786   | 4.00 |
| Prismatic diffuser  |           |      |
| ○ transparent       | 1004787   | 5.00 |
| Frosted diffuser    |           |      |
| ○ frosted           | 1004788   | 5.00 |
| Honeycomb diffuser  |           |      |
| ● black             | 1004789   | 8.00 |



● black



● black



○ white



● chrome




● black



○ white



● chrome




○ white





|  |  |        |         |     |    | Prod. no. |  |
|--|--|--------|---------|-----|----|-----------|--|
|  |  | 2700 K | 1000 lm | 20° | 19 | 1006705   |  |
|  |  |        | 970 lm  | 40° | 16 | 1006708   |  |
|  |  |        | 960 lm  | 55° | 19 | 1006711   |  |
|  |  | 3000 K | 1060 lm | 20° | 19 | 1006723   |  |
|  |  |        | 1030 lm | 40° | 19 | 1006726   |  |
|  |  |        |         | 55° | 22 | 1006729   |  |
|  |  | 4000 K | 1280 lm | 20° | 22 | 1006741   |  |
|  |  |        | 1150 lm | 40° | 19 | 1006744   |  |
|  |  |        | 1130 lm | 55° | 19 | 1006747   |  |
|  |  | 2700 K | 1020 lm | 20° | 19 | 1006706   |  |
|  |  |        | 1050 lm | 40° | 19 | 1006709   |  |
|  |  |        | 1030 lm | 55° | 22 | 1006712   |  |
|  |  | 3000 K | 1120 lm | 20° | 19 | 1006724   |  |
|  |  |        |         | 40° | 19 | 1006727   |  |
|  |  |        |         | 55° | 22 | 1006730   |  |
|  |  | 4000 K | 1350 lm | 20° | 22 | 1006742   |  |
|  |  |        | 1230 lm | 40° | 19 | 1006745   |  |
|  |  |        | 1220 lm | 55° | 22 | 1006748   |  |
|  |  | 2700 K | 960 lm  | 20° | 19 | 1006707   |  |
|  |  |        | 1000 lm | 40° | 16 | 1006710   |  |
|  |  |        | 980 lm  | 55° | 19 | 1006713   |  |
|  |  | 3000 K | 1050 lm | 20° | 19 | 1006725   |  |
|  |  |        |         | 40° | 19 | 1006728   |  |
|  |  |        |         | 55° | 22 | 1006731   |  |
|  |  | 4000 K | 1350 lm | 20° | 22 | 1006743   |  |
|  |  |        | 1200 lm | 40° | 19 | 1006746   |  |
|  |  |        | 1170 lm | 55° | 22 | 1006749   |  |
|  |  | 2700 K | 1000 lm | 20° | 19 | 1006714   |  |
|  |  |        | 970 lm  | 40° | 16 | 1006717   |  |
|  |  |        | 960 lm  | 55° | 19 | 1006720   |  |
|  |  | 3000 K | 1060 lm | 20° | 19 | 1006732   |  |
|  |  |        | 1030 lm | 40° | 19 | 1006735   |  |
|  |  |        |         | 55° | 22 | 1006738   |  |
|  |  | 4000 K | 1280 lm | 20° | 22 | 1006750   |  |
|  |  |        | 1150 lm | 40° | 19 | 1006753   |  |
|  |  |        | 1130 lm | 55° | 19 | 1006756   |  |
|  |  | 2700 K | 1020 lm | 20° | 19 | 1006715   |  |
|  |  |        | 1050 lm | 40° | 19 | 1006718   |  |
|  |  |        | 1030 lm | 55° | 22 | 1006721   |  |
|  |  | 3000 K | 1120 lm | 20° | 19 | 1006733   |  |
|  |  |        |         | 40° | 19 | 1006736   |  |
|  |  |        |         | 55° | 22 | 1006739   |  |
|  |  | 4000 K | 1350 lm | 20° | 22 | 1006751   |  |
|  |  |        | 1230 lm | 40° | 19 | 1006754   |  |
|  |  |        | 1220 lm | 55° | 22 | 1006757   |  |
|  |  | 2700 K | 960 lm  | 20° | 19 | 1006716   |  |
|  |  |        | 1000 lm | 40° | 16 | 1006719   |  |
|  |  |        | 980 lm  | 55° | 19 | 1006722   |  |
|  |  | 3000 K | 1050 lm | 20° | 19 | 1006734   |  |
|  |  |        |         | 40° | 19 | 1006737   |  |
|  |  |        |         | 55° | 22 | 1006740   |  |
|  |  | 4000 K | 1350 lm | 20° | 22 | 1006752   |  |
|  |  |        | 1200 lm | 40° | 19 | 1006755   |  |
|  |  |        | 1170 lm | 55° | 22 | 1006758   |  |

# NUMINOS® XS 48V, DALI

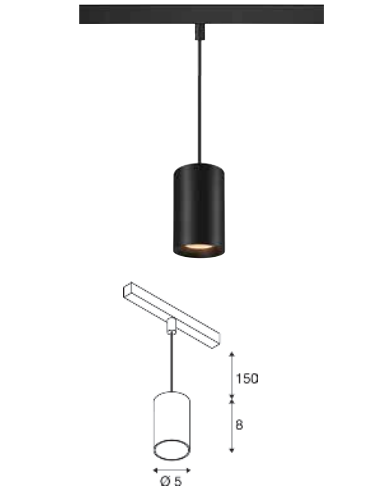

48 V | 200 mA  
Total wattage: 8.7 W  
Material: aluminium/polycarbonate (PC)

| Variant         | GBP    |
|-----------------|--------|
| All XS versions | 168.00 |



| Product             | Prod. no. | GBP  |
|---------------------|-----------|------|
| Elliptical diffuser |           |      |
| ○ transparent       | 1005612   | 5.00 |
| Prismatic diffuser  |           |      |
| ○ transparent       | 1005613   | 5.00 |
| Frosted diffuser    |           |      |
| ○ frosted           | 1005614   | 5.00 |
| Honeycomb diffuser  |           |      |
| ● black             | 1005615   | 8.00 |



● black



● black



○ white



● chrome



● black



○ white



● chrome




○ white



|  |  |        |        |     |    | Prod. no. |  |
|--|--|--------|--------|-----|----|-----------|--|
|  |  | 2700 K | 640 lm | 20° | 16 | 1006759   |  |
|  |  |        | 620 lm | 40° | 22 | 1006762   |  |
|  |  |        | 640 lm | 55° | 25 | 1006765   |  |
|  |  | 3000 K | 700 lm | 20° | 16 | 1006777   |  |
|  |  |        | 670 lm | 40° | 22 | 1006780   |  |
|  |  |        | 690 lm | 55° | 25 | 1006783   |  |
|  |  | 4000 K | 720 lm | 20° | 16 | 1006795   |  |
|  |  |        | 700 lm | 40° | 22 | 1006798   |  |
|  |  |        | 710 lm | 55° | 25 | 1006801   |  |
|  |  |        |        |     |    |           |  |
|  |  | 2700 K | 670 lm | 20° | 16 | 1006760   |  |
|  |  |        | 650 lm | 40° | 22 | 1006763   |  |
|  |  |        | 670 lm | 55° | 25 | 1006766   |  |
|  |  | 3000 K | 730 lm | 20° | 16 | 1006778   |  |
|  |  |        | 700 lm | 40° | 22 | 1006781   |  |
|  |  |        | 720 lm | 55° | 25 | 1006784   |  |
|  |  | 4000 K | 750 lm | 20° | 16 | 1006796   |  |
|  |  |        | 730 lm | 40° | 22 | 1006799   |  |
|  |  |        | 740 lm | 55° | 25 | 1006802   |  |
|  |  |        |        |     |    |           |  |
|  |  | 2700 K | 670 lm | 20° | 16 | 1006761   |  |
|  |  |        | 650 lm | 40° | 22 | 1006764   |  |
|  |  |        | 670 lm | 55° | 25 | 1006767   |  |
|  |  | 3000 K | 730 lm | 20° | 16 | 1006779   |  |
|  |  |        | 700 lm | 40° | 22 | 1006782   |  |
|  |  |        | 720 lm | 55° | 25 | 1006785   |  |
|  |  | 4000 K | 750 lm | 20° | 16 | 1006797   |  |
|  |  |        | 730 lm | 40° | 22 | 1006800   |  |
|  |  |        | 740 lm | 55° | 25 | 1006803   |  |
|  |  |        |        |     |    |           |  |
|  |  | 2700 K | 640 lm | 20° | 16 | 1006768   |  |
|  |  |        | 620 lm | 40° | 22 | 1006771   |  |
|  |  |        | 640 lm | 55° | 25 | 1006774   |  |
|  |  | 3000 K | 700 lm | 20° | 16 | 1006786   |  |
|  |  |        | 670 lm | 40° | 22 | 1006789   |  |
|  |  |        | 690 lm | 55° | 25 | 1006792   |  |
|  |  | 4000 K | 720 lm | 20° | 16 | 1006804   |  |
|  |  |        | 700 lm | 40° | 22 | 1006807   |  |
|  |  |        | 710 lm | 55° | 25 | 1006810   |  |
|  |  |        |        |     |    |           |  |
|  |  | 2700 K | 670 lm | 20° | 16 | 1006769   |  |
|  |  |        | 650 lm | 40° | 22 | 1006772   |  |
|  |  |        | 670 lm | 55° | 25 | 1006775   |  |
|  |  | 3000 K | 730 lm | 20° | 16 | 1006787   |  |
|  |  |        | 700 lm | 40° | 22 | 1006790   |  |
|  |  |        | 720 lm | 55° | 25 | 1006793   |  |
|  |  | 4000 K | 750 lm | 20° | 16 | 1006805   |  |
|  |  |        | 730 lm | 40° | 22 | 1006808   |  |
|  |  |        | 740 lm | 55° | 25 | 1006811   |  |
|  |  |        |        |     |    |           |  |
|  |  | 2700 K | 670 lm | 20° | 16 | 1006770   |  |
|  |  |        | 650 lm | 40° | 22 | 1006773   |  |
|  |  |        | 670 lm | 55° | 25 | 1006776   |  |
|  |  | 3000 K | 730 lm | 20° | 16 | 1006788   |  |
|  |  |        | 700 lm | 40° | 22 | 1006791   |  |
|  |  |        | 720 lm | 55° | 25 | 1006794   |  |
|  |  | 4000 K | 750 lm | 20° | 16 | 1006806   |  |
|  |  |        | 730 lm | 40° | 22 | 1006809   |  |
|  |  |        | 740 lm | 55° | 25 | 1006812   |  |
|  |  |        |        |     |    |           |  |

# NUMINOS® S 48V, DALI




48 V | 350 mA

Total wattage: 16 W

Material: aluminium/polycarbonate (PC)

| Variant        | GBP    |
|----------------|--------|
| All S versions | 176.00 |

⊕

| Product             | Prod. no. | GBP  |
|---------------------|-----------|------|
| Elliptical diffuser |           |      |
| ○ transparent       | 1004786   | 4.00 |
| Prismatic diffuser  |           |      |
| ○ transparent       | 1004787   | 5.00 |
| Frosted diffuser    |           |      |
| ○ frosted           | 1004788   | 5.00 |
| Honeycomb diffuser  |           |      |
| ● black             | 1004789   | 8.00 |






|  |        |  |         |     |    | Prod. no.      |  |
|--|--------|--|---------|-----|----|----------------|--|
|  | 2700 K |  | 1000 lm | 20° | 19 | <b>1006813</b> |  |
|  |        |  | 970 lm  | 40° | 16 | <b>1006816</b> |  |
|  |        |  | 960 lm  | 55° | 19 | <b>1006819</b> |  |
|  | 3000 K |  | 1060 lm | 20° | 19 | <b>1006831</b> |  |
|  |        |  | 1030 lm | 40° | 19 | <b>1006834</b> |  |
|  |        |  |         | 55° | 22 | <b>1006837</b> |  |
|  | 4000 K |  | 1280 lm | 20° | 22 | <b>1006849</b> |  |
|  |        |  | 1150 lm | 40° | 19 | <b>1006852</b> |  |
|  |        |  | 1130 lm | 55° | 19 | <b>1006855</b> |  |
|  | 2700 K |  | 1020 lm | 20° | 19 | <b>1006814</b> |  |
|  |        |  | 1050 lm | 40° | 19 | <b>1006817</b> |  |
|  |        |  | 1030 lm | 55° | 22 | <b>1006820</b> |  |
|  | 3000 K |  |         | 20° | 19 | <b>1006832</b> |  |
|  |        |  | 1120 lm | 40° | 19 | <b>1006835</b> |  |
|  |        |  |         | 55° | 22 | <b>1006838</b> |  |
|  | 4000 K |  | 1350 lm | 20° | 22 | <b>1006850</b> |  |
|  |        |  | 1230 lm | 40° | 19 | <b>1006853</b> |  |
|  |        |  | 1220 lm | 55° | 22 | <b>1006856</b> |  |
|  | 2700 K |  | 960 lm  | 20° | 19 | <b>1006815</b> |  |
|  |        |  | 1000 lm | 40° | 16 | <b>1006818</b> |  |
|  |        |  | 980 lm  | 55° | 19 | <b>1006821</b> |  |
|  | 3000 K |  |         | 20° | 19 | <b>1006833</b> |  |
|  |        |  | 1050 lm | 40° | 19 | <b>1006836</b> |  |
|  |        |  |         | 55° | 22 | <b>1006839</b> |  |
|  | 4000 K |  | 1350 lm | 20° | 22 | <b>1006851</b> |  |
|  |        |  | 1200 lm | 40° | 19 | <b>1006854</b> |  |
|  |        |  | 1170 lm | 55° | 22 | <b>1006857</b> |  |
|  | 2700 K |  | 1000 lm | 20° | 19 | <b>1006822</b> |  |
|  |        |  | 970 lm  | 40° | 16 | <b>1006825</b> |  |
|  |        |  | 960 lm  | 55° | 19 | <b>1006828</b> |  |
|  | 3000 K |  | 1060 lm | 20° | 19 | <b>1006840</b> |  |
|  |        |  | 1030 lm | 40° | 19 | <b>1006843</b> |  |
|  |        |  |         | 55° | 22 | <b>1006846</b> |  |
|  | 4000 K |  | 1280 lm | 20° | 22 | <b>1006858</b> |  |
|  |        |  | 1150 lm | 40° | 19 | <b>1006861</b> |  |
|  |        |  | 1130 lm | 55° | 19 | <b>1006864</b> |  |
|  | 2700 K |  | 1020 lm | 20° | 19 | <b>1006823</b> |  |
|  |        |  | 1050 lm | 40° | 19 | <b>1006826</b> |  |
|  |        |  | 1030 lm | 55° | 22 | <b>1006829</b> |  |
|  | 3000 K |  |         | 20° | 19 | <b>1006841</b> |  |
|  |        |  | 1120 lm | 40° | 19 | <b>1006844</b> |  |
|  |        |  |         | 55° | 22 | <b>1006847</b> |  |
|  | 4000 K |  | 1350 lm | 20° | 22 | <b>1006859</b> |  |
|  |        |  | 1230 lm | 40° | 19 | <b>1006862</b> |  |
|  |        |  | 1220 lm | 55° | 22 | <b>1006865</b> |  |
|  | 2700 K |  | 960 lm  | 20° | 19 | <b>1006824</b> |  |
|  |        |  | 1000 lm | 40° | 16 | <b>1006827</b> |  |
|  |        |  | 980 lm  | 55° | 19 | <b>1006830</b> |  |
|  | 3000 K |  |         | 20° | 19 | <b>1006842</b> |  |
|  |        |  | 1050 lm | 40° | 19 | <b>1006845</b> |  |
|  |        |  |         | 55° | 22 | <b>1006848</b> |  |
|  | 4000 K |  | 1350 lm | 20° | 22 | <b>1006860</b> |  |
|  |        |  | 1200 lm | 40° | 19 | <b>1006863</b> |  |
|  |        |  | 1170 lm | 55° | 22 | <b>1006866</b> |  |





IN-LINE 22  
48V, OPAL, DALI



48 V | 350 mA  
Total wattage: 7.3 W  
Material: aluminium

IN-LINE 22  
48V, DARKLIGHT REFLECTOR, DALI



48 V | 350 mA  
Total wattage: 7.3 W  
Material: aluminium/polycarbonate (PC)



|         |        |        |
|---------|--------|--------|
| 1006619 | Direct | 4000 K |
| 1006620 |        | 680 lm |
| 1006617 | Direct | 3000 K |
| 1006618 |        | 570 lm |
| 1006615 | Direct | 2700 K |
| 1006616 |        | 540 lm |

| Variant                    | Prod. no. | GBP    |
|----------------------------|-----------|--------|
| ● black<br>540 lm   2700 K | 1006615   | 109.00 |
| ● black<br>570 lm   3000 K | 1006617   | 109.00 |
| ● black<br>680 lm   4000 K | 1006619   | 109.00 |
| ○ white<br>540 lm   2700 K | 1006616   | 109.00 |
| ○ white<br>570 lm   3000 K | 1006618   | 109.00 |
| ○ white<br>680 lm   4000 K | 1006620   | 109.00 |



|         |        |        |
|---------|--------|--------|
| 1006631 | Direct | 4000 K |
| 1006632 |        | 650 lm |
| 1006629 | Direct | 3000 K |
| 1006630 |        | 610 lm |
| 1006627 | Direct | 2700 K |
| 1006628 |        | 580 lm |

| Variant                    | Prod. no. | GBP    |
|----------------------------|-----------|--------|
| ● black<br>580 lm   2700 K | 1006627   | 121.00 |
| ● black<br>610 lm   3000 K | 1006629   | 121.00 |
| ● black<br>650 lm   4000 K | 1006631   | 121.00 |
| ○ white<br>580 lm   2700 K | 1006628   | 121.00 |
| ○ white<br>610 lm   3000 K | 1006630   | 121.00 |
| ○ white<br>650 lm   4000 K | 1006632   | 121.00 |






## IN-LINE 44

48V, OPAL, DALI

## IN-LINE 44

48V, DARKLIGHT REFLECTOR, DALI



48 V | 350 mA  
Total wattage: 14 W  
Material: aluminium/polycarbonate (PC)



48 V | 350 mA  
Total wattage: 14 W  
Material: aluminium/polycarbonate (PC)



|                |        |         |
|----------------|--------|---------|
| <b>1006625</b> | Direct | 4000 K  |
| <b>1006626</b> |        | 1450 lm |
| <b>1006623</b> | Direct | 3000 K  |
| <b>1006624</b> |        | 1180 lm |
| <b>1006621</b> | Direct | 2700 K  |
| <b>1006622</b> |        | 1140 lm |

| Variant                     | Prod. no.      | GBP           |
|-----------------------------|----------------|---------------|
| ● black<br>1140 lm   2700 K | <b>1006621</b> | <b>159.00</b> |
| ● black<br>1180 lm   3000 K | <b>1006623</b> | <b>159.00</b> |
| ● black<br>1450 lm   4000 K | <b>1006625</b> | <b>159.00</b> |
| ○ white<br>1140 lm   2700 K | <b>1006622</b> | <b>159.00</b> |
| ○ white<br>1180 lm   3000 K | <b>1006624</b> | <b>159.00</b> |
| ○ white<br>1450 lm   4000 K | <b>1006626</b> | <b>159.00</b> |



|                |        |         |
|----------------|--------|---------|
| <b>1006637</b> | Direct | 4000 K  |
| <b>1006638</b> |        | 1250 lm |
| <b>1006635</b> | Direct | 3000 K  |
| <b>1006636</b> |        | 1230 lm |
| <b>1006633</b> | Direct | 2700 K  |
| <b>1006634</b> |        | 1180 lm |

| Variant                     | Prod. no.      | GBP           |
|-----------------------------|----------------|---------------|
| ● black<br>1180 lm   2700 K | <b>1006633</b> | <b>172.00</b> |
| ● black<br>1230 lm   3000 K | <b>1006635</b> | <b>172.00</b> |
| ● black<br>1250 lm   4000 K | <b>1006637</b> | <b>172.00</b> |
| ○ white<br>1180 lm   2700 K | <b>1006634</b> | <b>172.00</b> |
| ○ white<br>1230 lm   3000 K | <b>1006636</b> | <b>172.00</b> |
| ○ white<br>1250 lm   4000 K | <b>1006638</b> | <b>172.00</b> |







## IN-LINE 24

48V, MOVE, DARKLIGHT  
REFLECTOR, DALI

## IN-LINE 46

48V, MOVE, DARKLIGHT  
REFLECTOR, DALI



48 V | 350 mA  
Total wattage: 7.3 W  
Material: aluminium/polycarbonate (PC)



48 V | 350 mA  
Total wattage: 14 W  
Material: aluminium/polycarbonate (PC)



|                |        |        |
|----------------|--------|--------|
| <b>1006643</b> | Direct | 4000 K |
| <b>1006644</b> |        | 650 lm |
| <b>1006641</b> | Direct | 3000 K |
| <b>1006642</b> |        | 610 lm |
| <b>1006639</b> | Direct | 2700 K |
| <b>1006640</b> |        | 580 lm |

| Variant                    | Prod. no.      | GBP           |
|----------------------------|----------------|---------------|
| ● black<br>580 lm   2700 K | <b>1006639</b> | <b>130.00</b> |
| ● black<br>610 lm   3000 K | <b>1006641</b> | <b>130.00</b> |
| ● black<br>650 lm   4000 K | <b>1006643</b> | <b>130.00</b> |
| ○ white<br>580 lm   2700 K | <b>1006640</b> | <b>130.00</b> |
| ○ white<br>610 lm   3000 K | <b>1006642</b> | <b>130.00</b> |
| ○ white<br>650 lm   4000 K | <b>1006644</b> | <b>130.00</b> |




|                |        |         |
|----------------|--------|---------|
| <b>1006649</b> | Direct | 4000 K  |
| <b>1006650</b> |        | 1250 lm |
| <b>1006647</b> | Direct | 3000 K  |
| <b>1006648</b> |        | 1230 lm |
| <b>1006645</b> | Direct | 2700 K  |
| <b>1006646</b> |        | 1180 lm |

| Variant                     | Prod. no.      | GBP           |
|-----------------------------|----------------|---------------|
| ● black<br>1180 lm   2700 K | <b>1006645</b> | <b>180.00</b> |
| ● black<br>1230 lm   3000 K | <b>1006647</b> | <b>180.00</b> |
| ● black<br>1250 lm   4000 K | <b>1006649</b> | <b>180.00</b> |
| ○ white<br>1180 lm   2700 K | <b>1006646</b> | <b>180.00</b> |
| ○ white<br>1230 lm   3000 K | <b>1006648</b> | <b>180.00</b> |
| ○ white<br>1250 lm   4000 K | <b>1006650</b> | <b>180.00</b> |



1008963 455

## FIX-IT! 48V, DALI, ROUND, STANDARD SURFACE MOUNTED TRACK



48 V | 175 mA

Total wattage: 6.6 W

Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard



|         |      |        |
|---------|------|--------|
| 1008949 |      | 3000 K |
| 1008950 | Down |        |
| 1008951 |      | 850 lm |
| 1008952 |      |        |
| 1008945 |      | 2700 K |
| 1008946 | Down |        |
| 1008947 |      | 800 lm |
| 1008948 |      |        |

| Variant                           | Prod. no. | GBP   |
|-----------------------------------|-----------|-------|
| ● black<br>800 lm   2700 K        | 1008946   | 96.00 |
| ● black<br>850 lm   3000 K        | 1008950   | 96.00 |
| ○ white/black<br>800 lm   2700 K  | 1008945   | 96.00 |
| ○ white/black<br>850 lm   3000 K  | 1008949   | 96.00 |
| ● gold/black<br>800 lm   2700 K   | 1008947   | 96.00 |
| ● gold/black<br>850 lm   3000 K   | 1008951   | 96.00 |
| ● bronze/black<br>800 lm   2700 K | 1008948   | 96.00 |
| ● bronze/black<br>850 lm   3000 K | 1008952   | 96.00 |




| Product     | Prod. no. | GBP   |
|-------------|-----------|-------|
| Round inlay |           |       |
| ● black     | 1008994   | 26.00 |
| ○ white     | 1008993   | 26.00 |
| ● gold      | 1008995   | 26.00 |
| ● bronze    | 1008996   | 26.00 |





## FIX-IT!

48V, DALI, ROUND, STANDARD  
SURFACE MOUNTED TRACK



48 V | 350 mA  
Total wattage: 7.4 W  
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard



Down  
2000 K - 3000 K  
3 lm - 480 lm


| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black        | 1008954   | 96.00 |
| ○ white/black  | 1008953   | 96.00 |
| ● gold/black   | 1008955   | 96.00 |
| ● bronze/black | 1008956   | 96.00 |



| Product     | Prod. no. | GBP   |
|-------------|-----------|-------|
| Round inlay |           |       |
| ● black     | 1008994   | 26.00 |
| ○ white     | 1008993   | 26.00 |
| ● gold      | 1008995   | 26.00 |
| ● bronze    | 1008996   | 26.00 |

## FIX-IT!

48V, DALI, ROUND, DEEP  
SURFACE MOUNTED TRACK



48 V | 175 mA  
Total wattage: 6.6 W  
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard



|         |                 |
|---------|-----------------|
| Down    | 2000 K - 3000 K |
| 1008961 | 3000 K          |
| 1008962 | 850 lm          |
| 1008963 |                 |
| 1008964 |                 |
| 1008957 | 2700 K          |
| 1008958 | 800 lm          |
| 1008959 |                 |
| 1008960 |                 |


| Variant        | Prod. no.       | GBP   |
|----------------|-----------------|-------|
| ● black        | 1008958         | 96.00 |
| ● black        | 800 lm   2700 K | 96.00 |
| ● black        | 850 lm   3000 K | 96.00 |
| ○ white/black  | 800 lm   2700 K | 96.00 |
| ○ white/black  | 850 lm   3000 K | 96.00 |
| ● gold/black   | 800 lm   2700 K | 96.00 |
| ● gold/black   | 850 lm   3000 K | 96.00 |
| ● bronze/black | 800 lm   2700 K | 96.00 |
| ● bronze/black | 850 lm   3000 K | 96.00 |



| Product     | Prod. no. | GBP   |
|-------------|-----------|-------|
| Round inlay |           |       |
| ● black     | 1008994   | 26.00 |
| ○ white     | 1008993   | 26.00 |
| ● gold      | 1008995   | 26.00 |
| ● bronze    | 1008996   | 26.00 |

## FIX-IT!

48V, DALI, ROUND, DEEP  
SURFACE MOUNTED TRACK



48 V | 350 mA  
Total wattage: 7.4 W  
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard



Down  
2000 K - 3000 K  
3 lm - 480 lm


| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black        | 1008966   | 96.00 |
| ○ white/black  | 1008965   | 96.00 |
| ● gold/black   | 1008967   | 96.00 |
| ● bronze/black | 1008968   | 96.00 |



| Product     | Prod. no. | GBP   |
|-------------|-----------|-------|
| Round inlay |           |       |
| ● black     | 1008994   | 26.00 |
| ○ white     | 1008993   | 26.00 |
| ● gold      | 1008995   | 26.00 |
| ● bronze    | 1008996   | 26.00 |

1008980 457

## FIX-IT! 48V, DALI, SQUARE, STANDARD SURFACE MOUNTED TRACK



48 V | 175 mA

Total wattage: 6.6 W

Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard



|         |      |        |
|---------|------|--------|
| 1008973 |      | 3000 K |
| 1008974 | Down |        |
| 1008975 |      | 865 lm |
| 1008976 |      |        |
| 1008969 |      | 2700 K |
| 1008970 | Down |        |
| 1008971 |      | 800 lm |
| 1008972 |      |        |

| Variant                           | Prod. no. | GBP   |
|-----------------------------------|-----------|-------|
| ● black<br>800 lm   2700 K        | 1008970   | 96.00 |
| ● black<br>865 lm   3000 K        | 1008974   | 96.00 |
| ○ white/black<br>800 lm   2700 K  | 1008969   | 96.00 |
| ○ white/black<br>865 lm   3000 K  | 1008973   | 96.00 |
| ● gold/black<br>800 lm   2700 K   | 1008971   | 96.00 |
| ● gold/black<br>865 lm   3000 K   | 1008975   | 96.00 |
| ● bronze/black<br>800 lm   2700 K | 1008972   | 96.00 |
| ● bronze/black<br>865 lm   3000 K | 1008976   | 96.00 |




| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Square inlay |           |       |
| ● black      | 1008998   | 26.00 |
| ○ white      | 1008997   | 26.00 |
| ● gold       | 1008999   | 26.00 |
| ● bronze     | 1009000   | 26.00 |



## FIX-IT!

48V, DALI, SQUARE, STANDARD  
SURFACE MOUNTED TRACK




48 V | 350 mA  
Total wattage: 7.4 W  
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

## FIX-IT!

48V, DALI, SQUARE, DEEP  
SURFACE MOUNTED TRACK




48 V | 175 mA  
Total wattage: 6.6 W  
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard

## FIX-IT!

48V, DALI, SQUARE, DEEP  
SURFACE MOUNTED TRACK



48 V | 350 mA  
Total wattage: 7.4 W  
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard



Down  
2000 K - 3000 K  
3 lm - 495 lm



|         |        |
|---------|--------|
| 1008985 | 3000 K |
| 1008986 | Down   |
| 1008987 | 865 lm |
| 1008988 |        |
| 1008981 | 2700 K |
| 1008982 | Down   |
| 1008983 | 800 lm |
| 1008984 |        |



Down  
2000 K - 3000 K  
3 lm - 495 lm

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black        | 1008978   | 96.00 |
| ○ white/black  | 1008977   | 96.00 |
| ● gold/black   | 1008979   | 96.00 |
| ● bronze/black | 1008980   | 96.00 |

| Variant        | Prod. no.       | GBP           |
|----------------|-----------------|---------------|
| ● black        | 800 lm   2700 K | 1008982 96.00 |
| ● black        | 865 lm   3000 K | 1008986 96.00 |
| ○ white/black  | 800 lm   2700 K | 1008981 96.00 |
| ○ white/black  | 865 lm   3000 K | 1008985 96.00 |
| ● gold/black   | 800 lm   2700 K | 1008983 96.00 |
| ● gold/black   | 865 lm   3000 K | 1008987 96.00 |
| ● bronze/black | 800 lm   2700 K | 1008984 96.00 |
| ● bronze/black | 865 lm   3000 K | 1008988 96.00 |

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black        | 1008990   | 96.00 |
| ○ white/black  | 1008989   | 96.00 |
| ● gold/black   | 1008991   | 96.00 |
| ● bronze/black | 1008992   | 96.00 |



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Square inlay |           |       |
| ● black      | 1008998   | 26.00 |
| ○ white      | 1008997   | 26.00 |
| ● gold       | 1008999   | 26.00 |
| ● bronze     | 1009000   | 26.00 |



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Square inlay |           |       |
| ● black      | 1008998   | 26.00 |
| ○ white      | 1008997   | 26.00 |
| ● gold       | 1008999   | 26.00 |
| ● bronze     | 1009000   | 26.00 |



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Square inlay |           |       |
| ● black      | 1008998   | 26.00 |
| ○ white      | 1008997   | 26.00 |
| ● gold       | 1008999   | 26.00 |
| ● bronze     | 1009000   | 26.00 |








## GRIP! FLAT

48V, DALI



48 V | 500 mA  
Total wattage: 14.5 W  
Material: aluminium

- Including colour temperature switch  
2700 K/3000 K
- Honeycomb insert included



|      |        |        |
|------|--------|--------|
| Down | 2700 K | 3000 K |
|      | 400 lm | 430 lm |


| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1009016   | 239.00 |
| ● white/black | 1009017   | 239.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| GRIP! FLAT, decorative ring |           |       |
| ● black                     | 1009102   | 28.00 |
| ○ white                     | 1009103   | 28.00 |
| ● gold                      | 1009104   | 28.00 |

## GRIP! FLAT

48V, PD, DALI



48 V | 500 mA  
Total wattage: 14.5 W  
Material: aluminium

- Including colour temperature switch  
2700 K/3000 K
- Honeycomb insert included



|      |        |        |
|------|--------|--------|
| Down | 2700 K | 3000 K |
|      | 400 lm | 430 lm |


| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1009018   | 247.00 |
| ● white/black | 1009019   | 247.00 |



| Product                              | Prod. no. | GBP    |
|--------------------------------------|-----------|--------|
| GRIP! FLAT, decorative ring          |           |        |
| ● black                              | 1009102   | 28.00  |
| ○ white                              | 1009103   | 28.00  |
| ● gold                               | 1009104   | 28.00  |
| GRIP! FLAT, Felt shade A, anthracite |           |        |
| ● anthracite                         | 1010403   | 121.00 |
| GRIP! FLAT, Felt shade A, grey       |           |        |
| ● grey                               | 1010404   | 121.00 |
| GRIP! FLAT, Felt shade A, yellow     |           |        |
| ● ochre                              | 1010405   | 121.00 |
| GRIP! FLAT, Felt shade B, anthracite |           |        |
| ● anthracite                         | 1010406   | 88.00  |
| GRIP! FLAT, Felt shade B, grey       |           |        |
| ● grey                               | 1010407   | 88.00  |
| GRIP! FLAT, Felt shade B, yellow     |           |        |
| ● ochre                              | 1010408   | 88.00  |

## GRIP! FLAT

FELT SHADE Ø 50 CM X 6.2 CM




Ø: 50 cm  
H: 6.2 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010403   | 121.00 |
| ● grey       | 1010404   | 121.00 |
| ● ochre      | 1010405   | 121.00 |

## GRIP! FLAT

FELT SHADE Ø 50 CM X 0.6 CM



Ø: 50 cm  
H: 0.6 cm


| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1010406   | 88.00 |
| ● grey       | 1010407   | 88.00 |
| ● ochre      | 1010408   | 88.00 |



1008410 460

## GRIP! S

48V, DALI, STANDARD TRACK, Ø  
3.0 CM



48 V | 250 mA  
Total wattage: 9.8 W  
Material: aluminium

- Compatible only with the standard 48 V surface-mounted track
- Honeycomb accessories included



|         |      |        |
|---------|------|--------|
| 1008410 | Down | 3000 K |
| 1008412 |      |        |
| 1008413 |      | 620 lm |
| 1008414 |      |        |
| 1008405 | Down | 2700 K |
| 1008407 |      |        |
| 1008408 |      | 590 lm |
| 1008409 |      |        |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black/gold<br>590 lm   2700 K   | 1008407   | 147.00 |
| ● black/gold<br>620 lm   3000 K   | 1008412   | 147.00 |
| ● white/black<br>590 lm   2700 K  | 1008405   | 147.00 |
| ● white/black<br>620 lm   3000 K  | 1008410   | 147.00 |
| ● gold/black<br>590 lm   2700 K   | 1008409   | 147.00 |
| ● gold/black<br>620 lm   3000 K   | 1008414   | 147.00 |
| ● bronze/black<br>590 lm   2700 K | 1008408   | 147.00 |
| ● bronze/black<br>620 lm   3000 K | 1008413   | 147.00 |




| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! S, decorative ring |           |       |
| ○ white                  | 1011829   | 16.00 |
| ● black                  | 1011830   | 16.00 |
| ● nickel                 | 1011831   | 16.00 |
| ● gold                   | 1011832   | 16.00 |
| HONEYCOMB + Spacer       |           |       |
| ● black                  | 1011837   | 8.00  |



## GRIP! S

48V, DALI, DEEP & RECESSED  
TRACK, Ø 3.0 CM



48 V | 250 mA  
Total wattage: 9.8 W  
Material: aluminium

- Honeycomb accessories included



|         |      |        |
|---------|------|--------|
| 1009025 | Down | 3000 K |
| 1009027 |      |        |
| 1009029 |      | 620 lm |
| 1009031 |      |        |

|         |      |        |
|---------|------|--------|
| 1009024 | Down | 2700 K |
| 1009026 |      |        |
| 1009028 |      | 590 lm |
| 1009030 |      |        |


| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black/gold<br>590 lm   2700 K   | 1009026   | 147.00 |
| ● black/gold<br>620 lm   3000 K   | 1009027   | 147.00 |
| ○ white/black<br>590 lm   2700 K  | 1009024   | 147.00 |
| ○ white/black<br>620 lm   3000 K  | 1009025   | 147.00 |
| ● gold/black<br>590 lm   2700 K   | 1009030   | 147.00 |
| ● gold/black<br>620 lm   3000 K   | 1009031   | 147.00 |
| ● bronze/black<br>590 lm   2700 K | 1009028   | 147.00 |
| ● bronze/black<br>620 lm   3000 K | 1009029   | 147.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! S, decorative ring |           |       |
| ○ white                  | 1011829   | 16.00 |
| ● black                  | 1011830   | 16.00 |
| ● nickel                 | 1011831   | 16.00 |
| ● gold                   | 1011832   | 16.00 |
| HONEYCOMB + Spacer       |           |       |
| ● black                  | 1011837   | 8.00  |

## GRIP! S

48V, DALI, STANDARD TRACK, Ø  
3.0 CM



48 V | 250 mA  
Total wattage: 9.8 W  
Material: aluminium

- Compatible only with the standard 48 V surface-mounted track
- Honeycomb accessories included



|      |                 |
|------|-----------------|
| Down | 2000 K - 3000 K |
|      | 350 lm          |


| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1008417   | 147.00 |
| ○ white/black  | 1008415   | 147.00 |
| ● gold/black   | 1008419   | 147.00 |
| ● bronze/black | 1008418   | 147.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! S, decorative ring |           |       |
| ○ white                  | 1011829   | 16.00 |
| ● black                  | 1011830   | 16.00 |
| ● nickel                 | 1011831   | 16.00 |
| ● gold                   | 1011832   | 16.00 |
| HONEYCOMB + Spacer       |           |       |
| ● black                  | 1011837   | 8.00  |

## GRIP! S

48V, DALI, DEEP & RECESSED  
TRACK, Ø 3.0 CM



48 V | 250 mA  
Total wattage: 9.8 W  
Material: aluminium

- Honeycomb accessories included



|      |                 |
|------|-----------------|
| Down | 2000 K - 3000 K |
|      | 350 lm          |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1009033   | 147.00 |
| ○ white/black  | 1009032   | 147.00 |
| ● gold/black   | 1009035   | 147.00 |
| ● bronze/black | 1009034   | 147.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! S, decorative ring |           |       |
| ○ white                  | 1011829   | 16.00 |
| ● black                  | 1011830   | 16.00 |
| ● nickel                 | 1011831   | 16.00 |
| ● gold                   | 1011832   | 16.00 |
| HONEYCOMB + Spacer       |           |       |
| ● black                  | 1011837   | 8.00  |



1008456 463



## GRIP! S

48V, PD, DALI, Ø 3,0 CM



48 V | 250 mA  
Total wattage: 9.8 W  
Material: aluminium

- Honeycomb accessories included



|         |        |
|---------|--------|
| 1008459 | 3000 K |
| 1008461 | Down   |
| 1008462 | 620 lm |
| 1008463 |        |

|         |        |
|---------|--------|
| 1008454 | 2700 K |
| 1008456 | Down   |
| 1008457 | 590 lm |
| 1008458 |        |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black/gold<br>590 lm   2700 K   | 1008456   | 172.00 |
| ● black/gold<br>620 lm   3000 K   | 1008461   | 172.00 |
| ○ white/black<br>590 lm   2700 K  | 1008454   | 172.00 |
| ○ white/black<br>620 lm   3000 K  | 1008459   | 172.00 |
| ● gold/black<br>590 lm   2700 K   | 1008458   | 172.00 |
| ● gold/black<br>620 lm   3000 K   | 1008463   | 172.00 |
| ● bronze/black<br>590 lm   2700 K | 1008457   | 172.00 |
| ● bronze/black<br>620 lm   3000 K | 1008462   | 172.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! S, decorative ring |           |       |
| ○ white                  | 1011829   | 16.00 |
| ● black                  | 1011830   | 16.00 |
| ● nickel                 | 1011831   | 16.00 |
| ● gold                   | 1011832   | 16.00 |
| HONEYCOMB + Spacer       |           |       |
| ● black                  | 1011837   | 8.00  |

## GRIP! S

48V, PD, DALI, Ø 3,0 CM



48 V | 250 mA  
Total wattage: 9.8 W  
Material: aluminium

- Honeycomb accessories included



|      |                 |
|------|-----------------|
| Down | 2000 K - 3000 K |
|      | 350 lm          |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1008466   | 172.00 |
| ○ white/black  | 1008464   | 172.00 |
| ● gold/black   | 1008468   | 172.00 |
| ● bronze/black | 1008467   | 172.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! S, decorative ring |           |       |
| ○ white                  | 1011829   | 16.00 |
| ● black                  | 1011830   | 16.00 |
| ● nickel                 | 1011831   | 16.00 |
| ● gold                   | 1011832   | 16.00 |
| HONEYCOMB + Spacer       |           |       |
| ● black                  | 1011837   | 8.00  |

## GRIP! S MINI

48V, DALI, SHORT, STANDARD TRACK, Ø 3.0 CM



NEW



48 V | 100 mA  
Total wattage: 4.2 W  
Material: aluminium

- Honeycomb accessories included



|         |        |
|---------|--------|
| 1012170 | 2700 K |
| 1012172 | Down   |
|         | 260 lm |

|         |        |
|---------|--------|
| 1012171 | 3000 K |
| 1012173 | Down   |
|         | 270 lm |

| Variant                          | Prod. no. | GBP    |
|----------------------------------|-----------|--------|
| ● black/gold<br>260 lm   2700 K  | 1012172   | 147.00 |
| ● black/gold<br>270 lm   3000 K  | 1012173   | 147.00 |
| ○ white/black<br>260 lm   2700 K | 1012170   | 147.00 |
| ○ white/black<br>270 lm   3000 K | 1012171   | 147.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! S, decorative ring |           |       |
| ○ white                  | 1011829   | 16.00 |
| ● black                  | 1011830   | 16.00 |
| ● nickel                 | 1011831   | 16.00 |
| ● gold                   | 1011832   | 16.00 |
| HONEYCOMB + Spacer       |           |       |
| ● black                  | 1011837   | 8.00  |



1012377 465








## GRIP! M

48V, DALI, DEEP & RECESSED  
TRACK, Ø 4.3 CM



48 V | 350 mA  
Total wattage: 13 W  
Material: aluminium

• Honeycomb accessories included



|         |         |
|---------|---------|
| 1012375 | 2700 K  |
| 1012377 | 1450 lm |
| 1012376 | 3000 K  |
| 1012378 | 1540 lm |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black/gold<br>1450 lm   2700 K  | 1012377   | 163.00 |
| ● black/gold<br>1540 lm   3000 K  | 1012378   | 163.00 |
| ● white/black<br>1450 lm   2700 K | 1012375   | 163.00 |
| ● white/black<br>1540 lm   3000 K | 1012376   | 163.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! M, decorative ring |           |       |
| ○ white                  | 1011833   | 18.00 |
| ● black                  | 1011834   | 18.00 |
| ● nickel                 | 1011835   | 18.00 |
| ● gold                   | 1011836   | 18.00 |
| Honeycomb                |           |       |
| ● black                  | 1011838   | 10.00 |



1010801 466

## LALU® SET

48V, PD, LED BASE, DALI



48 V | 500 mA  
Total wattage: 9 W  
Material: Aluminium/Steel

- Including colour temperature switch  
2700 K/3000 K
- With black adapter




|      | 2700 K | 3000 K |
|------|--------|--------|
| Down | 500 lm | 550 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010801   | 222.00 |



## LALU® SET

48V, PD, LED BASE, DALI



48 V | 500 mA  
Total wattage: 9 W  
Material: Aluminium/Steel

- Including colour temperature switch  
2700 K/3000 K
- With black adapter



Down

| 2700 K | 3000 K |
|--------|--------|
| 600 lm | 650 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010802   | 205.00 |

## LALU® SET

48V, PD, LED BASE, DALI



48 V | 500 mA  
Total wattage: 9 W  
Material: Aluminium/Steel

- Including colour temperature switch  
2700 K/3000 K
- With black adapter




Down

| 2700 K | 3000 K |
|--------|--------|
| 650 lm | 700 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010803   | 222.00 |

## LALU® SET

48V, PD, LED BASE, DALI



48 V | 500 mA  
Total wattage: 9 W  
Material: Aluminium/Steel

- Including colour temperature switch  
2700 K/3000 K
- With black adapter



Down

| 2700 K | 3000 K |
|--------|--------|
| 600 lm | 650 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010804   | 210.00 |



Discover more LALU  
colours and shapes®  
at [slv.com](http://slv.com)



139081 475

# INDOOR | LOW-VOLTAGE SYSTEMS



SOCKET  
ASmara | 475



SOCKET  
Teleskop | 475



SOCKET  
Cosmic | 477



LED  
Durno | 477



LED  
NOBLO® SPOT | 477



# TENSEO

Low-voltage cable 4 MMA<sup>2</sup>



|                  | 1,000 cm       | 1,000 cm       | 1,000 cm       |
|------------------|----------------|----------------|----------------|
| Max. current (A) | 25 A max.      | 25 A max.      | 25 A max.      |
| Colour           | ● black        | ○ white        | ○ transparent  |
| Material         | Copper/Plastic | Copper/Plastic | Copper/Plastic |
| L x W x H (cm)   | 1,000 cm       | 1,000 cm       | 1,000 cm       |
| Prod. no.        | <b>1002602</b> | <b>1002603</b> | <b>1002604</b> |
| GBP              | 26.00          | 26.00          | 26.00          |

|                  | 2,000 cm       | 2,000 cm       | 2,000 cm       |
|------------------|----------------|----------------|----------------|
| Max. current (A) | 25 A max.      | 25 A max.      | 25 A max.      |
| Colour           | ● black        | ○ white        | ○ transparent  |
| Material         | Copper/Plastic | Copper/Plastic | Copper/Plastic |
| L x W x H (cm)   | 2,000 cm       | 2,000 cm       | 2,000 cm       |
| Prod. no.        | <b>139030</b>  | <b>139031</b>  | <b>139024</b>  |
| GBP              | 43.00          | 43.00          | 43.00          |

TENSEO

Low-voltage cable 6 MMA<sup>2</sup>, 20M

---



|                  | 2,000 cm       | 2,000 cm       | 2,000 cm       |
|------------------|----------------|----------------|----------------|
| Max. current (A) | 25 A max.      | 25 A max.      | 25 A max.      |
| Colour           | ● black        | ○ transparent  | ○ white        |
| Material         | Copper/Plastic | Copper/Plastic | Copper/Plastic |
| L x W x H (cm)   | 2,000 cm       | 2,000 cm       | 2,000 cm       |
| Prod. no.        | 139030         | 139024         | 139031         |
| GBP              | 43.00          | 43.00          | 43.00          |

1002695 477

**12V AC | 50VA CONVENTIONAL**Steel/Brass  
H: 11 cm

|          |           |                |                   |
|----------|-----------|----------------|-------------------|
| ● black  | Prod. no. | <b>1002691</b> | <b>96.00 GBP</b>  |
| ○ white  | Prod. no. | <b>1002692</b> | <b>96.00 GBP</b>  |
| ● chrome | Prod. no. | <b>1002693</b> | <b>100.00 GBP</b> |

**12V AC | 105VA CONVENTIONAL**Brass/Glass  
H: 11 cm

|          |           |               |                   |
|----------|-----------|---------------|-------------------|
| ○ white  | Prod. no. | <b>138981</b> | <b>117.00 GBP</b> |
| ● chrome | Prod. no. | <b>138982</b> | <b>130.00 GBP</b> |

**12V AC | 210VA CONVENTIONAL**Steel/Brass  
H: 11 cm

|          |           |               |                   |
|----------|-----------|---------------|-------------------|
| ○ white  | Prod. no. | <b>138991</b> | <b>180.00 GBP</b> |
| ● chrome | Prod. no. | <b>138992</b> | <b>184.00 GBP</b> |

**CABLE TENSIONER**Brass  
H: 11 cm

|          |           |               |                  |
|----------|-----------|---------------|------------------|
| ● black  | Prod. no. | <b>181530</b> | <b>26.00 GBP</b> |
| ○ white  | Prod. no. | <b>181531</b> | <b>26.00 GBP</b> |
| ● chrome | Prod. no. | <b>181532</b> | <b>27.00 GBP</b> |

**WALL BRACKET**3 cm | Steel/Brass  
L: 3 cm

|          |           |               |                  |
|----------|-----------|---------------|------------------|
| ● black  | Prod. no. | <b>186300</b> | <b>26.00 GBP</b> |
| ○ white  | Prod. no. | <b>186301</b> | <b>26.00 GBP</b> |
| ● chrome | Prod. no. | <b>186302</b> | <b>27.00 GBP</b> |

**CABLE GUIDE 6 CM**Steel/Brass  
H: 6 cm

|          |           |               |                  |
|----------|-----------|---------------|------------------|
| ● black  | Prod. no. | <b>186330</b> | <b>22.00 GBP</b> |
| ○ white  | Prod. no. | <b>186331</b> | <b>22.00 GBP</b> |
| ● chrome | Prod. no. | <b>186332</b> | <b>26.00 GBP</b> |

**CABLE GUIDE**Steel/Brass  
H: 16 cm

|          |           |               |                  |
|----------|-----------|---------------|------------------|
| ● black  | Prod. no. | <b>186340</b> | <b>26.00 GBP</b> |
| ○ white  | Prod. no. | <b>186341</b> | <b>26.00 GBP</b> |
| ● chrome | Prod. no. | <b>186342</b> | <b>27.00 GBP</b> |

**WALL BRACKET 10 CM**Steel/Brass  
H: 11.5 cm  
With clamping device

|          |           |               |                  |
|----------|-----------|---------------|------------------|
| ● black  | Prod. no. | <b>186310</b> | <b>36.00 GBP</b> |
| ○ white  | Prod. no. | <b>186311</b> | <b>36.00 GBP</b> |
| ● chrome | Prod. no. | <b>186312</b> | <b>38.00 GBP</b> |

**CEILING CABLE GUIDE**Steel/Brass  
H: 16 cm

|          |           |               |                  |
|----------|-----------|---------------|------------------|
| ● black  | Prod. no. | <b>186640</b> | <b>80.00 GBP</b> |
| ○ white  | Prod. no. | <b>186641</b> | <b>80.00 GBP</b> |
| ● chrome | Prod. no. | <b>186642</b> | <b>88.00 GBP</b> |

**POWER FEED**Brass  
H: 1.8 cm  
25A max.

|          |           |               |                  |
|----------|-----------|---------------|------------------|
| ● black  | Prod. no. | <b>186350</b> | <b>11.00 GBP</b> |
| ○ white  | Prod. no. | <b>186351</b> | <b>11.00 GBP</b> |
| ● chrome | Prod. no. | <b>186352</b> | <b>13.00 GBP</b> |

**INSULATING CONNECTOR**6.4 cm | Aluminium/Plastic  
L: 6.4 cm

|          |           |               |                  |
|----------|-----------|---------------|------------------|
| ● black  | Prod. no. | <b>186360</b> | <b>21.00 GBP</b> |
| ○ white  | Prod. no. | <b>186361</b> | <b>21.00 GBP</b> |
| ● chrome | Prod. no. | <b>186362</b> | <b>22.00 GBP</b> |

**SPACER**Aluminium  
W: 9 cm

|          |           |                |                  |
|----------|-----------|----------------|------------------|
| ● black  | Prod. no. | <b>1002700</b> | <b>41.00 GBP</b> |
| ○ white  | Prod. no. | <b>1002701</b> | <b>41.00 GBP</b> |
| ● chrome | Prod. no. | <b>1002702</b> | <b>49.00 GBP</b> |

**ELECTRICAL SPACER**Brass  
W: 9 cm


|          |           |                |                  |
|----------|-----------|----------------|------------------|
| ● black  | Prod. no. | <b>1002703</b> | <b>49.00 GBP</b> |
| ○ white  | Prod. no. | <b>1002704</b> | <b>49.00 GBP</b> |
| ● chrome | Prod. no. | <b>1002705</b> | <b>54.00 GBP</b> |

**SUSPENSION KIT 2 M**Steel/Aluminium  
W: 18.6 cm  
Length of suspension: 200 cm

|          |           |                |                  |
|----------|-----------|----------------|------------------|
| ● black  | Prod. no. | <b>1002697</b> | <b>36.00 GBP</b> |
| ○ white  | Prod. no. | <b>1002698</b> | <b>36.00 GBP</b> |
| ● chrome | Prod. no. | <b>1002699</b> | <b>38.00 GBP</b> |

139071

475








## ASMARA

LV, QR-C51



12V AC  
Material: Stainless steel



Base: 1xGX5.3

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 139070    | 26.00 |
| ○ white  | 139071    | 26.00 |
| ● chrome | 139072    | 27.00 |



GU5.3 | 6 W | 36°  
460 lm | 3000 K | EEC = F

Prod. no.: 1001575 30.00 GBP

## TELESKOP

LV, QR-C51



12V AC  
Material: Steel/Brass

- Telescopic adjustable from 21-51 cm



Base: 1xGX5.3

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 139080    | 30.00 |
| ○ white  | 139081    | 30.00 |
| ● chrome | 139082    | 32.00 |



GU5.3 | 6 W | 36°  
450 lm | 2700 K | EEC = G


Prod. no.: 1001574 30.00 GBP

1002862 477



## COSMIC

LV, QR-C51



12V AC  
Material: Steel/Brass



Base: 1xGX5.3

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 139090    | 36.00 |
| ○ white  | 139091    | 36.00 |
| ● chrome | 139092    | 37.00 |




GU5.3 | 6 W | 36°  
450 lm | 2700 K | EEC = G



Prod. no.: 1001574 30.00 GBP

## DURNO

LV



12V AC  
Total wattage: 6 W  
Material: Aluminium/Stainless steel




2700 K  
360 lm

| Variant                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| ● black                  | 1002861   | 71.00 |
| ○ white                  | 1002862   | 71.00 |
| ● chrome/stainless steel | 1002863   | 75.00 |

## NOBLO® SPOT

LV, ROPE TRACK



12V AC  
Total wattage: 8.5 W  
Material: aluminium



1002694 2700 K  
420 lm

1002695 2700 K  
450 lm

1002696 2700 K  
450 lm

| Variant            | Prod. no. | GBP   |
|--------------------|-----------|-------|
| ● black<br>420 lm  | 1002694   | 69.00 |
| ○ white<br>450 lm  | 1002695   | 69.00 |
| ● chrome<br>450 lm | 1002696   | 73.00 |



1008060 525

143580 527

# INDOOR | 1-PHASE SYSTEMS

|                                                                                                                                    |                                                                                                                                    |                                                                                                                                      |                                                                                                                                         |                                                                                                                                      |                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
|  <p>NEW</p> <p>SOCKET</p> <p>HAVEN 25   487</p>   |  <p>LED</p> <p>QUIMERA   489</p>                  |  <p>SOCKET</p> <p>FORCHINI M 40<br/>TRACK   489</p> |  <p>LED</p> <p>LALU® SET   491-493</p>                |  <p>SOCKET</p> <p>PURI 2.0 TUBE  <br/>495-497</p> |                                                                                                                            |
|  <p>SOCKET</p> <p>PURI 2.0 CONE  <br/>495-497</p> |  <p>SOCKET</p> <p>PURI 2.0 DOME  <br/>495-459</p> |  <p>SOCKET</p> <p>PURI 2.0   498</p>                |  <p>NEW</p> <p>SOCKET</p> <p>ENOLA® 2.0   500-501</p>  |  <p>NEW</p> <p>SOCKET</p> <p>BIMA 2.0   503</p>    |                                                                                                                            |
|  <p>LED</p> <p>SOCKET</p> <p>GRIP!   505-509</p> |  <p>LED</p> <p>GRIP! FLAT   511</p>              |  <p>LED</p> <p>DYSKO   513</p>                     |  <p>LED</p> <p>SOCKET</p> <p>LIGHT EYE®   514-517</p> |  <p>LED</p> <p>KALU 2.0   519</p>                 |  <p>SOCKET</p> <p>KALU TRACK   519</p> |
|  <p>LED</p> <p>NOBLO® SPOT   521</p>            |  <p>SOCKET</p> <p>ASTO TUBE   523</p>           |  <p>SOCKET</p> <p>PARA CONE GL   525</p>          |  <p>SOCKET</p> <p>PARA CONE 14   525</p>             |  <p>LED</p> <p>HELIA 50 TRACK   527</p>          |  <p>LED</p> <p>PANEL TRACK   527</p>  |
|  <p>LED</p> <p>PANEL TRACK   527</p>            |  <p>SOCKET</p> <p>EURO SPOT TRACK  <br/>529</p> |  <p>SOCKET</p> <p>ALTRA DICE TRACK  <br/>529</p>  |                                                                                                                                         |                                                                                                                                      |                                                                                                                            |




1009131 511





# 1 ~ SYSTEM MOUNTING TRACK

## 1-PHASE

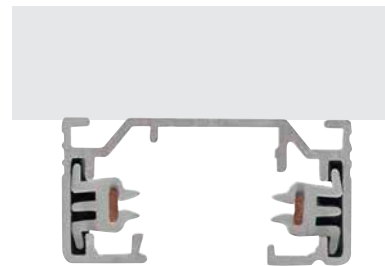

|                     | 100 cm                   | 100 cm                   | 100 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-240 V ~50/60 Hz      | 220-240 V ~50/60 Hz      | 220-240 V ~50/60 Hz      |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● grey                   |
| Material            | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 100 cm x 3.5 cm x 1.8 cm | 100 cm x 3.5 cm x 1.8 cm | 100 cm x 3.5 cm x 1.8 cm |
| Prod. no.           | <b>143010</b>            | <b>143011</b>            | <b>143012</b>            |
| GBP                 | <b>31.00</b>             | <b>31.00</b>             | <b>31.00</b>             |


|                     | 200 cm                   | 200 cm                   | 200 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-240 V ~50/60 Hz      | 220-240 V ~50/60 Hz      | 220-240 V ~50/60 Hz      |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● grey                   |
| Material            | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 200 cm x 3.5 cm x 1.8 cm | 200 cm x 3.5 cm x 1.8 cm | 200 cm x 3.5 cm x 1.8 cm |
| Prod. no.           | <b>143020</b>            | <b>143021</b>            | <b>143022</b>            |
| GBP                 | <b>59.00</b>             | <b>59.00</b>             | <b>59.00</b>             |

|                     | 300 cm                   | 300 cm                   | 300 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-240 V ~50/60 Hz      | 220-240 V ~50/60 Hz      | 220-240 V ~50/60 Hz      |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● grey                   |
| Material            | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 300 cm x 3.5 cm x 1.8 cm | 300 cm x 3.5 cm x 1.8 cm | 300 cm x 3.5 cm x 1.8 cm |
| Prod. no.           | <b>1002151</b>           | <b>1002152</b>           | <b>1002153</b>           |
| GBP                 | <b>88.00</b>             | <b>88.00</b>             | <b>88.00</b>             |

# 1 ~ SYSTEM MOUNTING TRACK

## 1-PHASE

Planning assistance and accessories at a glance

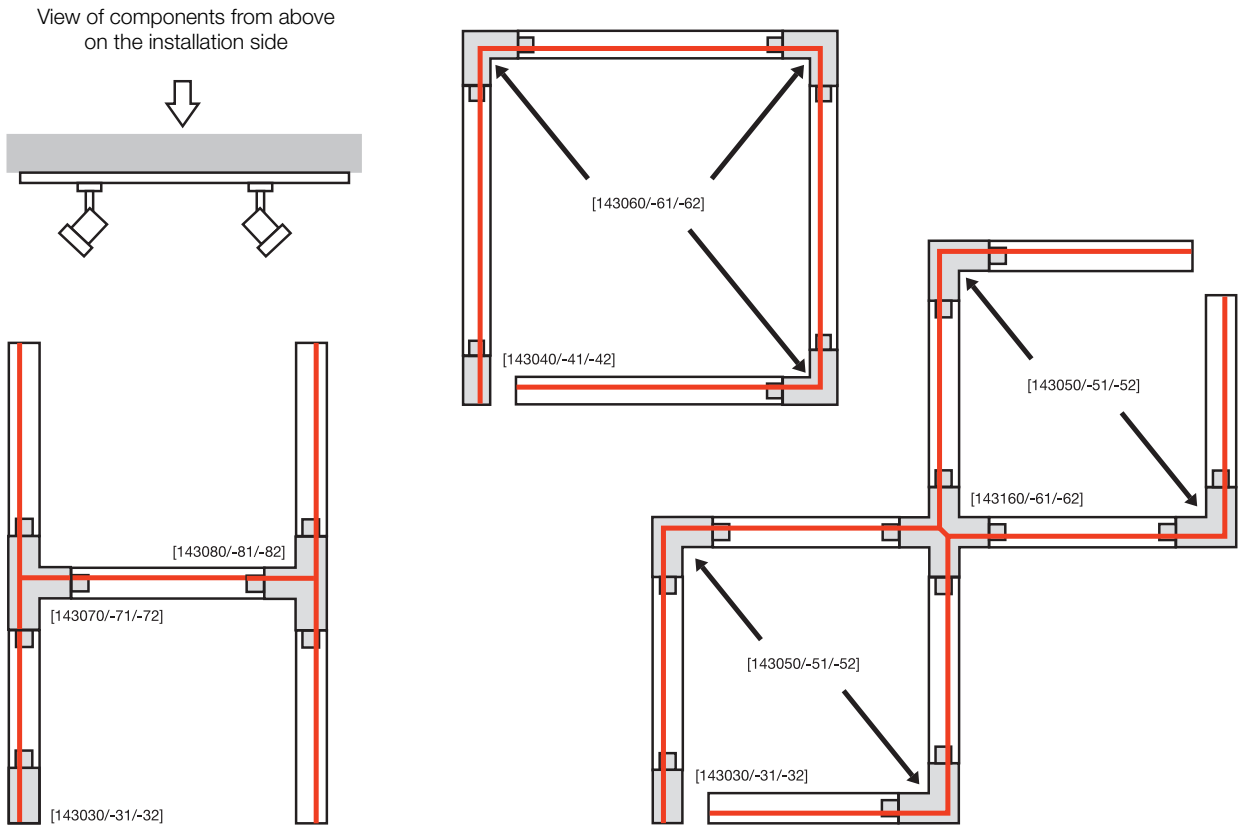

### 1-PHASE ADAPTOR



6 A max. | 8.5 cm | Polycarbonate (PC)  
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

|         |                  |           |
|---------|------------------|-----------|
| ● black | Prod. no. 143120 | 14.00 GBP |
| ○ white | Prod. no. 143121 | 14.00 GBP |
| ● grey  | Prod. no. 143124 | 14.00 GBP |

### 1-PHASE ADAPTOR WITH HOOK



6 A max. | 8.5 cm | Polycarbonate (PC)  
L: 8.5 cm W: 3.5 cm H: 7.4 cm

For pendant lights that feature additional mechanical suspension.

|         |                  |           |
|---------|------------------|-----------|
| ● black | Prod. no. 143170 | 14.00 GBP |
| ○ white | Prod. no. 143171 | 14.00 GBP |
| ● grey  | Prod. no. 143172 | 14.00 GBP |

### 1-PHASE, FEED-IN, EARTH LEFT



16 A max. | 6.5 cm | Polycarbonate (PC)  
L: 6.5 cm | W: 3.5 cm | H: 1.8 cm

|         |                  |          |
|---------|------------------|----------|
| ● black | Prod. no. 143030 | 9.00 GBP |
| ○ white | Prod. no. 143031 | 9.00 GBP |
| ● grey  | Prod. no. 143032 | 9.00 GBP |

### 1-PHASE, FEED-IN, EARTH RIGHT



16 A max. | 6.5 cm | Polycarbonate (PC)  
L: 6.5 cm | W: 3.5 cm | H: 1.8 cm

|         |                  |          |
|---------|------------------|----------|
| ● black | Prod. no. 143040 | 9.00 GBP |
| ○ white | Prod. no. 143041 | 9.00 GBP |
| ● grey  | Prod. no. 143042 | 9.00 GBP |



### 1-PHASE, LONGITUDINAL CONNECTOR WITH FEED CAPACITY

16 A max. | 17.2 cm | Polycarbonate (PC)  
L: 17.2 cm | W: 3.5 cm | H: 1.8 cm

|         |           |               |                  |
|---------|-----------|---------------|------------------|
| ● black | Prod. no. | <b>143100</b> | <b>16.00 GBP</b> |
| ○ white | Prod. no. | <b>143101</b> | <b>16.00 GBP</b> |
| ● grey  | Prod. no. | <b>143102</b> | <b>16.00 GBP</b> |



### 1-PHASE, LONGITUDINAL CONNECTOR, ELECTRICAL

16 A max. | 6.4 cm | Polycarbonate (PC)  
L: 6.4 cm | W: 3.5 cm | H: 1.8 cm

|         |           |               |                 |
|---------|-----------|---------------|-----------------|
| ● black | Prod. no. | <b>143090</b> | <b>7.00 GBP</b> |
| ○ white | Prod. no. | <b>143091</b> | <b>7.00 GBP</b> |
| ● grey  | Prod. no. | <b>143092</b> | <b>7.00 GBP</b> |



### 1-PHASE, CORNER CONNECTOR, INTERNAL EARTH

16 A max. | 10.4 cm | Polycarbonate (PC)  
L: 10.4 cm | W: 10.4 cm | H: 1.8 cm

|         |           |               |                  |
|---------|-----------|---------------|------------------|
| ● black | Prod. no. | <b>143060</b> | <b>15.00 GBP</b> |
| ○ white | Prod. no. | <b>143061</b> | <b>15.00 GBP</b> |
| ● grey  | Prod. no. | <b>143062</b> | <b>15.00 GBP</b> |



### 1-PHASE, CORNER CONNECTOR, EXTERNAL EARTH

16 A max. | 10.4 cm | Polycarbonate (PC)  
L: 10.4 cm | W: 10.4 cm | H: 1.8 cm

|         |           |               |                  |
|---------|-----------|---------------|------------------|
| ● black | Prod. no. | <b>143050</b> | <b>15.00 GBP</b> |
| ○ white | Prod. no. | <b>143051</b> | <b>15.00 GBP</b> |
| ● grey  | Prod. no. | <b>143052</b> | <b>15.00 GBP</b> |



### 1-PHASE, T-CONNECTOR, EXTERNAL EARTH, LEFT

16 A max. | 17.2 cm | Polycarbonate (PC)  
L: 17.2 cm | W: 10.4 cm | H: 1.8 cm

|         |           |               |                  |
|---------|-----------|---------------|------------------|
| ● black | Prod. no. | <b>143070</b> | <b>19.00 GBP</b> |
| ○ white | Prod. no. | <b>143071</b> | <b>19.00 GBP</b> |
| ● grey  | Prod. no. | <b>143072</b> | <b>19.00 GBP</b> |



### 1-PHASE, T-CONNECTOR, EXTERNAL EARTH, RIGHT

16 A max. | 17.2 cm | Polycarbonate (PC)  
L: 17.2 cm | W: 10.4 cm | H: 1.8 cm

|         |           |               |                  |
|---------|-----------|---------------|------------------|
| ● black | Prod. no. | <b>143080</b> | <b>19.00 GBP</b> |
| ○ white | Prod. no. | <b>143081</b> | <b>19.00 GBP</b> |
| ● grey  | Prod. no. | <b>143082</b> | <b>19.00 GBP</b> |



### 1-PHASE, X-CONNECTOR

16 A max. | 9.5 cm | Polycarbonate (PC)  
L: 9.5 cm | W: 17.2 cm | H: 1.8 cm

|         |           |               |                  |
|---------|-----------|---------------|------------------|
| ● black | Prod. no. | <b>143160</b> | <b>28.00 GBP</b> |
| ○ white | Prod. no. | <b>143161</b> | <b>28.00 GBP</b> |
| ● grey  | Prod. no. | <b>143162</b> | <b>28.00 GBP</b> |



### 1-PHASE, FLEX CONNECTOR

16 A max. | 16.4 cm | Polycarbonate (PC)  
L: 16.4 cm | W: 3.5 cm | H: 1.8 cm

|         |           |               |                  |
|---------|-----------|---------------|------------------|
| ● black | Prod. no. | <b>143110</b> | <b>16.00 GBP</b> |
| ○ white | Prod. no. | <b>143111</b> | <b>16.00 GBP</b> |
| ● grey  | Prod. no. | <b>143112</b> | <b>16.00 GBP</b> |



### 1-PHASE, STABILISER, LONGITUDINAL CONNECTOR

19.7 cm | Steel  
L: 19.7 cm | W: 3.2 cm | H: 1.3 cm  
For reinforcement when mounting several tracks with ceiling suspension (1002845)

|          |           |               |                 |
|----------|-----------|---------------|-----------------|
| ● nickel | Prod. no. | <b>143151</b> | <b>7.00 GBP</b> |
|----------|-----------|---------------|-----------------|



### 1-PHASE, STABILISER, CORNER CONNECTOR LONG

11.5 cm | Steel  
L: 11.5 cm | W: 11.5 cm | H: 0.5 cm  
For reinforcement when mounting several tracks with ceiling suspension (1002845)

|          |           |               |                 |
|----------|-----------|---------------|-----------------|
| ● nickel | Prod. no. | <b>143152</b> | <b>8.00 GBP</b> |
|----------|-----------|---------------|-----------------|



### 1-PHASE, STABILISING X-CONNECTOR

19.7 cm | Steel  
L: 19.7 cm | B: 19.7 cm | H: 0.5 cm  
For reinforcement when mounting several tracks with ceiling suspension (1002845)

|          |           |               |                  |
|----------|-----------|---------------|------------------|
| ● nickel | Prod. no. | <b>143169</b> | <b>11.00 GBP</b> |
|----------|-----------|---------------|------------------|



### 2M COVER FOR 1-PHASE TRACK

200 cm | Polycarbonate (PC)  
L: 200 cm | B: 1.8 cm | H: 0.8 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>1004783</b> | <b>19.00 GBP</b> |
| ○ white | Prod. no. | <b>1004785</b> | <b>19.00 GBP</b> |
| ● grey  | Prod. no. | <b>1004784</b> | <b>19.00 GBP</b> |



### 1-PHASE, END CAPS (2 PIECES)

0.4 cm | Polycarbonate (PC)  
L: 0.4 cm | W: 3.5 cm | H: 1.8 cm

|         |           |               |                 |
|---------|-----------|---------------|-----------------|
| ● black | Prod. no. | <b>143130</b> | <b>4.00 GBP</b> |
| ○ white | Prod. no. | <b>143131</b> | <b>4.00 GBP</b> |
| ● grey  | Prod. no. | <b>143132</b> | <b>4.00 GBP</b> |



### 1-PHASE, CEILING ROSETTE 2.0

6 A max. | Polycarbonate (PC)  
H: 2.5 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>1007926</b> | <b>19.00 GBP</b> |
| ○ white | Prod. no. | <b>1007927</b> | <b>19.00 GBP</b> |
| ● grey  | Prod. no. | <b>1007928</b> | <b>19.00 GBP</b> |



### EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO

500 cm | Stainless steel/Brass  
L: 500 cm

|          |           |                |                  |
|----------|-----------|----------------|------------------|
| ● nickel | Prod. no. | <b>1002845</b> | <b>37.00 GBP</b> |
|----------|-----------|----------------|------------------|



### COVER PLATE, 1-PHASE

10 cm | Steel  
L: 10 cm | W: 10 cm | H: 0 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>1008149</b> | <b>14.00 GBP</b> |
| ○ white | Prod. no. | <b>1008148</b> | <b>14.00 GBP</b> |
| ● grey  | Prod. no. | <b>1008150</b> | <b>14.00 GBP</b> |



143580


527





# 1 ~ SYSTEM RECESSED TRACK

## 1-PHASE, 2 M

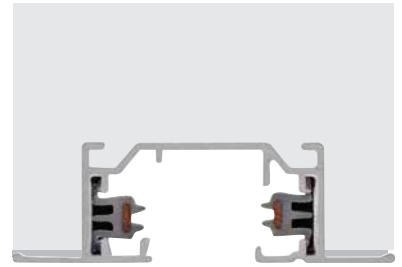

|                     |                          |
|---------------------|--------------------------|
|                     | <b>200 cm</b>            |
| Nominal voltage (V) | 220-240 V ~50/60 Hz      |
| Max. current (A)    | 16 A max.                |
| Colour              | ○ white                  |
| Material            | Aluminium                |
| L x W x H (cm)      | 200 cm x 5.5 cm x 1.8 cm |
| Prod. no.           | <b>143221</b>            |
| GBP                 | <b>65.00</b>             |



### 1-PHASE, FEED-IN, EARTH LEFT

16 A max. | 10.8 cm | Plastic  
L: 10.8 cm | W: 5.5 cm | H: 2 cm

○ white Prod. no. **143231** **13.00 GBP**



### 1-PHASE, FEED-IN, EARTH RIGHT

16 A max. | 10.8 cm | Plastic  
L: 10.8 cm | W: 5.5 cm | H: 2 cm

○ white Prod. no. **143241** **13.00 GBP**



### 1-PHASE, LONGITUDINAL CONNECTOR INCLUDING LONGITUDINAL BRACE

6.5 cm | Plastic/Steel  
L: 6.5 cm | W: 1.8 cm | H: 1.7 cm  
Longitudinal connector including longitudinal brace

○ white Prod. no. **143271** **13.00 GBP**



### 1-PHASE, CORNER CONNECTOR, INTERNAL EARTH

16 A max. | 11.2 cm | Plastic  
L: 11.2 cm | W: 11.2 cm | H: 2 cm

○ white Prod. no. **143261** **19.00 GBP**



### 1-PHASE, CORNER CONNECTOR, EXTERNAL EARTH

16 A max. | 11.2 cm | Plastic  
L: 11.2 cm | W: 11.2 cm | H: 2 cm

○ white Prod. no. **143251** **19.00 GBP**



### 1-PHASE, END CAP

2.7 cm | Plastic  
L: 2.7 cm | W: 5.5 cm | H: 1.8 cm

○ white Prod. no. **143281** **7.00 GBP**



### 1-PHASE, RETAINER

7.5 cm | Steel  
L: 7.5 cm | W: 1.5 cm | H: 4 cm

● nickel Prod. no. **143230** **4.00 GBP**



### 1-PHASE ADAPTOR WITH HOOK

6 A max. | 8.5 cm | Polycarbonate (PC)  
L: 8.5 cm W: 3.5 cm H: 7.4 cm  
For pendant lights that feature additional mechanical suspension.

● black Prod. no. **143170** **14.00 GBP**  
○ white Prod. no. **143171** **14.00 GBP**  
● grey Prod. no. **143172** **14.00 GBP**



### 1-PHASE ADAPTOR

6 A max. | 8.5 cm | Polycarbonate (PC)  
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

● black Prod. no. **143120** **14.00 GBP**  
○ white Prod. no. **143121** **14.00 GBP**  
● grey Prod. no. **143124** **14.00 GBP**


1011692 487





HAVEN 25  
1-PHASE, E27

NEW

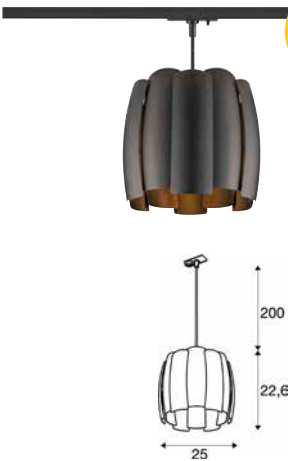

220-240 V ~50/60 Hz  
Material: Steel



Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011690   | 222.00 |
| ○ white | 1011691   | 222.00 |
| ● gold  | 1011692   | 231.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP


1008042 489





## QUIMERA

1-PHASE, PD



220-240 V ~50/60 Hz | 350 mA

Total wattage: 7.6 W

Material: Aluminium

- Narrow lines on the glass create fascinating light reflections
- Black track adapter




Indirect

2700 K  
365 lm

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● black  | 1008041   | 323.00 |
| ● brass  | 1008042   | 323.00 |
| ● copper | 1008043   | 323.00 |

## FORCHINI M 40 TRACK

1-PHASE, E27



220-240 V ~50/60 Hz

Material: Steel/Aluminium

- 1008540 with black 1-phase track adapter



Base: 1xE27

max. Ø: 6.8 cm

L: 15.2 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1008539   | 201.00 |
| ● black/gold | 1008540   | 201.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP





1010798 491



## LALU® SET

1-PHASE, PD, LED BASE, PHASE



220-240 V ~50/60 Hz | 500 mA

Total wattage: 9.5 W

Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter




Down

|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 700 lm | 750 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010798   | 222.00 |

## LALU® SET

1-PHASE, PD, LED BASE, PHASE



220-240 V ~50/60 Hz | 500 mA

Total wattage: 9.5 W

Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter



Down

|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 700 lm | 800 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010799   | 235.00 |



Discover more  
LALU® colours and  
shapes at [slv.com](http://slv.com)

1010797 493







## LALU® SET

1-PHASE, PD, LED BASE, PHASE

## LALU® SET

1-PHASE, PD, LED BASE, PHASE



220-240 V ~50/60 Hz | 500 mA

Total wattage: 9.5 W

Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter



220-240 V ~50/60 Hz | 500 mA

Total wattage: 9.5 W

Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter



|      |        |        |
|------|--------|--------|
| Down | 2700 K | 3000 K |
|      | 550 lm | 600 lm |



|      |        |        |
|------|--------|--------|
| Down | 2700 K | 3000 K |
|      | 700 lm | 700 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010797   | 222.00 |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010800   | 218.00 |



Discover more  
LALU® colours and  
shapes at [slv.com](http://slv.com)



1008250 495








## PURI 2.0 TUBE

1-PHASE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008242   | 35.00 |
| ● black/gold | 1008243   | 35.00 |
| ○ white      | 1008244   | 35.00 |
| ● grey       | 1008245   | 35.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## PURI 2.0 CONE

1-PHASE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008246   | 35.00 |
| ● black/gold | 1008247   | 35.00 |
| ○ white      | 1008248   | 35.00 |
| ● grey       | 1008249   | 35.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## PURI 2.0 DOME

1-PHASE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008250   | 35.00 |
| ● black/gold | 1008251   | 35.00 |
| ○ white      | 1008252   | 35.00 |
| ● grey       | 1008253   | 35.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP


1008263 497





## PURI 2.0 TUBE

1-PHASE, PD, QPAR51

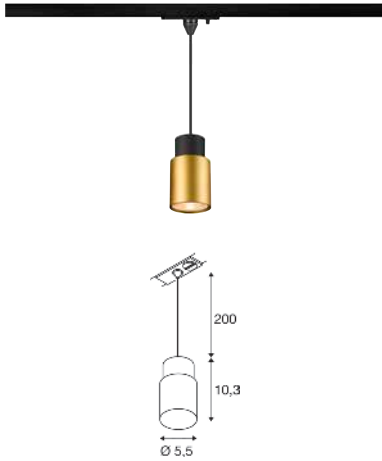

220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008254   | 39.00 |
| ● black/gold | 1008255   | 39.00 |
| ○ white      | 1008256   | 39.00 |
| ● grey       | 1008257   | 39.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## PURI 2.0 CONE

1-PHASE, PD, QPAR51

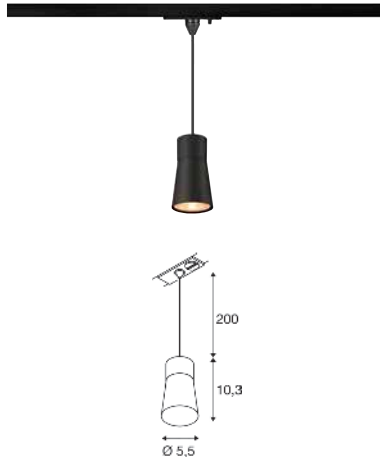

220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008258   | 39.00 |
| ● black/gold | 1008259   | 39.00 |
| ○ white      | 1008260   | 39.00 |
| ● grey       | 1008261   | 39.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## PURI 2.0 DOME

1-PHASE, QPAR51

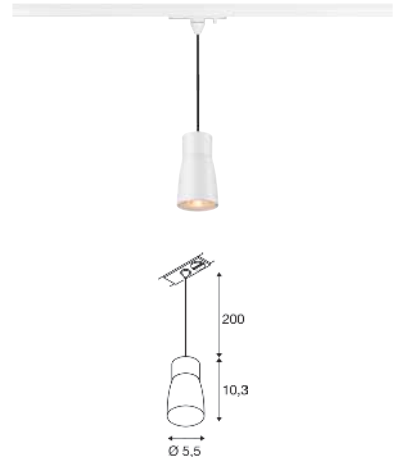

220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008262   | 39.00 |
| ● black/gold | 1008263   | 39.00 |
| ○ white      | 1008264   | 39.00 |
| ● grey       | 1008265   | 39.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F




Prod. no.: 1012469 23.00 GBP

## PURI 2.0

1-PHASE, TRIPLE TRACK SET,  
QPAR51

1008262 + 1008226 497 + 499



220-240 V ~50/60 Hz

Material: Aluminium

- Consists of:  
2 x 1 m track,  
1 x longitudinal connector with feed-in,  
1 x 2 end caps,  
3 x PURI 2.0 light heads,  
3 x GU10 2700K lamps



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black      | 1008903   | 183.00 |
| ● black/gold | 1008904   | 183.00 |
| ○ white      | 1008902   | 183.00 |



## PURI 2.0 CONE SHADE



Ø: 5.5 cm  
H: 6.5 cm  
Material: Aluminium

| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1008219   | 8.00 |
| ○ white     | 1008218   | 8.00 |
| ● gold      | 1008221   | 8.00 |
| ● grey      | 1008220   | 8.00 |
| ● bronze    | 1008222   | 8.00 |
| ● aluminium | 1008377   | 8.00 |

## PURI 2.0 DOME SHADE



Ø: 5.5 cm  
H: 6.5 cm  
Material: Aluminium

| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1008224   | 8.00 |
| ○ white     | 1008223   | 8.00 |
| ● gold      | 1008226   | 8.00 |
| ● grey      | 1008225   | 8.00 |
| ● bronze    | 1008227   | 8.00 |
| ● aluminium | 1008378   | 8.00 |

## PURI 2.0 TUBE SHADE




Ø: 5.5 cm  
H: 6.5 cm  
Material: Aluminium

| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1008214   | 8.00 |
| ○ white     | 1008213   | 8.00 |
| ● gold      | 1008216   | 8.00 |
| ● grey      | 1008215   | 8.00 |
| ● bronze    | 1008217   | 8.00 |
| ● aluminium | 1008376   | 8.00 |



ENOLA® 2.0 S  
1-PHASE, SINGLE,  
GU10 MINI, PAR11

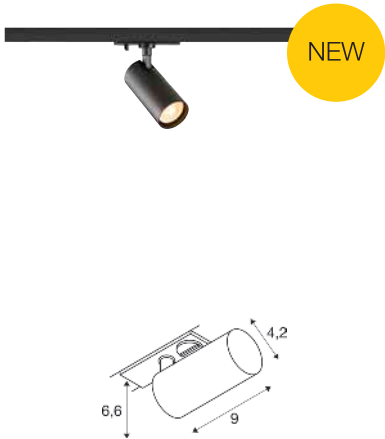

220-240 V ~50/60 Hz  
Material: Aluminium/Plastic PC

ENOLA® 2.0 S  
1-PHASE, PD, SINGLE,  
GU10 MINI, PAR11



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic PC

ENOLA® 2.0 S  
DECORATIVE RING



Ø: 3.9 cm  
H: 1.1 cm  
Material: Plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011753   | 4.00 |
| ○ white  | 1011754   | 4.00 |
| ● gold   | 1011755   | 4.00 |
| ● copper | 1011756   | 4.00 |



Base: 1xGU10 max. Ø: 3.6 cm L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011723   | 48.00 |
| ○ white | 1011724   | 48.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP



Base: 1xGU10 max. Ø: 3.6 cm L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011727   | 60.00 |
| ○ white | 1011728   | 60.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP



| Product                       | Prod. no. | GBP  |
|-------------------------------|-----------|------|
| ENOLA® 2.0 S, Decorative Ring |           |      |
| ● black                       | 1011753   | 4.00 |
| ○ white                       | 1011754   | 4.00 |
| ● gold                        | 1011755   | 4.00 |
| ● copper                      | 1011756   | 4.00 |




| Product                       | Prod. no. | GBP  |
|-------------------------------|-----------|------|
| ENOLA® 2.0 S, Decorative Ring |           |      |
| ● black                       | 1011753   | 4.00 |
| ○ white                       | 1011754   | 4.00 |
| ● gold                        | 1011755   | 4.00 |
| ● copper                      | 1011756   | 4.00 |



## ENOLA® 2.0 M


1-PHASE, SINGLE, GU10, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic PC

## ENOLA® 2.0 M

1-PHASE, PD, SINGLE,  
GU10, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic PC

## ENOLA® 2.0/BIMA 2.0 M

DECORATIVE RING



NEW

Ø: 5.4 cm  
H: 2 cm  
Material: Plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011749   | 4.00 |
| ○ white  | 1011750   | 4.00 |
| ● gold   | 1011751   | 4.00 |
| ● copper | 1011752   | 4.00 |



Base: 1xGU10 max. Ø: 5.1 cm L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011713   | 52.00 |
| ○ white | 1011714   | 52.00 |



Base: 1xGU10 max. Ø: 5.1 cm L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011717   | 68.00 |
| ○ white | 1011718   | 68.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Decorative Ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |




| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Decorative Ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |





## BIMA 2.0

1-PHASE, SINGLE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.4 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011759   | 42.00 |
| ○ white | 1011760   | 42.00 |



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005079 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F




Prod. no.: 1012469 23.00 GBP



| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Decorative Ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |

## BIMA 2.0

1-PHASE, DOUBLE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic



Base: 2xGU10 max. Ø: 5.1 cm | L: 5.4 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011761   | 68.00 |
| ○ white | 1011762   | 68.00 |



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005079 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Decorative Ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |

1008399 505









# GRIP! S

1-PHASE, PHASE, Ø 3,0 CM

# GRIP! S

1-PHASE, PHASE, Ø 3,0 CM



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 11 W  
Material: Aluminium

220-240 V ~50/60 Hz | 250 mA  
Total wattage: 11 W  
Material: Aluminium

- Honeycomb accessories included

- Honeycomb accessories included




|         |      |        |
|---------|------|--------|
| 1008390 |      | 2700 K |
| 1008392 | Down |        |
| 1008393 |      | 530 lm |
| 1008394 |      |        |
| 1008395 |      | 3000 K |
| 1008397 | Down |        |
| 1008398 |      | 610 lm |
| 1008399 |      |        |

|      |                 |
|------|-----------------|
| Down | 2000 K - 3000 K |
|      | 350 lm - 350 lm |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black/gold<br>530 lm   2700 K   | 1008392   | 147.00 |
| ● black/gold<br>610 lm   3000 K   | 1008397   | 147.00 |
| ● white/black<br>530 lm   2700 K  | 1008390   | 147.00 |
| ● white/black<br>610 lm   3000 K  | 1008395   | 147.00 |
| ● gold/black<br>530 lm   2700 K   | 1008394   | 147.00 |
| ● gold/black<br>610 lm   3000 K   | 1008399   | 147.00 |
| ● bronze/black<br>530 lm   2700 K | 1008393   | 147.00 |
| ● bronze/black<br>610 lm   3000 K | 1008398   | 147.00 |

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1008402   | 147.00 |
| ● white/black  | 1008400   | 147.00 |
| ● gold/black   | 1008404   | 147.00 |
| ● bronze/black | 1008403   | 147.00 |


GRIP! M  
1-PHASE, PHASE, Ø 4,3 CM



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: Aluminium

- Honeycomb accessories included

GRIP! M  
1-PHASE, PHASE, Ø 4,3 CM



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- Honeycomb accessories included



|         |         |
|---------|---------|
| 1008420 | 2700 K  |
| 1008422 | 2700 K  |
| 1008423 | 1810 lm |
| 1008424 | 1810 lm |
| 1008425 | 3000 K  |
| 1008427 | 3000 K  |
| 1008428 | 1900 lm |
| 1008429 | 1900 lm |

| Variant                          | Prod. no. | GBP    |
|----------------------------------|-----------|--------|
| black/gold<br>1810 lm   2700 K   | 1008422   | 155.00 |
| black/gold<br>1900 lm   3000 K   | 1008427   | 155.00 |
| white/black<br>1810 lm   2700 K  | 1008420   | 155.00 |
| white/black<br>1900 lm   3000 K  | 1008425   | 155.00 |
| gold/black<br>1810 lm   2700 K   | 1008424   | 155.00 |
| gold/black<br>1900 lm   3000 K   | 1008429   | 155.00 |
| bronze/black<br>1810 lm   2700 K | 1008423   | 155.00 |
| bronze/black<br>1900 lm   3000 K | 1008428   | 155.00 |




|      |                   |
|------|-------------------|
| Down | 2000 K - 3000 K   |
|      | 1000 lm - 1000 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| black/gold   | 1008432   | 155.00 |
| white/black  | 1008430   | 155.00 |
| gold/black   | 1008434   | 155.00 |
| bronze/black | 1008433   | 155.00 |



## GRIP! L

1-PHASE, QPAR51, Ø 5,7 CM




220-240 V ~50/60 Hz  
Material: Aluminium

- Honeycomb accessories included

## GRIP! L

1-PHASE, PD, QPAR51, Ø 5,7 CM



220-240 V ~50/60 Hz  
Material: Aluminium

- Honeycomb accessories included



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| black/gold   | 1008449   | 77.00 |
| white/black  | 1008447   | 77.00 |
| gold/black   | 1008451   | 77.00 |
| bronze/black | 1008450   | 77.00 |



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005080 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| black/gold   | 1008471   | 121.00 |
| white/black  | 1008469   | 121.00 |
| gold/black   | 1008473   | 121.00 |
| bronze/black | 1008472   | 121.00 |



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005080 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



1008473    507



GRIP! S  
DECORATIVE RING + SPACER



NEW

Ø: 2.7 cm  
H: 1.1 cm  
Material: Aluminium

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1011830   | 16.00 |
| ○ white  | 1011829   | 16.00 |
| ● gold   | 1011832   | 16.00 |
| ● Nickel | 1011831   | 16.00 |

GRIP! M  
DECORATIVE RING + SPACER



NEW

Ø: 4 cm  
H: 1.4 cm  
Material: Aluminium

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1011834   | 18.00 |
| ○ white  | 1011833   | 18.00 |
| ● gold   | 1011836   | 18.00 |
| ● Nickel | 1011835   | 18.00 |

GRIP! L  
DECORATIVE RING



Ø: 5.4 cm  
H: 2.1 cm  
Material: Aluminium


| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1008497   | 21.00 |
| ○ white  | 1008496   | 21.00 |
| ● gold   | 1008499   | 21.00 |
| ● Nickel | 1008498   | 21.00 |



1009133 + 1010406 511



## GRIP! FLAT 1-PHASE, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 16 W  
Material: Aluminium

- Including colour temperature switch 2700K/3000K
- Honeycomb included
- More colour options with optional decorative rings




|      | 2700 K | 3000 K |
|------|--------|--------|
| Down | 400 lm | 430 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1009131   | 239.00 |
| ○ white | 1009132   | 239.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| GRIP! FLAT, decorative ring |           |       |
| ● black                     | 1009102   | 28.00 |
| ○ white                     | 1009103   | 28.00 |
| ● gold                      | 1009104   | 28.00 |

## GRIP! FLAT 1-PHASE, PD, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 16 W

- Including colour temperature switch 2700K/3000K
- Honeycomb included




|      | 2700 K | 3000 K |
|------|--------|--------|
| Down | 400 lm | 430 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1009133   | 247.00 |
| ○ white | 1009134   | 247.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| GRIP! FLAT, decorative ring |           |       |
| ● black                     | 1009102   | 28.00 |
| ○ white                     | 1009103   | 28.00 |
| ● gold                      | 1009104   | 28.00 |


## GRIP! FLAT FELT SHADE Ø 50 CM X 6.2 CM



Ø: 50 cm  
H: 6.2 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1010403   | 121.00 |
| ● grey       | 1010404   | 121.00 |
| ● Ochre      | 1010405   | 121.00 |

## GRIP! FLAT FELT SHADE Ø 50 CM X 0.6 CM



Ø: 50 cm  
H: 0.6 cm


| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● Anthracite | 1010406   | 88.00 |
| ● grey       | 1010407   | 88.00 |
| ● Ochre      | 1010408   | 88.00 |

1010324 513





DYSKO  
1PH., PHASE



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 6.7 W  
Material: Plastic PC/Aluminium


- Intrack LED driver adapter



2700 K  
750 lm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1010320   | 163.00 |
| ● black/gold  | 1010318   | 161.00 |
| ● white/black | 1010319   | 161.00 |

DYSKO  
1PH., PD, PHASE



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 6.7 W  
Material: Plastic PC/Aluminium


- Intrack LED driver adapter



2700 K  
750 lm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black       | 1010326   | 172.00 |
| ● black/gold  | 1010324   | 169.00 |
| ● white/black | 1010325   | 169.00 |

# LIGHT EYE® 90 1-PHASE, QPAR51




220-240 V ~50/60 Hz  
Material: Steel



Base: 1xGU10    max. Ø: 5.1 cm    L: 5.4 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008180   | 73.00 |
| ○ white | 1008181   | 73.00 |




GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.:    1005080    7.00 GBP

# LIGHT EYE® 150 1-PHASE, QPAR111




220-240 V ~50/60 Hz  
Material: Steel



Base: 1xGU10    max. Ø: 11.1 cm    L: 7 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008182   | 113.00 |
| ○ white | 1008183   | 113.00 |



GU10 | 12 W | 55°  
680 lm | 3000 K | EEC = G




Prod. no.:    1005298    73.00 GBP





## LIGHT EYE® 90


1-PHASE, PD, QPAR51



220-240 V ~50/60 Hz  
Material: Steel

## LIGHT EYE® 150

1-PHASE, PD, QPAR111



220-240 V ~50/60 Hz  
Material: Steel

## LIGHT EYE® 90

DECORATIVE RING Ø 5.7 CM



Ø: 5.9 cm  
H: 1.4 cm  
Material: Steel

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1008186   | 8.00  |
| ○ white  | 1008187   | 8.00  |
| ● gold   | 1008188   | 13.00 |
| ● chrome | 151049    | 13.00 |



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.35 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008168   | 73.00 |
| ○ white | 1008169   | 73.00 |



Base: 1xGU10 max. Ø: 11.1 cm | L: 7 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008174   | 113.00 |
| ○ white | 1008175   | 113.00 |

## LIGHT EYE® 150

DECORATIVE RING Ø 13.6 CM



Ø: 13.6 cm  
H: 2.3 cm  
Material: Steel



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005080 7.00 GBP



GU10 | 12 W | 55°  
680 lm | 3000 K | EEC = G



Prod. no.: 1005298 73.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1008189   | 31.00 |
| ○ white  | 1008190   | 31.00 |
| ● gold   | 1008192   | 39.00 |
| ● chrome | 1008191   | 39.00 |

1010450


517





## LIGHT EYE® 2.0


1-PHASE, PHASE, Ø 7,5 CM



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 11 W  
Material: Aluminium

## LIGHT EYE® 2.0

1-PHASE, PD, Ø 7,5 CM



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 11 W  
Material: Aluminium



|         |      |        |
|---------|------|--------|
| 1010448 | Down | 2700K  |
| 1010449 |      | 1150lm |
| 1010450 | Down | 3000K  |
| 1010451 |      | 1200lm |

| Variant                          | Prod. no. | GBP    |
|----------------------------------|-----------|--------|
| ● black<br>1150lm   2700 K       | 1010448   | 126.00 |
| ● black<br>1200lm   3000 K       | 1010450   | 126.00 |
| ● white/black<br>1150lm   2700 K | 1010449   | 126.00 |
| ● white/black<br>1200lm   3000 K | 1010451   | 126.00 |



|         |      |        |
|---------|------|--------|
| 1010452 | Down | 2700K  |
| 1010453 |      | 1150lm |
| 1010454 | Down | 3000K  |
| 1010455 |      | 1200lm |

| Variant                          | Prod. no. | GBP    |
|----------------------------------|-----------|--------|
| ● black<br>1150lm   2700 K       | 1010452   | 138.00 |
| ● black<br>1200lm   3000 K       | 1010454   | 138.00 |
| ● white/black<br>1150lm   2700 K | 1010453   | 138.00 |
| ● white/black<br>1200lm   3000 K | 1010455   | 138.00 |








## KALU 2.0


1-PHASE, PHASE



220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: Aluminium

## KALU TRACK

1-PHASE, QPAR111



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic



|         |      |         |
|---------|------|---------|
| 1010222 | Down | 2700 K  |
| 1010224 |      | 1400 lm |
| 1010226 | Down | 3000 K  |
| 1010228 |      | 1450 lm |
| 1010230 | Down | 4000 K  |
| 1010232 |      | 1500 lm |

| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ● black<br>1400 lm   2700 K | 1010222   | 127.00 |
| ● black<br>1450 lm   3000 K | 1010226   | 127.00 |
| ● black<br>1500 lm   4000 K | 1010230   | 127.00 |
| ○ white<br>1400 lm   2700 K | 1010224   | 127.00 |
| ○ white<br>1450 lm   3000 K | 1010228   | 127.00 |
| ○ white<br>1500 lm   4000 K | 1010232   | 127.00 |



| Product                   | Prod. no. | GBP   |
|---------------------------|-----------|-------|
| KALU 2.0, decorative ring |           |       |
| ○ white                   | 1010135   | 8.00  |
| ● black                   | 1010136   | 8.00  |
| ● gold                    | 1010138   | 8.00  |
| ● copper                  | 1010139   | 8.00  |
| KALU 2.0, lens            |           |       |
| ○ transparent   15°       | 1010140   | 17.00 |
| ○ transparent   24°       | 1010141   | 17.00 |
| ○ transparent   36°       | 1010142   | 17.00 |
| ○ transparent   60°       | 1010143   | 17.00 |



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 143540    | 66.00 |
| ○ white | 143541    | 66.00 |
| ● grey  | 143544    | 66.00 |



GU10 | 12 W | 55°  
670 lm | 2700 K | EEC = G




Prod. no.: 1005297 73.00 GBP







## NOBLO® SPOT 1-PHASE, TRIPLE TRACK SET



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 19 W  
Material: Aluminium


- Consists of
  - 2 x 1 m track,
  - 1 x longitudinal connector with feed-in option,
  - 1 x 2 end caps,
  - 3 x NOBLO® lamp head



2700 K  
2250 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007673   | 219.00 |
| ○ white | 1007674   | 219.00 |

## NOBLO® SPOT 1-PHASE, PHASE



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 6 W  
Material: Aluminium/Polycarbonate (PC)



1007638 2700 K  
1007639 740 lm  
1007640


1007641 3000 K  
1007642 750 lm  
1007643

| Variant                    | Prod. no. | GBP   |
|----------------------------|-----------|-------|
| ● black<br>740 lm   2700 K | 1007638   | 61.00 |
| ● black<br>750 lm   3000 K | 1007641   | 61.00 |
| ○ white<br>740 lm   2700 K | 1007639   | 61.00 |
| ○ white<br>750 lm   3000 K | 1007642   | 61.00 |
| ● grey<br>740 lm   2700 K  | 1007640   | 61.00 |
| ● grey<br>750 lm   3000 K  | 1007643   | 61.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Decorative ring |           |      |
| ● black         | 1008482   | 6.00 |
| ○ white         | 1008483   | 6.00 |
| ● gold          | 1008484   | 6.00 |
| ● grey          | 1008485   | 6.00 |
| ● bronze        | 1008486   | 6.00 |
| ● copper        | 1008487   | 6.00 |

## NOBLO® SPOT 1-PHASE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 8.4 W  
Material: Aluminium/Polycarbonate (PC)



2000 K - 3000 K  
30 lm - 450 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007352   | 73.00 |
| ○ white | 1007353   | 73.00 |
| ● grey  | 1007354   | 73.00 |





| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Decorative ring |           |      |
| ● black         | 1008482   | 6.00 |
| ○ white         | 1008483   | 6.00 |
| ● gold          | 1008484   | 6.00 |
| ● grey          | 1008485   | 6.00 |
| ● bronze        | 1008486   | 6.00 |
| ● copper        | 1008487   | 6.00 |

1006445 523





## ASTO TUBE 1-PHASE, GU10



220-240 V ~50/60 Hz  
Material: Aluminium

- Decorative rings available as accessories



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006445   | 61.00 |
| ○ white | 1006446   | 61.00 |




GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP

## ASTO TUBE 1-PHASE, PD, GU10



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10 max. Ø: 5 cm | L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1010099   | 68.00 |
| ○ white | 1010100   | 68.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## ASTO TUBE DECORATIVE REFLECTOR



Ø: 6.8 cm  
H: 4 cm  
Material: polycarbonate (PC)

| Variant        | Prod. no. | GBP  |
|----------------|-----------|------|
| ● black/chrome | 1007190   | 4.00 |
| ● gold         | 1006450   | 4.00 |
| ● chrome       | 1006449   | 4.00 |
| ● copper       | 1006451   | 4.00 |



1009140 525








## PARA CONE GL

1-PHASE, GU10



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006155   | 77.00 |
| ○ white | 1006156   | 77.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## PARA CONE 14

1-PHASE, GU10



220-240 V ~50/60 Hz  
Material: Steel



Base: 1xGU10

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/gold   | 1008052   | 74.00 |
| ○ white/gold   | 1008053   | 74.00 |
| ○ copper/white | 1008054   | 77.00 |
| ○ aluminium    | 1009138   | 77.00 |



GU10 | 3 W | 360°  
270 lm | 2700 K | EEC = G



Prod. no.: 1006321 42.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## PARA CONE 14

1-PHASE, PD, GU10



220-240 V ~50/60 Hz  
Material: Steel



Base: 1xGU10

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1008058   | 100.00 |
| ○ white/gold   | 1008059   | 100.00 |
| ○ copper/white | 1008060   | 109.00 |
| ○ aluminium    | 1009140   | 109.00 |



GU10 | 3 W | 360°  
270 lm | 2700 K | EEC = G



Prod. no.: 1006321 42.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F




Prod. no.: 1012469 23.00 GBP

1004935 527






## HELIA 50 TRACK 1-PHASE




220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: Aluminium

## PANEL TRACK 1-PHASE, SQUARE



220-240 V ~50/60 Hz | 450 mA  
Total wattage: 18 W  
Material: Polycarbonate (PC)/Steel

## PANEL TRACK 1-PHASE, ROUND



220-240 V ~50/60 Hz | 450 mA  
Total wattage: 18 W  
Material: Polycarbonate (PC)/Steel



|        |        |
|--------|--------|
|        | 3000 K |
| 143580 | 920 lm |
|        | 3000 K |
| 143581 | 970 lm |

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● black<br>920 lm | 143580    | 79.00 |
| ○ white<br>970 lm | 143581    | 79.00 |



|  |         |
|--|---------|
|  | 3000 K  |
|  | 1800 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1004933   | 84.00 |
| ○ white | 1004934   | 84.00 |



|  |         |
|--|---------|
|  | 3000 K  |
|  | 1800 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1004935   | 84.00 |
| ○ white | 1004936   | 84.00 |




1001861 529





## EURO SPOT TRACK

1-PHASE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1001861   | 68.00 |
| ○ white | 143811    | 68.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## ALTRA DICE TRACK

1-PHASE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 143350    | 78.00 |
| ○ white | 143351    | 78.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP





1004470 575

# INDOOR | 3-PHASE SYSTEM

|                                                                                                                               |                                                                                                                                  |                                                                                                                                |                                                                                                                               |                                                                                                                                    |                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
|                                              |                                                 |                                               |                                              |                                                  |                                                                                                                             |
| NEW                                                                                                                           |                                                                                                                                  |                                                                                                                                |                                                                                                                               | NEW                                                                                                                                |                                                                                                                             |
|  <b>SECKET</b><br>HAVEN 25   555             |  <b>SECKET</b><br>PURI 2.0 TUBE  <br>557-561    |  <b>SECKET</b><br>PURI 2.0 CONE  <br>557-561  |  <b>SECKET</b><br>PURI 2.0 DOME  <br>557-561 |  <b>SECKET</b><br>BIMA 2.0   563                 |                                                                                                                             |
|                                              |                                                 |                                               |                                              |                                                  |                                          |
| NEW                                                                                                                           | NEW                                                                                                                              |                                                                                                                                |                                                                                                                               |                                                                                                                                    |                                                                                                                             |
|  <b>SECKET</b><br>ENOLA® 2.0 S  <br>564-565  |  <b>LED</b><br><b>SECKET</b><br>GRIP!   566-569 |  <b>LED</b><br>NUMINOS®   572-579             |  <b>LED</b><br>NUMINOS® ZOOM  <br>580-581    |  <b>LED</b><br>UNIVERSAL<br>TRACKSPOT   583      |  <b>LED</b><br>NOBLO® SPOT   585         |
|                                              |                                                 |                                               |                                              |                                                  |                                          |
|                                                                                                                               |                                                                                                                                  |                                                                                                                                |                                                                                                                               |                                                                                                                                    |                                                                                                                             |
|  <b>LED</b><br>EURO CUBE 2  <br>586-587    |  <b>LED</b><br>KALU 2.0   589                 |  <b>SECKET</b><br>KALU TRACK   589          |  <b>LED</b><br>SIGHT EVO   590-591         |  <b>LED</b><br>SIGHT PANEL   592               |  <b>LED</b><br>SIGHT EASY   593        |
|                                            |                                               |                                             |                                            |                                                |                                        |
|                                                                                                                               |                                                                                                                                  |                                                                                                                                |                                                                                                                               |                                                                                                                                    |                                                                                                                             |
|  <b>LED</b><br>SIGHT TRACK   594           |  <b>LED</b><br>SIGHT MOVE   595               |  <b>SECKET</b><br>PARA CONE 14  <br>596-597 |  <b>SECKET</b><br>PARA CONE GL   597       |  <b>SECKET</b><br>FORCHINI M 40<br>TRACK   599 |  <b>SECKET</b><br>LIGHT EYE®   600-601 |
|                                            |                                               |                                                                                                                                |                                                                                                                               |                                                                                                                                    |                                                                                                                             |
|  <b>SECKET</b><br>EURO SPOT TRACK  <br>603 |  <b>LED</b><br>HELIA 50 TRACK   605           |                                                                                                                                |                                                                                                                               |                                                                                                                                    |                                                                                                                             |


# 3-PHASE TRACK SYSTEMS

---

3-phase track systems enable flexible and future-proof lighting design. Multiple circuits within a single track allow different lights to be switched on and off and controlled independently. This is particularly advantageous in sophisticated lighting concepts.

Depending on requirements, variants are available for traditional switching solutions (on/off) as well as for DALI-based lighting control systems.

Thanks to modular track elements and a wide range of lights, it is possible to create bespoke lighting solutions – from accent lighting to uniform basic lighting.

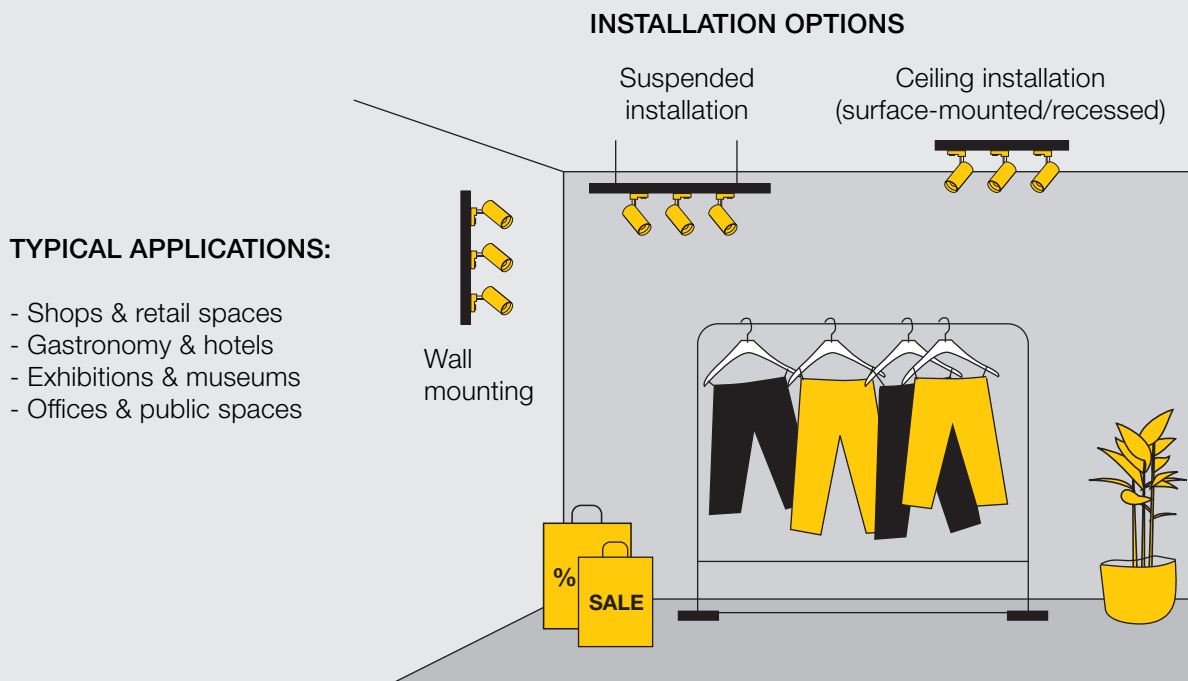

Configure power track systems online –  
from geometric planning to the bill of materials.


Scan the QR code and get started straight away.

# SYSTEM STRUCTURE

## SELECT A SYSTEM


### S-TRACK

3-phase system: On/Off or DALI



### EUTRAC

3-phase system



## SELECT INSTALLATION TYPE

Recessed track



Surface-mounted track




Recessed track





Surface-mounted track





## SPECIFY THE VERSION




1m - 2m - 3m - 4m



1m - 2m - 3m



1m - 2m - 3m



## SELECT LIGHTS

Choose from a wide range of decorative and functional lights to tailor the lighting concept to your space.



**Spots** for directional accent lighting and highlighting objects





**Pendant lights** for decorative accents and zoned lighting





**Linear lights** for uniform general and area lighting

# COMPATIBILITY

## TRACK COMPATIBILITY with adaptors from:





|                                                                                                                             | SLV                                                                               | EUTRAC®                                                                           | Global/Nordic                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| SLV S-TRACK tracks and track components<br> |  |  |  |
| 3-phase                                                                                                                     | ✓                                                                                 | ✓                                                                                 | ✓                                                                                   |
| 3-Phase DALI                                                                                                                | ✓                                                                                 | ✗                                                                                 | ✓                                                                                   |


## LIGHT COMPATIBILITY with rails from:

|                                                                                                                        | SLV S-TRACK                                                                         | EUTRAC®                                                                             | Global/Nordic                                                                         |
|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| SLV lights with 3-phase adaptors<br> |  |  |  |
| 3-phase                                                                                                                | ✓                                                                                   | ✓                                                                                   | ✓                                                                                     |
| 3-Phase DALI                                                                                                           | ✓                                                                                   | ✗                                                                                   | ✓                                                                                     |



SLV's 3-phase track systems and components are compatible with lights and adaptors from EUTRAC®, Global/Nordic, Zumtobel, Erco, LTS ONETrack and unipro®.

| Zumtobel                                                                          | Erco                                                                              | LTS ONETrack                                                                      | unipro®                                                                             |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| ✓                                                                                 | ✓                                                                                 | ✓                                                                                 | ✓                                                                                   |
| ✗                                                                                 | ✗                                                                                 | ✓                                                                                 | ✓                                                                                   |

| Zumtobel                                                                            | Erco                                                                                | LTS ONETrack                                                                        | unipro®                                                                               |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| ✓                                                                                   | ✓                                                                                   | ✓                                                                                   | ✓                                                                                     |
| ✗                                                                                   | ✗                                                                                   | ✓                                                                                   | ✓                                                                                     |

Details not guaranteed. Technical data and dimensions are subject to change without notice. During the planning phase of the project, check the project using samples to ensure functionality. Compatibility refers only to tracks/lights. Tracks and track components from different manufacturers should not be combined. Subject to prior testing using light and track samples.





## S-TRACK

### 3-PHASE SURFACE-MOUNTED TRACK, ON/OFF




|                     | 100 cm                   | 100 cm                   | 200 cm                   | 200 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-250 V ~50/60 Hz      | 220-250 V ~50/60 Hz      | 220-250 V ~50/60 Hz      | 220-250 V ~50/60 Hz      |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium/plastic        | Aluminium/plastic        | Aluminium/plastic        | Aluminium/plastic        |
| L x W x H (cm)      | 100 cm x 3.6 cm x 3.6 cm | 100 cm x 3.6 cm x 3.6 cm | 200 cm x 3.6 cm x 3.6 cm | 200 cm x 3.6 cm x 3.6 cm |
| Prod. no.           | <b>175010</b>            | <b>1001375</b>           | <b>175020</b>            | <b>1001376</b>           |
| GBP                 | <b>32.00</b>             | <b>32.00</b>             | <b>61.00</b>             | <b>61.00</b>             |

|                     | 300 cm                   | 300 cm                   |
|---------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-250 V ~50/60 Hz      | 220-250 V ~50/60 Hz      |
| Max. current (A)    | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  |
| Material            | Aluminium/plastic        | Aluminium/plastic        |
| L x W x H (cm)      | 300 cm x 3.6 cm x 3.6 cm | 300 cm x 3.6 cm x 3.6 cm |
| Prod. no.           | <b>175030</b>            | <b>1001377</b>           |
| GBP                 | <b>88.00</b>             | <b>88.00</b>             |

# S-TRACK

## 3-PHASE SURFACE-MOUNTED TRACK, ON/OFF

Planning assistance and accessories at a glance

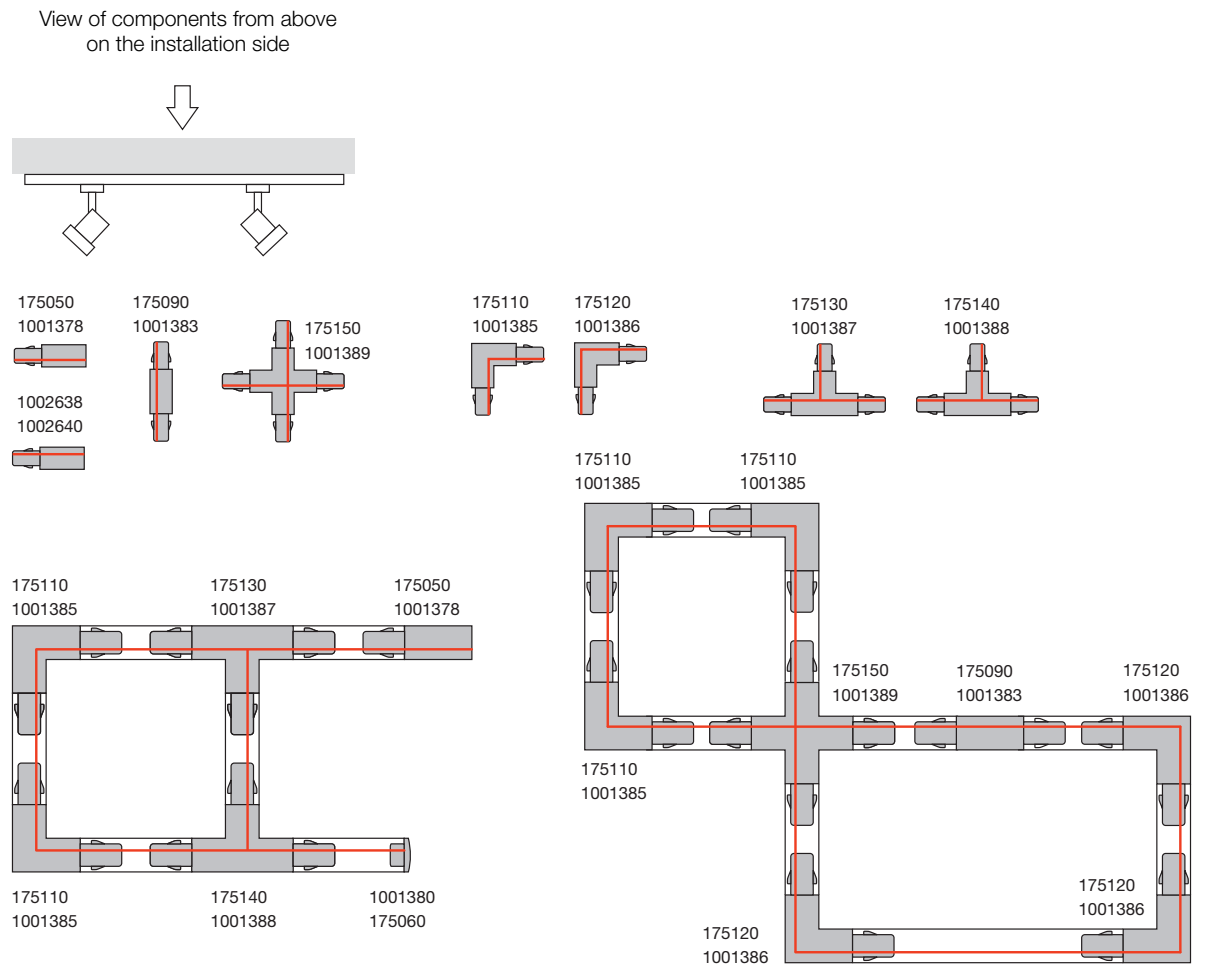

### FEED-IN, EARTH RIGHT



16 A max. | 6.5 cm | Aluminium/Plastic  
L: 6.5 cm | W: 3.5 cm | H: 3.3 cm

- black
- white

Prod. no. **175040** **16.00 GBP**  
Prod. no. **1001379** **16.00 GBP**

### FEED-IN, EARTH LEFT



16 A max. | 6.5 cm | Aluminium/Plastic  
L: 6.5 cm | W: 3.5 cm | H: 3.3 cm

- black
- white

Prod. no. **175050** **15.00 GBP**  
Prod. no. **1001381** **10.00 GBP**

### L-CONNECTOR, EARTH INTERNAL



16 A max. | 6.7 cm | Aluminium/Plastic  
L: 6.7 cm | W: 6.7 cm | H: 3.3 cm  
Earth internal, with feed-in option.

- black
- white

Prod. no. **175110** **26.00 GBP**  
Prod. no. **1001385** **26.00 GBP**

### L-CONNECTOR, EARTH EXTERNAL



16 A max. | 6.7 cm | Aluminium/Plastic  
L: 6.7 cm | W: 6.7 cm | H: 3.3 cm  
Earth external, with feed-in option.

- black
- white

Prod. no. **175120** **26.00 GBP**  
Prod. no. **1001386** **26.00 GBP**

**T-CONNECTOR, EARTH LEFT**

16 A max. | 10 cm | Aluminium/Plastic  
L: 10 cm | W: 6.7 cm | H: 3.3 cm  
Earth left, with feed-in capacity

|         |                   |           |
|---------|-------------------|-----------|
| ● black | Prod. no. 175130  | 31.00 GBP |
| ○ white | Prod. no. 1001387 | 31.00 GBP |

**T-CONNECTOR, EARTH RIGHT**

16 A max. | 10 cm | Aluminium/Plastic  
L: 10 cm | W: 6.7 cm | H: 3.3 cm  
Earth right, with feed capacity

|         |                   |           |
|---------|-------------------|-----------|
| ● black | Prod. no. 175140  | 31.00 GBP |
| ○ white | Prod. no. 1001388 | 31.00 GBP |

**X-CONNECTOR**

16 A max. | 10 cm | Aluminium/Plastic  
L: 10 cm | W: 10 cm | H: 3.3 cm  
2 circuits

|         |                   |           |
|---------|-------------------|-----------|
| ● black | Prod. no. 175150  | 45.00 GBP |
| ○ white | Prod. no. 1001389 | 45.00 GBP |

**LONGITUDINAL CONNECTOR WITH FEED-IN CAPACITY**

16 A max. | 9.9 cm | Aluminium/Plastic  
L: 9.9 cm | W: 3.5 cm | H: 3.3 cm  
With feed-in capacity

|         |                   |           |
|---------|-------------------|-----------|
| ● black | Prod. no. 175090  | 26.00 GBP |
| ○ white | Prod. no. 1001383 | 26.00 GBP |

**FLEX CONNECTOR**

16 A max. | 16,2 cm | Aluminium/Plastic  
L: 16.2 cm | WB: 3.5 cm | H: 3.3 cm

|         |                   |           |
|---------|-------------------|-----------|
| ● black | Prod. no. 175100  | 38.00 GBP |
| ○ white | Prod. no. 1001384 | 38.00 GBP |

**MINI-CONNECTOR**

16 A max. | 6.8 cm | Aluminium/Plastic  
L: 6.8 cm | B: 2.5 cm | H: 2.6 cm

|         |                   |           |
|---------|-------------------|-----------|
| ● black | Prod. no. 175070  | 10.00 GBP |
| ○ white | Prod. no. 1001378 | 15.00 GBP |

**3-PHASE ADAPTER, ON/OFF**

16 A max. | Polycarbonate (PC)  
L: 8.4 cm | W: 5.5 cm | H: 3.3 cm

|         |                   |           |
|---------|-------------------|-----------|
| ● black | Prod. no. 175200  | 16.00 GBP |
| ○ white | Prod. no. 1001394 | 16.00 GBP |

**MINI INSULATING CONNECTOR**

16 A max. | 6.8 cm | Plastic  
L: 6.8 cm | W: 3.1 cm | H: 2.6 cm

|         |                   |          |
|---------|-------------------|----------|
| ● black | Prod. no. 175080  | 7.00 GBP |
| ○ white | Prod. no. 1001382 | 7.00 GBP |

**PENDANT CLIP**

4 cm | Steel  
L: 4 cm | W: 3.4 cm | H: 1.3 cm

|         |                   |          |
|---------|-------------------|----------|
| ● black | Prod. no. 1002657 | 7.00 GBP |
| ○ white | Prod. no. 1002658 | 7.00 GBP |

**COVER, 2M**


200 cm | Polycarbonate (PC)  
L: 200 cm | W: 2.2 cm | H: 0.8 cm

|         |                   |          |
|---------|-------------------|----------|
| ● black | Prod. no. 1004939 | 7.00 GBP |
| ○ white | Prod. no. 1004940 | 7.00 GBP |

**END CAP**

3.5 cm | Plastic  
L: 3.5 cm | W: 3.3 cm | H: 3.2 cm

|         |                   |          |
|---------|-------------------|----------|
| ● black | Prod. no. 175060  | 2.00 GBP |
| ○ white | Prod. no. 1001380 | 2.00 GBP |

**PENDANT SUSPENSION**

6 cm | Aluminium/Plastic  
L: 6 cm | W: 6 cm | H: 4 cm

|         |                   |           |
|---------|-------------------|-----------|
| ● black | Prod. no. 175160  | 29.00 GBP |
| ○ white | Prod. no. 1001390 | 29.00 GBP |

**JOINT CONNECTOR**

18.2 cm | Aluminium  
L: 18.2 cm | W: 3.3 cm | H: 2.1 cm

|         |                   |           |
|---------|-------------------|-----------|
| ● black | Prod. no. 175180  | 11.00 GBP |
| ○ white | Prod. no. 1001392 | 11.00 GBP |

**MECH. 3-PHASE ADAPTOR WITH HOOK**

Plastic/Steel  
H: 5.2 cm

|         |                   |          |
|---------|-------------------|----------|
| ● black | Prod. no. 175190  | 3.00 GBP |
| ○ white | Prod. no. 1001393 | 3.00 GBP |

**EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO**

500 cm | Stainless steel/Brass  
L: 500 cm

|          |                   |           |
|----------|-------------------|-----------|
| ● nickel | Prod. no. 1002845 | 37.00 GBP |
|----------|-------------------|-----------|

**MECH. 3-PHASE ADAPTOR**

6.6 cm | Aluminium/Plastic  
L: 6.6 cm | W: 6 cm | H: 3.1 cm

|         |                   |           |
|---------|-------------------|-----------|
| ● black | Prod. no. 175210  | 15.00 GBP |
| ○ white | Prod. no. 1001395 | 15.00 GBP |







## S-TRACK

### 3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI



|                     | 100 cm                   | 100 cm                   | 200 cm                   | 200 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 100 cm x 3.6 cm x 3.6 cm | 100 cm x 3.6 cm x 3.6 cm | 200 cm x 3.6 cm x 3.6 cm | 200 cm x 3.6 cm x 3.6 cm |
| Prod. no.           | <b>1004937</b>           | <b>1004938</b>           | <b>1002631</b>           | <b>1002632</b>           |
| GBP                 | <b>41.00</b>             | <b>41.00</b>             | <b>72.00</b>             | <b>72.00</b>             |


|                     | 300 cm                   | 300 cm                   | 400 cm                   | 400 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 300 cm x 3.6 cm x 3.6 cm | 300 cm x 3.6 cm x 3.6 cm | 400 cm x 3.6 cm x 3.6 cm | 400 cm x 3.6 cm x 3.6 cm |
| Prod. no.           | <b>1002633</b>           | <b>1002634</b>           | <b>1002635</b>           | <b>1002636</b>           |
| GBP                 | <b>105.00</b>            | <b>105.00</b>            | <b>130.00</b>            | <b>130.00</b>            |

# S-TRACK

## 3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI

Planning assistance and accessories at a glance

View of components from above  
on the installation side

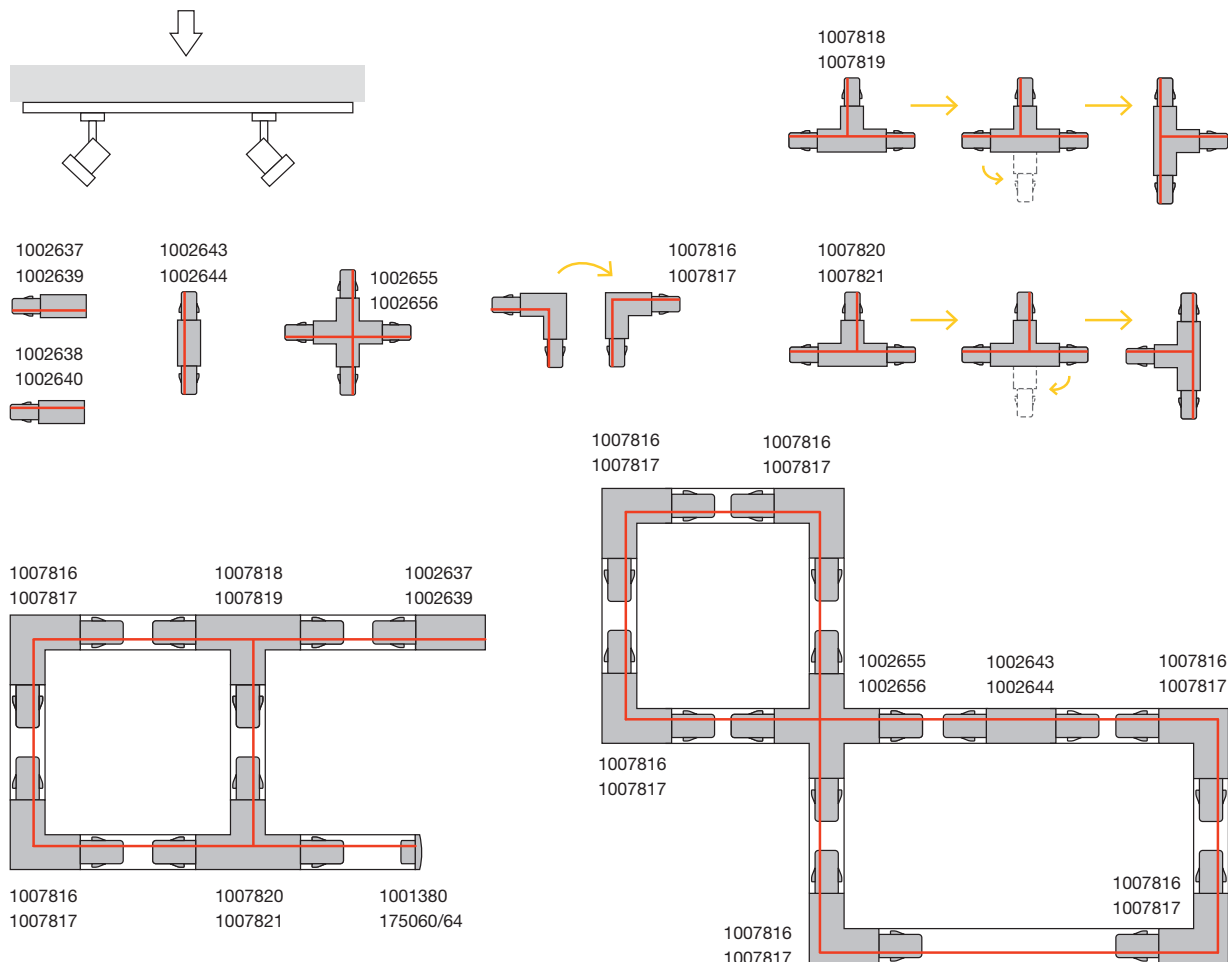

**T-CONNECTOR, PHASE & DALI, ADJUSTABLE, LEFT, WITH FEED-IN CAPACITY**

16 A max. | 20.3 cm | Polycarbonate (PC)  
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm

● black      Prod. no. **1007818**      **35.00 GBP**  
○ white      Prod. no. **1007819**      **35.00 GBP**

**T-CONNECTOR, PHASE & DALI, ADJUSTABLE, RIGHT, WITH FEED-IN CAPACITY**

16 A max. | 20.3 cm | Polycarbonate (PC)  
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm

● black      Prod. no. **1007820**      **35.00 GBP**  
○ white      Prod. no. **1007821**      **35.00 GBP**

**L-CONNECTOR, PHASE & DALI, ADJUSTABLE, WITH FEED-IN CAPACITY**

16 A max. | 11.9 cm | Polycarbonate (PC)  
L: 11.9 cm | W: 11.9 cm | H: 3.3 cm

● black      Prod. no. **1007816**      **30.00 GBP**  
○ white      Prod. no. **1007817**      **30.00 GBP**

**FEED-IN, PHASE & DALI, EARTH LEFT**

16 A max. | 13.9 cm | Polycarbonate (PC)  
L: 13.9 cm | W: 3.5 cm | H: 3.3 cm

● black      Prod. no. **1002637**      **17.00 GBP**  
○ white      Prod. no. **1002639**      **17.00 GBP**

**FEED-IN, PHASE & DALI, EARTH RIGHT**

16 A max. | 13.9 cm | Polycarbonate (PC)  
L: 13.9 cm | W: 3.5 cm | H: 3.3 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>1002638</b> | <b>17.00 GBP</b> |
| ○ white | Prod. no. | <b>1002640</b> | <b>17.00 GBP</b> |

**X-CONNECTOR, PHASE & DALI**

16 A max. | 0.3 cm | Polycarbonate (PC)  
L: 20.3 cm | W: 20.3 cm | H: 3.3 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>1002655</b> | <b>56.00 GBP</b> |
| ○ white | Prod. no. | <b>1002656</b> | <b>56.00 GBP</b> |

**LONGITUDINAL CONNECTOR, PHASE & DALI**

16 A max. | 20.3 cm | Polycarbonate (PC)  
L: 20.3 cm | W: 3.5 cm | H: 3.3 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>1002643</b> | <b>30.00 GBP</b> |
| ○ white | Prod. no. | <b>1002644</b> | <b>30.00 GBP</b> |

**MINI INSULATING CONNECTOR**

16 A max. | 6.8 cm | Plastic  
L: 6.8 cm | W: 3.1 cm | H: 2.6 cm

|         |           |                |                 |
|---------|-----------|----------------|-----------------|
| ● black | Prod. no. | <b>175080</b>  | <b>7.00 GBP</b> |
| ○ white | Prod. no. | <b>1001382</b> | <b>7.00 GBP</b> |

**FLEX CONNECTOR, PHASE & DALI**

16 A max. | 28.5 cm | Polycarbonate (PC)  
L: 28.5 cm | W: 3.5 cm | H: 3.3 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>1002645</b> | <b>48.00 GBP</b> |
| ○ white | Prod. no. | <b>1002646</b> | <b>48.00 GBP</b> |

**MINI-CONNECTOR, PHASE & DALI**

16 A max. | 10.6 cm | Polycarbonate (PC)  
L: 10.6 cm | W: 2.5 cm | H: 2.8 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>1002641</b> | <b>10.00 GBP</b> |
| ○ white | Prod. no. | <b>1002642</b> | <b>10.00 GBP</b> |

**PENDANT CLIP**

4 cm | Steel  
L: 4 cm | W: 3.4 cm | H: 1.3 cm

|         |           |                |                 |
|---------|-----------|----------------|-----------------|
| ● black | Prod. no. | <b>1002657</b> | <b>7.00 GBP</b> |
| ○ white | Prod. no. | <b>1002658</b> | <b>7.00 GBP</b> |

**3-PHASE ADAPTER, DALI**

16 A max. | 11.3 cm | Polycarbonate (PC)  
L: 11.3 cm | W: 5.5 cm | H: 3.3 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>1002660</b> | <b>17.00 GBP</b> |
| ○ white | Prod. no. | <b>1002659</b> | <b>17.00 GBP</b> |

**MECH. 3-PHASE ADAPTOR**

6.6 cm | Aluminium/Plastic  
L: 6.6 cm | W: 6 cm | H: 3.1 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>175210</b>  | <b>15.00 GBP</b> |
| ○ white | Prod. no. | <b>1001395</b> | <b>15.00 GBP</b> |

**COVER, 2M**


200 cm | Polycarbonate (PC)  
L: 200 cm | W: 2.2 cm | H: 0.8 cm

|         |           |                |                 |
|---------|-----------|----------------|-----------------|
| ● black | Prod. no. | <b>1004939</b> | <b>7.00 GBP</b> |
| ○ white | Prod. no. | <b>1004940</b> | <b>7.00 GBP</b> |

**END CAP**

3.5 cm | Plastic  
L: 3.5 cm | W: 3.3 cm | H: 3.2 cm

|         |           |                |                 |
|---------|-----------|----------------|-----------------|
| ● black | Prod. no. | <b>175060</b>  | <b>2.00 GBP</b> |
| ○ white | Prod. no. | <b>1001380</b> | <b>2.00 GBP</b> |

**PENDANT SUSPENSION**

6 cm | Aluminium/Plastic  
L: 6 cm | W: 6 cm | H: 4 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>175160</b>  | <b>29.00 GBP</b> |
| ○ white | Prod. no. | <b>1001390</b> | <b>29.00 GBP</b> |

**JOINT CONNECTOR**

18.2 cm | Aluminium  
L: 18.2 cm | W: 3.3 cm | H: 2.1 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>175180</b>  | <b>11.00 GBP</b> |
| ○ white | Prod. no. | <b>1001392</b> | <b>11.00 GBP</b> |

**MECH. 3-PHASE ADAPTOR WITH HOOK**

Plastic/Steel  
H: 5.2 cm

|         |           |                |                 |
|---------|-----------|----------------|-----------------|
| ● black | Prod. no. | <b>175190</b>  | <b>3.00 GBP</b> |
| ○ white | Prod. no. | <b>1001393</b> | <b>3.00 GBP</b> |

**PHASE & DALI**

Polycarbonate (PC)  
H: 3.5 cm

|         |           |                |                  |
|---------|-----------|----------------|------------------|
| ● black | Prod. no. | <b>1004684</b> | <b>34.00 GBP</b> |
| ○ white | Prod. no. | <b>1004685</b> | <b>34.00 GBP</b> |

**EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO**

500 cm | Stainless steel/Brass  
L: 500 cm

|          |           |                |                  |
|----------|-----------|----------------|------------------|
| ● nickel | Prod. no. | <b>1002845</b> | <b>37.00 GBP</b> |
|----------|-----------|----------------|------------------|








## S-TRACK

### 3-PHASE RECESSED TRACK, PHASE & DALI

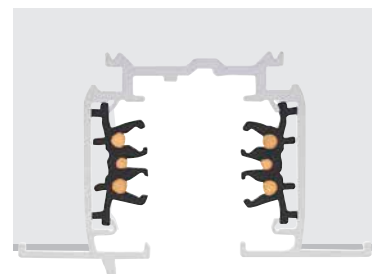


|                     | 100 cm                   | 100 cm                   | 200 cm                   | 200 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-250 V ~50/60 Hz      | 220-250 V ~50/60 Hz      | 220-250 V ~50/60 Hz      | 220-250 V ~50/60 Hz      |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 100 cm x 5.6 cm x 3.6 cm | 100 cm x 5.6 cm x 3.6 cm | 200 cm x 5.6 cm x 3.6 cm | 200 cm x 5.6 cm x 3.6 cm |
| Prod. no.           | <b>1006511</b>           | <b>1006512</b>           | <b>1006513</b>           | <b>1006514</b>           |
| GBP                 | <b>47.00</b>             | <b>47.00</b>             | <b>84.00</b>             | <b>84.00</b>             |

|                     | 300 cm                   | 300 cm                   | 400 cm                   | 400 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-250 V ~50/60 Hz      | 220-250 V ~50/60 Hz      | 220-250 V ~50/60 Hz      | 220-250 V ~50/60 Hz      |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● black                  | ○ white                  |
| Material            | Aluminium                | Aluminium                | Aluminium                | Aluminium                |
| L x W x H (cm)      | 300 cm x 5.6 cm x 3.6 cm | 300 cm x 5.6 cm x 3.6 cm | 400 cm x 5.6 cm x 3.6 cm | 400 cm x 5.6 cm x 3.6 cm |
| Prod. no.           | <b>1006515</b>           | <b>1006516</b>           | <b>1006517</b>           | <b>1006518</b>           |
| GBP                 | <b>121.00</b>            | <b>121.00</b>            | <b>193.00</b>            | <b>193.00</b>            |

S-TRACK  
3-PHASE RECESSED TRACK, PHASE & DALI

Planning assistance and accessories at a glance

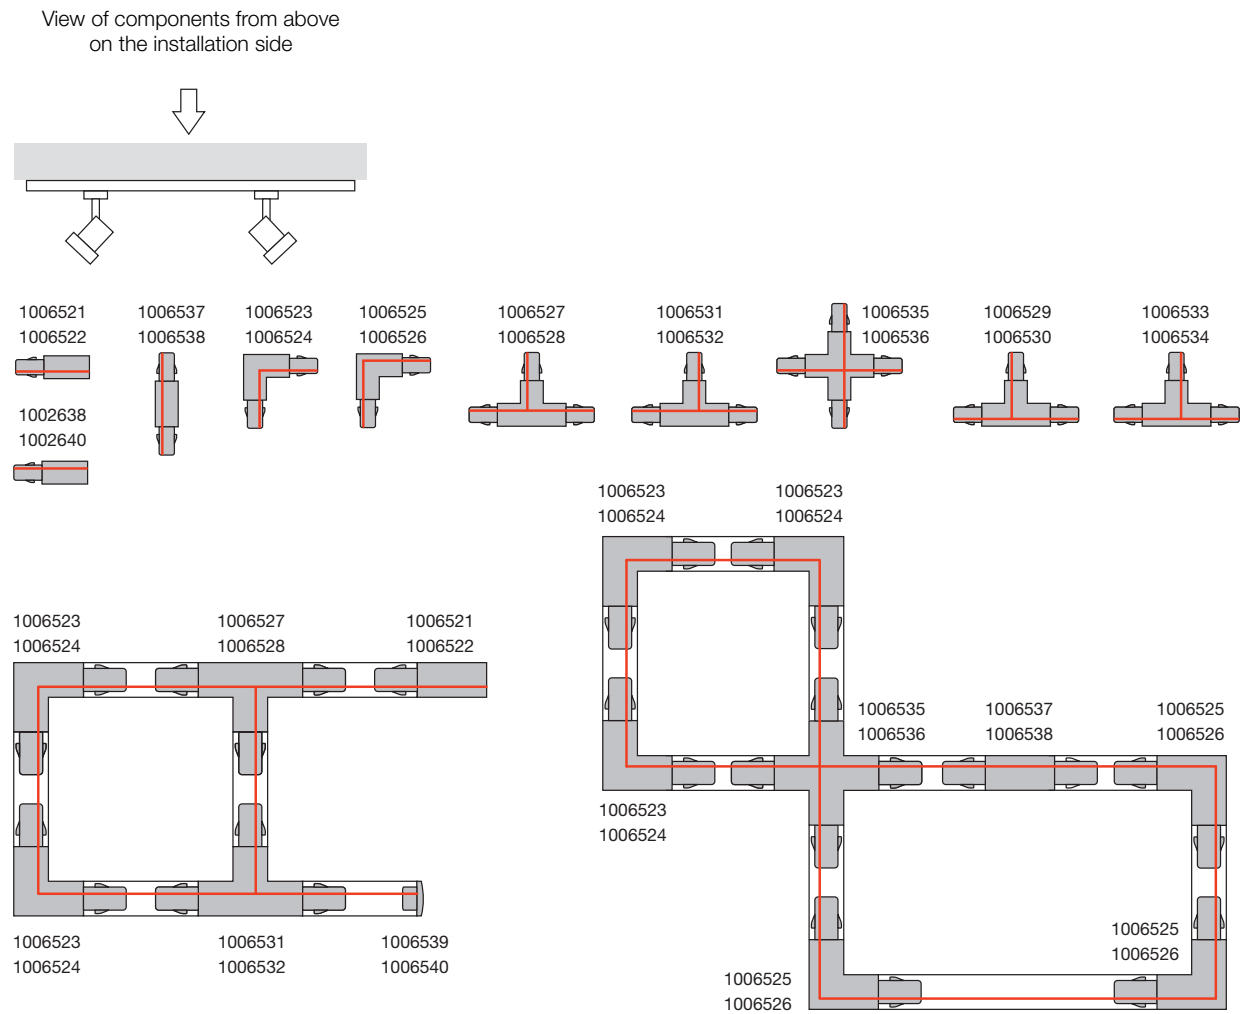

**FEED-IN, PHASE & DALI, EARTH LEFT**

16 A max. | 14.7 cm | Polycarbonate (PC)  
L: 14.7 cm | W: 5.6 cm | H: 3.3 cm

● black Prod. no. **1006521** **22.00 GBP**  
○ white Prod. no. **1006522** **22.00 GBP**

**FEED-IN, PHASE & DALI, EARTH RIGHT**

16 A max. | 14.7 cm | Polycarbonate (PC)  
L: 14.7 cm | W: 5.6 cm | H: 3.3 cm

● black Prod. no. **1006519** **22.00 GBP**  
○ white Prod. no. **1006520** **22.00 GBP**

**L-CONNECTOR, PHASE & DALI, INTERNAL EARTH, WITH FEED-IN CAPACITY**

16 A max. | 13 cm | Polycarbonate (PC)  
L: 13 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006523** **30.00 GBP**  
○ white Prod. no. **1006524** **30.00 GBP**

**L-CONNECTOR, PHASE & DALI, EXTERNAL EARTH, WITH FEED-IN CAPACITY**

16 A max. | 13 cm | Polycarbonate (PC)  
L: 13 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006525** **30.00 GBP**  
○ white Prod. no. **1006526** **30.00 GBP**

**T-CONNECTOR, PHASE & DALI, EXTERNAL EARTH RIGHT, WITH FEED-IN CAPACITY**

16 A max. | 20.3 cm | Polycarbonate (PC)  
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006529** **35.00 GBP**  
○ white Prod. no. **1006530** **35.00 GBP**

**T-CONNECTOR, PHASE & DALI, INTERNAL EARTH RIGHT, WITH FEED-IN CAPACITY**


16 A max. | 20.3 cm | Polycarbonate (PC)  
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006531** **35.00 GBP**  
○ white Prod. no. **1006532** **35.00 GBP**

**T-CONNECTOR, PHASE & DALI, INTERNAL EARTH LEFT, WITH FEED-IN CAPACITY**

16 A max. | 20.3 cm | Polycarbonate (PC)  
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006527** **35.00 GBP**  
○ white Prod. no. **1006528** **35.00 GBP**

**T-CONNECTOR, PHASE & DALI, EXTERNAL EARTH LEFT, WITH FEED-IN CAPACITY**

16 A max. | 20.3 cm | Polycarbonate (PC)  
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006533** **35.00 GBP**  
○ white Prod. no. **1006534** **35.00 GBP**

**X-CONNECTOR**

16 A max. | 20.3 cm | Polycarbonate (PC)  
L: 20.3 cm | W: 20.3 cm | H: 3.3 cm

● black Prod. no. **1006535** **56.00 GBP**  
○ white Prod. no. **1006536** **56.00 GBP**

**LONGITUDINAL CONNECTOR, PHASE & DALI**

16 A max. | 20.3 cm | Polycarbonate (PC)  
L: 20.3 cm | W: 5.6 cm | H: 3.3 cm

● black Prod. no. **1006537** **30.00 GBP**  
○ white Prod. no. **1006538** **30.00 GBP**

**MINI-CONNECTOR, PHASE & DALI**

16 A max. | 10.6 cm | Polycarbonate (PC)  
L: 10.6 cm | W: 2.5 cm | H: 2.8 cm

● black Prod. no. **1002641** **10.00 GBP**  
○ white Prod. no. **1002642** **10.00 GBP**

**END CAP FOR 3-PHASE RECESSED TRACK**

4.8 cm | Polycarbonate (PC)  
L: 4.8 cm | W: 5.6 cm

● black Prod. no. **1006539** **2.00 GBP**  
○ white Prod. no. **1006540** **2.00 GBP**

**3-PHASE ADAPTER, DALI**

16 A max. | 11.3 cm | Polycarbonate (PC)  
L: 11.3 cm | W: 5.5 cm | H: 3.3 cm

● black Prod. no. **1002660** **17.00 GBP**  
○ white Prod. no. **1002659** **17.00 GBP**





# EUTRAC®

## 3-PHASE, SURFACE MOUNTED TRACK, 2 M



|                     | 100 cm                   | 100 cm                   | 100 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● grey                   |
| Material            | Aluminium/plastic        | Aluminium/plastic        | Aluminium/plastic        |
| L x W x H (cm)      | 100 cm x 3.6 cm x 3.2 cm | 100 cm x 3.6 cm x 3.2 cm | 100 cm x 3.6 cm x 3.2 cm |
| Prod. no.           | <b>145100</b>            | <b>1001510</b>           | <b>145102</b>            |
| GBP                 | <b>44.00</b>             | <b>44.00</b>             | <b>44.00</b>             |

|                     | 200 cm                   | 200 cm                   | 200 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● grey                   |
| Material            | Aluminium/plastic        | Aluminium/plastic        | Aluminium/plastic        |
| L x W x H (cm)      | 200 cm x 3.6 cm x 3.2 cm | 200 cm x 3.6 cm x 3.2 cm | 200 cm x 3.6 cm x 3.2 cm |
| Prod. no.           | <b>145200</b>            | <b>1001511</b>           | <b>145202</b>            |
| GBP                 | <b>79.00</b>             | <b>79.00</b>             | <b>79.00</b>             |

|                     | 300 cm                   | 300 cm                   | 300 cm                   |
|---------------------|--------------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        |
| Max. current (A)    | 16 A max.                | 16 A max.                | 16 A max.                |
| Colour              | ● black                  | ○ white                  | ● grey                   |
| Material            | Aluminium/plastic        | Aluminium/plastic        | Aluminium/plastic        |
| L x W x H (cm)      | 300 cm x 3.6 cm x 3.2 cm | 300 cm x 3.6 cm x 3.2 cm | 300 cm x 3.6 cm x 3.2 cm |
| Prod. no.           | <b>145300</b>            | <b>1001512</b>           | <b>145302</b>            |
| GBP                 | <b>126.00</b>            | <b>126.00</b>            | <b>126.00</b>            |




# EUTRAC®

## 3-PHASE, SURFACE MOUNTED TRACK, 2 M

Planning assistance and accessories at a glance

View of components from above  
on the installation side



145510  
1001513  
145514



145520  
1001514  
145524




145670  
1001520  
145674




145680  
1001521  
145684




145630  
1001518  
145634



145640  
1001519  
145644



145690  
1001522  
145694



145670  
1001520  
145674



145510  
1001513  
145514



145510  
1001513  
145514



145510  
1001513  
145514



145630  
1001518  
145634



145630  
1001518  
145634



145630  
1001518  
145634



145630  
1001518  
145634



145630  
1001518  
145634



145630  
1001518  
145634



145630  
1001518  
145634



Example:  
external earth

145670  
1001520  
145674



145670  
1001520  
145674



145670  
1001520  
145674



145670  
1001520  
145674



145670  
1001520  
145674



145670  
1001520  
145674



145670  
1001520  
145674



145670  
1001520  
145674



145670  
1001520  
145674



145670  
1001520  
145674



145670  
1001520  
145674



Example:  
internal earth

145680  
1001521  
145684



145680  
1001521  
145684



145680  
1001521  
145684



145680  
1001521  
145684



145680  
1001521  
145684



145680  
1001521  
145684



145680  
1001521  
145684



145680  
1001521  
145684



145680  
1001521  
145684



145680  
1001521  
145684



### 3-PHASE, FEED-IN, EARTH LEFT



16 A max. | 11.2 cm | Plastic  
L: 11.2 cm | W: 3.6 cm | H: 3.2 cm  
Earth left

- black
- white
- grey

Prod. no. **145510** **18.00 GBP**  
Prod. no. **1001513** **18.00 GBP**  
Prod. no. **145514** **18.00 GBP**

### 3-PHASE, FEED-IN, EARTH RIGHT



16 A max. | 11.2 cm | Plastic  
L: 11.2 cm | W: 3.6 cm | H: 3.2 cm  
Earth right

- black
- white
- grey

Prod. no. **145520** **18.00 GBP**  
Prod. no. **1001514** **18.00 GBP**  
Prod. no. **145524** **18.00 GBP**

### 3-PHASE, CENTRE FEED-IN



16 A max. | 13 cm | Plastic  
L: 13 cm | W: 3.6 cm | H: 3.6 cm

- black
- white
- grey

Prod. no. **145530** **40.00 GBP**  
Prod. no. **1001515** **40.00 GBP**  
Prod. no. **145534** **40.00 GBP**

### 3-PHASE, LONGITUDINAL CONNECTOR WITH FEED-IN CAPACITY



16 A max. | 19.2 cm | Plastic PC  
L: 19.2 cm | W: 3.6 cm | H: 3.2 cm  
With feed-in capacity

- black
- white
- grey

Prod. no. **145660** **69.00 GBP**  
Prod. no. **1001517** **69.00 GBP**  
Prod. no. **145664** **69.00 GBP**

**3-PHASE, LONGITUDINAL CONNECTOR**

16 A max. | 5.8 cm | Plastic  
L: 5.8 cm | W: 1.5 cm | H: 2.6 cm

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145560  | 18.00 GBP |
| ○ white | Prod. no. | 1001516 | 18.00 GBP |
| ● grey  | Prod. no. | 145564  | 18.00 GBP |

**3-PHASE, L-CONNECTOR, INTERNAL EARTH, WITH FEED-IN CAPACITY**

16 A max. | 15 cm | Plastic  
L: 15 cm | W: 15 cm | H: 3.2 cm

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145680  | 58.00 GBP |
| ○ white | Prod. no. | 1001521 | 58.00 GBP |
| ● grey  | Prod. no. | 145684  | 58.00 GBP |

**3-PHASE, L-CONNECTOR, EXTERNAL EARTH, WITH FEED-IN CAPACITY**

16 A max. | 15 cm | Plastic  
L: 15 cm | W: 15 cm | H: 3.2 cm

Earth external, with feed-in capacity

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145670  | 58.00 GBP |
| ○ white | Prod. no. | 1001520 | 58.00 GBP |
| ● grey  | Prod. no. | 145674  | 58.00 GBP |

**3-PHASE, T-CONNECTOR, INTERNAL EARTH LEFT**

16 A max. | 26 cm | Plastic  
L: 26 cm | B: 18.5 cm | H: 3.2 cm

Earth internal, left, with feed-in capacity

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145630  | 79.00 GBP |
| ○ white | Prod. no. | 1001518 | 79.00 GBP |
| ● grey  | Prod. no. | 145634  | 79.00 GBP |

**3-PHASE, T-CONNECTOR, INTERNAL EARTH RIGHT**

16 A max. | 26 cm | Plastic  
L: 26 cm | B: 18.5 cm | H: 3.2 cm

Earth internal, right, with feed-in capacity

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145640  | 79.00 GBP |
| ○ white | Prod. no. | 1001519 | 79.00 GBP |
| ● grey  | Prod. no. | 145644  | 79.00 GBP |

**3-PHASE, X-CONNECTOR, WITH FEED-IN CAPACITY**

16 A max. | 26 cm | Plastic  
L: 26 cm | W: 26 cm | H: 3.2 cm

Two separate power circuits

|         |           |         |            |
|---------|-----------|---------|------------|
| ● black | Prod. no. | 145690  | 117.00 GBP |
| ○ white | Prod. no. | 1001522 | 117.00 GBP |
| ● grey  | Prod. no. | 145694  | 117.00 GBP |

**3-PHASE, JOINT CONNECTOR**

16 A max. | 10 cm | Plastic  
L: 10 cm | W: 3.6 cm | H: 1.9 cm

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145600  | 20.00 GBP |
| ○ white | Prod. no. | 1001523 | 20.00 GBP |
| ● grey  | Prod. no. | 145604  | 20.00 GBP |

**3-PHASE, FLEX CONNECTOR**

16 A max. | 30.7 cm | Plastic  
L: 30.7 cm | W: 3.6 cm | H: 3.2 cm

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145580  | 79.00 GBP |
| ○ white | Prod. no. | 1001524 | 79.00 GBP |
| ● grey  | Prod. no. | 145584  | 79.00 GBP |

**3-PHASE, SOCKET**

6,3 A max. | 9.6 cm | Plastic  
L: 9.6 cm | W: 6.5 cm | H: 9 cm

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145700  | 83.00 GBP |
| ○ white | Prod. no. | 1001525 | 83.00 GBP |

**3-PHASE, PENDANT LIGHT ADAPTOR**

10 A max. | 9.6 cm | Plastic  
L: 9.6 cm | W: 3.5 cm | H: 4.5 cm

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145990  | 18.00 GBP |
| ○ white | Prod. no. | 1001542 | 18.00 GBP |
| ● grey  | Prod. no. | 145994  | 18.00 GBP |

**3-PHASE, PENDANT CLIP**

5 cm | Aluminium  
L: 5 cm | W: 3.6 cm | H: 1.9 cm

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145730  | 10.00 GBP |
| ○ white | Prod. no. | 1001530 | 10.00 GBP |
| ● grey  | Prod. no. | 145734  | 10.00 GBP |

**3-PHASE, UNIVERSAL POINT OUTLET**

16 A max. | Plastic  
H: 3.1 cm

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145830  | 92.00 GBP |
| ○ white | Prod. no. | 1001526 | 92.00 GBP |
| ● grey  | Prod. no. | 145834  | 92.00 GBP |

**3-PHASE, END CAP**

3.6 cm | Plastic  
L: 3.6 cm | W: 1.7 cm | H: 3.2 cm

|         |           |         |          |
|---------|-----------|---------|----------|
| ● black | Prod. no. | 145590  | 4.00 GBP |
| ○ white | Prod. no. | 1001527 | 4.00 GBP |
| ● grey  | Prod. no. | 145594  | 4.00 GBP |

**3-PHASE, PENDANT SUSPENSION, RIGID**

60 cm | Plastic/Steel  
L: 60 cm | H: 63.5 cm

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145720  | 35.00 GBP |
| ○ white | Prod. no. | 1001529 | 35.00 GBP |
| ● grey  | Prod. no. | 145724  | 35.00 GBP |

**3-PHASE, PENDANT SUSPENSION, RIGID**

120 cm | Plastic/Steel  
L: 120 cm | H: 122 cm

|         |           |         |           |
|---------|-----------|---------|-----------|
| ● black | Prod. no. | 145710  | 40.00 GBP |
| ○ white | Prod. no. | 1001528 | 40.00 GBP |
| ● grey  | Prod. no. | 145714  | 40.00 GBP |

**EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO**

500 cm | Stainless steel/Brass  
L: 500 cm


|          |           |         |           |
|----------|-----------|---------|-----------|
| ● nickel | Prod. no. | 1002845 | 37.00 GBP |
|----------|-----------|---------|-----------|





# EUTRAC®

## 3-PHASE, RECESSED TRACK, 3 M

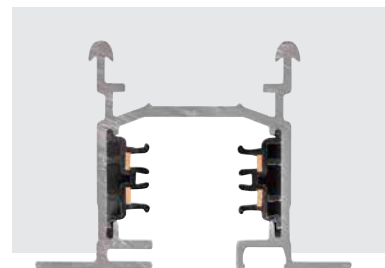

|                     | 200 cm                   | 300 cm                   |
|---------------------|--------------------------|--------------------------|
| Nominal voltage (V) | 220-250V ~50/60Hz        | 220-250V ~50/60Hz        |
| Max. current (A)    | 16 A max.                | 16 A max.                |
| Colour              | ○ white                  | ○ white                  |
| Material            | Aluminium/plastic        | Aluminium/plastic        |
| L x W x H (cm)      | 200 cm x 5.9 cm x 4.1 cm | 300 cm x 5.9 cm x 4.1 cm |
| Prod. no.           | <b>1001531</b>           | <b>1001532</b>           |
| GBP                 | <b>109.00</b>            | <b>176.00</b>            |



### 3-PHASE, FEED-IN, EARTH LEFT

16 A max. | 12.2 cm | Plastic/Steel  
L: 12.2 cm | W: 6 cm | H: 3.4 cm

○ white

Prod. no. **1001533** **29.00 GBP**



### 3-PHASE, FEED-IN, EARTH RIGHT

16 A max. | 12.2 cm | Plastic/Steel  
L: 12.2 cm | W: 6 cm | H: 3.4 cm

○ white

Prod. no. **1001534** **29.00 GBP**



### 3-PHASE, L-CONNECTOR

16 A max. | 16 cm | Plastic/Steel  
L: 16 cm | W: 16 cm | H: 3.2 cm  
Earth external, with feed-in capacity

○ white

Prod. no. **1001536** **69.00 GBP**



### 3-PHASE, L-CONNECTOR

16 A max. | 16 cm | Plastic/Steel  
L: 16 cm | W: 16 cm | H: 3.2 cm  
Earth internal, with feed-in capacity

○ white

Prod. no. **1001537** **69.00 GBP**



### 3-PHASE, END CAP

2.7 cm | Plastic  
L: 2.7 cm | B: 6 cm | H: 3.2 cm

○ white

Prod. no. **1001538** **7.00 GBP**



### 3-PHASE, LONGITUDINAL CONNECTOR

16 A max. | 6.2 cm | Plastic/Steel  
L: 6.2 cm | W: 2.5 cm | H: 2.7 cm

○ white

Prod. no. **1001539** **25.00 GBP**



### 3-PHASE, MOUNTING SPRING CLIP

2 cm | Steel  
L: 2 cm | W: 1 cm | H: 2.5 cm

● grey

Prod. no. **145551** **12.00 GBP**



### 3-PHASE LIGHT ADAPTER

10 A max. | 9.6 cm | Plastic  
L: 9.6 cm | W: 3.5 cm | H: 4.5 cm

○ white

Prod. no. **1001542** **18.00 GBP**


1011688 555







HAVEN 25  
3-PHASE, E27

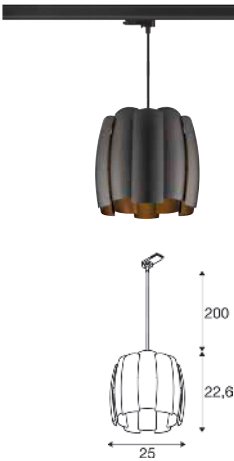

220-240 V ~50/60 Hz  
Material: Steel



Base: 1xE27

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011687   | 222.00 |
| ○ white | 1011688   | 222.00 |
| ● gold  | 1011689   | 231.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F




Prod. no.: 1005303 9.00 GBP

1008268 557



## PURI 2.0 TUBE

3-PHASE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium




Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008266   | 35.00 |
| ● black/gold | 1008267   | 35.00 |
| ○ white      | 1008268   | 35.00 |

## PURI 2.0 CONE

3-PHASE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium




Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008269   | 35.00 |
| ● black/gold | 1008270   | 35.00 |
| ○ white      | 1008271   | 35.00 |

## PURI 2.0 DOME

3-PHASE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008272   | 35.00 |
| ● black/gold | 1008273   | 35.00 |
| ○ white      | 1008274   | 35.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP


1008282 559





## PURI 2.0 TUBE

3-PHASE, PD, QPAR51

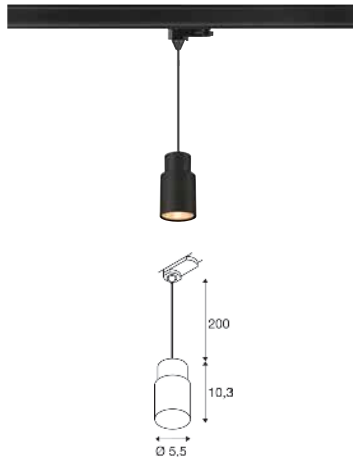

220-240 V ~50/60 Hz  
Material: Aluminium




Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008275   | 39.00 |
| ● black/gold | 1008276   | 39.00 |
| ○ white      | 1008277   | 39.00 |

## PURI 2.0 CONE

3-PHASE, PD, QPAR51

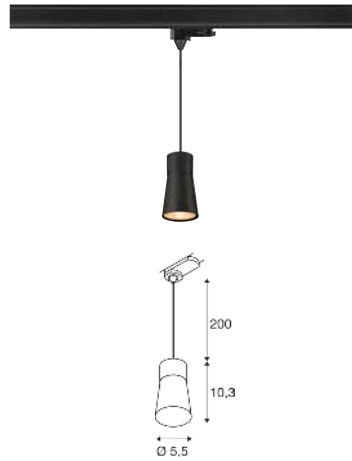

220-240 V ~50/60 Hz  
Material: Aluminium




Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008278   | 39.00 |
| ● black/gold | 1008279   | 39.00 |
| ○ white      | 1008280   | 39.00 |

## PURI 2.0 DOME

3-PHASE, PD, QPAR51

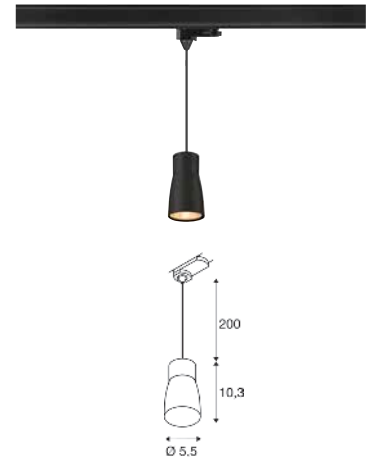

220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● black      | 1008281   | 39.00 |
| ● black/gold | 1008282   | 39.00 |
| ○ white      | 1008283   | 39.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



1008271 + 1008219 557 + 561





## PURI 2.0 TUBE SHADE



Ø: 5.5 cm  
H: 6.5 cm  
Material: Aluminium

| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1008214   | 8.00 |
| ○ white     | 1008213   | 8.00 |
| ● gold      | 1008216   | 8.00 |
| ● grey      | 1008215   | 8.00 |
| ● bronze    | 1008217   | 8.00 |
| ● aluminium | 1008376   | 8.00 |

## PURI 2.0 CONE SHADE



Ø: 5.5 cm  
H: 6.5 cm  
Material: Aluminium

| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1008219   | 8.00 |
| ○ white     | 1008218   | 8.00 |
| ● gold      | 1008221   | 8.00 |
| ● grey      | 1008220   | 8.00 |
| ● bronze    | 1008222   | 8.00 |
| ● aluminium | 1008377   | 8.00 |

## PURI 2.0 DOME SHADE



Ø: 5.5 cm  
H: 6.5 cm  
Material: Aluminium


| Variant     | Prod. no. | GBP  |
|-------------|-----------|------|
| ● black     | 1008224   | 8.00 |
| ○ white     | 1008223   | 8.00 |
| ● gold      | 1008226   | 8.00 |
| ● grey      | 1008225   | 8.00 |
| ● bronze    | 1008227   | 8.00 |
| ● aluminium | 1008378   | 8.00 |





## BIMA 2.0


### 3-PHASE, SINGLE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic

## BIMA 2.0

### 3-PHASE, DOUBLE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.4 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011763   | 42.00 |
| ○ white | 1011764   | 42.00 |



Base: 2xGU10 max. Ø: 5.1 cm | L: 5.4 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011765   | 68.00 |
| ○ white | 1011766   | 68.00 |



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005079 7.00 GBP



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005079 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP




| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Decorative Ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |



| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Decorative Ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |

## ENOLA® 2.0 S


3-PHASE, SINGLE,  
GU10 MINI, PAR11



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic PC

## ENOLA® 2.0 S

3-PHASE, PD, SINGLE,  
GU10 MINI, PAR11



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic PC

## ENOLA® 2.0 S

DECORATIVE RING



Ø: 3.9 cm  
H: 1.1 cm  
Material: Plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011753   | 4.00 |
| ○ white  | 1011754   | 4.00 |
| ● gold   | 1011755   | 4.00 |
| ● copper | 1011756   | 4.00 |



Base: 1xGU10 max. Ø: 3.6 cm L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011721   | 48.00 |
| ○ white | 1011722   | 48.00 |



Base: 1xGU10 max. Ø: 3.6 cm L: 4.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011725   | 60.00 |
| ○ white | 1011726   | 60.00 |



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP



GU10 | 5 W | 36°  
390 lm | 2700 K | EEC = F



Prod. no.: 1011670 10.00 GBP



| Product                       | Prod. no. | GBP  |
|-------------------------------|-----------|------|
| ENOLA® 2.0 S, Decorative Ring |           |      |
| ● black                       | 1011753   | 4.00 |
| ○ white                       | 1011754   | 4.00 |
| ● gold                        | 1011755   | 4.00 |
| ● copper                      | 1011756   | 4.00 |




| Product                       | Prod. no. | GBP  |
|-------------------------------|-----------|------|
| ENOLA® 2.0 S, Decorative Ring |           |      |
| ● black                       | 1011753   | 4.00 |
| ○ white                       | 1011754   | 4.00 |
| ● gold                        | 1011755   | 4.00 |
| ● copper                      | 1011756   | 4.00 |





## ENOLA® 2.0 M


3-PHASE, SINGLE, GU10, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic PC

## ENOLA® 2.0 M

3-PHASE, PD, SINGLE,  
GU10, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic PC

## ENOLA® 2.0/BIMA 2.0 M

DECORATIVE RING



Ø: 5.4 cm  
H: 2 cm  
Material: Plastic PC

| Variant  | Prod. no. | GBP  |
|----------|-----------|------|
| ● black  | 1011749   | 4.00 |
| ○ white  | 1011750   | 4.00 |
| ● gold   | 1011751   | 4.00 |
| ● copper | 1011752   | 4.00 |



Base: 1xGU10 max. Ø: 5.1 cm L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011711   | 52.00 |
| ○ white | 1011712   | 52.00 |



Base: 1xGU10 max. Ø: 5.1 cm L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1011715   | 68.00 |
| ○ white | 1011716   | 68.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005076 7.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



GU10 | 5W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP




| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Decorative Ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |



| Product                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ENOLA® 2.0/BIMA 2.0 M, Decorative Ring |           |      |
| ● black                                | 1011749   | 4.00 |
| ○ white                                | 1011750   | 4.00 |
| ● gold                                 | 1011751   | 4.00 |
| ● copper                               | 1011752   | 4.00 |

## GRIP! M

3-PHASE, DALI, Ø 4,3 CM



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- Honeycomb accessories included



|         |      |         |
|---------|------|---------|
| 1008437 | Down | 3000 K  |
| 1008438 |      | 1540 lm |
| 1008435 | Down | 2700 K  |
| 1008436 |      | 1450 lm |


| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black/gold<br>1450 lm   2700 K  | 1008436   | 155.00 |
| ● black/gold<br>1540 lm   3000 K  | 1008438   | 155.00 |
| ● white/black<br>1450 lm   2700 K | 1008435   | 155.00 |
| ● white/black<br>1540 lm   3000 K | 1008437   | 155.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! M, decorative ring |           |       |
| ○ white                  | 1011833   | 18.00 |
| ● black                  | 1011834   | 18.00 |
| ● Nickel                 | 1011835   | 18.00 |
| ● gold                   | 1011836   | 18.00 |
| Honeycomb                |           |       |
| ● black                  | 1011838   | 10.00 |

## GRIP! M

3-PHASE, DALI, Ø 4,3 CM



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- Honeycomb accessories included



|      |                 |
|------|-----------------|
| Down | 2000 K - 3000 K |
|      | 1000 lm         |


| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black/gold  | 1008440   | 155.00 |
| ● white/black | 1008439   | 155.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! M, decorative ring |           |       |
| ○ white                  | 1011833   | 18.00 |
| ● black                  | 1011834   | 18.00 |
| ● Nickel                 | 1011835   | 18.00 |
| ● gold                   | 1011836   | 18.00 |
| Honeycomb                |           |       |
| ● black                  | 1011838   | 10.00 |



## GRIP! M 3-PHASE, PHASE, Ø 4,3 CM



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- Honeycomb accessories included




|         |      |         |
|---------|------|---------|
| 1008443 | Down | 3000 K  |
| 1008444 |      | 1540 lm |
| 1008441 | Down | 2700 K  |
| 1008442 |      | 1450 lm |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black/gold<br>1450 lm   2700 K  | 1008442   | 155.00 |
| ● black/gold<br>1540 lm   3000 K  | 1008444   | 155.00 |
| ○ white/black<br>1450 lm   2700 K | 1008441   | 155.00 |
| ○ white/black<br>1540 lm   3000 K | 1008443   | 155.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! M, decorative ring |           |       |
| ○ white                  | 1011833   | 18.00 |
| ● black                  | 1011834   | 18.00 |
| ● Nickel                 | 1011835   | 18.00 |
| ● gold                   | 1011836   | 18.00 |
| Honeycomb                |           |       |
| ● black                  | 1011838   | 10.00 |

## GRIP! M 3-PHASE, PHASE, Ø 4,3 CM



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- Honeycomb accessories included



|      |                            |
|------|----------------------------|
| Down | 2000 K - 3000 K<br>1000 lm |
|------|----------------------------|

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black/gold  | 1008446   | 155.00 |
| ○ white/black | 1008445   | 155.00 |



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| GRIP! M, decorative ring |           |       |
| ○ white                  | 1011833   | 18.00 |
| ● black                  | 1011834   | 18.00 |
| ● Nickel                 | 1011835   | 18.00 |
| ● gold                   | 1011836   | 18.00 |
| Honeycomb                |           |       |
| ● black                  | 1011838   | 10.00 |

## GRIP! M DECORATIVE RING



NEW

Ø: 4 cm  
H: 1.4 cm  
Material: Aluminium

- Front panel with spacer
- No honeycomb insert included

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1011834   | 18.00 |
| ○ white  | 1011833   | 18.00 |
| ● gold   | 1011836   | 18.00 |
| ● Nickel | 1011835   | 18.00 |



| Product   | Prod. no. | GBP   |
|-----------|-----------|-------|
| Honeycomb |           |       |
| ● black   | 1011838   | 10.00 |


1008452 569





## GRIP! L

3-PHASE, QPAR51, Ø 5,7 CM



220-240 V ~50/60 Hz  
Material: Aluminium

- Honeycomb accessories included



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant       | Prod. no. | GBP   |
|---------------|-----------|-------|
| ● black/gold  | 1008453   | 77.00 |
| ● white/black | 1008452   | 77.00 |



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005080 7.00 GBP




GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## GRIP! L

3-PHASE, PD, QPAR51, Ø 5,7 CM



220-240 V ~50/60 Hz  
Material: Aluminium

- Honeycomb accessories included



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● black/gold  | 1011710   | 121.00 |
| ● white/black | 1011709   | 121.00 |



GU10 | 6 W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005080 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP

## GRIP! L

DECORATIVE RING



Ø: 5.4 cm  
H: 2.1 cm  
Material: Aluminium

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1008497   | 21.00 |
| ○ white  | 1008496   | 21.00 |
| ● gold   | 1008499   | 21.00 |
| ● Nickel | 1008498   | 21.00 |



| Product   | Prod. no. | GBP   |
|-----------|-----------|-------|
| Honeycomb |           |       |
| ● black   | 1011839   | 11.00 |



1006119 581




1004563

577




# NUMINOS® S

## 3-PHASE




● black



220-240 V ~50/60 Hz | 200 mA  
Total wattage: 8 W  
Material: Aluminium

| Variant             | GBP    |
|---------------------|--------|
| All S versions      | 100.00 |
| All S versions DALI | 142.00 |



○ white

Note:  
Decorative ring also  
available in white,  
gold and copper




| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Front ring S |           |      |
| ○ white      | 1006167   | 2.00 |
| ● copper     | 1008140   | 8.00 |
| ● gold       | 1008144   | 8.00 |




|                                                                                                                                                                         |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                 | 1004074   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004075   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004076   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004082   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004083   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004084   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004090   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004091   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004092   |                                                                                       |
|       | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                 | 1004362   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004363   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004364   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004370   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004371   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004372   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004378   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004379   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004380   |                                                                                       |
|                                                                                        | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                 | 1004078   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004079   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004080   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004086   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004087   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004088   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004094   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004095   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004096   |                                                                                       |
|   | 2700 K                                                                            | 950 lm                                                                            | 24°                                                                               | 16                                                                                 | 1004366   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004367   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004368   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1050 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004374   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004375   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004376   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1100 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004382   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004383   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004384   |                                                                                       |

# NUMINOS® M 3-PHASE

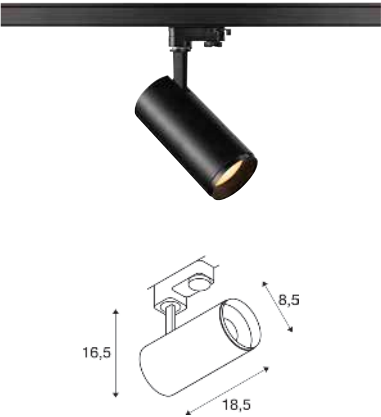


● black



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: Aluminium

| Variant             | GBP    |
|---------------------|--------|
| All M versions      | 126.00 |
| All M versions DALI | 172.00 |



○ white

**Note:**  
Decorative ring also  
available in white,  
gold and copper




| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Front ring M |           |      |
| ○ white      | 1006168   | 3.00 |
| ● copper     | 1008141   | 8.00 |
| ● gold       | 1008145   | 8.00 |






|                                                                                                                                                                         |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004170   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004171   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004172   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004178   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004179   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004180   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004186   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004187   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004188   |                                                                                       |
|                                                                                                                                                                         | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004458   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004459   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004460   |                                                                                       |
|       | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004466   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004467   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004468   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004474   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004475   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004476   |                                                                                       |
|                                                                                        | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004174   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004175   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004176   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004182   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004183   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004184   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004190   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004191   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004192   |                                                                                       |
|                                                                                                                                                                         | 2700 K                                                                            | 1750 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004462   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004463   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004464   |                                                                                       |
|   | 3000 K                                                                            | 1800 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004470   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004471   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004472   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 1950 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004478   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004479   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1004480   |                                                                                       |

# NUMINOS® L 3-PHASE

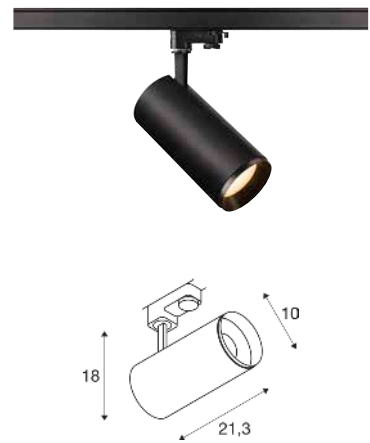


● black



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: Aluminium

| Variant             | GBP    |
|---------------------|--------|
| All L versions      | 134.00 |
| All L versions DALI | 184.00 |



○ white

**Note:**  
Decorative ring also  
available in white,  
gold and copper





| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Front ring L |           |       |
| ○ white      | 1006169   | 3.00  |
| ● copper     | 1008142   | 10.00 |
| ● gold       | 1008146   | 10.00 |




|                                                                                                                                                                         |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004266   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004267   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004268   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004274   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004275   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004276   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004282   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004283   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004284   |                                                                                       |
|       | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004554   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004555   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004556   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004562   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004563   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004564   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004570   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004571   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004572   |                                                                                       |
|                                                                                        | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004270   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004271   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004272   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004278   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004279   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004280   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004286   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004287   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004288   |                                                                                       |
|   | 2700 K                                                                            | 2300 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004558   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004559   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004560   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 2400 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004566   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004567   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004568   |                                                                                       |
|                                                                                                                                                                         | 4000 K                                                                            | 2600 lm                                                                           | 24°                                                                               | 16                                                                                 | 1004574   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1004575   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 19                                                                                 | 1004576   |                                                                                       |

# NUMINOS® XL 3-PHASE

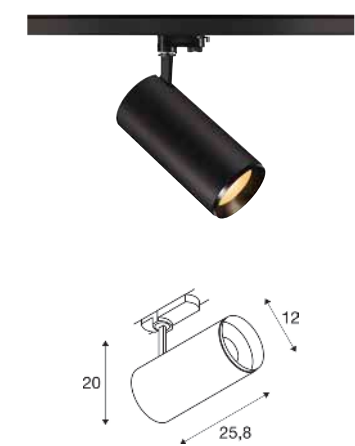


● black



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 28 W  
Material: Aluminium

| Variant              | GBP    |
|----------------------|--------|
| All XL versions      | 142.00 |
| All XL versions DALI | 201.00 |



○ white

Note:  
Decorative ring also  
available in white,  
gold and copper




| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Front ring XL |           |       |
| ○ white       | 1006170   | 4.00  |
| ● copper      | 1008143   | 10.00 |
| ● gold        | 1008147   | 10.00 |



|                                                                                                                                                                         |  |  |  |  | Prod. no. |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------|
|                                                                                        | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005723   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005724   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005725   |                                                                                       |
|                                                                                                                                                                         |                                                                                   | 3150 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005729   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005730   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005731   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005735   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005736   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005737   |                                                                                       |
|                                                                                                                                                                         |                                                                                   | 3900 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005795   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005796   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005797   |                                                                                       |
|       | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005801   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005802   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005803   |                                                                                       |
|                                                                                                                                                                         |                                                                                   | 3150 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005807   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005808   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005809   |                                                                                       |
|                                                                                                                                                                         | 3000 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005726   |    |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005727   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005728   |                                                                                       |
|                                                                                                                                                                         |                                                                                   | 3150 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005732   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005733   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005734   |                                                                                       |
|                                                                                        | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005738   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005739   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005740   |                                                                                       |
|                                                                                                                                                                         |                                                                                   | 3900 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005798   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005799   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005800   |                                                                                       |
|   | 2700 K                                                                            | 3550 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005804   |  |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005805   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005806   |                                                                                       |
|                                                                                                                                                                         |                                                                                   | 3150 lm                                                                           | 24°                                                                               | 16                                                                                 | 1005810   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 36°                                                                               | 16                                                                                 | 1005811   |                                                                                       |
|                                                                                                                                                                         |                                                                                   |                                                                                   | 60°                                                                               | 22                                                                                 | 1005812   |                                                                                       |



# NUMINOS® ZOOM M 3-PHASE




220-240 V ~50/60 Hz | 500 mA  
 Total wattage: 20 W  
 Material: Aluminium/Polycarbonate (PC)

| Variant             | GBP    |
|---------------------|--------|
| All M versions      | 159.00 |
| All M versions DALI | 201.00 |



● black



○ white

|                                                                                   |  |  |  |  | Prod. no.      |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------|
|  | 2700 K                                                                            | 680 lm                                                                            | 15° – 60°                                                                         | 25                                                                                 | <b>1006108</b> |  |
|                                                                                   | 3000 K                                                                            | 750 lm                                                                            |                                                                                   | 25                                                                                 | <b>1006110</b> |                                                                                     |
|                                                                                   | 4000 K                                                                            | 780 lm                                                                            |                                                                                   | 25                                                                                 | <b>1006112</b> |                                                                                     |
|  | 2700 K                                                                            | 680 lm                                                                            | 15° – 60°                                                                         | 25                                                                                 | <b>1006114</b> |  |
|                                                                                   | 3000 K                                                                            | 750 lm                                                                            |                                                                                   | 25                                                                                 | <b>1006116</b> |                                                                                     |
|                                                                                   | 4000 K                                                                            | 780 lm                                                                            |                                                                                   | 25                                                                                 | <b>1006118</b> |                                                                                     |
|  | 2700 K                                                                            | 680 lm                                                                            | 15° – 60°                                                                         | 25                                                                                 | <b>1006109</b> |  |
|                                                                                   | 3000 K                                                                            | 750 lm                                                                            |                                                                                   | 25                                                                                 | <b>1006111</b> |                                                                                     |
|                                                                                   | 4000 K                                                                            | 780 lm                                                                            |                                                                                   | 25                                                                                 | <b>1006113</b> |                                                                                     |
|  | 2700 K                                                                            | 680 lm                                                                            | 15° – 60°                                                                         | 25                                                                                 | <b>1006115</b> |  |
|                                                                                   | 3000 K                                                                            | 750 lm                                                                            |                                                                                   | 25                                                                                 | <b>1006117</b> |                                                                                     |
|                                                                                   | 4000 K                                                                            | 780 lm                                                                            |                                                                                   | 25                                                                                 | <b>1006119</b> |                                                                                     |


1007654 583





## UNIVERSAL TRACKSPOT

3-PHASE M, 12/16/20/24W  
927/930/940 24°...60°




220-240 V ~50/60 Hz | 300 / 400 / 500 / 600 mA  
Total wattage: 12 / 16 / 20 / 24 W  
Material: Aluminium/Plastic PC

- Variable beam angle 24°-60°

## UNIVERSAL TRACKSPOT

3-PHASE L, 24/28/32/36W  
927/930/940 24°...60°



220-240 V ~50/60 Hz | 600 / 700 / 800 / 900 mA  
Total wattage: 24 / 28 / 32 / 36 W  
Material: Aluminium/Plastic PC

- Variable beam angle 24°-60°



|         |         |         |         |
|---------|---------|---------|---------|
| 1007655 | 2700 K  | 3000 K  | 4000 K  |
|         | 2000 lm | 2200 lm | 2150 lm |
| 1007654 | 2700 K  | 3000 K  | 4000 K  |
|         | 2000 lm | 2200 lm | 2150 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007655   | 137.00 |
| ○ white | 1007654   | 137.00 |



|         |         |         |         |
|---------|---------|---------|---------|
| 1007657 | 2700 K  | 3000 K  | 4000 K  |
|         | 2900 lm | 3300 lm | 3200 lm |
| 1007656 | 2700 K  | 3000 K  | 4000 K  |
|         | 2900 lm | 3300 lm | 3200 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007656   | 154.00 |
| ○ white | 1007657   | 154.00 |


1007646 585








## NOBLO® SPOT 3-PHASE, PHASE



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 6 W  
Material: Aluminium/Polycarbonate (PC)

## NOBLO® SPOT 3-PHASE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 8.4 W  
Material: Aluminium/Polycarbonate (PC)



|         |        |
|---------|--------|
| 1007648 | 4000 K |
| 1007649 | 760 lm |
| 1007646 | 3000 K |
| 1007647 | 750 lm |
| 1007644 | 2700 K |
| 1007645 | 740 lm |



|                 |
|-----------------|
| 2000 K - 3000 K |
| 30 lm - 450 lm  |

| Variant                    | Prod. no. | GBP   |
|----------------------------|-----------|-------|
| ● black<br>740 lm   2700 K | 1007644   | 65.00 |
| ● black<br>750 lm   3000 K | 1007646   | 65.00 |
| ● black<br>760 lm   4000 K | 1007648   | 65.00 |
| ○ white<br>740 lm   2700 K | 1007645   | 65.00 |
| ○ white<br>750 lm   3000 K | 1007647   | 65.00 |
| ○ white<br>760 lm   4000 K | 1007649   | 65.00 |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007355   | 78.00 |
| ○ white | 1007356   | 78.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Decorative ring |           |      |
| ● black         | 1008482   | 6.00 |
| ○ white         | 1008483   | 6.00 |
| ● gold          | 1008484   | 6.00 |
| ● grey          | 1008485   | 6.00 |
| ● bronze        | 1008486   | 6.00 |
| ● copper        | 1008487   | 6.00 |




| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Decorative ring |           |      |
| ● black         | 1008482   | 6.00 |
| ○ white         | 1008483   | 6.00 |
| ● gold          | 1008484   | 6.00 |
| ● grey          | 1008485   | 6.00 |
| ● bronze        | 1008486   | 6.00 |
| ● copper        | 1008487   | 6.00 |

## EURO CUBE 2 M

### 3-PHASE, PHASE



NEW




220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: Aluminium/Plastic PC

## EURO CUBE 2 M

### 3-PHASE, DALI



NEW



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: Aluminium/Plastic PC

## EURO CUBE 2 M

### HONEYCOMB



NEW

Ø: 8.9 cm  
H: 2.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1010856   | 13.00 |



|         |        |         |
|---------|--------|---------|
| 1010840 | Direct | 3000 K  |
| 1010842 | Direct | 1650 lm |
| 1010841 | Direct | 4000 K  |
| 1010843 | Direct | 1700 lm |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black<br>1650 lm   3000 K       | 1010842   | 147.00 |
| ● black<br>1700 lm   4000 K       | 1010843   | 147.00 |
| ○ white/black<br>1650 lm   3000 K | 1010840   | 147.00 |
| ○ white/black<br>1700 lm   4000 K | 1010841   | 147.00 |



|         |        |         |
|---------|--------|---------|
| 1010845 | Direct | 4000 K  |
| 1010847 | Direct | 1700 lm |
| 1010844 | Direct | 3000 K  |
| 1010846 | Direct | 1650 lm |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black<br>1650 lm   3000 K       | 1010846   | 172.00 |
| ● black<br>1700 lm   4000 K       | 1010847   | 172.00 |
| ○ white/black<br>1650 lm   3000 K | 1010844   | 172.00 |
| ○ white/black<br>1700 lm   4000 K | 1010845   | 172.00 |

## EURO CUBE 2 M

### OVAL FILTER



NEW

Ø: 8.9 cm  
H: 2.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1010857   | 17.00 |




| Product     | Prod. no. | GBP   |
|-------------|-----------|-------|
| Honeycomb   |           |       |
| ● black     | 1010856   | 13.00 |
| Oval filter |           |       |
| ○ white     | 1010857   | 17.00 |



| Product     | Prod. no. | GBP   |
|-------------|-----------|-------|
| Honeycomb   |           |       |
| ● black     | 1010856   | 13.00 |
| Oval filter |           |       |
| ○ white     | 1010857   | 17.00 |




## EURO CUBE 2 L 3-PHASE, PHASE



220-240 V ~50/60 Hz | 550 mA  
Total wattage: 21 W  
Material: Aluminium/Plastic PC

## EURO CUBE 2 L 3-PHASE, DALI



220-240 V ~50/60 Hz | 550 mA  
Total wattage: 21 W  
Material: Aluminium/Plastic PC

## EURO CUBE 2 L HONEYCOMB



Ø: 10.6 cm  
H: 3 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1010858   | 17.00 |



|         |      |         |
|---------|------|---------|
| 1010849 | Down | 4000 K  |
| 1010851 |      | 2800 lm |
| 1010848 | Down | 3000 K  |
| 1010850 |      | 2750 lm |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black<br>2750 lm   3000 K       | 1010850   | 163.00 |
| ● black<br>2800 lm   4000 K       | 1010851   | 163.00 |
| ○ white/black<br>2750 lm   3000 K | 1010848   | 163.00 |
| ○ white/black<br>2800 lm   4000 K | 1010849   | 163.00 |



|         |        |         |
|---------|--------|---------|
| 1010853 | Direct | 4000 K  |
| 1010855 |        | 2800 lm |
| 1010852 | Direct | 3000 K  |
| 1010854 |        | 2750 lm |

| Variant                           | Prod. no. | GBP    |
|-----------------------------------|-----------|--------|
| ● black<br>2750 lm   3000 K       | 1010854   | 189.00 |
| ● black<br>2800 lm   4000 K       | 1010855   | 189.00 |
| ○ white/black<br>2750 lm   3000 K | 1010852   | 189.00 |
| ○ white/black<br>2800 lm   4000 K | 1010853   | 189.00 |

## EURO CUBE 2 L OVAL FILTER



Ø: 10.6 cm  
H: 3 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1010859   | 21.00 |



| Product     | Prod. no. | GBP   |
|-------------|-----------|-------|
| Honeycomb   |           |       |
| ● black     | 1010858   | 17.00 |
| Oval filter |           |       |
| ○ white     | 1010859   | 21.00 |



| Product     | Prod. no. | GBP   |
|-------------|-----------|-------|
| Honeycomb   |           |       |
| ● black     | 1010858   | 17.00 |
| Oval filter |           |       |
| ○ white     | 1010859   | 21.00 |



1010246


589





## KALU 2.0

### 3-PHASE, PHASE




220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: Aluminium

- Discover more lenses and decorative rings in the accessories section

## KALU 2.0

### 3-PHASE, DALI




220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: Aluminium

- Discover more lenses and decorative rings in the accessories section
- Intrack LED driver adapter

## KALU TRACK

### 3-PHASE, QPAR111



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic



|         |      |         |
|---------|------|---------|
| 1010246 | Down | 4000 K  |
| 1010248 |      | 1500 lm |
| 1010240 | Down | 3000 K  |
| 1010242 |      | 1450 lm |
| 1010234 | Down | 2700 K  |
| 1010236 |      | 1400 lm |

| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ● black<br>1400 lm   2700 K | 1010234   | 110.00 |
| ● black<br>1450 lm   3000 K | 1010240   | 110.00 |
| ● black<br>1500 lm   4000 K | 1010246   | 110.00 |
| ○ white<br>1400 lm   2700 K | 1010236   | 110.00 |
| ○ white<br>1450 lm   3000 K | 1010242   | 110.00 |
| ○ white<br>1500 lm   4000 K | 1010248   | 110.00 |



| Product                   | Prod. no. | GBP   |
|---------------------------|-----------|-------|
| KALU 2.0, decorative ring |           |       |
| ○ white                   | 1010135   | 8.00  |
| ● black                   | 1010136   | 8.00  |
| ● gold                    | 1010138   | 8.00  |
| ● copper                  | 1010139   | 8.00  |
| KALU 2.0, lens            |           |       |
| ○ transparent   15°       | 1010140   | 17.00 |
| ○ transparent   24°       | 1010141   | 17.00 |
| ○ transparent   36°       | 1010142   | 17.00 |
| ○ transparent   60°       | 1010143   | 17.00 |



|         |      |         |
|---------|------|---------|
| 1010249 | Down | 4000 K  |
| 1010251 |      | 1500 lm |
| 1010243 | Down | 3000 K  |
| 1010245 |      | 1450 lm |
| 1010237 | Down | 2700 K  |
| 1010239 |      | 1400 lm |

| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ● black<br>1400 lm   2700 K | 1010237   | 151.00 |
| ● black<br>1450 lm   3000 K | 1010243   | 151.00 |
| ● black<br>1500 lm   4000 K | 1010249   | 151.00 |
| ○ white<br>1400 lm   2700 K | 1010239   | 151.00 |
| ○ white<br>1450 lm   3000 K | 1010245   | 151.00 |
| ○ white<br>1500 lm   4000 K | 1010251   | 151.00 |



| Product                   | Prod. no. | GBP   |
|---------------------------|-----------|-------|
| KALU 2.0, decorative ring |           |       |
| ○ white                   | 1010135   | 8.00  |
| ● black                   | 1010136   | 8.00  |
| ● gold                    | 1010138   | 8.00  |
| ● copper                  | 1010139   | 8.00  |
| KALU 2.0, lens            |           |       |
| ○ transparent   15°       | 1010140   | 17.00 |
| ○ transparent   24°       | 1010141   | 17.00 |
| ○ transparent   36°       | 1010142   | 17.00 |
| ○ transparent   60°       | 1010143   | 17.00 |



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 152610    | 78.00 |
| ○ white | 152611    | 78.00 |




GU10 | 12 W | 55°  
670 lm | 2700 K | EEC = G




Prod. no.: 1005297 73.00 GBP

SIGHT EVO 600  
3-PHASE, SINGLE





220-240 V ~50/60 Hz | 500 mA  
Total wattage: 18 W  
Material: Aluminium/Plastic PC

SIGHT EVO 1200  
3-PHASE, SINGLE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 25 W  
Material: Aluminium/Plastic PC

SIGHT EVO 600  
3-PHASE, DOUBLE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 25 W  
Material: Aluminium/Plastic PC



|         |         |
|---------|---------|
| 1010144 | 3000 K  |
| 1010146 | 2250 lm |
| 1010145 | 4000 K  |
| 1010147 | 2250 lm |

| Variant              | Prod. no. | GBP    |
|----------------------|-----------|--------|
| ● black 3000 K       | 1010146   | 155.00 |
| ● black 4000 K       | 1010147   | 155.00 |
| ● white/black 3000 K | 1010144   | 155.00 |
| ● white/black 4000 K | 1010145   | 155.00 |



|         |         |
|---------|---------|
| 1010148 | 3000 K  |
| 1010150 | 3200 lm |
| 1010149 | 4000 K  |
| 1010151 | 3200 lm |

| Variant              | Prod. no. | GBP    |
|----------------------|-----------|--------|
| ● black 3000 K       | 1010150   | 210.00 |
| ● black 4000 K       | 1010151   | 210.00 |
| ● white/black 3000 K | 1010148   | 210.00 |
| ● white/black 4000 K | 1010149   | 210.00 |



|         |         |
|---------|---------|
| 1010152 | 3000 K  |
| 1010154 | 3250 lm |
| 1010153 | 4000 K  |
| 1010155 | 3350 lm |


| Variant                        | Prod. no. | GBP    |
|--------------------------------|-----------|--------|
| ● black 3250 lm   3000 K       | 1010154   | 218.00 |
| ● black 3350 lm   4000 K       | 1010155   | 218.00 |
| ● white/black 3250 lm   3000 K | 1010152   | 218.00 |
| ● white/black 3350 lm   4000 K | 1010153   | 218.00 |





## SIGHT EVO 600


### 3-PHASE, SINGLE DALI

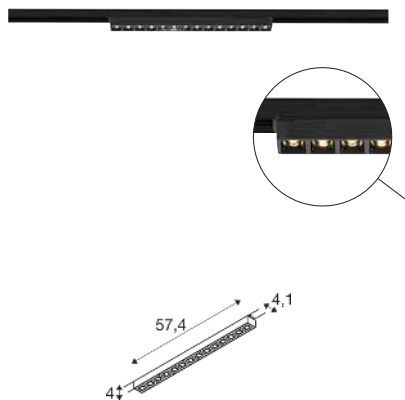

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 18 W  
Material: Aluminium/Plastic PC

## SIGHT EVO 1200


### 3-PHASE, SINGLE DALI

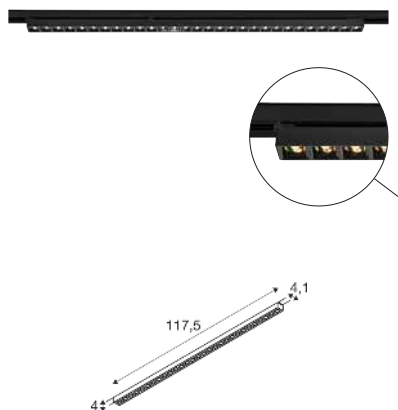

220-240 V ~50/60 Hz | 700 mA  
Total wattage: 25 W  
Material: Aluminium/Plastic PC

## SIGHT EVO 600

### 3-PHASE, DOUBLE DALI

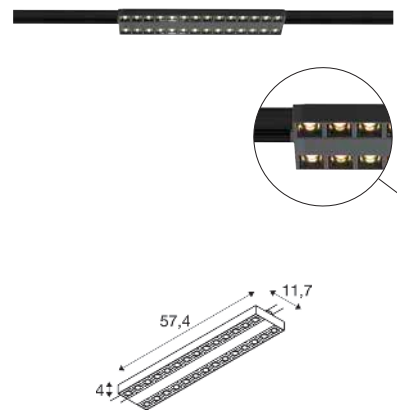

220-240 V ~50/60 Hz | 700 mA  
Total wattage: 25 W  
Material: Aluminium/Plastic PC



|         |         |
|---------|---------|
| 1010156 | 3000 K  |
| 1010158 | 2250 lm |
| 1010157 | 4000 K  |
| 1010159 | 2250 lm |

| Variant              | Prod. no. | GBP    |
|----------------------|-----------|--------|
| ● black 3000 K       | 1010158   | 172.00 |
| ● black 4000 K       | 1010159   | 172.00 |
| ● white/black 3000 K | 1010156   | 172.00 |
| ● white/black 4000 K | 1010157   | 172.00 |



|         |         |
|---------|---------|
| 1010381 | 3000 K  |
| 1010383 | 3200 lm |
| 1010382 | 4000 K  |
| 1010384 | 3200 lm |


| Variant              | Prod. no. | GBP    |
|----------------------|-----------|--------|
| ● black 3000 K       | 1010383   | 235.00 |
| ● black 4000 K       | 1010384   | 235.00 |
| ● white/black 3000 K | 1010381   | 235.00 |
| ● white/black 4000 K | 1010382   | 235.00 |



|         |         |
|---------|---------|
| 1010385 | 3000 K  |
| 1010387 | 3250 lm |
| 1010386 | 4000 K  |
| 1010388 | 3350 lm |


| Variant                        | Prod. no. | GBP    |
|--------------------------------|-----------|--------|
| ● black 3250 lm   3000 K       | 1010387   | 243.00 |
| ● black 3350 lm   4000 K       | 1010388   | 243.00 |
| ● white/black 3250 lm   3000 K | 1010385   | 243.00 |
| ● white/black 3350 lm   4000 K | 1010386   | 243.00 |

## SIGHT PANEL 3-PHASE

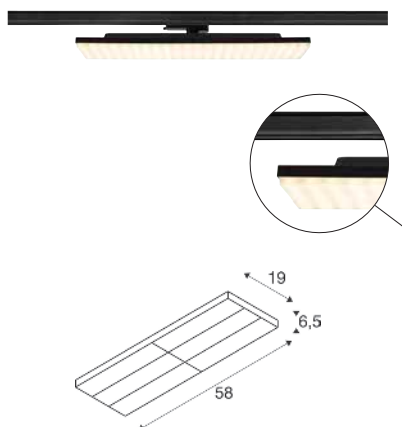

220-240 V ~50/60 Hz | 210/260/310/380 mA  
Total wattage: 38 / 48 / 58 / 72 W

## SIGHT PANEL 3-PHASE, DALI

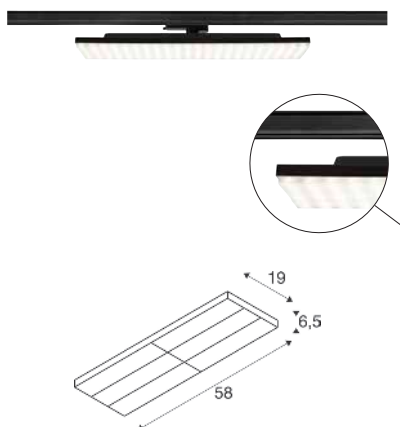

220-240 V ~50/60 Hz | 330 mA  
Total wattage: 65 W



|                    |      |                    |
|--------------------|------|--------------------|
| 1009146<br>1009147 | 38 W | 3000 K<br>6300 lm  |
|                    | 48 W | 3000 K<br>7700 lm  |
|                    | 58 W | 3000 K<br>9000 lm  |
|                    | 72 W | 3000 K<br>10800 lm |
| 1009148<br>1009149 | 38 W | 4000 K<br>6500 lm  |
|                    | 48 W | 4000 K<br>7950 lm  |
|                    | 58 W | 4000 K<br>9350 lm  |
|                    | 72 W | 4000 K<br>11350 lm |

| Variant                     | Prod. no.      | GBP           |
|-----------------------------|----------------|---------------|
| ● black<br>6300 lm   3000 K | <b>1009146</b> | <b>212.00</b> |
| ● black<br>6500 lm   4000 K | <b>1009148</b> | <b>212.00</b> |
| ○ white<br>6300 lm   3000 K | <b>1009147</b> | <b>212.00</b> |
| ○ white<br>6500 lm   4000 K | <b>1009149</b> | <b>212.00</b> |





|         |          |
|---------|----------|
| 1009152 | 4000 K   |
| 1009153 | 11600 lm |
| 1009150 | 3000 K   |
| 1009151 | 10100 lm |

| Variant                      | Prod. no.      | GBP           |
|------------------------------|----------------|---------------|
| ● black<br>10100 lm   3000 K | <b>1009150</b> | <b>285.00</b> |
| ● black<br>11600 lm   4000 K | <b>1009152</b> | <b>285.00</b> |
| ○ white<br>10100 lm   3000 K | <b>1009151</b> | <b>285.00</b> |
| ○ white<br>11600 lm   4000 K | <b>1009153</b> | <b>285.00</b> |



## SIGHT EASY 3-PHASE

## SIGHT EASY 3-PHASE, DALI

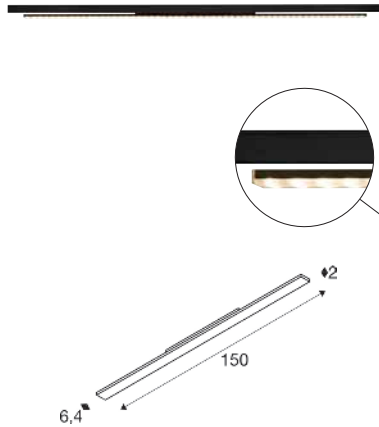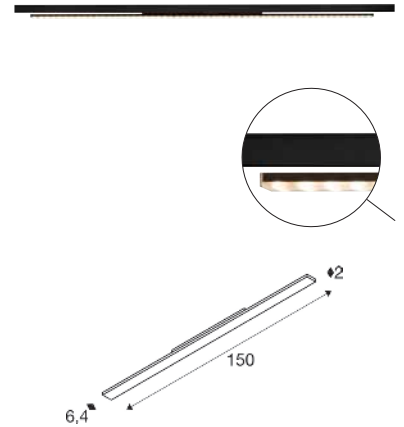

220-240 V ~50/60 Hz | 250 / 300 / 350 / 400 mA  
Total wattage: 41 / 49 / 58 / 66 W  
Material: Aluminium



220-240 V ~50/60 Hz | 250 / 300 / 350 / 400 mA  
Total wattage: 41 / 49 / 58 / 66 W  
Material: Aluminium



|                                  |      |                    |
|----------------------------------|------|--------------------|
|                                  | 41 W | 3000 K<br>6500 lm  |
|                                  | 49 W | 3000 K<br>7700 lm  |
| <b>1008676</b><br><b>1008677</b> | 58 W | 3000 K<br>9100 lm  |
|                                  | 66 W | 3000 K<br>10200 lm |
|                                  | 41 W | 4000 K<br>7100 lm  |
|                                  | 49 W | 4000 K<br>8200 lm  |
| <b>1008678</b><br><b>1008679</b> | 58 W | 4000 K<br>9600 lm  |
|                                  | 66 W | 4000 K<br>10900 lm |


| Variant                     | Prod. no.      | GBP           |
|-----------------------------|----------------|---------------|
| ● black<br>650 lm   3000 K  | <b>1008676</b> | <b>163.00</b> |
| ● black<br>2100 lm   4000 K | <b>1008678</b> | <b>163.00</b> |
| ○ white<br>650 lm   3000 K  | <b>1008677</b> | <b>163.00</b> |
| ○ white<br>2100 lm   4000 K | <b>1008679</b> | <b>163.00</b> |



|                                  |      |                    |
|----------------------------------|------|--------------------|
|                                  | 41 W | 3000 K<br>6500 lm  |
|                                  | 49 W | 3000 K<br>7700 lm  |
| <b>1008728</b><br><b>1008729</b> | 58 W | 3000 K<br>9100 lm  |
|                                  | 66 W | 3000 K<br>10200 lm |
|                                  | 41 W | 4000 K<br>7100 lm  |
|                                  | 49 W | 4000 K<br>8200 lm  |
| <b>1008730</b><br><b>1008731</b> | 58 W | 4000 K<br>9600 lm  |
|                                  | 66 W | 4000 K<br>10900 lm |

| Variant                     | Prod. no.      | GBP           |
|-----------------------------|----------------|---------------|
| ● black<br>650 lm   3000 K  | <b>1008728</b> | <b>201.00</b> |
| ● black<br>2100 lm   4000 K | <b>1008730</b> | <b>201.00</b> |
| ○ white<br>650 lm   3000 K  | <b>1008729</b> | <b>201.00</b> |
| ○ white<br>2100 lm   4000 K | <b>1008731</b> | <b>201.00</b> |

SIGHT TRACK  
3-PHASE, DALI




220-240 V ~50/60 Hz | 700 mA  
Total wattage: 39 W  
Material: Aluminium/Acrylic



|         |         |
|---------|---------|
| 3000 K  | 4000 K  |
| 3000 lm | 3000 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1005397   | 327.00 |
| ○ white | 1005399   | 327.00 |

SIGHT TRACK  
3-PHASE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 37 W  
Material: Aluminium/Acrylic



|         |         |
|---------|---------|
| 3000 K  | 4000 K  |
| 3000 lm | 3000 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1005400   | 268.00 |
| ○ white | 1005401   | 268.00 |
| ● grey  | 1005402   | 268.00 |





## SIGHT MOVE

### 3-PHASE, DALI

## SIGHT MOVE

### 3-PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 26 W  
Material: Aluminium/Polymethylmethacrylate (PMMA)



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 26 W  
Material: Aluminium/Polymethylmethacrylate (PMMA)



|         |         |
|---------|---------|
| 1004692 | 4000 K  |
| 1004693 | 3100 lm |
| 1004690 | 3000 K  |
| 1004691 | 2700 lm |



|         |         |
|---------|---------|
| 1004688 | 4000 K  |
| 1004689 | 3100 lm |
| 1004687 | 3000 K  |
|         | 2700 lm |

| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ● black<br>2700 lm   3000 K | 1004690   | 222.00 |
| ● black<br>3100 lm   4000 K | 1004692   | 222.00 |
| ○ white<br>2700 lm   3000 K | 1004691   | 222.00 |
| ○ white<br>3100 lm   4000 K | 1004693   | 222.00 |


| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ● black<br>2700 lm   3000 K | 1004686   | 159.00 |
| ● black<br>3100 lm   4000 K | 1004688   | 159.00 |
| ○ white<br>2700 lm   3000 K | 1004687   | 159.00 |
| ○ white<br>3100 lm   4000 K | 1004689   | 159.00 |



1008063 597

## PARA CONE 14

3-PHASE, GU10



220-240 V ~50/60 Hz  
Material: Steel



Base: 1xGU10

| Variant        | Prod. no. | GBP   |
|----------------|-----------|-------|
| ● black/gold   | 1008055   | 74.00 |
| ● white/gold   | 1008056   | 74.00 |
| ● copper/white | 1008057   | 77.00 |
| ● aluminium    | 1009139   | 74.00 |



GU10 | 3 W | 360°  
270 lm | 2700 K | EEC = G




Prod. no.: 1006321 42.00 GBP





## PARA CONE 14


3-PHASE, PD, GU10



220-240 V ~50/60 Hz  
Material: Steel

## PARA CONE GL


3-PHASE, GU10



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

## PARA CONE GL

PD, GU10



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

• Open cable end



Base: 1xGU10

| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/gold   | 1008061   | 100.00 |
| ○ white/gold   | 1008062   | 100.00 |
| ○ copper/white | 1008063   | 109.00 |
| ● aluminium    | 1009141   | 100.00 |



GU10 | 3 W | 360°  
270 lm | 2700 K | EEC = G



Prod. no.: 1006321 42.00 GBP



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006157   | 88.00 |
| ○ white | 1006158   | 88.00 |



GU10 | 3 W | 360°  
270 lm | 2700 K | EEC = G



Prod. no.: 1006321 42.00 GBP



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006159   | 73.00 |
| ○ white | 1006160   | 73.00 |



GU10 | 3 W | 360°  
270 lm | 2700 K | EEC = G



Prod. no.: 1006321 42.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP



| Product                         | Prod. no. | GBP   |
|---------------------------------|-----------|-------|
| Fitu   Single ceiling rosette   |           |       |
| ● black                         | 132600    | 23.00 |
| ○ white                         | 132601    | 23.00 |
| ● chrome                        | 132605    | 26.00 |
| 1-phase light adapter           |           |       |
| ● black                         | 143120    | 14.00 |
| ○ white                         | 143121    | 14.00 |
| ● grey                          | 143124    | 14.00 |
| 3-phase light adapter           |           |       |
| ● black                         | 145990    | 18.00 |
| ● grey                          | 145994    | 18.00 |
| ○ white                         | 1001542   | 18.00 |
| Recessed ceiling rosette        |           |       |
| ● black                         | 1004674   | 21.00 |
| ○ white                         | 1004675   | 21.00 |
| Surface-mounted ceiling rosette |           |       |
| ● black                         | 1004744   | 31.00 |


1008541 599





## FORCHINI M 40 TRACK

3-PHASE, PD, E27



220-240 V ~50/60 Hz  
Material: Steel/Aluminium



Base: 1xE27      max. Ø: 6.8 cm      L: 15.2 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1008541   | 201.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303      9.00 GBP



E27 | 9 W | 180°  
806 lm | 2700 K | EEC = F



Prod. no.: 1012471      14.00 GBP



1008177 601

## LIGHT EYE® 90

3-PHASE, PD, QPAR51



220-240 V ~50/60 Hz  
Material: Steel



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.35 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008170   | 73.00 |
| ○ white | 1008171   | 73.00 |



GU10 | 6W | 38°  
470 lm | 3000 K | EEC = F



Prod. no.: 1005080 7.00 GBP



| Product                  | Prod. no. | GBP   |
|--------------------------|-----------|-------|
| Decorative ring Ø 5.7 cm |           |       |
| ● black                  | 1008186   | 8.00  |
| ○ white                  | 1008187   | 8.00  |
| ● gold                   | 1008188   | 13.00 |
| ● chrome                 | 151049    | 13.00 |



## LIGHT EYE® 150


3-PHASE, PD, QPAR111



220-240 V ~50/60 Hz  
Material: Steel

## LIGHT EYE® 150

3-PHASE, QPAR111

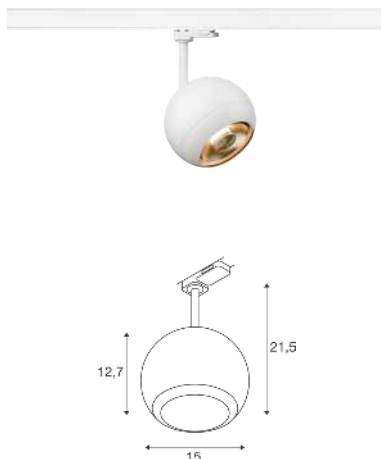

220-240 V ~50/60 Hz  
Material: Steel

## LIGHT EYE® 90

DECORATIVE RING Ø 5.7 CM



Ø: 5.9 cm  
H: 1.4 cm  
Material: Steel

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1008186   | 8.00  |
| ○ white  | 1008187   | 8.00  |
| ● gold   | 1008188   | 13.00 |
| ● chrome | 151049    | 13.00 |



Base: 1xGU10 max. Ø: 11.1 cm | L: 7 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008176   | 113.00 |
| ○ white | 1008177   | 113.00 |



GU10 | 12 W | 55°  
680 lm | 3000 K | EEC = G



Prod. no.: 1005298 73.00 GBP



Base: 1xGU10 max. Ø: 11.1 cm | L: 7 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008184   | 113.00 |
| ○ white | 1008185   | 113.00 |



GU10 | 12 W | 55°  
680 lm | 3000 K | EEC = G



Prod. no.: 1005298 73.00 GBP

## LIGHT EYE® 150

DECORATIVE RING Ø 13.6 CM



Ø: 13.6 cm  
H: 2.3 cm  
Material: Steel

| Variant  | Prod. no. | GBP   |
|----------|-----------|-------|
| ● black  | 1008189   | 31.00 |
| ○ white  | 1008190   | 31.00 |
| ● gold   | 1008192   | 39.00 |
| ● chrome | 1008191   | 39.00 |



| Product                   | Prod. no. | GBP   |
|---------------------------|-----------|-------|
| Decorative ring Ø 13.6 cm |           |       |
| ● black                   | 1008189   | 31.00 |
| ○ white                   | 1008190   | 31.00 |
| ● chrome                  | 1008191   | 39.00 |
| ● gold                    | 1008192   | 39.00 |



| Product                   | Prod. no. | GBP   |
|---------------------------|-----------|-------|
| Decorative ring Ø 13.6 cm |           |       |
| ● black                   | 1008189   | 31.00 |
| ○ white                   | 1008190   | 31.00 |
| ● chrome                  | 1008191   | 39.00 |
| ● gold                    | 1008192   | 39.00 |











## EURO SPOT TRACK

### 3-PHASE, QPAR111

## EURO SPOT TRACK

### 3-PHASE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 153420    | 91.00 |
| ○ white | 153421    | 91.00 |



Base: 1xGU10

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 153850    | 73.00 |
| ○ white | 153851    | 73.00 |



GU10 | 13 W | 10°  
900 lm | 2700 K | EEC = G



Prod. no.: 1005275 48.00 GBP



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5 W | 45°  
350 lm | 2700 K-6500 K | EEC = F



Prod. no.: 1012469 23.00 GBP


152961 605





# HELIA 50 TRACK

3-PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: Aluminium



|        |        |
|--------|--------|
|        | 3000 K |
| 152960 | 920 lm |
|        | 3000 K |
| 152961 | 970 lm |

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● black<br>920 lm | 152960    | 79.00 |
| ○ white<br>970 lm | 152961    | 79.00 |





# PROFILES AND LED STRIPS

## SETS



LED STRIP SETS –  
LED STRIP S + DRIVER | 612



PROFILE SETS –  
S SURFACE-MOUNTED PROFILE + DIFFUSER | 613

## LED STRIPS



COB LED STRIPS | 614



SMD LED STRIPS | 615



COB LED STRIPS | 616



SMD LED STRIPS | 617



LED STRIPS COB  
TW & RGBW | 618



LED STRIPS SMD  
TW & RGBW | 619



LED STRIPS COB IP67 |  
620



LED STRIPS SMD IP67 |  
621



COB LED STRIPS | 622




SMD LED STRIPS | 623



ACCESSORIES |  
624–625

## PROFILES




PROFILE SETS  
AND ACCESSORIES |  
626–627



PROFILE SETS  
AND ACCESSORIES |  
628–629




PROFILE SETS  
AND ACCESSORIES |  
630–631



RECESSED PROFILE  
AND ACCESSORIES |  
632

# THE NEW LED STRIP SYSTEM

The new LED strip system makes selection, planning and installation easier. Thanks to the standardised sizing system, LED strips, profiles and accessories can be combined quickly and intuitively.

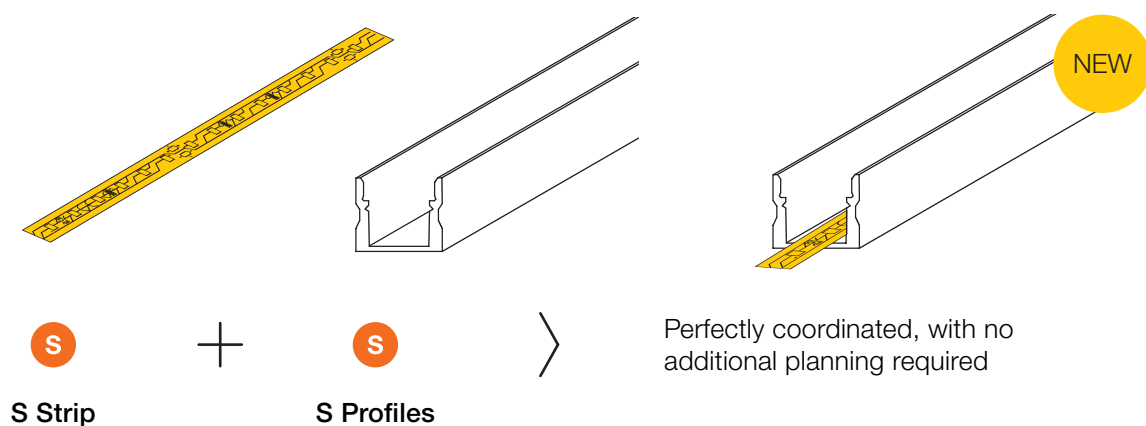



## SIZES AND APPLICATIONS

| Size      | LED STRIP width | Internal width of the profile | Typical application                                                          |
|-----------|-----------------|-------------------------------|------------------------------------------------------------------------------|
| <b>XS</b> | 5 mm            | 8–10 mm                       | Furniture, shelving, display cabinets and accent lighting                    |
| <b>S</b>  | 8–12 mm         | 12–14 mm                      | Living spaces, direct and indirect lighting                                  |
| <b>M</b>  | 15–18 mm        | 20 mm                         | High-performance lighting for indirect lighting schemes and general lighting |
| <b>L</b>  | –               | 40 mm                         | Architectural lighting, extra-wide light lines and special applications      |




# PROFILES FOR EVERY APPLICATION


## Surface-mounted

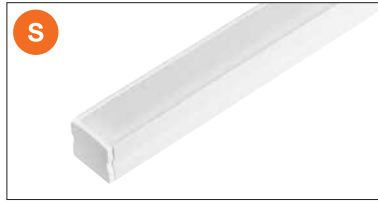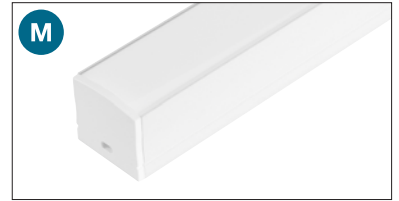


## Surface-mounted, flat

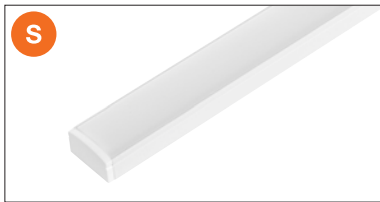


## Recessed

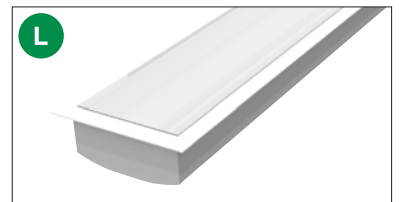


## Recessed, corner

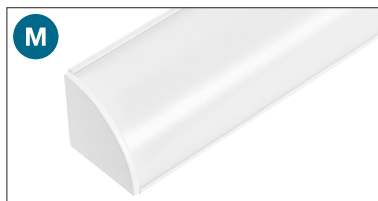

## Tiles

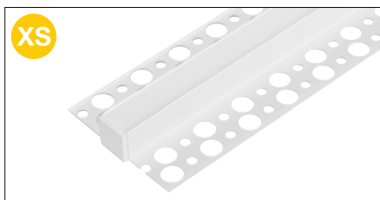

## Plaster

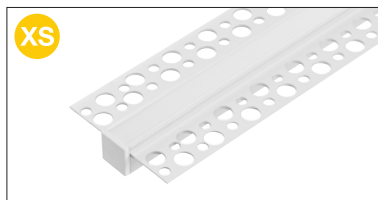

SLV profiles are supplied with accessories such as end caps, covers and mounting clips. This reduces the effort involved in placing orders and simplifies planning.



Accessories  
included

# SOPHISTICATED TECHNOLOGY

## COB OR SMD – THE CHOICE IS YOURS

COB strips produce a uniform light pattern with no visible light spots. SMD strips offer high efficiency and light output for a wide range of applications.


|                           | COB                                                                     | SMD                                          |
|---------------------------|-------------------------------------------------------------------------|----------------------------------------------|
| Light pattern             | Continuous light line                                                   | Visible LED dots                             |
| Light output & efficiency | High                                                                    | Very high                                    |
| Key strength              | A uniform and high-quality lighting effect                              | High light efficiency and cost-effectiveness |
| Typical application       | Visible light lines, indirect lighting, sophisticated lighting concepts | High-efficiency general and task lighting    |

## EASY PLANNING

All SLV profiles are supplied with the necessary accessories, such as end caps and mounting clips. In addition, pre-configured sets simplify planning, ordering and installation.

### PROFILE SETS

Pre-configured sets comprising profiles, end caps, covers and mounting clips.

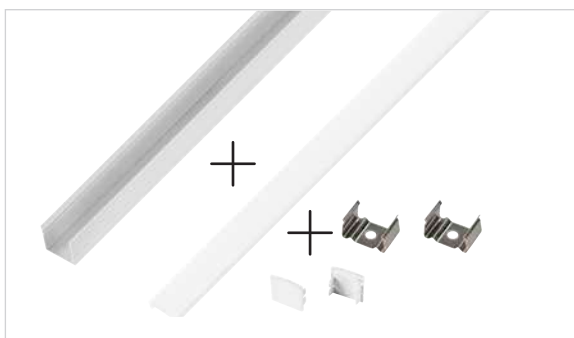

### STRIP SETS

Pre-configured sets comprising LED strips, drivers and connecting components.






EASY TO  
INSTALL


## QUICK CABLING

All LED strips are supplied with exposed cable ends at both ends. For static white lighting, plug-in and HUB solutions enable a quick connection between the driver and the LED strip – with no soldering required.

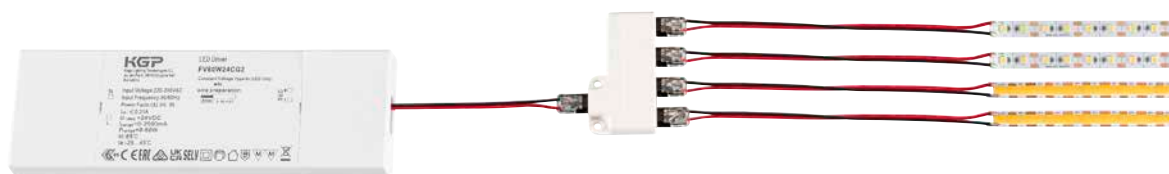

## FLEXIBLE CONNECTION SOLUTIONS

A range of connectors makes it easier to create customised strip layouts. A suitable accessory kit is available for IP67 strips, enabling the connectors and connection points to comply with the IP67 standard.

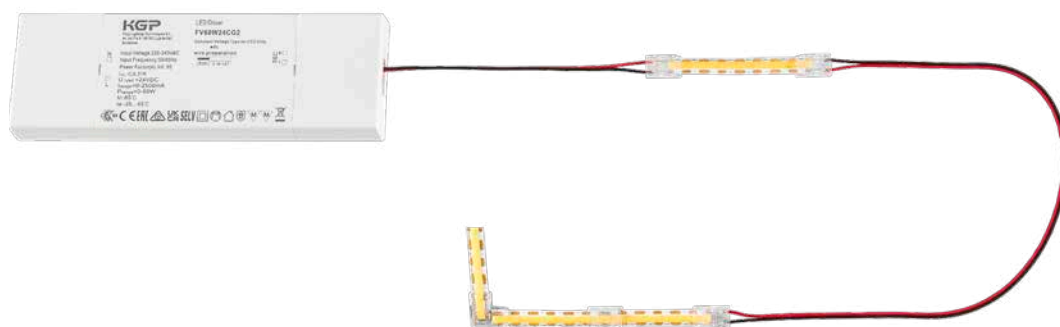




# LED STRIP SETS

## LED STRIP S + DRIVER

L: 500 cm  
SDMC: 3

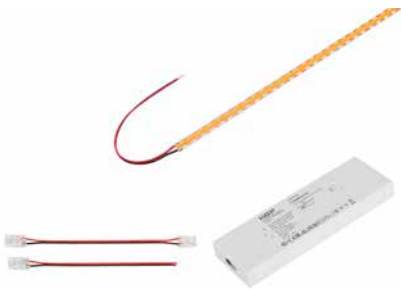

\* The stated value applies only to the first metre of the LED strip.

| Variant                                              | lm/m* | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP    |
|------------------------------------------------------|-------|------|--------------------|--------|-------|---------------------|-----------|--------|
| LED STRIP SET<br>STRIP COB +<br>DRIVER   S           | 880   | 9.5  | 2700 K             | 0.8 cm | 480   | 0.83 cm             | 1012464   | 105.00 |
|                                                      | 950   |      | 3000 K             |        |       |                     | 1012465   |        |
|                                                      | 980   |      | 4000 K             |        |       |                     | 1012466   |        |
| LED STRIP SET<br>IP67 STRIP COB +<br>IP67 DRIVER   S | 850   | 9.5  | 3000 K             | 1 cm   | 480   | 0.83 cm             | 1012467   | 138.00 |
| LED STRIP SET<br>STRIP SMD +<br>DRIVER   S           | 1110  | 9    | 2700 K             | 0.8 cm | 100   | 1 cm                | 1012474   | 96.00  |
|                                                      | 1150  |      | 3000 K             |        |       |                     | 1012475   |        |
|                                                      | 1170  |      | 4000 K             |        |       |                     | 1012476   |        |
| LED STRIP SET<br>IP67 STRIP SMD +<br>IP67 DRIVER   S | 1060  | 9    | 3000 K             | 1 cm   | 160   | 5 cm                | 1012473   | 130.00 |





# PROFILE SETS

## SURFACE-MOUNTED PROFILE S + DIFFUSER




NEW



Set contents: 5 x 1 m profiles, 10 x end caps, 10 x mounting clips,  
5 x 1 m diffusers

| Variant                                              | Size | Length     | Colour  | Prod. no. | GBP   |
|------------------------------------------------------|------|------------|---------|-----------|-------|
| LED STRIP SET PROFIL<br>SURFACE+ DIFFUSER 5*1M       | S    | 5 x 100 cm | ● Black | 1012477   | 61.00 |
| LED STRIP SET PROFIL<br>SURFACE+ DIFFUSER 5*1M       | S    | 5 x 100 cm | ○ White | 1012478   | 61.00 |
| LED STRIP SET PROFILE<br>SURFACE FLAT+ DIFFUSER 5*1M | S    | 5 x 100 cm | ● Black | 1012479   | 52.00 |
| LED STRIP SET PROFILE<br>SURFACE FLAT+ DIFFUSER 5*1M | S    | 5 x 100 cm | ○ White | 1012480   | 52.00 |

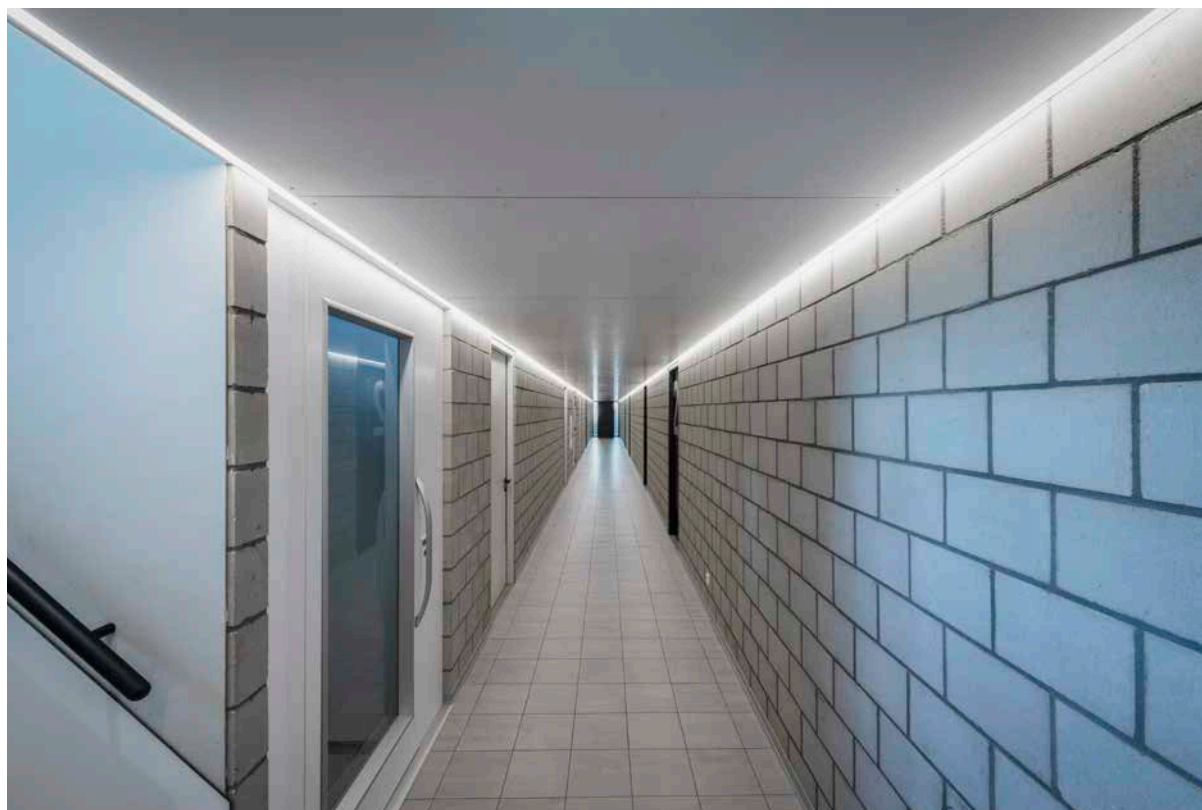



# COB LED STRIPS

## LED STRIP COB | XS

L: 500 cm  
SDCM: 3



\* The stated value applies only to the first metre of the LED strip.

|  | lm/m* | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP   |
|--|-------|------|--------------------|--------|-------|---------------------|-----------|-------|
|  | 480   | 5.4  | 2700 K             | 0.5 cm | 480   | 0.83 cm             | 1012239   | 56.00 |
|  | 480   |      | 3000 K             |        |       |                     | 1012240   |       |
|  | 510   |      | 4000 K             |        |       |                     | 1012241   |       |



|             |                                                     |                                                  |                                                     |                                                   |
|-------------|-----------------------------------------------------|--------------------------------------------------|-----------------------------------------------------|---------------------------------------------------|
| Accessories | LED STRIP CONNECTOR <sup>2</sup><br>COB   FEEDER XS | LED STRIP CONNECTOR <sup>2</sup><br>COB   90° XS | LED STRIP CONNECTOR <sup>2</sup><br>COB   DIRECT XS | LED STRIP CONNECTOR <sup>2</sup><br>COB   WIRE XS |
| Prod. no.   | 1012283                                             | 1012298                                          | 1012293                                             | 1012288                                           |
| GBP         | 7.00                                                | 10.00                                            | 8.00                                                | 12.00                                             |





# SMD LED STRIPS

## LED STRIP SMD | XS

L: 500 cm  
SDCM: 3

NEW



\* The stated value applies only to the first metre of the LED strip.



|                                                                                   | lm/m* | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP   |
|-----------------------------------------------------------------------------------|-------|------|--------------------|--------|-------|---------------------|-----------|-------|
|  | 500   | 4.8  | 2700 K             | 0.5 cm | 140   | 5 cm                | 1012259   | 43.00 |
|                                                                                   | 510   |      | 3000 K             |        |       |                     | 1012260   |       |
|                                                                                   | 520   |      | 4000 K             |        |       |                     | 1012261   |       |



### Accessories

Prod. no.

GBP

| LED STRIP CONNECTOR <sup>2</sup><br>SMD   FEEDER XS | LED STRIP CONNECTOR <sup>2</sup><br>SMD   90° XS | LED STRIP CONNECTOR <sup>2</sup><br>SMD   DIRECT XS | LED STRIP CONNECTOR <sup>2</sup><br>SMD   WIRE XS |
|-----------------------------------------------------|--------------------------------------------------|-----------------------------------------------------|---------------------------------------------------|
| 1012304                                             | 1012319                                          | 1012314                                             | 1012309                                           |
| 7.00                                                | 7.00                                             | 6.00                                                | 11.00                                             |

<sup>2</sup> Packaging unit: 5 pieces



# COB LED STRIPS

## LED STRIP COB | S

L: 500 cm  
SDCM: 3



\* The stated value applies only to the first metre of the LED strip.

|  | lm/m* | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP   |
|--|-------|------|--------------------|--------|-------|---------------------|-----------|-------|
|  | 880   | 9.5  | 2700 K             | 0.8 cm | 480   | 0.83 cm             | 1012242   | 60.00 |
|  | 950   |      | 3000 K             |        |       |                     | 1012243   |       |
|  | 980   |      | 4000 K             |        |       |                     | 1012244   |       |
|  | 1370  | 12   | 2700 K             | 0.8 cm | 480   | 0.83 cm             | 1012245   | 77.00 |
|  | 1350  |      | 3000 K             |        |       |                     | 1012246   |       |
|  | 1600  |      | 4000 K             |        |       |                     | 1012247   |       |



|             |                                                    |                                                  |                                                    |                                                 |
|-------------|----------------------------------------------------|--------------------------------------------------|----------------------------------------------------|-------------------------------------------------|
| Accessories | LED STRIP CONNECTOR <sup>2</sup><br>COB   FEEDER S | LED STRIP CONNECTOR <sup>2</sup><br>COB   WIRE S | LED STRIP CONNECTOR <sup>2</sup><br>COB   DIRECT S | LED STRIP CONNECTOR <sup>2</sup><br>COB   90° S |
| Prod. no.   | 1012284                                            | 1012289                                          | 1012294                                            | 1012299                                         |
| GBP         | 8.00                                               | 13.00                                            | 8.00                                               | 10.00                                           |



# SMD LED STRIPS

## LED STRIP SMD | S

L: 500 cm  
SDCM: 3



NEW



\* The stated value applies only to the first metre of the LED strip.

|                                                                                     | lm/m* | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP   |
|-------------------------------------------------------------------------------------|-------|------|--------------------|--------|-------|---------------------|-----------|-------|
|    | 1000  | 9    | 2700 K             | 0.8 cm | 100   | 1 cm                | 1012262   | 42.00 |
|                                                                                     | 1050  |      | 3000 K             |        |       |                     | 1012263   |       |
|                                                                                     | 1100  |      | 4000 K             |        |       |                     | 1012264   |       |
|   | 1600  | 13.5 | 2700 K             | 0.8 cm | 160   | 1.25 cm             | 1012265   | 57.00 |
|                                                                                     | 1650  |      | 3000 K             |        |       |                     | 1012266   |       |
|                                                                                     | 1760  |      | 4000 K             |        |       |                     | 1012267   |       |
|  | 1900  | 15.2 | 2700 K             | 1 cm   | 160   | 5 cm                | 1012268   | 77.00 |
|                                                                                     | 2000  |      | 3000 K             |        |       |                     | 1012269   |       |
|                                                                                     | 2100  |      | 4000 K             |        |       |                     | 1012270   |       |



Accessories

Prod. no.

GBP

LED STRIP CONNECTOR<sup>2</sup>  
SMD | FEEDER S 8MM

1012305

8.00

LED STRIP CONNECTOR<sup>2</sup>  
SMD | WIRE S 8MM

1012310

12.00

LED STRIP CONNECTOR<sup>2</sup>  
SMD | DIRECT S 8MM

1012315

7.00

LED STRIP CONNECTOR<sup>2</sup>  
SMD | 90° S 8MM

1012320

8.00

Accessories

Prod. no.

GBP

LED STRIP CONNECTOR<sup>2</sup>  
SMD | FEEDER S 10MM

1012306

8.00

LED STRIP CONNECTOR<sup>2</sup>  
SMD | WIRE S 10MM

1012311

12.00

LED STRIP CONNECTOR<sup>2</sup>  
SMD | DIRECT S 10MM

1012316

7.00

LED STRIP CONNECTOR<sup>2</sup>  
SMD | 90° S 10MM

1012321

8.00

<sup>2</sup> Packaging unit: 5 pieces



# LED STRIPS COB TW & RGBW

## LED STRIP COB TW | S


L: 500 cm  
SDCM: 5



NEW



\* The stated value applies only to the first metre of the LED strip.

|                                                                                  | lm/m*     | W/m* | Colour temperature | Width | LED/m | Separation distance | Prod. no.      | GBP          |
|----------------------------------------------------------------------------------|-----------|------|--------------------|-------|-------|---------------------|----------------|--------------|
|  | 800 / 900 | 14.4 | 2700 K / 6500 K    | 1 cm  | 640   | 2.5 cm              | <b>1012253</b> | <b>88.00</b> |

## LED STRIP COB RGBW | S

L: 500 cm  
SDCM: 5



NEW



\* The stated value applies only to the first metre of the LED strip.

|                                                                                    | lm/m*              | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no.      | GBP           |
|------------------------------------------------------------------------------------|--------------------|------|--------------------|--------|-------|---------------------|----------------|---------------|
|  | 440<br>700<br>1140 | 18.4 | 3000 K<br>RGB      | 1.2 cm | 672   | 8.3 cm              | <b>1012251</b> | <b>113.00</b> |



Accessories



Prod. no.

GBP

LED STRIP CONNECTOR<sup>2</sup>  
COB | FEEDER TW S

**1012287**

**13.00**

LED STRIP CONNECTOR<sup>2</sup>  
COB | DIRECT TW S

**1012297**

**11.00**

LED STRIP CONNECTOR<sup>2</sup>  
COB | WIRE TW S

**1012292**

**16.00**

Accessories



Prod. no.

GBP

LED STRIP CONNECTOR<sup>2</sup>  
COB | FEEDER RGBW S

**1012286**

**14.00**

LED STRIP CONNECTOR<sup>2</sup>  
COB | DIRECT RGBW S

**1012296**

**13.00**

LED STRIP CONNECTOR<sup>2</sup>  
COB | WIRE RGBW S

**1012291**

**18.00**



# LED STRIPS SMD TW & RGBW

## LED STRIP SMD TW | S



L: 500 cm  
SDCM: 3

NEW



\* The stated value applies only to the first metre of the LED strip.

|                                                                                   | lm/m*      | W/m* | Colour temperature | Width | LED/m | Separation distance | Prod. no.      | GBP          |
|-----------------------------------------------------------------------------------|------------|------|--------------------|-------|-------|---------------------|----------------|--------------|
|  | 930 / 1000 | 18   | 2700 K / 6500 K    | 1 cm  | 224   | 6.3 cm              | <b>1012277</b> | <b>88.00</b> |

## LED STRIP SMD RGBW | S



L: 500 cm  
SDCM: 3

NEW



\* The stated value applies only to the first metre of the LED strip.

|                                                                                     | lm/m* | W/m* | Colour temperature | Width | LED/m | Separation distance | Prod. no.      | GBP          |
|-------------------------------------------------------------------------------------|-------|------|--------------------|-------|-------|---------------------|----------------|--------------|
|  | 400   | 20   | 3000 K             | 1 cm  | 120   | 5 cm                | <b>1012275</b> | <b>88.00</b> |
|                                                                                     | 650   |      | RGB                |       |       |                     |                |              |
|                                                                                     | 1050  |      |                    |       |       |                     |                |              |



Accessories



Prod. no.

GBP

LED STRIP CONNECTOR<sup>2</sup>  
SMD | FEEDER TW S

**1012308**

**13.00**

LED STRIP CONNECTOR<sup>2</sup>  
SMD | 90° TW S

**1012323**

**16.00**

LED STRIP CONNECTOR<sup>2</sup>  
SMD | DIRECT TW S

**1012318**

**10.00**

LED STRIP CONNECTOR<sup>2</sup>  
SMD | WIRE TW S

**1012313**

**16.00**

Accessories



Prod. no.

GBP

LED STRIP CONNECTOR<sup>2</sup>  
SMD | FEEDER RGBW S

**1012307**

**14.00**

LED STRIP CONNECTOR<sup>2</sup>  
SMD | 90° RGBW S

**1012322**

**17.00**

LED STRIP CONNECTOR<sup>2</sup>  
SMD | DIRECT RGBW S

**1012317**

**11.00**

LED STRIP CONNECTOR<sup>2</sup>  
SMD | WIRE RGBW S

**1012312**

**17.00**

<sup>2</sup> Packaging unit: 5 pieces



# LED STRIPS COB IP67

## LED STRIP COB IP67 | S

L: 500 cm

SDCM: 3

Find the compatible sealing kit on page 653.



NEW



\* The stated value applies only to the first metre of the LED strip.

|  | lm/m* | W/m* | Colour temperature | Width | LED/m | Separation distance | Prod. no. | GBP   |
|--|-------|------|--------------------|-------|-------|---------------------|-----------|-------|
|  | 800   | 10   | 2700 K             | 1 cm  | 480   | 0.83 cm             | 1012255   | 77.00 |
|  | 900   |      | 3000 K             |       |       |                     | 1012256   |       |
|  | 1320  | 12   | 2700 K             |       |       |                     | 1012257   | 82.00 |
|  | 1400  |      | 3000 K             |       |       |                     | 1012258   |       |

## LED STRIP COB IP67 TW | S



L: 500 cm

SDCM: 5

Find the compatible sealing kit on page 653.



NEW



\* The stated value applies only to the first metre of the LED strip.

|  | lm/m*     | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP    |
|--|-----------|------|--------------------|--------|-------|---------------------|-----------|--------|
|  | 760 / 860 | 14.4 | 2700 K / 6500 K    | 1.2 cm | 640   | 2.5 cm              | 1012254   | 113.00 |

## LED STRIP COB IP67 RGBW | S



L: 500 cm

SDCM: 5

Find the compatible sealing kit on page 653.



NEW



\* The stated value applies only to the first metre of the LED strip.

|  | lm/m* | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP    |
|--|-------|------|--------------------|--------|-------|---------------------|-----------|--------|
|  | 1070  | 18   | 3000 K             | 1.4 cm | 672   | 8.3 cm              | 1012252   | 155.00 |





## LED STRIPS SMD IP67

### LED STRIP SMD IP67 | S

L: 500 cm

SDCM: 5

Find the compatible sealing kit on page 653.



NEW



\* The stated value applies only to the first metre of the LED strip.

|                                                                                   | lm/m* | W/m* | Colour temperature | Width | LED/m | Separation distance | Prod. no. | GBP   |
|-----------------------------------------------------------------------------------|-------|------|--------------------|-------|-------|---------------------|-----------|-------|
|  | 980   | 8.6  | 2700 K             | 1 cm  | 160   | 5 cm                | 1012279   | 69.00 |
|                                                                                   | 1000  |      | 3000 K             |       |       |                     | 1012280   |       |
|                                                                                   | 1650  | 15.5 | 2700 K             |       |       |                     | 1012281   | 73.00 |
|                                                                                   | 1750  |      | 3000 K             |       |       |                     | 1012282   |       |

### LED STRIP SMD TW | S



L: 500 cm

SDCM: 5

Find the compatible sealing kit on page 653.



NEW



\* The stated value applies only to the first metre of the LED strip.

|                                                                                     | lm/m*     | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP    |
|-------------------------------------------------------------------------------------|-----------|------|--------------------|--------|-------|---------------------|-----------|--------|
|  | 880 / 950 | 18   | 2700 K / 6500 K    | 1.2 cm | 224   | 6.3 cm              | 1012278   | 105.00 |

### LED STRIP SMD RGBW | S



L: 500 cm

SDCM: 5

Find the compatible sealing kit on page 653.



NEW



\* The stated value applies only to the first metre of the LED strip.


|                                                                                     | lm/m* | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP    |
|-------------------------------------------------------------------------------------|-------|------|--------------------|--------|-------|---------------------|-----------|--------|
|  | 1000  | 20   | 3000 K             | 1.2 cm | 120   | 5 cm                | 1012276   | 121.00 |



# COB LED STRIPS

## LED STRIP COB | M

L: 500 cm  
SDCM: 3

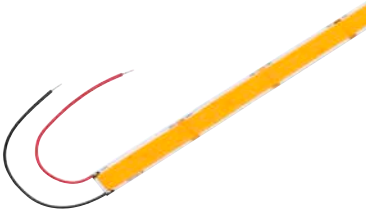

\* The stated value applies only to the first metre of the LED strip.

|  | lm/m* | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP    |
|--|-------|------|--------------------|--------|-------|---------------------|-----------|--------|
|  | 2700  | 25   | 2700 K             | 1.5 cm | 960   | 5 cm                | 1012248   | 130.00 |
|  | 2800  |      | 3000 K             |        |       |                     | 1012249   |        |
|  | 2800  |      | 4000 K             |        |       |                     | 1012250   |        |



# SMD LED STRIPS

## LED STRIP SMD | M

L: 500 cm  
SDCM: 3



\* The stated value applies only to the first metre of the LED strip.

|  | lm/m* | W/m* | Colour temperature | Width  | LED/m | Separation distance | Prod. no. | GBP    |
|--|-------|------|--------------------|--------|-------|---------------------|-----------|--------|
|  | 2400  | 20   | 2700 K             | 1.8 cm | 320   | 5 cm                | 1012272   | 113.00 |
|  | 2600  |      | 3000 K             |        |       |                     | 1012273   |        |
|  | 2650  |      | 4000 K             |        |       |                     | 1012274   |        |

## ⊕ ACCESSORIES

### COMPACT POWER SUPPLY | ON/OFF

|                                                                                   | Variant                       | Output | Length  | Width  | Height | Prod. no. | GBP   |
|-----------------------------------------------------------------------------------|-------------------------------|--------|---------|--------|--------|-----------|-------|
|  | LED POWER SUPPLY<br>24V   24W | 24 W   | 13.7 cm | 5 cm   | 1.6 cm | 1008653   | 34.00 |
|  | LED POWER SUPPLY<br>24V   36W | 36 W   | 17 cm   | 5.7 cm | 1.8 cm | 1008654   | 47.00 |
|  | LED POWER SUPPLY<br>24V   60W | 60 W   |         |        |        | 1008655   | 56.00 |

### COMPACT POWER SUPPLY | PHASE DIMMING

|                                                                                    | Variant                         | Output | Length  | Width  | Height | Prod. no. | GBP    |
|------------------------------------------------------------------------------------|---------------------------------|--------|---------|--------|--------|-----------|--------|
|   | POWER SUPPLY  <br>50W   24V     | 50 W   | 18.4 cm | 6.1 cm | 3.2 cm | 1003104   | 43.00  |
|   | POWER SUPPLY  <br>100W   24V DC | 100 W  | 21 cm   | 6.7 cm | 3.4 cm | 1003105   | 104.00 |
|  | LED POWER SUPPLY  <br>25W   24V | 25 W   | 12.8 cm | 5.2 cm | 3 cm   | 1006336   | 30.00  |

### SLIM POWER SUPPLY | ON/OFF

|                                                                                     | Variant                                                 | Output | Length | Width | Height | Prod. no. | GBP    |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|--------|--------|-------|--------|-----------|--------|
|  | LED POWER SUPPLY   30W  <br>24V DC INCL. STRAIN RELIEF  | 30 W   | 30 cm  | 3 cm  | 1.6 cm | 1007250   | 43.00  |
|  | LED POWER SUPPLY   100W  <br>24V DC INCL. STRAIN RELIEF | 100 W  | 35 cm  |       | 1.8 cm | 1007251   | 69.00  |
|  | LED POWER SUPPLY   150W  <br>24V DC INCL. STRAIN RELIEF | 150 W  |        |       |        | 1007252   | 86.00  |
|  | LED POWER SUPPLY   250W  <br>24V DC INCL. STRAIN RELIEF | 250 W  | 40 cm  | 4 cm  | 2.2 cm | 1007253   | 103.00 |

### SLIM POWER SUPPLY | DALI

|                                                                                     | Variant                                                                  | Output | Length | Width | Height | Prod. no. | GBP    |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------|--------|--------|-------|--------|-----------|--------|
|  | LED POWER SUPPLY   30W  <br>24V DC DALI DIMMABLE INCL.<br>STRAIN RELIEF  | 30 W   | 30 cm  | 3 cm  | 1.6 cm | 1007254   | 52.00  |
|  | LED POWER SUPPLY   100W  <br>24V DC DALI DIMMABLE INCL.<br>STRAIN RELIEF | 100 W  | 35 cm  |       | 1.8 cm | 1007255   | 95.00  |
|  | LED POWER SUPPLY   150W  <br>24V DC DALI DIMMABLE INCL.<br>STRAIN RELIEF | 150 W  |        |       |        | 1007256   | 121.00 |
|  | LED POWER SUPPLY   250W  <br>24V DC DALI DIMMABLE INCL.<br>STRAIN RELIEF | 250 W  | 40 cm  | 4 cm  | 2.2 cm | 1007257   | 138.00 |



## ROUND POWER SUPPLY

|                                                                                   | Variant                              | Output |  | Ø      | Height | Prod. no. | GBP   |
|-----------------------------------------------------------------------------------|--------------------------------------|--------|--|--------|--------|-----------|-------|
|  | LED POWER SUPPLY<br>24V   25W, ROUND | 25 W   |  | 5.5 cm | 2.5 cm | 1008652   | 23.00 |

## IP67 POWER SUPPLY

|                                                                                   | Variant                             | Output | Length  | Width  | Height | Prod. no. | GBP   |
|-----------------------------------------------------------------------------------|-------------------------------------|--------|---------|--------|--------|-----------|-------|
|  | LED POWER SUPPLY<br>24V   60W, IP67 | 60 W   | 16.5 cm | 4.5 cm | 3.2 cm | 1012605   | 55.00 |

## CONTROL UNITS

|                                                                                     | Variant                              | Output | Length  | Width  | Height | Prod. no. | GBP    |
|-------------------------------------------------------------------------------------|--------------------------------------|--------|---------|--------|--------|-----------|--------|
|    | CONTROLLER  <br>LED STRIP CCT / RGBW | 96 W   | 14.5 cm | 4.7 cm | 1.6 cm | 1006348   | 69.00  |
|   | REMOTE CONTROL  <br>ZIGBEE, CCT/RGBW | -      | 14 cm   | 4.4 cm | 1.7 cm | 1007827   | 68.00  |
|  | CONTROLLER DALI, DT8  <br>5 CHANNEL  | 180 W  | 17 cm   | 5.3 cm | 2.8 cm | 1007997   | 103.20 |

## CONNECTOR

|                                                                                     | Variant                           |  | Length | Width  | Height | Prod. no. | GBP   |
|-------------------------------------------------------------------------------------|-----------------------------------|--|--------|--------|--------|-----------|-------|
|  | LED STRIP QUICK PLUG <sup>2</sup> |  | 2.2 cm | 1 cm   | 0.6 cm | 1012325   | 10.00 |
|  | LED STRIP HUB   2 PLUGS           |  | 3.1 cm | 2.8 cm | 1 cm   | 1012328   | 5.00  |
|  | LED STRIP HUB   4 PLUGS           |  | 5.7 cm | 3.1 cm | 0.9 cm | 1012329   |       |

## SEALING KITS

|                                                                                     | Variant                            |  |  |  |  | Prod. no. | GBP  |
|-------------------------------------------------------------------------------------|------------------------------------|--|--|--|--|-----------|------|
|  | LED STRIP<br>IP SEALING KIT   8MM  |  |  |  |  | 1012303   | 6.00 |
|  | LED STRIP<br>IP SEALING KIT   10MM |  |  |  |  | 1012603   | 6.00 |
|  | LED STRIP<br>IP SEALING KIT   12MM |  |  |  |  | 1012604   | 7.00 |

<sup>2</sup>Packaging unit: 5 pieces



# PROFILE SETS

## LED STRIP PROFILE SURFACE | XS

|  | Variant                   | Size | Length | Colour  | Material     | Prod. no. | GBP   |
|--|---------------------------|------|--------|---------|--------------|-----------|-------|
|  | LED STRIP PROFILE SURFACE | XS   | 200 cm | ○ White | Aluminium/PC | 1012331   | 24.00 |
|  | LED STRIP PROFILE SURFACE |      |        | ● Black |              | 1012330   |       |

## LED STRIP PROFILE RECESSED TILES | XS

|  | Variant                          | Size | Length | Colour      | Material     | Prod. no. | GBP   |
|--|----------------------------------|------|--------|-------------|--------------|-----------|-------|
|  | LED STRIP PROFILE RECESSED TILES | XS   | 200 cm | ● Aluminium | Aluminium/PC | 1012348   | 35.00 |

## LED STRIP PROFILE RECESSED PLASTER | XS

|  | Variant                            | Size | Length | Colour      | Material     | Prod. no. | GBP   |
|--|------------------------------------|------|--------|-------------|--------------|-----------|-------|
|  | LED STRIP PROFILE RECESSED PLASTER | XS   | 200 cm | ● Aluminium | Aluminium/PC | 1012349   | 39.00 |




|  | Variant                | Size | Length | Colour   | Material        | Prod. no. | GBP   |
|--|------------------------|------|--------|----------|-----------------|-----------|-------|
|  | BLACK SURFACE DIFFUSER | XS   | 200 cm | ● Black  | Plastic PC      | 1012538   | 7.00  |
|  | OPAL SURFACE DIFFUSER  | XS   | 200 cm | ○ Opal   | Plastic PC      | 1012536   | 7.00  |
|  | END CAPS SURFACE       | XS   | -      | ● Black  | Plastic PC      | 1012554   | 4.00  |
|  | END CAPS SURFACE       | XS   | -      | ○ White  | Plastic PC      | 1012555   | 4.00  |
|  | MOUNTING CLIP SURFACE  | XS   | 1.2 cm | ● Silver | Stainless steel | 1012574   | 4.00  |
|  | SURFACE PENDANT KIT    |      | 200 cm | ● Silver | Stainless steel | 1012583   | 12.00 |





Set contents: 2m profile, 2m diffuser, 2 x end caps, 4 x mounting clips (for the Surface version only)




|                                                                                     | Variant                          | Size | Length | Colour  | Material   | Prod. no. | GBP  |
|-------------------------------------------------------------------------------------|----------------------------------|------|--------|---------|------------|-----------|------|
|  | DIFFUSER TILES AND BLACK PLASTER | XS   | 200 cm | ● Black | Plastic PC | 1012541   | 7.00 |
|  | DIFFUSER TILES AND OPAL PLASTER  | XS   | 200 cm | ○ Opal  | Plastic PC | 1012539   | 7.00 |
|  | END CAPS <sup>1</sup> TILES      | XS   | -      | ● Grey  | Plastic PC | 1012556   | 4.00 |
|  | END CAPS <sup>1</sup> PLASTER    | XS   | -      | ● Grey  | Plastic PC | 1012557   | 4.00 |




# PROFILE SETS


## LED STRIP PROFILE SURFACE | S

|                                                                                   | Variant                   | Size | Length | Colour  | Material     | Prod. no. | GBP   |
|-----------------------------------------------------------------------------------|---------------------------|------|--------|---------|--------------|-----------|-------|
|  | LED STRIP PROFILE SURFACE | S    | 200 cm | ● Black | Aluminium/PC | 1012332   | 26.00 |
|                                                                                   | LED STRIP PROFILE SURFACE | S    | 200 cm | ○ White | Aluminium/PC | 1012333   |       |


## LED STRIP PROFILE SURFACE FLAT | S

|                                                                                   | Variant                        | Size | Length | Colour  | Material     | Prod. no. | GBP   |
|-----------------------------------------------------------------------------------|--------------------------------|------|--------|---------|--------------|-----------|-------|
|  | LED STRIP PROFILE SURFACE FLAT | S    | 200 cm | ● Black | Aluminium/PC | 1012336   | 22.00 |
|                                                                                   | LED STRIP PROFILE SURFACE FLAT | S    | 200 cm | ○ White | Aluminium/PC | 1012337   |       |

## LED STRIP PROFILE CORNER | S

|                                                                                    | Variant                  | Size | Length | Colour  | Material     | Prod. no. | GBP   |
|------------------------------------------------------------------------------------|--------------------------|------|--------|---------|--------------|-----------|-------|
|  | LED STRIP PROFILE CORNER | S    | 200 cm | ● Black | Aluminium/PC | 1012340   | 30.00 |
|                                                                                    | LED STRIP PROFILE CORNER | S    | 200 cm | ○ White | Aluminium/PC | 1012341   |       |

## LED STRIP PROFILE RECESSED | S

|                                                                                     | Variant                    | Size | Length | Colour  | Material     | Prod. no. | GBP   |
|-------------------------------------------------------------------------------------|----------------------------|------|--------|---------|--------------|-----------|-------|
|  | LED STRIP PROFILE RECESSED | S    | 200 cm | ● Black | Aluminium/PC | 1012344   | 30.00 |
|                                                                                     | LED STRIP PROFILE RECESSED | S    | 200 cm | ○ White | Aluminium/PC | 1012345   |       |



|                                                                                     | Variant                                 | Size | Length | Colour   | Material        | Prod. no. | GBP  |
|-------------------------------------------------------------------------------------|-----------------------------------------|------|--------|----------|-----------------|-----------|------|
|   | DIFFUSER BLACK                          | S    | 200 cm | ● Black  | Plastic PC      | 1012547   | 7.00 |
|                                                                                     | DIFFUSER OPAL                           | S    | 200 cm | ○ Opal   | Plastic PC      | 1012545   | 7.00 |
|   | END CAPS <sup>1</sup> SURFACE           | S    | -      | ● Black  | Plastic PC      | 1012558   | 5.00 |
|                                                                                     | END CAPS <sup>1</sup> SURFACE           | S    | -      | ○ White  | Plastic PC      | 1012559   | 5.00 |
|  | CONNECTOR SURFACE FLAT                  | S    | 3.5 cm | ● Grey   | Plastic PC      | 1012584   | 7.00 |
|   | END CAPS <sup>1</sup> SURFACE FLAT      | S    | -      | ● Black  | Plastic PC      | 1012560   | 5.00 |
|                                                                                     | END CAPS <sup>1</sup> SURFACE FLAT      | S    | -      | ○ White  | Plastic PC      | 1012561   | 5.00 |
|  | MOUNTING CLIP <sup>1</sup> SURFACE      | S    | 1.2 cm | ● Silver | Stainless steel | 1012575   | 5.00 |
|                                                                                     | MOUNTING CLIP <sup>1</sup> SURFACE FLAT | S    | 1.2 cm | ● Silver | Stainless steel | 1012576   | 5.00 |

Set contents: 2 m profile, 2 m diffuser, 2 x end caps, 4 x mounting clips




|  | Variant                                | Size | Length | Colour   | Material        | Prod. no. | GBP   |
|--|----------------------------------------|------|--------|----------|-----------------|-----------|-------|
|  | SURFACE PENDANT KIT                    |      | 200 cm | ● Silver | Stainless steel | 1012583   | 12.00 |
|  | END CAPS <sup>1</sup> CORNER           | S    | -      | ● Black  | Plastic PC      | 1012562   | 5.00  |
|  | END CAPS <sup>1</sup> CORNER           | S    | -      | ○ White  | Plastic PC      | 1012563   | 5.00  |
|  | MOUNTING CLIP <sup>1</sup> CORNER      | S    | 2 cm   | ● Silver | Stainless steel | 1012577   | 5.00  |
|  | END CAPS <sup>1</sup> RECESSED         | S    | -      | ● Black  | Plastic PC      | 1012564   | 5.00  |
|  | END CAPS <sup>1</sup> RECESSED         | S    | -      | ○ White  | Plastic PC      | 1012565   | 5.00  |
|  | MOUNTING SPRINGS <sup>1</sup> RECESSED | S    | -      | ● Silver | Stainless steel | 1012578   | 5.00  |




# PROFILE SETS


## LED STRIP PROFILE SURFACE | M

|                                                                                   | Variant                   | Size | Length | Colour  | Material     | Prod. no. | GBP   |
|-----------------------------------------------------------------------------------|---------------------------|------|--------|---------|--------------|-----------|-------|
|  | LED STRIP PROFILE SURFACE | M    | 200 cm | ● Black | Aluminium/PC | 1012334   | 35.00 |
|                                                                                   | LED STRIP PROFILE SURFACE | M    | 200 cm | ○ White | Aluminium/PC | 1012335   |       |


## LED STRIP PROFILE SURFACE FLAT | M

|                                                                                   | Variant                        | Size | Length | Colour  | Material     | Prod. no. | GBP   |
|-----------------------------------------------------------------------------------|--------------------------------|------|--------|---------|--------------|-----------|-------|
|  | LED STRIP PROFILE SURFACE FLAT | M    | 200 cm | ● Black | Aluminium/PC | 1012338   | 31.00 |
|                                                                                   | LED STRIP PROFILE SURFACE FLAT | M    | 200 cm | ○ White | Aluminium/PC | 1012339   |       |

## LED STRIP PROFILE CORNER | M

|                                                                                    | Variant                  | Size | Length | Colour  | Material     | Prod. no. | GBP   |
|------------------------------------------------------------------------------------|--------------------------|------|--------|---------|--------------|-----------|-------|
|  | LED STRIP PROFILE CORNER | M    | 200 cm | ● Black | Aluminium/PC | 1012342   | 39.00 |
|                                                                                    | LED STRIP PROFILE CORNER | M    | 200 cm | ○ White | Aluminium/PC | 1012343   |       |




## LED STRIP PROFILE RECESSED | M

|                                                                                     | Variant                    | Size | Length | Colour  | Material     | Prod. no. | GBP   |
|-------------------------------------------------------------------------------------|----------------------------|------|--------|---------|--------------|-----------|-------|
|  | LED STRIP PROFILE RECESSED | M    | 200 cm | ● Black | Aluminium/PC | 1012346   | 43.00 |
|                                                                                     | LED STRIP PROFILE RECESSED | M    | 200 cm | ○ White | Aluminium/PC | 1012347   |       |

|                                                                                     |                                         |   |        |          |                 |         |       |
|-------------------------------------------------------------------------------------|-----------------------------------------|---|--------|----------|-----------------|---------|-------|
| ⊕                                                                                   |                                         |   |        |          |                 |         |       |
|   | DIFFUSER BLACK                          | M | 200 cm | ● Black  | Plastic PC      | 1012550 | 8.00  |
|                                                                                     | DIFFUSER OPAL                           | M | 200 cm | ○ Opal   | Plastic PC      | 1012548 | 8.00  |
|   | END CAPS <sup>1</sup> SURFACE           | M | -      | ● Black  | Plastic PC      | 1012566 | 6.00  |
|                                                                                     | END CAPS <sup>1</sup> SURFACE           | M | -      | ○ White  | Plastic PC      | 1012567 | 6.00  |
|   | MOUNTING CLIP <sup>1</sup> SURFACE      | M | 1.6 cm | ● Silver | Stainless steel | 1012579 | 6.00  |
|                                                                                     | MOUNTING CLIP <sup>1</sup> SURFACE FLAT | M | 1.6 cm | ● Silver | Stainless steel | 1012580 | 6.00  |
|   | END CAPS <sup>1</sup> SURFACE FLAT      | M | -      | ● Black  | Plastic PC      | 1012568 | 6.00  |
|                                                                                     | END CAPS <sup>1</sup> SURFACE FLAT      | M | -      | ○ White  | Plastic PC      | 1012569 | 6.00  |
|  | SURFACE PENDANT KIT                     |   | 200 cm | ● Silver | Stainless steel | 1012583 | 12.00 |




Set contents: 2 m profile, 2 m diffuser, 2 x end caps, 4 x mounting clips

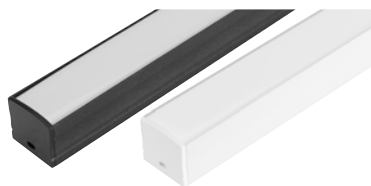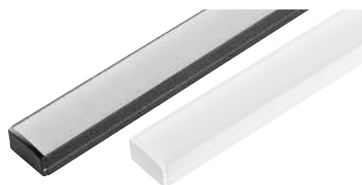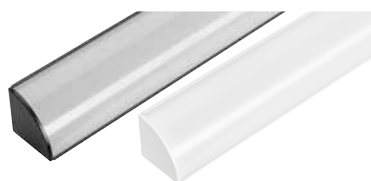

|  | Variant                                | Size | Length | Colour   | Material        | Prod. no. | GBP   |
|--|----------------------------------------|------|--------|----------|-----------------|-----------|-------|
|  | END CAPS <sup>1</sup> RECESSED         | M    | -      | ● Black  | Plastic PC      | 1012572   | 6.00  |
|  | END CAPS <sup>1</sup> RECESSED         | M    | -      | ○ White  | Plastic PC      | 1012573   | 6.00  |
|  | MOUNTING SPRINGS <sup>1</sup> RECESSED | M    | -      | ● Silver | Stainless steel | 1012582   | 6.00  |
|  | DIFFUSER CORNER BLACK                  | M    | 200 cm | ● Black  | Plastic PC      | 1012553   | 10.00 |
|  | DIFFUSER CORNER OPAL                   | M    | 200 cm | ○ Opal   | Plastic PC      | 1012551   | 10.00 |
|  | END CAPS <sup>1</sup> CORNER           | M    | -      | ● Black  | Plastic PC      | 1012570   | 6.00  |
|  | END CAPS <sup>1</sup> CORNER           | M    | -      | ○ White  | Plastic PC      | 1012571   | 6.00  |
|  | MOUNTING CLIPS <sup>1</sup> CORNER     | M    | 3.4 cm | ● Silver | Stainless steel | 1012581   | 6.00  |



# RECESSED PROFILE



## RECESSED PROFILE | L

|   | Variant                       | Size | Length | Colour   | Material                              | Prod. no. | GBP    |
|---|-------------------------------|------|--------|----------|---------------------------------------|-----------|--------|
|   | LED STRIP<br>PROFILE RECESSED |      | 150 cm | ● Black  | Aluminium                             | 1004905   | 58.00  |
|   | LED STRIP<br>PROFILE RECESSED |      | 150 cm | ○ White  | Aluminium                             | 1004906   |        |
|   | LED STRIP<br>PROFILE RECESSED |      | 300 cm | ● Black  | Aluminium                             | 1004907   | 117.00 |
|   | LED STRIP<br>PROFILE RECESSED |      | 300 cm | ○ White  | Aluminium                             | 1004908   |        |
| ⊕ |                               |      |        |          |                                       |           |        |
|   | Variant                       | Size | Length | Colour   | Material                              | Prod. no. | GBP    |
|   | COVER                         |      | 150 cm | ○ Opal   | Polymethyl-<br>methacrylate<br>(PMMA) | 1004916   | 21.00  |
|   | COVER                         |      |        | ○ Opal   | Polycarbonate<br>(PC)                 | 1004914   | 16.00  |
|   | COVER                         |      | 300 cm | ○ Opal   | Polymethyl-<br>methacrylate<br>(PMMA) | 1004917   | 38.00  |
|   | COVER                         |      |        | ○ Opal   | Polycarbonate<br>(PC)                 | 1004915   | 31.00  |
|   | END CAPS <sup>1</sup>         |      | -      | ● Black  | Aluminium                             | 1004909   | 8.00   |
|   | END CAP <sup>1</sup>          |      | -      | ○ White  | Aluminium                             | 1004910   | 8.00   |
|   | MOUNTING CLIP <sup>1</sup>    |      | 13 cm  | ● Chrome | Aluminium                             | 1004911   | 14.00  |









229431

689





229432

689



# OUTDOOR | MOBILE LIGHTS AND FLOOR LIGHTS





SECKET

ARROCK SLOT | 695



LED

L-LINE OUT | 696-697



LED

TAHA II | 698-699



LED

OVALISK | 701



SECKET

GLOO PURE 27 | 702



SECKET

ROTOBALL | 703



SECKET

PHOTONIA | 705



SECKET

OTOS GLAS | 705



SECKET

CUBIX | 705



SECKET

CONE | 707



MOLAT | 707



SECKET

LISENNE | 708



ALPA MUSHROOM | 709



SECKET

ALPA CONE 100 | 709



LED

APONI | 710-711



LED

TRUST | 711



SECKET

BIG NAILS | 712



SECKET

ROX ACRYL | 713



SECKET

VAP SLIM | 714



SECKET

C-POL 90 | 715



SECKET

F-POL 85 | 715



SECKET

SQUARE | 717



LED

SLOTS | 719



LED

H-POL | 720



LED

SLOTBOX | 721



LED

ORDI II | 723



LED

ABRIDOR HYBRID | 724



LED

ABRIDOR | 725



LED

IPERI 50 | 726



SECKET

QUADRASYL 75 | 726



SECKET

QUAD | 726



SECKET

MYRA SPOT | 727



SECKET

SITRA 360 | 727



SECKET

THEO PATHLIGHT 73 | 729




1008477 639





## GRID CUBE FL



220-240 V ~50/60 Hz | 24 V

Total wattage: 8 W


Material: Steel

- IP44 24 V plug-in power supply



2700 K  
250 lm

## GRID SUN FL



220-240 V ~50/60 Hz | 24 V

Total wattage: 8 W

Material: Steel/Plastic PC

- IP44 24 V plug-in power supply



2700 K  
500 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008477   | 172.00 |


| Variant        | Prod. no. | GBP    |
|----------------|-----------|--------|
| ● black/Opaque | 1008476   | 155.00 |

1008387 641





## ADEGAN FL, FLAT SOLAR



Power consumption: 4.4 W  
Material: PE/Steel/Plastic PC


- 2.5m USB-C charging cable included
- The light switches off while charging via USB cable
- The light can be dimmed in 3 stages (100%/50%/25%)



|         | 2200 K |       |       |
|---------|--------|-------|-------|
|         | 85 lm  | 40 lm | 20 lm |
| 1008389 |        |       |       |
|         | 2200 K |       |       |
|         | 75 lm  | 35 lm | 20 lm |
| 1008388 |        |       |       |

| Variant                | Prod. no. | GBP    |
|------------------------|-----------|--------|
| ● black<br>75 lm       | 1008388   | 247.00 |
| ● brown/black<br>85 lm | 1008389   | 247.00 |

## ADEGAN FL, SOLAR



Power consumption: 4.4 W  
Material: PE/Steel/Steel

- 2.5m USB-C charging cable included
- The light switches off while charging via USB cable
- The light can be dimmed in 3 stages (100%/50%/25%)



|         | 2200 K |       |       |
|---------|--------|-------|-------|
|         | 100 lm | 45 lm | 20 lm |
| 1008387 |        |       |       |
|         | 2200 K |       |       |
|         | 85 lm  | 40 lm | 20 lm |
| 1008386 |        |       |       |

| Variant                 | Prod. no. | GBP    |
|-------------------------|-----------|--------|
| ● black<br>85 lm        | 1008386   | 327.00 |
| ● brown/black<br>100 lm | 1008387   | 327.00 |





1011024 643






## SEJERO 90

POLE, E27



NEW



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Open cable end



Base: 1xE27 max. Ø: 6.5 cm | L: 12 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1011023   | 197.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP




| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## SEJERO 90

POLE, E27



NEW



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Open cable end



Base: 1xE27 max. Ø: 6.5 cm | L: 12 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● beige | 1011024   | 197.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |







## ALEGRIA 75

POLE, TRIAC



NEW



220-240 V ~50/60 Hz | 580 mA  
Total wattage: 29 W  
Material: Aluminium/Plastic PC

- Uniform path lighting is ensured by a single-sided top light.
- IP68 connection box



| 2200 K  | 2700 K  |
|---------|---------|
| 1100 lm | 1200 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1012138   | 394.00 |

## QUADRASYL PRO 70

POLE, DALI



NEW



100-240 V ~50/60 Hz | 5 V  
Total wattage: 12 W  
Material: Aluminium/Glass

- IP68 connection box



| 2200 K | 2700 K  |
|--------|---------|
| 950 lm | 1000 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1012141   | 344.00 |

## QUADRASYL PRO 90

POLE, DALI



NEW



100-240 V ~50/60 Hz | 5 V  
Total wattage: 12 W  
Material: Aluminium/Glass


- Asymmetrical design for luminaire spacing of up to appx. 9 m
- IP68 connection box



| 2200 K | 2700 K  |
|--------|---------|
| 950 lm | 1000 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1012142   | 403.00 |

S-TUBE 32  
POLE, GU10



220-240 V ~50/60 Hz  
Material: Aluminium

- Open cable end
- Streamlined design



Base: 1xGU10    max. Ø: 5.1 cm    L: 5.5 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007651   | 76.00 |



GU10 | 2 W | 36°  
230 lm | 2700 K | EEC = E



Prod. no.:    1007230    5.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

S-TUBE 75  
POLE, GU10



220-240 V ~50/60 Hz  
Material: Aluminium

- Open cable end
- Streamlined design



Base: 1xGU10    max. Ø: 5.1 cm    L: 5.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007652   | 118.00 |



GU10 | 2 W | 36°  
230 lm | 2700 K | EEC = E



Prod. no.:    1007230    5.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

T-TUBE 70  
POLE, GU10, SINGLE, SENSOR



220-240 V ~50/60 Hz  
Material: Aluminium

- PIR sensor, adjustable range 10-2000 lx and 5 s-10 min. Detection range up to 8 m depending on the mounting height
- IP connection box



Base: 1xGU10    max. Ø: 5.1 cm    L: 5.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008014   | 137.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.:    1005077    7.00 GBP




| Product                                               | Prod. no. | GBP |
|-------------------------------------------------------|-----------|-----|
| GU10   5 W   100°<br>300 lm   2000 K-6500 K   EEC = G |           |     |
| Prod. no.:    1012470    29.00 GBP                    |           |     |





## T-TUBE 70

### POLE, GU10, DOUBLE, SENSOR



220-240 V ~50/60 Hz  
Material: Aluminium

- Primary and replica functionality possible with accessories
- PIR sensor, adjustable range 10-2000 lx and 5 s-10 min. Detection range up to 8 m depending on the mounting height of the light
- IP connection box



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008015   | 171.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G



Prod. no.: 1012470 29.00 GBP

## T-TUBE 70

### POLE, GU10, SINGLE



220-240 V ~50/60 Hz  
Material: Aluminium

- IP connection box



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008016   | 120.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G



Prod. no.: 1012470 29.00 GBP

## T-TUBE 70

### POLE, GU10, DOUBLE



220-240 V ~50/60 Hz  
Material: Aluminium

- IP connection box



Base: 2xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008017   | 154.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP




GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G



Prod. no.: 1012470 29.00 GBP

# PHOTONI CYL 45

## POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium

- IP connection box



Base: 1xE27      max. Ø: 6 cm      L: 11.6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008195   | 154.00 |
| ● rust  | 1008196   | 154.00 |



E27 | 8 W | 180°  
720 lm | 2700 K | EEC = F



Prod. no.:      1005305      17.00 GBP



E27 | 9 W | 200°  
806 lm | 2000 K-6500 K | EEC = F




Prod. no.:      1012472      25.00 GBP





## PHOTONI CYL 75

POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium

- IP connection box



Base: 1xE27 max. Ø: 6 cm | L: 11.6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008193   | 171.00 |
| ● rust  | 1008194   | 171.00 |



E27 | 8 W | 180°  
720 lm | 2700 K | EEC = F



Prod. no.: 1005305 17.00 GBP




E27 | 9 W | 200°  
806 lm | 2000 K-6500 K | EEC = F



Prod. no.: 1012472 25.00 GBP

## PHOTONI 45

POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium

- Sea-air resistant
- IP connection box



Base: 1xE27 max. Ø: 6 cm | L: 11.6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007587   | 154.00 |
| ● rust  | 1007583   | 154.00 |



E27 | 8 W | 180°  
720 lm | 2700 K | EEC = F



Prod. no.: 1005305 17.00 GBP




E27 | 9 W | 200°  
806 lm | 2000 K-6500 K | EEC = F



Prod. no.: 1012472 25.00 GBP

## PHOTONI 75

POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium

- Sea-air resistant
- IP connection box



Base: 1xE27 max. Ø: 6 cm | L: 11.6 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007584   | 171.00 |
| ● rust  | 1007580   | 171.00 |



E27 | 8 W | 180°  
720 lm | 2700 K | EEC = F



Prod. no.: 1005305 17.00 GBP




E27 | 9 W | 200°  
806 lm | 2000 K-6500 K | EEC = F



Prod. no.: 1012472 25.00 GBP

## S-CUBE 35 POLE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



|         |         |
|---------|---------|
| 2700 K  | 3000 K  |
| 1000 lm | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007460   | 173.00 |




| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

1007460 650



## S-CUBE 75 POLE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end




|         |         |
|---------|---------|
| 2700 K  | 3000 K  |
| 1000 lm | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007459   | 207.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## R-CUBE 35 POLE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 800 lm | 800 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007513   | 173.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## R-CUBE 75 POLE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 800 lm | 800 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007512   | 207.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |





1007237 653





## I-RING 65 POLE



100-240 V ~50/60 Hz | 350 mA

Total wattage: 9.2 W

Material: Aluminium

- IP68 connection box



3000 K  
670 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007237   | 197.00 |



| Product           | Prod. no. | GBP  |
|-------------------|-----------|------|
| Screw set         |           |      |
| ● stainless steel | 228753    | 9.00 |



LID I 45  
POLE, SINGLE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- Open cable end
- The light colour must be set prior to installation



|  | 2700 K | 3000 K  |
|--|--------|---------|
|  | 900 lm | 1050 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007670   | 195.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

LID I 75  
POLE, DOUBLE, PHASE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 29 W  
Material: Aluminium

- Open cable end
- The light colour must be set prior to installation



|        |                  |                   |
|--------|------------------|-------------------|
| Direct | 2700 K<br>850 lm | 3000 K<br>1000 lm |
| Direct | 2700 K<br>850 lm | 3000 K<br>1000 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007669   | 263.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |





## QUAD PRO 60

POLE, DALI

## QUAD PRO 90

POLE, DALI



100-240 V ~50/60 Hz | 500 mA

Total wattage: 14 W

Material: Aluminium

100-240 V ~50/60 Hz | 500 mA

Total wattage: 14 W

Material: Aluminium

- Asym. light distribution for optimum illumination of paths
- ULOR <2% to minimise light pollution
- IP connection box

- Asym. light distribution for optimum illumination of paths
- ULOR <2% to minimise light pollution
- Luminaire spacing of up to 6.40 m enables fewer light points and more efficient use of resources.
- IP connection box



|         |        |
|---------|--------|
| 1010204 | 2200 K |
|         | 450 lm |
| 1010205 | 2700 K |
|         | 500 lm |

|         |        |
|---------|--------|
| 1010202 | 2200 K |
|         | 450 lm |
| 1010203 | 2700 K |
|         | 500 lm |

| Variant                         | Prod. no.      | GBP           |
|---------------------------------|----------------|---------------|
| ● anthracite<br>450 lm   2200 K | <b>1010204</b> | <b>260.00</b> |
| ● anthracite<br>500 lm   2700 K | <b>1010205</b> | <b>260.00</b> |

| Variant                         | Prod. no.      | GBP           |
|---------------------------------|----------------|---------------|
| ● anthracite<br>450 lm   2200 K | <b>1010202</b> | <b>340.00</b> |
| ● anthracite<br>500 lm   2700 K | <b>1010203</b> | <b>340.00</b> |

# M-POL SYSTEM CONFIGURATION

---

The modular M-POL system enables flexible outdoor lighting solutions.

Different bollard heights and lamp heads with varying light characteristics can be combined as required and adapted to the specific application.

Clean lines, durable materials and a choice of on/off or DALI control highlight the system's architectural character.

## CONFIGURING THE SYSTEM

- 1 Specify the bollard height: 30 / 60 / 90
- 2 Select a lamp head:
  - S or M
  - Clear, Shader, Louver, 180° or 360°
  - On/Off or DALI
  - 2700 K or CCT switch 2700 / 3000 K




## LAMP HEADS

**M-POL S**

Ø: 12.3 cm, H: 15.9 cm

M-POL M

Ø: 12.3 cm, H: 25.9 cm

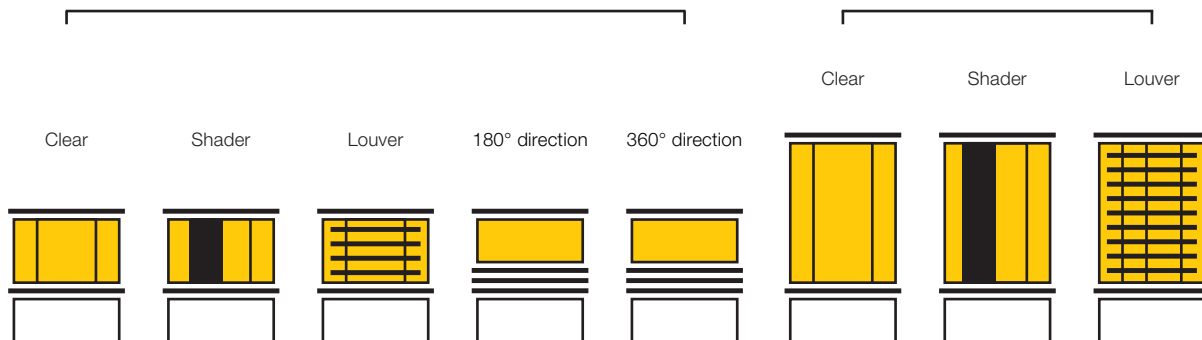


# BOLLARD




**M-POL 30**

Ø: 12.4 cm, H: 23.4 cm

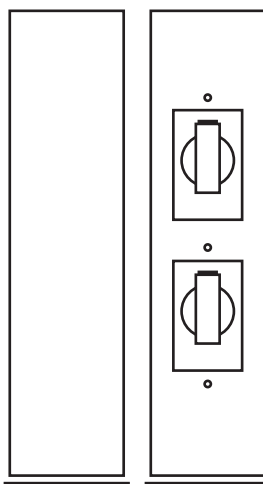

**M-POL 60**

Ø: 12.4 cm, H: 53.4 cm



**M-POL 90**

Ø: 12.4 cm, H: 83.4 cm





1007233 + 1006381 660 + 667






1006394 + 1006380    665 + 667



M-POL S  
POLEHEAD 360A°, GLARE-FREE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 10 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




2700 K  
750 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007232   | 252.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Y-connector box             |           |        |
| ● black                     | 228726    | 29.00  |
| Connection box IP68, 3-pole |           |        |
| ● black                     | 228730    | 16.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

M-POL S  
POLEHEAD 360A°,  
GLARE-FREE, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 10 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




2700 K  
750 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007233   | 268.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Connection box              |           |        |
| ● black                     | 228725    | 18.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

M-POL S  
POLEHEAD 180A°, GLARE-FREE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 10 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end



2700 K  
700 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007234   | 256.00 |




| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Y-connector box             |           |        |
| ● black                     | 228726    | 29.00  |
| Connection box IP68, 3-pole |           |        |
| ● black                     | 228730    | 16.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |



## M-POL S

POLEHEAD 180A°,  
GLARE-FREE, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 10 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end



2700 K  
700 lm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007235   | 277.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Connection box              |           |        |
| ● black                     | 228725    | 18.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

## M-POL S

POLEHEAD



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end



Indirect      2700 K      3000 K  
470 lm      510 lm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006383   | 222.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Y-connector box             |           |        |
| ● black                     | 228726    | 29.00  |
| Connection box IP68, 3-pole |           |        |
| ● black                     | 228730    | 16.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

## M-POL S

POLEHEAD, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




Indirect      2700 K      3000 K  
890 lm      950 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006389   | 319.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Connection box              |           |        |
| ● black                     | 228725    | 18.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

## M-POL S POLEHEAD, SHADER



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




|          |        |        |
|----------|--------|--------|
| Indirect | 2700 K | 3000 K |
|          | 285 lm | 310 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006387   | 239.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Y-connector box             |           |        |
| ● black                     | 228726    | 29.00  |
| Connection box IP68, 3-pole |           |        |
| ● black                     | 228730    | 16.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

## M-POL S POLEHEAD, SHADER, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




|          |        |        |
|----------|--------|--------|
| Indirect | 2700 K | 3000 K |
|          | 520 lm | 550 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006393   | 331.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Connection box              |           |        |
| ● black                     | 228725    | 18.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

## M-POL S POLEHEAD, LOUVER



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end



|          |        |        |
|----------|--------|--------|
| Indirect | 2700 K | 3000 K |
|          | 145 lm | 155 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006385   | 273.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Y-connector box             |           |        |
| ● black                     | 228726    | 29.00  |
| Connection box IP68, 3-pole |           |        |
| ● black                     | 228730    | 16.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |



## M-POL S POLEHEAD, LOUVER, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




|          |        |        |
|----------|--------|--------|
| Indirect | 2700 K | 3000 K |
|          | 260 lm | 270 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006391   | 386.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Connection box              |           |        |
| ● black                     | 228725    | 18.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

## M-POL M POLEHEAD



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




|          |        |        |
|----------|--------|--------|
| Indirect | 2700 K | 3000 K |
|          | 590 lm | 660 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006384   | 239.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Y-connector box             |           |        |
| ● black                     | 228726    | 29.00  |
| Connection box IP68, 3-pole |           |        |
| ● black                     | 228730    | 16.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

## M-POL M POLEHEAD, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end



|          |         |         |
|----------|---------|---------|
| Indirect | 2700 K  | 3000 K  |
|          | 1150 lm | 1230 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006390   | 331.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Connection box              |           |        |
| ● black                     | 228725    | 18.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |



## M-POL M POLEHEAD, SHADER



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end



|          |        |        |
|----------|--------|--------|
| Indirect | 2700 K | 3000 K |
|          | 420 lm | 460 lm |

| Variant      | Prod. no.      | GBP           |
|--------------|----------------|---------------|
| ● anthracite | <b>1006388</b> | <b>256.00</b> |




| Product                     | Prod. no.      | GBP           |
|-----------------------------|----------------|---------------|
| Y-connector box             |                |               |
| ● black                     | <b>228726</b>  | <b>29.00</b>  |
| Connection box IP68, 3-pole |                |               |
| ● black                     | <b>228730</b>  | <b>16.00</b>  |
| Ground spike                |                |               |
| ● grey                      | <b>230060</b>  | <b>47.00</b>  |
| Pole 30 cm                  |                |               |
| ● anthracite                | <b>1006379</b> | <b>88.00</b>  |
| Pole 60 cm                  |                |               |
| ● anthracite                | <b>1006380</b> | <b>121.00</b> |
| Pole 90 cm                  |                |               |
| ● anthracite                | <b>1006381</b> | <b>147.00</b> |
| Ground anchor set           |                |               |
| ● stainless steel           | <b>1006382</b> | <b>42.00</b>  |
| Pole 60 Socket              |                |               |
| ● anthracite                | <b>1008474</b> | <b>138.00</b> |



## M-POL M

### POLEHEAD, SHADER, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end



|          |        |        |
|----------|--------|--------|
| Indirect | 2700 K | 3000 K |
|          | 820 lm | 870 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006394   | 352.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Connection box              |           |        |
| ● black                     | 228725    | 18.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

## M-POL M

### POLEHEAD, LOUVER



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end



|          |        |        |
|----------|--------|--------|
| Indirect | 2700 K | 3000 K |
|          | 190 lm | 210 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006386   | 378.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Y-connector box             |           |        |
| ● black                     | 228726    | 29.00  |
| Connection box IP68, 3-pole |           |        |
| ● black                     | 228730    | 16.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

## M-POL M

### POLEHEAD, LOUVER, DALI



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end



|          |        |        |
|----------|--------|--------|
| Indirect | 2700 K | 3000 K |
|          | 350 lm | 370 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006392   | 453.00 |



| Product                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| Connection box              |           |        |
| ● black                     | 228725    | 18.00  |
| Ground spike                |           |        |
| ● grey                      | 230060    | 47.00  |
| Pole 30 cm                  |           |        |
| ● anthracite                | 1006379   | 88.00  |
| Pole 60 cm                  |           |        |
| ● anthracite                | 1006380   | 121.00 |
| Pole 90 cm                  |           |        |
| ● anthracite                | 1006381   | 147.00 |
| Ground anchor set           |           |        |
| ● stainless steel           | 1006382   | 42.00  |
| IP68 connection box, 5-pole |           |        |
| ● black                     | 1006453   | 31.00  |
| Pole 60 Socket              |           |        |
| ● anthracite                | 1008474   | 138.00 |

M-POL  
COVER

M-POL 60  
POLE, SOCKET

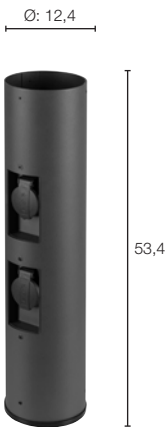

Ø: 12 cm  
H: 2.2 cm  
Material: Aluminium



220-250 V ~50/60 Hz  
Material: Aluminium

- Open cable end

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1008475   | 21.00 |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1008474   | 138.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Y-connector box             |           |       |
| ● black                     | 228726    | 29.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 230060    | 47.00 |
| Ground anchor set           |           |       |
| ● stainless steel           | 1006382   | 42.00 |
| IP68 connection box, 5-pole |           |       |
| ● black                     | 1006453   | 31.00 |
| Cover                       |           |       |
| ● anthracite                | 1008475   | 21.00 |



## M-POL 30 POLE



Ø: 12.4 cm  
H: 23.4 cm  
Material: Aluminium


- Sea-air resistant

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1006379   | 88.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Y-connector box             |           |       |
| ● black                     | 228726    | 29.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 230060    | 47.00 |
| Ground anchor set           |           |       |
| ● stainless steel           | 1006382   | 42.00 |
| IP68 connection box, 5-pole |           |       |
| ● black                     | 1006453   | 31.00 |

## M-POL 60 POLE

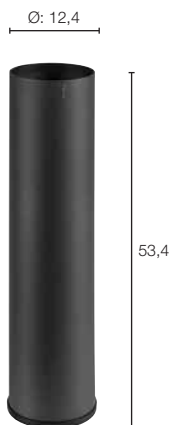

Ø: 12.4 cm  
H: 53.4 cm  
Material: Aluminium

- Sea-air resistant

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006380   | 121.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Y-connector box             |           |       |
| ● black                     | 228726    | 29.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 230060    | 47.00 |
| Ground anchor set           |           |       |
| ● stainless steel           | 1006382   | 42.00 |
| IP68 connection box, 5-pole |           |       |
| ● black                     | 1006453   | 31.00 |

## M-POL 90 POLE



Ø: 12.4 cm  
H: 83.4 cm  
Material: Aluminium

- Sea-air resistant

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006381   | 147.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Y-connector box             |           |       |
| ● black                     | 228726    | 29.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 230060    | 47.00 |
| Ground anchor set           |           |       |
| ● stainless steel           | 1006382   | 42.00 |
| IP68 connection box, 5-pole |           |       |
| ● black                     | 1006453   | 31.00 |








1006394 + 1006381    665 + 667

CONCRETE 35  
POLE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Concrete


- Bayonet lock enables easy assembly
- IP connection box



Down 2700K  
600 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 1008838   | 361.00 |

CONCRETE 55  
POLE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Concrete

- Bayonet lock enables easy assembly
- IP connection box




Down 2700K  
600 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 1008839   | 386.00 |




## CONCRETO FL, ROUND, QPAR51

## CONCRETO FL, SQUARE, QPAR51



220-240 V ~50/60 Hz  
Material: concrete/aluminium

- IP44 safety plug



220-240 V ~50/60 Hz  
Material: concrete/aluminium

- IP44 safety plug



Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● grey/black | 1007931   | 105.00 |



GU10 | 2 W | 36°  
230 lm | 2700 K | EEC = E

Prod. no.: 1007230 5.00 GBP



GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: 1012470 29.00 GBP



Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● grey/black | 1007932   | 105.00 |



GU10 | 2 W | 36°  
230 lm | 2700 K | EEC = E

Prod. no.: 1007230 5.00 GBP



GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: 1012470 29.00 GBP






1008385 673



## RASTERLYS 70

### POLE, PHASE



220-240 V ~0/50/60 Hz | 700 mA

Total wattage: 27 W

Material: Aluminium

- The light colour must be set prior to installation
- Suitable for DC operation
- Open cable end



|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 350 lm | 375 lm |
| 2700 K | 3000 K |
| 350 lm | 375 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1008385   | 257.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Y-connector box             |           |       |
| ● black                     | 228726    | 29.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |



## FLATT II 36 POLE, PHASE



220-240 V ~50/60 Hz | 240 mA

Total wattage: 10 W

Material: Aluminium

- Open cable end



2700 K  
650 lm

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black            | 1010104   | 169.00 |
| ● anthracite/brown | 1010103   | 169.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| T-connector box             |           |       |
| ● black                     | 228726    | 29.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

1002958 675



## FLATT II 62

### POLE, PHASE



220-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium

- Open cable end



2700 K  
650 lm


| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black            | 1010106   | 186.00 |
| ● anthracite/brown | 1010105   | 186.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| T-connector box             |           |       |
| ● black                     | 228726    | 29.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## FLATT 65

### POLE



100-240 V ~50/60 Hz | 350 mA  
Total wattage: 10 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



3000 K | 4000 K  
400 lm | 400 lm


| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● anthracite       | 1002956   | 220.00 |
| ● brown/anthracite | 1002957   | 220.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## FLATT 100

### POLE



100-240 V ~50/60 Hz | 350 mA  
Total wattage: 10 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



3000 K | 4000 K  
400 lm | 400 lm


| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● anthracite       | 1002958   | 267.00 |
| ● brown/anthracite | 1002959   | 267.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## ESKINA FRAME 45

### POLE, SINGLE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



| Spot | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 1100 lm | 1200 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1004749   | 243.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## ESKINA FRAME 75

### POLE, SINGLE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



| Spot | 3000 K  | 4000 K  |
|------|---------|---------|
|      | 1100 lm | 1200 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1004750   | 268.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## ESKINA FRAME 75

### POLE, DOUBLE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 27 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



| Spot 1 | 3000 K  | 4000 K  |
|--------|---------|---------|
|        | 1100 lm | 1200 lm |
| Spot 2 | 3000 K  | 4000 K  |
|        | 1100 lm | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1004751   | 302.00 |




| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |



## ESKINA FRAME 125

### POLE, DOUBLE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 27 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



|        |         |         |
|--------|---------|---------|
| Spot 1 | 3000 K  | 4000 K  |
|        | 1100 lm | 1200 lm |
| Spot 2 | 3000 K  | 4000 K  |
|        | 1100 lm | 1200 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1005439   | 348.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## ESKINA FRAME 175

### POLE, DOUBLE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 27 W  
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



|        |         |         |
|--------|---------|---------|
| Spot 1 | 3000 K  | 4000 K  |
|        | 1100 lm | 1200 lm |
| Spot 2 | 3000 K  | 4000 K  |
|        | 1100 lm | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1005440   | 407.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |






232115 679





## LOGS 40 POLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.5 W  
Material: Aluminium

- Open cable end




3000 K  
570 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232115    | 222.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Screw set                   |           |       |
| ● stainless steel           | 228754    | 4.00  |
| Ground spike                |           |       |
| ● grey                      | 231230    | 40.00 |
| Concrete anchor             |           |       |
| ● grey                      | 232119    | 53.00 |

## LOGS 70 POLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.5 W  
Material: Aluminium

- Open cable end



3000 K  
570 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232125    | 256.00 |




| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Screw set                   |           |       |
| ● stainless steel           | 228754    | 4.00  |
| Ground spike                |           |       |
| ● grey                      | 231230    | 40.00 |
| Concrete anchor             |           |       |
| ● grey                      | 232119    | 53.00 |



1006181 681



## GRAFIT 30 POLE, ROUND, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Acrylic

- Open cable end



Base: 1xE27      max. Ø: 6 cm      L: 11.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1006180   | 70.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F




Prod. no.: 1005303      9.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## GRAFIT 60 POLE, ROUND, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Acrylic

- Open cable end



Base: 1xE27      max. Ø: 6 cm      L: 11.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1006181   | 88.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303      9.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## GRAFIT 90 POLE, ROUND, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Acrylic

- Open cable end



Base: 1xE27      max. Ø: 6 cm      L: 11.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006182   | 113.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289      10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |






231225

683





## GRAFIT 30 POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic

- Open cable end



Base: 1xE27      max. Ø: 6 cm      L: 11.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 231215    | 70.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F




Prod. no.: 1005303      9.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Screw set                   |           |       |
| ● stainless steel           | 228754    | 4.00  |
| Ground spike                |           |       |
| ● grey                      | 231230    | 40.00 |

## GRAFIT 60 POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Plastic

- Open cable end



Base: 1xE27      max. Ø: 6 cm      L: 11.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 231225    | 88.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E




Prod. no.: 1005289      10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Screw set                   |           |       |
| ● stainless steel           | 228754    | 4.00  |
| Ground spike                |           |       |
| ● grey                      | 231230    | 40.00 |

## GRAFIT 90 POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Acrylic

- Open cable end



Base: 1xE27      max. Ø: 6 cm      L: 11.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006184   | 113.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289      10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231230    | 40.00 |






1005442 685



## QUADRULO FL



100-277 V ~50/60 Hz | 500 mA

Total wattage: 7 W

Material: Aluminium/Acrylic

- IP connection box




3000 K  
340 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1005442   | 142.00 |





## RUSTY® SLOT 50 POLE



220-240 V ~50/60 Hz

Total wattage: 9 W

Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

**LED**  
INSIDE

3000 K  
30 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 233447    | 268.00 |




| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231230    | 40.00 |

229411 687



## RUSTY® SLOT 80 POLE



220-240 V ~50/60 Hz  
Total wattage: 9 W  
Material: FeCSi Steel/Polycarbonate (PC)


- Open cable end



3000 K  
30 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 233457    | 336.00 |

## RUSTY® SLOT 50 POLE, E27



220-240 V ~50/60 Hz  
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end



Base: 1xE27 max. Ø: 4.8 cm | L: 13.9 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 229410    | 247.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E




Prod. no.: 1005289 10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231230    | 40.00 |

## RUSTY® SLOT 80 POLE, E27



220-240 V ~50/60 Hz  
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end



Base: 1xE27 max. Ø: 4.8 cm | L: 13.9 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 229411    | 310.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E




Prod. no.: 1005289 10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231230    | 40.00 |

RUSTY® PATHLIGHT  
POLE, TCR-TSE

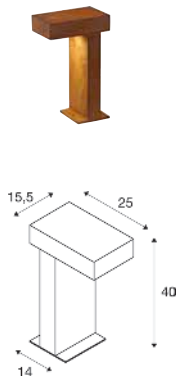


220-240 V ~50/60 Hz  
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end



Base: 1xG53      max. Ø: 7.5 cm      L: 2.7 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 230090    | 268.00 |




Prod. no.: 1005272      10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 229422    | 40.00 |

RUSTY® PATHLIGHT 40  
POLE

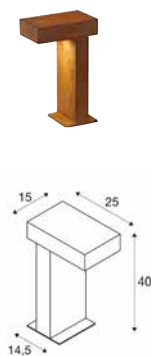

220-240 V ~50/60 Hz  
Total wattage: 8.8 W  
Material: Steel/Acrylic

- Open cable end



3000 K  
470 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 1006346   | 277.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 229422    | 40.00 |

RUSTY® PATHLIGHT 70  
POLE



220-240 V ~50/60 Hz  
Total wattage: 8.8 W  
Material: Steel/Acrylic

- Open cable end



3000 K  
470 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 1006347   | 361.00 |




| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 229422    | 40.00 |






## RUSTY® CONE 24 FL, E14



220-240 V ~50/60 Hz  
Material: FeCSi Steel/Glass


## RUSTY® CONE 40 POLE, E27



220-240 V ~50/60 Hz  
Material: FeCSi Steel/Glass

- Open cable end

## RUSTY® CONE 70 POLE, E27



220-240 V ~50/60 Hz  
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end



Base: 1xE14    max. Ø: 4.8 cm    L: 13.9 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 229430    | 235.00 |



E14 | 4 W | 320°  
380 lm | 2700 K | EEC = F



Prod. no.: 1005284    6.00 GBP



Base: 1xE27    max. Ø: 4.8 cm    L: 13.9 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 229431    | 361.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289    10.00 GBP



Base: 1xE27    max. Ø: 4.8 cm    L: 13.9 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 229432    | 428.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289    10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 229423    | 43.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 229423    | 43.00 |



229432 689

229430 689






229021

693



RUSTY® 40  
POLE

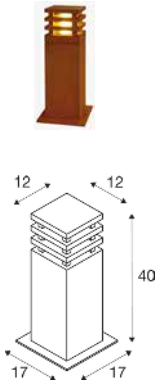


220-240 V ~50/60 Hz  
Total wattage: 9 W  
Material: FeCSi Steel/Polycarbonate (PC)  
• Open cable end



3000 K  
90 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 233427    | 268.00 |

RUSTY® 70  
POLE




220-240 V ~50/60 Hz  
Total wattage: 9 W  
Material: FeCSi Steel/Polycarbonate (PC)  
• Open cable end



3000 K  
90 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 233437    | 336.00 |

RUSTY® 40  
POLE, E27

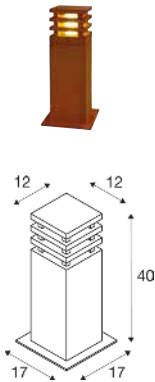

220-240 V ~50/60 Hz  
Material: FeCSi Steel/Polycarbonate (PC)  
• Open cable end



Base: 1xE27    max. Ø: 4.8 cm    L: 13.9 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 229420    | 243.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E





Prod. no.:    1005289    10.00 GBP

| Product                     | Prod. no. | GBP   | Product                     | Prod. no. | GBP   | Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|-----------------------------|-----------|-------|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       | Connection box IP68, 3-pole |           |       | Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 | ● black                     | 228730    | 16.00 | ● black                     | 228730    | 16.00 |
| Ground spike                |           |       | Ground spike                |           |       | Ground spike                |           |       |
| ● grey                      | 229422    | 40.00 | ● grey                      | 229422    | 40.00 | ● grey                      | 229422    | 40.00 |



## RUSTY® 70

POLE, E27



220-240 V ~50/60 Hz  
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end



Base: 1xE27 max. Ø: 4.8 cm L: 13.9 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 229421    | 310.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E




Prod. no.: 1005289 10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 229422    | 40.00 |

## RUSTY® 40

POLE, E27



220-240 V ~50/60 Hz  
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end



Base: 1xE27 max. Ø: 4.8 cm L: 13.9 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 229020    | 243.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289 10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● stainless steel           | 229022    | 43.00 |

## RUSTY® 70

POLE, E27



220-240 V ~50/60 Hz  
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end



Base: 1xE27 max. Ø: 4.8 cm L: 13.9 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● rust  | 229021    | 310.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289 10.00 GBP




| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● stainless steel           | 229022    | 43.00 |



## ARROCK GRANITE 40

POLE, SQUARE, E27

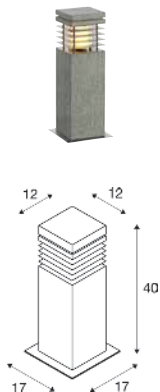

220-240 V ~50/60 Hz  
Material: Granite/Stainless steel 304

- Open cable end



Base: 1xE27 max. Ø: 5.2 cm | L: 11.5 cm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● grey/chrome | 231410    | 314.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289 10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 229422    | 40.00 |

## ARROCK GRANITE 70

POLE, SQUARE, E27



220-240 V ~50/60 Hz  
Material: Granite/Stainless steel 304

- Open cable end



Base: 1xE27 max. Ø: 5.2 cm | L: 11.5 cm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● grey/chrome | 231411    | 382.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289 10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 229422    | 40.00 |

## ARROCK ARC

POLE, QPAR51



220-240 V ~50/60 Hz  
Material: Granite/Stainless steel 304

- Open cable end



Base: 1xGU10 max. Ø: 5.1 cm | L: 7.6 cm

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● grey/chrome | 231420    | 314.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G




Prod. no.: 1012470 29.00 GBP



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Ground spike |           |       |
| ● grey       | 231233    | 45.00 |



## ARROCK STONE 50 POLE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 9 W  
Material: Basalt/Stainless steel 304

- IP connection box




3000 K  
330 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 231370    | 360.00 |



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Ground spike |           |       |
| ● grey       | 231235    | 45.00 |

## ARROCK STONE 75 POLE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 9 W  
Material: Basalt/Stainless steel 304

- Open cable end




3000 K  
330 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 231371    | 416.00 |



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Ground spike |           |       |
| ● grey       | 231235    | 45.00 |

## ARROCK SLOT POLE, QPAR51



220-240 V ~50/60 Hz  
Material: Granite/Stainless steel 304

- Open cable end



Base: 1xGU10

| Variant       | Prod. no. | GBP    |
|---------------|-----------|--------|
| ● grey/chrome | 231440    | 360.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F




Prod. no.: 1005077 7.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231235    | 45.00 |

## L-LINE OUT 30 FL, HORIZONTAL



220-240 V ~50/60 Hz | 500 mA

Total wattage: 11.5W

Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end



|        |        |
|--------|--------|
| 3000 K | 4000 K |
| 800 lm | 810 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003536   | 201.00 |




| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

1003535 697



## L-LINE OUT 60

### FL, HORIZONTAL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 11.5W  
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end



| 3000 K | 4000 K |
|--------|--------|
| 780 lm | 800 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003535   | 210.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## L-LINE OUT 50

### POLE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 7 W  
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end



| 3000 K | 4000 K |
|--------|--------|
| 490 lm | 530 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003537   | 163.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## L-LINE OUT 80

### POLE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 7 W  
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end




| 3000 K | 4000 K |
|--------|--------|
| 490 lm | 530 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003538   | 193.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

TAHA II 45  
POLE, PHASE



220-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium


- IP connection box



|  | 2200 K | 2700 K |
|--|--------|--------|
|  | 450 lm | 500 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010197   | 203.00 |

TAHA II 70  
POLE, PHASE



220-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium

- IP connection box



|  | 2200 K | 2700 K |
|--|--------|--------|
|  | 450 lm | 500 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010198   | 229.00 |

TAHA II 90  
POLE, PHASE



220-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium

- IP connection box



|  | 2200 K | 2700 K |
|--|--------|--------|
|  | 450 lm | 500 lm |



| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010199   | 254.00 |





## TAHA II 70 POLE , SENSOR

## TAHA II 90 POLE , SENSOR



100-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium

- Primary and replica functionality, option to control additional lights without a sensor
- IP connection box



100-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium

- Primary and replica functionality, option to control additional lights without a sensor
- IP connection box



| 2200 K | 2700 K |
|--------|--------|
| 450 lm | 500 lm |



| 2200 K | 2700 K |
|--------|--------|
| 450 lm | 500 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010200   | 246.00 |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010201   | 280.00 |






1004681 701





## OVALISK 75 POLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.6 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Open cable end




| 3000 K | 4000 K |
|--------|--------|
| 580 lm | 630 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1004680   | 297.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Concrete anchor             |           |       |
| ○ silver                    | 228712    | 56.00 |
| Ground spike                |           |       |
| ● grey                      | 228722    | 52.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## OVALISK 100 POLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.6 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Open cable end




| 3000 K | 4000 K |
|--------|--------|
| 580 lm | 630 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1004681   | 322.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Concrete anchor             |           |       |
| ○ silver                    | 228712    | 56.00 |
| Ground spike                |           |       |
| ● grey                      | 228722    | 52.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

GLOO PURE 27  
POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Open cable end



Base: 1xE27      max. Ø: 4.8 cm      L: 18 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1001999   | 84.00 |

 E27 | 8 W | 240°  
880lm | 3000 K | EEC = E




Prod. no.:      1005289      10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231234    | 48.00 |

GLOO PURE 44  
POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Open cable end



Base: 1xE27      max. Ø: 4.8 cm      L: 18 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002000   | 114.00 |

 E27 | 14 W | 240°  
1520lm | 3000 K | EEC = E



Prod. no.:      1005307      11.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231234    | 48.00 |

GLOO PURE 70  
POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Open cable end



Base: 1xE27      max. Ø: 4.8 cm      L: 18 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002001   | 122.00 |

 E27 | 8 W | 240°  
880lm | 3000 K | EEC = E



Prod. no.:      1005289      10.00 GBP




| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231234    | 48.00 |



## ROTOBALL 25

FL, E27

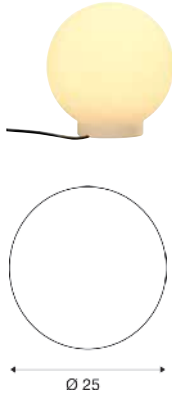

220-240 V ~50/60 Hz  
Material: Steel/Polyethylene (PE)

- IP44 safety plug



Base: 1xE27 max. Ø: 7 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1007969   | 137.00 |



E27 | 13 W | 220°  
1300lm | 2700K | EEC = F



Prod. no.: 1005302 11.00 GBP

## ROTOBALL 40

FL, E27



220-240 V ~50/60 Hz  
Material: Steel/Polyethylene (PE)

- IP44 safety plug



Base: 1xE27 max. Ø: 9.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1007970   | 154.00 |




E27 | 13 W | 220°  
1300lm | 2700K | EEC = F



Prod. no.: 1005302 11.00 GBP

## ROTOBALL 50

FL, E27

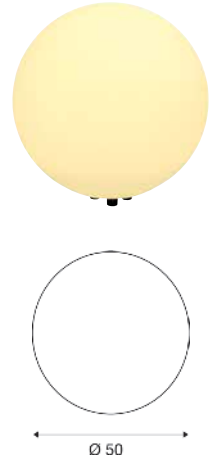

220-240 V ~50/60 Hz  
Material: Steel/Polyethylene (PE)

- IP44 safety plug



Base: 1xE27 max. Ø: 9.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1007971   | 206.00 |



E27 | 13 W | 220°  
1300lm | 2700K | EEC = F



Prod. no.: 1005302 11.00 GBP





232075 705



## PHOTONIA

### POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Open cable end



Base: 1xE27      max. Ø: 9 cm      L: 15 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232075    | 241.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303      9.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Concrete anchor             |           |       |
| ● stainless steel           | 232085    | 45.00 |

## OTOS GLAS

### POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Concrete anchor included



Base: 1xE27      max. Ø: 6.5 cm      L: 14.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 230465    | 127.00 |



E27 | 13 W | 220°  
1300 lm | 2700 K | EEC = F



Prod. no.: 1005302      11.00 GBP



E27 | 9 W | 200°  
806 lm | 2000 K-6500 K | EEC = F




Prod. no.: 1012472      25.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Screw set                   |           |       |
| ● stainless steel           | 228753    | 9.00  |

## CUBIX

### FL, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- IP44 safety plug



Base: 1xGU10

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007933   | 113.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077      7.00 GBP



GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G



Prod. no.: 1012470      29.00 GBP






230435 707





## CONE FL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xE27 L: 15 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 230435    | 85.00 |



E27 | 13 W | 220°  
1300 lm | 2700 K | EEC = F



Prod. no.: 1005302 11.00 GBP




E27 | 9 W | 200°  
806 lm | 2000 K-6500 K | EEC = F



Prod. no.: 1012472 25.00 GBP

## MOLAT PD, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Suspension chain included
- IP44 safety plug



Base: 1xE27 max. Ø: 6.5 cm L: 14.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007954   | 121.00 |




E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005268 11.00 GBP

## MOLAT 100 POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xE27 max. Ø: 6.5 cm L: 14.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1000822   | 155.00 |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F



Prod. no.: 1005265 23.00 GBP




| Product         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| Ceiling rosette |           |       |
| ● anthracite    | 1000398   | 70.00 |



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Ground spike |           |       |
| ● grey       | 230060    | 47.00 |

LISENNE 40  
POLE, E27




220-240 V ~50/60 Hz  
Material: Basalt/Glass

- Open cable end



Base: 1xE27      max. Ø: 5.9 cm      L: 15 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 1000665   | 344.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F

Prod. no.:      1005268      11.00 GBP



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Ground spike |           |       |
| ● grey       | 229422    | 40.00 |

LISENNE 70  
POLE, E27




220-240 V ~50/60 Hz  
Material: Basalt/Glass

- Open cable end



Base: 1xE27      max. Ø: 5.9 cm      L: 15 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 1000666   | 393.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F

Prod. no.:      1005268      11.00 GBP




| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Ground spike |           |       |
| ● grey       | 229422    | 40.00 |





## ALPHA MUSHROOM 45 POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)

- Open cable end



Base: 1xE27 max. Ø: 5.2 cm | L: 16 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 228935    | 114.00 |



E27 | 14 W | 240°  
1520 lm | 3000 K | EEC = E




Prod. no.: 1005307 11.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Concrete anchor             |           |       |
| ● silver                    | 228712    | 56.00 |
| Ground spike                |           |       |
| ● grey                      | 228722    | 52.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Screw set                   |           |       |
| ● stainless steel           | 228752    | 6.00  |

## ALPHA MUSHROOM 75 POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)

- Open cable end



Base: 1xE27 max. Ø: 5.2 cm | L: 16 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 228945    | 139.00 |



E27 | 14 W | 240°  
1520 lm | 3000 K | EEC = E




Prod. no.: 1005307 11.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Concrete anchor             |           |       |
| ● silver                    | 228712    | 56.00 |
| Ground spike                |           |       |
| ● grey                      | 228722    | 52.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Screw set                   |           |       |
| ● stainless steel           | 228752    | 6.00  |

## ALPHA CONE 100 POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)

- Open cable end



Base: 1xE27 max. Ø: 5.2 cm | L: 17.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 228925    | 165.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E




Prod. no.: 1005289 10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Concrete anchor             |           |       |
| ● silver                    | 228712    | 56.00 |
| Ground spike                |           |       |
| ● grey                      | 228722    | 52.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Screw set                   |           |       |
| ● stainless steel           | 228752    | 6.00  |



## APONI 90 POLE, PHASE



220-240 V ~50/60 Hz | 500 mA

Total wattage: 6.6 W

Material: Aluminium

- Open cable end



3000 K  
610lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1000682   | 226.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

228110 711



## APONI 120 POLE, PHASE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 6.6 W  
Material: Aluminium

- Open cable end




3000 K  
610 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1000683   | 279.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## TRUST 30 POLE



220-240 V ~50/60 Hz  
Total wattage: 9 W  
Material: Stainless steel 316

- Open cable end




3000 K  
400 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 228100    | 226.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Ground spike                |           |       |
| ● black                     | 227922    | 47.00 |
| Ring-shaped grid            |           |       |
| ● stainless steel           | 228130    | 84.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Spiral-shaped grid          |           |       |
| ● black                     | 1000449   | 50.87 |

## TRUST 60 POLE



220-240 V ~50/60 Hz  
Total wattage: 9 W  
Material: Stainless steel 316

- Open cable end




3000 K  
400 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 228110    | 289.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Ground spike                |           |       |
| ● black                     | 227922    | 47.00 |
| Ring-shaped grid            |           |       |
| ● stainless steel           | 228130    | 84.00 |
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Spiral-shaped grid          |           |       |
| ● black                     | 1000449   | 50.87 |

BIG NAILS 50  
POLE, E27




220-240 V ~50/60 Hz  
Material: Stainless steel 304/Polycarbonate (PC)

- Open cable end



Base: 1xE27      max. Ø: 4.5 cm | L: 17 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 229162    | 142.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E

Prod. no.: 1005289      10.00 GBP



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Ground spike |           |       |
| ● black      | 227922    | 47.00 |

BIG NAILS 80  
POLE, E27




220-240 V ~50/60 Hz  
Material: Stainless steel 304/Polycarbonate (PC)

- Open cable end



Base: 1xE27      max. Ø: 4.5 cm | L: 17 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 229172    | 159.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E

Prod. no.: 1005289      10.00 GBP




| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Ground spike |           |       |
| ● black      | 227922    | 47.00 |



## ROX ACRYL 30

POLE, E27



220-240 V ~50/60 Hz  
Material: Stainless steel 304

- Open cable end



Base: 1xE27 max. Ø: 6 cm | L: 15 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1001488   | 142.00 |




E27 | 4 W | 280°  
830 lm | 2700 K | EEC = A



Prod. no.: 1008641 7.00 GBP

## ROX ACRYL 60

POLE, E27



220-240 V ~50/60 Hz  
Material: Stainless steel 304

- Open cable end



Base: 1xE27 max. Ø: 6 cm | L: 15 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1001489   | 168.00 |



E27 | 13 W | 220°  
1300 lm | 2700 K | EEC = F



Prod. no.: 1005302 11.00 GBP



E27 | 9 W | 200°  
806 lm | 2000 K-6500 K | EEC = F



Prod. no.: 1012472 25.00 GBP

## ROX ACRYL 90

POLE, E27



220-240 V ~50/60 Hz  
Material: Stainless steel 304

- Open cable end



Base: 1xE27 max. Ø: 6 cm | L: 15 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1001490   | 184.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| T-connector box   |           |       |
| ● black           | 228726    | 29.00 |
| Ground spike      |           |       |
| ● grey            | 231234    | 48.00 |
| Concrete anchor   |           |       |
| ● stainless steel | 1001494   | 26.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| T-connector box   |           |       |
| ● black           | 228726    | 29.00 |
| Ground spike      |           |       |
| ● grey            | 231234    | 48.00 |
| Concrete anchor   |           |       |
| ● stainless steel | 1001494   | 26.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| T-connector box   |           |       |
| ● black           | 228726    | 29.00 |
| Ground spike      |           |       |
| ● grey            | 231234    | 48.00 |
| Concrete anchor   |           |       |
| ● stainless steel | 1001494   | 26.00 |



VAP SLIM 30  
POLE, E27



220-240 V ~50/60 Hz  
Material: Stainless steel 304

- Open cable end



Base: 1xE27      max. Ø: 5.1 cm      L: 12.6 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 230063    | 147.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E




Prod. no.:      1005289      10.00 GBP



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Ground spike      |           |       |
| ● grey            | 230060    | 47.00 |
| Concrete anchor   |           |       |
| ● stainless steel | 230061    | 24.00 |

VAP SLIM 60  
POLE, E27



220-240 V ~50/60 Hz  
Material: Stainless steel 304

- Open cable end



Base: 1xE27      max. Ø: 5.1 cm      L: 12.6 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 230066    | 163.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.:      1005289      10.00 GBP



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Ground spike      |           |       |
| ● grey            | 230060    | 47.00 |
| Concrete anchor   |           |       |
| ● stainless steel | 230061    | 24.00 |

VAP SLIM 90  
POLE, E27



220-240 V ~50/60 Hz  
Material: Stainless steel 304

- Open cable end



Base: 1xE27      max. Ø: 5.1 cm      L: 12.6 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 230069    | 193.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.:      1005289      10.00 GBP



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Ground spike      |           |       |
| ● grey            | 230060    | 47.00 |
| Concrete anchor   |           |       |
| ● stainless steel | 230061    | 24.00 |



## C-POL 90

POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)

- Open cable end



Base: 1xE27    max. Ø: 5.2 cm    L: 17.3 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 231475    | 170.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289    10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## F-POL 85

POLE, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)

- Open cable end



Base: 1xE27    max. Ø: 5.1 cm    L: 14.8 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 231595    | 168.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.: 1005289    10.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |




1000344 717



## SQUARE 30

POLE, E27

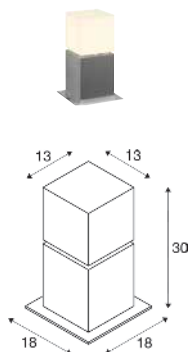

220-240 V ~50/60 Hz  
Material: Stainless steel 304

- Open cable end



Base: 1xE27 max. Ø: 6 cm | L: 15 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1000344   | 197.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F




Prod. no.: 1005303 9.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231234    | 48.00 |
| Concrete anchor             |           |       |
| ● stainless steel           | 1000343   | 48.00 |

## SQUARE 60

POLE, E27



220-240 V ~50/60 Hz  
Material: Stainless steel 304

- Open cable end



Base: 1xE27 max. Ø: 6 cm | L: 15 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1000345   | 249.00 |



E27 | 4 W | 280°  
830 lm | 2700 K | EEC = A




Prod. no.: 1008641 7.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231234    | 48.00 |
| Concrete anchor             |           |       |
| ● stainless steel           | 1000343   | 48.00 |

## SQUARE 90

POLE, E27



220-240 V ~50/60 Hz  
Material: Stainless steel 304

- Open cable end



Base: 1xE27 max. Ø: 6 cm | L: 15 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1000346   | 292.00 |



E27 | 13 W | 220°  
1300 lm | 2700 K | EEC = F



Prod. no.: 1005302 11.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |
| Ground spike                |           |       |
| ● grey                      | 231234    | 48.00 |
| Concrete anchor             |           |       |
| ● stainless steel           | 1000343   | 48.00 |






231455     787





## SLOTS 45 POLE



220-240 V ~50/60 Hz  
Total wattage: 4.5 W  
Material: Aluminium


- Concrete anchor included
- Open cable end



3000 K  
200 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 231815    | 155.00 |
| ● rust       | 231817    | 155.00 |

## SLOTS 65 POLE



220-240 V ~50/60 Hz  
Total wattage: 4.5 W  
Material: Aluminium


- Concrete anchor included
- Open cable end



3000 K  
200 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 231455    | 163.00 |
| ● rust       | 231457    | 163.00 |

H-POL 30  
POLE

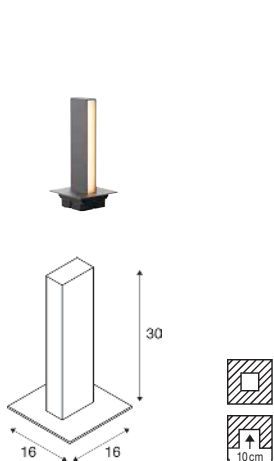

100-277 V ~50/60 Hz | 480 mA  
Total wattage: 9.7 W  
Material: Aluminium/Plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the floor, with installation dimensions  
L: 14 cm W: 14 cm D: 16 cm




3000 K  
350 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232155    | 210.00 |



| Product                       | Prod. no. | GBP   |
|-------------------------------|-----------|-------|
| Recessed fixing kit, 14x14 cm |           |       |
| ● black                       | 232195    | 43.00 |

H-POL 60  
POLE

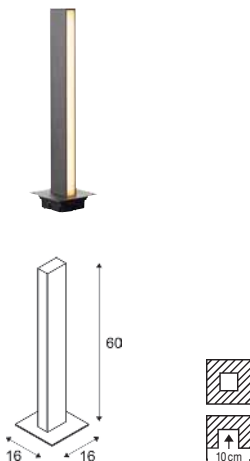

100-277 V ~50/60 Hz | 500 mA  
Total wattage: 18 W  
Material: Aluminium/Plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the floor, with installation dimensions  
L: 14 cm W: 14 cm D: 16 cm




3000 K  
700 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232165    | 306.00 |



| Product                       | Prod. no. | GBP   |
|-------------------------------|-----------|-------|
| Recessed fixing kit, 14x14 cm |           |       |
| ● black                       | 232195    | 43.00 |

H-POL TWIN 60  
POLE

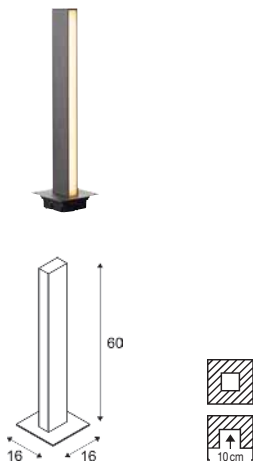

220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 35 W  
Material: Aluminium/Plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the floor, with installation dimensions  
L: 14 cm W: 14 cm D: 16 cm



Direct  
3000 K  
700 lm  
700 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232185    | 399.00 |




| Product                       | Prod. no. | GBP   |
|-------------------------------|-----------|-------|
| Recessed fixing kit, 14x14 cm |           |       |
| ● black                       | 232195    | 43.00 |



## SLOTBOX 40

### POLE



100-277 V ~50/60 Hz | 700 mA  
Total wattage: 8 W  
Material: Aluminium

- Open cable end



3000 K  
160 lm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232135    | 176.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |

## SLOTBOX 70

### POLE



100-277 V ~50/60 Hz | 700 mA  
Total wattage: 8.7 W  
Material: Aluminium

- Open cable end



3000 K  
160 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232145    | 210.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |



1008727 723



## ORDI II 45 POLE, PHASE



220-240 V ~50/60 Hz | 240 mA  
Total wattage: 9.5 W  
Material: Aluminium

- The light colour must be set prior to installation
- IP connection box



| 2200 K | 3000 K |
|--------|--------|
| 700 lm | 850 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008725   | 222.00 |

## ORDI II 70 POLE, PHASE



220-240 V ~50/60 Hz | 240 mA  
Total wattage: 9.5 W  
Material: Aluminium

- The light colour must be set prior to installation
- IP connection box



| 2200 K | 3000 K |
|--------|--------|
| 700 lm | 850 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008726   | 256.00 |

## ORDI II 70 POLE, SENSOR



100-240 V ~50/60 Hz | 240 mA  
Total wattage: 9.5 W  
Material: Aluminium

- The light colour must be set prior to installation
- Primary and replica functionality
- IP connection box




| 2200 K | 3000 K |
|--------|--------|
| 700 lm | 850 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008727   | 268.00 |



ABRIDOR HYBRID 60  
POLE



100-240 V ~50/60 Hz | 380 mA  
Total wattage: 6.8 W  
Material: Aluminium


- Solar and 230V operation possible
- 3 different modes
- Battery charging via solar
- IP68 connection box



|        |        |
|--------|--------|
| 2200 K | 2700 K |
| 600 lm | 650 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1008543   | 247.00 |

ABRIDOR HYBRID 100  
POLE



100-240 V ~50/60 Hz | 380 mA  
Total wattage: 6.8 W  
Material: Aluminium

- Solar and 230V operation possible
- 3 different modes
- Battery charging via solar
- IP68 connection box




|        |        |
|--------|--------|
| 2200 K | 2700 K |
| 600 lm | 650 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1008544   | 285.00 |



## ABRIDOR 60 POLE



100-240 V ~50/60 Hz | 300 mA  
Total wattage: 12 W  
Material: Aluminium


- Open cable end



| 3000 K | 4000 K |
|--------|--------|
| 950 lm | 980 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002991   | 189.00 |

## ABRIDOR 100 POLE



100-240 V ~50/60 Hz | 300 mA  
Total wattage: 12 W  
Material: Aluminium


- The light colour must be set prior to installation
- Open cable end



| 3000 K | 4000 K |
|--------|--------|
| 950 lm | 980 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002992   | 239.00 |

IPERI 50  
POLE

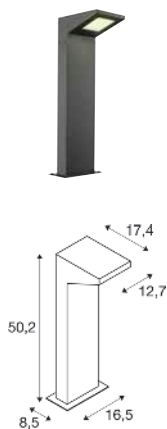

220-240 V ~50/60 Hz  
Total wattage: 4.5 W  
Material: Aluminium/Plastic


- Open cable end



4000 K  
400 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 231305    | 113.00 |

QUADRASYL 75  
POLE, TCR-TSE




220-240 V ~50/60 Hz  
Material: Aluminium

- Concrete anchor included
- Open cable end




Base: 1xG53    max. Ø: 7.5 cm    L: 2.7 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232295    | 142.00 |
| ● grey       | 232294    | 142.00 |



Prod. no.:    1005272    10.00 GBP

QUAD  
POLE



100-277 V ~50/60 Hz | 500 mA  
Total wattage: 18 W  
Material: Aluminium/Glass

- Open cable end



3000 K  
1550 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003001   | 319.00 |



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Ground spike |           |       |
| ● grey       | 231231    | 43.00 |




| Product         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| T-connector box |           |       |
| ● black         | 228726    | 29.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |



## MYRA SPOT DOUBLE, GU10



220-240 V ~50/60 Hz  
Material: Aluminium

- The height of the light can be increased by a maximum of 2 extension rods.
- Open cable end



Base: 2xGU10 max. Ø: 5.1 cm | L: 5.7 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 233185    | 147.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F




Prod. no.: 1005077 7.00 GBP



| Product             | Prod. no. | GBP   |
|---------------------|-----------|-------|
| Concrete anchor     |           |       |
| ○ silver            | 228712    | 56.00 |
| Screw set           |           |       |
| ● stainless steel   | 228752    | 6.00  |
| Pedestal            |           |       |
| ● anthracite        | 233145    | 24.00 |
| Extension rod 30 cm |           |       |
| ● anthracite        | 233165    | 24.00 |

## SITRA 360 POLE, TCR-TSE



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 2xG53 max. Ø: 7.5 cm | L: 3.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 231505    | 137.00 |



GX53 | 6 W | 120°  
490 lm | 2700 K | EEC = G



Prod. no.: 1005272 10.00 GBP



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Ground spike      |           |       |
| ● grey            | 230060    | 47.00 |
| Ground spike      |           |       |
| ● stainless steel | 1000736   | 20.00 |




1002871 729





## THEO PATHLIGHT 73

### POLE, DOUBLE



220-240 V ~50/60 Hz

Material: Aluminium

- Open cable end



Base: 2xGU10

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002871   | 205.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |



1007146 733

# OUTDOOR | SPOTLIGHTS



LED  
SYNA WIDE | 732



SECKET  
SYNA SHADE | 732



LED  
SYNA PLANT | 733



LED  
SYNA GARDEN | 733



LED  
SYNA | 733



NEW

LED  
PL-BEAM PRO |  
734 - 735



LED  
GALEN | 738



LED  
GALEN PRO | 739



LED  
HELIA SPOT | 740



LED  
FLAC BEAM | 741



SECKET  
SAMRINA | 741



LED  
NAUTILUS 10 | 742



SECKET  
NAUTILUS 10 | 743



SECKET  
BIG NAUTILUS | 743



SECKET  
NAUTILUS | 744



LED  
SECKET  
NAUTILUS 10 SPOT | 744



LED  
DASAR® PROJECTOR |  
745



LED  
DASAR® 920 | 745



LED  
HELIA SLIM | 747



SECKET  
THEO BRACKET | 749




LED  
LED SPIKE | 749



SECKET  
SITRA 360 SPIKE | 751

SYNA WIDE  
SP



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 5.5 W  
Material: Aluminium


- IP44 safety plug



|         |                  |
|---------|------------------|
| 1008478 | 2200 K<br>500 lm |
| 1008479 | 3000 K<br>650 lm |

| Variant                    | Prod. no. | GBP   |
|----------------------------|-----------|-------|
| ● black<br>500 lm   2200 K | 1008478   | 60.00 |
| ● black<br>650 lm   3000 K | 1008479   | 60.00 |

SYNA SHADE  
SP, GU10



220-240 V ~50/60 Hz  
Material: Aluminium

- IP44 safety plug



Base: 1xGU10      max. Ø: 5 cm      L: 5.3 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008480   | 40.00 |
| ● rust  | 1012354   | 39.00 |



GU10 | 2 W | 36°  
230 lm | 2700 K | EEC = E



Prod. no.:      1007230      5.00 GBP




GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G



Prod. no.:      1012470      29.00 GBP



## SYNA PLANT SP



220-240 V ~50/60 Hz | 300 mA  
Total wattage: 6 W  
Material: Aluminium


- IP44 safety plug



|         |                  |
|---------|------------------|
| 1007146 | 3000 K<br>600 lm |
| 1011599 | 2200 K<br>400 lm |

| Variant                    | Prod. no. | GBP   |
|----------------------------|-----------|-------|
| ● black<br>600 lm   3000 K | 1007978   | 59.00 |
| ● black<br>400 lm   2200 K | 1011599   | 61.00 |

## SYNA GARDEN SP



220-240 V ~50/60 Hz | 300 mA  
Total wattage: 6 W  
Material: Aluminium


- IP44 safety plug



|         |                  |
|---------|------------------|
| 1007147 | 3000 K<br>600 lm |
| 1011598 | 2200 K<br>400 lm |

| Variant                    | Prod. no. | GBP   |
|----------------------------|-----------|-------|
| ● black<br>600 lm   3000 K | 1007979   | 59.00 |
| ● black<br>400 lm   2200 K | 1011598   | 61.00 |

## SYNA SP



220-240 V ~50/60 Hz  
Total wattage: 9 W  
Material: Aluminium

- IP44 safety plug



|  |                  |
|--|------------------|
|  | 3000 K<br>470 lm |
|--|------------------|

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1007977   | 69.00 |



## PL-BEAM PRO S

SP, DALI

## PL-BEAM PRO S

SP, DALI, ASYM



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 12 W  
Material: Aluminium/Glass

- A versatile spotlight, suitable for use as a façade or mast light.



|         |                   |
|---------|-------------------|
| 1012113 | 2700 K<br>1400 lm |
| 1012114 | 2700 K<br>1300 lm |
| 1012115 | 2200 K<br>1300 lm |
| 1012116 | 2200 K<br>1250 lm |
| 1012127 | 3000 K<br>1450 lm |
| 1012128 | 3000 K<br>1400 lm |

| Variant                                | Prod. no. | GBP    |
|----------------------------------------|-----------|--------|
| ● anthracite<br>1400 lm   2700 K   23° | 1012113   | 172.00 |
| ● anthracite<br>1300 lm   2700 K   64° | 1012114   | 172.00 |
| ● anthracite<br>1300 lm   2200 K   23° | 1012115   | 172.00 |
| ● anthracite<br>1250 lm   2200 K   64° | 1012116   | 172.00 |
| ● anthracite<br>1450 lm   3000 K   23° | 1012127   | 172.00 |
| ● anthracite<br>1400 lm   3000 K   64° | 1012128   | 172.00 |



| Product        | Prod. no. | GBP   |
|----------------|-----------|-------|
| Wall bracket   |           |       |
| ● black        | 234350    | 34.00 |
| Lamp shield    |           |       |
| ● anthracite   | 1012131   | 13.00 |
| Honeycomb grid |           |       |
| ● black        | 1012133   | 5.00  |
| Mast clamp     |           |       |
| ● anthracite   | 1012135   | 17.00 |



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 12 W  
Material: Aluminium/Glass

- A versatile spotlight, suitable for use as a façade or mast light.



|         |                   |
|---------|-------------------|
| 1012117 | 2700 K<br>1350 lm |
| 1012118 | 2200 K<br>1250 lm |
| 1012125 | 3000 K<br>1450 lm |

| Variant                          | Prod. no. | GBP    |
|----------------------------------|-----------|--------|
| ● anthracite<br>1350 lm   2700 K | 1012117   | 172.00 |
| ● anthracite<br>1250 lm   2200 K | 1012118   | 172.00 |
| ● anthracite<br>1450 lm   3000 K | 1012125   | 172.00 |




| Product        | Prod. no. | GBP   |
|----------------|-----------|-------|
| Wall bracket   |           |       |
| ● black        | 234350    | 34.00 |
| Lamp shield    |           |       |
| ● anthracite   | 1012131   | 13.00 |
| Honeycomb grid |           |       |
| ● black        | 1012133   | 5.00  |
| Mast clamp     |           |       |
| ● anthracite   | 1012135   | 17.00 |



## PL-BEAM PRO M SP, DALI



NEW



220-240 V ~0/50/60 Hz | 700 mA  
Total wattage: 26 W  
Material: Aluminium/Glass

- A versatile spotlight, suitable for use as a façade or mast light.



|         |                   |
|---------|-------------------|
| 1012119 | 2700 K<br>3350 lm |
| 1012120 | 2700 K<br>3200 lm |
| 1012121 | 2200 K<br>3050 lm |
| 1012122 | 2200 K<br>2900 lm |
| 1012129 | 3000 K<br>3500 lm |
| 1012130 | 3000 K<br>3300 lm |

| Variant                                | Prod. no. | GBP    |
|----------------------------------------|-----------|--------|
| ● anthracite<br>3350 lm   2700 K   23° | 1012119   | 285.00 |
| ● anthracite<br>3200 lm   2700 K   64° | 1012120   | 285.00 |
| ● anthracite<br>3050 lm   2200 K   23° | 1012121   | 285.00 |
| ● anthracite<br>2900 lm   2200 K   64° | 1012122   | 285.00 |
| ● anthracite<br>3500 lm   3000 K   23° | 1012129   | 285.00 |
| ● anthracite<br>3300 lm   3000 K   64° | 1012130   | 285.00 |




| Product        | Prod. no. | GBP   |
|----------------|-----------|-------|
| Wall bracket   |           |       |
| ● black        | 234350    | 34.00 |
| Lamp shield    |           |       |
| ● anthracite   | 1012132   | 17.00 |
| Honeycomb grid |           |       |
| ● black        | 1012134   | 10.00 |
| Mast clamp     |           |       |
| ● Anthracite   | 1012135   | 17.00 |

## PL-BEAM PRO M SP, DALI, ASYM



NEW



220-240 V ~0/50/60 Hz | 700 mA  
Total wattage: 26 W  
Material: Aluminium/Glass

- A versatile spotlight, suitable for use as a façade or mast light.



|         |                   |
|---------|-------------------|
| 1012123 | 2700 K<br>3300 lm |
| 1012124 | 2200 K<br>3000 lm |
| 1012126 | 3000 K<br>3400 lm |

| Variant                          | Prod. no. | GBP    |
|----------------------------------|-----------|--------|
| ● anthracite<br>3300 lm   2700 K | 1012123   | 285.00 |
| ● anthracite<br>3000 lm   2200 K | 1012124   | 285.00 |
| ● anthracite<br>3400 lm   3000 K | 1012126   | 285.00 |



| Product        | Prod. no. | GBP   |
|----------------|-----------|-------|
| Wall bracket   |           |       |
| ● black        | 234350    | 34.00 |
| Lamp shield    |           |       |
| ● anthracite   | 1012131   | 13.00 |
| Honeycomb grid |           |       |
| ● black        | 1012133   | 5.00  |
| Mast clamp     |           |       |
| ● anthracite   | 1012135   | 17.00 |





## PL-BEAM PRO S LAMP SHIELD



NEW

Ø: 9.4 cm  
H: 0.4 cm  
Material: Aluminium

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1012131   | 13.00 |

## PL-BEAM PRO S HONEYCOMB GRID



NEW

L: 13.7 cm  
B: 13.8 cm  
H: 7.4 cm  
Material: Aluminium

| Variant | Prod. no. | GBP  |
|---------|-----------|------|
| ● black | 1012133   | 5.00 |

## PL-BEAM PRO S/M MAST CLAMP



NEW

L: 15 cm  
W: 3.5 cm  
H: 9.2 cm  
Material: Aluminium

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1012135   | 17.00 |

## PL-BEAM PRO M LAMP SHIELD




NEW

Ø: 13.3 cm  
H: 0.4 cm  
Material: Aluminium

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1012132   | 17.00 |

## PL-BEAM PRO M HONEYCOMB GRID



NEW

L: 17.7 cm  
W: 17.8 cm  
H: 8.4 cm  
Material: Aluminium

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1012134   | 10.00 |

## PL-BEAM WALL BRACKET




NEW

L: 82 cm  
W: 18 cm  
H: 11 cm  
Material: Steel

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 234350    | 34.00 |

## GALEN 60


SP



220-240 V ~50/60 Hz | 450 mA  
Total wattage: 18 W  
Material: Aluminium

## GALEN 120

SP



220-240 V ~50/60 Hz | 900 mA  
Total wattage: 34 W  
Material: Aluminium

- IP67 plug-in system



| 3000 K  | 4000 K  |
|---------|---------|
| 1570 lm | 1570 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003447   | 201.00 |



| 3000 K  | 4000 K  |
|---------|---------|
| 3000 lm | 3100 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003448   | 294.00 |



| Product                                 | Prod. no. | GBP   |
|-----------------------------------------|-----------|-------|
| 5m connection cable with open cable end |           |       |
| ● black                                 | 231960    | 25.00 |
| Connecting cable 1 m                    |           |       |
| ● black                                 | 231961    | 17.00 |



| Product                                 | Prod. no. | GBP   |
|-----------------------------------------|-----------|-------|
| 5m connection cable with open cable end |           |       |
| ● black                                 | 231960    | 25.00 |
| Connecting cable 1 m                    |           |       |
| ● black                                 | 231961    | 17.00 |







## GALEN PRO 60

WL, DALI

## GALEN PRO 120

WL, DALI



220-240 V ~0/50/60 Hz | 305 mA  
Total wattage: 20 W  
Material: Aluminium/Glass

- Asym. light distribution for optimum illumination of paths
- IP connection box



220-240 V ~0/50/60 Hz | 335 mA  
Total wattage: 40 W  
Material: Aluminium/Glass

- Asym. light distribution for optimum illumination of paths
- IP connection box



3000 K  
2300 lm



3000 K  
5150 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1009107   | 373.00 |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1009108   | 462.00 |




| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| wall mount extension |           |       |
| ● black              | 234350    | 34.00 |



| Product              | Prod. no. | GBP   |
|----------------------|-----------|-------|
| wall mount extension |           |       |
| ● black              | 234350    | 34.00 |

HELIA SPOT S  
SP, SINGLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 6.5 W  
Material: Aluminium

- IP44 safety plug




3000 K  
440 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007944   | 151.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Ground spike      |           |       |
| ● stainless steel | 1000736   | 20.00 |

HELIA SPOT L  
SP, SINGLE, PHASE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 15 W  
Material: Aluminium

- IP44 safety plug



3000 K  
1340 lm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007943   | 197.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Ground spike      |           |       |
| ● stainless steel | 228560    | 24.00 |



## FLAC BEAM SP



220-240 V ~50/60 Hz  
Total wattage: 27 W  
Material: Aluminium


- IP44 safety plug



3000 K  
1600 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 1007942   | 419.00 |

## SAMRINA SP, SINGLE, GU10



220-240 V ~50/60 Hz  
Material: Plastic

- Contains recycled material
- IP44 safety plug



Base: GU10      max. Ø: 6 cm | L: 6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007972   | 40.00 |




GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077      7.00 GBP



## NAUTILUS 10 SP, SQUARE



100-277 V ~50/60 Hz | 700 mA

Total wattage: 8.5 W

Material: Aluminium/Glass

- IP44 safety plug

LED  
INSIDE

CRI  
80

3000 K  
660 lm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007958   | 126.00 |

231035

742



## NAUTILUS 10 SP, ROUND, QPAR51

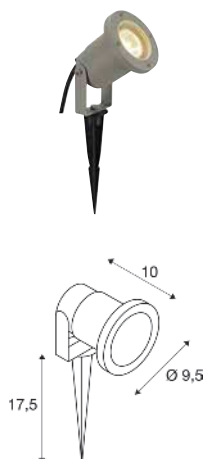

220-240 V ~50/60 Hz  
Material: Aluminium

- IP44 safety plug



Base: 1xGU10 | L: 5.7 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● grey  | 1007956   | 26.00 |




GU10 | 6W | 38°  
450lm | 2700K | EEC = F



Prod. no.: 1005077 7.00 GBP

## BIG NAUTILUS SP, ROUND, QPAR51

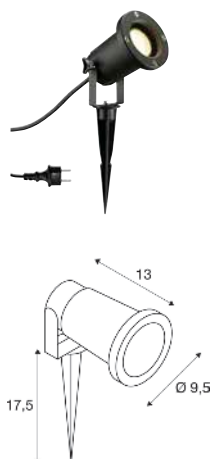

220-240 V ~50/60 Hz  
Material: Aluminium

- Ground spike made from recycled plastic
- IP44 safety plug



Base: 1xGU10 max. Ø: 5.1 cm | L: 8.3 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007955   | 26.00 |
| ● rust  | 1008030   | 26.00 |
| ● green | 1007960   | 26.00 |



GU10 | 6W | 38°  
450lm | 2700K | EEC = F




Prod. no.: 1005077 7.00 GBP



GU10 | 5 W | 100°  
300lm | 2000K-6500K | EEC = G

Prod. no.: 1012470 29.00 GBP

## NAUTILUS 10 SP, ROUND, QPAR51

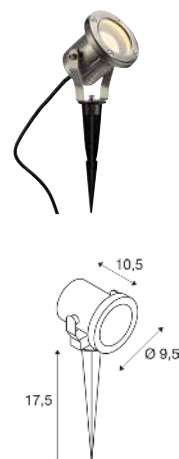

220-240 V ~50/60 Hz  
Material: Stainless steel 316

- IP44 safety plug



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.7 cm

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● stainless steel | 1007957   | 88.00 |



GU10 | 6W | 38°  
450lm | 2700K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5 W | 100°  
300lm | 2000K-6500K | EEC = G


Prod. no.: 1012470 29.00 GBP



Better value as  
a set at slv.com



## NAUTILUS SP, QR-C51



12 V 50/60 Hz  
Material: Stainless steel 304/glass

- Open cable end



Base: 1xGX5.3

| Variant           | Prod. no.     | GBP          |
|-------------------|---------------|--------------|
| ● stainless steel | <b>229090</b> | <b>77.00</b> |




GU5.3 | 6 W | 36°  
450 lm | 2700 K | EEC = G



Prod. no.: 1001574 30.00 GBP

## NAUTILUS 10 SPOT SP, QPAR51



220-240 V ~50/60 Hz  
Material: Stainless steel 316

- Open cable end



Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

| Variant           | Prod. no.     | GBP          |
|-------------------|---------------|--------------|
| ● stainless steel | <b>229741</b> | <b>88.00</b> |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP



GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G




Prod. no.: 1012470 29.00 GBP



| Product                    | Prod. no.     | GBP          |
|----------------------------|---------------|--------------|
| Connection box IP68, 3-pin |               |              |
| ● black                    | <b>228730</b> | <b>16.00</b> |

## NAUTILUS 10 SPOT SP, LED



220-240 V ~50/60 Hz  
Total wattage: 9 W  
Material: Stainless steel 316

- IP44 safety plug



3000 K  
690 lm

| Variant           | Prod. no.      | GBP           |
|-------------------|----------------|---------------|
| ● stainless steel | <b>1007959</b> | <b>100.00</b> |





| Product              | Prod. no.      | GBP         |
|----------------------|----------------|-------------|
| Plastic ground spike |                |             |
| ● black              | <b>900011</b>  | <b>4.00</b> |
| Mounting plate       |                |             |
| ● stainless steel    | <b>1001963</b> | <b>8.00</b> |



## DASAR® PROJECTOR SP, 12/24V

## DASAR® 920 SP, 230V



12-24 V  
Power consumption: 6.5 W  
Material: Stainless steel 316/glass

- Open cable end



3000 K  
520 lm

| Variant           | Prod. no.     | GBP           |
|-------------------|---------------|---------------|
| ● stainless steel | <b>233570</b> | <b>208.00</b> |



| Product                            | Prod. no.      | GBP          |
|------------------------------------|----------------|--------------|
| Stainless steel 316 ground spike   |                |              |
| ● stainless steel                  | <b>233580</b>  | <b>17.00</b> |
| Stainless steel 316 mounting plate |                |              |
| ● stainless steel                  | <b>233582</b>  | <b>23.00</b> |
| Plastic ground spike               |                |              |
| ● black                            | <b>900011</b>  | <b>4.00</b>  |
| LED power supply 12V   24W, round  |                |              |
| ○ white                            | <b>1008651</b> | <b>23.00</b> |
| LED power supply 24V   25W, round  |                |              |
| ○ white                            | <b>1008652</b> | <b>23.00</b> |



220-240 V ~50/60 Hz | 400 mA  
Total wattage: 4.6 W  
Material: Stainless steel 316/glass

- IP44 safety plug



3000 K  
300 lm

| Variant           | Prod. no.      | GBP           |
|-------------------|----------------|---------------|
| ● stainless steel | <b>1007934</b> | <b>260.00</b> |



| Product                            | Prod. no.     | GBP          |
|------------------------------------|---------------|--------------|
| Stainless steel 316 ground spike   |               |              |
| ● stainless steel                  | <b>233580</b> | <b>17.00</b> |
| Stainless steel 316 mounting plate |               |              |
| ● stainless steel                  | <b>233582</b> | <b>23.00</b> |
| Plastic ground spike               |               |              |
| ● black                            | <b>900011</b> | <b>4.00</b>  |





1007868 747





## HELIA SLIM POLE, SINGLE



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 6 W  
Material: Aluminium

- IP44 safety plug



|         |      |        |  |
|---------|------|--------|--|
| 1007868 | Spot | 3000 K |  |
|         |      | 450 lm |  |
| 1011034 | Spot | 2200 K |  |
|         |      | 500 lm |  |

| Variant                    | Prod. no. | GBP    |
|----------------------------|-----------|--------|
| ● black<br>450 lm   3000 K | 1007868   | 121.00 |
| ● black<br>500 lm   2200 K | 1011034   | 117.00 |

## HELIA SLIM POLE, DOUBLE



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 12 W  
Material: Aluminium

- IP44 safety plug



|         |        |        |  |
|---------|--------|--------|--|
| 1007869 | Spot 1 | 3000 K |  |
|         |        | 450 lm |  |
| 1011033 | Spot 2 | 3000 K |  |
|         |        | 450 lm |  |
| 1011033 | Spot 1 | 2200 K |  |
|         |        | 500 lm |  |
| 1011033 | Spot 2 | 2200 K |  |
|         |        | 500 lm |  |

| Variant                    | Prod. no. | GBP    |
|----------------------------|-----------|--------|
| ● black<br>450 lm   3000 K | 1007869   | 147.00 |
| ● black<br>500 lm   2200 K | 1011033   | 142.00 |




1004652 749





## THEO BRACKET SP



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- IP44 safety plug



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.7 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1007981   | 56.00 |




GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no.: 1005077 7.00 GBP

## LED SPIKE SP



100-240 V ~50/60 Hz | 240 mA  
Total wattage: 6 W  
Material: Aluminium/Glass

- IP44 safety plug



3000 K  
400 lm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1007949   | 61.00 |
| ● rust       | 1007950   | 61.00 |




231535 751



## SITRA 360 SPIKE

SP, SINGLE, TCR-TSE

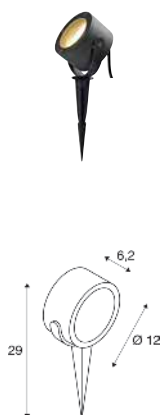

220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- Ground spike made from recycled plastic
- IP44 safety plug



Base: 1xG53 max. Ø: 7.5 cm | L: 3.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1007973   | 55.00 |




GX53 | 6W | 120°  
490 lm | 2700 K | EEC = G



Prod. no.: 1005272 10.00 GBP

## SITRA 360 SPIKE

SP, DOUBLE, TCR-TSE

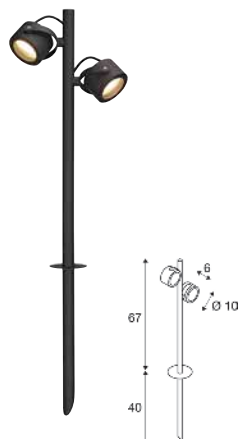

220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- IP44 safety plug



Base: 2xG53 max. Ø: 7.5 cm | L: 3.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007974   | 164.00 |




GX53 | 6W | 120°  
490 lm | 3000 K | EEC = G



Prod. no.: 1005271 10.00 GBP



1007586 754

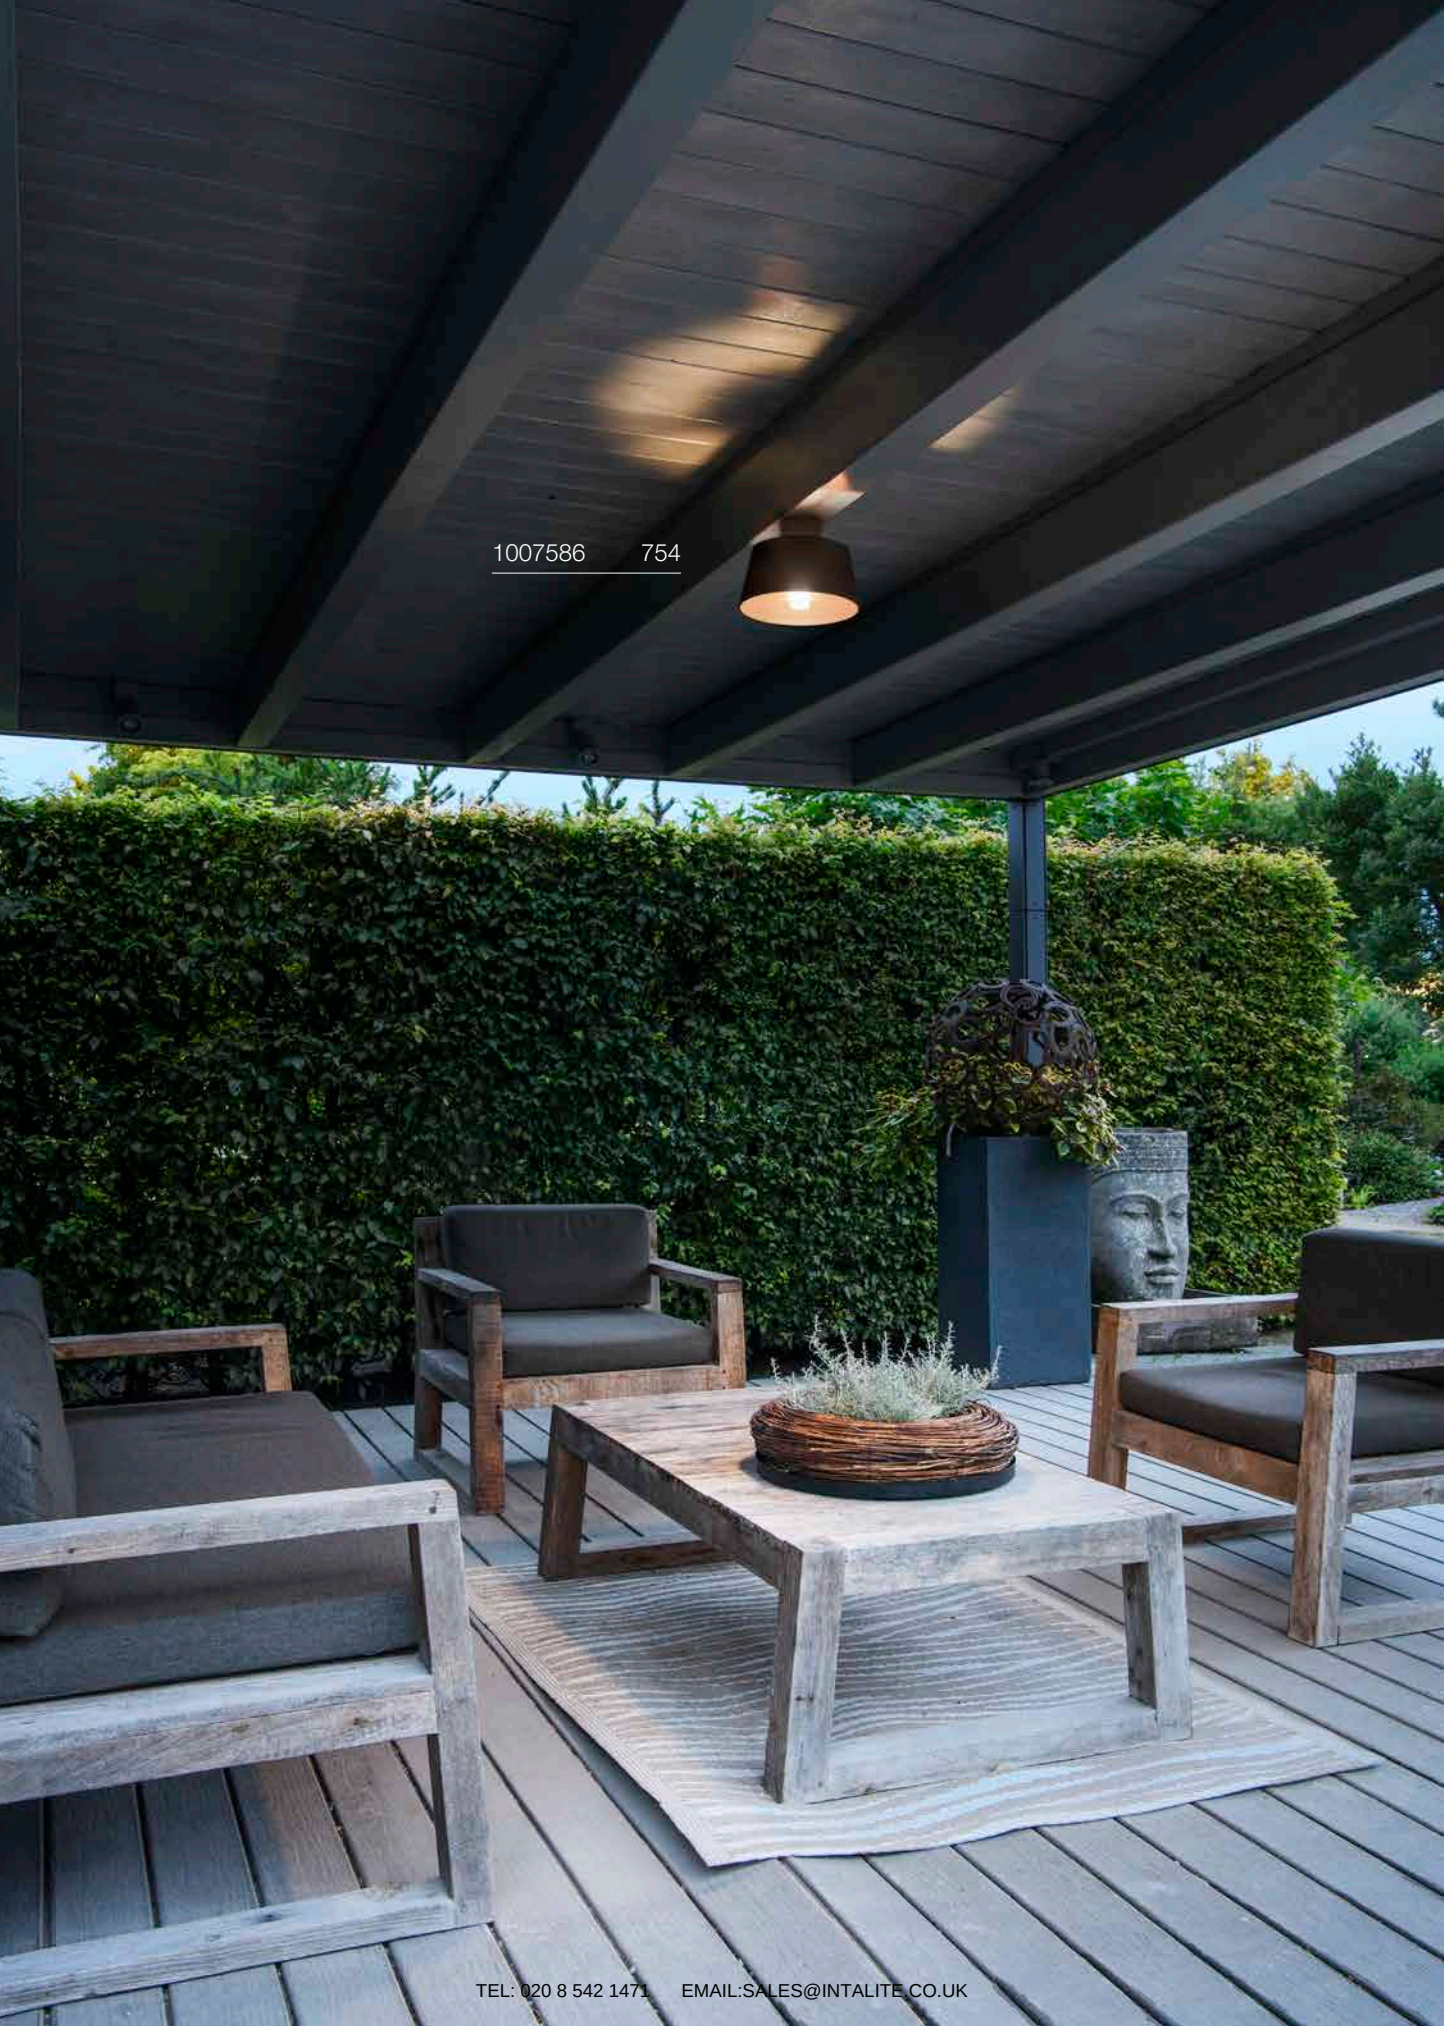

# OUTDOOR | CEILING LIGHTS



|                                                                                                                                                                                                                         |                                                                                                                                                                                                                              |                                                                                                                                                                                                                     |                                                                                                                                                                                                                     |                                                                                                                                                                                                                            |                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>  <br/>           PHOTONI CYL   754         </p>  |  <p>  <br/>           PHOTONI   754         </p>           |  <p>  <br/>           SEJERO   755         </p>   |  <p>  <br/>           CUBE   757         </p>     |  <p>  <br/>           ESKINA FRAME   757         </p> |  <p>  <br/>           ENOLA® OCULUS   758         </p> |
|  <p>  <br/>           ENOLA® ROUND   759         </p> |  <p>  <br/>           ENOLA® SQUARE   760-761         </p> |  <p>  <br/>           BIG THEO   761         </p> |  <p>  <br/>           OVALISK   763         </p> |  <p>  <br/>           MOLAT   763         </p>       |                                                                                                                                                                                                                              |
|  <p>  <br/>           SITRA   765         </p>     |  <p>  <br/>           ROX   765         </p>            |                                                                                                                                   |                                                                                                                                                                                                                     |                                                                                                                                                                                                                            |                                                                                                                                                                                                                              |



PHOTONI CYL  
CL, E27



PHOTONI  
CL, E27



220-240 V ~50/60 Hz  
Material: Aluminium

- Sea-air resistant



220-240 V ~50/60 Hz  
Material: Aluminium

- Sea-air resistant



Base: 1xE27      max. Ø: 6 cm      L: 11.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008199   | 85.00 |
| ● Rust  | 1008200   | 85.00 |



Base: 1xE27      max. Ø: 6 cm      L: 11.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007586   | 85.00 |
| ● Rust  | 1007582   | 85.00 |



E27 | 4 W | 280°  
830 lm | 2700 K | EEC = A



Prod. no.:      1008641      7.00 GBP



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no.:      1005289      10.00 GBP



## SEJERO


PD, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

## SEJERO

PD, E27

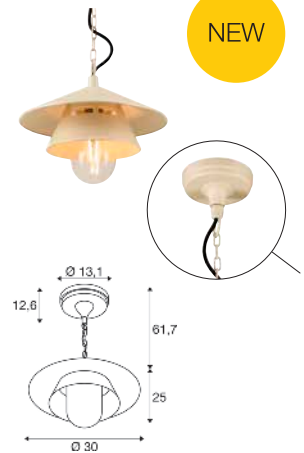

220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xE27 max. Ø: 6.5 cm | L: 12 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1011025   | 176.00 |



Base: 1xE27 max. Ø: 6.5 cm | L: 12 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● beige | 1011026   | 176.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F




Prod. no.: 1005303 9.00 GBP



1007461 757



## CUBE CL, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium


- The light colour must be set prior to installation



| 2700 K  | 3000 K  |
|---------|---------|
| 1000 lm | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1007461   | 118.00 |

## ESKINA FRAME CL, SINGLE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium/Glass


- The light colour must be set prior to installation
- Light head is pivoting



| Direct | 3000 K  | 4000 K  |
|--------|---------|---------|
|        | 1100 lm | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1006316   | 159.00 |

# ENOLA® OCULUS CL



1003427 759



220-240 V ~50/60 Hz | 500 mA

Total wattage: 10.3 W

Material: Aluminium/Glass

- The light colour must be set prior to installation



|         |         |
|---------|---------|
| 3000 K  | 4000 K  |
| 1050 lm | 1130 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1006327   | 205.00 |




| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Spacer       |           |      |
| ● Anthracite | 1003479   | 9.00 |





## ENOLA® ROUND S CL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation




| 3000 K | 4000 K |
|--------|--------|
| 610 lm | 720 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1003426   | 151.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Spacer            |           |       |
| ● Anthracite      | 1003479   | 9.00  |
| Lens 19°          |           |       |
| ● black           | 1005205   | 37.00 |
| Asymmetrical lens |           |       |
| ● black/chrome    | 1005206   | 37.00 |
| Reflector 60°     |           |       |
| ● chrome          | 1005207   | 22.00 |

## ENOLA® ROUND M CL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 10.5 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories




| 3000 K  | 4000 K  |
|---------|---------|
| 1010 lm | 1050 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1003427   | 189.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Spacer            |           |       |
| ● Anthracite      | 1003479   | 9.00  |
| Lens 19°          |           |       |
| ● black           | 1005205   | 37.00 |
| Asymmetrical lens |           |       |
| ● black/chrome    | 1005206   | 37.00 |
| Reflector 60°     |           |       |
| ● chrome          | 1005207   | 22.00 |

## ENOLA® ROUND L CL



220-240 V ~50/60 Hz | 900 mA  
Total wattage: 36 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory




| 3000 K  | 4000 K  |
|---------|---------|
| 3380 lm | 3770 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1003442   | 268.00 |




| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Spacer        |           |       |
| ● Anthracite  | 1003479   | 9.00  |
| Reflector 60° |           |       |
| ● chrome      | 1005263   | 20.00 |

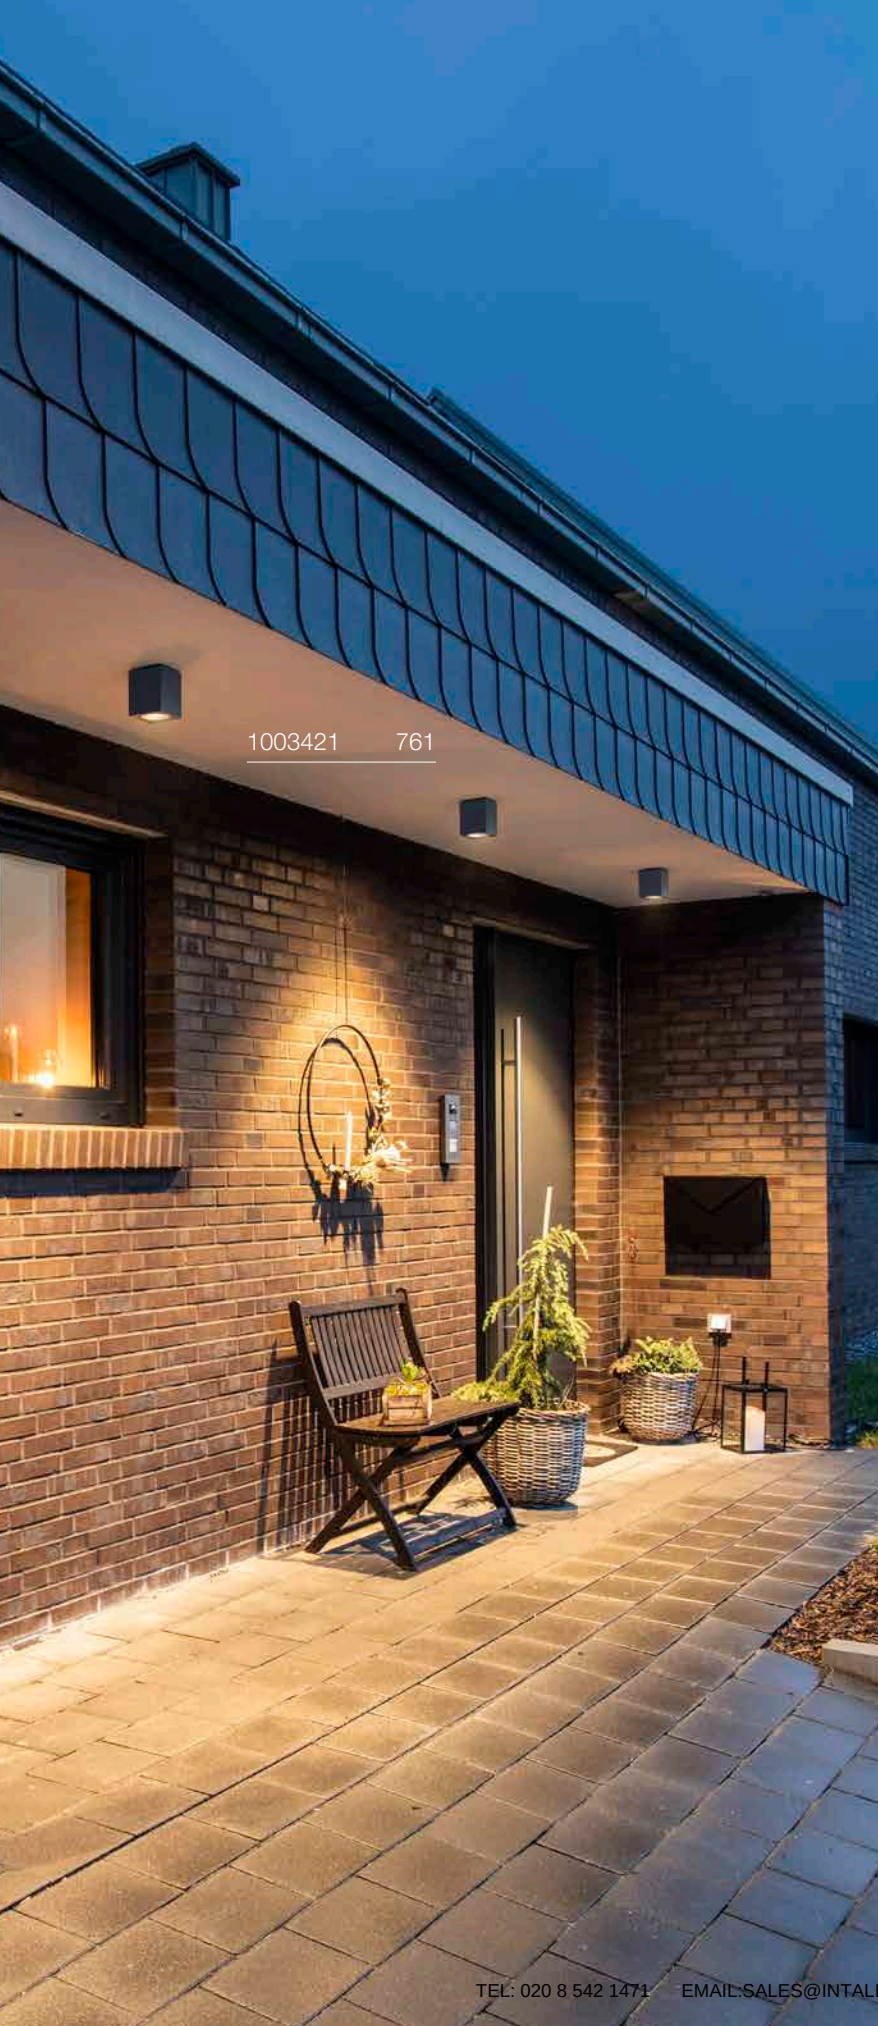

1003421 761

## ENOLA® SQUARE S CL



220-240 V ~50/60 Hz | 500 mA

Total wattage: 9 W

Material: Aluminium/Glass

- The light colour must be set prior to installation



|        |        |
|--------|--------|
| 3000 K | 4000 K |
| 610 lm | 720 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1003420   | 151.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Spacer            |           |       |
| ● Anthracite      | 1003479   | 9.00  |
| Lens 19°          |           |       |
| ● black           | 1005205   | 37.00 |
| Asymmetrical lens |           |       |
| ● black/chrome    | 1005206   | 37.00 |
| Reflector 60°     |           |       |
| ● chrome          | 1005207   | 22.00 |



## ENOLA® SQUARE M CL

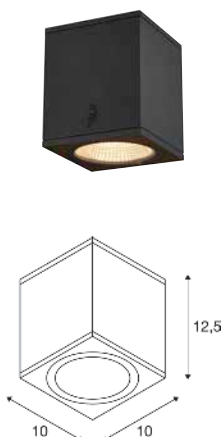

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 10.5 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories




3000 K    4000 K  
1010 lm    1050 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1003421   | 189.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Spacer            |           |       |
| ● Anthracite      | 1003479   | 9.00  |
| Lens 19°          |           |       |
| ● black           | 1005205   | 37.00 |
| Asymmetrical lens |           |       |
| ● black/chrome    | 1005206   | 37.00 |
| Reflector 60°     |           |       |
| ● chrome          | 1005207   | 22.00 |

## BIG THEO CL

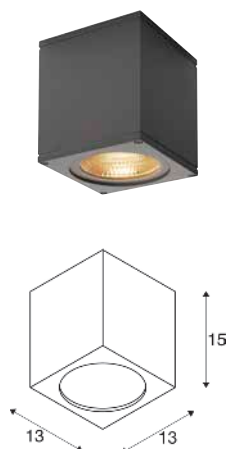


100-277 V ~50/60 Hz | 500 mA  
Total wattage: 21 W  
Material: Aluminium/Glass



3000 K  
2000 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 234535    | 180.00 |

## BIG THEO CL, QPAR111

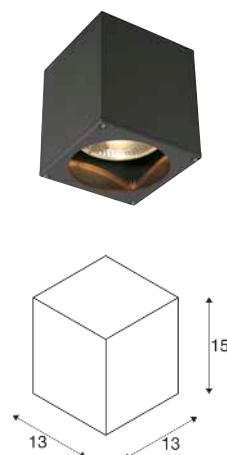

220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xGU10

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 229555    | 109.00 |
| ○ white      | 229551    | 109.00 |
| ● grey       | 229554    | 109.00 |



GU10 | 13 W | 12°  
650 lm | 3000 K | EEC = F




Prod. no.: 1005278 48.00 GBP



1004677 763



## OVALISK CL



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 7.9 W  
Material: Aluminium/Glass


- The light colour must be set prior to installation



|  | 3000 K | 4000 K |
|--|--------|--------|
|  | 540 lm | 570 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1004677   | 241.00 |

## MOLAT CL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xE27 max. Ø: 6.5 cm | L: 14.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● Anthracite | 1000823   | 113.00 |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F



Prod. no.: 1005265 23.00 GBP




1000339 765



## SITRA


CL, TCR-TSE



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

## ROX


CL, QPAR111



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

## ROX

CL, GX53



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xG53 max. Ø: 7.5 cm | L: 3.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● Anthracite | 231545    | 77.00 |
| ○ white      | 231541    | 77.00 |



GX53 | 6 W | 120°  
490 lm | 2700 K | EEC = G



Prod. no.: 1005272 10.00 GBP



Base: 1xGU10

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| ● aluminium | 1000332   | 113.00 |



GU10 | 13 W | 12°  
650 lm | 3000 K | EEC = F



Prod. no.: 1005278 48.00 GBP



Base: 1xG53 max. Ø: 7.5 cm | L: 3.5 cm

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| ● aluminium | 1000339   | 142.00 |



GX53 | 6 W | 120°  
490 lm | 3000 K | EEC = G



Prod. no.: 1005271 10.00 GBP





# OUTDOOR | WALL AND CEILING LIGHTS



SECKET

SEJERO | 771



LED

ALEGRIA | 773



LED

AINOS SLIDE | 774-775



LED

QUADRASYL PRO | 777



LED

S-CUBE | 778



LED

R-CUBE | 778



LED

MODELA | 778



SECKET

PHOTONI CYL | 779



SECKET

PHOTONI | 779




LED

LID I | 780-781



LED

LID II | 781



LED

Q-RING | 782



LED

I-RING | 783



LED

D-RING | 783



LED

OVAL | 784



LED

CONCRETO | 785



LED

RASTERLYS | 787



SECKET

T-TUBE | 788-789



SECKET

S-TUBE | 791



LED

FLATT II | 793



LED

FLATT | 794



SECKET

THEO UP/DOWN | 795



LED

BIG THEO | 795-796



SECKET

THEO | 796



LED

BIG THEO FLOOD



LED

BIG THEO | 797



LED

THEO PRO | 798-801



LED

HELIA PRO | 802-805



LED

SITRA | 807-809



SECKET

SITRA CUBE | 809



LED

BIG QUAD | 810



LED  
QUAD | 811



LED  
RUSTY® UP/DOWN | 812



LED  
ENOLA® OCULUS | 813



LED  
ENOLA® ROUND |  
816-817



LED  
ENOLA® SQUARE |  
818-819



SECKET  
GRAFIT | 822-823



SECKET  
SQUARE | 824



LED  
SECKET  
QUADRULO | 824-825




SECKET  
MERIDIAN | 826



SECKET  
MERIDIAN BOX | 827



LED  
ESKINA FRAME | 829



LED  
BOOKAT | 830




LED  
TAHA II | 830



LED  
OVALISK SENSOR |  
831



LED  
SECKET  
PEMA® | 832-833



SECKET  
ASTINA | 834



SECKET  
ASTINA STEEL | 834



LED  
ANGOLUX | 835



LED  
VILUA | 837



SECKET  
MYRA UP/DOWN | 839



SECKET  
SITRA | 839



SECKET  
ROX | 840



LED  
DELWA | 840



SECKET  
WALLYX | 840



LED  
DOWNUNDER OUT | 841



LED  
ABRIDOR | 843



LED  
ORDI | 844

NEW



LED  
ORDI II | 845





LED  
SCKET

BOX-L | 846



SCKET

BOX | 846



LED

LOGS | 487



LED

OUT-BEAM UP/  
FLOOD DOWN | 847



LED

L-LINE OUT | 847



SCKET

PHOTONIA | 848



SCKET

MOLAT | 848



SCKET

GLOO PURE | 848



SCKET

F-POL | 849




LED

IPERI | 849



SCKET

QUADRASYL | 849



SCKET

SQUARE TURN | 850



LED

TODAY PRO | 850



LED

ESKINA D | 851



SCKET

MYRA DISPLAY | 851



SCKET

MYRA | 851



LED

LED SPOT | 853



SCKET

NAUTILUS | 853



SCKET

MYRA | 853



LED

ESKINA SPOT | 855



SCKET

SITRA 360 | 856



SCKET

THEO BRACKET | 856



LED

HELIA | 857



LED

AINOS | 858-859



LED

TERANG 200 | 861



SCKET

BULAN | 861



SCKET


BULAN GRID | 861

1011021 771






## SEJERO WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

## SEJERO WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xE27 max. Ø: 6.5 cm | L: 12 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1011021   | 159.00 |



Base: 1xE27 max. Ø: 6.5 cm | L: 12 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● beige | 1011022   | 159.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP

1012140 773





## ALEGRIA

### WL, TRIAC

NEW



220-240 V ~50/60 Hz | 160 mA

Total wattage: 9 W

Material: Aluminium/Plastic PC

- 10° accent light combined with 120° general lighting.



|      |        |        |
|------|--------|--------|
| Up   | 2200 K | 2700 K |
|      | 5 lm   | 5 lm   |
| Down | 2200 K | 2700 K |
|      | 495 lm | 545 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1012140 ● | 172.00 |






1011263 775

## AINOS SLIDE WL, SQUARE, PHASE



NEW



220-240 V ~0/50/60 Hz | 350 mA

Total wattage: 11 W

Material: Aluminium/Plastic PC

LED  
INSIDE

CCT

CRI  
80

|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 900 lm | 950 lm |


| Variant | Prod. no. | GBP      |
|---------|-----------|----------|
| ● black | 1011260   | ● 172.00 |



## AINOS SLIDE WL, ROUND, PHASE



NEW



220-240 V ~0/50/60 Hz | 350 mA  
Total wattage: 11 W  
Material: Aluminium/Plastic PC




|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 850 lm | 900 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011261   | 172.00 |

## AINOS SLIDE WL, SQUARE, SENSOR



NEW



220-240 V ~0/50/60 Hz | 350 mA  
Total wattage: 11.5W  
Material: Aluminium/Plastic PC




|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 900 lm | 950 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011262   | 205.00 |

## AINOS SLIDE WL, ROUND, SENSOR



NEW



220-240 V ~0/50/60 Hz | 350 mA  
Total wattage: 11.5W  
Material: Aluminium/Plastic PC



|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 850 lm | 900 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1011263   | 205.00 |





10121444 777



## QUADRASYL PRO


WL, SINGLE, DALI, ASYM

## QUADRASYL PRO


WL, UP/DOWN, DALI



NEW



NEW



100-240 V ~50/60 Hz | 300 mA  
Total wattage: 12 W  
Material: Aluminium/Glass

- Asymmetrical light distribution for targeted illumination of driveways and access routes along façades or walls



100-240 V ~50/60 Hz | 300 mA  
Total wattage: 12 W  
Material: Aluminium/Glass



|         |        |         |
|---------|--------|---------|
| 1012147 | 2200 K | 2700 K  |
|         | 850 lm | 1200 lm |
| 1012146 | 2200 K | 2700 K  |
|         | 750 lm | 1100 lm |


| Variant                | Prod. no. | GBP    |
|------------------------|-----------|--------|
| ● anthracite<br>750 lm | 1012146   | 172.00 |
| ○ white<br>850 lm      | 1012147   | 172.00 |



|      |        |        |
|------|--------|--------|
| Up   | 2200 K | 2700 K |
|      | 500 lm | 650 lm |
| Down | 2200 K | 2700 K |
|      | 500 lm | 650 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1012144   | 197.00 |
| ○ white      | 1012145   | 197.00 |

S-CUBE  
CW, PHASE

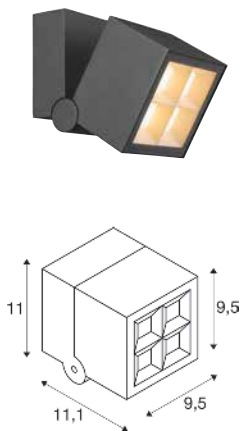

220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium


- The light colour must be set prior to installation



| 2700 K  | 3000 K  |
|---------|---------|
| 1000 lm | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007458   | 135.00 |

R-CUBE  
WL, PHASE

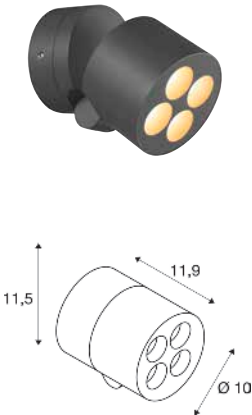

220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium

- The light colour must be set prior to installation



| 2700 K | 3000 K |
|--------|--------|
| 800 lm | 800 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007511   | 135.00 |

MODELA  
WL, UP/DOWN, PHASE



220-240 V ~50/60 Hz | 95 mA  
Total wattage: 7.5 W  
Material: Aluminium

- The light colour must be set prior to installation




|                    |      |        |
|--------------------|------|--------|
| 1007808            | Up   | 2700 K |
|                    |      | 385 lm |
|                    | Down | 2700 K |
|                    |      | 385 lm |
|                    |      |        |
| 1007807<br>1007806 | Up   | 2700 K |
|                    |      | 405 lm |
|                    | Down | 2700 K |
|                    |      | 405 lm |
|                    |      |        |
| 1007809            | Up   | 2700 K |
|                    |      | 400 lm |
|                    | Down | 2700 K |
|                    |      | 400 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● black/gold | 1007807   | 128.00 |
| ● black      | 1007808   | 128.00 |
| ● white/gold | 1007806   | 128.00 |
| ○ white      | 1007809   | 128.00 |






## PHOTONI CYL WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium

## PHOTONI WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xE27 max. Ø: 6 cm | L: 11.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008197   | 85.00 |
| ● rust  | 1008198   | 85.00 |



Base: 1xE27 max. Ø: 6 cm | L: 11.6 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007585   | 85.00 |
| ● rust  | 1007581   | 85.00 |



E27 | 8 W | 180°  
720 lm | 2700 K | EEC = F



Prod. no. 1005305 17.00 GBP



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no. 1005289 10.00 GBP




E27 | 9 W | 200°  
806 lm | 2000 K-6500 K | EEC = F



Prod. no. 1012472 25.00 GBP



## LID I WL, SINGLE, PHASE



220-240 V ~50/60 Hz | 350 mA

Total wattage: 15 W

Material: Aluminium

- The light colour must be set prior to installation




|        |         |
|--------|---------|
| 2700 K | 3000 K  |
| 900 lm | 1050 lm |

1007281 781

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007667   | 127.00 |



## LID I WL, DOUBLE, PHASE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 29 W  
Material: Aluminium


- The light colour must be set prior to installation



|        |        |         |
|--------|--------|---------|
| Direct | 2700 K | 3000 K  |
|        | 850 lm | 1000 lm |
| Direct | 2700 K | 3000 K  |
|        | 850 lm | 1000 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007668   | 203.00 |

## LID II WL, SINGLE, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium


- The light colour must be set prior to installation



|        |        |
|--------|--------|
| 2700 K | 3000 K |
| 800 lm | 800 lm |

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1007282   | 97.00 |

## LID II WL, UP/DOWN, PHASE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 28 W  
Material: Aluminium

- The light colour must be set prior to installation



|      |        |        |
|------|--------|--------|
| Up   | 2700 K | 3000 K |
|      | 750 lm | 750 lm |
| Down | 2700 K | 3000 K |
|      | 750 lm | 750 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007281   | 114.00 |

Q-RING  
WL, PHASE




220-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium/Plastic



3000 K  
950 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007918   | 137.00 |
| ○ white | 1007919   | 137.00 |

Q-RING  
WL, SENSOR

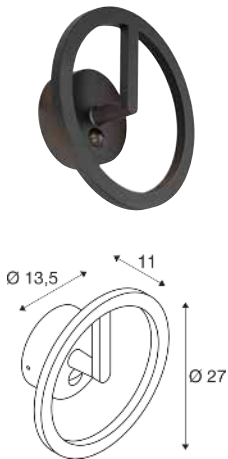

220-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium/Plastic




3000 K  
950 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007916   | 154.00 |
| ○ white | 1007917   | 154.00 |



## I-RING WL




100-240 V ~50/60 Hz | 350 mA  
Total wattage: 9.2 W  
Material: Aluminium



3000 K  
670 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1007236   | 141.00 |

## D-RING S WL, PHASE



220-240 V ~50/60 Hz | 95 mA  
Total wattage: 7.5 W  
Material: Aluminium


- The light colour must be set prior to installation



|         |        |        |
|---------|--------|--------|
| 1007912 | 2700 K | 3000 K |
|         | 790 lm | 820 lm |
| 1007911 | 2700 K | 3000 K |
|         | 630 lm | 650 lm |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007911   | 85.00 |
| ○ white | 1007912   | 85.00 |

## D-RING M WL, PHASE



220-240 V ~50/60 Hz | 190 mA  
Total wattage: 15 W  
Material: Aluminium

- The light colour must be set prior to installation




|         |         |         |
|---------|---------|---------|
| 1007914 | 2700 K  | 3000 K  |
|         | 1540 lm | 1590 lm |
| 1007913 | 2700 K  | 3000 K  |
|         | 1260 lm | 1360 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1007913   | 128.00 |
| ○ white | 1007914   | 128.00 |



OVAL 14  
WL, UP/DOWN



220-240 V ~50/60 Hz | 145 mA  
Total wattage: 5.7 W  
Material: Aluminium/Polycarbonate (PC)


- The light colour must be set prior to installation



|      |        |        |
|------|--------|--------|
| Up   | 2700 K | 3000 K |
|      | 280 lm | 280 lm |
| Down | 2700 K | 3000 K |
|      | 280 lm | 280 lm |

| Variant         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| ● black/frosted | 1007142   | 64.00 |
| ○ white/frosted | 1007143   | 64.00 |

OVAL 18  
WL, UP/DOWN



220-240 V ~50/60 Hz | 275 mA  
Total wattage: 9.3 W  
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation




|      |        |        |
|------|--------|--------|
| Up   | 2700 K | 3000 K |
|      | 430 lm | 430 lm |
| Down | 2700 K | 3000 K |
|      | 430 lm | 430 lm |

| Variant         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| ● black/frosted | 1007144   | 77.00 |
| ○ white/frosted | 1007145   | 77.00 |




## CONCRETO M WL



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 8.5 W  
Material: Concrete/Aluminium

## CONCRETO L WL



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 12 W  
Material: Concrete/Aluminium



3000 K  
270 lm




3000 K  
470 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 1006404   | 178.00 |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 1006405   | 229.00 |


1008384 787

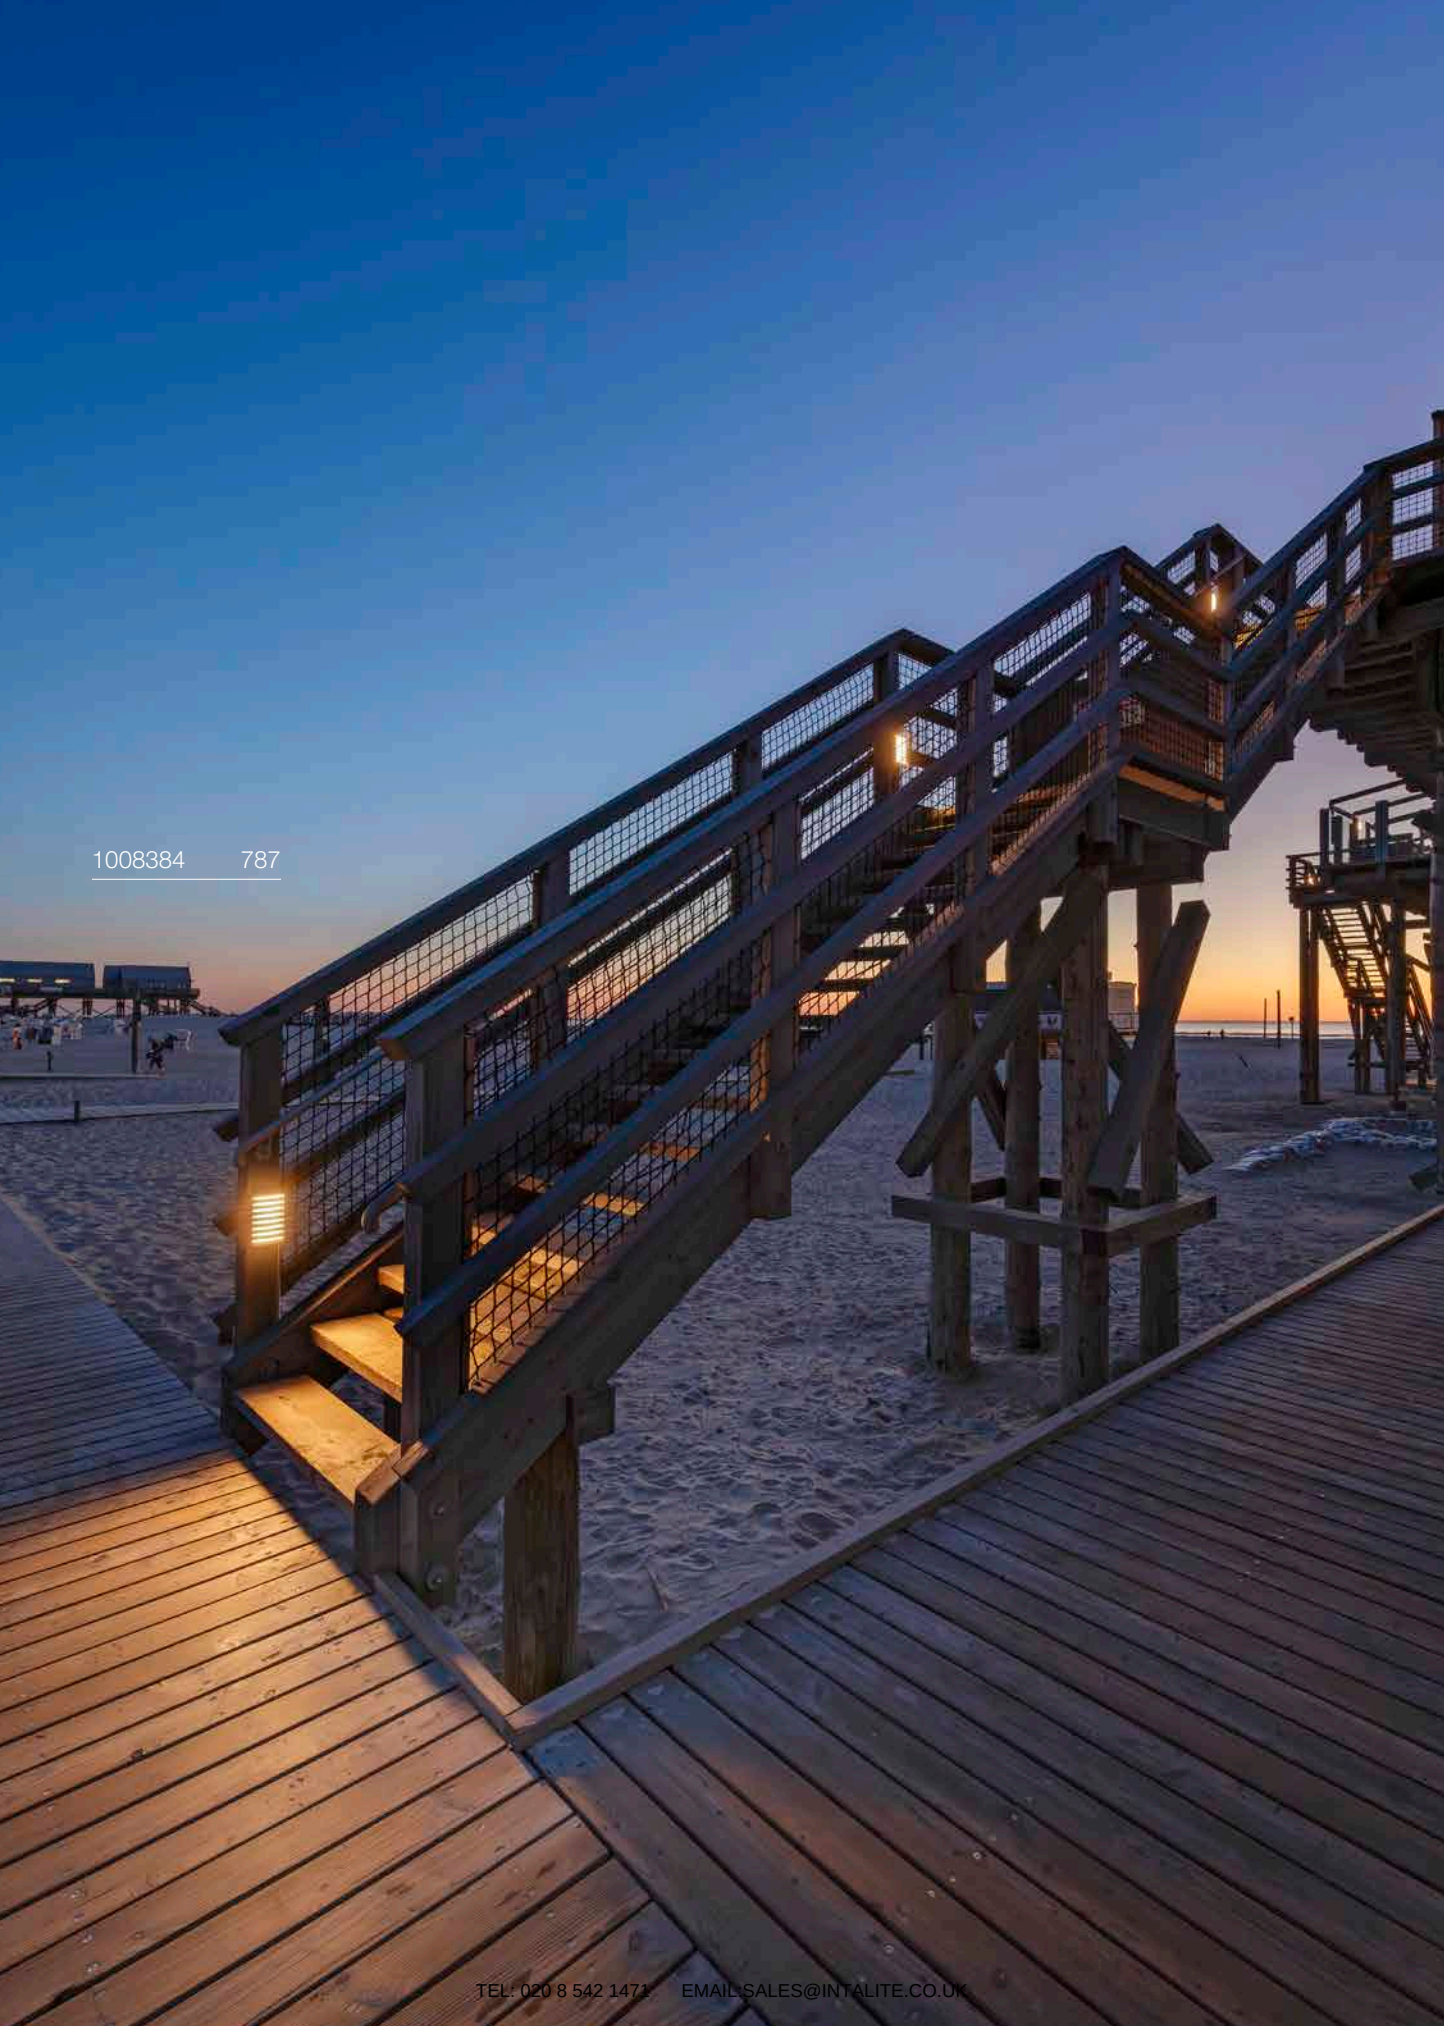




## RASTERLYS WL, PHASE

## RASTERLYS WL, UP/DOWN, PHASE



NEW



220-240 V ~0/50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: Aluminium

- The light colour must be set prior to installation
- Suitable for DC operation



220-240 V ~0/50/60 Hz | 350 mA  
Total wattage: 16 W  
Material: Aluminium/Glass



| 2700 K | 3000 K |
|--------|--------|
| 350 lm | 400 lm |



| Up   | 3000 K |
|------|--------|
|      | 450 lm |
| Down | 3000 K |
|      | 100 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1008384   | 154.00 |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1011020   | 151.00 |
| ● yellow     |           |        |





1008010 788

## T-TUBE WL GU10, SINGLE, SENSOR



220-240 V ~50/60 Hz

Material: Aluminium

- PIR sensor, adjustable range 10-2000 lx and 5 s-10 min. Detection range up to 8 m depending on the mounting height of the light



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008010   | 115.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G




Prod. no. 1012470 29.00 GBP






## T-TUBE WL GU10, DOUBLE, SENSOR



220-240 V ~50/60 Hz  
Material: Aluminium


- Lower luminaire head 90° - Upper luminaire head 180° swivelling
- PIR sensor, adjustable range 10-2000 lx and 5 s-10 min. Detection range up to 8 m depending on the mounting height of the light

## T-TUBE WL GU10, SINGLE



220-240 V ~50/60 Hz  
Material: Aluminium

## T-TUBE WL GU10, DOUBLE



220-240 V ~50/60 Hz  
Material: Aluminium

- Lower luminaire head 90° - Upper luminaire head 180° swivelling



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008011   | 141.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008012   | 94.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008013   | 128.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G



Prod. no. 1012470 29.00 GBP



GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G




Prod. no. 1012470 29.00 GBP



1007653 791



## S-TUBE CW



220-240 V ~50/60 Hz

Material: Aluminium

- Streamlined design



Base: 1xGU10

max. Ø: 5.1 cm

L: 5.5 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1007653   | 88.00 |



GU10 | 2 W | 36°

230 lm | 2700 K | EEC = E



Prod. no. 1007230 5.00 GBP



1010107 793






## FLATT II


WL, UP/DOWN, PHASE

## FLATT II

WL, UP/DOWN, SENSOR



220-240 V ~50/60 Hz | 240 mA  
Total wattage: 9.5 W  
Material: Aluminium



100-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium

- Primary and replica functionality. Option to control additional lights without a sensor.



|         |      |                  |
|---------|------|------------------|
| 1010102 | Up   | 2700 K<br>310 lm |
|         | Down | 2700 K<br>310 lm |
| 1010101 | Up   | 2700 K<br>320 lm |
|         | Down | 2700 K<br>320 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black            | 1010102   | 152.00 |
| ● anthracite/brown | 1010101   | 152.00 |




|         |      |                  |
|---------|------|------------------|
| 1010108 | Up   | 2700 K<br>310 lm |
|         | Down | 2700 K<br>310 lm |
| 1010107 | Up   | 2700 K<br>320 lm |
|         | Down | 2700 K<br>320 lm |

| Variant            | Prod. no. | GBP    |
|--------------------|-----------|--------|
| ● black            | 1010108   | 169.00 |
| ● anthracite/brown | 1010107   | 169.00 |




## FLATT WL



100-240 V ~50/60 Hz | 300 mA  
Total wattage: 13 W  
Material: Aluminium

## FLATT SENSOR WL



100-240 V ~50/60 Hz | 300 mA  
Total wattage: 13 W  
Material: Aluminium

- PIR sensor, adjustable range 15-2000lx and 5 s-10 min. Detection range between 6-9 m depending on the mounting height of the light



|         | 3000 K |  | 4000 K |  |
|---------|--------|--|--------|--|
|         | 500 lm |  | 550 lm |  |
| 1002953 |        |  |        |  |
| 1002952 |        |  |        |  |

| Variant                      | Prod. no. | GBP    |
|------------------------------|-----------|--------|
| ● anthracite<br>500 lm       | 1002952   | 152.00 |
| ● anthracite/brown<br>500 lm | 1002953   | 152.00 |




|         | 3000 K |  | 4000 K |  |
|---------|--------|--|--------|--|
|         | 500 lm |  | 550 lm |  |
| 1002955 |        |  |        |  |
| 1002954 |        |  |        |  |

| Variant                      | Prod. no. | GBP    |
|------------------------------|-----------|--------|
| ● anthracite<br>500 lm       | 1002954   | 186.00 |
| ● anthracite/brown<br>500 lm | 1002955   | 186.00 |




## THEO UP/DOWN WL, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

## BIG THEO WL, BEAM UP FLOOD DOWN



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 29 W  
Material: Aluminium/Glass

- The 2° light effect is particularly suitable for contouring and structuring high surfaces and building facades such as hotels, restaurants or even apartment blocks and shopping centres.



Base: 2xGU10



|      |         |
|------|---------|
| Down | 3000 K  |
|      | 2000 lm |
| Up   | 3000 K  |
|      | 130 lm  |

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 229535    | 77.00 |
| ○ white      | 229531    | 77.00 |
| ● grey       | 229532    | 77.00 |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 234515    | 239.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP




GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G



Prod. no. 1012470 29.00 GBP

# BIG THEO UP/DOWN

WL, QPAR111

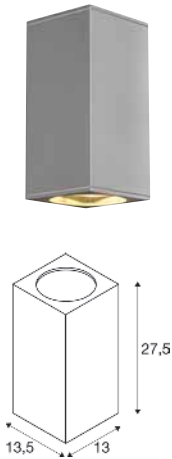


220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 2xGU10


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 229575    | 155.00 |
| ● grey       | 229574    | 155.00 |



Prod. no. 1005278 48.00 GBP

# THEO

WL, QPAR51




220-240 V ~50/60 Hz  
Material: Aluminium/Glass




Base: 1xGU10

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 229525    | 64.00 |
| ● grey       | 229524    | 64.00 |




Prod. no. 1005077 7.00 GBP



Prod. no. 1012470 29.00 GBP

# BIG THEO FLOOD

WL, UP/DOWN

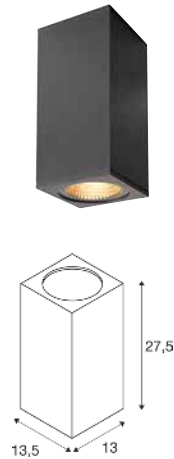

220-240 V ~50/60 Hz | 1000 mA  
Total wattage: 42 W  
Material: Aluminium/Glass



|      |                   |
|------|-------------------|
| Up   | 3000 K<br>2000 lm |
| Down | 3000 K<br>2000 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 234505    | 273.00 |






## BIG THEO

WL, QPAR111

## BIG THEO

WL



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



100-277 V ~50/60 Hz | 500 mA  
Total wattage: 21 W  
Material: Aluminium/Glass



Base: 1xGU10



3000 K  
2000 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 229565    | 100.00 |
| ● grey       | 229564    | 100.00 |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 234525    | 193.00 |




GU10 | 13 W | 12°  
650 lm | 3000 K | EEC = F



Prod. no. 1005278 48.00 GBP

## THEO PRO S WL, SINGLE, DALI P1



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 3 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version




Down ————— 2700 K  
300 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010177   | 138.00 |
| ○ white      | 1010178   | 138.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector S 10° |           |      |
| ● chrome        | 1010939   | 5.00 |

## THEO PRO S WL, UP/DOWN, DALI P1



220-240 V ~50/60 Hz | 400 mA  
Total wattage: 6 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



Up ————— 2700 K  
300 lm


Down ————— 2700 K  
300 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010179   | 151.00 |
| ○ white      | 1010180   | 151.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector S 10° |           |      |
| ● chrome        | 1010939   | 5.00 |

## THEO PRO S WL, SINGLE, DALI P2



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 6 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



Down ————— 2700 K  
600 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010181   | 147.00 |
| ○ white      | 1010182   | 147.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector S 10° |           |      |
| ● chrome        | 1010939   | 5.00 |





## THEO PRO S

WL, UP/DOWN, DALI P2



220-240 V ~50/60 Hz | 300 mA  
Total wattage: 12 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



|      |                  |
|------|------------------|
| Up   | 2700 K<br>600 lm |
| Down | 2700 K<br>600 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010183   | 163.00 |
| ○ white      | 1010184   | 163.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector S 10° |           |      |
| ● chrome        | 1010939   | 5.00 |

## THEO PRO L

WL, SINGLE, DALI P1

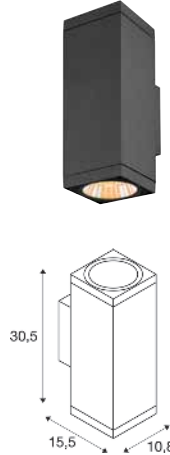

220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



|      |                   |
|------|-------------------|
| Down | 2700 K<br>1200 lm |
|------|-------------------|



| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010185   | 193.00 |
| ○ white      | 1010186   | 193.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector L 10° |           |      |
| ● chrome        | 1010940   | 7.00 |

## THEO PRO L

WL, UP/DOWN, DALI P1

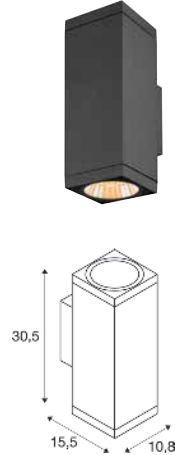

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



|      |                   |
|------|-------------------|
| Up   | 2700 K<br>1200 lm |
| Down | 2700 K<br>1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010187   | 210.00 |
| ○ white      | 1010188   | 210.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector L 10° |           |      |
| ● chrome        | 1010940   | 7.00 |



1010191 801



## THEO PRO L WL, SINGLE, DALI P2



220-240 V ~50/60 Hz | 400 mA  
Total wattage: 15 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version





Down ————— 2700 K  
1800 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010189   | 226.00 |
| ○ white      | 1010190   | 226.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector L 10° |           |      |
| ● chrome        | 1010940   | 7.00 |

## THEO PRO L WL, UP/DOWN, DALI P2

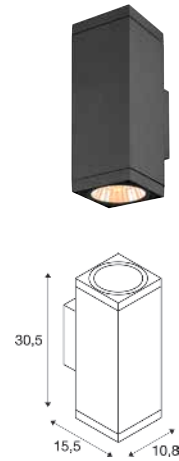

220-240 V ~50/60 Hz | 800 mA  
Total wattage: 30 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



Up ————— 2700 K  
1800 lm


Down ————— 2700 K  
1800 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010191   | 243.00 |
| ○ white      | 1010192   | 243.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector L 10° |           |      |
| ● chrome        | 1010940   | 7.00 |

HELIA PRO S  
WL, SINGLE, DALI P1



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 3 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version




Down      2700 K  
                 300 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010161   | 130.00 |
| ○ white      | 1010162   | 130.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector S 10° |           |      |
| ● chrome        | 1010939   | 5.00 |

HELIA PRO S  
WL, UP/DOWN, DALI P1



220-240 V ~50/60 Hz | 400 mA  
Total wattage: 6 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



Up      2700 K  
                 300 lm

Down      2700 K  
                 300 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010163   | 142.00 |
| ○ white      | 1010164   | 142.00 |




| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector S 10° |           |      |
| ● chrome        | 1010939   | 5.00 |



## HELIA PRO S

WL, SINGLE, DALI P2



220-240 V ~50/60 Hz | 150 mA  
Total wattage: 6 W  
Material: Aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



Down 2700 K  
600 lm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010165   | 138.00 |
| ○ white      | 1010166   | 138.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector S 10° |           |      |
| ● chrome        | 1010939   | 5.00 |

## HELIA PRO S

WL, UP/DOWN, DALI P2



220-240 V ~50/60 Hz | 300 mA  
Total wattage: 12 W  
Material: Aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



Up 2700 K  
600 lm

Down 2700 K  
600 lm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010167   | 155.00 |
| ○ white      | 1010168   | 155.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector S 10° |           |      |
| ● chrome        | 1010939   | 5.00 |



HELIA PRO L  
WL, SINGLE, DALI P1

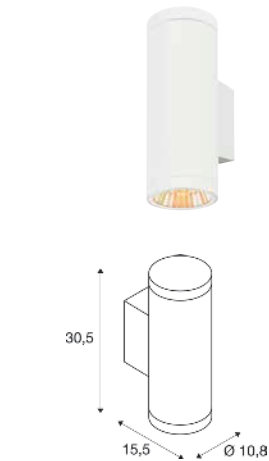

220-240 V ~50/60 Hz | 250 mA  
Total wattage: 10 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version




|      |         |
|------|---------|
| Down | 2700 K  |
|      | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010169   | 184.00 |
| ○ white      | 1010170   | 184.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector L 10° |           |      |
| ● chrome        | 1010940   | 7.00 |

HELIA PRO L  
WL, UP/DOWN, DALI P1

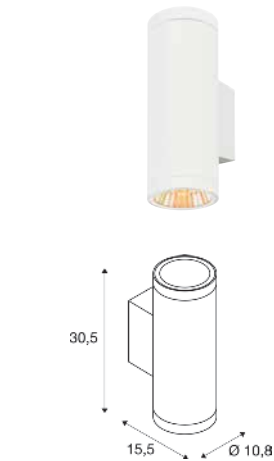

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



|      |         |
|------|---------|
| Up   | 2700 K  |
|      | 1200 lm |
| Down | 2700 K  |
|      | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010171   | 201.00 |
| ○ white      | 1010172   | 201.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector L 10° |           |      |
| ● chrome        | 1010940   | 7.00 |





## HELIA PRO L

WL, SINGLE, DALI P2

## HELIA PRO L

WL, UP/DOWN, DALI P2

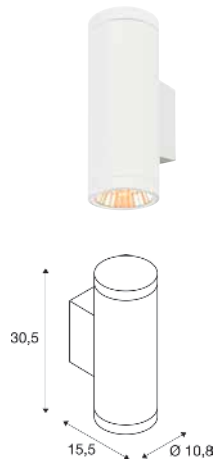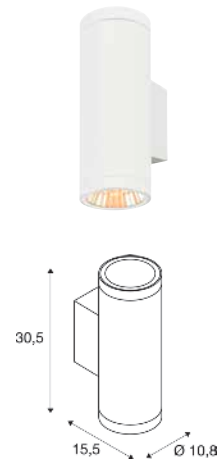

220-240 V ~50/60 Hz | 380 mA  
Total wattage: 15 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



220-240 V ~50/60 Hz | 800 mA  
Total wattage: 30 W  
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



Down ————— 2700 K  
1800 lm



Up ————— 2700 K  
1800 lm

Down ————— 2700 K  
1800 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010173   | 218.00 |
| ○ white      | 1010174   | 218.00 |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1010175   | 235.00 |
| ○ white      | 1010176   | 235.00 |



| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector L 10° |           |      |
| ● chrome        | 1010940   | 7.00 |




| Product         | Prod. no. | GBP  |
|-----------------|-----------|------|
| Reflector L 10° |           |      |
| ● chrome        | 1010940   | 7.00 |



1005149 807




## SITRA S WL, SINGLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 6.2 W  
Material: Aluminium

## SITRA S WL, UP/DOWN



100-277 V ~50/60 Hz | 500 mA  
Total wattage: 11 W  
Material: Aluminium



|  | 3000 K | 4000 K |
|--|--------|--------|
|  | 580 lm | 620 lm |

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1005148   | 85.00 |
| ○ white      | 1005149   | 85.00 |
| ● rust       | 1005150   | 85.00 |



|      | 3000 K           | 4000 K           |
|------|------------------|------------------|
| Up   | 550 lm           | 635 lm           |
| Down | 3000 K<br>550 lm | 4000 K<br>635 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002032   | 103.00 |
| ○ white      | 1002033   | 103.00 |
| ● rust       | 1002034   | 102.00 |



232535 809








## SITRA M

WL, UP/DOWN



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: Aluminium




|      |        |        |
|------|--------|--------|
| Up   | 3000 K | 4000 K |
|      | 850 lm | 940 lm |
| Down | 3000 K | 4000 K |
|      | 850 lm | 940 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1005151   | 124.00 |
| ○ white      | 1005153   | 124.00 |
| ● rust       | 1005154   | 124.00 |

## SITRA L

WL, UP/DOWN, SQUARE



220-240 V ~50/60 Hz | 600 mA  
Total wattage: 24 W  
Material: Aluminium




|      |         |         |
|------|---------|---------|
| Up   | 3000 K  | 4000 K  |
|      | 1400 lm | 1530 lm |
| Down | 3000 K  | 4000 K  |
|      | 1400 lm | 1530 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1005155   | 158.00 |
| ○ white      | 1005156   | 158.00 |
| ● rust       | 1005157   | 158.00 |

## SITRA CUBE

WL, TCR-TSE



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 2xG53 max. Ø: 7.5 cm | L: 2.7 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 232535    | 64.00 |
| ○ white      | 232531    | 64.00 |
| ● rust       | 232537    | 64.00 |




GX53 | 6 W | 120°  
490 lm | 2700 K | EEC = G



Prod. no.: 1005272 10.00 GBP

BIG QUAD  
WL

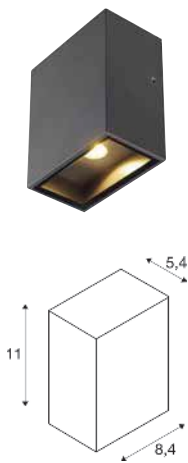



100-240 V ~50/60 Hz | 350 mA  
Total wattage: 4 W  
Material: Aluminium/Glass



|        |        |
|--------|--------|
| 232431 | 3000 K |
|        | 290 lm |
| 232435 | 3000 K |
|        | 260 lm |

| Variant                | Prod. no. | GBP    |
|------------------------|-----------|--------|
| ● anthracite<br>260 lm | 232435    | 105.00 |
| ○ white<br>290 lm      | 232431    | 105.00 |

BIG QUAD UP/DOWN  
WL

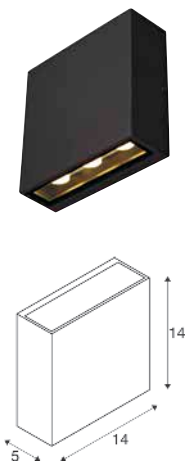

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 8.2 W  
Material: Aluminium/Glass




|      |        |
|------|--------|
| Up   | 3000 K |
|      | 320 lm |
| Down | 3000 K |
|      | 320 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1005126   | 147.00 |
| ○ white      | 1005125   | 147.00 |




## QUAD WL

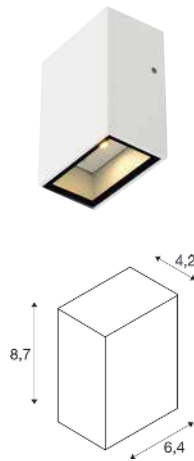

220-240 V ~50/60 Hz | 700 mA  
Total wattage: 4.6 W  
Material: Aluminium/Glass

## QUAD UP/DOWN 15 WL

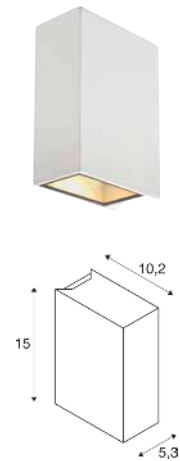

100-277 V ~50/60 Hz | 350 mA  
Total wattage: 8 W  
Material: Aluminium/Glass



|        |        |
|--------|--------|
| 232461 | 3000 K |
|        | 100 lm |
| 232465 | 3000 K |
|        | 80 lm  |


| Variant               | Prod. no. | GBP   |
|-----------------------|-----------|-------|
| ● anthracite<br>80 lm | 232465    | 73.00 |
| ○ white<br>100 lm     | 232461    | 73.00 |



|        |      |        |
|--------|------|--------|
| 232441 | Up   | 3000 K |
|        |      | 290 lm |
| 232445 | Down | 3000 K |
|        |      | 290 lm |
| 232445 | Up   | 3000 K |
|        |      | 260 lm |
| 232445 | Down | 3000 K |
|        |      | 260 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232445    | 113.00 |
| ○ white      | 232441    | 113.00 |

# RUSTY® UP/DOWN WL, SQUARE

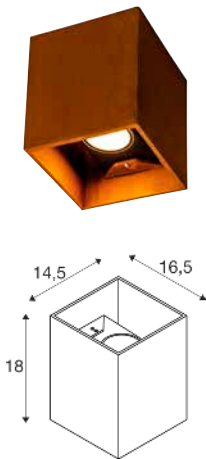

220-240 V ~50/60 Hz | 350 mA  
 Total wattage: 14 W  
 Material: FeCSi Steel/Aluminium

# RUSTY® UP/DOWN WL, ROUND

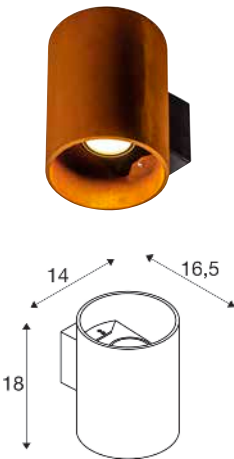

220-240 V ~50/60 Hz | 350 mA  
 Total wattage: 14 W  
 Material: FeCSi Steel/Aluminium



|      |        |        |
|------|--------|--------|
| Up   | 3000 K | 4000 K |
|      | 259 lm | 260 lm |
| Down | 3000 K | 4000 K |
|      | 285 lm | 288 lm |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● rust/anthracite | 1004650   | 239.00 |




|      |        |        |
|------|--------|--------|
| Up   | 3000 K | 4000 K |
|      | 249 lm | 254 lm |
| Down | 3000 K | 4000 K |
|      | 267 lm | 271 lm |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● rust/anthracite | 1004651   | 239.00 |



## ENOLA® OCULUS WL, SINGLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 10.5 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- The Oculus optic creates a contoured, clearly defined light effect on the respective surface




| 3000 K  | 4000 K  |
|---------|---------|
| 1070 lm | 1150 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006328   | 235.00 |



| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Spacer       |           |      |
| ● anthracite | 1002853   | 7.00 |

## ENOLA® OCULUS WL, UP/DOWN



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- The Oculus optic creates a contoured, clearly defined light effect on the respective surface



|      |        |         |
|------|--------|---------|
| Up   | 3000 K | 4000 K  |
|      | 940 lm | 1060 lm |
| Down | 3000 K | 4000 K  |
|      | 940 lm | 1060 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006329   | 298.00 |



| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Spacer       |           |      |
| ● anthracite | 1002853   | 7.00 |






1003440 816

1003441 817





## ENOLA® ROUND S WL, SINGLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 5.6 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory




| 3000 K | 4000 K |
|--------|--------|
| 530lm  | 570lm  |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003422   | 172.00 |



| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Spacer        |           |       |
| ● anthracite  | 1002853   | 7.00  |
| Reflector 60° |           |       |
| ● chrome      | 1005262   | 16.00 |

## ENOLA® ROUND M WL, SINGLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 10.5 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories




| 3000 K | 4000 K |
|--------|--------|
| 1010lm | 1090lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003423   | 210.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Spacer            |           |       |
| ● anthracite      | 1002853   | 7.00  |
| Lens 19°          |           |       |
| ● black           | 1005205   | 37.00 |
| Asymmetrical lens |           |       |
| ● black/chrome    | 1005206   | 37.00 |
| Reflector 60°     |           |       |
| ● chrome          | 1005207   | 22.00 |

## ENOLA® ROUND L WL, SINGLE



220-240 V ~50/60 Hz | 900 mA  
Total wattage: 36 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory



| 3000 K | 4000 K |
|--------|--------|
| 3380lm | 3770lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003440   | 294.00 |



| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Spacer        |           |       |
| ● anthracite  | 1002853   | 7.00  |
| Reflector 60° |           |       |
| ● chrome      | 1005263   | 20.00 |



## ENOLA® ROUND S WL, UP/DOWN



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 7.6 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation



|      |        |        |
|------|--------|--------|
| Up   | 3000 K | 4000 K |
|      | 380 lm | 400 lm |
| Down | 3000 K | 4000 K |
|      | 380 lm | 400 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003424   | 210.00 |



| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Spacer        |           |       |
| ● anthracite  | 1002853   | 7.00  |
| Reflector 60° |           |       |
| ● chrome      | 1005262   | 16.00 |

## ENOLA® ROUND M WL, UP/DOWN



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories



|      |        |         |
|------|--------|---------|
| Up   | 3000 K | 4000 K  |
|      | 925 lm | 1015 lm |
| Down | 3000 K | 4000 K  |
|      | 925 lm | 1015 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003425   | 260.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Spacer            |           |       |
| ● anthracite      | 1002853   | 7.00  |
| Lens 19°          |           |       |
| ● black           | 1005205   | 37.00 |
| Asymmetrical lens |           |       |
| ● black/chrome    | 1005206   | 37.00 |
| Reflector 60°     |           |       |
| ● chrome          | 1005207   | 22.00 |

## ENOLA® ROUND L WL, UP/DOWN



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 54 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory




|      |         |         |
|------|---------|---------|
| Up   | 3000 K  | 4000 K  |
|      | 2700 lm | 3000 lm |
| Down | 3000 K  | 4000 K  |
|      | 2700 lm | 3000 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003441   | 403.00 |



| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Spacer        |           |       |
| ● anthracite  | 1002853   | 7.00  |
| Reflector 60° |           |       |
| ● chrome      | 1005263   | 20.00 |

## ENOLA® SQUARE S WL, SINGLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 5.6 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory




| 3000 K | 4000 K |
|--------|--------|
| 530lm  | 570lm  |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003416   | 172.00 |



| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Spacer        |           |       |
| ● anthracite  | 1002853   | 7.00  |
| Reflector 60° |           |       |
| ● chrome      | 1005262   | 16.00 |

## ENOLA® SQUARE M WL, SINGLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 10.5 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories




| 3000 K | 4000 K |
|--------|--------|
| 1010lm | 1090lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003417   | 210.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Spacer            |           |       |
| ● anthracite      | 1002853   | 7.00  |
| Lens 19°          |           |       |
| ● black           | 1005205   | 37.00 |
| Asymmetrical lens |           |       |
| ● black/chrome    | 1005206   | 37.00 |
| Reflector 60°     |           |       |
| ● chrome          | 1005207   | 22.00 |

## ENOLA® SQUARE L WL, SINGLE



220-240 V ~50/60 Hz | 900 mA  
Total wattage: 36 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory



| 3000 K | 4000 K |
|--------|--------|
| 3380lm | 3770lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003437   | 294.00 |




| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Spacer        |           |       |
| ● anthracite  | 1002853   | 7.00  |
| Reflector 60° |           |       |
| ● chrome      | 1005263   | 20.00 |





## ENOLA® SQUARE S WL, UP/DOWN

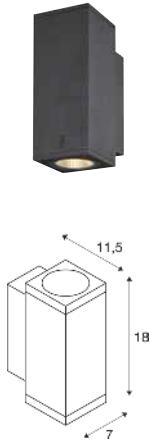

220-240 V ~50/60 Hz | 350 mA  
Total wattage: 7.6 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory




|      |        |        |
|------|--------|--------|
| Up   | 3000 K | 4000 K |
|      | 380 lm | 400 lm |
| Down | 3000 K | 4000 K |
|      | 380 lm | 400 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003418   | 210.00 |



| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Spacer        |           |       |
| ● anthracite  | 1002853   | 7.00  |
| Reflector 60° |           |       |
| ● chrome      | 1005262   | 16.00 |

## ENOLA® SQUARE M WL, UP/DOWN

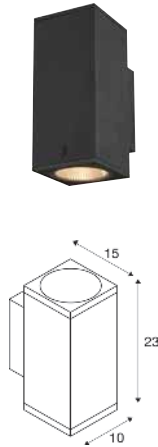

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 20 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories




|      |        |         |
|------|--------|---------|
| Up   | 3000 K | 4000 K  |
|      | 925 lm | 1015 lm |
| Down | 3000 K | 4000 K  |
|      | 925 lm | 1015 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003419   | 260.00 |



| Product           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| Spacer            |           |       |
| ● anthracite      | 1002853   | 7.00  |
| Lens 19°          |           |       |
| ● black           | 1005205   | 37.00 |
| Asymmetrical lens |           |       |
| ● black/chrome    | 1005206   | 37.00 |
| Reflector 60°     |           |       |
| ● chrome          | 1005207   | 22.00 |

## ENOLA® SQUARE L WL, UP/DOWN

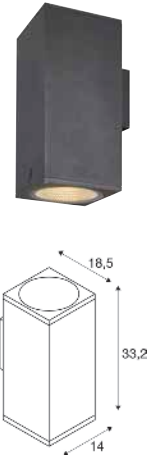

220-240 V ~50/60 Hz | 700 mA  
Total wattage: 55 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory



|      |         |         |
|------|---------|---------|
| UP   | 3000 K  | 4000 K  |
|      | 2700 lm | 3000 lm |
| Down | 3000 K  | 4000 K  |
|      | 2700 lm | 3000 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003438   | 403.00 |



| Product       | Prod. no. | GBP   |
|---------------|-----------|-------|
| Spacer        |           |       |
| ● anthracite  | 1002853   | 7.00  |
| Reflector 60° |           |       |
| ● chrome      | 1005263   | 20.00 |

1003441 817





## ENOLA® S/M/L REFLECTOR



**S** | H: 1.85 cm Ø: 4.5 cm  
**M** | H: 4 cm Ø: 7.5 cm  
**L** | H: 7 cm Ø: 11 cm  
 Material: Polycarbonate (PC)

| Variant             | Prod. no. | GBP   |
|---------------------|-----------|-------|
| ● chrome   <b>S</b> | 1005207   | 22.00 |
| ● chrome   <b>M</b> | 1005262   | 16.00 |
| ● chrome   <b>L</b> | 1005263   | 20.00 |

## ENOLA® M LENS 19°



Ø: 7.5 cm  
 H: 3.8 cm  
 Material: Steel/Polycarbonate (PC)

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1005205   | 37.00 |








231205 823

## GRAFIT WL, ROUND, SENSOR, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Acrylic

- PIR sensor, adjustable range 10-2000 lx and 8 s-8 min. Detection range between 6-10 m depending on the mounting height of the light



Base: 1xE27 max. Ø: 6 cm | L: 11.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1006179   | 79.00 |




E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



## GRAFIT WL, ROUND, E27

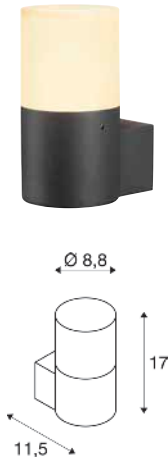

220-240 V ~50/60 Hz  
Material: Aluminium/Acrylic


## GRAFIT WL, SQUARE, SENSOR, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Acrylic

- PIR sensor, adjustable range 10-2000 lx and 8s-8min. Detection range between 6-10 m depending on the mounting height of the light

## GRAFIT WL, SQUARE, E27

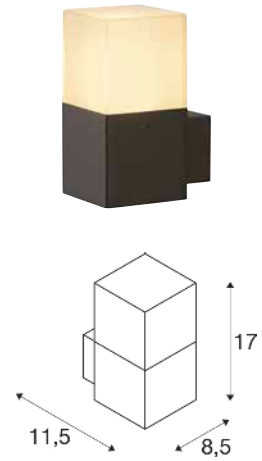

220-240 V ~50/60 Hz  
Material: Aluminium/Plastic



Base: 1xE27 max. Ø: 6 cm | L: 11.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1006178   | 70.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no. 1005303 9.00 GBP



Base: 1xE27 max. Ø: 6 cm | L: 11.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1006183   | 79.00 |



E27 | 13 W | 220°  
1300 lm | 2700 K | EEC = F



Prod. no.: 1005302 11.00 GBP



Base: 1xE27 max. Ø: 6 cm | L: 11.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 231205    | 70.00 |




E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F



Prod. no.: 1005303 9.00 GBP



## SQUARE WL, E27

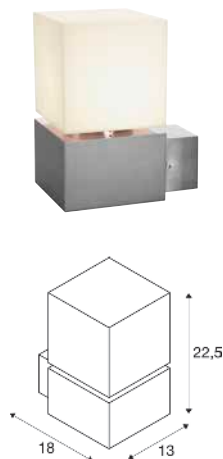

220-240 V ~50/60 Hz  
Material: Stainless Steel 304



Base: 1xE27 max. Ø: 7 cm | L: 13 cm

| Variant           | Prod. no.      | GBP           |
|-------------------|----------------|---------------|
| ● stainless steel | <b>1000336</b> | <b>193.00</b> |




E27 | 4 W | 280°  
830 lm | 2700 K | EEC = A



Prod. no. 1008641 7.00 GBP

## QUADRULO WL

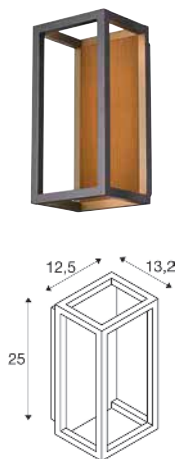

100-277 V ~50/60 Hz | 350 mA  
Total wattage: 7.4 W  
Material: Aluminium/Polyvinylchloride (PVC)



**1007207** 3000 K  
280 lm

**1005201** 3000 K  
270 lm

| Variant                      | Prod. no.      | GBP           |
|------------------------------|----------------|---------------|
| ● anthracite/brown<br>280 lm | <b>1007207</b> | <b>155.00</b> |
| ● anthracite<br>270 lm       | <b>1005201</b> | <b>142.00</b> |

## QUADRULO SENSOR WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

- PIR sensor, detection range up to 8 m depending on the mounting height of the light



Base: 1xE27 max. Ø: 8 cm | L: 18 cm

| Variant      | Prod. no.      | GBP           |
|--------------|----------------|---------------|
| ● anthracite | <b>1002402</b> | <b>147.00</b> |



E27 | 8 W | 320°  
700 lm | 2500 K | EEC = F




Prod. no. 1005265 23.00 GBP



Better value as a  
set at [slv.com](http://slv.com)




## QUADRULO WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

## QUADRULO CL



100-277 V ~50/60 Hz | 480 mA  
Total wattage: 7.5 W  
Material: Aluminium/Acrylic



Base: 1xE27 max. Ø: 8 cm | L: 18 cm



3000 K  
230 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002403   | 130.00 |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1005202   | 142.00 |



E27 | 8 W | 320°  
800 lm | 2700 K | EEC = F




Prod. no. 1005268 11.00 GBP



Better value as a  
set at [slv.com](http://slv.com)



## MERIDIAN WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)



Base: 1xE27      max. Ø: 7 cm | L: 17.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 230445    | 69.00 |
| ● grey       | 230444    | 69.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E




Prod. no.      1005289      10.00 GBP

230655      827



## MERIDIAN BOX

WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)



Base: 1xE27 max. Ø: 7 cm | L: 17.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 230045    | 88.00 |
| ● grey       | 230044    | 88.00 |




E27 | 14 W | 240°  
1520lm | 3000 K | EEC = E



Prod. no. 1005307 11.00 GBP

## MERIDIAN BOX

WL, E27, SENSOR



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)

- The ambient brightness and operating time can be adjusted.



Base: 1xE27 max. Ø: 7 cm | L: 17.5 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 230085    | 142.00 |




E27 | 8 W | 240°  
880lm | 3000 K | EEC = E



Prod. no. 1005289 10.00 GBP

## MERIDIAN BOX

WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)



Base: 1xE27 max. Ø: 7 cm | L: 17.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 230655    | 96.00 |
| ● rust       | 230657    | 96.00 |



E27 | 8 W | 320°  
800lm | 2700 K | EEC = F



Prod. no. 1005268 11.00 GBP



1004748


829







## ESKINA FRAME WL



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 15 W  
Material: Aluminium


- The light colour must be set prior to installation



|        |         |         |
|--------|---------|---------|
| Direct | 3000 K  | 4000 K  |
|        | 1100 lm | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1004747   | 193.00 |

## ESKINA FRAME WL, DOUBLE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 27 W  
Material: Aluminium


- The light colour must be set prior to installation



|        |         |         |
|--------|---------|---------|
| Spot 1 | 3000 K  | 4000 K  |
|        | 1100 lm | 1200 lm |
| Spot 2 | 3000 K  | 4000 K  |
|        | 1100 lm | 1200 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1004748   | 235.00 |

## ESKINA FRAME WL, DOUBLE



220-240 V ~50/60 Hz | 700 mA  
Total wattage: 27 W  
Material: Aluminium


- The light colour must be set prior to installation



|        |         |         |
|--------|---------|---------|
| Spot 1 | 3000 K  | 4000 K  |
|        | 1100 lm | 1200 lm |
| Spot 2 | 3000 K  | 4000 K  |
|        | 1100 lm | 1200 lm |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1006314   | 235.00 |

BOOKAT  
WL




100-277 V ~50/60 Hz | 700 mA  
Total wattage: 15 W  
Material: Aluminium

TAHA II  
WL, PHASE



220-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium

TAHA II  
WL, SENSOR



100-240 V ~50/60 Hz | 240 mA  
Total wattage: 10 W  
Material: Aluminium

- Primary and replica functionality, option to control additional lights without a sensor



| 3000 K | 4000 K |
|--------|--------|
| 920 lm | 990 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1005443   | 173.00 |



| 2200 K | 2700 K |
|--------|--------|
| 450 lm | 500 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010195   | 169.00 |




| 2200 K | 2700 K |
|--------|--------|
| 450 lm | 500 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1010196   | 203.00 |



## OVALISK SENSOR WL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.6 W  
Material: Aluminium/Glass


- The light colour must be set prior to installation
- PIR sensor, adjustable range 3-1000 lx and 8s-12 min. Detection range up to 8 m depending on the mounting height of the light



| 3000 K | 4000 K |
|--------|--------|
| 580 lm | 630 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1004679   | 258.00 |

## OVALISK WL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.2 W  
Material: Aluminium/Glass

- The light colour must be set prior to installation




| 3000 K | 4000 K |
|--------|--------|
| 580 lm | 630 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1004678   | 241.00 |



PEMA®  
WL



220-240 V ~50/60 Hz  
Total wattage: 3.8 W  
Material: Aluminium





3000 K  
190 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 231015    | 105.00 |
| ○ white      | 231010    | 105.00 |
| ● grey       | 231012    | 105.00 |

230034 833



PEMA®  
WL



220-240 V ~50/60 Hz  
Total wattage: 7.7 W  
Material: Aluminium/Glass


- Protection rating IP44 only when mounted with light emission downwards



3000 K  
640 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002069   | 113.00 |
| ○ white      | 1002070   | 113.00 |

PEMA®  
WL




100-277 V ~50/60 Hz | 350 mA  
Total wattage: 14 W  
Material: Aluminium/Glass



3000 K | 4000 K  
1340 lm | 1420 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1003453   | 126.00 |
| ● grey  | 1003454   | 126.00 |

PEMA®  
WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xE27 max. Ø: 4.5 cm | L: 21 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 230030    | 92.00 |
| ● grey  | 230034    | 92.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E




Prod. no. 1005289 10.00 GBP



# ASTINA


WL, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

# ASTINA STEEL

WL, QPAR51

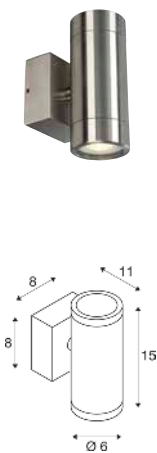


220-240 V ~50/60 Hz  
Material: Stainless Steel 304



Base: 2xGU10 | L: 9 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 228775    | 72.00 |
| ○ white      | 228771    | 72.00 |
| ● aluminium  | 228776    | 76.00 |



Prod. no. 1005273 9.00 GBP




GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G

Prod. no. 1012470 29.00 GBP



Base: 2xGU10 max. Ø: 5.1 cm | L: 5.7 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 233302    | 109.00 |



Prod. no. 1005273 9.00 GBP




GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G

Prod. no. 1012470 29.00 GBP



## ANGOLUX SENSOR WL



100-240 V ~50/60 Hz | 240 mA  
Total wattage: 9.8 W  
Material: Aluminium


- PIR sensor, adjustable range 10-2000lx and 8s-8min. Detection range between 6-10 m depending on the mounting height of the light
- IP44 protection rating only when mounted with light emission downwards.



3000 K  
750 lm

| Variant      | Prod. no.      | GBP           |
|--------------|----------------|---------------|
| ● anthracite | <b>1001969</b> | <b>155.00</b> |
| ○ white      | <b>1001970</b> | <b>155.00</b> |

## ANGOLUX WL



220-240 V ~50/60 Hz | 80 mA  
Total wattage: 6.8 W  
Material: Aluminium

- Protection rating IP44 only when mounted with light emission downwards



3000 K  
550 lm


| Variant      | Prod. no.     | GBP           |
|--------------|---------------|---------------|
| ● anthracite | <b>231355</b> | <b>138.00</b> |
| ○ white      | <b>231351</b> | <b>138.00</b> |



1002505 837



## VILUA S WL




100-277 V ~50/60 Hz | 700 mA  
Total wattage: 9 W  
Material: Aluminium/Glass



3000 K  
405 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002503   | 138.00 |

## VILUA L WL




100-277 V ~50/60 Hz | 350 mA  
Total wattage: 17 W  
Material: Aluminium/Glass



3000 K  
940 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002504   | 172.00 |

## VILUA WL, UP/DOWN



100-277 V ~50/60 Hz | 700 mA  
Total wattage: 16 W  
Material: Aluminium/Glass



Up  
3000 K  
400 lm

Down  
3000 K  
400 lm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002505   | 172.00 |

233114 839






## MYRA UP/DOWN WL, QPAR51




220-240 V ~50/60 Hz  
Material: Aluminium/Glass

## SITRA WL, UP/DOWN, TCR-TSE



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

## SITRA WL, TCR-TSE



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 2xGU10 max. Ø: 5.1 cm | L: 5.7 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 233115    | 88.00 |
| ● grey       | 233114    | 88.00 |



GU10 | 6W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



Base: 2xG53 max. Ø: 7.5 cm | L: 3.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 230365    | 85.00 |



GX53 | 6W | 120°  
490 lm | 2700 K | EEC = G



Prod. no. 1005272 10.00 GBP



Base: 1xG53 max. Ø: 7.5 cm | L: 3.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 230355    | 59.00 |



GX53 | 6W | 120°  
490 lm | 3000 K | EEC = G



Prod. no. 1005271 10.00 GBP



| Product                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| Surface-mounting frames |           |       |
| ● anthracite            | 233215    | 20.00 |

ROX  
WL, UP/DOWN, QPAR111




220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 2xGU10

| Variant     | Prod. no. | GBP    |
|-------------|-----------|--------|
| ● aluminium | 1000334   | 168.00 |



Prod. no. 1005298 73.00 GBP

DELWA  
WL




220-240 V ~50/60 Hz | 700 mA  
Total wattage: 10 W  
Material: Aluminium/Glass



3000 K  
840 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1000342   | 184.00 |
| ○ white      | 1000340   | 184.00 |

WALLYX  
WL, QPAR51

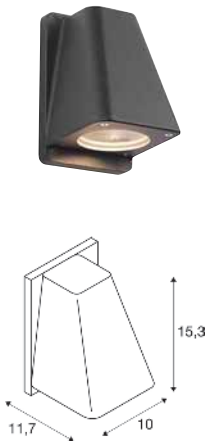


220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xGU10 | L: 7.6 cm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 227195    | 105.00 |



Prod. no. 1005077 7.00 GBP




## DOWNUNDER OUT WL, ROUND



100-240 V ~50/60 Hz | 500 mA  
Total wattage: 4.3 W  
Material: Aluminium

## DOWNUNDER OUT WL, SQUARE



100-240 V ~50/60 Hz | 500 mA  
Total wattage: 4.3 W  
Material: Aluminium



| 3000 K | 4000 K |
|--------|--------|
| 150 lm | 160 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002868   | 117.00 |



| 3000 K | 4000 K |
|--------|--------|
| 150 lm | 160 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002869   | 117.00 |





1002990 843





## ABRIDOR HYBRID WL



100-240 V ~50/60 Hz | 380 mA  
Total wattage: 6.8 W  
Material: Aluminium


- Solar and 230 V operation possible
- 3 different modes
- Battery charging via solar



|        |        |
|--------|--------|
| 2200 K | 2700 K |
| 600 lm | 650 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1008542   | 172.00 |

## ABRIDOR WL




100-240 V ~50/60 Hz | 300 mA  
Total wattage: 12 W  
Material: Aluminium



|        |        |
|--------|--------|
| 3000 K | 4000 K |
| 950 lm | 980 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002989   | 155.00 |

## ABRIDOR SENSOR WL



100-240 V ~50/60 Hz | 300 mA  
Total wattage: 12 W  
Material: Aluminium



- PIR sensor, adjustable range 15-2000lx and 5s-10min. Detection range between 6-9 m depending on the mounting height of the light



|        |        |
|--------|--------|
| 3000 K | 4000 K |
| 950 lm | 980 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002990   | 172.00 |



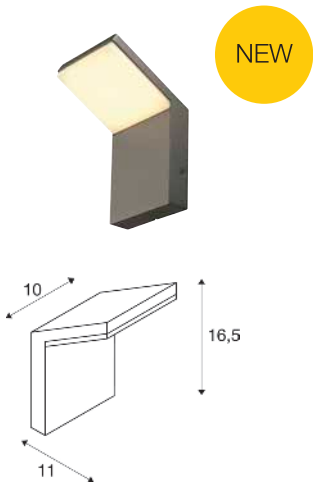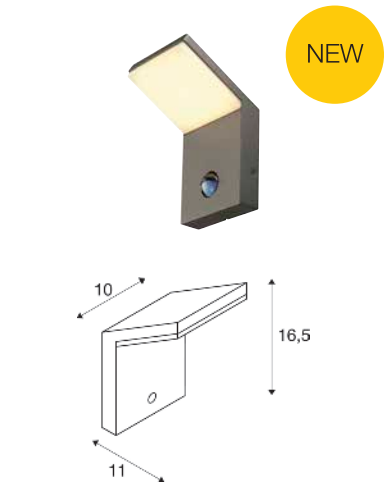

100-240 V ~50/60 Hz | 110 mA  
Total wattage: 6 W | 8.5 W  
Material: Aluminium

- Power Switch 70% (6 W) or 100% (8.5 W) for adjusting the intensity

100-240 V ~50/60 Hz | 110 mA  
Total wattage: 6 W | 8.5 W  
Material: Aluminium

- Power Switch 70% (6 W) or 100% (8.5 W) for adjusting the intensity,
- Two different detection ranges: approx. 8 m or approx. 4 m
- Sensor with additional standby function 10%



|       |        |        |
|-------|--------|--------|
| 6 W   | 2700 K | 3000 K |
|       | 600 lm | 600 lm |
| 8,5 W | 2700 K | 3000 K |
|       | 850 lm | 850 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1011572 ● | 113.00 |





|       |        |        |
|-------|--------|--------|
| 6 W   | 2700 K | 3000 K |
|       | 600 lm | 600 lm |
| 8,5 W | 2700 K | 3000 K |
|       | 850 lm | 850 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1011573 ● | 130.00 |



## ORDI II WL, SENSOR

## ORDI II WL, PHASE



100-240 V ~50/60 Hz | 240 mA  
Total wattage: 9.5 W  
Material: Aluminium

- The light colour must be set prior to installation
- Primary and replica functionality
- PIR sensor, adjustable range 20-2000 lx and 8s-8 min. Detection range between 8-9 m depending on the mounting height of the light



|         |        |        |
|---------|--------|--------|
| 1008724 | 2200 K | 3000 K |
|         | 750 lm | 900 lm |
| 1008723 | 2200 K | 3000 K |
|         | 700 lm | 850 lm |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008723   | 180.00 |
| ○ white | 1008724   | 180.00 |



220-240 V ~50/60 Hz | 240 mA  
Total wattage: 9.5 W  
Material: Aluminium


- The light colour must be set prior to installation



|         |        |        |
|---------|--------|--------|
| 1008722 | 2200 K | 3000 K |
|         | 750 lm | 900 lm |
| 1008721 | 2200 K | 3000 K |
|         | 700 lm | 850 lm |


| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1008721   | 163.00 |
| ○ white | 1008722   | 163.00 |

BOX-L  
WL, E27




220-240 V ~50/60 Hz  
Material: Aluminium/Acrylic

BOX-L  
WL



100-277 V ~50/60 Hz | 500 mA  
Total wattage: 19 W  
Material: Aluminium/Acrylic

BOX  
WL, UP/DOWN, QT-DE12



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xE27 max. Ø: 6 cm | L: 17.5 cm



3000K  
600lm



Base: 1xR7s 78 mm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 232495    | 92.00 |
| ○ white      | 232491    | 92.00 |
| ● rust       | 232497    | 92.00 |



E27 | 14 W | 240°  
1520 lm | 3000 K | EEC = E



Prod. no. 1005307 11.00 GBP

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002035   | 113.00 |

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 232485    | 88.00 |




R7s 78mm | 9 W | 330°  
1050 lm | 3000 K | EEC = E



Prod. no. 1005287 21.00 GBP




## LOGS WL

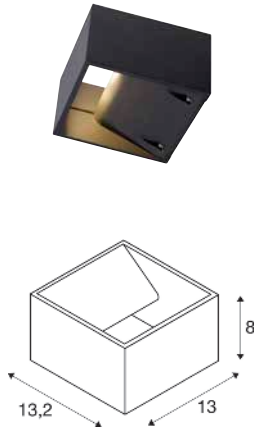

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 9.5 W  
Material: Aluminium


## OUT-BEAM UP/ FLOOD DOWN WL, UP/FLOOD DOWN

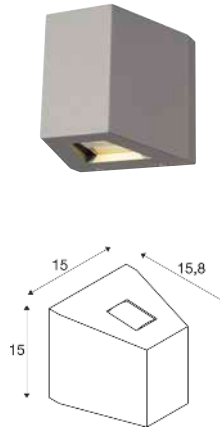

220-240 V ~50/60 Hz | 500 mA  
Total wattage: 18 W  
Material: Aluminium/Glass

- The 2° light effect is particularly suitable for contouring and structuring surfaces and building facades.

## L-LINE OUT WL

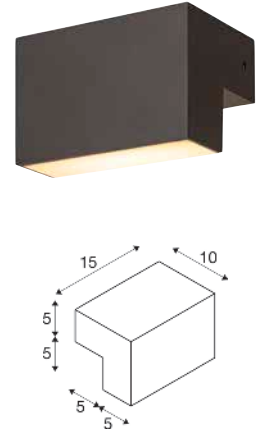

220-240 V ~50/60 Hz | 350 mA  
Total wattage: 7 W  
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation



|        |                  |
|--------|------------------|
| 232101 | 3000 K<br>800 lm |
| 232105 | 3000 K<br>520 lm |

| Variant                | Prod. no. | GBP    |
|------------------------|-----------|--------|
| ● anthracite<br>520 lm | 232105    | 172.00 |
| ○ white<br>800 lm      | 232101    | 172.00 |



|      |                  |
|------|------------------|
| Down | 3000 K<br>690 lm |
| Beam | 3000 K<br>50 lm  |


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 229665    | 239.00 |
| ● grey       | 229664    | 239.00 |



|                  |                  |
|------------------|------------------|
| 3000 K<br>500 lm | 4000 K<br>570 lm |
|------------------|------------------|

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003539   | 121.00 |

PHOTONIA  
WL, E27

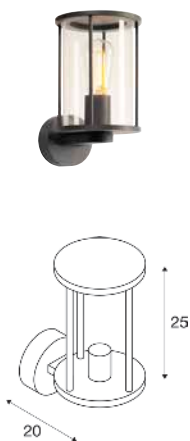


220-240 V ~50/60 Hz  
Material: Aluminium/Glass

MOLAT  
WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Glass

GLOO PURE  
WL, E27




220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xE27 max. Ø: 9 cm | L: 15 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 232045    | 165.00 |




Prod. no. 1005265 23.00 GBP



Base: 1xE27 max. Ø: 6.5 cm | L: 14.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1000820   | 85.00 |




Prod. no. 1005303 9.00 GBP



Base: 1xE27 max. Ø: 4.8 cm | L: 18 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1002002   | 88.00 |



Prod. no. 1005289 10.00 GBP




| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Spacer       |           |      |
| ● anthracite | 1002853   | 7.00 |






## F-POL WL, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)


## IPERI WL



220-240 V ~50/60 Hz  
Total wattage: 4.5 W  
Material: Aluminium

- IP44 protection rating only when mounted with light emission downwards.

## QUADRASYL WL, TCR-TSE



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xE27 max. Ø: 5.1 cm | L: 14 cm



4000 K  
400 lm



Base: 1xG53 max. Ø: 7.5 cm | L: 2.7 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 231585    | 126.00 |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 231315    | 113.00 |

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 232285    | 56.00 |



E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no. 1005289 10.00 GBP





GX53 | 6 W | 120°  
490 lm | 2700 K | EEC = G



Prod. no. 1005272 10.00 GBP

# SQUARE TURN

WL, G9



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xG69      max. Ø: 3.5 cm    L: 8 cm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 1000335   | 180.00 |




G9 | 4 W | 300°  
400 lm | 3000 K | EEC = E



Prod. no.      1005286      8.00 GBP

# TODAY PRO

DISPLAY



100-240 V ~50/60 Hz | 550 mA  
Total wattage: 31 W  
Material: Aluminium




4000 K  
3700 lm

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● black | 1000880   | 203.00 |
| ○ white | 1000881   | 203.00 |



## ESKINA D DISPLAY, PHASE



220-240 V ~50/60 Hz | 350 mA  
Total wattage: 14.5 W  
Material: Aluminium


- CCT switch on light head



| 3000 K  | 4000 K |
|---------|--------|
| 1000 lm |        |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002905   | 235.00 |

## MYRA DISPLAY WL, CURVED, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.7 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 233135    | 155.00 |
| ● grey       | 233134    | 155.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP




GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G

Prod. no. 1012470 29.00 GBP



| Product                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| Surface-mounting frames |           |       |
| ● anthracite            | 233215    | 20.00 |

## MYRA WL, DOUBLE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 2xGU10 max. Ø: 5.1 cm | L: 5.7 cm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 233095    | 147.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Spacer       |           |      |
| ● anthracite | 1002853   | 7.00 |




1002867 853






## LED SPOT SP




100-240 V ~50/60 Hz | 240 mA  
Total wattage: 6 W  
Material: Aluminium/Glass

## NAUTILUS WL QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium

## MYRA CW, SINGLE, QPAR51



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



3000 K  
400 lm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1004649   | 63.00 |
| ● rust       | 1004957   | 63.00 |



Base: 1xGU10 max. Ø: 5.1 cm | L: 8.3 cm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1002867   | 42.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



Base: 1xGU10 max. Ø: 5.1 cm | L: 5.7 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 233105    | 77.00 |
| ● grey       | 233104    | 77.00 |



GU10 | 6 W | 38°  
450 lm | 2700 K | EEC = F



Prod. no. 1005077 7.00 GBP



GU10 | 5 W | 100°  
300 lm | 2000 K-6500 K | EEC = G



Prod. no. 1012470 29.00 GBP



| Product                   | Prod. no. | GBP  |
|---------------------------|-----------|------|
| NAUTILUS   Mounting plate |           |      |
| ● black                   | 1002884   | 5.00 |



| Product                   | Prod. no. | GBP  |
|---------------------------|-----------|------|
| NAUTILUS   Mounting plate |           |      |
| ● black                   | 1002884   | 5.00 |



| Product                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| Surface-mounting frames |           |       |
| ● anthracite            | 233215    | 20.00 |





1002904 855





## ESKINA SPOT SENSOR CW, PHASE



220-240 V ~50/60 Hz | 350 mA

Total wattage: 15 W

Material: Aluminium


- Motion sensor in the wall rosette
- PIR sensor, adjustable range 0-100 lx and 8s-12 min. Detection range up to 10 m depending on the mounting height of the light



| 3000 K  | 4000 K  |
|---------|---------|
| 1200 lm | 1300 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002904   | 235.00 |

## ESKINA SPOT CW, PHASE



220-240 V ~50/60 Hz | 350 mA

Total wattage: 14.5 W

Material: Aluminium



| 3000 K  | 4000 K  |
|---------|---------|
| 1200 lm | 1300 lm |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1002903   | 218.00 |

SITRA 360  
CW, TCR-TSE




220-240 V ~50/60 Hz  
Material: Aluminium/Glass




Base: 1xG53      max. Ø: 7.5 cm      L: 3.5 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 231515    | 94.00 |



Prod. no.      1005272      10.00 GBP

THEO BRACKET  
CW

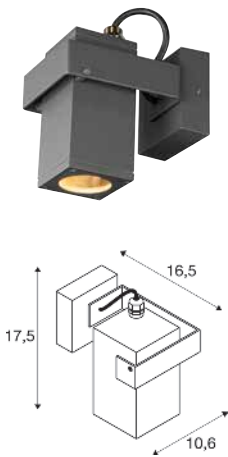


220-240 V ~50/60 Hz  
Material: Aluminium/Glass




Base: 1xGU10      max. Ø: 5.1 cm      L: 5.7 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 1004653   | 65.00 |





Prod. no.      1005077      7.00 GBP



Prod. no.      1012470      29.00 GBP



## HELIA CW, SINGLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 6.5 W  
Material: Aluminium/Glass




3000 K  
440 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 233245    | 151.00 |



| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Spacer       |           |      |
| ● anthracite | 1002853   | 7.00 |

## HELIA CW, DOUBLE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 13 W  
Material: Aluminium/Glass



3000 K  
2 x 440lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 233255    | 268.00 |




| Product      | Prod. no. | GBP  |
|--------------|-----------|------|
| Spacer       |           |      |
| ● anthracite | 1002853   | 7.00 |





## AINOS CW



220-240 V ~50/60 Hz | 500 mA

Total wattage: 21 W

Material: Aluminium/Polycarbonate (PC)



3000 K  
1430 lm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 229965    | 130.00 |
| ○ white      | 229961    | 130.00 |

229971 859





## AINOS CW, SENSOR



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 22 W  
Material: Aluminium/Polycarbonate (PC)


- Sensor in the light housing



3000 K  
1430 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 229975    | 172.00 |
| ○ white      | 229971    | 172.00 |

## AINOS CW, SQUARE




220-240 V ~50/60 Hz | 500 mA  
Total wattage: 17 W  
Material: Aluminium/Polycarbonate (PC)



3000 K | 4000 K  
1300 lm | 1300 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003450   | 142.00 |
| ○ white      | 1003449   | 142.00 |

## AINOS CW, SENSOR, SQUARE



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 18 W  
Material: Aluminium/Polycarbonate (PC)

- Sensor in the light housing



3000 K | 4000 K  
1300 lm | 1300 lm

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 1003452   | 176.00 |
| ○ white      | 1003451   | 176.00 |




229085

861



## TERANG 200

CW



220-240 V ~50/60 Hz  
Total wattage: 11 W  
Material: Aluminium/Polycarbonate (PC)




3000 K  
830 lm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 229935    | 68.00 |
| ○ white      | 229931    | 68.00 |

## BULAN

CW, E14



220-240 V ~50/60 Hz  
Material: Aluminium/Glass



Base: 1xE14 max. Ø: 4.8 cm | L: 13 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 229075    | 59.00 |
| ○ white      | 229071    | 59.00 |
| ● grey       | 229072    | 59.00 |




E14 | 4 W | 320°  
350 lm | 2700 K | EEC = G



Prod. no. 1005285 8.00 GBP

## BULAN GRID

CW, E27



220-240 V ~50/60 Hz  
Material: Aluminium/Polycarbonate (PC)



Base: 2xE27 max. Ø: 5.2 cm | L: 17.3 cm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 229085    | 63.00 |
| ○ white      | 229081    | 63.00 |




E27 | 8 W | 240°  
880 lm | 3000 K | EEC = E



Prod. no. 1005289 10.00 GBP



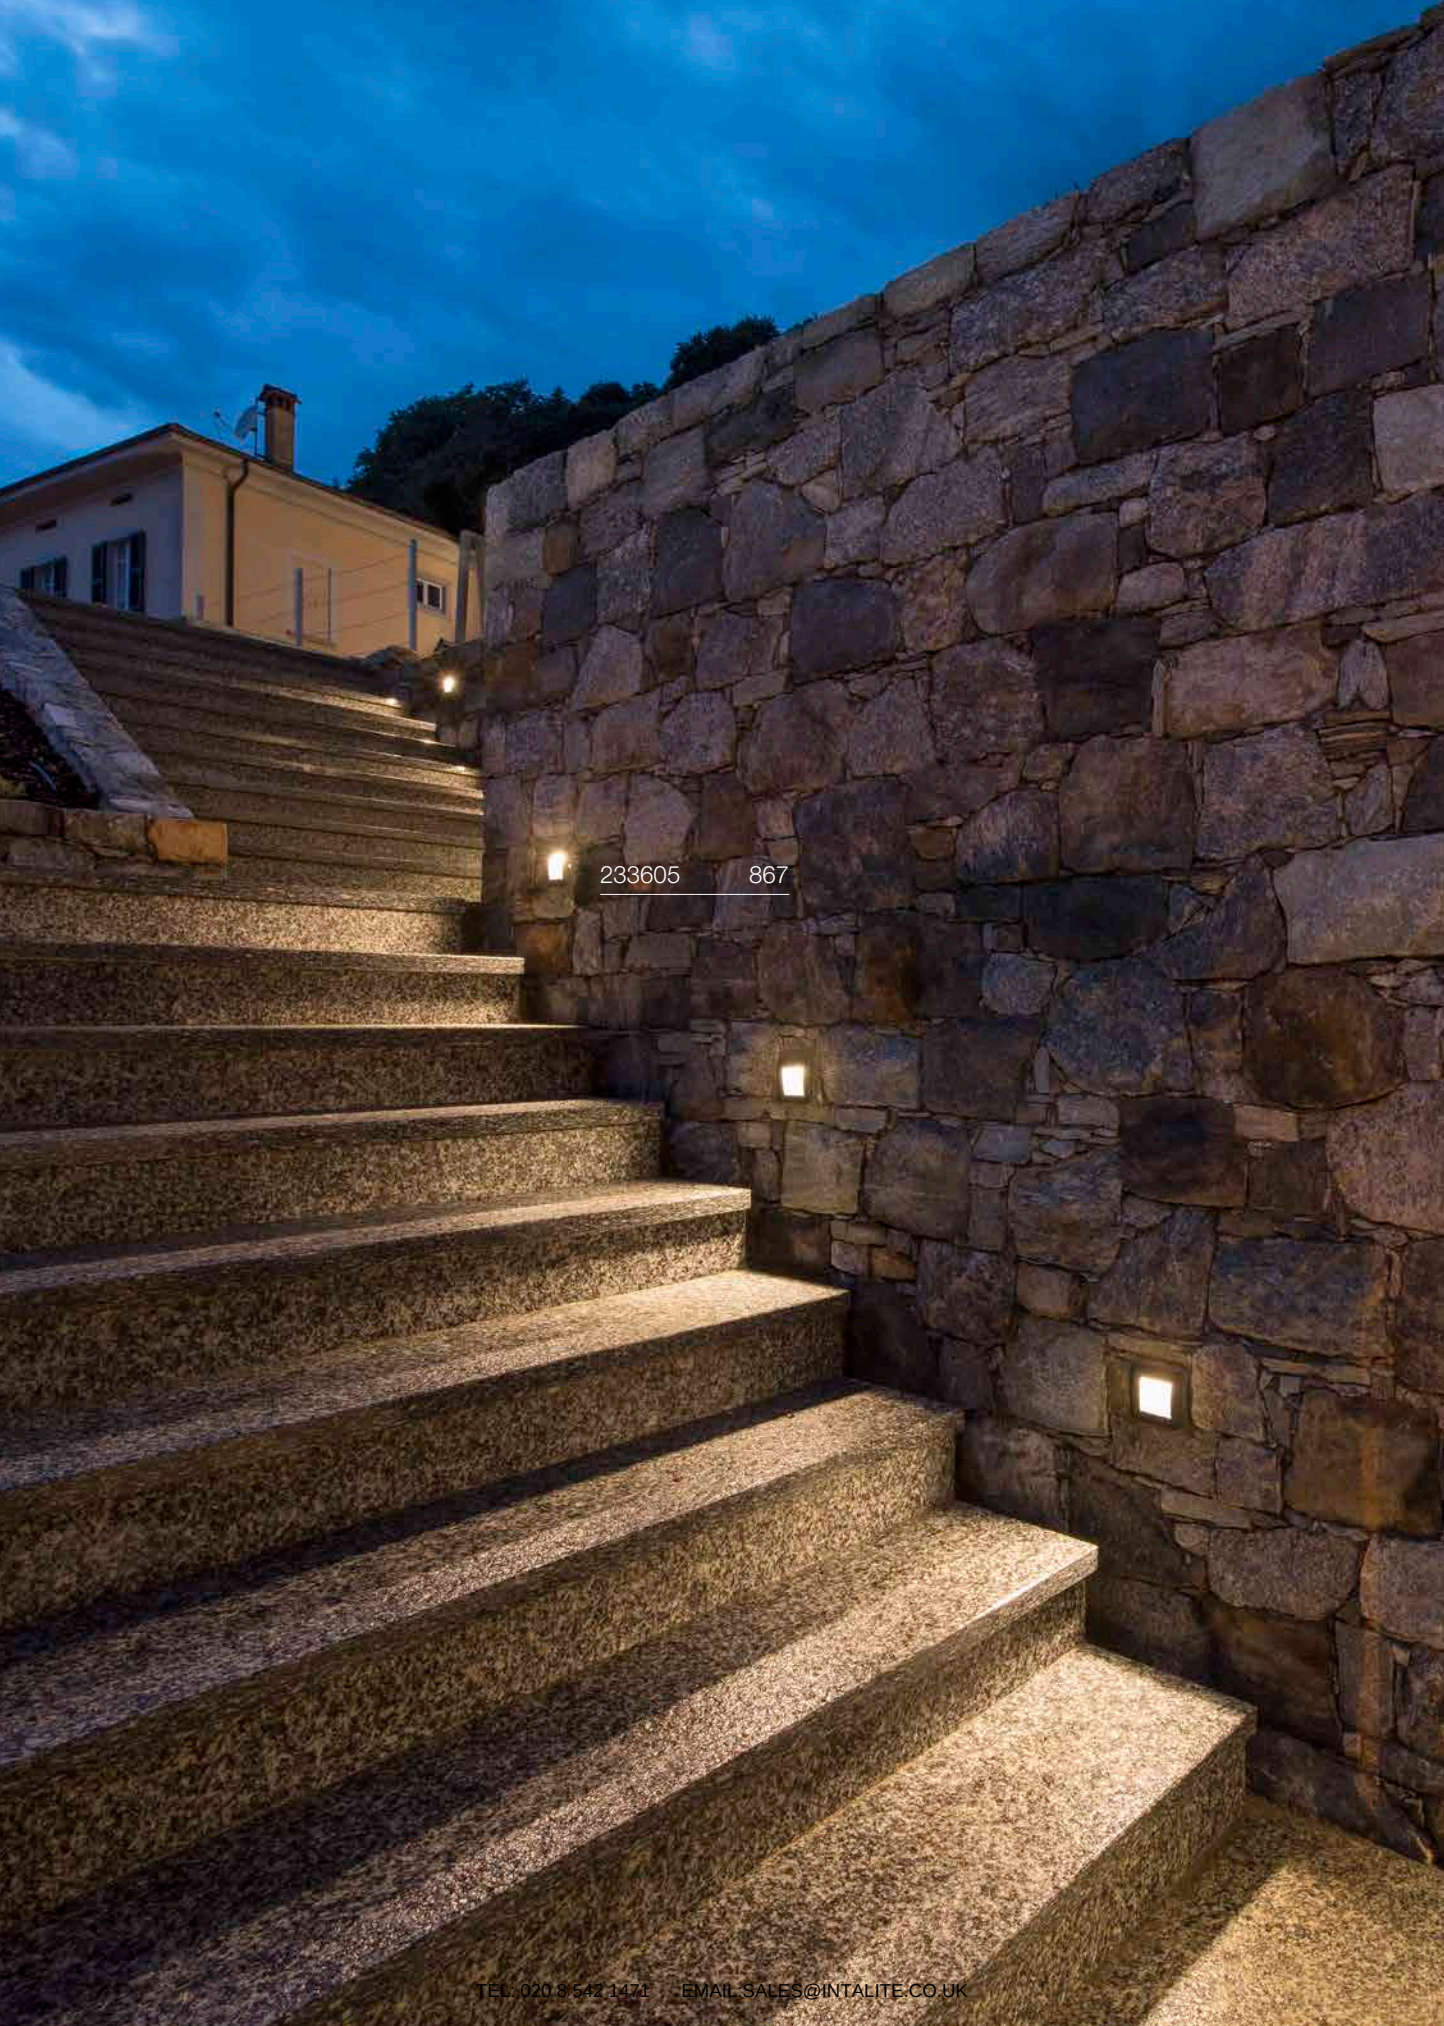

233605

867

# OUTDOOR | RECESSED LIGHTS



LED  
CONCRETO | 865



LED  
ADI | 866



LED  
DOWNUNDER OUT | 867



LED  
BRICK MESH | 868




LED  
BRICK | 868



LED  
SECKET  
BRICK DOWNUNDER |  
869







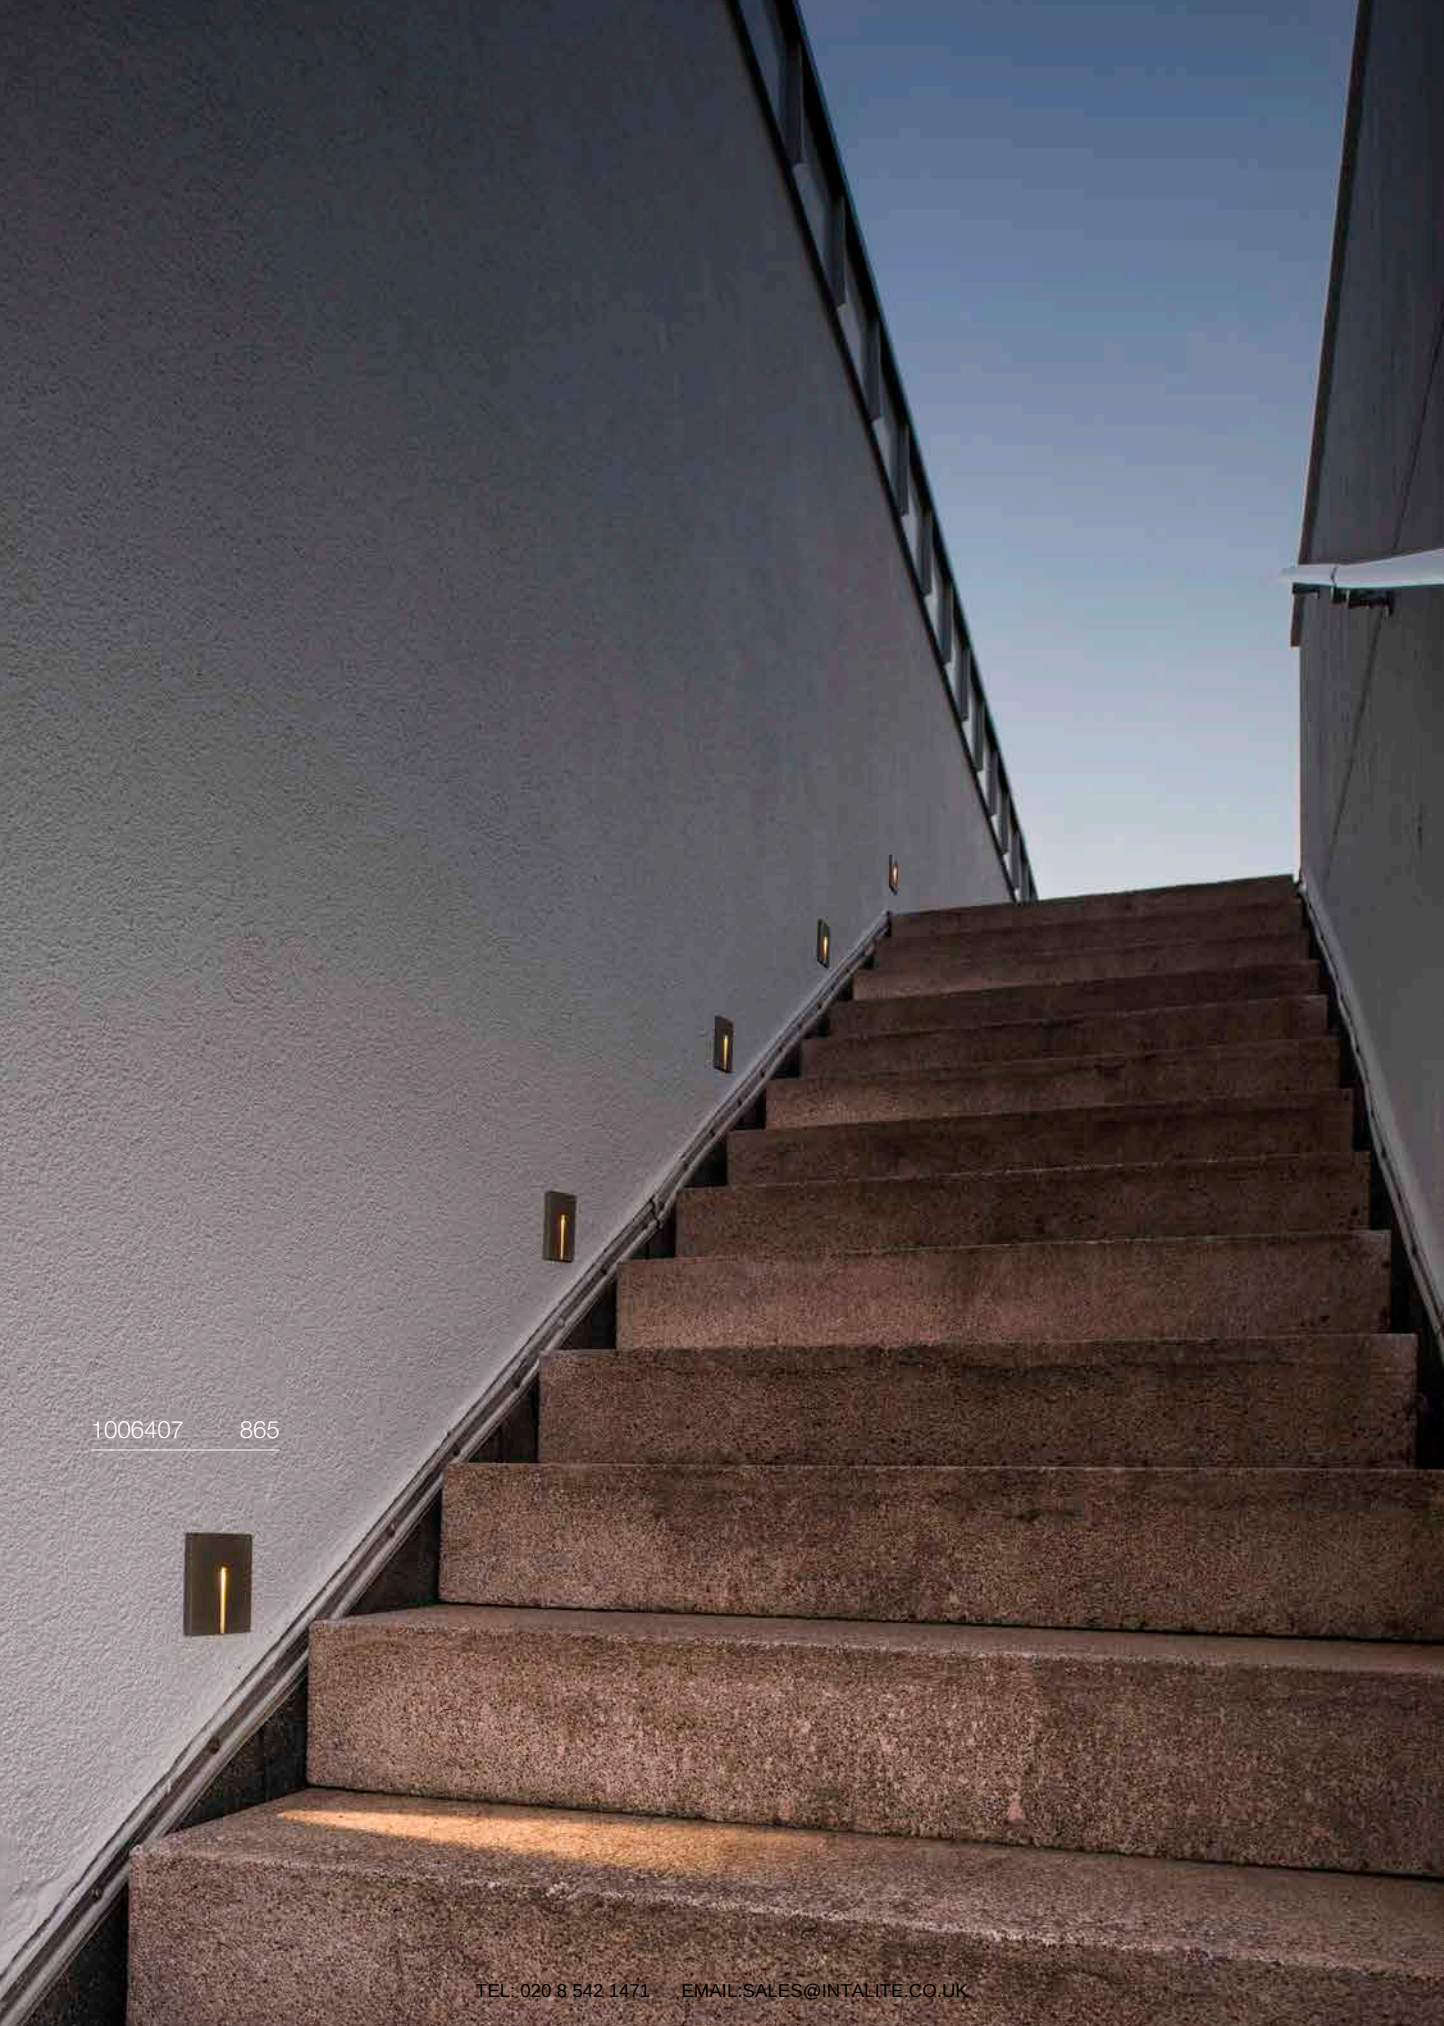

1006407 865

CONCRETO  
EL, WING

CONCRETO  
EL, CUT



100-240 V ~50/60 Hz | 700 mA  
Total wattage: 3.2 W  
Material: concrete/aluminium

- Recessed fixing kit included



100-240 V ~50/60 Hz | 700 mA  
Total wattage: 3.2 W  
Material: concrete/aluminium

- Recessed fixing kit included



3000 K  
45 lm



3000 K  
15 lm

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● grey/black | 1006406   | 88.00 |


| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● grey/black | 1006407   | 88.00 |





233625 867

ADI  
EL



100-277 V ~50/60 Hz | 500 mA  
Total wattage: 18 W  
Material: aluminium/polycarbonate (PC)

- Only fit the light with the light beam pointing downwards
- Recessed fixing kit must be ordered separately



3000 K  
940lm


| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● anthracite | 233635    | 226.00 |



| Product             | Prod. no. | GBP   |
|---------------------|-----------|-------|
| Recessed fixing kit |           |       |
| ● black             | 233639    | 18.00 |



## DOWNUNDER OUT S EL



220-240 V ~50/60 Hz | 300 mA  
Total wattage: 1.7 W  
Material: aluminium/plastic


- Only fit the light with the light beam pointing downwards
- Recessed fixing kit included



|        |                 |
|--------|-----------------|
| 233605 | 3000 K<br>25 lm |
| 233601 | 3000 K<br>65 lm |

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 233605    | 55.00 |
| ○ white      | 233601    | 55.00 |

## DOWNUNDER OUT M EL



220-240 V ~50/60 Hz | 300 mA  
Total wattage: 4 W  
Material: aluminium/plastic


- Only fit the light with the light beam pointing downwards
- Recessed fixing kit included



|        |                  |
|--------|------------------|
| 233621 | 3000 K<br>155 lm |
| 233625 | 3000 K<br>85 lm  |

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 233625    | 65.00 |
| ○ white      | 233621    | 65.00 |

## DOWNUNDER OUT L EL



220-240 V ~50/60 Hz | 300 mA  
Total wattage: 4 W  
Material: aluminium/plastic


- Only fit the light with the light beam pointing downwards
- Recessed fixing kit included



|  |                 |
|--|-----------------|
|  | 3000 K<br>85 lm |
|--|-----------------|

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● anthracite | 233615    | 77.00 |

BRICK MESH  
EL



220-240 V ~50/60 Hz | 500 mA  
Total wattage: 5 W  
Material: stainless steel 304


- Light does not need to be opened from the front for connection
- Recessed fixing kit with break-out openings of different sizes
- Recessed fixing kit included



3000 K  
150 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1008481   | 207.00 |

BRICK  
EL, SYMMETRICAL



220-240 V ~50/60 Hz | 144 mA  
Total wattage: 9.5 W  
Material: aluminium/stainless steel 316


- Recessed fixing kit included



3000 K  
950 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 233650    | 267.00 |

BRICK  
EL, ASYMMETRICAL



220-240 V ~50/60 Hz | 144 mA  
Total wattage: 9.5 W  
Material: aluminium/stainless steel 316

- Recessed fixing kit included




3000 K  
850 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 233660    | 267.00 |






## BRICK DOWNUNDER EL, E14



220-240 V ~50/60 Hz  
Material: aluminium/glass

- No recessed fixing kit required

## BRICK DOWNUNDER EL



220-240 V ~50/60 Hz  
Total wattage: 1.4 W  
Material: aluminium/glass

- Recessed fixing kit included



Base: 1 x E14 max. Ø: 4.3 cm | L: 12 cm



3000 K  
30 lm

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● grey  | 229062    | 36.00 |


| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● grey  | 229702    | 59.00 |



E14 | 4 W | 320°  
380 lm | 2700 K | EEC = F



Prod. no.: 1005284 6.00 GBP

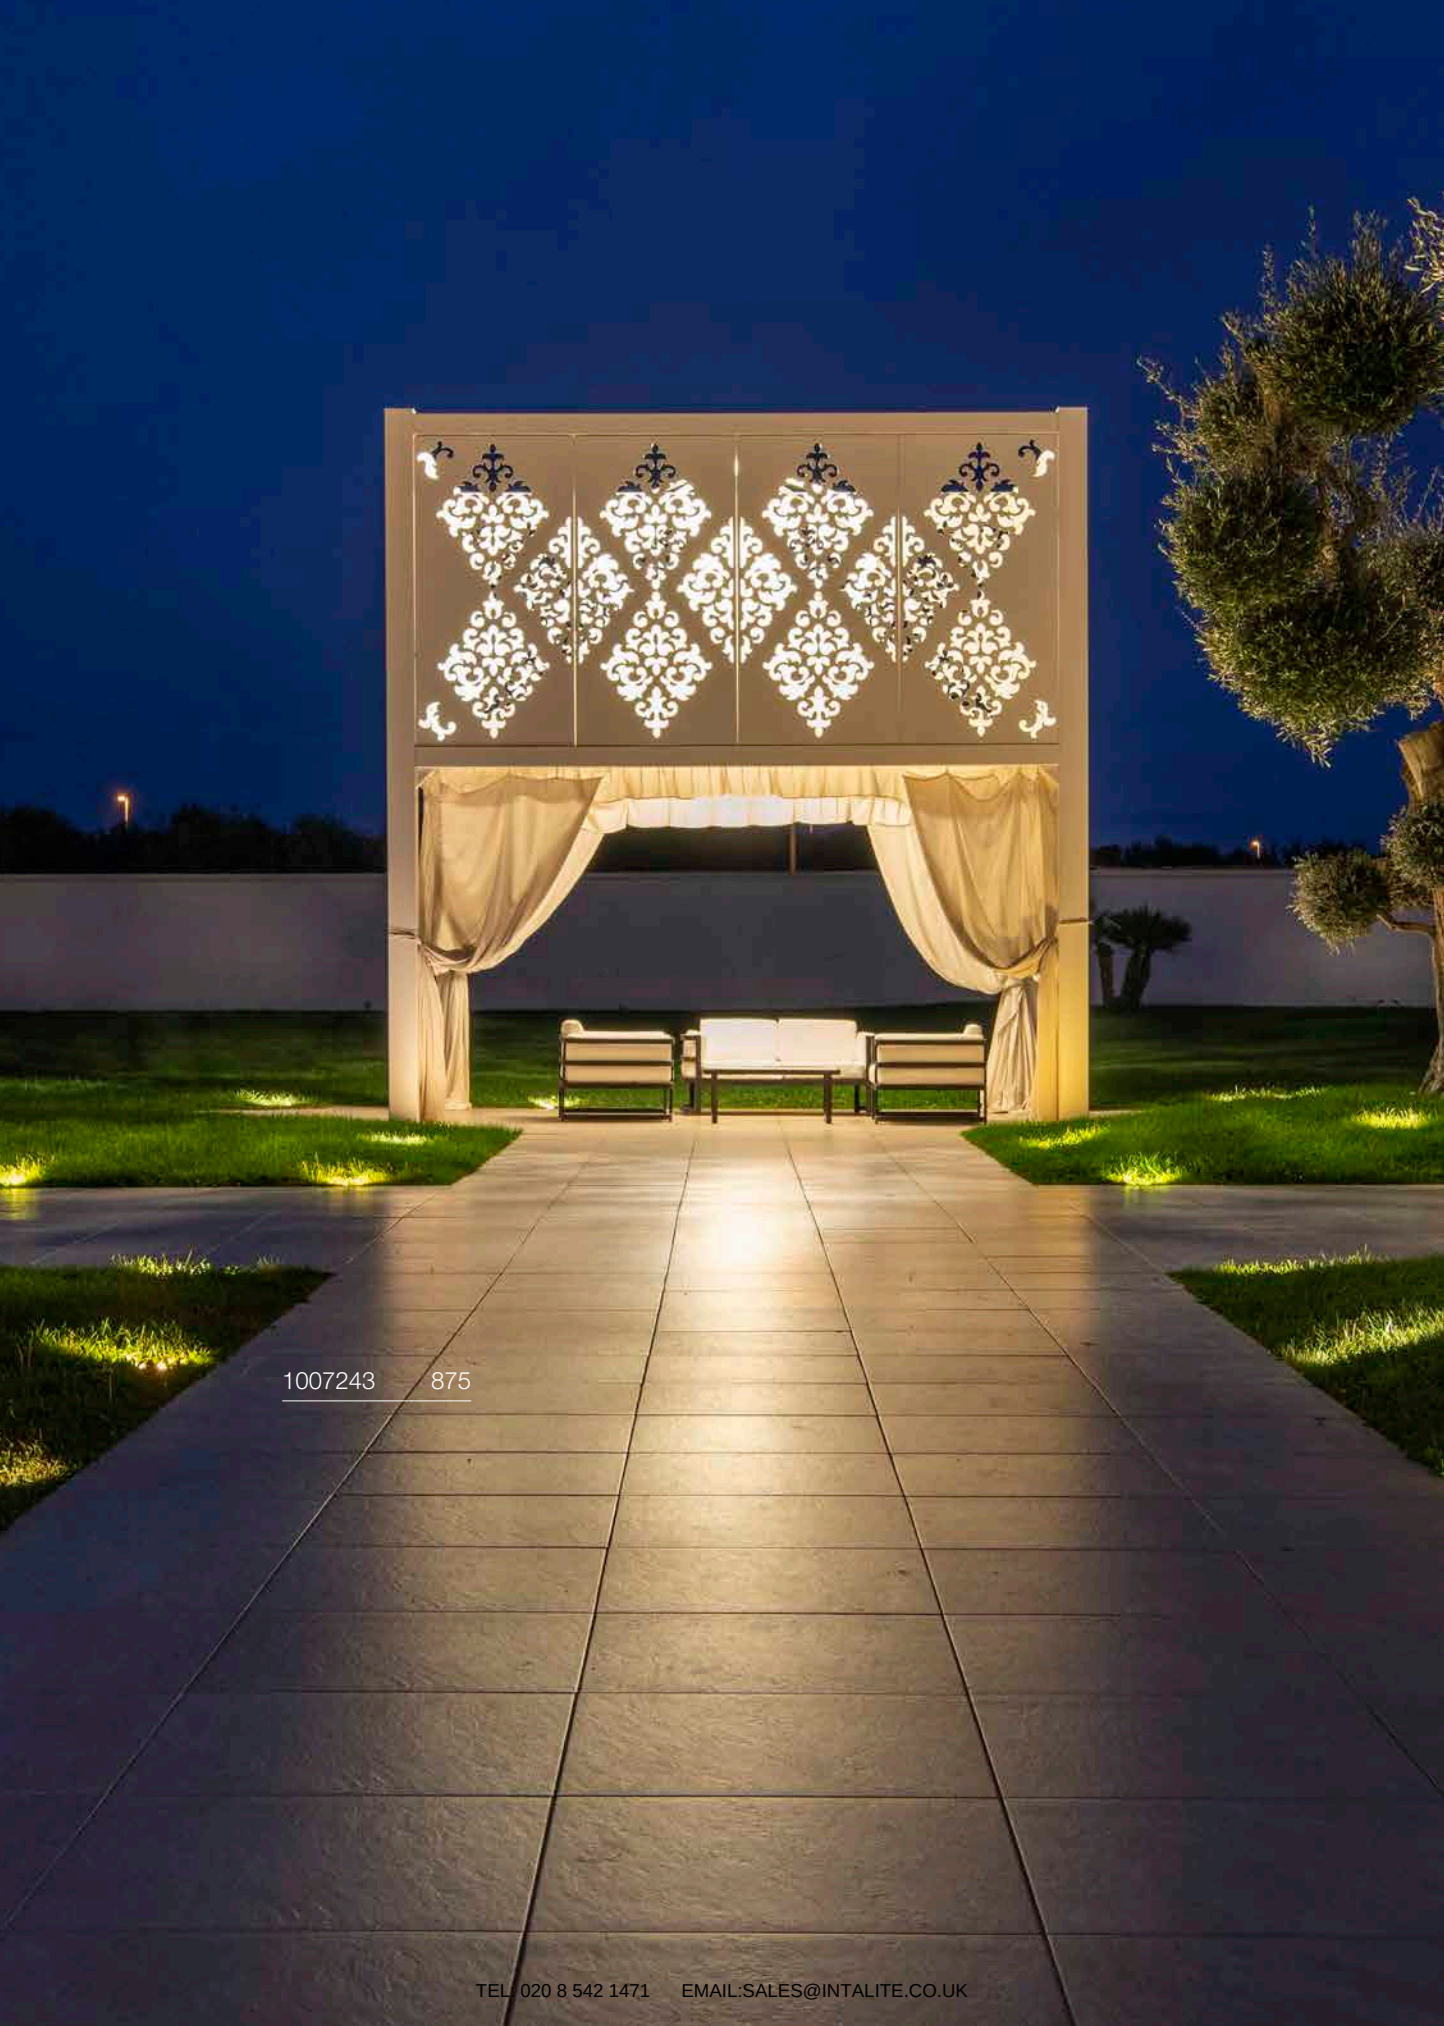

1007243 875

# OUTDOOR | RECESSED FLOOR LIGHTS

|                                                                                                                  |                                                                                                                 |                                                                                                                       |                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| <br>LED<br>DASAR®   873         | <br>LED<br>DASAR®   874-877    | <br>LED<br>DASAR® FLAT   880       | <br>LED<br>DASAR®   880-881       |
| <br>LED<br>DASAR® 920   881     | <br>SOCKET<br>DASAR® 115   882 | <br>SOCKET<br>DASAR® EXACT 116   883 | <br>SOCKET<br>DASAR® 215   885    |
| <br>SOCKET<br>DASAR® 215   885 | <br>LED<br>DASAR® 370   885    | <br>LED<br>TRAIL-LITE®   886        | <br>LED<br>POWER TRAIL-LITE®   887 |
| <br>LED<br>SMALL PLOT   888   | <br>LED<br>BIG PLOT   889    | <br>LED<br>ROCCI   890             | <br>LED<br>ROCCI 200   891       |
| <br>SOCKET<br>SOLASTO   893   |                              |                                                                                                                       |                                                                                                                      |






1007196 873



## DASAR® 600

EL, DALI



220-240V ~0/50/60 Hz | 550mA  
Total wattage: 18W  
Material: Stainless steel 316/aluminium

- marked installation direction
- Recessed fixing kit and cover can be ordered separately
- BEG-eligible
- IP connection box



3000 K  
2200 lm


| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1007195   | 471.00 |



| Product             | Prod. no. | GBP   |
|---------------------|-----------|-------|
| Recessed fixing kit |           |       |
| ● black             | 1007198   | 26.00 |

## DASAR® 1200

EL, DALI



220-240V ~0/50/60 Hz | 900mA  
Total wattage: 34W  
Material: Stainless steel 316/aluminium

- marked installation direction
- Recessed fixing kit and cover can be ordered separately
- BEG-eligible
- IP connection box



3000 K  
4100 lm


| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1007196   | 626.00 |



| Product             | Prod. no. | GBP   |
|---------------------|-----------|-------|
| Recessed fixing kit |           |       |
| ● black             | 1007197   | 43.00 |



## DASAR® S RL, ROUND



220-240V ~50/60 Hz | 200mA  
Total wattage: 4W  
Material: Stainless steel 316/aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box




3000 K  
350 lm

| Variant                      | Prod. no.      | GBP           |
|------------------------------|----------------|---------------|
| ● stainless steel/anthracite | <b>1007680</b> | <b>180.00</b> |



| Product                     | Prod. no.      | GBP          |
|-----------------------------|----------------|--------------|
| Recessed floor fixing kit S |                |              |
| ● black                     | <b>1007682</b> | <b>43.00</b> |
| Reflector 15°               |                |              |
| ○ silver                    | <b>1007683</b> | <b>6.00</b>  |
| Reflector 36°               |                |              |
| ○ silver                    | <b>1007684</b> | <b>6.00</b>  |
| Reflector 50°               |                |              |
| ○ silver                    | <b>1007685</b> | <b>6.00</b>  |

## DASAR® S RL, ANGULAR



220-240V ~50/60Hz | 200mA  
Total wattage: 4W  
Material: Stainless steel 316/aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box




3000 K  
350 lm

| Variant                      | Prod. no.      | GBP           |
|------------------------------|----------------|---------------|
| ● stainless steel/anthracite | <b>1007681</b> | <b>180.00</b> |



| Product                     | Prod. no.      | GBP          |
|-----------------------------|----------------|--------------|
| Recessed floor fixing kit S |                |              |
| ● black                     | <b>1007682</b> | <b>43.00</b> |
| Reflector 15°               |                |              |
| ○ silver                    | <b>1007683</b> | <b>6.00</b>  |
| Reflector 36°               |                |              |
| ○ silver                    | <b>1007684</b> | <b>6.00</b>  |
| Reflector 50°               |                |              |
| ○ silver                    | <b>1007685</b> | <b>6.00</b>  |

## DASAR® M RL, ROUND, DALI



220-240 V ~50/60 Hz | 300 mA  
Total wattage: 6.5W  
Material: stainless steel 316/aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- Y-IP68 connection box



3000 K  
450 lm

| Variant                      | Prod. no.      | GBP           |
|------------------------------|----------------|---------------|
| ● stainless steel/anthracite | <b>1007810</b> | <b>299.00</b> |




| Product                     | Prod. no.      | GBP          |
|-----------------------------|----------------|--------------|
| Recessed floor fixing kit M |                |              |
| ● black                     | <b>1007822</b> | <b>68.00</b> |
| Reflector 15°               |                |              |
| ○ silver                    | <b>1007683</b> | <b>6.00</b>  |
| Reflector 36°               |                |              |
| ○ silver                    | <b>1007684</b> | <b>6.00</b>  |
| Reflector 50°               |                |              |
| ○ silver                    | <b>1007685</b> | <b>6.00</b>  |



## DASAR® M

RL, SQUARE, DALI

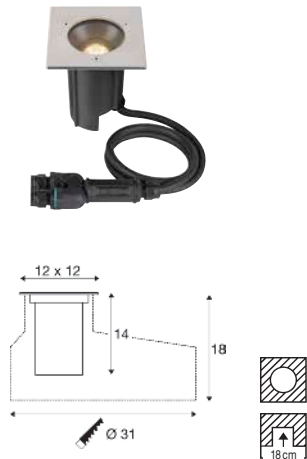

220-240V ~50/60Hz | 300mA

Total wattage: 6.5W

Material: Stainless steel 316/aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- Y-IP68 connection box



3000 K  
450 lm

| Variant                      | Prod. no.      | GBP           |
|------------------------------|----------------|---------------|
| ● stainless steel/anthracite | <b>1007811</b> | <b>302.00</b> |



| Product                     | Prod. no.      | GBP          |
|-----------------------------|----------------|--------------|
| Recessed floor fixing kit M |                |              |
| ● black                     | <b>1007822</b> | <b>68.00</b> |
| Reflector 15°               |                |              |
| ○ silver                    | <b>1007683</b> | <b>6.00</b>  |
| Reflector 36°               |                |              |
| ○ silver                    | <b>1007684</b> | <b>6.00</b>  |
| Reflector 50°               |                |              |
| ○ silver                    | <b>1007685</b> | <b>6.00</b>  |

## DASAR® L

RL, ROUND, DALI



220-240V ~50/60Hz | 500mA

Total wattage: 19W

Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box



3000 K  
1950 lm


| Variant           | Prod. no.      | GBP           |
|-------------------|----------------|---------------|
| ● stainless steel | <b>1007243</b> | <b>436.00</b> |



| Product                         | Prod. no.      | GBP          |
|---------------------------------|----------------|--------------|
| Recessed fixing kit for DASAR L |                |              |
| ● black                         | <b>1007245</b> | <b>46.00</b> |
| Reflector 15° for L / XL        |                |              |
| ○ silver                        | <b>1007238</b> | <b>12.00</b> |
| Reflector 36° for L / XL        |                |              |
| ○ silver                        | <b>1007239</b> | <b>12.00</b> |
| Reflector 60° for L / XL        |                |              |
| ○ silver                        | <b>1007240</b> | <b>12.00</b> |

## DASAR® L

RL, SQUARE, DALI

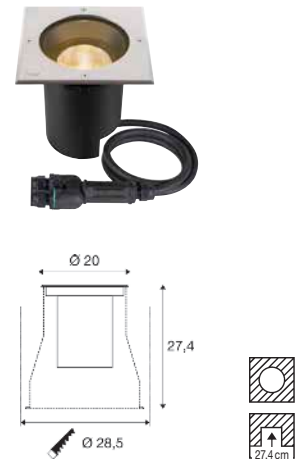

220-240V ~50/60Hz | 500mA

Total wattage: 19W

Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box



3000 K  
1950 lm


| Variant           | Prod. no.      | GBP           |
|-------------------|----------------|---------------|
| ● stainless steel | <b>1007244</b> | <b>436.00</b> |



| Product                         | Prod. no.      | GBP          |
|---------------------------------|----------------|--------------|
| Recessed fixing kit for DASAR L |                |              |
| ● black                         | <b>1007245</b> | <b>46.00</b> |
| Reflector 15° for L / XL        |                |              |
| ○ silver                        | <b>1007238</b> | <b>12.00</b> |
| Reflector 36° for L / XL        |                |              |
| ○ silver                        | <b>1007239</b> | <b>12.00</b> |
| Reflector 60° for L / XL        |                |              |
| ○ silver                        | <b>1007240</b> | <b>12.00</b> |

# DASAR® L

RL, ASYM, ROUND, DALI

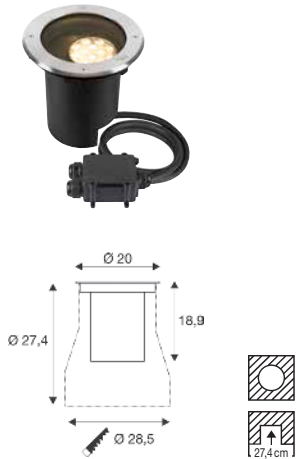

220-240V ~50/60Hz | 500mA  
Total wattage: 19W  
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- IP connection box



3000 K  
1800 lm


| Variant                 | Prod. no.      | GBP           |
|-------------------------|----------------|---------------|
| ● stainless steel/black | <b>1009168</b> | <b>408.00</b> |



| Product                         | Prod. no.      | GBP          |
|---------------------------------|----------------|--------------|
| Recessed fixing kit for DASAR L |                |              |
| ● black                         | <b>1007245</b> | <b>46.00</b> |

# DASAR® L

RL, ASYM, SQUARE, DALI

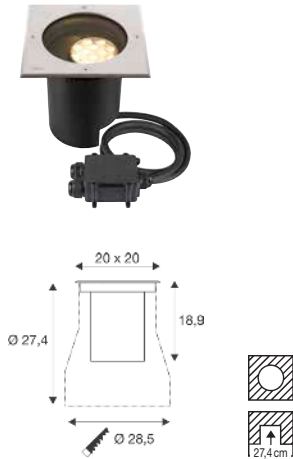

220-240V ~50/60Hz | 500mA  
Total wattage: 19W  
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- IP connection box



3000 K  
1800 lm

| Variant                 | Prod. no.      | GBP           |
|-------------------------|----------------|---------------|
| ● stainless steel/black | <b>1009169</b> | <b>408.00</b> |



| Product                         | Prod. no.      | GBP          |
|---------------------------------|----------------|--------------|
| Recessed fixing kit for DASAR L |                |              |
| ● black                         | <b>1007245</b> | <b>46.00</b> |

# DASAR® XL

RL, ROUND, DALI



220-240V ~50/60Hz | 700mA  
Total wattage: 27W  
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box



3000 K  
2790 lm


| Variant           | Prod. no.      | GBP           |
|-------------------|----------------|---------------|
| ● stainless steel | <b>1007241</b> | <b>520.00</b> |



| Product                          | Prod. no.      | GBP          |
|----------------------------------|----------------|--------------|
| Recessed fixing kit for DASAR XL |                |              |
| ● black                          | <b>1007246</b> | <b>54.00</b> |
| Reflector 15° for L / XL         |                |              |
| ○ silver                         | <b>1007238</b> | <b>12.00</b> |
| Reflector 36° for L / XL         |                |              |
| ○ silver                         | <b>1007239</b> | <b>12.00</b> |
| Reflector 60° for L / XL         |                |              |
| ○ silver                         | <b>1007240</b> | <b>12.00</b> |



## DASAR® XL RL, SQUARE, DALI

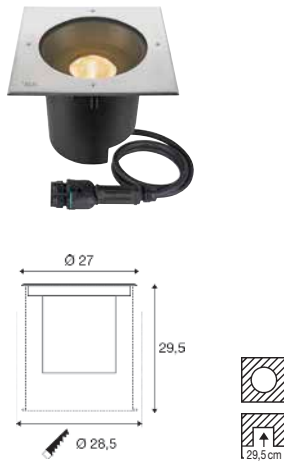

220-240V ~50/60Hz | 700mA  
Total wattage: 27W  
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box




3000 K  
2790 lm

| Variant           | Prod. no.      | GBP           |
|-------------------|----------------|---------------|
| ● stainless steel | <b>1007242</b> | <b>520.00</b> |



| Product                          | Prod. no.      | GBP          |
|----------------------------------|----------------|--------------|
| Recessed fixing kit for DASAR XL |                |              |
| ● black                          | <b>1007246</b> | <b>54.00</b> |
| Reflector 15° for L / XL         |                |              |
| ○ silver                         | <b>1007238</b> | <b>12.00</b> |
| Reflector 36° for L / XL         |                |              |
| ○ silver                         | <b>1007239</b> | <b>12.00</b> |
| Reflector 60° for L / XL         |                |              |
| ○ silver                         | <b>1007240</b> | <b>12.00</b> |

## DASAR® XL RL, ASYM, ROUND, DALI

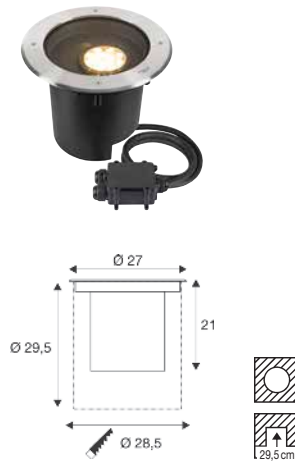

220-240V ~50/60Hz | 700mA  
Total wattage: 27W  
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- IP connection box




3000 K  
2600 lm

| Variant                 | Prod. no.      | GBP           |
|-------------------------|----------------|---------------|
| ● stainless steel/black | <b>1009170</b> | <b>493.00</b> |



| Product                          | Prod. no.      | GBP          |
|----------------------------------|----------------|--------------|
| Recessed fixing kit for DASAR XL |                |              |
| ● black                          | <b>1007246</b> | <b>54.00</b> |

## DASAR® XL RL, ASYM, SQUARE, DALI

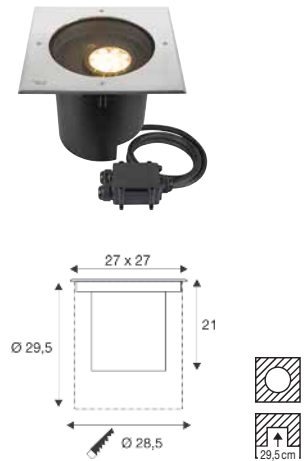

220-240V ~50/60Hz | 700mA  
Total wattage: 27W  
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- IP connection box



3000 K  
2600 lm

| Variant                 | Prod. no.      | GBP           |
|-------------------------|----------------|---------------|
| ● stainless steel/black | <b>1009171</b> | <b>493.00</b> |



| Product                          | Prod. no.      | GBP          |
|----------------------------------|----------------|--------------|
| Recessed fixing kit for DASAR XL |                |              |
| ● black                          | <b>1007246</b> | <b>54.00</b> |










1007242 877

DASAR® FLAT 80  
EL



220-240V ~50/60Hz  
Total wattage: 3.5W  
Material: stainless steel 304/glass



- Recessed fixing kit included
- This light is suitable for installation in wood,
- Open cable end



Up 3000 K  
140 lm

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● stainless steel | 228412    | 94.00 |

DASAR® FLAT 120  
EL



220-240V ~50/60Hz | 350mA  
Total wattage: 7W  
Material: stainless steel 304/aluminium


- Recessed fixing kit included
- Open cable end



3000 K  
490 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1006106   | 130.00 |

DASAR® 255  
EL



220-240V ~50/60Hz | 750mA  
Total wattage: 31W  
Material: stainless steel 316/glass



3000 K  
1660 lm


| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 229383    | 346.00 |



| Product                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| Connection box IP68, 3-pole |           |       |
| ● black                     | 228730    | 16.00 |




## DASAR® 255 EL



220-240V ~50/60Hz | 750mA  
Total wattage: 31W  
Material: stainless steel 316/glass

- Recessed fixing kit included


## DASAR® 920 EL



12-24V  
Total wattage: 6.5W  
Material: stainless steel 316/glass

- Recessed fixing kit included
- Open cable end

## DASAR® 920 EL



220-240V ~50/60Hz | 400mA  
Total wattage: 5.5W  
Material: stainless steel 316/glass

- Recessed fixing kit included
- Open cable end



4000 K  
1720 lm



3000 K  
520 lm



3000 K  
300 lm

| Variant           | Prod. no.     | GBP           |
|-------------------|---------------|---------------|
| ● stainless steel | <b>229381</b> | <b>346.00</b> |


| Variant           | Prod. no.     | GBP           |
|-------------------|---------------|---------------|
| ● stainless steel | <b>233500</b> | <b>129.00</b> |

| Variant           | Prod. no.     | GBP           |
|-------------------|---------------|---------------|
| ● stainless steel | <b>233520</b> | <b>169.00</b> |



| Product                             | Prod. no.      | GBP          |
|-------------------------------------|----------------|--------------|
| LED power supply 12 V   24 W, round |                |              |
| ○ white                             | <b>1008651</b> | <b>23.00</b> |
| LED power supply 24 V   25 W, round |                |              |
| ○ white                             | <b>1008652</b> | <b>23.00</b> |

DASAR® 115  
RL, ROUND, QPAR51



220-240V ~50/60Hz  
Material: stainless steel 316/glass

- Recessed fixing kit included



Base: 1 x GU10 max. Ø: 5.1 cm | L: 6 cm


| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 229320    | 100.00 |



GU10 | 2W | 36°  
230lm | 2700K | EEC = E

Prod. no.: 1007230 5.00 GBP

DASAR® 115  
RL, SQUARE, QPAR51



220-240V ~50/60Hz  
Material: stainless steel 316/glass

- Recessed fixing kit included



Base: 1 x GU10 max. Ø: 5.1 cm | L: 6 cm


| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 229324    | 100.00 |



GU10 | 2W | 36°  
230lm | 2700K | EEC = E

Prod. no.: 1007230 5.00 GBP

DASAR® 115  
RL, SQUARE, QPAR51



220-240V ~50/60Hz  
Material: stainless steel 316/glass

- Recessed fixing kit included



Base: 1 x GU10 max. Ø: 5.1 cm | L: 6 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 229374    | 100.00 |



GU10 | 2W | 36°  
230lm | 2700K | EEC = E

Prod. no.: 1007230 5.00 GBP








## DASAR® EXACT 116

EL, ROUND, QPAR51

## DASAR® EXACT 116

EL, SQUARE, QPAR51



220-240V ~50/60Hz  
Material: stainless steel 316/glass

- Recessed fixing kit included



220-240V ~50/60Hz  
Material: stainless steel 316/glass

- Recessed fixing kit included



Base: 1 x GU10 max. Ø: 5.1 cm | L: 6 cm



Base: 1 x GU10 max. Ø: 5.1 cm | L: 6 cm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 228430    | 106.00 |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 228434    | 106.00 |



GU10 | 2W | 36°  
230lm | 2700K | EEC = E



Prod. no.: 1007230 5.00 GBP



GU10 | 2W | 36°  
230lm | 2700K | EEC = E



Prod. no.: 1007230 5.00 GBP






229230

885



## DASAR® 215

RL, ROUND, QPAR111




220-240V ~50/60Hz  
Material: stainless steel 316/glass

- Recessed fixing kit included

## DASAR® 215

RL, SQUARE, QPAR111




220-240V ~50/60Hz  
Material: stainless steel 316/glass

- Recessed fixing kit included

## DASAR® 370

EL, ROUND



12-24V  
Power consumption: 2W  
Material: stainless steel 316/glass

- This light is suitable for installation in wood
- Open cable end



Base: 1 x GU10



Base: 1 x GU10



3000 K  
120 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 229230    | 230.00 |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 229234    | 230.00 |

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 233540    | 147.00 |



GU10 | 13W | 12°  
650lm | 3000K | EEC = F



Prod. no.: 1005278 48.00 GBP



GU10 | 13W | 12°  
650lm | 3000K | EEC = F





Prod. no.: 1005278 48.00 GBP



| Product                           | Prod. no. | GBP   |
|-----------------------------------|-----------|-------|
| LED power supply 12V   24W, round |           |       |
| ○ white                           | 1008651   | 23.00 |
| LED power supply 24V   25W, round |           |       |
| ○ white                           | 1008652   | 23.00 |

TRAIL-LITE® 60  
EL



12V 50/60Hz  
Power consumption: 0.3W  
Material: stainless steel 316/glass



- Only operate with conventional transformer,
- Recessed fixing kit included
- This light is suitable for installation in wood



3000 K  
4 lm

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● stainless steel | 227462    | 62.00 |

TRAIL-LITE® 60 SET  
EL

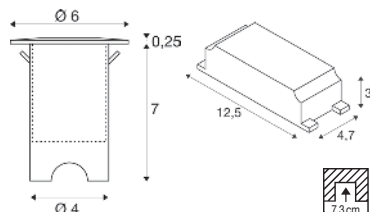

220-240V ~50/60Hz | 24V  
Total wattage: 4.6W  
Material: stainless steel 316/aluminium


- Set consisting of 4 lights, each with a 5m cable, connector, cable and plug-in power supply unit
- This light is suitable for installation in wood
- IP44 safety plug



3000 K  
25 lm

| Variant                     | Prod. no. | GBP    |
|-----------------------------|-----------|--------|
| ● stainless steel/aluminium | 1008841   | 260.00 |

TRAIL-LITE® 60 SINGLE  
EL



24V  
Power consumption: 0.9W  
Material: stainless steel 316/aluminium

- Light incl. 5m connection cable, recessed fixing kit included
- This light is suitable for installation in wood
- Low-voltage secondary socket



3000 K  
25 lm

| Variant                     | Prod. no. | GBP   |
|-----------------------------|-----------|-------|
| ● stainless steel/aluminium | 1008842   | 61.00 |



| Product      | Prod. no. | GBP   |
|--------------|-----------|-------|
| Power supply |           |       |
| ● black      | 1008843   | 43.00 |



## TRAIL-LITE® 60 POWER SUPPLY




L: 12.5 cm  
W: 4.7 cm  
H: 3 cm  
Material: plastic PC

|                        |            |
|------------------------|------------|
| Output voltage         | 22.8–25.2V |
| Output from            | 11.4W      |
| Output up to           | 12.6W      |
| Number of sec. outputs | 1          |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1008843   | 43.00 |

## POWER TRAIL-LITE® EL, SQUARE



350mA  
Power consumption: 1W  
Material: stainless steel 316/glass

- Operate only with 350mA driver. Only wire together multiple power LEDs in series! Installation sleeve incl.
- This light is suitable for installation in wood
- Open cable end




3000 K  
45 lm

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● stainless steel | 228342    | 70.00 |



| Product                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| LED driver 4 W   350 mA |           |       |
| ○ white                 | 1008656   | 17.00 |

## POWER TRAIL-LITE® EL, ROUND



350mA  
Power consumption: 1W  
Material: stainless steel 316/glass

- Operate only with 350mA driver. Only wire together multiple power LEDs in series!
- This light is suitable for installation in wood
- Open cable end



3000 K  
45 lm


| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● stainless steel | 228332    | 70.00 |



| Product                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| LED driver 4 W   350 mA |           |       |
| ○ white                 | 1008656   | 17.00 |



SMALL PLOT  
MODULE



24V  
Power consumption: 2.6W  
Material: aluminium/polymethylmethacrylate (PMMA)

- This product is delivered without a cover
- Open cable end




3000 K  
240 lm

| Variant     | Prod. no. | GBP   |
|-------------|-----------|-------|
| ● aluminium | 1006172   | 69.00 |



| Product                             | Prod. no. | GBP   |
|-------------------------------------|-----------|-------|
| LED power supply 24 V   25 W, round |           |       |
| ○ white                             | 1008652   | 23.00 |
| LED power supply 24 V   24 W        |           |       |
| ○ white                             | 1008653   | 34.00 |

SMALL PLOT  
MODULE



24V  
Power consumption: 2.6W  
Material: stainless steel/polymethylacrylate (PMMA)

- This product is delivered without a cover
- Open cable end



3000 K  
240 lm

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● stainless steel | 1006171   | 82.00 |



| Product                             | Prod. no. | GBP   |
|-------------------------------------|-----------|-------|
| LED power supply 24 V   25 W, round |           |       |
| ○ white                             | 1008652   | 23.00 |
| LED power supply 24 V   24 W        |           |       |
| ○ white                             | 1008653   | 34.00 |

SMALL PLOT  
COVER, 2-PACK



Ø: 10.3 cm  
H: 1.7 cm  
Material: stainless steel

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● anthracite      | 1006174   | 37.00  |
| ● stainless steel | 1006173   | 121.00 |

SMALL PLOT  
COVER, 4-PACK




Ø: 10.3 cm  
H: 1.7 cm  
Material: aluminium

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● anthracite      | 1006176   | 37.00  |
| ● stainless steel | 1006175   | 121.00 |





## BIG PLOT MODULE



220-240 V ~50/60 Hz  
Total wattage: 4.9W  
Material: aluminium/polymethylmethacrylate (PMMA)

- This product is delivered without a cover
- Open cable end




3000 K  
540 lm

| Variant     | Prod. no.      | GBP          |
|-------------|----------------|--------------|
| ● aluminium | <b>1008000</b> | <b>80.00</b> |



| Product                              | Prod. no.      | GBP          |
|--------------------------------------|----------------|--------------|
| T-connector box                      |                |              |
| ● black                              | <b>228726</b>  | <b>29.00</b> |
| Connection box IP68, 3-pole          |                |              |
| ● black                              | <b>228730</b>  | <b>16.00</b> |
| aluminium cover two light emissions  |                |              |
| ● anthracite                         | <b>1001262</b> | <b>49.00</b> |
| aluminium cover four light emissions |                |              |
| ● anthracite                         | <b>1001263</b> | <b>49.00</b> |

## BIG PLOT MODULE



220-240V ~50/60Hz  
Total wattage: 4.9W  
Material: stainless steel/polymethylacrylate (PMMA)

- This product is delivered without a cover
- Open cable end



3000 K  
540 lm

| Variant           | Prod. no.      | GBP           |
|-------------------|----------------|---------------|
| ● stainless steel | <b>1008001</b> | <b>117.00</b> |



| Product                            | Prod. no.      | GBP           |
|------------------------------------|----------------|---------------|
| T-connector box                    |                |               |
| ● black                            | <b>228726</b>  | <b>29.00</b>  |
| Connection box IP68, 3-pole        |                |               |
| ● black                            | <b>228730</b>  | <b>16.00</b>  |
| SST316L cover two light emissions  |                |               |
| ● stainless steel                  | <b>1001254</b> | <b>172.00</b> |
| SST316L cover four light emissions |                |               |
| ● stainless steel                  | <b>1001255</b> | <b>172.00</b> |

## BIG PLOT COVER, 2-PACK



Ø: 17 cm  
H: 2 cm  
Material: stainless steel 316

- 1001262 loadable up to 0.5t
- 1001254 loadable up to 0.8t

| Variant           | Prod. no.      | GBP           |
|-------------------|----------------|---------------|
| ● anthracite      | <b>1001262</b> | <b>49.00</b>  |
| ● stainless steel | <b>1001254</b> | <b>172.00</b> |

## BIG PLOT COVER, 4-PACK




Ø: 17 cm  
H: 2 cm  
Material: aluminium

- 1001255 loadable up to 0.8t
- 1001263 loadable up to 0.8t

| Variant           | Prod. no.      | GBP           |
|-------------------|----------------|---------------|
| ● anthracite      | <b>1001263</b> | <b>49.00</b>  |
| ● stainless steel | <b>1001255</b> | <b>172.00</b> |

ROCCI  
EL, ROUND



100-277V ~50/60Hz | 700mA  
Total wattage: 8.6W  
Material: stainless steel 316/glass


- Recessed fixing kit included



3000 K  
580 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 227600    | 147.00 |

ROCCI  
EL, SQUARE



100-277V ~50/60Hz | 700mA  
Total wattage: 8.6W  
Material: stainless steel 316/glass

- Recessed fixing kit included




3000 K  
580 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 227604    | 147.00 |



## ROCCI 200 EL, ROUND



100-277V ~50/60Hz | 350mA  
Total wattage: 16W  
Material: stainless steel 316/glass


- Recessed fixing kit included



3000 K  
1530 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1006104   | 161.00 |

## ROCCI 200 EL, ANGULAR



100-277V ~50/60Hz | 350mA  
Total wattage: 16W  
Material: stainless steel 316/glass

- Recessed fixing kit included



3000 K  
1530 lm

| Variant           | Prod. no. | GBP    |
|-------------------|-----------|--------|
| ● stainless steel | 1006105   | 161.00 |




227680

893



## SOLASTO EL, ROUND



220-240V ~50/60Hz  
Material: stainless steel 304/glass

- Recessed fixing kit included



Base: 1 x GU10

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● stainless steel | 227680    | 61.00 |





GU10 | 6W | 38°  
470lm | 3000K | EEC = F



Prod. no.: 1005079 7.00 GBP

## SOLASTO EL, SQUARE



220-240V ~50/60Hz  
Material: stainless steel 304/glass

- Recessed fixing kit included



Base: 1 x GU10

| Variant           | Prod. no. | GBP   |
|-------------------|-----------|-------|
| ● stainless steel | 227684    | 61.00 |



GU10 | 6W | 38°  
470lm | 3000K | EEC = F



Prod. no.: 1005079 7.00 GBP





1008164 901

# LIGHT BULBS

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|    |    |    |    |   |  |
| LED QT14   896                                                                      | LED QT-DE12   896                                                                   | LED G45 GOLD   896                                                                  | LED C35 GOLD   896                                                                  | LED C35   896- 897                                                                   | LED TCR-TSE   897                                                                   |
|    |    |    |    |   |  |
| LED QR51   897                                                                      | LED A60   897, 900, 903                                                             | LED T32   897                                                                       | LED QPAR51   898                                                                    | LED PAR11   899                                                                      | LED QPAR111   899                                                                   |
|    |    |    |    |    |  |
| LED GLOBE 150   900-901                                                             | LED GLOBE 125   900-901, 903                                                        | LED GLOBE 200   901                                                                 | LED GLOBE 300   901                                                                 | LED T32   902                                                                        | LED T38   902                                                                       |
|  |  |  |  |  |                                                                                     |
| LED T45   902                                                                       | LED ST64   902-903                                                                  | LED ST58   903                                                                      | SLVconnect® LED PAR16 SMART   904                                                   | SLVconnect® LED A60 SMART   904                                                      |                                                                                     |

## LED QT14 G9



220-240 V ~50/60 Hz  
Material: ceramic  
Ø: 1.8 cm | L: 5.4 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 450 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 90     |
| Output           | 3.6 W  |

| Variant                          | Prod. no.      | GBP         |
|----------------------------------|----------------|-------------|
| ○ transparent<br>400 lm   3000 K | <b>1005286</b> | <b>8.00</b> |
| ○ transparent<br>450 lm   2700 K | <b>1007455</b> | <b>8.00</b> |

## LED QT-DE12 R7S, 78 MM



220-240 V ~50/60 Hz  
Material: polycarbonate (PC)  
Ø: 2.9 cm | L: 2.9 cm

|                  |         |
|------------------|---------|
| Luminous flux    | 1050 lm |
| Lamp current     | 0.04 A  |
| Colour rendering | 90      |
| Output           | 9 W     |

| Variant                 | Prod. no.      | GBP          |
|-------------------------|----------------|--------------|
| ○ transparent<br>3000 K | <b>1005287</b> | <b>21.00</b> |

## LED QT-DE12 R7S, 118 MM



220-240 V ~50/60 Hz  
Material: polycarbonate (PC)  
Ø: 2.9 cm | L: 11.8 cm

|                  |         |
|------------------|---------|
| Luminous flux    | 2000 lm |
| Lamp current     | 0.07 A  |
| Colour rendering | 90      |
| Output           | 15 W    |

| Variant                 | Prod. no.      | GBP          |
|-------------------------|----------------|--------------|
| ○ transparent<br>3000 K | <b>1005288</b> | <b>25.00</b> |

## LED G45 E14, GOLD CURLY FILAMENT



220-240 V ~50/60 Hz  
Material: glass  
Ø: 4.5 cm | L: 7.5 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 75 lm  |
| Lamp current     | 0.01 A |
| Colour rendering | 80     |
| Output           | 2 W    |

| Variant                              | Prod. no.      | GBP         |
|--------------------------------------|----------------|-------------|
| ○ gold/transparent<br>70 lm   1800 K | <b>1008649</b> | <b>5.00</b> |
| ○ gold/transparent<br>75 lm   2200 K | <b>1008650</b> | <b>5.00</b> |

## LED C35 E14, GOLD CURLY FILAMENT



220-240 V ~50/60 Hz  
Material: glass  
Ø: 3.5 cm | L: 9.8 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 80 lm  |
| Lamp current     | 0.01 A |
| Colour rendering | 80     |
| Output           | 2 W    |

| Variant                      | Prod. no.      | GBP         |
|------------------------------|----------------|-------------|
| ○ gold/transparent<br>1800 K | <b>1008647</b> | <b>5.00</b> |
| ○ gold/transparent<br>2200 K | <b>1008648</b> | <b>5.00</b> |

## LED C35 E14



220-240 V ~50/60 Hz  
Material: glass  
Ø: 3.5 cm | L: 9.8 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 380 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 90     |
| Output           | 4.2 W  |

| Variant                 | Prod. no.      | GBP         |
|-------------------------|----------------|-------------|
| ○ transparent<br>2700 K | <b>1005284</b> | <b>6.00</b> |



## LED C35 E14



220-240 V ~50/60 Hz  
Material: glass  
Ø: 3.5 cm | L: 9.8 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 350 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 90     |
| Output           | 4.2 W  |

| Variant             | Prod. no.      | GBP         |
|---------------------|----------------|-------------|
| ○ frosted<br>2700 K | <b>1005285</b> | <b>8.00</b> |

## LED TCR-TSE GX53



230 V 50/60 Hz  
Material: polycarbonate (PC)  
Ø: 7.5 cm | L: 2.4 cm

|                  |                 |
|------------------|-----------------|
| Luminous flux    | 490 lm   520 lm |
| Lamp current     | 0.03 A          |
| Colour rendering | 90              |
| Output           | 6.1 W           |

| Variant                    | Prod. no.      | GBP          |
|----------------------------|----------------|--------------|
| ○ white<br>520 lm   4000 K | <b>1005269</b> | <b>10.00</b> |
| ○ white<br>490 lm   3000 K | <b>1005271</b> | <b>10.00</b> |
| ○ white<br>490 lm   2700 K | <b>1005272</b> | <b>10.00</b> |

## LED QR51 GU5.3



12 V  
Material: glass  
Ø: 5 cm | L: 4.5 cm

|                  |         |
|------------------|---------|
| Manufacturer     | Philips |
| Luminous flux    | 460 lm  |
| Lamp current     | 0.63 A  |
| Colour rendering | 90      |
| Output           | 5.8 W   |

| Variant                          | Prod. no.      | GBP          |
|----------------------------------|----------------|--------------|
| ○ transparent<br>450 lm   2700 K | <b>1001574</b> | <b>30.00</b> |
| ○ transparent<br>460 lm   3000 K | <b>1001575</b> | <b>30.00</b> |

## LED A60 GU10



220-240 V ~50/60 Hz  
Material: glass  
Ø: 6 cm | L: 11 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 400 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 90     |
| Output           | 5 W    |

| Variant                 | Prod. no.      | GBP          |
|-------------------------|----------------|--------------|
| ○ transparent<br>2200 K | <b>1008154</b> | <b>38.00</b> |

## LED A60 GU10



220-240 V ~50/60 Hz  
Material: glass  
Ø: 6 cm | L: 11 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 650 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 6.5 W  |

| Variant                 | Prod. no.      | GBP          |
|-------------------------|----------------|--------------|
| ○ transparent<br>2700 K | <b>1008375</b> | <b>38.00</b> |

## LED T32 GU10



220-240 V ~50/60 Hz  
Material: glass  
Ø: 3.2 cm | L: 10 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 270 lm |
| Lamp current     | 0.02 A |
| Colour rendering | 90     |
| Output           | 3.2 W  |

| Variant                 | Prod. no.      | GBP          |
|-------------------------|----------------|--------------|
| ○ transparent<br>2700 K | <b>1006321</b> | <b>42.00</b> |

## LED QPAR51 GU10



220-240 V ~50/60 Hz  
Material: glass  
Ø: 5 cm | L: 5 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 360 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 90     |
| Output           | 6 W    |

| Variant            | Prod. no.      | GBP         |
|--------------------|----------------|-------------|
| ○ silver<br>2200 K | <b>1005273</b> | <b>9.00</b> |

## LED QPAR51 GU10



220-240 V ~50/60 Hz  
Material:

|                  |        |
|------------------|--------|
| Luminous flux    | 490 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 90     |
| Output           | 6 W    |

| Variant                    | Prod. no.      | GBP         |
|----------------------------|----------------|-------------|
| ● black<br>450 lm   2700 K | <b>1005077</b> | <b>7.00</b> |
| ● black<br>470 lm   3000 K | <b>1005080</b> | <b>7.00</b> |
| ● black<br>490 lm   4000 K | <b>1005083</b> | <b>7.00</b> |

## LED QPAR51 GU10



220-240 V ~50/60 Hz  
Material: plastic PC

|                  |        |
|------------------|--------|
| Luminous flux    | 490 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 90     |
| Output           | 6 W    |

| Variant                    | Prod. no.      | GBP         |
|----------------------------|----------------|-------------|
| ○ white<br>450 lm   2700 K | <b>1005076</b> | <b>7.00</b> |
| ○ white<br>470 lm   3000 K | <b>1005079</b> | <b>7.00</b> |
| ○ white<br>490 lm   4000 K | <b>1005082</b> | <b>7.00</b> |

## LED QPAR51 GU10



220-240 V ~50/60 Hz  
Material: plastic PC

|                  |        |
|------------------|--------|
| Luminous flux    | 490 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 90     |
| Output           | 6 W    |

| Variant                   | Prod. no.      | GBP         |
|---------------------------|----------------|-------------|
| ● grey<br>450 lm   2700 K | <b>1005075</b> | <b>7.00</b> |
| ● grey<br>470 lm   3000 K | <b>1005078</b> | <b>7.00</b> |
| ● grey<br>490 lm   4000 K | <b>1005081</b> | <b>7.00</b> |

## LED QPAR51 GU10



220-240 V ~50/60 Hz  
Material: glass  
Ø: 5 cm | L: 5.4 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 230 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 80     |
| Output           | 2.4 W  |

| Variant                 | Prod. no.      | GBP         |
|-------------------------|----------------|-------------|
| ○ transparent<br>2700 K | <b>1007230</b> | <b>5.00</b> |
| ○ transparent<br>3000 K | <b>1007231</b> | <b>5.00</b> |





## LED PAR11 GU10



NEW



220-240 V ~50/60 Hz  
Material: ceramic  
Ø: 3.5 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 430 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 90     |
| Output           | 4.9 W  |

| Variant                    | Prod. no.      | GBP          |
|----------------------------|----------------|--------------|
| ○ white<br>390 lm   2700 K | <b>1011670</b> | <b>10.00</b> |
| ○ white<br>430 lm   3000 K | <b>1011671</b> | <b>10.00</b> |

## LED QPAR111 GU10



220-240 V ~50/60 Hz  
Material: aluminium  
Ø: 11 cm | L: 7 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 750 lm |
| Lamp current     | 0.05 A |
| Colour rendering | 90     |
| Output           | 12 W   |

| Variant                        | Prod. no.      | GBP          |
|--------------------------------|----------------|--------------|
| ● aluminium<br>670 lm   2700 K | <b>1005297</b> | <b>73.00</b> |
| ● aluminium<br>680 lm   3000 K | <b>1005298</b> | <b>73.00</b> |
| ● aluminium<br>750 lm   4000 K | <b>1005299</b> | <b>73.00</b> |

## LED QPAR 111 GU10



220-240 V ~50/60 Hz  
Material: aluminium  
Ø: 11.1 cm | L: 7 cm

|                  |         |
|------------------|---------|
| Luminous flux    | 1000 lm |
| Lamp current     | 0.06 A  |
| Colour rendering | 90      |
| Output           | 12.5 W  |

| Variant                            | Prod. no.      | GBP          |
|------------------------------------|----------------|--------------|
| ○ silver<br>900 lm   2700 K   10°  | <b>1005275</b> | <b>48.00</b> |
| ○ silver<br>650 lm   3000 K   12°  | <b>1005278</b> | <b>48.00</b> |
| ○ silver<br>1000 lm   4000 K   10° | <b>1005281</b> | <b>48.00</b> |

## LED QPAR 111 GU10



220-240 V ~50/60 Hz  
Material: aluminium  
Ø: 11.1 cm | L: 7 cm

|                  |         |
|------------------|---------|
| Luminous flux    | 1000 lm |
| Lamp current     | 0.06 A  |
| Colour rendering | 90      |
| Output           | 12.5 W  |

| Variant                      | Prod. no.      | GBP          |
|------------------------------|----------------|--------------|
| ○ silver<br>950 lm   2700 K  | <b>1005276</b> | <b>43.00</b> |
| ○ silver<br>950 lm   3000 K  | <b>1005279</b> | <b>43.00</b> |
| ○ silver<br>1000 lm   4000 K | <b>1005282</b> | <b>43.00</b> |

## LED QPAR 111 GU10



Material: aluminium  
Ø: 11.1 cm | L: 7 cm

|                  |         |
|------------------|---------|
| Luminous flux    | 1100 lm |
| Lamp current     | 0.06 A  |
| Colour rendering | 90      |
| Output           | 12.5 W  |

| Variant                      | Prod. no.      | GBP          |
|------------------------------|----------------|--------------|
| ○ silver<br>1000 lm   2700 K | <b>1005277</b> | <b>43.00</b> |
| ○ silver<br>1000 lm   3000 K | <b>1005280</b> | <b>43.00</b> |
| ○ silver<br>1100 lm   4000 K | <b>1005283</b> | <b>43.00</b> |

## LED QPAR111 GU10



220-240 V ~50/60 Hz  
Material: glass  
Ø: 11.1 cm | L: 6.1 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 680 lm |
| Lamp current     | 0.05 A |
| Colour rendering | 90     |
| Output           | 8 W    |

| Variant                 | Prod. no.      | GBP          |
|-------------------------|----------------|--------------|
| ○ transparent<br>2700 K | <b>1005274</b> | <b>26.00</b> |

## LED A60 E27



220-240 V ~50/60 Hz  
Material: plastic  
Ø: 6 cm | L: 12 cm

|                  |         |
|------------------|---------|
| Luminous flux    | 1300 lm |
| Lamp current     | 0.06 A  |
| Colour rendering | 90      |
| Output           | 13.2 W  |

| Variant           | Prod. no.      | GBP          |
|-------------------|----------------|--------------|
| ○ white<br>2700 K | <b>1005302</b> | <b>11.00</b> |

## LED A60 E27, HIGH EFFICIENCY



220-240 V ~50/60 Hz  
Material: glass  
Ø: 6 cm | L: 10.8 cm

|                  |             |
|------------------|-------------|
| Luminous flux    | 830/860 lmn |
| Lamp current     | 0.04 A      |
| Colour rendering | 80          |
| Output           | 4 W         |

| Variant                          | Prod. no.      | GBP         |
|----------------------------------|----------------|-------------|
| ○ transparent<br>830 lm   2700 K | <b>1008641</b> | <b>7.00</b> |
| ○ transparent<br>860 lm   3000 K | <b>1008642</b> | <b>7.00</b> |

## LED A60 E27



220-240 V ~50/60 Hz  
Material: glass  
Ø: 6 cm | L: 10.8 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 810 lm |
| Lamp current     | 0.05 A |
| Colour rendering | 80     |
| Output           | 8 W    |

| Variant                 | Prod. no.      | GBP         |
|-------------------------|----------------|-------------|
| ○ transparent<br>2700 K | <b>1008643</b> | <b>3.00</b> |
| ○ transparent<br>3000 K | <b>1008644</b> | <b>3.00</b> |

## LED A60 E27





220-240 V ~50/60 Hz  
Material: glass  
Ø: 6 cm | L: 10.5 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 800 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 7.5 W  |

| Variant                 | Prod. no.      | GBP         |
|-------------------------|----------------|-------------|
| ○ transparent<br>2700 K | <b>1005303</b> | <b>9.00</b> |

## LED GLOBE 150 E27, TWISTED SMOKEY GREY



220-240 V ~50/60 Hz  
Material: glass  
Ø: 15 cm | L: 18.5 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 230 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 85     |
| Output           | 6 W    |

| Variant                | Prod. no.      | GBP          |
|------------------------|----------------|--------------|
| ● smoky grey<br>1900 K | <b>1008151</b> | <b>72.00</b> |

## LED GLOBE 125 E27, SOFT CURVE SMOKEY




220-240 V ~50/60 Hz  
Material: glass  
Ø: 12.5 cm | L: 18 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 400 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 8 W    |

| Variant                | Prod. no.      | GBP          |
|------------------------|----------------|--------------|
| ● smoky grey<br>1900 K | <b>1008159</b> | <b>77.00</b> |



## LED GLOBE 125 E27, SLANTING TOP SMOKEY

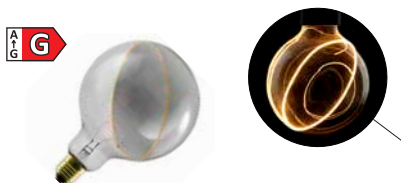


220-240 V ~50/60 Hz  
Material: glass  
Ø: 12.5 cm | L: 18 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 350 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 5 W    |

| Variant                | Prod. no. | GBP   |
|------------------------|-----------|-------|
| ● smoky grey<br>2200 K | 1008160   | 68.00 |

## LED GLOBE 125 E27, CRESCENT SLANTING SMOKEY

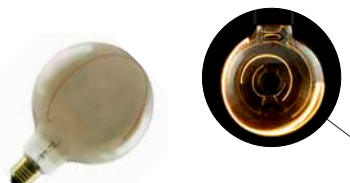

220-240 V ~50/60 Hz  
Material: glass  
Ø: 12.5 cm | L: 18 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 310 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 90     |
| Output           | 6 W    |

| Variant                | Prod. no. | GBP   |
|------------------------|-----------|-------|
| ● smoky grey<br>1900 K | 1008161   | 59.00 |

## LED GLOBE 125 E27, BLACK SMOKEY




220-240 V ~50/60 Hz  
Material: glass  
Ø: 12.5 cm | L: 16.5 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 220 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 85     |
| Output           | 6 W    |

| Variant                | Prod. no. | GBP   |
|------------------------|-----------|-------|
| ● smoky grey<br>1900 K | 1008155   | 59.00 |

## LED GLOBE 150 E27, BLACK SMOKEY

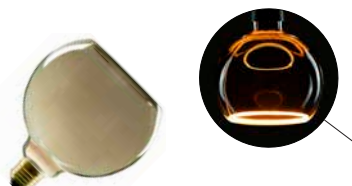


220-240 V ~50/60 Hz  
Material: glass  
Ø: 15 cm | L: 18.5 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 260 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 85     |
| Output           | 6 W    |

| Variant                | Prod. no. | GBP   |
|------------------------|-----------|-------|
| ● smoky grey<br>1900 K | 1008163   | 72.00 |

## LED GLOBE 200 E27, BLACK SMOKEY

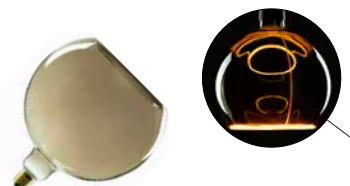


220-240 V ~50/60 Hz  
Material: glass  
Ø: 20 cm | L: 23 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 300 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 85     |
| Output           | 6 W    |

| Variant                | Prod. no. | GBP   |
|------------------------|-----------|-------|
| ● smoky grey<br>1900 K | 1008164   | 89.00 |

## LED GLOBE 300 E27, BLACK SMOKEY

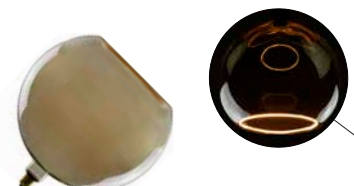


220-240 V ~50/60 Hz  
Material: glass  
Ø: 30 cm | L: 32 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 350 lm |
| Lamp current     | 0.05 A |
| Colour rendering | 85     |
| Output           | 8 W    |

| Variant                | Prod. no. | GBP    |
|------------------------|-----------|--------|
| ● smoky grey<br>1900 K | 1008165   | 214.00 |

## LED T32 E27, SOFT SPIRAL



220-240 V ~50/60 Hz  
Material: glass  
Ø: 3.2 cm | L: 19 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 570 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 6 W    |

| Variant                 | Prod. no.      | GBP          |
|-------------------------|----------------|--------------|
| ○ transparent<br>2200 K | <b>1008152</b> | <b>55.00</b> |

## LED T32 E27, SOFT TUBE



220-240 V ~50/60 Hz  
Material: glass  
Ø: 3.2 cm | L: 30 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 400 lm |
| Lamp current     | 0.05 A |
| Colour rendering | 90     |
| Output           | 8 W    |

| Variant                 | Prod. no.      | GBP          |
|-------------------------|----------------|--------------|
| ○ transparent<br>1900 K | <b>1008374</b> | <b>42.00</b> |

## LED T38 E27



220-240 V ~50/60 Hz  
Material: plastic  
Ø: 3.8 cm | L: 11.6 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 880 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 8 W    |

| Variant           | Prod. no.      | GBP          |
|-------------------|----------------|--------------|
| ○ white<br>3000 K | <b>1005289</b> | <b>10.00</b> |

## LED T45 E27



220-240 V ~50/60 Hz  
Material: plastic  
Ø: 4.5 cm | L: 14 cm

|                  |         |
|------------------|---------|
| Luminous flux    | 1520 lm |
| Lamp current     | 0.06 A  |
| Colour rendering | 90      |
| Output           | 13.5 W  |

| Variant           | Prod. no.      | GBP          |
|-------------------|----------------|--------------|
| ○ white<br>3000 K | <b>1005307</b> | <b>11.00</b> |

## LED T32 E27, SLIM TUBE



220-240 V ~50/60 Hz  
Material: glass  
Ø: 3.2 cm | L: 17.5 cm

|                  |         |
|------------------|---------|
| Manufacturer     | Segula  |
| Luminous flux    | 1250 lm |
| Lamp current     | 0.06 A  |
| Colour rendering | 90      |
| Output           | 11 W    |

| Variant                 | Prod. no.      | GBP          |
|-------------------------|----------------|--------------|
| ○ transparent<br>2700 K | <b>1008162</b> | <b>72.00</b> |

## LED ST64 E27, GOLD



220-240 V ~50/60 Hz  
Material: glass  
Ø: 6.4 cm | L: 14.5 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 700 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 7.5 W  |

| Variant          | Prod. no.      | GBP          |
|------------------|----------------|--------------|
| ● gold<br>2500 K | <b>1005265</b> | <b>23.00</b> |



## LED ST64

### E27, GOLD CURLY FILAMENT



220-240 V ~50/60 Hz  
Material: glass  
Ø: 6.4 cm | L: 14.2 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 300 lm |
| Lamp current     | 0.03 A |
| Colour rendering | 80     |
| Output           | 4 W    |

| Variant                                | Prod. no. | GBP  |
|----------------------------------------|-----------|------|
| ○ gold/transparent<br>250 lm   1800 K  | 1008645   | 6.00 |
| ○ gold/transparent<br>3000 lm   2000 K | 1008646   | 6.00 |

## LED ST58

### E27



220-240 V ~50/60 Hz  
Material: glass  
Ø: 5.8 cm | L: 14.2 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 800 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 7.5 W  |

| Variant                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| ○ transparent<br>2700 K | 1005268   | 11.00 |

## LED A60

### E27, MIRRORHEAD CHROM



220-240 V ~50/60 Hz  
Material: glass  
Ø: 6 cm | L: 10.5 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 720 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 7.5 W  |

| Variant            | Prod. no. | GBP   |
|--------------------|-----------|-------|
| ● chrome<br>2700 K | 1005305   | 17.00 |

## LED GLOBE 125

### E27



220-240 V ~50/60 Hz  
Material: glass  
Ø: 12.5 cm | L: 17.8 cm

|                  |        |
|------------------|--------|
| Luminous flux    | 800 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 7.5 W  |

| Variant                 | Prod. no. | GBP   |
|-------------------------|-----------|-------|
| ○ transparent<br>2700 K | 1005310   | 16.00 |

## LED GLOBE 125

### E27, HALF MOON



220-240 V ~50/60 Hz  
Material: glass  
Ø: 12.5 cm | L: 18 cm

|                  |        |
|------------------|--------|
| Manufacturer     | Segula |
| Luminous flux    | 650 lm |
| Lamp current     | 0.04 A |
| Colour rendering | 90     |
| Output           | 6.5 W  |

| Variant             | Prod. no. | GBP   |
|---------------------|-----------|-------|
| ○ frosted<br>2700 K | 1008157   | 42.00 |



## SLVconnect® LED PAR16 SMART GU10, ZIGBEE 3.0



NEW



220-240 V ~50/60 Hz  
Material: glass  
Ø: 5 cm

|                  |          |
|------------------|----------|
| Manufacturer     | Ledvance |
| Luminous flux    | 350 lm   |
| Lamp current     | 0.04 A   |
| Colour rendering | 80       |
| Output           | 4.7 W    |

| Variant       | Prod. no. | GBP   |
|---------------|-----------|-------|
| ○ transparent | 1012468   | 18.00 |

## SLVconnect® LED PAR16 SMART GU10, TUNABLE WHITE, ZIGBEE 3.0



NEW



220-240 V ~50/60 Hz  
Material: glass  
Ø: 5 cm

|                  |          |
|------------------|----------|
| Manufacturer     | Ledvance |
| Luminous flux    | 350 lm   |
| Lamp current     | 0.04 A   |
| Colour rendering | 80       |
| Output           | 4.7 W    |

| Variant       | Prod. no. | GBP   |
|---------------|-----------|-------|
| ○ transparent | 1012469   | 23.00 |

## SLVconnect® LED PAR16 SMART GU10, RGBW, ZIGBEE 3.0



NEW



220-240 V ~50/60 Hz  
Material: glass  
Ø: 5 cm

|                  |          |
|------------------|----------|
| Manufacturer     | Ledvance |
| Luminous flux    | 300 lm   |
| Lamp current     | 0.04 A   |
| Colour rendering | 80       |
| Output           | 4.9 W    |

| Variant       | Prod. no. | GBP   |
|---------------|-----------|-------|
| ○ transparent | 1012470   | 29.00 |

## SLVconnect® LED A60 SMART E27, ZIGBEE 3.0



NEW



220-240 V ~50/60 Hz  
Material: plastic PC  
Ø: 6 cm

|                  |          |
|------------------|----------|
| Manufacturer     | Ledvance |
| Luminous flux    | 806 lm   |
| Lamp current     | 0.06 A   |
| Colour rendering | 80       |
| Output           | 9 W      |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012471   | 14.00 |

## SLVconnect® LED A60 SMART E27, RGBW, ZIGBEE 3.0



NEW



220-240 V ~50/60 Hz  
Material: plastic PC  
Ø: 6 cm

|                  |          |
|------------------|----------|
| Manufacturer     | Ledvance |
| Luminous flux    | 806 lm   |
| Lamp current     | 0.06 A   |
| Colour rendering | 80       |
| Output           | 9 W      |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1012472   | 25.00 |



1008164 901

1008161 901



# ACCESSORIES



TENSEO  
TRANSFORMER | 908



LED POWER SUPPLY |  
908, 910-911



DALI INTERFACE | 908



CONVERTER | 908



NEW

BOX RELAY | 909



NEW

SLVconnect®  
BOX RELAY | 909



NEW

SLVconnect®  
G2 DIMMER BOX | 909



NEW

SLVconnect®  
DIN DIMMER | 909



NEW

CEILING OUTLET  
DIMMER | 909



NEW

SLVconnect®  
WHITE 5-BUTTON  
WIRELESS SWITCH |  
910



CONTROLLER | 910



POWER ADAPTER |  
912



DIMMABLE LED  
POWER SUPPLY | 912



LED DRIVER | 913-916



STRAIN RELIEF |  
916-917



DALI DT8  
CONTROLLER | 917



REMOTE CONTROL |  
917



EMERGENCY LIGHT  
KIT | 917



CEILING HOOK | 918



CABLE CLAMP | 918



TEXTILE CABLE | 918



GU10 LED  
CONNECTION BOX |  
918



CABLE | 918



GU10 FITTING | 918



CONNECTION BOX |  
919



Y CONNECTION BOX |  
919



NEW

48 V SYSTEM ROUND  
COVER PLATE | 919



NEW

48 V SYSTEM SQUARE  
COVER PLATE | 919

## TENSEO

12V AC | 50VA CONVENTIONAL



220-240 V ~50/60 Hz  
 Ø: 11.1 cm  
 H: 11 cm  
 Material: steel/brass

|                        |      |
|------------------------|------|
| Output voltage         | 12 V |
| Output up to           | 60 W |
| Number of sec. outputs | 1    |

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ● black  | 1002691   | 96.00  |
| ○ white  | 1002692   | 96.00  |
| ● chrome | 1002693   | 100.00 |

## TENSEO

12V AC | 105VA CONVENTIONAL



220-240 V ~50/60 Hz  
 Ø: 11.1 cm  
 H: 11 cm  
 Material: steel/brass

|                        |       |
|------------------------|-------|
| Output voltage         | 12 V  |
| Output up to           | 105 W |
| Number of sec. outputs | 1     |

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ○ white  | 138981    | 117.00 |
| ● chrome | 138982    | 130.00 |

## TENSEO

12V AC | 210VA CONVENTIONAL



220-240 V ~50/60 Hz  
 Ø: 13.5 cm  
 H: 11 cm  
 Material: steel/brass

|                        |       |
|------------------------|-------|
| Output voltage         | 12 V  |
| Output up to           | 210 W |
| Number of sec. outputs | 1     |

| Variant  | Prod. no. | GBP    |
|----------|-----------|--------|
| ○ white  | 138991    | 180.00 |
| ● chrome | 138992    | 184.00 |

## LED POWER SUPPLY

12V AC | 50VA CONVENTIONAL



220-240 V ~50/60 Hz  
 L: 10.6 cm  
 W: 3.3 cm  
 H: 2.2 cm

|                        |             |
|------------------------|-------------|
| Output voltage         | 11.2-11.5 V |
| Output from            | 3 W         |
| Output up to           | 60 W        |
| Number of sec. outputs | 1           |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008675   | 24.00 |

## DALI INTERFACE

1-10V + ON/OFF



220-240 V ~50/60 Hz  
 L: 5.9 cm  
 W: 3.3 cm  
 H: 1.5 cm  
 Material: plastic

- Suitable for controlling electronic ballasts with 1-10 V control input
- Galvanic isolation of DALI input and 1-10 V output

|                |         |
|----------------|---------|
| Output voltage | 0-250 V |
| Output up to   | 1000 W  |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ● grey  | 1002218   | 240.00 |

## CONVERTER

DALI -> PHASE DIM



L: 4.6 cm  
 W: 4.5 cm  
 H: 2 cm  
 Material: polycarbonate (PC)

- The dimmer converter is a trailing-edge phase dimmer with DALI and push control interface

|                |           |
|----------------|-----------|
| Output voltage | 100-240 V |
| Output from    | 0 W       |
| Output up to   | 200 W     |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1006452   | 68.00 |



## DALI INTERFACE

### PUSH DIMM / DALI PCU TW G2



NEW



220-240 V ~50/60 Hz  
L: 4.9 cm  
W: 4.8 cm  
H: 2.2 cm  
Material: plastic PC

- Can be combined with our 48 V track system
- Integrated bus power supply that generates a DALI signal
- Dimming: PUSH, DALI

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1011655   | 151.00 |

## BOX RELAY

### DALI



NEW



100-240 V ~50/60 Hz | 5 V  
L: 4.6 cm  
W: 4.5 cm  
H: 2.1 cm  
Material: plastic PC

- Dali relay module, 300 W LED / 1000 W conventional incandescent and halogen bulbs

|                        |        |
|------------------------|--------|
| Output up to           | 1000 W |
| Number of sec. outputs | 1      |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● blue  | 3009280   | 60.00 |

## SLVconnect® BOX RELAY

### ZIGBEE 3.0



NEW



100-240 V ~50/60 Hz | 5 V  
L: 4.6 cm  
W: 4.5 cm  
H: 2.1 cm  
Material: plastic PC

- Zigbee 3.0
- Load: LED 0-200 W / Halogen 0-400 W

|              |       |
|--------------|-------|
| Output from  | 0 W   |
| Output up to | 400 W |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● blue  | 3009282   | 56.00 |



| Product         | Prod. no. | GBP   |
|-----------------|-----------|-------|
| Accessories Box |           |       |
| ● blue          | 3009310   | 14.00 |

## SLVconnect®

### G2 DIMMER BOX

#### ZIGBEE 3.0



NEW



100-240 V ~50/60 Hz | 5 V  
L: 4.2 cm  
W: 3.8 cm  
H: 1.6 cm  
Material: plastic PC

- Zigbee 3.0 trailing-edge phase dimmer
- Trailing-edge phase dimming: 5-200 W LED (with neutral wire) Trailing-edge phase dimming: 20-200 W LED (without neutral wire)

|              |       |
|--------------|-------|
| Output from  | 5 W   |
| Output up to | 200 W |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● blue  | 3009286   | 60.00 |

## SLVconnect®

### DIN DIMMER

#### ZIGBEE 3.0



NEW



100-240 V ~50/60 Hz | 5 V  
L: 6.6 cm  
W: 1.8 cm  
H: 9 cm  
Material: plastic PC

- Zigbee 3.0 trailing-edge phase dimmer, for mounting on a Din Rail,
- Trailing-edge phase dimming: 5-200 W LED (with neutral wire) Trailing-edge phase dimming: 20-200 W LED (without neutral wire)

|              |       |
|--------------|-------|
| Output from  | 5 W   |
| Output up to | 200 W |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● blue  | 3009285   | 77.00 |

## CEILING OUTLET

### DIMMER

#### ZIGBEE 3.0



NEW



100-240 V ~50/60 Hz | 5 V  
Ø: 8.3 cm  
H: 3 cm  
Material: plastic PC

- Zigbee 3.0 trailing-edge phase dimmer module for flush-mounted sockets

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● white/blue | 3009389   | 96.00 |

# SLVconnect® WHITE 5-BUTTON WIRELESS SWITCH ZIGBEE 3.0



NEW



L: 5.6 cm  
W: 5.6 cm  
H: 1.2 cm  
Material: polycarbonate (PC)

- RGB+CCT+DIM Zigbee remote control, based on ZigBee 3.0, supports one group for connecting up to 30 lighting devices via TouchLink or a Zigbee hub

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 3009287   | 47.00 |

# CONTROLLER LED STRIP CCT / RGBW



12–24 V  
L: 14.5 cm  
W: 4.7 cm  
H: 1.6 cm  
Material: polycarbonate (PC)

- Brightness control for single-colour LED strips
- Colour temperature control for CCT strips and full colour control of RGB+CCT strips
- Controllable via Zigbee radio protocol

|                |         |
|----------------|---------|
| Output voltage | 12–24 V |
| Output from    | 48 W    |
| Output up to   | 96 W    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1006348   | 69.00 |

# LED POWER SUPPLY 24V | 24W



220–240 V ~50/60 Hz  
L: 13.7 cm  
W: 5 cm  
H: 1.6 cm

- Ultra-slim design
- strain relief included

|                        |      |
|------------------------|------|
| Output voltage         | 24 V |
| Output up to           | 24 W |
| Number of sec. outputs | 1    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008653   | 34.00 |

# LED POWER SUPPLY 24V | 36W



220–240 V ~50/60 Hz  
L: 17 cm  
W: 5.7 cm  
H: 1.8 cm

- Ultra-slim design
- strain relief included

|                        |      |
|------------------------|------|
| Output voltage         | 24 V |
| Output up to           | 36 W |
| Number of sec. outputs | 1    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008654   | 47.00 |

# LED POWER SUPPLY 24V | 60W



220–240 V ~50/60 Hz  
L: 17 cm  
W: 5.7 cm  
H: 1.8 cm

- Ultra-slim design
- strain relief included

|                        |      |
|------------------------|------|
| Output voltage         | 24 V |
| Output up to           | 60 W |
| Number of sec. outputs | 1    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008655   | 56.00 |

# LED POWER SUPPLY 12V | 24W, ROUND



220–240 V ~50/60 Hz  
Ø: 5.5 cm  
H: 2.5 cm

- Suitable for box installation
- strain relief not included

|                        |       |
|------------------------|-------|
| Output voltage         | 12 V  |
| Output from            | 1.2 W |
| Output up to           | 24 W  |
| Number of sec. outputs | 1     |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008651   | 23.00 |

## LED POWER SUPPLY

24V | 25W, ROUND



220-240 V ~50/60 Hz  
 Ø: 5.5 cm  
 H: 2.5 cm

- Suitable for box installation
- strain relief not included

|                        |       |
|------------------------|-------|
| Output voltage         | 24 V  |
| Output from            | 1.2 W |
| Output up to           | 25 W  |
| Number of sec. outputs | 1     |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008652   | 23.00 |

## LED POWER SUPPLY

30W | 24V DC STRAIN RELIEF INCLUDED



220-240 V ~50/60 Hz  
 L: 30 cm  
 W: 3 cm  
 H: 1.6 cm  
 Material: polycarbonate (PC)

|                        |      |
|------------------------|------|
| Output voltage         | 24 V |
| Output from            | 0 W  |
| Output up to           | 30 W |
| Number of sec. outputs | 1    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007250   | 43.00 |

## LED POWER SUPPLY

100W | 24V DC STRAIN RELIEF INCLUDED



220-240 V ~50/60 Hz  
 L: 35 cm  
 W: 3 cm  
 H: 1.8 cm  
 Material: polycarbonate (PC)

|                        |       |
|------------------------|-------|
| Output voltage         | 24 V  |
| Output from            | 0 W   |
| Output up to           | 100 W |
| Number of sec. outputs | 1     |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007251   | 69.00 |

## LED POWER SUPPLY

150W | 24V DC STRAIN RELIEF INCLUDED



220-240 V ~50/60 Hz  
 L: 35 cm  
 W: 3 cm  
 H: 1.8 cm  
 Material: polycarbonate (PC)

|                        |       |
|------------------------|-------|
| Output voltage         | 24 V  |
| Output from            | 0 W   |
| Output up to           | 150 W |
| Number of sec. outputs | 1     |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007252   | 86.00 |

## LED POWER SUPPLY

250W | 24V DC STRAIN RELIEF INCLUDED



220-240 V ~50/60 Hz  
 L: 40 cm  
 W: 4 cm  
 H: 2.2 cm  
 Material: polycarbonate (PC)

|                        |       |
|------------------------|-------|
| Output voltage         | 24 V  |
| Output from            | 0 W   |
| Output up to           | 250 W |
| Number of sec. outputs | 1     |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1007253   | 103.00 |

## LED POWER SUPPLY

25W | 24V



220-240 V ~50/60 Hz  
 L: 12.8 cm  
 W: 5.2 cm  
 H: 3 cm  
 Material: polycarbonate (PC)

|                        |       |
|------------------------|-------|
| Output voltage         | 24 V  |
| Output from            | 9.6 W |
| Output up to           | 25 W  |
| Number of sec. outputs | 1     |

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● white/blue | 1006336   | 30.00 |

## POWER ADAPTER 50W | 24V



220-240 V ~50/60 Hz  
L: 18.4 cm  
W: 6.1 cm  
H: 3.2 cm  
Material: polycarbonate (PC)

|                        |      |
|------------------------|------|
| Output voltage         | 24 V |
| Output from            | 12 W |
| Output up to           | 50 W |
| Number of sec. outputs | 1    |

| Variant      | Prod. no. | GBP   |
|--------------|-----------|-------|
| ● white/blue | 1003104   | 43.00 |

## POWER ADAPTER 100W | 24V DC



220-240 V ~50/60 Hz  
L: 21 cm  
W: 6.7 cm  
H: 3.4 cm  
Material: polycarbonate (PC)

|                        |       |
|------------------------|-------|
| Output voltage         | 24 V  |
| Output from            | 33 W  |
| Output up to           | 100 W |
| Number of sec. outputs | 1     |

| Variant      | Prod. no. | GBP    |
|--------------|-----------|--------|
| ● white/blue | 1003105   | 104.00 |

## LED POWER SUPPLY 30W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF



220-240 V ~50/60 Hz  
L: 30 cm  
W: 3 cm  
H: 1.6 cm  
Material: polycarbonate (PC)

|                        |      |
|------------------------|------|
| Output voltage         | 24 V |
| Output from            | 12 W |
| Output up to           | 30 W |
| Number of sec. outputs | 1    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007254   | 52.00 |

## LED POWER SUPPLY 100W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF



220-240 V ~50/60 Hz  
L: 35 cm  
W: 3 cm  
H: 1.8 cm  
Material: polycarbonate (PC)

|                        |       |
|------------------------|-------|
| Output voltage         | 24 V  |
| Output from            | 30 W  |
| Output up to           | 100 W |
| Number of sec. outputs | 1     |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007255   | 95.00 |

## LED POWER SUPPLY 150W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF



220-240 V ~50/60 Hz  
L: 35 cm  
W: 3 cm  
H: 1.8 cm  
Material: polycarbonate (PC)

|                        |       |
|------------------------|-------|
| Output voltage         | 24 V  |
| Output from            | 45 W  |
| Output up to           | 150 W |
| Number of sec. outputs | 1     |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1007256   | 121.00 |

## LED POWER SUPPLY 250W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF



220-240 V ~50/60 Hz  
L: 40 cm  
W: 4 cm  
H: 2.2 cm  
Material: polycarbonate (PC)

|                        |       |
|------------------------|-------|
| Output voltage         | 24 V  |
| Output from            | 75 W  |
| Output up to           | 250 W |
| Number of sec. outputs | 1     |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1007257   | 138.00 |

## LED DRIVER

4W | 350MA



100–240 V ~50/60 Hz | 5 V  
L: 4.75 cm  
W: 4.72 cm  
H: 2 cm  
Material: plastic PC

|                |           |
|----------------|-----------|
| Output voltage | 2.7–9.5 V |
| Output from    | 1 W       |
| Output up to   | 3.32 W    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008656   | 17.00 |

## LED DRIVER

4W | 700MA



100–240 V ~50/60 Hz | 5 V  
L: 4.75 cm  
W: 2.72 cm  
H: 2 cm  
Material: plastic PC

|                |           |
|----------------|-----------|
| Output voltage | 2.7–4.5 V |
| Output from    | 1.9 W     |
| Output up to   | 3.15 W    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008657   | 17.00 |

## LED DRIVER

10W | 350MA ROUND



100–240 V ~50/60 Hz | 5 V  
Ø: 5.1 cm  
H: 2.2 cm  
Material: plastic PC

|                |         |
|----------------|---------|
| Output voltage | 19–28 V |
| Output from    | 6.5 W   |
| Output up to   | 15 W    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008658   | 26.00 |

## LED DRIVER

15W | 700MA ROUND



100–240 V ~50/60 Hz | 5 V  
Ø: 5 cm  
H: 2.1 cm  
Material: plastic PC

|                    |         |
|--------------------|---------|
| Output voltage     | 13–21 V |
| Output from        | 9.1 W   |
| Output up to       | 14.7 W  |
| Thermal protection | 110 °C  |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008659   | 26.00 |

## LED DRIVER

20 W | 350MA



220–240 V ~50/60 Hz  
L: 11.6 cm  
W: 4.1 cm  
H: 2.5 cm  
Material: polycarbonate (PC)

|                        |        |
|------------------------|--------|
| Output voltage         | 2–54 V |
| Output from            | 0.7 W  |
| Output up to           | 19 W   |
| Number of sec. outputs | 1      |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007225   | 26.00 |

## LED DRIVER

21W | 150-500MA



220–240 V ~50/60 Hz  
L: 9.8 cm  
W: 4.4 cm  
H: 2.3 cm  
Material: plastic PC

|                        |         |
|------------------------|---------|
| Output voltage         | 15–45 V |
| Output from            | 2.3 W   |
| Output up to           | 22.5 W  |
| Number of sec. outputs | 1       |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008699   | 20.00 |



| Product                    | Prod. no. | GBP  |
|----------------------------|-----------|------|
| Standard strain relief     |           |      |
| ○ white                    | 1008670   | 1.00 |
| Through-wire strain relief |           |      |
| ○ white                    | 1008671   | 3.00 |



## LED DRIVER

44W | 700-1050MA



NEW



220-240 V ~50/60 Hz  
L: 9.8 cm  
W: 4.4 cm  
H: 2.3 cm  
Material: plastic PC

|                        |         |
|------------------------|---------|
| Output voltage         | 27-45 V |
| Output from            | 18.9 W  |
| Output up to           | 44.1 W  |
| Number of sec. outputs | 1       |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008701   | 29.00 |



| Product                       | Prod. no. | GBP  |
|-------------------------------|-----------|------|
| Standard strain relief        |           |      |
| ○ white                       | 1008670   | 1.00 |
| Through-wirable strain relief |           |      |
| ○ white                       | 1008671   | 3.00 |

## LED DRIVER

21W | 500MA STRAIN RELIEF INCLUDED



220-240 V ~50/60 Hz  
L: 11.6 cm  
W: 4.1 cm  
H: 2.5 cm  
Material: polycarbonate (PC)

|                        |        |
|------------------------|--------|
| Output voltage         | 2-42 V |
| Output from            | 1 W    |
| Output up to           | 21 W   |
| Number of sec. outputs | 1      |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007226   | 26.00 |

## LED DRIVER

20W | 350MA | PHASE



220-240 V ~50/60 Hz  
L: 11.6 cm  
W: 4.1 cm  
H: 2.5 cm  
Material: polycarbonate (PC)

|                        |         |
|------------------------|---------|
| Output voltage         | 28-50 V |
| Output from            | 9.8 W   |
| Output up to           | 17.5 W  |
| Number of sec. outputs | 1       |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007228   | 36.00 |

## LED DRIVER

20W | 350MA/500MA | PHASE



220-240 V ~50/60 Hz  
L: 11.6 cm  
W: 4.1 cm  
H: 2.5 cm  
Material: polycarbonate (PC)

|                        |         |
|------------------------|---------|
| Output voltage         | 10-30 V |
| Output from            | 3.5 W   |
| Output up to           | 15 W    |
| Number of sec. outputs | 1       |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007227   | 36.00 |

## LED DRIVER

10W | 180-270MA PHASE



220-240 V ~50/60 Hz  
L: 12.2 cm  
W: 4.1 cm  
H: 2.3 cm  
Material: plastic PC

|                |         |
|----------------|---------|
| Output voltage | 26-38 V |
| Output from    | 4.68 W  |
| Output up to   | 10 W    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008660   | 28.00 |

## LED DRIVER

10W | 500-700MA PHASE



220-240 V ~50/60 Hz  
L: 12.2 cm  
W: 4.1 cm  
H: 2.3 cm  
Material: plastic PC

|                |        |
|----------------|--------|
| Output voltage | 8-14 V |
| Output from    | 4 W    |
| Output up to   | 9.8 W  |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008661   | 32.00 |



## LED DRIVER

15W | 200-350MA PHASE



220-240 V ~50/60 Hz

L: 12.2 cm

W: 4.1 cm

H: 2.3 cm

Material: plastic PC

|                        |         |
|------------------------|---------|
| Output voltage         | 12-42 V |
| Output from            | 5.2 W   |
| Output up to           | 14.7 W  |
| Number of sec. outputs | 1       |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008662   | 37.00 |

## LED DRIVER

20W | 350-500MA PHASE



220-240 V ~50/60 Hz

L: 13.8 cm

W: 4.4 cm

H: 3 cm

Material: plastic PC

|                |         |
|----------------|---------|
| Output voltage | 26-38 V |
| Output from    | 9.1 W   |
| Output up to   | 19 W    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008663   | 42.00 |

## LED DRIVER

30W | 500-700MA PHASE



220-240 V ~50/60 Hz

L: 13.8 cm

W: 4.4 cm

H: 3 cm

Material: plastic PC

|                |         |
|----------------|---------|
| Output voltage | 26-42 V |
| Output from    | 13 W    |
| Output up to   | 30 W    |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008664   | 47.00 |

## LED DRIVER

40W | 700-1050MA PHASE



220-240 V ~50/60 Hz

L: 17.2 cm

W: 4.4 cm

H: 3 cm

Material: polycarbonate (PC)

|                |         |
|----------------|---------|
| Output voltage | 27-38 V |
| Output from    | 26.6 W  |
| Output up to   | 39.9 W  |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008665   | 50.00 |

## LED DRIVER

25W | 150-700MA | DALI  
DIMMABLE



220-240 V ~50/60 Hz

L: 11.9 cm

W: 5.2 cm

H: 2.3 cm

Material: polycarbonate (PC)

|                        |        |
|------------------------|--------|
| Output voltage         | 2-42 V |
| Output from            | 0.3 W  |
| Output up to           | 25 W   |
| Number of sec. outputs | 1      |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007229   | 62.00 |

## LED DRIVER

15W | 100-700MA DALI



220-240 V ~50/60 Hz

L: 10.3 cm

W: 3 cm

H: 2.1 cm

Material: plastic PC

|                |          |
|----------------|----------|
| Output voltage | 2.5-46 V |
| Output from    | 0.25 W   |
| Output up to   | 14.7 W   |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008666   | 63.00 |



| Product                         | Prod. no. | GBP  |
|---------------------------------|-----------|------|
| Standard strain relief for DALI |           |      |
| ○ white                         | 1008672   | 1.00 |

LED DRIVER  
23W | 100-700mA DALI



220-240 V ~50/60 Hz  
L: 10.3 cm  
W: 3 cm  
H: 2.1 cm  
Material: plastic PC

|                |          |
|----------------|----------|
| Output voltage | 2.5-46 V |
| Output from    | 0.25 W   |
| Output up to   | 23.1 W   |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008667   | 68.00 |



| Product                         | Prod. no. | GBP  |
|---------------------------------|-----------|------|
| Standard strain relief for DALI |           |      |
| ○ white                         | 1008672   | 1.00 |
| Through-wire DALI strain relief |           |      |
| ○ white                         | 1008673   | 3.00 |

LED DRIVER  
36W | 100-900mA DALI



220-240 V ~50/60 Hz  
L: 12.8 cm  
W: 30 cm  
H: 2.1 cm  
Material: plastic PC

|                |        |
|----------------|--------|
| Output voltage | 2.5 50 |
| Output from    | 0.37 W |
| Output up to   | 36 W   |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008668   | 73.00 |



| Product                         | Prod. no. | GBP  |
|---------------------------------|-----------|------|
| Standard strain relief for DALI |           |      |
| ○ white                         | 1008672   | 1.00 |
| Through-wire DALI strain relief |           |      |
| ○ white                         | 1008673   | 3.00 |

LED DRIVER  
53W | 650-1400mA DALI



220-240 V ~50/60 Hz  
L: 9.7 cm  
W: 4.3 cm  
H: 3 cm  
Material: plastic PC

|                |        |
|----------------|--------|
| Output voltage | 2.5 44 |
| Output from    | 1.62 W |
| Output up to   | 53.2 W |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1008669   | 80.00 |



| Product                             | Prod. no. | GBP  |
|-------------------------------------|-----------|------|
| Through-wire strain relief for DALI |           |      |
| ○ white                             | 1008673   | 3.00 |
| Standard 1008669 DALI strain relief |           |      |
| ○ white                             | 1008674   | 1.00 |

STRAIN RELIEF



220 V  
L: 3.8 cm  
W: 3 cm  
H: 2.1 cm  
Material: plastic PC

- For DALI dimmable drivers: 1008666, 1008667, 1008668

| Variant | Prod. no. | GBP  |
|---------|-----------|------|
| ○ white | 1008672   | 1.00 |

STRAIN RELIEF



220 V  
L: 3.8 cm  
W: 3.5 cm  
H: 3 cm  
Material: plastic PC

- For DALI dimmable drivers: 1008669

| Variant | Prod. no. | GBP  |
|---------|-----------|------|
| ○ white | 1008674   | 1.00 |

STRAIN RELIEF  
THROUGH-WIRE



220 V  
L: 10.6 cm  
W: 5.6 cm  
H: 2.1 cm  
Material: plastic PC

- For DALI dimmable drivers: 1008666, 1008667, 1008668

| Variant | Prod. no. | GBP  |
|---------|-----------|------|
| ○ white | 1008673   | 3.00 |

## STRAIN RELIEF THROUGH-WIRE



NEW

220–240 V ~50/60 Hz  
L: 10.7 cm  
W: 5.6 cm  
H: 3 cm  
Material: plastic PC

| Variant | Prod. no. | GBP  |
|---------|-----------|------|
| ○ white | 1008702   | 3.00 |

## STRAIN RELIEF STANDARD



220 V  
L: 3.4 cm  
W: 3.6 cm  
H: 2.3 cm  
Material: plastic PC

- For non-dimmable drivers: 1008699, 1008701

| Variant | Prod. no. | GBP  |
|---------|-----------|------|
| ○ white | 1008670   | 1.00 |

## STRAIN RELIEF THROUGH-WIRE



220 V  
L: 8.9 cm  
W: 5.8 cm  
H: 2.4 cm  
Material: plastic PC

- For non-dimmable drivers: 1008699, 1008701

| Variant | Prod. no. | GBP  |
|---------|-----------|------|
| ○ white | 1008671   | 3.00 |

## CONTROLLER DALI, DT8 5 CHANNEL



12–36 V  
L: 17 cm  
W: 5.3 cm  
H: 2.8 cm  
Material: polycarbonate (PC)

|                        |         |
|------------------------|---------|
| Output voltage         | 12–36 V |
| Output from            | 60 W    |
| Output up to           | 180 W   |
| Number of sec. outputs | 5       |

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1007997   | 103.20 |

## REMOTE CONTROL ZIGBEE, CCT/RGBW



L: 14 cm  
W: 4.4 cm  
H: 1.7 cm  
Material: polycarbonate (PC)

- Zigbee 3.0 supports three groups for connecting up to 30 lighting devices via Touch Link or a Zigbee hub

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ○ white | 1007827   | 68.00 |

## EMERGENCY LIGHT KIT DALI 2



Material: polycarbonate (PC)

- for use with and without DALI control line for remote status monitoring
- Data in emergency lighting mode: 6–54 V, 383–42@3.2 V
- Light output: 2.3 W

| Variant | Prod. no. | GBP    |
|---------|-----------|--------|
| ○ white | 1007892   | 110.00 |

FITU  
CEILING HOOK



Ø: 1.8 cm  
L: 4.6 cm  
Material: aluminium

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 132670    | 17.00 |
| ○ white | 132671    | 17.00 |

FITU  
CABLE CLAMP



Ø: 1.4 cm  
L: 3.1 cm  
Material: aluminium

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 132680    | 11.00 |
| ○ white | 132681    | 11.00 |

TEXTILE CABLE  
10 M




Ø: 0.6 cm  
L: 1,000 cm  
Material: polyvinyl chloride (PVC)/textile

Max. voltage 300

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 961270    | 54.00 |

GU10 LED  
CONNECTION BOX  
WITH BASEL, MAX. 10W



220-240 V ~50/60 Hz  
L: 3.8 cm  
W: 3.1 cm  
H: 1.7 cm  
Material: plastic

| Variant | Prod. no. | GBP  |
|---------|-----------|------|
| ● black | 1007283   | 6.00 |

CABLE  
3-PIN, 3 X 0,75 MMA<sup>2</sup>, 10 M




L: 1,000 cm

Max. voltage 300

| Variant       | Prod. no. | GBP   |
|---------------|-----------|-------|
| ○ transparent | 961250    | 24.00 |

GU10 FITTING



Ø: 2.8 cm  
H: 1.6 cm  
Material: ceramic

| Variant | Prod. no. | GBP  |
|---------|-----------|------|
| ○ white | 955135    | 2.00 |



## CONNECTION BOX

IP68, 3-PIN



Ø: 2.7 cm  
L: 11.5 cm  
Material: polyamide (PA)

|                   |      |
|-------------------|------|
| Max. voltage      | 450  |
| Max. current load | 17,5 |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 228730    | 16.00 |

## Y CONNECTION BOX

IP68, 3-PIN



L: 11 cm  
W: 6.4 cm  
H: 3 cm  
Material: polyamide (PA)

|                   |      |
|-------------------|------|
| Max. voltage      | 500  |
| Max. current load | 17,5 |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 228726    | 29.00 |

## CONNECTION BOX

IP68, 5-PIN



Ø: 3.2 cm  
L: 13 cm  
Material: polyamide (PA)

|                   |     |
|-------------------|-----|
| Max. voltage      | 450 |
| Max. current load | 32  |

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 228725    | 18.00 |

## CONNECTION BOX

5-PIN, DALI



L: 18 cm  
W: 6.3 cm  
H: 3.3 cm  
Material: polyamide 66 (PA)

|                   |    |
|-------------------|----|
| Max. current load | 16 |
|-------------------|----|

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1006453   | 31.00 |

## 48 V SYSTEM ROUND COVER PLATE

R80 MM



NEW


Ø: 8 cm  
H: 0.1 cm  
Material: steel

- Compatible with standard flush-mounted boxes with a diameter of 68 mm.
- supplied with two screws – with painted heads

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1012352   | 15.00 |
| ○ white | 1012353   | 15.00 |

## 48 V SYSTEM SQUARE COVER PLATE

86 MM X 86 MM



NEW

L: 8.6 cm  
W: 8.6 cm  
H: 0.1 cm  
Material: steel

- Compatible with standard flush-mounted boxes with a diameter of 68 mm.
- supplied with two screws – with painted heads

| Variant | Prod. no. | GBP   |
|---------|-----------|-------|
| ● black | 1012350   | 14.00 |
| ○ white | 1012351   | 14.00 |



HAVEN  
1011685

---



MOTUNA  
1010366

# INDOOR RECESSED CEILING LIGHTS

|                                                                                          |                                                                                          |                                                                                          |                                                                                            |                                                                                             |                                                                                       |
|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <br>NEW | <br>NEW | <br>NEW |           |           |    |
| LED<br>UNIVERSAL<br>DOWNLIGHT SLIM   12                                                  | LED<br>UNIVERSAL<br>DOWNLIGHT FIX   12                                                   | LED<br>UNIVERSAL<br>DOWNLIGHT MOVE   12                                                  | LED<br>KADUX   14                                                                          | LED<br>KADUX   15                                                                           |                                                                                       |
|         |         |         |           |           |    |
| LED<br>KADUX   15                                                                        | SECKET<br>KADUX   16-17                                                                  |                                                                                          | LED<br>NUMINOS®   18-26                                                                    |                                                                                             | LED<br>NUMINOS® MOVE   28-36                                                          |
|         |         |         |           |            |     |
| LED<br>NUMINOS® GIMBLE   38-46                                                           | LED<br>DYSKO   57                                                                        | LED<br>SECKET<br>NEW TRIA®   58-63, 66-73                                                |                                                                                            |                                                                                             |                                                                                       |
|       |       |       |         |          |   |
| LED<br>NEW TRIA® UNIVERSAL   64-65                                                       |                                                                                          |                                                                                          | SECKET<br>NEW TRIA®   86                                                                   | SECKET<br>NEW TRIA®   87                                                                    | LED<br>GLENOS® PRO   87                                                               |
|       |       |       |         |          |   |
| LED<br>MEDO®   88-89                                                                     | LED<br>HORN MINI   90                                                                    | SECKET<br>HORN   91-93                                                                   |                                                                                            |                                                                                             | SECKET<br>HORN 1   92                                                                 |
|       |       |       | <br>NEW | <br>NEW |  |
| SECKET<br>HORN T   93                                                                    | LED<br>HORN MAGNA                                                                        | LED<br>SENSOR 2.0   94-101                                                               | LED<br>DOWNLIGHT VARIO   102-103                                                           |                                                                                             | VERLUX   104                                                                          |



LED

DL 126 | 105



SØCKET

PIKA | 105



LED

OCULUS | 107




LED

OCCULDAS | 107



SØCKET

ENOLA® 2.0 | 108-109



SØCKET

ENOLA® 2.0 | 108-109



LED

KARPO | 110



LED

GRIP! | 111



LED

GRIP! | 111



SØCKET

PLASTRA | 113



SØCKET

VARU | 113



SØCKET

DOLIX OUT | 114-115



LED

KINI | 115



LED

AKALO D83 | 115



LED

FRAME BASIC |  
116-117

LED

FRAME CURVE | 117



LED

NOTAPO | 119



LED

DOWNUNDER PUR |  
120-121

LED

MOBALA | 121



LED

WORO | 121




LED

PATTA-I | 122



LED

PATTA-I | 122-123



LED

PATTA-F | 123








CONCRETO  
1006406



# OUTDOOR RECESSED WALL LIGHTS




CONCRETO | 865



ADI | 866



DOWNUNDER OUT | 867



BRICK MESH | 868



BRICK | 868



BRICK DOWNUNDER | 869





DASAP® S  
1007680



# OUTDOOR RECESSED FLOOR LIGHTS



LED

DASAR® | 873



LED

DASAR® | 874-877



LED

DASAR® FLAT | 880



LED

DASAR® | 880-881



LED

DASAR® 920 | 881



SOCKET

DASAR® 115 | 882



SOCKET

DASAR® EXACT 116 | 883



SOCKET

DASAR® 215 | 885



SOCKET

DASAR® 215 | 885



LED

DASAR® 370 | 885



LED

TRAIL-LITE® | 886



LED

POWER TRAIL-LITE® | 887



LED

SMALL PLOT | 888



LED

BIG PLOT | 889



LED

ROCCI | 890



LED

ROCCI 200 | 891



SOCKET

SOLASTO | 893







TAHA II 45  
1010197



GALEN PRO 120  
1009108

---

**RESTAURANT  
BRASSERIE**

# INDOOR CEILING LIGHTS





## OUTDOOR CEILING LIGHTS



SECKET

PHOTONI CYL | 754



SECKET

PHOTONI | 754



SECKET

SEJERO | 755



LED

CUBE | 757



LED

ESKINA FRAME | 757



LED

ENOLA® OCULUS | 758



LED

ENOLA® ROUND | 759



LED


ENOLA® SQUARE |  
760-761



LED

SECKET

BIG THEO | 761



LED

OVALISK | 763



SECKET

MOLAT | 763



SECKET

SITRA | 765



SECKET

ROX | 765



# INDOOR PENDANT LIGHTS

|                                                                                       |                                                                                         |                                                                                       |                                                                                       |                                                                                      |
|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  NEW |        |      |      |   |
| SECKET<br>HAVEN   175                                                                 | LED<br>QUIMERA   177                                                                    | SECKET MIX<br>match<br>VARYT   179                                                    | SECKET<br>WUD   181                                                                   | SECKET<br>SUN   182                                                                  |
|      |        |      |      |     |
| SECKET<br>OLYPSO   183                                                                | SECKET<br>MAGICO   185                                                                  | SECKET<br>GRILL S   195                                                               | LED<br>MOTUNA   197                                                                   | LED<br>NUMINOS®   186-193                                                            |
|  NEW |  NEW   |  NEW |  NEW |    |
| LED<br>OVANA 44   197                                                                 | LED<br>SLVconnect®<br>OVANA 44   197                                                    | LED<br>MEDO® 2 SLIM  <br>198-201                                                      | LED<br>MEDO® HYVE  <br>202-203                                                        | LED<br>MEDO® RING  <br>206-207                                                       |
|     |       |     |     |    |
| LED<br>SECKET<br>LALU® SET   216-221                                                  | LED<br>DYSKO   221                                                                      | LED<br>ONE FLAT   223                                                                 | LED<br>ONE VERTICAL   224                                                             | LED<br>ONE CUBE UP/DOWN  <br>225                                                     |
|    |      |    |    |  |
| LED<br>ONE CUBE   225                                                                 | LED<br>ONE DOUBLE   231                                                                 | LED<br>ONE TRIPLE   231                                                               | SECKET<br>PANTILO ROPE   239                                                          | SECKET<br>PANTILO OVAL   240                                                         |
|    |  NEW |    |    |  |
| LED<br>ONE LINEAR   233                                                               | LED<br>LINIUS   234-237                                                                 | SECKET<br>PANTILO CONVEX   241                                                        | SECKET<br>PANTILO   240                                                               | SECKET<br>PANTILO CONVEX   241                                                       |



SOCKET

LIGHT EYE® | 243



SOCKET

ENOLA® 2.0 | 244–245



SOCKET

ASTO TUBE | 247



LED

GLENOS® 2.0 | 248–249



LED

GLENOS® PRO | 249



LED

WORKLIGHT PRO | 251



LED

WORKLIGHT | 251



LED

PANEL | 253



LED

GRIP! FLAT | 255



LED

OCULUS | 257



SOCKET

FITU | 258



SOCKET

FENDA | 260–261



LED

HELIA | 264–265



SOCKET

PARA CONE | 265



SOCKET

PHELIA | 267



SOCKET

FORCHINI | 268–269



SOCKET

ROTOBALL | 271



SOCKET

PARA DOME | 273



SOCKET

PARA 380 PD | 273






MANA  
1008206



# INDOOR WALL AND CEILING LIGHTS

|                                                                                                                |                                                                                                                  |                                                                                                                     |                                                                                                                        |                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <br>LED<br>QUIMERA   279      | <br>LED<br>LYGANT   279         | <br>LED<br>SUN MIRROR   281        | <br>SECKET<br>VARYT   285             | <br>MIX<br>match<br>SECKET<br>SUN   286-287 |
| <br>LED<br>DYSKO   289        | <br>LED<br>NUMINOS®   290-297   | <br>LED<br>MEDO® 2 SLIM   298-301  | <br>LED<br>MEDO® HYVE   302-303      | <br>LED<br>MEDO® PRO   304-309             |
| <br>LED<br>ONE   310-311      | <br>LED<br>ONE LINEAR   312-313 | <br>LED<br>ONE   313               | <br>LED<br>TRUKKO   314-315           | <br>LED<br>SEDO   316-317                   |
| <br>LED<br>ARLINA   317     | <br>SECKET<br>WL   318-319     | <br>SECKET<br>MIBO UP/DOWN   319 | <br>LED<br>MAGANDA   319            | <br>LED<br>DORISA   320                  |
| <br>LED<br>Q-LINE®   321    | <br>LED<br>L-LINE 60   321    | <br>SECKET<br>PANTILO ROPE   322 | <br>SECKET<br>ENOLA® 2.0   324-327 | <br>LED<br>SECKET<br>GRIP!   328-329       |
| <br>LED<br>GRIP! FLAT   329 | <br>ASTO TUBE   331           | <br>MANA   333-335              |                                                                                                                        |                                                                                                                               |

# INDOOR WALL AND CEILING LIGHTS

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    |    |    |   |   |                                                                                       |
| LED<br>OCULUS                                                                       | SOCKET<br>PLASTRA   338-339                                                         | LED<br>PLASTRA   340                                                                | SOCKET<br>PLASTRA   340                                                             | SOCKET<br>PLASTRA 101   341                                                          |                                                                                       |
|    |    |    |    |    |    |
| SOCKET<br>PLASTRA   341                                                             | SOCKET<br>PLASTRA 104   341                                                         | SOCKET<br>WUD   343                                                                 | LED<br>LOGS IN   344-345                                                            | LED<br>QUAD FRAME   346                                                              | LED<br>SOCKET<br>WL 149   347                                                         |
|    |    |    |    |    |    |
| LED<br>SHELL 30   347                                                               | LED<br>ASSO 300   348-349                                                           | SOCKET<br>OSSA7 349                                                                 | LED<br>CARISO   351                                                                 | LED<br>CHROMBO   351                                                                 | LED<br>DIRETO 60   353                                                                |
|  |  |   |   |  |  |
| SOCKET<br>DENA 30   353                                                             | SOCKET<br>BASKET   353                                                              | FITU   354                                                                          | SOCKET<br>THEO UP/DOWN   354                                                        | SOCKET<br>SOLID CUBE   354                                                           | SOCKET<br>FENDA   355                                                                 |
|  |  |  |  |  |  |
| LED<br>SOCKET<br>KENKUA SPOT   355                                                  | LED<br>SOCKET<br>COUPA   356                                                        | LED<br>KARPO MAGN   356                                                             | LED<br>KARPO GOOSE   356                                                            | LED<br>KARPO 30   357                                                                | LED<br>KARPO   357                                                                    |
|  |  |  |  |  |  |
| LED<br>SOMNILA SPOT   358                                                           | LED<br>SOMNILA FLEX   358-359                                                       | LED<br>SOCKET<br>DIO FLEX PLATE   359                                               | SOCKET<br>PHELIA   361                                                              | LED<br>MERADO FLOOD   361                                                            | SOCKET<br>DISPLAY ADL 50   361                                                        |
|  |  |  |  |  |  |
| SOCKET<br>PURI 2.0 TUBE   362-363                                                   |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |



SECKET

PURI 2.0 CONE | 364–365



SECKET

PURI 2.0 DOME | 366–367



LED

NOBLO® | 371–373



LED

KALU 2.0 | 374



SECKET

PANTILO ROPE | 375



SECKET

MOTUNA | 375

NEW



LED

CYFT | 376–379



SECKET

ASTO TUBE | 381



SECKET

KALU | 383



SECKET

KALU | 383



SECKET

ALTRA DICE | 385



SECKET

SPOT 79 | 385



LED

SENDER 2.0 | 386–389



NEW



LED

LIPSY® 2.0 | 390–393



LED

SIMA | 394



SECKET

MELAN | 395



LED

BATTEN | 395





ENOLA® OCULUS  
1006328





# OUTDOOR WALL AND CEILING LIGHTS



SECKET  
SEJERO | 771



LED  
ALEGRIA | 773



LED  
AINOS SLIDE | 774-775



LED  
QUADRASYL PRO | 777



LED  
S-CUBE | 778



LED  
R-CUBE | 778



LED  
MODELA | 778



SECKET  
PHOTONI CYL | 779




SECKET  
PHOTONI | 779



LED  
LID I | 780-781



LED  
LID II | 781



LED  
Q-RING | 782



LED  
I-RING | 783



LED  
D-RING | 783



LED  
OVAL | 784



LED  
CONCRETO | 785



LED  
RASTERLYS | 787



SECKET  
T-TUBE | 788-789



SECKET  
S-TUBE | 791



LED  
FLATT II | 793



LED  
FLATT | 794



SECKET  
THEO UP/DOWN | 795



LED  
BIG THEO | 795-796



SECKET  
THEO | 796



LED  
BIG THEO FLOOD



LED  
BIG THEO | 797



LED  
THEO PRO | 798-801



LED  
HELIA PRO | 802-805



LED  
SITRA | 807-809




SECKET  
SITRA CUBE | 809



LED  
BIG QUAD | 810

# OUTDOOR WALL AND CEILING LIGHTS



LED  
QUAD | 811



LED  
RUSTY® UP/DOWN | 812



LED  
ENOLA® OCULUS | 813



LED  
ENOLA® ROUND |  
816-817



LED  
ENOLA® SQUARE |  
818-819



SECKET  
GRAFIT | 822-823



SECKET  
SQUARE | 824



LED  
SECKET  
QUADRULO | 824-825



SECKET  
MERIDIAN | 826



SECKET  
MERIDIAN BOX | 827



LED  
ESKINA FRAME | 829



LED  
BOOKAT | 830




LED  
TAHA II | 830



LED  
OVALISK SENSOR |  
831



LED  
SECKET  
PEMA® | 832-833




SECKET  
ASTINA | 834



SECKET  
ASTINA STEEL | 834



LED  
ANGOLUX | 835



LED  
VILUA | 837



SECKET  
MYRA UP/DOWN | 839



SECKET  
SITRA | 839



SECKET  
ROX | 840



LED  
DELWA | 840



SECKET  
WALLYX | 840



LED  
DOWNUNDER OUT | 841



LED  
ABRIDOR | 843



LED  
ORDI | 844



LED  
ORDI II | 845





LED  
SECKET

BOX-L | 846



SECKET

BOX | 846



LED

LOGS | 487



LED

OUT-BEAM UP/  
FLOOD DOWN | 847



LED

L-LINE OUT | 847



SECKET

PHOTONIA | 848



SECKET

MOLAT | 848



SECKET

GLOO PURE | 848



SECKET

F-POL | 849




LED

IPERI | 849



SECKET

QUADRASYL | 849



SECKET

SQUARE TURN | 850



LED

TODAY PRO | 850



LED

ESKINA D | 851



SECKET

MYRA DISPLAY | 851



SECKET

MYRA | 851



LED

LED SPOT | 853



SECKET

NAUTILUS | 853



SECKET

MYRA | 853



LED

ESKINA SPOT | 855



SECKET

SITRA 360 | 856



SECKET

THEO BRACKET | 856



LED

HELIA | 857



LED

AINOS | 858-859



LED

TERANG 200 | 861



SECKET

BULAN | 861



SECKET

BULAN GRID | 861

VARYT  
1008113 + 1008023





# INDOOR TABLE AND FLOOR LIGHTS



SECKET

WUD TL | 399



SECKET

VARYT | 401

MIX  
match



LED

QUIMERA | 403



LED

ONE STRAIGHT | 405



LED

ONE BOW | 405



SECKET

SUN | 407



SECKET

PANTILLO SLIM | 408



SECKET

PANTILLO | 409



SECKET

PANTILLO ROPE | 409



SECKET

FENDA | 411-413




MIX  
match

NEW



LED

MECANICA 2.0 | 414



LED

KARPO | 415



SECKET

PHELIA | 415



LED

WORKLIGHT EASY | 417



LED

WORKLIGHT | 417

NEW



LED

WORKLIGHT PRO | 419







LOGS 40  
232115







FLATT II 62  
1010106

# OUTDOOR MOBILE LIGHTS AND FLOOR LIGHTS



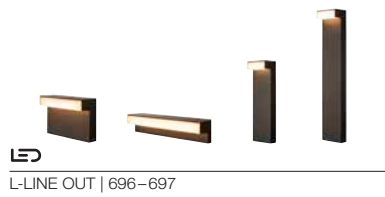





SAMRINA  
1004757





NEW

# OUTDOOR SPOTLIGHTS



LED

SYNA WIDE | 732



SOCKET

SYNA SHADE | 732



LED

SYNA PLANT | 733



LED

SYNA GARDEN | 733



LED

SYNA | 733



LED

PL-BEAM PRO |  
734-735

LED

GALEN | 738



LED

GALEN PRO | 739



LED

HELIA SPOT | 740



LED

FLAC BEAM | 741



SOCKET

SAMRINA | 741



LED

NAUTILUS 10 | 742



SOCKET

NAUTILUS 10 | 743



SOCKET

BIG NAUTILUS | 743



SOCKET

NAUTILUS | 744



LED

NAUTILUS 10 SPOT | 744



LED

DASAR® PROJECTOR |  
745

LED

DASAR® 920 | 745



LED

HELIA SLIM | 747



SOCKET

THEO BRACKET | 749



LED

LED SPIKE | 749



SOCKET


SITRA 360 SPIKE | 751

GRIP! FLAT  
1009014





## 48 V INDOOR SYSTEMS

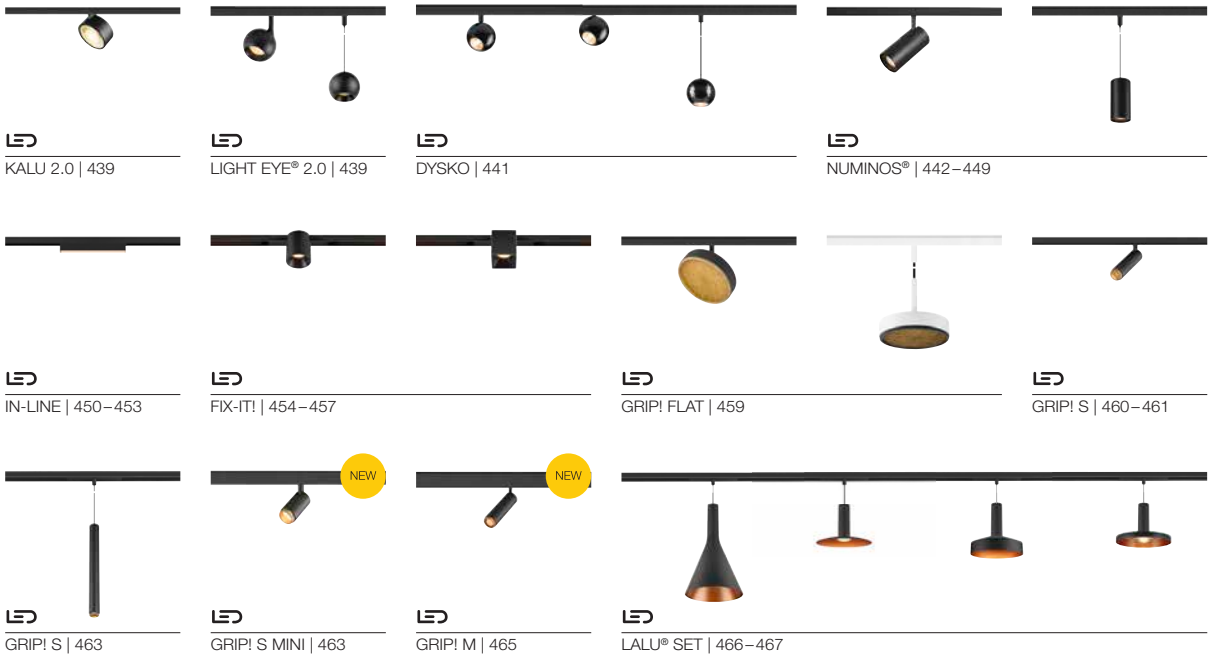

## INDOOR LOW-VOLTAGE SYSTEMS





NUMINOS® M  
1004470





# INDOOR SINGLE-PHASE SYSTEMS

|                                                                                                                                                                                                                                 |                                                                                                                                                                                                                              |                                                                                                                                                                                                           |                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                    |                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
|  <div>NEW</div> <div>SOCKET</div> <div>HAVEN 25   487</div>                                                                                    |  <div>LED</div> <div>QUIMERA   489</div>                                                                                                    |  <div>SOCKET</div> <div>FORCHINI M 40<br/>TRACK   489</div>                                                              |  <div>LED</div> <div>LALU® SET   491-493</div>                                                                                                     |  <div>SOCKET</div> <div>PURI 2.0 TUBE  <br/>495-497</div>                                                                                       |                                                                                                                                   |
|   <div>SOCKET</div> <div>PURI 2.0 CONE  <br/>495-497</div>    |   <div>SOCKET</div> <div>PURI 2.0 DOME  <br/>495-459</div> |  <div>SOCKET</div> <div>PURI 2.0   498</div>                                                                             |   <div>NEW</div> <div>SOCKET</div> <div>ENOLA® 2.0   500-501</div> |   <div>NEW</div> <div>SOCKET</div> <div>BIMA 2.0   503</div> |                                                                                                                                   |
|   <div>LED</div> <div>SOCKET</div> <div>GRIP!   505-509</div> |   <div>LED</div> <div>GRIP! FLAT   511</div>               |   <div>LED</div> <div>DYSKO   513</div> |   <div>LED</div> <div>SOCKET</div> <div>LIGHT EYE®   514-517</div> |  <div>LED</div> <div>KALU 2.0   519</div>                                                                                                       |  <div>SOCKET</div> <div>KALU TRACK   519</div> |
|  <div>LED</div> <div>NOBLO® SPOT   521</div>                                                                                                 |   <div>SOCKET</div> <div>ASTO TUBE   523</div>         |  <div>SOCKET</div> <div>PARA CONE GL   525</div>                                                                        |   <div>SOCKET</div> <div>PARA CONE 14   525</div>              |  <div>LED</div> <div>HELIA 50 TRACK   527</div>                                                                                               |  <div>LED</div> <div>PANEL TRACK   527</div>  |
|  <div>LED</div> <div>PANEL TRACK   527</div>                                                                                                 |  <div>SOCKET</div> <div>EURO SPOT TRACK  <br/>529</div>                                                                                   |  <div>SOCKET</div> <div>ALTRA DICE TRACK  <br/>529</div>                                                               |                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                    |                                                                                                                                   |



NUMINOS® M  
1004459





# INDOOR THREE-PHASE SYSTEMS

|                                                                                                                                       |                                                                                                                                        |                                                                                                                                      |                                                                                                                             |                                                                                                                                  |                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
|  <p>NEW</p> <p>SECKET<br/>HAVEN 25   555</p>         |  <p>SECKET<br/>PURI 2.0 TUBE   557-561</p>            |  <p>SECKET<br/>PURI 2.0 CONE   557-561</p>          |  <p>SECKET<br/>PURI 2.0 DOME   557-561</p> |  <p>NEW</p> <p>SECKET<br/>BIMA 2.0   563</p>   |                                                                                                                              |
|  <p>NEW</p> <p>SECKET<br/>ENOLA® 2.0 S   564-565</p> |  <p>NEW</p> <p>LED<br/>SECKET<br/>GRIP!   566-569</p> |  <p>LED<br/>NUMINOS®   572-579</p>                  |  <p>LED<br/>NUMINOS® ZOOM   580-581</p>    |  <p>LED<br/>UNIVERSAL TRACKSPOT   583</p>      |  <p>LED<br/>NOBLO® SPOT   585</p>         |
|  <p>NEW</p> <p>LED<br/>EURO CUBE 2   586-587</p>     |  <p>LED<br/>KALU 2.0   589</p>                        |  <p>SECKET<br/>KALU TRACK   589</p>                 |  <p>LED<br/>SIGHT EVO   590-591</p>        |  <p>LED<br/>SIGHT PANEL   592</p>              |  <p>LED<br/>SIGHT EASY   593</p>          |
|  <p>LED<br/>SIGHT TRACK   594</p>                  |  <p>LED<br/>SIGHT MOVE   595</p>                    |  <p>LED<br/>SECKET<br/>PARA CONE 14   596-597</p> |  <p>SECKET<br/>PARA CONE GL   597</p>    |  <p>SECKET<br/>FORCHINI M 40 TRACK   599</p> |  <p>SECKET<br/>LIGHT EYE®   600-601</p> |
|  <p>SECKET<br/>EURO SPOT TRACK   603</p>           |  <p>LED<br/>HELIA 50 TRACK   605</p>                |                                                                                                                                      |                                                                                                                             |                                                                                                                                  |                                                                                                                              |




LEDSTRIP IP  
1000465 + 1004726






# PROFILES AND LED STRIPS

## SETS

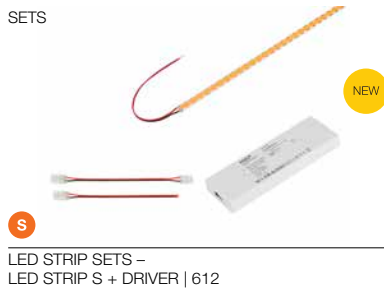


LED STRIP SETS –  
LED STRIP S + DRIVER | 612

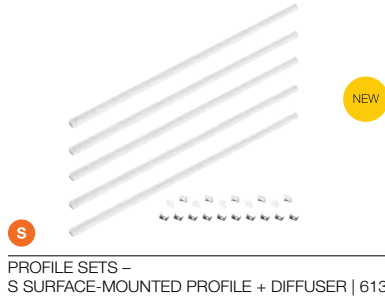

PROFILE SETS –  
S SURFACE-MOUNTED PROFILE + DIFFUSER | 613

## LED STRIPS



COB LED STRIPS | 614



SMD LED STRIPS | 615



COB LED STRIPS | 616



SMD LED STRIPS | 617



LED STRIPS COB  
TW & RGBW | 618



LED STRIPS SMD  
TW & RGBW | 619



LED STRIPS COB IP67 |  
620



LED STRIPS SMD IP67 |  
621



COB LED STRIPS | 622




SMD LED STRIPS | 623



ACCESSORIES |  
624–625

## PROFILES



PROFILE SETS  
AND ACCESSORIES |  
626–627



PROFILE SETS  
AND ACCESSORIES |  
628–629



PROFILE SETS  
AND ACCESSORIES |  
630–631



RECESSED PROFILE  
AND ACCESSORIES |  
632



ONE  
1002909





Please note: 7-digit product no. can be found from page 961

|               |          |               |                              |               |                              |
|---------------|----------|---------------|------------------------------|---------------|------------------------------|
| <b>111000</b> |          | <b>132000</b> |                              | 143102        | 483                          |
| 111262        | 117      | 132020        | 385                          | 143110        | 483                          |
| 111292        | 117      | 132021        | 385                          | 143111        | 483                          |
| 111382        | 87       | 132024        | 385                          | 143112        | 483                          |
|               |          | 132600        | 181, 182, 185, 259, 597      | 143120        | 182, 185, 259, 482, 485, 597 |
| <b>112000</b> |          | 132601        | 181, 182, 185, 259, 597      | 143121        | 182, 185, 259, 482, 485, 597 |
| 112221        | 105      | 132605        | 181, 182, 259, 273, 597      | 143124        | 185, 259, 273, 482, 485, 597 |
| 112222        | 105      | 132610        | 259                          | 143130        | 483                          |
| 112225        | 105      | 132611        | 259                          | 143131        | 483                          |
| 112682        | 104      | 132660        | 260                          | 143132        | 483                          |
| 112692        | 104      | 132661        | 260                          | 143151        | 483                          |
| 112720        | 116      | 132670        | 918                          | 143152        | 483                          |
| 112721        | 116      | 132671        | 918                          | 143160        | 483                          |
| 112780        | 116, 117 | 132680        | 918                          | 143161        | 483                          |
| 112781        | 116, 117 | 132681        | 918                          | 143162        | 483                          |
| 112910        | 92       | 132690        | 258                          | 143169        | 483                          |
| 112911        | 92       | 132691        | 258                          | 143170        | 482, 485                     |
|               |          | 132835        | 705                          | 143171        | 482, 485                     |
| <b>113000</b> |          |               |                              | 143172        | 482, 485                     |
| 113140        | 91       | <b>135000</b> |                              | 143221        | 485                          |
| 113141        | 91       | 135250        | 304, 305, 306, 307, 308, 309 | 143230        | 485                          |
| 113150        | 91       | 135251        | 304, 305, 306, 307, 308, 309 | 143231        | 485                          |
| 113151        | 91       |               |                              | 143241        | 485                          |
| 113160        | 92       | <b>138000</b> |                              | 143251        | 485                          |
| 113161        | 92       | 138981        | 908                          | 143261        | 485                          |
| 113170        | 93       | 138982        | 908                          | 143271        | 485                          |
| 113171        | 93       | 138991        | 908                          | 143281        | 485                          |
| 113262        | 117      | 138992        | 908                          | 143350        | 529                          |
| 113292        | 117      |               |                              | 143351        | 529                          |
| 113540        | 86       | <b>139000</b> |                              | 143540        | 519                          |
| 113541        | 87       | 139024        | 470, 471                     | 143541        | 519                          |
| 113550        | 86       | 139030        | 470, 471                     | 143544        | 519                          |
| 113830        | 87       | 139031        | 470, 471                     | 143580        | 527                          |
| 113840        | 87       | 139070        | 475                          | 143581        | 527                          |
| 113841        | 87       | 139071        | 475                          | 143811        | 529                          |
| 113930        | 128      | 139072        | 475                          |               |                              |
| 113931        | 128      | 139080        | 475                          | <b>145000</b> |                              |
| 113940        | 128      | 139081        | 475                          | 145100        | 549                          |
| 113941        | 128      | 139082        | 475                          | 145102        | 549                          |
|               |          | 139090        | 477                          | 145200        | 549                          |
| <b>114000</b> |          | 139091        | 477                          | 145202        | 549                          |
| 114420        | 122      | 139092        | 477                          | 145300        | 549                          |
| 114421        | 122      |               |                              | 145302        | 549                          |
| 114426        | 122      | <b>143000</b> |                              | 145510        | 550                          |
| 114430        | 123      | 143010        | 481                          | 145514        | 550                          |
| 114431        | 123      | 143011        | 481                          | 145520        | 550                          |
| 114436        | 123      | 143012        | 481                          | 145524        | 550                          |
| 114440        | 123      | 143020        | 481                          | 145530        | 550                          |
| 114441        | 123      | 143021        | 481                          | 145534        | 550                          |
| 114450        | 123      | 143022        | 481                          | 145551        | 553                          |
| 114451        | 123      | 143030        | 482                          | 145560        | 551                          |
|               |          | 143031        | 482                          | 145564        | 551                          |
| <b>115000</b> |          | 143032        | 482                          | 145580        | 551                          |
| 115510        | 16       | 143040        | 482                          | 145584        | 551                          |
| 115511        | 16       | 143041        | 482                          | 145590        | 551                          |
| 115520        | 16       | 143042        | 482                          | 145594        | 551                          |
| 115521        | 16       | 143050        | 483                          | 145600        | 551                          |
| 115530        | 16       | 143051        | 483                          | 145604        | 551                          |
| 115531        | 16       | 143052        | 483                          | 145630        | 551                          |
| 115540        | 17       | 143060        | 483                          | 145634        | 551                          |
| 115541        | 17       | 143061        | 483                          | 145640        | 551                          |
| 115550        | 17       | 143062        | 483                          | 145644        | 551                          |
| 115551        | 17       | 143070        | 483                          | 145660        | 550                          |
|               |          | 143071        | 483                          | 145664        | 550                          |
| <b>117000</b> |          | 143072        | 483                          | 145670        | 551                          |
| 117100        | 153      | 143080        | 483                          | 145674        | 551                          |
| 117101        | 153      | 143081        | 483                          | 145680        | 551                          |
| 117110        | 153      | 143082        | 483                          | 145684        | 551                          |
| 117111        | 153      | 143090        | 483                          | 145690        | 551                          |
| 117311        | 107      | 143091        | 483                          | 145694        | 551                          |
| 117321        | 151      | 143092        | 483                          |               |                              |
| 117331        | 107      | 143100        | 483                          | <b>145000</b> |                              |
| 117351        | 150      | 143101        | 483                          | 145700        | 551                          |

|               |                              |               |               |               |               |
|---------------|------------------------------|---------------|---------------|---------------|---------------|
| 145710        | 551                          | 151950        | 120           | 175160        | 539, 543      |
| 145714        | 551                          | 151952        | 121           | 175180        | 539, 543      |
| 145720        | 551                          | 151960        | 120           | 175190        | 539, 543      |
| 145724        | 551                          | 151962        | 121           | 175200        | 539           |
| 145730        | 551                          |               |               | 175210        | 539, 543      |
| 145734        | 551                          | <b>152000</b> |               |               |               |
| 145830        | 551                          | 152330        | 357           | <b>181000</b> |               |
| 145834        | 551                          | 152331        | 357           | 181530        | 473           |
| 145990        | 181, 182, 185, 259, 551, 597 | 152340        | 357           | 181531        | 473           |
| 145994        | 182, 185, 259, 273, 551, 597 | 152341        | 357           | 181532        | 473           |
|               |                              | 152360        | 264           |               |               |
| <b>146000</b> |                              | 152370        | 265           | <b>186000</b> |               |
| 146010        | 415                          | 152380        | 110           | 186300        | 473           |
| 146332        | 361                          | 152381        | 110           | 186301        | 473           |
| 146682        | 359                          | 152610        | 589           | 186302        | 473           |
| 146692        | 359                          | 152611        | 589           | 186310        | 473           |
|               |                              | 152960        | 605           | 186311        | 473           |
| <b>147000</b> |                              | 152961        | 605           | 186312        | 473           |
| 147301        | 383                          |               |               | 186330        | 473           |
| 147306        | 383                          | <b>153000</b> |               | 186331        | 473           |
| 147311        | 383                          | 153420        | 603           | 186332        | 473           |
| 147316        | 383                          | 153421        | 603           | 186340        | 473           |
| 147321        | 383                          | 153850        | 603           | 186341        | 473           |
| 147326        | 383                          | 153851        | 603           | 186342        | 473           |
| 147529        | 353                          |               |               | 186350        | 473           |
|               |                              | <b>155000</b> |               | 186351        | 473           |
| <b>148000</b> |                              | 155156        | 163           | 186352        | 473           |
| 148001        | 158                          | 155236        | 395           | 186360        | 473           |
| 148002        | 159                          | 155373        | 157           | 186361        | 473           |
| 148004        | 158                          | 155490        | 413           | 186362        | 473           |
| 148005        | 158                          | 155540        | 411           | 186640        | 473           |
| 148010        | 339                          | 155550        | 155           | 186641        | 473           |
| 148012        | 341                          | 155551        | 155           | 186642        | 473           |
| 148013        | 341                          | 155582        | 155, 261, 413 |               |               |
| 148016        | 341                          | 155583        | 155, 261, 413 | <b>210000</b> |               |
| 148018        | 338                          | 155592        | 155, 261, 413 | 210064        | 273           |
| 148019        | 340                          | 155780        | 411           |               |               |
| 148060        | 340                          | 155790        | 411           | <b>227000</b> |               |
| 148070        | 113                          |               |               | 227195        | 840           |
| 148071        | 113                          | <b>156000</b> |               | 227219        | 703           |
| 148091        | 340                          | 156050        | 157           | 227220        | 703           |
| 148540        | 361                          | 156051        | 157           | 227221        | 703           |
|               |                              | 156100        | 155, 261, 413 | 227410        | 743           |
| <b>149000</b> |                              | 156111        | 155, 261, 413 | 227418        | 743           |
| 149452        | 356                          | 156113        | 155, 261, 413 | 227462        | 886           |
| 149471        | 347                          | 156122        | 155, 261, 413 | 227505        | 733           |
| 149511        | 347                          |               |               | 227600        | 890           |
| 149762        | 315                          | <b>161000</b> |               | 227604        | 890           |
| 149772        | 315                          | 161461        | 159           | 227680        | 893           |
|               |                              |               |               | 227684        | 893           |
| <b>151000</b> |                              | <b>165000</b> |               | 227922        | 711, 712      |
| 151049        | 243, 359, 515, 600, 601      | 165359        | 273           |               |               |
| 151271        | 348                          | 165390        | 271           | <b>228000</b> |               |
| 151275        | 348                          | 165400        | 271           | 228100        | 711           |
| 151282        | 319                          | 165410        | 271           | 228110        | 711           |
| 151320        | 344                          |               |               | 228130        | 711           |
| 151321        | 344                          | <b>175000</b> |               | 228332        | 887           |
| 151410        | 349                          | 175010        | 537           | 228342        | 887           |
| 151411        | 349                          | 175020        | 537           | 228412        | 880           |
| 151450        | 349                          | 175030        | 537           | 228430        | 883           |
| 151451        | 349                          | 175040        | 538           | 228434        | 883           |
| 151511        | 151                          | 175050        | 538           | 228555        | 740           |
| 151531        | 151, 385                     | 175060        | 539, 543      | 228560        | 740           |
| 151591        | 353                          | 175070        | 539           | 228712        | 701, 709, 727 |
| 151710        | 351                          | 175080        | 539, 543      | 228722        | 701, 709      |
| 151711        | 351                          | 175090        | 539           | 228725        | 919           |
| 151740        | 351                          | 175100        | 539           | 228726        | 919           |
| 151741        | 351                          | 175110        | 538           | 228730        | 919           |
| 151781        | 316                          | 175120        | 538           | 228752        | 709, 727      |
| 151786        | 316                          | 175130        | 539           | 228753        | 653, 705      |
| 151791        | 317                          | 175140        | 539           | 228754        | 679, 683      |
| 151796        | 317                          | 175150        | 539           | 228771        | 834           |

|               |                              |               |                    |                |                    |
|---------------|------------------------------|---------------|--------------------|----------------|--------------------|
| 228775        | 834                          | 230365        | 839                | 232485         | 846                |
| 228776        | 834                          | 230435        | 707                | 232491         | 846                |
| 228925        | 709                          | 230444        | 826                | 232495         | 846                |
| 228935        | 709                          | 230445        | 826                | 232497         | 846                |
| 228945        | 709                          | 230465        | 705                | 232531         | 809                |
|               |                              | 230655        | 827                | 232535         | 809                |
|               |                              | 230657        | 827                | 232537         | 809                |
| <b>229000</b> |                              |               |                    |                |                    |
| 229020        | 693                          |               |                    |                |                    |
| 229021        | 693                          | <b>231000</b> |                    | <b>233000</b>  |                    |
| 229022        | 693                          | 231010        | 832                | 233095         | 851                |
| 229062        | 869                          | 231012        | 832                | 233104         | 853                |
| 229071        | 861                          | 231015        | 832                | 233105         | 853                |
| 229072        | 861                          | 231035        | 742                | 233114         | 839                |
| 229075        | 861                          | 231072        | 741                | 233115         | 839                |
| 229081        | 861                          | 231205        | 823                | 233134         | 851                |
| 229085        | 861                          | 231215        | 683                | 233135         | 851                |
| 229090        | 744                          | 231225        | 683                | 233145         | 727                |
| 229162        | 712                          | 231230        | 679, 683, 686, 687 | 233165         | 727                |
| 229172        | 712                          | 231231        | 726                | 233185         | 727                |
| 229230        | 885                          | 231233        | 694                | 233215         | 839, 851, 853      |
| 229234        | 885                          | 231234        | 702, 713, 717      | 233245         | 857                |
| 229320        | 882                          | 231235        | 695                | 233255         | 857                |
| 229324        | 882                          | 231305        | 726                | 233302         | 834                |
| 229374        | 882                          | 231315        | 849                | 233427         | 692                |
| 229381        | 881                          | 231351        | 835                | 233437         | 692                |
| 229383        | 880                          | 231355        | 835                | 233447         | 686                |
| 229410        | 687                          | 231370        | 695                | 233457         | 687                |
| 229411        | 687                          | 231371        | 695                | 233500         | 881                |
| 229420        | 692                          | 231410        | 694                | 233520         | 881                |
| 229421        | 693                          | 231411        | 694                | 233540         | 885                |
| 229422        | 688, 692, 693, 694, 708      | 231420        | 694                | 233570         | 745                |
| 229423        | 689                          | 231440        | 695                | 233571         | 745                |
| 229430        | 689                          | 231455        | 719                | 233580         | 745                |
| 229431        | 689                          | 231457        | 719                | 233582         | 745                |
| 229432        | 689                          | 231475        | 715                | 233601         | 867                |
| 229524        | 796                          | 231505        | 727                | 233605         | 867                |
| 229525        | 796                          | 231515        | 856                | 233615         | 867                |
| 229531        | 795                          | 231525        | 751                | 233621         | 867                |
| 229532        | 795                          | 231535        | 751                | 233625         | 867                |
| 229535        | 795                          | 231541        | 765                | 233635         | 866                |
| 229551        | 761                          | 231545        | 765                | 233639         | 866                |
| 229554        | 761                          | 231585        | 849                | 233650         | 868                |
| 229555        | 761                          | 231595        | 715                | 233660         | 868                |
| 229564        | 797                          | 231815        | 719                |                |                    |
| 229565        | 797                          | 231817        | 719                | <b>234000</b>  |                    |
| 229574        | 796                          | 231960        | 738                | 234350         | 734, 735, 737, 739 |
| 229575        | 796                          | 231961        | 738                | 234505         | 796                |
| 229664        | 847                          |               |                    | 234515         | 795                |
| 229665        | 847                          | <b>232000</b> |                    | 234525         | 797                |
| 229702        | 869                          | 232045        | 848                | 234535         | 761                |
| 229740        | 743                          | 232075        | 705                |                |                    |
| 229741        | 744                          | 232085        | 705                | <b>900000</b>  |                    |
| 229931        | 861                          | 232101        | 847                | 900011         | 744, 745           |
| 229935        | 861                          | 232105        | 847                |                |                    |
| 229961        | 858                          | 232115        | 679                | <b>955000</b>  |                    |
| 229965        | 858                          | 232119        | 679                | 955135         | 918                |
| 229971        | 859                          | 232125        | 679                |                |                    |
| 229975        | 859                          | 232135        | 721                | <b>961000</b>  |                    |
|               |                              | 232145        | 721                | 961250         | 918                |
|               |                              | 232155        | 720                | 961270         | 918                |
| <b>230000</b> |                              | 232165        | 720                |                |                    |
| 230030        | 833                          | 232185        | 720                | <b>1000300</b> |                    |
| 230034        | 833                          | 232195        | 720                | 1000327        | 354                |
| 230044        | 827                          | 232285        | 849                | 1000329        | 354                |
| 230045        | 827                          | 232294        | 726                | 1000330        | 354                |
| 230060        | 665, 666, 667, 707, 714, 727 | 232295        | 726                | 1000332        | 765                |
| 230061        | 714                          | 232431        | 810                | 1000334        | 840                |
| 230063        | 714                          | 232435        | 810                | 1000335        | 850                |
| 230066        | 714                          | 232441        | 811                | 1000336        | 824                |
| 230069        | 714                          | 232445        | 811                | 1000339        | 765                |
| 230085        | 827                          | 232461        | 811                | 1000340        | 840                |
| 230090        | 688                          | 232465        | 811                | 1000342        | 840                |
| 230355        | 839                          |               |                    |                |                    |

|                |               |                |          |                |                              |
|----------------|---------------|----------------|----------|----------------|------------------------------|
| 1000343        | 717           | <b>1001200</b> |          | 1001534        | 553                          |
| 1000344        | 717           | 1001254        | 889      | 1001536        | 553                          |
| 1000345        | 717           | 1001255        | 889      | 1001537        | 553                          |
| 1000346        | 717           | 1001262        | 889      | 1001538        | 553                          |
| 1000398        | 707           | 1001263        | 889      | 1001539        | 553                          |
|                |               | 1001264        | 115      | 1001542        | 182, 185, 259, 551, 553, 597 |
| <b>1000400</b> |               | 1001272        | 355      | 1001574        | 897                          |
| 1000423        | 347           | 1001273        | 355      | 1001575        | 897                          |
| 1000449        | 711           | 1001274        | 355      |                |                              |
|                |               | 1001275        | 355      | <b>1001800</b> |                              |
| <b>1000500</b> |               | 1001276        | 355      | 1001861        | 529                          |
| 1000574        | 117           | 1001299        | 321      |                |                              |
| 1000575        | 117           |                |          | <b>1001900</b> |                              |
| 1000576        | 116           | <b>1001300</b> |          | 1001930        | 113                          |
| 1000577        | 116           | 1001300        | 321      | 1001931        | 113                          |
| 1000579        | 155, 261, 413 | 1001303        | 321      | 1001939        | 159                          |
| 1000580        | 155, 261, 413 | 1001304        | 321      | 1001950        | 304, 305, 306, 307, 308, 309 |
|                |               | 1001375        | 537      | 1001952        | 304, 305, 306, 307, 308, 309 |
| <b>1000600</b> |               | 1001376        | 537      | 1001962        | 744                          |
| 1000634        | 349           | 1001377        | 537      | 1001963        | 744                          |
| 1000638        | 344           | 1001378        | 539      | 1001964        | 743                          |
| 1000639        | 344           | 1001379        | 538      | 1001965        | 743                          |
| 1000665        | 708           | 1001380        | 539, 543 | 1001969        | 835                          |
| 1000666        | 708           | 1001381        | 538      | 1001970        | 835                          |
| 1000668        | 321           | 1001382        | 539, 543 | 1001999        | 702                          |
| 1000669        | 321           | 1001383        | 539      |                |                              |
| 1000670        | 321           | 1001384        | 539      | <b>1002000</b> |                              |
| 1000682        | 710           | 1001385        | 538      | 1002000        | 702                          |
| 1000683        | 711           | 1001386        | 538      | 1002001        | 702                          |
|                |               | 1001387        | 539      | 1002002        | 848                          |
| <b>1000700</b> |               | 1001388        | 539      | 1002003        | 128                          |
| 1000702        | 383           | 1001389        | 539      | 1002004        | 129                          |
| 1000703        | 383           | 1001390        | 539, 543 | 1002005        | 129                          |
| 1000704        | 383           | 1001392        | 539, 543 | 1002006        | 129                          |
| 1000714        | 105           | 1001393        | 539, 543 | 1002008        | 128                          |
| 1000715        | 105           | 1001394        | 539      | 1002010        | 129                          |
| 1000716        | 105           | 1001395        | 539, 543 | 1002011        | 129                          |
| 1000717        | 105           |                |          | 1002012        | 129                          |
| 1000718        | 105           | <b>1001400</b> |          | 1002013        | 129                          |
| 1000719        | 105           | 1001461        | 415      | 1002015        | 129                          |
| 1000720        | 105           | 1001463        | 415      | 1002023        | 383                          |
| 1000721        | 105           | 1001468        | 361      | 1002024        | 383                          |
| 1000735        | 740           | 1001472        | 361      | 1002025        | 383                          |
| 1000736        | 727, 740      | 1001488        | 713      | 1002032        | 807                          |
| 1000773        | 261           | 1001489        | 713      | 1002033        | 807                          |
| 1000777        | 320           | 1001490        | 713      | 1002034        | 807                          |
| 1000780        | 320           | 1001494        | 713      | 1002035        | 846                          |
|                |               |                |          | 1002069        | 833                          |
| <b>1000800</b> |               | <b>1001500</b> |          | 1002070        | 833                          |
| 1000820        | 848           | 1001510        | 549      | 1002098        | 122                          |
| 1000821        | 707           | 1001511        | 549      | 1002099        | 122                          |
| 1000822        | 707           | 1001512        | 549      |                |                              |
| 1000823        | 763           | 1001513        | 550      | <b>1002100</b> |                              |
| 1000833        | 115           | 1001514        | 550      | 1002100        | 122                          |
| 1000880        | 850           | 1001515        | 550      | 1002101        | 122                          |
| 1000881        | 850           | 1001516        | 551      | 1002102        | 122                          |
|                |               | 1001517        | 550      | 1002118        | 359                          |
| <b>1000900</b> |               | 1001518        | 551      | 1002140        | 357                          |
| 1000910        | 354           | 1001519        | 551      | 1002151        | 481                          |
| 1000911        | 354           | 1001520        | 551      | 1002152        | 481                          |
| 1000914        | 90            | 1001521        | 551      | 1002153        | 481                          |
| 1000915        | 90            | 1001522        | 551      | 1002163        | 181, 182, 259                |
| 1000917        | 90            | 1001523        | 551      |                |                              |
| 1000957        | 155, 261, 413 | 1001524        | 551      | <b>1002200</b> |                              |
|                |               | 1001525        | 551      | 1002201        | 749                          |
| <b>1001100</b> |               | 1001526        | 551      | 1002203        | 749                          |
| 1001165        | 114           | 1001527        | 551      | 1002216        | 151                          |
| 1001166        | 114           | 1001528        | 551      | 1002218        | 908                          |
| 1001167        | 114           | 1001529        | 551      | 1002228        | 318                          |
| 1001168        | 114           | 1001530        | 551      | 1002229        | 319                          |
| 1001169        | 115           | 1001531        | 553      | 1002238        | 339                          |
| 1001171        | 115           | 1001532        | 553      | 1002239        | 317                          |
| 1001172        | 115           | 1001533        | 553      | 1002240        | 317                          |



|                |                              |                |     |                |                    |
|----------------|------------------------------|----------------|-----|----------------|--------------------|
| <b>1002400</b> |                              | 1002869        | 841 | 1003440        | 816                |
| 1002402        | 824                          | 1002871        | 729 | 1003441        | 817                |
| 1002403        | 825                          | 1002884        | 853 | 1003442        | 759                |
| 1002430        | 359                          |                |     | 1003443        | 241                |
| 1002431        | 359                          | <b>1002900</b> |     | 1003444        | 241                |
|                |                              | 1002903        | 855 | 1003447        | 738                |
| <b>1002500</b> |                              | 1002904        | 855 | 1003448        | 738                |
| 1002503        | 837                          | 1002905        | 851 | 1003449        | 859                |
| 1002504        | 837                          | 1002909        | 227 | 1003450        | 859                |
| 1002505        | 837                          | 1002910        | 227 | 1003451        | 859                |
| 1002591        | 93                           | 1002911        | 229 | 1003452        | 859                |
| 1002592        | 93                           | 1002912        | 229 | 1003453        | 833                |
| 1002594        | 93                           | 1002913        | 231 | 1003454        | 833                |
| 1002596        | 93                           | 1002914        | 231 | 1003455        | 358                |
|                |                              | 1002915        | 313 | 1003456        | 358                |
| <b>1002600</b> |                              | 1002917        | 313 | 1003457        | 358                |
| 1002602        | 470                          | 1002918        | 313 | 1003458        | 358                |
| 1002603        | 470                          | 1002922        | 121 | 1003459        | 358                |
| 1002604        | 470                          | 1002928        | 345 | 1003460        | 359                |
| 1002607        | 359                          | 1002929        | 345 | 1003467        | 346                |
| 1002608        | 359                          | 1002949        | 267 | 1003468        | 346                |
| 1002631        | 541                          | 1002950        | 267 | 1003479        | 758, 759, 760, 761 |
| 1002632        | 541                          | 1002951        | 267 |                |                    |
| 1002633        | 541                          | 1002952        | 794 | <b>1003500</b> |                    |
| 1002634        | 541                          | 1002953        | 794 | 1003535        | 697                |
| 1002635        | 541                          | 1002954        | 794 | 1003536        | 696                |
| 1002636        | 541                          | 1002955        | 794 | 1003537        | 697                |
| 1002637        | 542                          | 1002956        | 675 | 1003538        | 697                |
| 1002638        | 543                          | 1002957        | 675 | 1003539        | 847                |
| 1002639        | 542                          | 1002958        | 675 |                |                    |
| 1002640        | 543                          | 1002959        | 675 | <b>1004000</b> |                    |
| 1002641        | 543, 547                     | 1002967        | 159 | 1004074        | 572                |
| 1002642        | 543, 547                     | 1002968        | 159 | 1004098        | 290                |
| 1002643        | 543                          | 1002979        | 119 | 1004194        | 292                |
| 1002644        | 543                          | 1002980        | 119 | 1004290        | 294                |
| 1002645        | 543                          | 1002981        | 119 |                |                    |
| 1002646        | 543                          | 1002982        | 121 | <b>1004100</b> |                    |
| 1002655        | 543                          | 1002983        | 121 | 1004122        | 130                |
| 1002656        | 543                          | 1002984        | 121 | 1004146        | 186                |
| 1002657        | 539, 543                     | 1002989        | 843 | 1004170        | 574                |
| 1002658        | 539, 543                     | 1002990        | 843 |                |                    |
| 1002659        | 543, 547                     | 1002991        | 725 | <b>1004200</b> |                    |
| 1002660        | 543, 547                     | 1002992        | 725 | 1004218        | 132                |
| 1002691        | 473, 908                     |                |     | 1004242        | 188                |
| 1002692        | 473, 908                     | <b>1003000</b> |     | 1004266        | 576                |
| 1002693        | 473, 908                     | 1003001        | 726 |                |                    |
| 1002694        | 477                          | 1003004        | 240 | <b>1004300</b> |                    |
| 1002695        | 477                          | 1003005        | 240 | 1004314        | 134                |
| 1002696        | 477                          | 1003006        | 240 | 1004338        | 190                |
| 1002697        | 473                          | 1003007        | 240 | 1004362        | 572                |
| 1002698        | 473                          |                |     | 1004386        | 290                |
| 1002699        | 473                          | <b>1003100</b> |     |                |                    |
|                |                              | 1003104        | 912 | <b>1004400</b> |                    |
| <b>1002700</b> |                              | 1003105        | 912 | 1004410        | 130                |
| 1002700        | 473                          |                |     | 1004434        | 186                |
| 1002701        | 473                          | <b>1003300</b> |     | 1004458        | 574                |
| 1002702        | 473                          | 1003316        | 351 | 1004482        | 292                |
| 1002703        | 473                          |                |     |                |                    |
| 1002704        | 473                          | <b>1003400</b> |     | <b>1004500</b> |                    |
| 1002705        | 473                          | 1003416        | 818 | 1004506        | 132                |
|                |                              | 1003417        | 818 | 1004530        | 188                |
| <b>1002800</b> |                              | 1003418        | 819 | 1004554        | 576                |
| 1002842        | 345                          | 1003419        | 819 | 1004578        | 294                |
| 1002844        | 345                          | 1003420        | 760 |                |                    |
| 1002845        | 483, 539, 543, 551           | 1003421        | 761 | <b>1004600</b> |                    |
| 1002853        | 817, 818, 819, 848, 851, 857 | 1003422        | 816 | 1004602        | 134                |
| 1002855        | 355                          | 1003423        | 816 | 1004626        | 190                |
| 1002860        | 361                          | 1003424        | 817 | 1004649        | 853                |
| 1002861        | 477                          | 1003425        | 817 | 1004650        | 812                |
| 1002862        | 477                          | 1003426        | 759 | 1004651        | 812                |
| 1002863        | 477                          | 1003427        | 759 | 1004652        | 749                |
| 1002867        | 853                          | 1003437        | 818 | 1004653        | 856                |
| 1002868        | 841                          | 1003438        | 819 | 1004660        | 334                |

|                |                    |                |                              |                |                      |
|----------------|--------------------|----------------|------------------------------|----------------|----------------------|
| 1004661        | 334                | 1004909        | 632                          | 1005280        | 899                  |
| 1004662        | 334                | 1004910        | 632                          | 1005281        | 899                  |
| 1004663        | 334                | 1004911        | 632                          | 1005282        | 899                  |
| 1004666        | 148                | 1004914        | 632                          | 1005283        | 899                  |
| 1004667        | 148                | 1004915        | 632                          | 1005284        | 896                  |
| 1004668        | 107                | 1004916        | 632                          | 1005285        | 897                  |
| 1004669        | 107                | 1004917        | 632                          | 1005286        | 896                  |
| 1004670        | 337                | 1004933        | 527                          | 1005287        | 896                  |
| 1004671        | 337                | 1004934        | 527                          | 1005288        | 896                  |
| 1004672        | 257                | 1004935        | 527                          | 1005289        | 902                  |
| 1004673        | 257                | 1004936        | 527                          | 1005297        | 899                  |
| 1004674        | 181, 185, 259, 597 | 1004937        | 541                          | 1005298        | 899                  |
| 1004675        | 181, 185, 259, 597 | 1004938        | 541                          | 1005299        | 899                  |
| 1004676        | 273                | 1004939        | 539, 543                     |                |                      |
| 1004677        | 763                | 1004940        | 539, 543                     | <b>1005300</b> |                      |
| 1004678        | 831                | 1004957        | 853                          | 1005302        | 900                  |
| 1004679        | 831                | 1004969        | 334                          | 1005303        | 900                  |
| 1004680        | 701                | 1004971        | 319                          | 1005305        | 903                  |
| 1004681        | 701                |                |                              | 1005307        | 902                  |
| 1004682        | 354                | <b>1005000</b> |                              | 1005310        | 903                  |
| 1004684        | 543                | 1005075        | 898                          | 1005395        | 251                  |
| 1004685        | 543                | 1005076        | 898                          | 1005396        | 251                  |
| 1004686        | 595                | 1005077        | 898                          | 1005397        | 594                  |
| 1004687        | 595                | 1005078        | 898                          | 1005399        | 594                  |
| 1004688        | 595                | 1005079        | 898                          |                |                      |
| 1004689        | 595                | 1005080        | 898                          | <b>1005400</b> |                      |
| 1004690        | 595                | 1005081        | 898                          | 1005400        | 594                  |
| 1004691        | 595                | 1005082        | 898                          | 1005401        | 594                  |
| 1004692        | 595                | 1005083        | 898                          | 1005402        | 594                  |
| 1004693        | 595                | 1005087        | 394                          | 1005435        | 93                   |
|                |                    | 1005088        | 394                          | 1005436        | 93                   |
| <b>1004700</b> |                    |                |                              | 1005439        | 677                  |
| 1004706        | 356                | <b>1005100</b> |                              | 1005440        | 677                  |
| 1004730        | 314                | 1005125        | 810                          | 1005442        | 685                  |
| 1004731        | 314                | 1005126        | 810                          | 1005443        | 830                  |
| 1004732        | 339                | 1005148        | 807                          |                |                      |
| 1004740        | 353                | 1005149        | 807                          | <b>1005600</b> |                      |
| 1004741        | 353                | 1005150        | 807                          | 1005612        | 19, 29, 39, 442, 446 |
| 1004744        | 181, 185, 259, 597 | 1005151        | 809                          | 1005613        | 19, 29, 39, 442, 446 |
| 1004745        | 244, 245, 259      | 1005153        | 809                          | 1005614        | 19, 29, 39, 442, 446 |
| 1004747        | 829                | 1005154        | 809                          | 1005615        | 19, 29, 39, 442, 446 |
| 1004748        | 829                | 1005155        | 809                          | 1005687        | 136                  |
| 1004749        | 676                | 1005156        | 809                          |                |                      |
| 1004750        | 676                | 1005157        | 809                          | <b>1005700</b> |                      |
| 1004751        | 676                | 1005177        | 227                          | 1005705        | 192                  |
| 1004757        | 741                | 1005178        | 231                          | 1005723        | 578                  |
| 1004759        | 227                |                |                              | 1005741        | 296                  |
| 1004760        | 227                | <b>1005200</b> |                              | 1005759        | 136                  |
| 1004761        | 227                | 1005201        | 824                          | 1005777        | 192                  |
| 1004762        | 227                | 1005202        | 825                          | 1005795        | 578                  |
| 1004763        | 229                | 1005205        | 761, 816, 817, 818, 819, 821 |                |                      |
| 1004764        | 229                | 1005206        | 760, 761, 816, 817, 818, 819 | <b>1006000</b> |                      |
| 1004765        | 231                | 1005207        | 761, 816, 817, 818, 819, 821 | 1006083        | 296                  |
| 1004766        | 231                | 1005214        | 273                          |                |                      |
| 1004767        | 231                | 1005215        | 273                          | <b>1006100</b> |                      |
| 1004768        | 231                | 1005216        | 273                          | 1006104        | 891                  |
| 1004774        | 155, 261, 413      | 1005217        | 273                          | 1006105        | 891                  |
| 1004775        | 155, 261, 413      | 1005218        | 273                          | 1006106        | 880                  |
|                |                    | 1005248        | 121                          | 1006108        | 580                  |
| <b>1004800</b> |                    | 1005262        | 816, 817, 818, 819, 821      | 1006114        | 580                  |
| 1004783        | 483                | 1005263        | 902                          | 1006121        | 91                   |
| 1004784        | 483                | 1005265        | 902                          | 1006122        | 91                   |
| 1004785        | 483                | 1005268        | 903                          | 1006123        | 395                  |
| 1004786        | 444, 448           | 1005269        | 897                          | 1006124        | 395                  |
| 1004787        | 444, 448           | 1005271        | 897                          | 1006125        | 395                  |
| 1004788        | 444, 448           | 1005272        | 897                          | 1006126        | 395                  |
| 1004789        | 444, 448           | 1005273        | 898                          | 1006127        | 395                  |
|                |                    | 1005274        | 899                          | 1006128        | 395                  |
| <b>1004900</b> |                    | 1005275        | 899                          | 1006136        | 53                   |
| 1004905        | 632                | 1005276        | 899                          | 1006138        | 53                   |
| 1004906        | 632                | 1005277        | 899                          | 1006140        | 53                   |
| 1004907        | 632                | 1005278        | 899                          | 1006142        | 53                   |
| 1004908        | 632                | 1005279        | 899                          | 1006144        | 53                   |

|                |                              |                |                         |                |               |
|----------------|------------------------------|----------------|-------------------------|----------------|---------------|
| 1006146        | 53                           | 1006394        | 665                     | 1006535        | 547           |
| 1006148        | 53                           | 1006395        | 240                     | 1006536        | 547           |
| 1006150        | 53                           | 1006396        | 240                     | 1006537        | 547           |
| 1006152        | 53                           | 1006397        | 240                     | 1006538        | 547           |
| 1006154        | 53                           | 1006398        | 240                     | 1006539        | 547           |
| 1006155        | 525                          | 1006399        | 240                     | 1006540        | 547           |
| 1006156        | 525                          |                |                         | 1006541        | 424           |
| 1006157        | 597                          | <b>1006400</b> |                         | 1006542        | 424           |
| 1006158        | 597                          | 1006400        | 240                     | 1006543        | 424           |
| 1006159        | 597                          | 1006402        | 240                     | 1006544        | 424           |
| 1006160        | 597                          | 1006403        | 240                     | 1006545        | 424           |
| 1006161        | 356                          | 1006404        | 785                     | 1006546        | 424           |
| 1006162        | 356                          | 1006405        | 785                     | 1006547        | 424           |
| 1006167        | 130, 186, 290, 572           | 1006406        | 865                     | 1006548        | 424           |
| 1006168        | 132, 188, 292, 574           | 1006407        | 865                     | 1006549        | 430           |
| 1006169        | 134, 190, 294, 576           | 1006408        | 671                     | 1006550        | 430           |
| 1006170        | 136, 192, 296, 578           | 1006409        | 671                     | 1006551        | 430           |
| 1006171        | 888                          | 1006410        | 273                     | 1006552        | 430           |
| 1006172        | 888                          | 1006423        | 381                     | 1006553        | 430           |
| 1006173        | 888                          | 1006424        | 381                     | 1006554        | 430           |
| 1006174        | 888                          | 1006425        | 381                     | 1006555        | 430           |
| 1006175        | 888                          | 1006426        | 381                     | 1006556        | 430           |
| 1006176        | 888                          | 1006427        | 381                     | 1006557        | 434           |
| 1006178        | 823                          | 1006428        | 381                     | 1006558        | 434           |
| 1006179        | 822                          | 1006429        | 381                     | 1006559        | 434           |
| 1006180        | 681                          | 1006430        | 381                     | 1006560        | 434           |
| 1006181        | 681                          | 1006431        | 247                     | 1006561        | 434           |
| 1006182        | 681                          | 1006432        | 247                     | 1006562        | 434           |
| 1006183        | 823                          | 1006433        | 247                     | 1006563        | 434           |
| 1006184        | 683                          | 1006434        | 247                     | 1006564        | 434           |
| 1006185        | 233                          | 1006435        | 247                     | 1006565        | 428, 432, 436 |
| 1006188        | 233                          | 1006436        | 247                     | 1006566        | 428, 432, 436 |
| 1006189        | 233                          | 1006437        | 247                     | 1006567        | 428, 432, 436 |
| 1006190        | 233                          | 1006438        | 247                     | 1006568        | 428, 432, 436 |
|                |                              | 1006439        | 149                     | 1006569        | 428, 432, 437 |
| <b>1006300</b> |                              | 1006440        | 149                     | 1006570        | 428, 432, 437 |
| 1006307        | 337                          | 1006441        | 331                     | 1006571        | 428, 432, 436 |
| 1006308        | 337                          | 1006442        | 331                     | 1006572        | 428, 432, 436 |
| 1006314        | 829                          | 1006443        | 331                     | 1006573        | 429, 433, 437 |
| 1006316        | 757                          | 1006444        | 331                     | 1006574        | 429, 433, 437 |
| 1006319        | 333                          | 1006445        | 523                     | 1006575        | 428           |
| 1006321        | 897                          | 1006446        | 523                     | 1006576        | 428           |
| 1006327        | 758                          | 1006449        | 149, 247, 331, 381, 523 | 1006577        | 428           |
| 1006328        | 813                          | 1006450        | 149, 247, 331, 381, 523 | 1006578        | 428           |
| 1006329        | 813                          | 1006451        | 149, 247, 331, 381, 523 | 1006579        | 428           |
| 1006336        | 624, 911                     | 1006452        | 908                     | 1006580        | 428           |
| 1006345        | 251                          | 1006453        | 919                     | 1006581        | 432           |
| 1006346        | 688                          |                |                         | 1006582        | 432           |
| 1006347        | 688                          | <b>1006500</b> |                         | 1006583        | 432           |
| 1006348        | 625, 910                     | 1006511        | 545                     | 1006584        | 432           |
| 1006350        | 405                          | 1006512        | 545                     | 1006585        | 432           |
| 1006351        | 405                          | 1006513        | 545                     | 1006586        | 432           |
| 1006352        | 405                          | 1006514        | 545                     | 1006587        | 436           |
| 1006353        | 405                          | 1006515        | 545                     | 1006588        | 436           |
| 1006354        | 405                          | 1006516        | 545                     | 1006589        | 436           |
| 1006355        | 405                          | 1006517        | 545                     | 1006590        | 436           |
| 1006377        | 259                          | 1006518        | 545                     | 1006591        | 436           |
| 1006378        | 259                          | 1006519        | 547                     | 1006592        | 436           |
| 1006379        | 661, 662, 663, 664, 665, 667 | 1006520        | 547                     | 1006593        | 429           |
| 1006380        | 661, 662, 663, 664, 665, 667 | 1006521        | 547                     | 1006594        | 429           |
| 1006381        | 661, 662, 663, 664, 665, 667 | 1006522        | 547                     | 1006595        | 433           |
| 1006382        | 662, 663, 664, 665, 666, 667 | 1006523        | 547                     | 1006596        | 433           |
| 1006383        | 661                          | 1006524        | 547                     | 1006597        | 437           |
| 1006384        | 663                          | 1006525        | 547                     | 1006598        | 437           |
| 1006385        | 662                          | 1006526        | 547                     | 1006599        | 429, 433      |
| 1006386        | 665                          | 1006527        | 547                     |                |               |
| 1006387        | 662                          | 1006528        | 547                     | <b>1006600</b> |               |
| 1006388        | 664                          | 1006529        | 547                     | 1006600        | 429, 433      |
| 1006389        | 661                          | 1006530        | 547                     | 1006601        | 429, 433      |
| 1006390        | 663                          | 1006531        | 547                     | 1006602        | 429, 433      |
| 1006391        | 663                          | 1006532        | 547                     | 1006603        | 429, 433      |
| 1006392        | 665                          | 1006533        | 547                     | 1006604        | 429, 433      |
| 1006393        | 662                          | 1006534        | 547                     | 1006605        | 429, 433      |

|                |                         |                |               |                |          |
|----------------|-------------------------|----------------|---------------|----------------|----------|
| 1006606        | 429, 433                | 1007198        | 873           | 1007315        | 213, 309 |
| 1006607        | 429, 433                |                |               | 1007328        | 76       |
| 1006608        | 429, 433                | <b>1007200</b> |               | 1007329        | 76       |
| 1006609        | 429, 433                | 1007200        | 315           | 1007330        | 76       |
| 1006610        | 437                     | 1007201        | 314           | 1007331        | 76       |
| 1006611        | 429                     | 1007202        | 315           | 1007332        | 76       |
| 1006612        | 429                     | 1007207        | 824           | 1007333        | 76       |
| 1006613        | 429, 433, 437           | 1007225        | 913           | 1007334        | 76       |
| 1006614        | 429, 433, 437           | 1007226        | 914           | 1007335        | 76       |
| 1006615        | 450                     | 1007227        | 914           | 1007336        | 77       |
| 1006616        | 450                     | 1007228        | 914           | 1007337        | 77       |
| 1006617        | 450                     | 1007229        | 915           | 1007338        | 77       |
| 1006618        | 450                     | 1007230        | 898           | 1007339        | 77       |
| 1006619        | 450                     | 1007231        | 898           | 1007340        | 79       |
| 1006620        | 450                     | 1007232        | 660           | 1007341        | 79       |
| 1006621        | 451                     | 1007233        | 660           | 1007342        | 79       |
| 1006622        | 451                     | 1007234        | 660           | 1007343        | 79       |
| 1006623        | 451                     | 1007235        | 661           | 1007344        | 79       |
| 1006624        | 451                     | 1007236        | 783           | 1007345        | 77       |
| 1006625        | 451                     | 1007237        | 653           | 1007346        | 77       |
| 1006626        | 451                     | 1007238        | 875, 876, 877 | 1007347        | 77       |
| 1006627        | 450                     | 1007239        | 875, 876, 877 | 1007348        | 77       |
| 1006628        | 450                     | 1007240        | 875, 876, 877 | 1007349        | 79       |
| 1006629        | 450                     | 1007241        | 876           | 1007350        | 79       |
| 1006630        | 450                     | 1007242        | 877           | 1007351        | 79       |
| 1006631        | 450                     | 1007243        | 875           | 1007352        | 521      |
| 1006632        | 450                     | 1007244        | 875           | 1007353        | 521      |
| 1006633        | 451                     | 1007245        | 875, 876      | 1007354        | 521      |
| 1006634        | 451                     | 1007246        | 876, 877      | 1007355        | 585      |
| 1006635        | 451                     | 1007250        | 911           | 1007356        | 585      |
| 1006636        | 451                     | 1007251        | 911           | 1007368        | 69       |
| 1006637        | 451                     | 1007252        | 911           | 1007369        | 69       |
| 1006638        | 451                     | 1007253        | 911           | 1007370        | 69       |
| 1006639        | 453                     | 1007254        | 912           | 1007371        | 69       |
| 1006640        | 453                     | 1007255        | 912           | 1007372        | 69       |
| 1006641        | 453                     | 1007256        | 912           | 1007373        | 69       |
| 1006642        | 453                     | 1007257        | 912           | 1007374        | 71       |
| 1006643        | 453                     | 1007281        | 781           | 1007375        | 71       |
| 1006644        | 453                     | 1007282        | 781           | 1007376        | 71       |
| 1006645        | 453                     | 1007283        | 74, 918       | 1007377        | 71       |
| 1006646        | 453                     | 1007284        | 208, 304      | 1007378        | 71       |
| 1006647        | 453                     | 1007285        | 208, 304      | 1007379        | 71       |
| 1006648        | 453                     | 1007286        | 210, 307      | 1007381        | 75       |
| 1006649        | 453                     | 1007287        | 210, 307      | 1007382        | 75       |
| 1006650        | 453                     | 1007288        | 208, 305      | 1007383        | 75       |
| 1006651        | 442                     | 1007289        | 208, 305      | 1007384        | 75       |
| 1006705        | 444                     | 1007290        | 211, 307      | 1007385        | 59       |
| 1006759        | 446                     | 1007291        | 211, 307      | 1007386        | 59       |
| 1006813        | 448                     | 1007292        | 208, 305      | 1007387        | 59       |
|                |                         | 1007293        | 208, 305      | 1007388        | 59       |
|                |                         | 1007294        | 211, 308      | 1007389        | 59       |
| <b>1007000</b> |                         | 1007295        | 211, 308      | 1007390        | 59       |
| 1007091        | 13                      | 1007296        | 209, 305      | 1007391        | 59       |
| 1007092        | 13                      | 1007297        | 209, 305      | 1007392        | 59       |
| 1007093        | 13                      | 1007298        | 211, 308      | 1007393        | 59       |
|                |                         | 1007299        | 211, 308      | 1007394        | 59       |
| <b>1007100</b> |                         |                |               | 1007395        | 59       |
| 1007142        | 784                     |                |               | 1007396        | 59       |
| 1007143        | 784                     | <b>1007300</b> |               | 1007397        | 59       |
| 1007144        | 784                     | 1007300        | 209, 306      | 1007398        | 59       |
| 1007145        | 784                     | 1007301        | 209, 306      | 1007399        | 59       |
| 1007146        | 733                     | 1007302        | 212, 308      |                |          |
| 1007147        | 733                     | 1007303        | 212, 308      | <b>1007400</b> |          |
| 1007184        | 13                      | 1007304        | 209, 306      | 1007400        | 59       |
| 1007185        | 13                      | 1007305        | 209, 306      | 1007401        | 61       |
| 1007186        | 13                      | 1007306        | 213, 309      | 1007402        | 61       |
| 1007188        | 433, 437                | 1007307        | 213, 309      | 1007403        | 61       |
| 1007189        | 433, 437                | 1007308        | 210, 306      | 1007404        | 61       |
| 1007190        | 149, 247, 331, 381, 523 | 1007309        | 210, 306      | 1007405        | 61       |
| 1007191        | 13                      | 1007310        | 213, 309      | 1007406        | 61       |
| 1007194        | 13                      | 1007311        | 213, 309      | 1007407        | 61       |
| 1007195        | 873                     | 1007312        | 210, 307      | 1007408        | 61       |
| 1007196        | 873                     | 1007313        | 210, 307      | 1007409        | 81       |
| 1007197        | 873                     | 1007314        | 213, 309      |                |          |

|                |     |                |     |                |                    |
|----------------|-----|----------------|-----|----------------|--------------------|
| 1007410        | 81  | 1007586        | 754 | 1007673        | 521                |
| 1007411        | 81  | 1007587        | 649 | 1007674        | 521                |
| 1007412        | 81  | 1007588        | 239 | 1007680        | 874                |
| 1007421        | 75  | 1007589        | 239 | 1007681        | 874                |
| 1007422        | 75  | 1007590        | 375 | 1007682        | 874                |
| 1007423        | 63  | 1007591        | 375 | 1007683        | 874, 875           |
| 1007424        | 63  | 1007592        | 375 | 1007684        | 874, 875           |
| 1007425        | 63  | 1007593        | 375 | 1007685        | 874, 875           |
| 1007426        | 63  | 1007594        | 322 | 1007701        | 223                |
| 1007427        | 63  | 1007595        | 322 | 1007702        | 223                |
| 1007428        | 63  | 1007596        | 239 | 1007703        | 223                |
| 1007429        | 63  | 1007597        | 239 | 1007746        | 225, 229           |
| 1007430        | 63  | 1007598        | 239 |                |                    |
| 1007431        | 75  | 1007599        | 239 | <b>1007800</b> |                    |
| 1007432        | 75  |                |     | 1007806        | 778                |
| 1007433        | 65  | <b>1007600</b> |     | 1007807        | 778                |
| 1007434        | 65  | 1007608        | 377 | 1007808        | 778                |
| 1007435        | 65  | 1007609        | 377 | 1007809        | 778                |
| 1007436        | 65  | 1007610        | 377 | 1007810        | 874                |
| 1007437        | 65  | 1007611        | 377 | 1007811        | 875                |
| 1007438        | 65  | 1007612        | 279 | 1007816        | 542                |
| 1007439        | 65  | 1007614        | 279 | 1007817        | 542                |
| 1007440        | 65  | 1007615        | 279 | 1007818        | 542                |
| 1007441        | 65  | 1007616        | 279 | 1007819        | 542                |
| 1007442        | 65  | 1007618        | 279 | 1007820        | 542                |
| 1007443        | 81  | 1007619        | 279 | 1007821        | 542                |
| 1007444        | 81  | 1007624        | 71  | 1007822        | 874, 875           |
| 1007445        | 81  | 1007625        | 71  | 1007827        | 625, 917           |
| 1007446        | 81  | 1007626        | 71  | 1007855        | 223                |
| 1007447        | 81  | 1007627        | 71  | 1007856        | 223                |
| 1007448        | 81  | 1007628        | 71  | 1007857        | 223                |
| 1007449        | 79  | 1007629        | 71  | 1007858        | 127, 179, 285, 401 |
| 1007450        | 79  | 1007630        | 79  | 1007859        | 127, 179, 285, 401 |
| 1007451        | 77  | 1007631        | 79  | 1007860        | 127, 179, 285, 401 |
| 1007452        | 81  | 1007632        | 79  | 1007868        | 747                |
| 1007453        | 77  | 1007633        | 79  | 1007869        | 747                |
| 1007454        | 81  | 1007634        | 79  | 1007874        | 429, 433, 437      |
| 1007455        | 896 | 1007635        | 79  | 1007875        | 429, 433, 437      |
| 1007458        | 778 | 1007636        | 79  | 1007876        | 241                |
| 1007459        | 651 | 1007637        | 79  | 1007877        | 241                |
| 1007460        | 650 | 1007638        | 521 | 1007878        | 241                |
| 1007461        | 757 | 1007639        | 521 | 1007879        | 241                |
| 1007462        | 419 | 1007640        | 521 | 1007880        | 241                |
| 1007463        | 419 | 1007641        | 521 | 1007881        | 241                |
| 1007464        | 419 | 1007642        | 521 | 1007891        | 225, 229           |
| 1007465        | 419 | 1007643        | 521 | 1007892        | 917                |
| 1007466        | 419 | 1007644        | 585 |                |                    |
| 1007467        | 419 | 1007645        | 585 | <b>1007900</b> |                    |
| 1007468        | 251 | 1007646        | 585 | 1007911        | 783                |
| 1007469        | 251 | 1007647        | 585 | 1007912        | 783                |
| 1007470        | 251 | 1007648        | 585 | 1007913        | 783                |
| 1007471        | 251 | 1007649        | 585 | 1007914        | 783                |
| 1007472        | 251 | 1007651        | 646 | 1007916        | 782                |
| 1007473        | 251 | 1007652        | 646 | 1007917        | 782                |
| 1007488        | 79  |                |     | 1007918        | 782                |
| 1007489        | 79  | <b>1007600</b> |     | 1007919        | 782                |
|                |     | 1007653        | 791 | 1007926        | 483                |
| <b>1007500</b> |     | 1007654        | 583 | 1007927        | 483                |
| 1007511        | 778 | 1007655        | 583 | 1007928        | 483                |
| 1007512        | 651 | 1007656        | 583 | 1007997        | 917                |
| 1007513        | 651 | 1007657        | 583 |                |                    |
| 1007551        | 15  | 1007661        | 225 | <b>1008000</b> |                    |
| 1007552        | 15  | 1007662        | 225 | 1008000        | 889                |
| 1007559        | 15  | 1007663        | 225 | 1008001        | 889                |
| 1007560        | 15  | 1007664        | 225 | 1008002        | 224                |
| 1007567        | 15  | 1007665        | 225 | 1008003        | 224                |
| 1007568        | 15  | 1007666        | 225 | 1008004        | 224                |
| 1007580        | 649 | 1007667        | 780 | 1008005        | 83                 |
| 1007581        | 779 | 1007668        | 781 | 1008006        | 83                 |
| 1007582        | 754 | 1007669        | 654 | 1008007        | 83                 |
| 1007583        | 649 | 1007670        | 654 | 1008008        | 83                 |
| 1007584        | 649 | 1007671        | 225 | 1008009        | 83                 |
| 1007585        | 779 | 1007672        | 225 | 1008010        | 788                |



|                |                    |         |                    |                |               |
|----------------|--------------------|---------|--------------------|----------------|---------------|
| 1008011        | 789                | 1008117 | 179                | <b>1008200</b> |               |
| 1008012        | 789                | 1008118 | 179                | 1008200        | 754           |
| 1008013        | 789                | 1008119 | 127, 179, 285, 401 | 1008201        | 335           |
| 1008014        | 646                | 1008123 | 286                | 1008202        | 335           |
| 1008015        | 647                | 1008124 | 287                | 1008203        | 335           |
| 1008016        | 647                | 1008125 | 126                | 1008204        | 335           |
| 1008017        | 647                | 1008126 | 126                | 1008205        | 335           |
| 1008023        | 127, 179, 285, 401 | 1008127 | 126                | 1008206        | 335           |
| 1008024        | 376                | 1008128 | 126                | 1008213        | 369, 499, 561 |
| 1008025        | 377                | 1008129 | 265                | 1008214        | 369, 499, 561 |
| 1008026        | 377                | 1008130 | 265                | 1008215        | 369, 499, 561 |
| 1008032        | 177                | 1008131 | 265                | 1008216        | 369, 499, 561 |
| 1008033        | 177                | 1008132 | 265                | 1008217        | 369, 499, 561 |
| 1008034        | 177                | 1008136 | 182                | 1008218        | 369, 499, 561 |
| 1008035        | 279                | 1008137 | 182                | 1008219        | 369, 499, 561 |
| 1008036        | 279                | 1008138 | 182                | 1008220        | 369, 499, 561 |
| 1008037        | 279                | 1008139 | 182                | 1008221        | 369, 499, 561 |
| 1008038        | 403                | 1008140 | 130, 186, 290, 572 | 1008222        | 369, 499, 561 |
| 1008039        | 403                | 1008141 | 132, 188, 292, 574 | 1008223        | 369, 499, 561 |
| 1008040        | 403                | 1008142 | 134, 190, 294, 576 | 1008224        | 369, 499, 561 |
| 1008041        | 489                | 1008143 | 136, 192, 296, 578 | 1008225        | 369, 499, 561 |
| 1008042        | 489                | 1008144 | 130, 186, 290, 572 | 1008226        | 369, 499, 561 |
| 1008043        | 489                | 1008145 | 132, 188, 292, 574 | 1008227        | 369, 499, 561 |
| 1008045        | 181                | 1008146 | 134, 190, 294, 576 | 1008242        | 495           |
| 1008047        | 181                | 1008147 | 136, 192, 296, 578 | 1008243        | 495           |
| 1008052        | 525                | 1008148 | 483                | 1008244        | 495           |
| 1008053        | 525                | 1008149 | 483                | 1008245        | 495           |
| 1008054        | 525                | 1008150 | 483                | 1008246        | 495           |
| 1008055        | 596                | 1008151 | 900                | 1008247        | 495           |
| 1008056        | 596                | 1008152 | 902                | 1008248        | 495           |
| 1008057        | 596                | 1008154 | 897                | 1008249        | 495           |
| 1008058        | 525                | 1008155 | 901                | 1008250        | 495           |
| 1008059        | 525                | 1008157 | 903                | 1008251        | 495           |
| 1008060        | 525                | 1008159 | 900                | 1008252        | 495           |
| 1008061        | 597                | 1008160 | 901                | 1008253        | 495           |
| 1008062        | 597                | 1008161 | 901                | 1008254        | 497           |
| 1008063        | 597                | 1008162 | 902                | 1008255        | 497           |
| 1008067        | 13                 | 1008163 | 901                | 1008256        | 497           |
| 1008068        | 13                 | 1008164 | 901                | 1008257        | 497           |
| 1008069        | 13                 | 1008165 | 901                | 1008258        | 497           |
| 1008070        | 13                 | 1008168 | 515                | 1008259        | 497           |
| 1008071        | 351                | 1008169 | 515                | 1008260        | 497           |
| 1008081        | 313                | 1008170 | 600                | 1008261        | 497           |
| 1008082        | 313                | 1008171 | 600                | 1008262        | 497           |
| 1008083        | 313                | 1008172 | 243                | 1008263        | 497           |
| 1008084        | 312                | 1008173 | 243                | 1008264        | 497           |
| 1008085        | 312                | 1008174 | 515                | 1008265        | 497           |
| 1008086        | 312                | 1008175 | 515                | 1008266        | 557           |
| 1008095        | 13                 | 1008176 | 601                | 1008267        | 557           |
| 1008096        | 13                 | 1008177 | 601                | 1008268        | 557           |
| 1008097        | 13                 | 1008178 | 243                | 1008269        | 557           |
| 1008098        | 13                 | 1008179 | 243                | 1008270        | 557           |
| 1008099        | 127                | 1008180 | 514                | 1008271        | 557           |
|                |                    | 1008181 | 514                | 1008272        | 557           |
| <b>1008100</b> |                    | 1008182 | 514                | 1008273        | 557           |
| 1008100        | 127                | 1008183 | 514                | 1008274        | 557           |
| 1008101        | 127                | 1008184 | 601                | 1008275        | 559           |
| 1008102        | 127                | 1008185 | 601                | 1008276        | 559           |
| 1008103        | 127                | 1008186 | 243, 515, 600, 601 | 1008277        | 559           |
| 1008104        | 285                | 1008187 | 243, 515, 600, 601 | 1008278        | 559           |
| 1008105        | 285                | 1008188 | 243, 515, 600, 601 | 1008279        | 559           |
| 1008106        | 285                | 1008189 | 243, 515, 601      | 1008280        | 559           |
| 1008107        | 285                | 1008190 | 243, 515, 601      | 1008281        | 559           |
| 1008108        | 285                | 1008191 | 243, 515, 601      | 1008282        | 559           |
| 1008109        | 401                | 1008192 | 243, 515, 601      | 1008283        | 559           |
| 1008110        | 401                | 1008193 | 649                | 1008284        | 363           |
| 1008111        | 401                | 1008194 | 649                | 1008285        | 363           |
| 1008112        | 401                | 1008195 | 648                | 1008286        | 363           |
| 1008113        | 401                | 1008196 | 648                | 1008287        | 363           |
| 1008114        | 179                | 1008197 | 779                | 1008288        | 365           |
| 1008115        | 179                | 1008198 | 779                | 1008289        | 365           |
| 1008116        | 179                | 1008199 | 754                | 1008290        | 365           |

|                |     |                |               |                |                              |
|----------------|-----|----------------|---------------|----------------|------------------------------|
| 1008291        | 365 | 1008366        | 364           | 1008450        | 507                          |
| 1008292        | 367 | 1008367        | 364           | 1008451        | 507                          |
| 1008293        | 367 | 1008368        | 364           | 1008452        | 569                          |
| 1008294        | 367 | 1008369        | 366           | 1008453        | 569                          |
| 1008295        | 367 | 1008370        | 366           | 1008454        | 463                          |
| 1008296        | 363 | 1008371        | 366           | 1008456        | 463                          |
| 1008297        | 363 | 1008372        | 366           | 1008457        | 463                          |
| 1008298        | 363 | 1008374        | 902           | 1008458        | 463                          |
| 1008299        | 363 | 1008375        | 897           | 1008459        | 463                          |
|                |     | 1008376        | 369, 499, 561 | 1008461        | 463                          |
| <b>1008300</b> |     | 1008377        | 369, 499, 561 | 1008462        | 463                          |
| 1008300        | 365 | 1008378        | 369, 499, 561 | 1008463        | 463                          |
| 1008301        | 365 | 1008382        | 429, 433, 437 | 1008464        | 463                          |
| 1008302        | 365 | 1008383        | 429, 433, 437 | 1008466        | 463                          |
| 1008303        | 365 | 1008384        | 787           | 1008467        | 463                          |
| 1008304        | 367 | 1008385        | 673           | 1008468        | 463                          |
| 1008305        | 367 | 1008386        | 641           | 1008469        | 507                          |
| 1008306        | 367 | 1008387        | 641           | 1008471        | 507                          |
| 1008307        | 367 | 1008388        | 641           | 1008472        | 507                          |
| 1008308        | 363 | 1008389        | 641           | 1008473        | 507                          |
| 1008309        | 363 | 1008390        | 505           | 1008474        | 661, 662, 663, 664, 665, 666 |
| 1008310        | 363 | 1008392        | 505           | 1008475        | 666                          |
| 1008311        | 363 | 1008393        | 505           | 1008476        | 639                          |
| 1008312        | 365 | 1008394        | 505           | 1008477        | 639                          |
| 1008313        | 365 | 1008395        | 505           | 1008478        | 732                          |
| 1008314        | 365 | 1008397        | 505           | 1008479        | 732                          |
| 1008315        | 365 | 1008398        | 505           | 1008480        | 732                          |
| 1008316        | 367 | 1008399        | 505           | 1008481        | 868                          |
| 1008317        | 367 |                |               | 1008482        | 371, 373, 521, 585           |
| 1008318        | 367 | <b>1008400</b> |               | 1008483        | 371, 373, 521, 585           |
| 1008319        | 367 | 1008400        | 505           | 1008484        | 371, 373, 521, 585           |
| 1008320        | 363 | 1008402        | 505           | 1008485        | 371, 373, 521, 585           |
| 1008321        | 363 | 1008403        | 505           | 1008486        | 371, 373, 521, 585           |
| 1008322        | 363 | 1008404        | 505           | 1008487        | 371, 373, 521, 585           |
| 1008323        | 363 | 1008405        | 460           | 1008496        | 147, 329, 509, 569           |
| 1008324        | 365 | 1008407        | 460           | 1008497        | 147, 329, 509, 569           |
| 1008325        | 365 | 1008408        | 460           | 1008498        | 147, 329, 509, 569           |
| 1008326        | 365 | 1008409        | 460           | 1008499        | 147, 329, 509, 569           |
| 1008327        | 365 | 1008410        | 460           |                |                              |
| 1008328        | 367 | 1008412        | 460           | <b>1008500</b> |                              |
| 1008329        | 367 | 1008413        | 460           | 1008500        | 185                          |
| 1008330        | 367 | 1008414        | 460           | 1008501        | 185                          |
| 1008331        | 367 | 1008415        | 461           | 1008502        | 185                          |
| 1008332        | 363 | 1008417        | 461           | 1008503        | 185                          |
| 1008333        | 363 | 1008418        | 461           | 1008504        | 185                          |
| 1008334        | 363 | 1008419        | 461           | 1008505        | 185                          |
| 1008335        | 363 | 1008420        | 506           | 1008506        | 185                          |
| 1008336        | 365 | 1008422        | 506           | 1008507        | 185                          |
| 1008337        | 365 | 1008423        | 506           | 1008508        | 185                          |
| 1008338        | 365 | 1008424        | 506           | 1008509        | 73                           |
| 1008339        | 365 | 1008425        | 506           | 1008510        | 73                           |
| 1008340        | 367 | 1008427        | 506           | 1008511        | 73                           |
| 1008341        | 367 | 1008428        | 506           | 1008512        | 73                           |
| 1008342        | 367 | 1008429        | 506           | 1008513        | 73                           |
| 1008343        | 367 | 1008430        | 506           | 1008514        | 73                           |
| 1008344        | 363 | 1008432        | 506           | 1008533        | 182                          |
| 1008345        | 363 | 1008433        | 506           | 1008534        | 182                          |
| 1008346        | 363 | 1008434        | 506           | 1008535        | 268                          |
| 1008347        | 363 | 1008435        | 566           | 1008536        | 269                          |
| 1008348        | 365 | 1008436        | 566           | 1008537        | 269                          |
| 1008349        | 365 | 1008437        | 566           | 1008538        | 269                          |
| 1008350        | 365 | 1008438        | 566           | 1008539        | 489                          |
| 1008351        | 365 | 1008439        | 566           | 1008540        | 489                          |
| 1008352        | 367 | 1008440        | 566           | 1008541        | 599                          |
| 1008353        | 367 | 1008441        | 567           | 1008542        | 843                          |
| 1008354        | 367 | 1008442        | 567           | 1008543        | 724                          |
| 1008355        | 367 | 1008443        | 567           | 1008544        | 724                          |
| 1008361        | 362 | 1008444        | 567           | 1008545        | 310                          |
| 1008362        | 362 | 1008445        | 567           | 1008546        | 310                          |
| 1008363        | 362 | 1008446        | 567           | 1008547        | 310                          |
| 1008364        | 362 | 1008447        | 507           | 1008548        | 311                          |
| 1008365        | 364 | 1008449        | 507           | 1008549        | 311                          |

|                |          |                |             |                |               |
|----------------|----------|----------------|-------------|----------------|---------------|
| 1008550        | 311      | 1008664        | 915         | 1008928        | 162           |
| 1008551        | 311      | 1008665        | 915         | 1008941        | 376           |
| 1008552        | 311      | 1008666        | 915         | 1008943        | 377           |
| 1008553        | 311      | 1008667        | 916         | 1008944        | 377           |
| 1008554        | 311      | 1008668        | 916         | 1008945        | 454           |
| 1008555        | 311      | 1008669        | 916         | 1008946        | 454           |
| 1008556        | 311      | 1008670        | 917         | 1008947        | 454           |
| 1008567        | 14       | 1008671        | 917         | 1008948        | 454           |
| 1008568        | 14       | 1008672        | 916         | 1008949        | 454           |
| 1008569        | 14       | 1008673        | 916         | 1008950        | 454           |
| 1008570        | 14       | 1008674        | 89, 916     | 1008951        | 454           |
| 1008571        | 14       | 1008675        | 908         | 1008952        | 454           |
| 1008572        | 14       | 1008676        | 593         | 1008953        | 455           |
| 1008573        | 14       | 1008677        | 593         | 1008954        | 455           |
| 1008574        | 14       | 1008678        | 593         | 1008955        | 455           |
| 1008577        | 160      | 1008679        | 593         | 1008956        | 455           |
| 1008578        | 160      | 1008699        | 88, 89, 913 | 1008957        | 455           |
| 1008579        | 160      |                |             | 1008958        | 455           |
| 1008580        | 160      | <b>1008700</b> |             | 1008959        | 455           |
| 1008581        | 161      | 1008701        | 89, 914     | 1008960        | 455           |
| 1008582        | 161      | 1008702        | 89, 917     | 1008961        | 455           |
| 1008583        | 161      | 1008703        | 371         | 1008962        | 455           |
| 1008584        | 161      | 1008704        | 371         | 1008963        | 455           |
| 1008585        | 161, 162 | 1008705        | 371         | 1008964        | 455           |
| 1008586        | 163      | 1008706        | 371         | 1008965        | 455           |
| 1008587        | 163      | 1008707        | 371         | 1008966        | 455           |
| 1008588        | 161, 163 | 1008708        | 371         | 1008967        | 455           |
| 1008589        | 206      | 1008709        | 373         | 1008968        | 455           |
| 1008590        | 206      | 1008710        | 373         | 1008969        | 456           |
| 1008591        | 207      | 1008711        | 373         | 1008970        | 456           |
| 1008592        | 207      | 1008712        | 373         | 1008971        | 456           |
| 1008593        | 207      | 1008713        | 373         | 1008972        | 456           |
| 1008594        | 207      | 1008714        | 373         | 1008973        | 456           |
| 1008595        | 207      | 1008715        | 373         | 1008974        | 456           |
| 1008596        | 207      | 1008716        | 373         | 1008975        | 456           |
|                |          | 1008717        | 373         | 1008976        | 456           |
| <b>1008600</b> |          | 1008718        | 373         | 1008977        | 457           |
| 1008612        | 337      | 1008719        | 373         | 1008978        | 457           |
| 1008613        | 337      | 1008720        | 373         | 1008979        | 457           |
| 1008614        | 337      | 1008721        | 845         | 1008980        | 457           |
| 1008615        | 257      | 1008722        | 845         | 1008981        | 457           |
| 1008616        | 257      | 1008723        | 845         | 1008982        | 457           |
| 1008617        | 257      | 1008724        | 845         | 1008983        | 457           |
| 1008618        | 148      | 1008725        | 723         | 1008984        | 457           |
| 1008619        | 148      | 1008726        | 723         | 1008985        | 457           |
| 1008620        | 148      | 1008727        | 723         | 1008986        | 457           |
| 1008629        | 88       | 1008728        | 593         | 1008987        | 457           |
| 1008631        | 89       | 1008729        | 593         | 1008988        | 457           |
| 1008633        | 89       | 1008730        | 593         | 1008989        | 457           |
| 1008635        | 89       | 1008731        | 593         | 1008990        | 457           |
| 1008641        | 900      |                |             | 1008991        | 457           |
| 1008642        | 900      | <b>1008800</b> |             | 1008992        | 457           |
| 1008643        | 900      | 1008838        | 670         | 1008993        | 454, 455      |
| 1008644        | 900      | 1008839        | 670         | 1008994        | 454, 455      |
| 1008645        | 903      | 1008841        | 886         | 1008995        | 454, 455      |
| 1008646        | 903      | 1008842        | 886         | 1008996        | 454, 455      |
| 1008647        | 896      | 1008843        | 886, 887    | 1008997        | 456, 457      |
| 1008648        | 896      |                |             | 1008998        | 456, 457      |
| 1008649        | 896      | <b>1008900</b> |             | 1008999        | 456, 457      |
| 1008650        | 896      | 1008902        | 498         |                |               |
| 1008651        | 910      | 1008903        | 498         | <b>1009000</b> |               |
| 1008652        | 911      | 1008904        | 498         | 1009000        | 456, 457      |
| 1008653        | 910      | 1008917        | 160         | 1009001        | 429, 433, 437 |
| 1008654        | 910      | 1008918        | 160         | 1009002        | 73            |
| 1008655        | 910      | 1008919        | 160         | 1009003        | 73            |
| 1008656        | 913      | 1008920        | 160         | 1009004        | 73            |
| 1008657        | 913      | 1008921        | 162         | 1009005        | 73            |
| 1008658        | 913      | 1008922        | 162         | 1009012        | 429, 433, 437 |
| 1008659        | 913      | 1008923        | 162         | 1009014        | 255           |
| 1008660        | 914      | 1008924        | 162         | 1009015        | 255           |
| 1008661        | 914      | 1008925        | 160         | 1009016        | 459           |
| 1008662        | 915      | 1008926        | 161         | 1009017        | 459           |
| 1008663        | 915      | 1008927        | 161         | 1009018        | 459           |

|         |     |                |               |                |               |
|---------|-----|----------------|---------------|----------------|---------------|
| 1009019 | 459 | 1009092        | 147           | 1009972        | 36            |
| 1009020 | 67  | 1009093        | 147           |                |               |
| 1009021 | 67  | 1009094        | 147           | <b>1010000</b> |               |
| 1009022 | 67  | 1009095        | 147           | 1010026        | 38            |
| 1009023 | 67  | 1009096        | 147           | 1010099        | 523           |
| 1009024 | 461 | 1009097        | 147           |                |               |
| 1009025 | 461 | 1009098        | 147           | <b>1010100</b> |               |
| 1009026 | 461 | 1009099        | 147           | 1010100        | 523           |
| 1009027 | 461 |                |               | 1010101        | 793           |
| 1009028 | 461 | <b>1009100</b> |               | 1010102        | 793           |
| 1009029 | 461 | 1009100        | 329           | 1010103        | 674           |
| 1009030 | 461 | 1009101        | 329           | 1010104        | 674           |
| 1009031 | 461 | 1009102        | 329, 459, 511 | 1010105        | 675           |
| 1009032 | 461 | 1009103        | 329, 459, 511 | 1010106        | 675           |
| 1009033 | 461 | 1009104        | 329, 459, 511 | 1010107        | 793           |
| 1009034 | 461 | 1009107        | 739           | 1010108        | 793           |
| 1009035 | 461 | 1009108        | 739           | 1010125        | 18, 28, 38    |
| 1009036 | 144 | 1009131        | 511           | 1010126        | 18, 28, 38    |
| 1009037 | 144 | 1009132        | 511           | 1010127        | 20, 30, 40    |
| 1009038 | 144 | 1009133        | 511           | 1010128        | 20, 30, 40    |
| 1009039 | 144 | 1009134        | 511           | 1010129        | 22, 32, 42    |
| 1009040 | 144 | 1009135        | 185           | 1010130        | 22, 32, 42    |
| 1009041 | 144 | 1009136        | 185           | 1010131        | 24, 34, 44    |
| 1009042 | 144 | 1009137        | 185           | 1010132        | 24, 34, 44    |
| 1009043 | 144 | 1009138        | 525           | 1010133        | 26, 36, 46    |
| 1009044 | 144 | 1009139        | 596           | 1010134        | 26, 36, 46    |
| 1009045 | 144 | 1009140        | 525           | 1010135        | 374, 519, 589 |
| 1009046 | 144 | 1009141        | 597           | 1010136        | 374, 519, 589 |
| 1009047 | 144 | 1009142        | 407           | 1010138        | 374, 519, 589 |
| 1009048 | 144 | 1009143        | 407           | 1010139        | 374, 519, 589 |
| 1009049 | 144 | 1009144        | 287           | 1010140        | 374, 519, 589 |
| 1009050 | 144 | 1009145        | 287           | 1010141        | 374, 519, 589 |
| 1009051 | 144 | 1009146        | 592           | 1010142        | 374, 519, 589 |
| 1009052 | 111 | 1009147        | 592           | 1010143        | 374, 519, 589 |
| 1009053 | 111 | 1009148        | 592           | 1010144        | 590           |
| 1009054 | 111 | 1009149        | 592           | 1010145        | 590           |
| 1009055 | 111 | 1009150        | 592           | 1010146        | 590           |
| 1009056 | 111 | 1009151        | 592           | 1010147        | 590           |
| 1009057 | 111 | 1009152        | 592           | 1010148        | 590           |
| 1009058 | 111 | 1009153        | 592           | 1010149        | 590           |
| 1009059 | 111 | 1009168        | 876           | 1010150        | 590           |
| 1009060 | 195 | 1009169        | 876           | 1010151        | 590           |
| 1009061 | 195 | 1009170        | 877           | 1010152        | 590           |
| 1009062 | 195 | 1009171        | 877           | 1010153        | 590           |
| 1009063 | 195 |                |               | 1010154        | 590           |
| 1009064 | 195 | <b>1009200</b> |               | 1010155        | 590           |
| 1009065 | 195 | 1009271        | 18            | 1010156        | 591           |
| 1009066 | 195 |                |               | 1010157        | 591           |
| 1009067 | 195 | <b>1009300</b> |               | 1010158        | 591           |
| 1009068 | 145 | 1009325        | 28            | 1010159        | 591           |
| 1009069 | 145 | 1009379        | 40            | 1010161        | 802           |
| 1009070 | 145 |                |               | 1010162        | 802           |
| 1009071 | 145 | <b>1009400</b> |               | 1010163        | 802           |
| 1009072 | 145 | 1009433        | 20            | 1010164        | 802           |
| 1009073 | 145 | 1009487        | 30            | 1010165        | 803           |
| 1009074 | 145 | 1009541        | 42            | 1010166        | 803           |
| 1009075 | 145 |                |               | 1010167        | 803           |
| 1009076 | 145 | <b>1009500</b> |               | 1010168        | 803           |
| 1009077 | 145 | 1009595        | 22            | 1010169        | 804           |
| 1009078 | 145 |                |               | 1010170        | 804           |
| 1009079 | 145 | <b>1009600</b> |               | 1010171        | 804           |
| 1009080 | 145 | 1009649        | 32            | 1010172        | 804           |
| 1009081 | 145 |                |               | 1010173        | 805           |
| 1009082 | 145 | <b>1009700</b> |               | 1010174        | 805           |
| 1009083 | 145 | 1009703        | 44            | 1010175        | 805           |
| 1009084 | 111 | 1009757        | 24            | 1010176        | 805           |
| 1009085 | 111 |                |               | 1010177        | 798           |
| 1009086 | 111 | <b>1009800</b> |               | 1010178        | 798           |
| 1009087 | 111 | 1009810        | 34            | 1010179        | 798           |
| 1009088 | 111 | 1009864        | 46            | 1010180        | 798           |
| 1009089 | 111 |                |               | 1010181        | 798           |
| 1009090 | 111 | <b>1009900</b> |               | 1010182        | 798           |
| 1009091 | 111 | 1009918        | 26            | 1010183        | 799           |

|                |          |                |               |                |               |
|----------------|----------|----------------|---------------|----------------|---------------|
| 1010184        | 799      | 1010301        | 289           | 1010424        | 169           |
| 1010185        | 799      | 1010302        | 289           | 1010425        | 169           |
| 1010186        | 799      | 1010306        | 289           | 1010426        | 253           |
| 1010187        | 799      | 1010307        | 289           | 1010427        | 253           |
| 1010188        | 799      | 1010308        | 289           | 1010428        | 253           |
| 1010189        | 801      | 1010312        | 289           | 1010429        | 253           |
| 1010190        | 801      | 1010313        | 289           | 1010446        | 429, 433, 437 |
| 1010191        | 801      | 1010318        | 513           | 1010447        | 429, 433, 437 |
| 1010192        | 801      | 1010319        | 513           | 1010448        | 517           |
| 1010193        | 281      | 1010320        | 513           | 1010449        | 517           |
| 1010194        | 281      | 1010324        | 513           | 1010450        | 517           |
| 1010195        | 830      | 1010325        | 513           | 1010451        | 517           |
| 1010196        | 830      | 1010326        | 513           | 1010452        | 517           |
| 1010197        | 698      | 1010330        | 441           | 1010453        | 517           |
| 1010198        | 698      | 1010331        | 441           | 1010454        | 517           |
| 1010199        | 698      | 1010332        | 441           | 1010455        | 517           |
|                |          | 1010336        | 441           | 1010456        | 439           |
| <b>1010200</b> |          | 1010337        | 441           | 1010457        | 439           |
| 1010200        | 699      | 1010338        | 441           | 1010458        | 439           |
| 1010201        | 699      | 1010345        | 408           | 1010459        | 439           |
| 1010202        | 655      | 1010346        | 408           | 1010460        | 439           |
| 1010203        | 655      | 1010347        | 408           | 1010461        | 439           |
| 1010204        | 655      | 1010348        | 408           | 1010462        | 439           |
| 1010205        | 655      | 1010349        | 409           | 1010463        | 439           |
| 1010206        | 409      | 1010350        | 409           |                |               |
| 1010207        | 409      | 1010351        | 409           | <b>1010500</b> |               |
| 1010208        | 409      | 1010352        | 409           | 1010509        | 249           |
| 1010209        | 409      | 1010353        | 57            | 1010510        | 249           |
| 1010210        | 379      | 1010354        | 57            | 1010511        | 249           |
| 1010211        | 379      | 1010355        | 57            | 1010512        | 249           |
| 1010212        | 379      | 1010359        | 57, 221       | 1010513        | 249           |
| 1010213        | 379      | 1010360        | 57, 221       | 1010514        | 249           |
| 1010214        | 379      | 1010361        | 221           | 1010515        | 249           |
| 1010215        | 379      | 1010365        | 163, 375      | 1010516        | 249           |
| 1010216        | 197      | 1010366        | 197           | 1010517        | 167           |
| 1010217        | 163, 375 | 1010375        | 441           | 1010518        | 167           |
| 1010222        | 519      | 1010376        | 441           | 1010519        | 167           |
| 1010224        | 519      | 1010377        | 441           | 1010520        | 167           |
| 1010226        | 519      | 1010381        | 591           | 1010521        | 87            |
| 1010228        | 519      | 1010382        | 591           | 1010522        | 87            |
| 1010230        | 519      | 1010383        | 591           | 1010523        | 87            |
| 1010232        | 519      | 1010384        | 591           | 1010524        | 87            |
| 1010234        | 589      | 1010385        | 591           |                |               |
| 1010236        | 589      | 1010386        | 591           | <b>1010600</b> |               |
| 1010237        | 589      | 1010387        | 591           | 1010679        | 21, 31, 41    |
| 1010239        | 589      | 1010388        | 591           | 1010680        | 21, 31, 41    |
| 1010240        | 589      | 1010393        | 417           | 1010681        | 21, 31, 41    |
| 1010242        | 589      | 1010394        | 417           | 1010682        | 21, 31, 41    |
| 1010243        | 589      | 1010397        | 102           | 1010683        | 23, 33, 43    |
| 1010245        | 589      | 1010398        | 103           | 1010684        | 23, 33, 43    |
| 1010246        | 589      | 1010399        | 103           | 1010685        | 23, 33, 43    |
| 1010248        | 589      |                |               | 1010686        | 23, 33, 43    |
| 1010249        | 589      | <b>1010400</b> |               | 1010687        | 25, 35, 45    |
| 1010251        | 589      | 1010400        | 103           | 1010688        | 25, 35, 45    |
| 1010252        | 439      | 1010401        | 343           | 1010689        | 25, 35, 45    |
| 1010254        | 439      | 1010402        | 399           | 1010690        | 25, 35, 45    |
| 1010255        | 439      | 1010403        | 255, 459, 511 | 1010691        | 27, 37, 47    |
| 1010257        | 439      | 1010404        | 255, 459, 511 | 1010692        | 27, 37, 47    |
| 1010258        | 374      | 1010405        | 255, 459, 511 | 1010693        | 27, 37, 47    |
| 1010260        | 374      | 1010406        | 255, 459, 511 | 1010694        | 27, 37, 47    |
| 1010261        | 374      | 1010407        | 255, 459, 511 | 1010695        | 48            |
| 1010263        | 374      | 1010408        | 255, 459, 511 | 1010696        | 49            |
| 1010264        | 374      | 1010413        | 183           | 1010697        | 50            |
| 1010266        | 374      | 1010414        | 183           | 1010698        | 51            |
| 1010267        | 374      | 1010415        | 183           | 1010699        | 48            |
| 1010269        | 374      | 1010416        | 183           |                |               |
| 1010270        | 374      | 1010417        | 258           | <b>1010700</b> |               |
| 1010272        | 374      | 1010418        | 258           | 1010700        | 49            |
| 1010273        | 374      | 1010419        | 258           | 1010701        | 50            |
| 1010275        | 374      | 1010420        | 258           | 1010702        | 51            |
|                |          | 1010421        | 258           | 1010703        | 48            |
| <b>1010300</b> |          | 1010422        | 169           | 1010704        | 49            |
| 1010300        | 289      | 1010423        | 169           | 1010705        | 50            |




|                |                    |                |                              |                |                              |
|----------------|--------------------|----------------|------------------------------|----------------|------------------------------|
| 1010706        | 51                 | 1011599        | 733                          | 1011764        | 563                          |
| 1010785        | 216                |                |                              | 1011765        | 563                          |
| 1010786        | 217                | <b>1011600</b> |                              | 1011766        | 563                          |
| 1010787        | 217                | 1011655        | 909                          | 1011779        | 298, 299, 300, 301, 302, 303 |
| 1010788        | 217                | 1011670        | 899                          | 1011780        | 298, 299, 300, 301, 302, 303 |
| 1010789        | 218                | 1011671        | 899                          | 1011781        | 298, 299, 300, 301, 302, 303 |
| 1010790        | 219                | 1011681        | 175                          | 1011782        | 298, 299, 300, 301, 302, 303 |
| 1010791        | 219                | 1011682        | 175                          | 1011783        | 298, 299, 300, 301, 302, 303 |
| 1010792        | 219                | 1011683        | 175                          | 1011784        | 298, 299, 300, 301, 302, 303 |
| 1010793        | 220                | 1011684        | 175                          |                |                              |
| 1010794        | 220                | 1011685        | 175                          | <b>1011800</b> |                              |
| 1010795        | 220                | 1011686        | 175                          | 1011829        | 195, 328, 460, 461, 463, 509 |
| 1010796        | 221                | 1011687        | 555                          | 1011830        | 195, 328, 460, 461, 463, 509 |
| 1010797        | 493                | 1011688        | 555                          | 1011831        | 195, 328, 460, 461, 463, 509 |
| 1010798        | 491                | 1011689        | 555                          | 1011832        | 195, 328, 460, 461, 463, 509 |
| 1010799        | 491                | 1011690        | 487                          | 1011833        | 111, 145, 465, 509, 566, 567 |
|                |                    | 1011691        | 487                          | 1011834        | 111, 145, 465, 509, 566, 567 |
| <b>1010800</b> |                    | 1011692        | 487                          | 1011835        | 111, 145, 465, 509, 566, 567 |
| 1010800        | 493                | 1011693        | 198, 298                     | 1011836        | 111, 145, 465, 509, 566, 567 |
| 1010801        | 466                | 1011694        | 198, 298                     | 1011837        | 144, 195, 328, 460, 461, 463 |
| 1010802        | 467                | 1011695        | 199, 299                     | 1011838        | 111, 145, 465, 566, 567      |
| 1010803        | 467                | 1011696        | 199, 299                     | 1011839        | 147, 329, 569                |
| 1010804        | 467                | 1011697        | 199, 299                     | 1011846        | 147                          |
| 1010840        | 586                | 1011698        | 199, 299                     | 1011847        | 147                          |
| 1010841        | 586                | 1011699        | 199, 299                     | 1011848        | 147                          |
| 1010842        | 586                |                |                              | 1011849        | 147                          |
| 1010843        | 586                | <b>1011700</b> |                              | 1011850        | 202, 302                     |
| 1010844        | 586                | 1011700        | 199, 299                     | 1011851        | 202, 302                     |
| 1010845        | 586                | 1011701        | 200, 300                     | 1011852        | 202, 302                     |
| 1010846        | 586                | 1011702        | 200, 300                     | 1011853        | 202, 302                     |
| 1010847        | 586                | 1011703        | 201, 300                     | 1011854        | 202, 302                     |
| 1010848        | 587                | 1011704        | 201, 300                     | 1011855        | 202, 302                     |
| 1010849        | 587                | 1011705        | 201, 300                     | 1011856        | 203, 303                     |
| 1010850        | 587                | 1011706        | 201, 300                     | 1011857        | 203, 303                     |
| 1010851        | 587                | 1011707        | 201, 301                     | 1011858        | 203, 303                     |
| 1010852        | 587                | 1011708        | 201, 301                     | 1011859        | 203, 303                     |
| 1010853        | 587                | 1011709        | 569                          | 1011860        | 203, 303                     |
| 1010854        | 587                | 1011710        | 569                          | 1011861        | 203, 303                     |
| 1010855        | 587                | 1011711        | 565                          | 1011865        | 345                          |
| 1010856        | 586                | 1011712        | 565                          | 1011866        | 345                          |
| 1010857        | 586                | 1011713        | 501                          | 1011877        | 329                          |
| 1010858        | 587                | 1011714        | 501                          | 1011878        | 329                          |
| 1010859        | 587                | 1011715        | 565                          | 1011879        | 329                          |
|                |                    | 1011716        | 565                          | 1011880        | 329                          |
| <b>1010900</b> |                    | 1011717        | 501                          | 1011881        | 329                          |
| 1010939        | 798, 799, 802, 803 | 1011718        | 501                          | 1011882        | 329                          |
| 1010940        | 799, 801, 804, 805 | 1011719        | 140                          | 1011883        | 329                          |
|                |                    | 1011720        | 140                          | 1011884        | 329                          |
| <b>1011000</b> |                    | 1011721        | 564                          | 1011885        | 141                          |
| 1011020        | 787                | 1011722        | 564                          | 1011886        | 141                          |
| 1011021        | 771                | 1011723        | 500                          | 1011887        | 141                          |
| 1011022        | 771                | 1011724        | 500                          | 1011888        | 141                          |
| 1011023        | 643                | 1011725        | 564                          | 1011889        | 143                          |
| 1011024        | 643                | 1011726        | 564                          | 1011890        | 143                          |
| 1011025        | 755                | 1011727        | 500                          | 1011891        | 143                          |
| 1011026        | 755                | 1011728        | 500                          | 1011892        | 143                          |
| 1011033        | 747                | 1011747        | 347                          | 1011893        | 326                          |
| 1011034        | 747                | 1011748        | 347                          | 1011894        | 326                          |
|                |                    | 1011749        | 326, 327, 501, 503, 563, 565 | 1011895        | 326                          |
| <b>1011200</b> |                    | 1011750        | 326, 327, 501, 503, 563, 565 | 1011896        | 326                          |
| 1011208        | 12                 | 1011751        | 326, 327, 501, 503, 563, 565 | 1011897        | 141                          |
| 1011209        | 12                 | 1011752        | 326, 327, 501, 503, 563, 565 | 1011898        | 141                          |
| 1011210        | 12                 | 1011753        | 244, 245, 323, 325, 500, 564 | 1011899        | 109                          |
| 1011211        | 12                 | 1011754        | 244, 245, 323, 325, 500, 564 |                |                              |
| 1011260        | 774                | 1011755        | 244, 245, 323, 325, 500, 564 | <b>1011900</b> |                              |
| 1011261        | 775                | 1011756        | 244, 245, 323, 325, 500, 564 | 1011900        | 109                          |
| 1011262        | 775                | 1011757        | 320                          | 1011901        | 109                          |
| 1011263        | 775                | 1011758        | 320                          | 1011902        | 109                          |
| <b>1011500</b> |                    | 1011759        | 503                          | 1011903        | 327                          |
| 1011572        | 844                | 1011760        | 503                          | 1011904        | 327                          |
| 1011573        | 844                | 1011761        | 503                          | 1011905        | 327                          |
| 1011598        | 733                | 1011762        | 503                          | 1011906        | 327                          |
|                |                    | 1011763        | 563                          | 1011907        | 245                          |

|                |     |                |               |                |     |
|----------------|-----|----------------|---------------|----------------|-----|
| 1011908        | 245 | 1012005        | 414           | 1012195        | 417 |
| 1011909        | 245 |                |               | 1012196        | 417 |
| 1011910        | 245 | <b>1012100</b> |               | 1012197        | 417 |
| 1011911        | 139 | 1012113        | 734           | 1012198        | 96  |
| 1011912        | 139 | 1012114        | 734           | 1012199        | 94  |
| 1011913        | 139 | 1012115        | 734           |                |     |
| 1011914        | 139 | 1012116        | 734           | <b>1012200</b> |     |
| 1011915        | 323 | 1012117        | 734           | 1012200        | 97  |
| 1011916        | 323 | 1012118        | 734           | 1012201        | 95  |
| 1011917        | 323 | 1012119        | 735           | 1012202        | 97  |
| 1011918        | 323 | 1012120        | 735           | 1012203        | 95  |
| 1011919        | 108 | 1012121        | 735           | 1012204        | 97  |
| 1011920        | 108 | 1012122        | 735           | 1012205        | 95  |
| 1011921        | 108 | 1012123        | 735           | 1012206        | 100 |
| 1011922        | 108 | 1012124        | 735           | 1012207        | 98  |
| 1011923        | 323 | 1012125        | 734           | 1012208        | 101 |
| 1011924        | 323 | 1012126        | 735           | 1012209        | 101 |
| 1011925        | 325 | 1012127        | 734           | 1012210        | 99  |
| 1011926        | 325 | 1012128        | 734           | 1012211        | 101 |
| 1011927        | 325 | 1012129        | 735           | 1012212        | 99  |
| 1011928        | 325 | 1012130        | 735           | 1012213        | 386 |
| 1011929        | 244 | 1012131        | 734, 735, 737 | 1012214        | 386 |
| 1011930        | 244 | 1012132        | 735, 737      | 1012215        | 387 |
| 1011931        | 138 | 1012133        | 734, 735, 737 | 1012216        | 387 |
| 1011932        | 138 | 1012134        | 735, 737      | 1012217        | 387 |
| 1011934        | 234 | 1012135        | 734, 735, 737 | 1012218        | 387 |
| 1011935        | 234 | 1012138        | 645           | 1012219        | 387 |
| 1011936        | 234 | 1012140        | 773           | 1012220        | 387 |
| 1011937        | 234 | 1012141        | 645           | 1012221        | 388 |
| 1011938        | 235 | 1012142        | 645           | 1012222        | 388 |
| 1011939        | 235 | 1012144        | 777           | 1012223        | 389 |
| 1011940        | 235 | 1012145        | 777           | 1012224        | 389 |
| 1011941        | 235 | 1012146        | 777           | 1012225        | 389 |
| 1011942        | 236 | 1012147        | 777           | 1012226        | 389 |
| 1011943        | 236 | 1012154        | 248           | 1012227        | 389 |
| 1011944        | 236 | 1012155        | 248           | 1012228        | 389 |
| 1011945        | 236 | 1012156        | 248           | 1012229        | 99  |
| 1011946        | 237 | 1012157        | 248           | 1012239        | 614 |
| 1011947        | 237 | 1012158        | 249           | 1012240        | 614 |
| 1011948        | 237 | 1012159        | 249           | 1012241        | 614 |
| 1011949        | 237 | 1012160        | 249           | 1012242        | 616 |
| 1011950        | 235 | 1012161        | 249           | 1012243        | 616 |
| 1011951        | 235 | 1012162        | 167           | 1012244        | 616 |
| 1011952        | 235 | 1012163        | 167           | 1012245        | 616 |
| 1011953        | 235 | 1012164        | 167           | 1012246        | 616 |
| 1011954        | 235 | 1012165        | 167           | 1012247        | 616 |
| 1011955        | 235 | 1012166        | 320           | 1012248        | 622 |
| 1011956        | 235 | 1012167        | 320           | 1012249        | 622 |
| 1011957        | 235 | 1012168        | 320           | 1012250        | 622 |
| 1011958        | 237 | 1012169        | 320           | 1012251        | 618 |
| 1011959        | 237 | 1012170        | 463           | 1012252        | 620 |
| 1011960        | 237 | 1012171        | 463           | 1012253        | 618 |
| 1011961        | 237 | 1012172        | 463           | 1012254        | 620 |
| 1011962        | 237 | 1012173        | 463           | 1012255        | 620 |
| 1011963        | 237 | 1012174        | 328           | 1012256        | 620 |
| 1011964        | 237 | 1012175        | 328           | 1012257        | 620 |
| 1011965        | 237 | 1012176        | 328           | 1012258        | 620 |
| 1011991        | 197 | 1012178        | 328           | 1012259        | 615 |
| 1011992        | 197 | 1012179        | 328           | 1012260        | 615 |
| 1011993        | 165 | 1012180        | 328           | 1012261        | 615 |
| 1011994        | 165 | 1012182        | 390           | 1012262        | 617 |
| 1011995        | 165 | 1012183        | 392           | 1012263        | 617 |
| 1011996        | 165 | 1012184        | 390           | 1012264        | 617 |
| 1011997        | 197 | 1012185        | 392           | 1012265        | 617 |
| 1011998        | 197 | 1012186        | 391           | 1012266        | 617 |
| 1011999        | 164 | 1012187        | 393           | 1012267        | 617 |
|                |     | 1012188        | 391           | 1012268        | 617 |
| <b>1012000</b> |     | 1012189        | 393           | 1012269        | 617 |
| 1012000        | 164 | 1012190        | 391           | 1012270        | 617 |
| 1012001        | 165 | 1012191        | 393           | 1012272        | 623 |
| 1012002        | 165 | 1012192        | 417           | 1012273        | 623 |
| 1012003        | 414 | 1012193        | 417           | 1012274        | 623 |
| 1012004        | 414 | 1012194        | 417           | 1012275        | 619 |

|                |     |                |     |                |               |
|----------------|-----|----------------|-----|----------------|---------------|
| 1012276        | 621 | 1012364        | 111 | 1012554        | 626           |
| 1012277        | 619 | 1012365        | 111 | 1012555        | 626           |
| 1012278        | 621 | 1012375        | 465 | 1012556        | 627           |
| 1012279        | 621 | 1012376        | 465 | 1012557        | 627           |
| 1012280        | 621 | 1012377        | 465 | 1012558        | 628           |
| 1012281        | 621 | 1012378        | 465 | 1012559        | 628           |
| 1012282        | 621 |                |     | 1012560        | 628           |
| 1012283        | 614 | <b>1012400</b> |     | 1012561        | 628           |
| 1012284        | 616 | 1012422        | 429 | 1012562        | 629           |
| 1012286        | 618 | 1012423        | 429 | 1012563        | 629           |
| 1012287        | 618 | 1012430        | 428 | 1012564        | 629           |
| 1012288        | 614 | 1012431        | 428 | 1012565        | 629           |
| 1012289        | 616 | 1012432        | 428 | 1012566        | 630           |
| 1012291        | 618 | 1012433        | 428 | 1012567        | 630           |
| 1012292        | 618 | 1012434        | 428 | 1012568        | 630           |
| 1012293        | 614 | 1012435        | 428 | 1012569        | 630           |
| 1012294        | 616 | 1012436        | 428 | 1012570        | 631           |
| 1012296        | 618 | 1012437        | 428 | 1012571        | 631           |
| 1012297        | 618 | 1012438        | 428 | 1012572        | 631           |
| 1012298        | 614 | 1012439        | 428 | 1012573        | 631           |
| 1012299        | 616 | 1012440        | 428 | 1012574        | 626           |
|                |     | 1012441        | 428 | 1012576        | 628           |
| <b>1012300</b> |     | 1012442        | 432 | 1012577        | 629           |
| 1012303        | 625 | 1012443        | 432 | 1012578        | 629           |
| 1012304        | 615 | 1012444        | 432 | 1012579        | 630           |
| 1012305        | 617 | 1012445        | 432 | 1012580        | 630           |
| 1012306        | 617 | 1012446        | 432 | 1012581        | 631           |
| 1012307        | 619 | 1012447        | 432 | 1012582        | 631           |
| 1012308        | 619 | 1012448        | 432 | 1012583        | 626, 629, 630 |
| 1012309        | 615 | 1012449        | 432 | 1012584        | 628           |
| 1012310        | 617 | 1012450        | 436 |                |               |
| 1012311        | 617 | 1012451        | 436 | <b>1012600</b> |               |
| 1012312        | 619 | 1012452        | 439 | 1012603        | 625           |
| 1012313        | 619 | 1012453        | 436 | 1012604        | 625           |
| 1012314        | 615 | 1012454        | 436 | 1012605        | 625           |
| 1012315        | 617 | 1012455        | 436 | 1012623        | 12            |
| 1012316        | 617 | 1012456        | 436 | 1012624        | 12            |
| 1012317        | 619 | 1012457        | 436 |                |               |
| 1012318        | 619 | 1012458        | 428 | <b>300000</b>  |               |
| 1012319        | 615 | 1012459        | 428 | 3009280        | 909           |
| 1012320        | 617 | 1012460        | 432 | 3009282        | 909           |
| 1012321        | 617 | 1012461        | 432 | 3009285        | 909           |
| 1012322        | 619 | 1012462        | 436 | 3009286        | 909           |
| 1012323        | 619 | 1012463        | 436 | 3009287        | 910           |
| 1012325        | 625 | 1012464        | 612 | 3009310        | 909           |
| 1012328        | 625 | 1012465        | 612 | 3009389        | 909           |
| 1012329        | 625 | 1012466        | 612 |                |               |
| 1012330        | 626 | 1012467        | 612 |                |               |
| 1012331        | 626 | 1012468        | 904 |                |               |
| 1012332        | 628 | 1012469        | 904 |                |               |
| 1012333        | 628 | 1012470        | 904 |                |               |
| 1012334        | 630 | 1012471        | 904 |                |               |
| 1012335        | 630 | 1012472        | 904 |                |               |
| 1012336        | 628 | 1012473        | 612 |                |               |
| 1012337        | 628 | 1012474        | 612 |                |               |
| 1012338        | 630 | 1012475        | 612 |                |               |
| 1012339        | 630 | 1012476        | 612 |                |               |
| 1012340        | 628 | 1012477        | 613 |                |               |
| 1012341        | 628 | 1012478        | 613 |                |               |
| 1012342        | 630 | 1012479        | 613 |                |               |
| 1012343        | 630 | 1012480        | 613 |                |               |
| 1012344        | 628 |                |     |                |               |
| 1012345        | 628 | <b>1012500</b> |     |                |               |
| 1012346        | 630 | 1012536        | 626 |                |               |
| 1012347        | 630 | 1012538        | 626 |                |               |
| 1012348        | 626 | 1012539        | 627 |                |               |
| 1012349        | 626 | 1012541        | 627 |                |               |
| 1012350        | 919 | 1012545        | 628 |                |               |
| 1012351        | 919 | 1012547        | 628 |                |               |
| 1012352        | 919 | 1012548        | 630 |                |               |
| 1012353        | 919 | 1012550        | 630 |                |               |
| 1012354        | 732 | 1012551        | 631 |                |               |
| 1012363        | 111 | 1012553        | 631 |                |               |

SIGHT EASY  
1008730

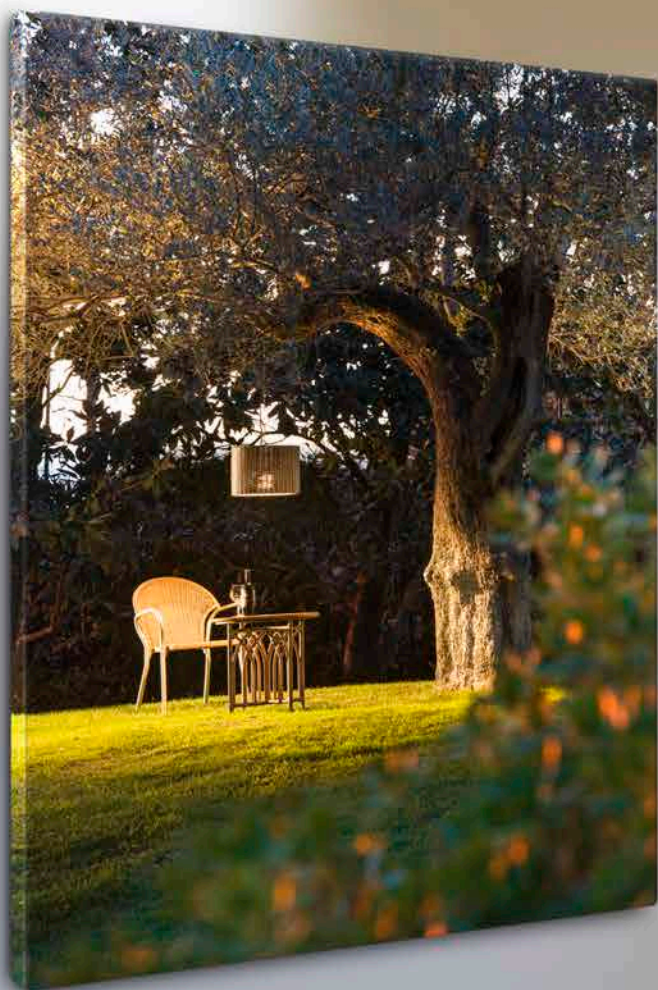



**1-PHASE**

|                                                 |          |
|-------------------------------------------------|----------|
| 1-PHASE SYSTEM MOUNTING TRACK                   | 481      |
| 1-PHASE SYSTEM MOUNTING TRACK, ACCESSORIES      | 482, 483 |
| 1-PHASE SYSTEM MOUNTING TRACK, 2 M              | 485      |
| 1-PHASE SYSTEM MOUNTING TRACK, 2 M, ACCESSORIES | 485      |

**3-PHASE**

|                                                                  |          |
|------------------------------------------------------------------|----------|
| EUTRAC® 3-PHASE, SURFACE-MOUNTED TRACK, 2 M                      | 549      |
| EUTRAC® 3-PHASE, SURFACE-MOUNTED TRACK, 2 M, ACCESSORIES         | 550, 551 |
| EUTRAC® 3-PHASE, RECESSED TRACK, 3 M                             | 553      |
| EUTRAC® 3-PHASE, RECESSED TRACK, 3 M, ACCESSORIES                | 553      |
| S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, ON/OFF                    | 537      |
| S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, ON/OFF, ACCESSORIES       | 538, 539 |
| S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI              | 541      |
| S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI, ACCESSORIES | 542, 543 |
| S-TRACK 3-PHASE RECESSED TRACK, PHASE & DALI                     | 545      |
| S-TRACK 3-PHASE RECESSED TRACK, PHASE & DALI, ACCESSORIES        | 547      |

**48 V SYSTEMS**

|                                                               |          |
|---------------------------------------------------------------|----------|
| 48 V STANDARD SURFACE-MOUNTED TRACK SYSTEM, DALI              | 424      |
| 48 V STANDARD SURFACE-MOUNTED TRACK SYSTEM, DALI, ACCESSORIES | 428, 429 |
| 48 V STANDARD SURFACE-MOUNTED TRACK SYSTEM, CURVED, DALI      | 426      |
| 48 V DEEP SURFACE-MOUNTED TRACK SYSTEM, DALI                  | 430      |
| 48 V DEEP SURFACE-MOUNTED TRACK SYSTEM, DALI, ACCESSORIES     | 432, 433 |
| 48 V RECESSED TRACK SYSTEM, DALI                              | 434      |
| 48 V RECESSED TRACK SYSTEM, DALI, ACCESSORIES                 | 436, 437 |

**A**

|                                |     |
|--------------------------------|-----|
| ABRIDOR 100 POLE               | 725 |
| ABRIDOR 60 POLE                | 725 |
| ABRIDOR HYBRID 100 POLE        | 724 |
| ABRIDOR HYBRID 60 POLE         | 724 |
| ABRIDOR HYBRID WL              | 843 |
| ABRIDOR SENSOR WL              | 843 |
| ABRIDOR WL                     | 843 |
| ADEGAN FL, FLAT SOLAR          | 641 |
| ADEGAN FL, SOLAR               | 641 |
| ADI EL                         | 866 |
| AINOS CW                       | 858 |
| AINOS CW, SQUARE               | 859 |
| AINOS CW, SENSOR               | 859 |
| AINOS CW, SENSOR, SQUARE       | 859 |
| AINOS SLIDE WL, ROUND, PHASE   | 775 |
| AINOS SLIDE WL, ROUND, SENSOR  | 775 |
| AINOS SLIDE WL, SQUARE, PHASE  | 774 |
| AINOS SLIDE WL, SQUARE, SENSOR | 775 |
| AKALO D83 EL                   | 115 |
| ALEGRIA 75 POLE, TRIAC         | 645 |
| ALEGRIA WL, TRIAC              | 773 |
| ALPA CONE 100 POLE, E27        | 709 |
| ALPA MUSHROOM 45 POLE, E27     | 709 |
| ALPA MUSHROOM 75 POLE, E27     | 709 |
| ALTRA DICE CL, QPAR51          | 151 |

|                                       |                         |
|---------------------------------------|-------------------------|
| ALTRA DICE CW, DOUBLE, QPAR51         | 151, 385                |
| ALTRA DICE TRACK SINGLE-PHASE, QPAR51 | 529                     |
| ANGOLUX SENSOR WL                     | 835                     |
| ANGOLUX WL                            | 835                     |
| APONI 120 POLE, PHASE                 | 711                     |
| APONI 90 POLE, PHASE                  | 710                     |
| ARLINA 130 WL                         | 317                     |
| ARLINA 60 WL                          | 317                     |
| ARROCK ARC POLE, QPAR51               | 694                     |
| ARROCK GRANITE 40 POLE, SQUARE, E27   | 694                     |
| ARROCK GRANITE 70 POLE, SQUARE, E27   | 694                     |
| ARROCK SLOT POLE, QPAR51              | 695                     |
| ARROCK STONE 50 POLE                  | 695                     |
| ARROCK STONE 75 POLE                  | 695                     |
| ASMARA LV, QR-C51                     | 475                     |
| ASSO 300 WL, PHASE                    | 348, 349                |
| ASTINA STEEL WL, QPAR51               | 834                     |
| ASTINA WL, QPAR51                     | 834                     |
| ASTO TUBE SINGLE-PHASE, GU10          | 523                     |
| ASTO TUBE SINGLE-PHASE, PD, GU10      | 523                     |
| ASTO TUBE CL, SINGLE, GU10            | 149                     |
| ASTO TUBE CW, DOUBLE, GU10            | 381                     |
| ASTO TUBE CW, GU10                    | 381                     |
| ASTO TUBE CW, QUADRUPLE, GU10         | 381                     |
| ASTO TUBE CW, SINGLE, GU10            | 381                     |
| ASTO TUBE CW, TRIPLE, GU10            | 381                     |
| ASTO TUBE DECORATIVE REFLECTOR        | 149, 247, 331, 381, 523 |
| ASTO TUBE PD, DOUBLE, GU 10           | 247                     |
| ASTO TUBE PD, GU 10                   | 247                     |
| ASTO TUBE PD, QUADRUPLE, GU 10        | 247                     |
| ASTO TUBE PD, SINGLE, GU 10           | 247                     |
| ASTO TUBE PD, TRIPLE, GU 10           | 247                     |
| ASTO TUBE WL, SINGLE, GU10            | 331                     |
| ASTO TUBE WL, UP/DOWN, GU10           | 331                     |

**ACCESSORIES**

|                                              |     |
|----------------------------------------------|-----|
| 3-PIN IP68 CONNECTION BOX                    | 919 |
| 3-PIN IP68 Y CONNECTION BOX                  | 919 |
| 48V SYSTEM ROUND COVER PLATE R80 MM          | 919 |
| 48V SYSTEM SQUARE COVER PLATE 86 MM x 86 MM  | 919 |
| 5-PIN CONNECTION BOX, DALI                   | 919 |
| 5-PIN IP68 CONNECTION BOX                    | 919 |
| BOX RELAY DALI                               | 909 |
| CEILING OUTLET DIMMER ZIGBEE 3.0             | 909 |
| CONTROLLER DALI, DT8 5 CHANNEL               | 917 |
| CONTROLLER LED STRIP CCT / RGBW              | 910 |
| CONVERTER DALI -> PHASE DIM                  | 908 |
| DALI INTERFACE 1-10V + ON/OFF                | 908 |
| DALI INTERFACE PUSH DIMM / DALI PCU TW G2    | 909 |
| EMERGENCY LIGHT FEATURE DALI 2               | 917 |
| FITU CABLE CLAMP                             | 918 |
| FITU CEILING HOOK                            | 918 |
| GU10 FITTING                                 | 918 |
| GU10 LED CONNECTION BOX WITH BASE, MAX. 10 W | 918 |
| LED DRIVER 10W   180-270MA PHASE             | 914 |
| LED DRIVER 10W   500-700MA PHASE             | 914 |
| LED DRIVER 10W   350MA ROUND                 | 913 |
| LED DRIVER 15W   100-700MA DALI              | 915 |
| LED DRIVER 15W   200-350MA PHASE             | 915 |
| LED DRIVER 15W   700MA ROUND                 | 913 |
| LED DRIVER 20 W   350MA                      | 913 |
| LED DRIVER 20W   350-500MA PHASE             | 915 |
| LED DRIVER 20W   350MA PHASE                 | 914 |
| LED DRIVER 20W   350MA/500MA PHASE           | 914 |
| LED DRIVER 21W   150-500MA                   | 913 |

|                                                                      |          |
|----------------------------------------------------------------------|----------|
| LED DRIVER 21W   500MA STRAIN RELIEF INCLUDED                        | 914      |
| LED DRIVER 23W   100-700MA DALI                                      | 916      |
| LED DRIVER 25W   150-700MA DALI DIMMABLE                             | 915      |
| LED DRIVER 30W   500-700MA PHASE                                     | 915      |
| LED DRIVER 36W   100-900MA DALI                                      | 916      |
| LED DRIVER 40W   700-1050MA PHASE                                    | 915      |
| LED DRIVER 44W   700-1050MA                                          | 914      |
| LED DRIVER 4W   350MA                                                | 913      |
| LED DRIVER 4W   700MA                                                | 913      |
| LED DRIVER 53W   650-1400MA DALI                                     | 916      |
| LED POWER SUPPLY 100W   24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF | 912      |
| LED POWER SUPPLY 100W   24V DC STRAIN RELIEF INCLUDED                | 911      |
| LED POWER SUPPLY 12V   24W, ROUND                                    | 910      |
| LED POWER SUPPLY 12V AC   50VA CONVENTIONAL                          | 908      |
| LED POWER SUPPLY 150W   24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF | 912      |
| LED POWER SUPPLY 150W   24V DC STRAIN RELIEF INCLUDED                | 911      |
| LED POWER SUPPLY 24V   24W                                           | 910      |
| LED POWER SUPPLY 24V   25W, ROUND                                    | 911      |
| LED POWER SUPPLY 24V   36W                                           | 910      |
| LED POWER SUPPLY 24V   60W                                           | 910      |
| LED POWER SUPPLY 250W   24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF | 912      |
| LED POWER SUPPLY 250W   24V DC STRAIN RELIEF INCLUDED                | 911      |
| LED POWER SUPPLY 25W   24V                                           | 911      |
| LED POWER SUPPLY 30W   24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF  | 912      |
| LED POWER SUPPLY 30W   24V DC STRAIN RELIEF INCLUDED                 | 911      |
| POWER ADAPTER 100W   24V DC                                          | 912      |
| POWER ADAPTER 50W   24V                                              | 912      |
| REMOTE CONTROL ZIGBEE, CCT/RGBW                                      | 917      |
| SLVconnect® BOX RELAY ZIGBEE 3.0                                     | 909      |
| SLVconnect® DIN DIMMER ZIGBEE 3.0                                    | 909      |
| SLVconnect® G2 DIMMER BOX ZIGBEE 3.0                                 | 909      |
| SLVconnect® WHITE 5-BUTTON WIRELESS SWITCH ZIGBEE 3.0                | 910      |
| STANDARD STRAIN RELIEF                                               | 917      |
| STRAIN RELIEF                                                        | 916      |
| TENSEO 12V AC   105VA CONVENTIONAL                                   | 908      |
| TENSEO 12V AC   210VA CONVENTIONAL                                   | 908      |
| TENSEO 12V AC   50VA CONVENTIONAL                                    | 908      |
| TEXTILE CABLE 10 M                                                   | 918      |
| THROUGH-WIRABLE STRAIN RELIEF                                        | 916, 917 |

**B**

|                                 |     |
|---------------------------------|-----|
| BASKET WL, E27                  | 353 |
| BATTEN 120 CW                   | 395 |
| BATTEN 60 CW                    | 395 |
| BIG NAILS 50 POLE, E27          | 712 |
| BIG NAILS 80 POLE, E27          | 712 |
| BIG NAUTILUS SP, ROUND, QPAR51  | 743 |
| BIG PLOT COVER, 2-PACK          | 889 |
| BIG PLOT COVER, 4-PACK          | 889 |
| BIG PLOT MODULE                 | 889 |
| BIG QUAD UP/DOWN WL             | 810 |
| BIG QUAD WL                     | 810 |
| BIG THEO CL                     | 761 |
| BIG THEO CL, QPAR111            | 761 |
| BIG THEO FLOOD WL, UP/DOWN      | 796 |
| BIG THEO UP/DOWN WL, QPAR111    | 796 |
| BIG THEO WL                     | 797 |
| BIG THEO WL, BEAM UP FLOOD DOWN | 795 |
| BIG THEO WL, QPAR111            | 797 |



|                                          |     |
|------------------------------------------|-----|
| BIMA 2.0 SINGLE-PHASE, DOUBLE,<br>QPAR51 | 503 |
| BIMA 2.0 SINGLE-PHASE, SINGLE,<br>QPAR51 | 503 |
| BIMA 2.0 THREE-PHASE, DOUBLE,<br>QPAR51  | 563 |
| BIMA 2.0 THREE-PHASE, SINGLE,<br>QPAR51  | 563 |
| BOOKAT WL                                | 830 |
| BOX WL, UP/DOWN, QT-DE12                 | 846 |
| BOX-L WL                                 | 846 |
| BOX-L WL, E27                            | 846 |
| BRICK DOWNUNDER EL                       | 869 |
| BRICK DOWNUNDER EL, E14                  | 869 |
| BRICK EL, ASYMMETRICAL                   | 868 |
| BRICK EL, SYMMETRICAL                    | 868 |
| BRICK MESH EL                            | 868 |
| BULAN CW, E14                            | 861 |
| BULAN GRID CW, E27                       | 861 |

## C

|                              |     |
|------------------------------|-----|
| C-POL 90 POLE, E27           | 715 |
| CARISO WL, PHASE             | 351 |
| CHROMBO WL, PHASE            | 351 |
| CONCRETE 35 POLE, PHASE      | 670 |
| CONCRETE 55 POLE, PHASE      | 670 |
| CONCRETO EL, CUT             | 865 |
| CONCRETO EL, WING            | 865 |
| CONCRETO FL, ANGULAR, QPAR51 | 671 |
| CONCRETO FL, ROUND, QPAR 51  | 671 |
| CONCRETO L WL                | 785 |
| CONCRETO M WL                | 785 |
| CONE FL, E27                 | 707 |
| COSMIC LV, QR-C51            | 477 |
| COUPA WL                     | 356 |
| CUBE CL, PHASE               | 757 |
| CUBIX FL, QPAR51             | 705 |
| CYFT CW, PHASE               | 377 |
| CYFT DECORATIVE RING         | 377 |
| CYFT DOME CW, PHASE          | 377 |
| CYFT WAVE CW, PHASE          | 376 |
| CYFT WAVE XL CW, PHASE       | 379 |
| CYFT XL CW, PHASE            | 379 |
| CYFT XL DECORATIVE RING      | 379 |

## D

|                                     |          |
|-------------------------------------|----------|
| D-RING M WL, PHASE                  | 783      |
| D-RING S WL, PHASE                  | 783      |
| DASAR® 115 RL, SQUARE, QPAR51       | 882      |
| DASAR® 115 RL, ROUND, QPAR51        | 882      |
| DASAR® 1200 EL, DALI                | 873      |
| DASAR® 215 RL, SQUARE, QPAR111      | 885      |
| DASAR® 215 RL, ROUND, QPAR111       | 885      |
| DASAR® 255 EL                       | 880, 881 |
| DASAR® 370 EL, ROUND                | 885      |
| DASAR® 600 EL, DALI                 | 873      |
| DASAR® 920 EL                       | 881      |
| DASAR® 920 SP, 230V                 | 745      |
| DASAR® EXACT 116 EL, SQUARE, QPAR51 | 883      |
| DASAR® EXACT 116 EL, ROUND, QPAR51  | 883      |
| DASAR® FLAT 120 EL                  | 880      |
| DASAR® FLAT 80 EL                   | 880      |
| DASAR® L RL, ASYM, SQUARE, DALI     | 876      |
| DASAR® L RL, ASYM, ROUND, DALI      | 876      |
| DASAR® L RL, SQUARE, DALI           | 875      |
| DASAR® L RL, ROUND, DALI            | 875      |
| DASAR® M RL, SQUARE, DALI           | 875      |
| DASAR® M RL, ROUND, DALI            | 874      |
| DASAR® PROJECTOR SP, 12/24V         | 745      |
| DASAR® S RL, ANGULAR                | 874      |
| DASAR® S RL, ROUND                  | 874      |
| DASAR® XL RL, SQUARE, DALI          | 877      |

|                                                    |          |
|----------------------------------------------------|----------|
| DASAR® XL RL, ROUND, DALI                          | 876      |
| DASAR® XL, RL, ASYM, ROUND, DALI                   | 877      |
| DASAR® XL, RL, ASYM, SQUARE, DALI                  | 877      |
| DECONA 30 CL, PHASE                                | 160      |
| DECONA 30 CL, SENSOR                               | 160, 161 |
| DECONA 42 CL, PHASE                                | 161, 162 |
| DECONA 42 CL, SENSOR                               | 161, 162 |
| DECONA SUSPENSION KIT, 1.50 M                      | 163      |
| DECONA MOUNTING FRAME 310 MM                       | 162      |
| DECONA MOUNTING FRAME 430 MM                       | 163      |
| DELWA WL                                           | 840      |
| DENA 30 WL, E14                                    | 353      |
| DIO FLEX PLATE WL                                  | 359      |
| DIO FLEX PLATE WL QPAR51                           | 359      |
| DIRETO 60 WL, PHASE                                | 353      |
| DISPLAY ADL 50 QPAR51                              | 361      |
| DL 126 EL                                          | 105      |
| DOLIX OUT EL, SQUARE, QPAR51                       | 115      |
| DOLIX OUT EL, ROUND, QPAR51                        | 114      |
| DORISA 30 WL                                       | 320      |
| DORISA 50 WL                                       | 320      |
| DOWNLIGHT VARIO 220 22 830/840<br>WH ML            | 102      |
| DOWNLIGHT VARIO 220 22 830/840<br>WH ML PIR        | 103      |
| DOWNLIGHT VARIO 290 28 830/840<br>WH ML            | 103      |
| DOWNLIGHT VARIO 290 28 830/840<br>WH ML PIR        | 103      |
| DOWNUNDER OUT L EL                                 | 867      |
| DOWNUNDER OUT M EL                                 | 867      |
| DOWNUNDER OUT S EL                                 | 867      |
| DOWNUNDER OUT WL, SQUARE                           | 841      |
| DOWNUNDER OUT WL, ROUND                            | 841      |
| DOWNUNDER PUR 150 EL                               | 121      |
| DOWNUNDER PUR 80 EL                                | 120      |
| DURNO LV                                           | 477      |
| DYSKO SINGLE-PHASE, PD, PHASE                      | 513      |
| DYSKO SINGLE-PHASE, PHASE                          | 513      |
| DYSKO 48V, DALI, DEEP &<br>RECESSED TRACK          | 441      |
| DYSKO 48V, DALI, STANDARD<br>SURFACE MOUNTED TRACK | 441      |
| DYSKO 48V, PD, DALI                                | 441      |
| DYSKO CW, DOUBLE, PHASE                            | 289      |
| DYSKO CW, SINGLE, PHASE                            | 289      |
| DYSKO CW, SWITCH, SINGLE, PHASE                    | 289      |
| DYSKO DL, ROUND, PHASE                             | 57       |
| DYSKO PD, PHASE                                    | 57, 221  |

## E

|                                                        |     |
|--------------------------------------------------------|-----|
| ENOLA® 2.0 M SINGLE-PHASE, PD,<br>SINGLE, GU10, QPAR51 | 501 |
| ENOLA® 2.0 M SINGLE-PHASE, SINGLE,<br>GU10, QPAR51     | 501 |
| ENOLA® 2.0 M THREE-PHASE, PD,<br>SINGLE, GU10, QPAR51  | 565 |
| ENOLA® 2.0 M THREE-PHASE,<br>SINGLE, GU10, QPAR51      | 565 |
| ENOLA® 2.0 M CL, QUAD., GU10,<br>QPAR51, LONG          | 143 |
| ENOLA® 2.0 M CL, SINGLE, GU10, QPAR51                  | 140 |
| ENOLA® 2.0 M CL, SIX., GU10, QPAR51,<br>LONG           | 143 |
| ENOLA® 2.0 M CL, TRIPLE, GU10,<br>QPAR51, LONG         | 141 |
| ENOLA® 2.0 M CL. DOUBLE, GU10,<br>QPAR51               | 141 |
| ENOLA® 2.0 M CL. DOUBLE, GU10,<br>QPAR51, LONG         | 141 |
| ENOLA® 2.0 M CW, SINGLE, GU10,<br>QPAR51, ROUND        | 326 |

|                                                                       |     |
|-----------------------------------------------------------------------|-----|
| ENOLA® 2.0 M CW, SINGLE, GU10,<br>QPAR51, SQUARED                     | 326 |
| ENOLA® 2.0 M PD, SINGLE, GU10,<br>QPAR51                              | 245 |
| ENOLA® 2.0 M PD, SIX., LONG, GU10,<br>QPAR51                          | 245 |
| ENOLA® 2.0 M RL, DOUBLE, GU10,<br>QPAR51                              | 109 |
| ENOLA® 2.0 M RL, SINGLE, GU10,<br>QPAR51                              | 109 |
| ENOLA® 2.0 M WL, DOUBLE, GU10,<br>QPAR51                              | 327 |
| ENOLA® 2.0 M WL, SINGLE, GU10,<br>QPAR51                              | 327 |
| ENOLA® 2.0 S SINGLE-PHASE, PD,<br>SINGLE, GU10 MINI, PAR11            | 500 |
| ENOLA® 2.0 S SINGLE-PHASE,<br>SINGLE, GU10 MINI, PAR11                | 500 |
| ENOLA® 2.0 S THREE-PHASE, PD,<br>SINGLE, GU10 MINI, PAR11             | 564 |
| ENOLA® 2.0 S THREE-PHASE, SINGLE,<br>GU10 MINI, PAR11                 | 564 |
| ENOLA® 2.0 S CL, DOUBLE,<br>GU10 MINI, PAR11                          | 138 |
| ENOLA® 2.0 S CL, DOUBLE,<br>GU10 MINI, PAR11, LONG                    | 139 |
| ENOLA® 2.0 S CL, TRIPLE,<br>GU10 MINI, PAR11, LONG                    | 139 |
| ENOLA® 2.0 S CW, SINGLE,<br>GU10 MINI, PAR11, ROUND                   | 323 |
| ENOLA® 2.0 S CW, SINGLE,<br>GU10 MINI, PAR11, SQUARED                 | 323 |
| ENOLA® 2.0 S DECORATIVE RING<br>108, 139, 245, 325, 500, 564          |     |
| ENOLA® 2.0 S PD, SINGLE,<br>GU10 MINI, PAR11                          | 244 |
| ENOLA® 2.0 S RL, DOUBLE,<br>GU10 MINI, PAR11                          | 108 |
| ENOLA® 2.0 S RL, SINGLE,<br>GU10 MINI, PAR11                          | 108 |
| ENOLA® 2.0 S WL, DOUBLE,<br>GU10 MINI, PAR11                          | 325 |
| ENOLA® 2.0 S WL, SINGLE,<br>GU10 MINI, PAR11                          | 325 |
| ENOLA® 2.0 S WL, SINGLE,<br>GU10 MINI, PAR11, BEDSIDE, USBC           | 323 |
| ENOLA® 2.0/BIMA 2.0 M DECORATIVE RING<br>109, 143, 245, 327, 501, 565 |     |
| ENOLA® M LENS 19°                                                     | 821 |
| ENOLA® OCULUS CL                                                      | 758 |
| ENOLA® OCULUS WL, SINGLE                                              | 813 |
| ENOLA® OCULUS WL, UP/DOWN                                             | 813 |
| ENOLA® ROUND L CL                                                     | 759 |
| ENOLA® ROUND L WL, SINGLE                                             | 816 |
| ENOLA® ROUND L WL, UP/DOWN                                            | 817 |
| ENOLA® ROUND M CL                                                     | 759 |
| ENOLA® ROUND M WL, SINGLE                                             | 816 |
| ENOLA® ROUND M WL, UP/DOWN                                            | 817 |
| ENOLA® ROUND S CL                                                     | 759 |
| ENOLA® ROUND S WL, SINGLE                                             | 816 |
| ENOLA® ROUND S WL, UP/DOWN                                            | 817 |
| ENOLA® S/M/L REFLECTOR                                                | 821 |
| ENOLA® SQUARE L WL, SINGLE                                            | 818 |
| ENOLA® SQUARE L WL, UP/DOWN                                           | 819 |
| ENOLA® SQUARE M CL                                                    | 761 |
| ENOLA® SQUARE M WL, SINGLE                                            | 818 |
| ENOLA® SQUARE M WL, UP/DOWN                                           | 819 |
| ENOLA® SQUARE S CL                                                    | 760 |
| ENOLA® SQUARE S WL, SINGLE                                            | 818 |
| ENOLA® SQUARE S WL, UP/DOWN                                           | 819 |
| ESKINA D DISPLAY, PHASE                                               | 851 |
| ESKINA FRAME 125 POLE, DOUBLE                                         | 677 |

|                                                                    |               |          |                                                             |          |                                                                  |          |
|--------------------------------------------------------------------|---------------|----------|-------------------------------------------------------------|----------|------------------------------------------------------------------|----------|
| ESKINA FRAME 175 POLE, DOUBLE _____                                | 677           | <b>G</b> | GALEN 120 SP _____                                          | 738      | GRIP! S 48V, DALI, STANDARD TRACK,<br>Ø 3,0 CM _____             | 460, 461 |
| ESKINA FRAME 45 POLE, SINGLE _____                                 | 676           |          | GALEN 60 SP _____                                           | 738      | GRIP! S 48V, PD, DALI, Ø 3,0 CM _____                            | 463      |
| ESKINA FRAME 75 POLE, DOUBLE _____                                 | 676           |          | GALEN PRO 120 WL, DALI _____                                | 739      | GRIP! S CL, DOUBLE, PHASE, Ø 3,0 CM _____                        | 144      |
| ESKINA FRAME CL, SINGLE, PHASE _____                               | 757           |          | GALEN PRO 60 WL, DALI _____                                 | 739      | GRIP! S CL, SINGLE, PHASE, Ø 3,0 CM _____                        | 144      |
| ESKINA FRAME WL _____                                              | 829           |          | GLENOS® 2.0 CL, 1,2 M, DALI, UGR22 _____                    | 167      | GRIP! S DECORATIVE RING + SPACER _____                           | 509      |
| ESKINA FRAME WL, DOUBLE _____                                      | 829           |          | GLENOS® 2.0 PD, 1,2 M, DALI, UGR19 _____                    | 248      | GRIP! S EL, PHASE, Ø 3,0 CM _____                                | 111      |
| ESKINA SPOT CW, PHASE _____                                        | 855           |          | GLENOS® 2.0 PD, 1,5 M, DALI, UGR19 _____                    | 249      | GRIP! S MINI 48V, DALI, SHORT,<br>STANDARD TRACK, Ø 3,0 CM _____ | 463      |
| ESKINA SPOT SENSOR CW, PHASE _____                                 | 855           |          | GLENOS® 2.0 WL, 1,5M, DALI, UGR22 _____                     | 320      | GRIP! S PD, PHASE, Ø 3,0 CM _____                                | 195      |
| EURO CUBE 2 L THREE-PHASE, DALI _____                              | 587           |          | GLENOS® PRO CL, 1,2 M, DALI, UGR19 _____                    | 167      | GRIP! S WL, Ø 3,0 CM, ON/OFF SWITCH _____                        | 328      |
| EURO CUBE 2 L THREE-PHASE, PHASE _____                             | 587           |          | GLENOS® PRO PD, 1,2 M, DALI, UGR16 _____                    | 249      | GRIP! S WL, PHASE, UP/DOWN,<br>Ø 3,0 CM _____                    | 328      |
| EURO CUBE 2 L HONEYCOMB _____                                      | 587           |          | GLENOS® PRO PD, 1,5M, DALI, UGR16 _____                     | 249      | GRIP! S WL, RECESSED, Ø 3,0 CM _____                             | 111      |
| EURO CUBE 2 L OVAL FILTER _____                                    | 587           |          | GLENOS® PRO RL, 1,2 M, DALI, UGR19 _____                    | 87       |                                                                  |          |
| EURO CUBE 2 M THREE-PHASE, DALI _____                              | 586           |          | GLOO PURE 27 POLE, E27 _____                                | 702      | <b>H</b>                                                         |          |
| EURO CUBE 2 M THREE-PHASE, PHASE _____                             | 586           |          | GLOO PURE 44 POLE, E27 _____                                | 702      | H-POL 30 POLE _____                                              | 720      |
| EURO CUBE 2 M HONEYCOMB _____                                      | 586           |          | GLOO PURE 70 POLE, E27 _____                                | 702      | H-POL 60 POLE _____                                              | 720      |
| EURO CUBE 2 M OVAL FILTER _____                                    | 586           |          | GLOO PURE WL, E27 _____                                     | 848      | H-POL TWIN 60 POLE _____                                         | 720      |
| EURO SPOT TRACK SINGLE-PHASE,<br>QPAR51 _____                      | 529           |          | GRAFIT 30 POLE, E27 _____                                   | 683      | HAVEN 25 SINGLE-PHASE, E27 _____                                 | 487      |
| EURO SPOT TRACK THREE-PHASE,<br>QPAR111 _____                      | 603           |          | GRAFIT 30 POLE, ROUND, E27 _____                            | 681      | HAVEN 25 THREE-PHASE, E27 _____                                  | 555      |
| EURO SPOT TRACK THREE-PHASE,<br>QPAR51 _____                       | 603           |          | GRAFIT 60 POLE, E27 _____                                   | 683      | HAVEN 35 PD, E27 _____                                           | 175      |
|                                                                    |               |          | GRAFIT 60 POLE, ROUND, E27 _____                            | 681      | HAVEN 50 PD, E27 _____                                           | 175      |
| <b>F</b>                                                           |               |          | GRAFIT 90 POLE, E27 _____                                   | 683      | HELIA 30 PD, PHASE _____                                         | 264      |
| F-POL 85 POLE, E27 _____                                           | 715           |          | GRAFIT 90 POLE, ROUND, E27 _____                            | 681      | HELIA 40 PD, PHASE _____                                         | 265      |
| F-POL WL, E27 _____                                                | 849           |          | GRAFIT WL, ANGULAR, E27 _____                               | 823      | HELIA 50 TRACK SINGLE-PHASE _____                                | 527      |
| FENDA 30 CM, ROUND _____                                           | 155, 261, 413 |          | GRAFIT WL, SQUARE, SENSOR, E27 _____                        | 823      | HELIA 50 TRACK THREE-PHASE _____                                 | 605      |
| FENDA 45 CM, ROUND _____                                           | 155, 413      |          | GRAFIT WL, ROUND, E27 _____                                 | 823      | HELIA CW, DOUBLE _____                                           | 857      |
| FENDA 70 CM, ROUND _____                                           | 155, 413      |          | GRAFIT WL, ROUND, SENSOR, E27 _____                         | 822      | HELIA CW, SINGLE _____                                           | 857      |
| FENDA CEILING ROSETTE, E27 _____                                   | 155           |          | GRAZIA 60   RECESSED PROFILE _____                          | 632      | HELIA PRO L WL, SINGLE, DALI P1 _____                            | 804      |
| FENDA FL, E27 _____                                                | 411, 413      |          | GRAZIA 60   RECESSED PROFILE,<br>ACCESSORIES _____          | 632      | HELIA PRO L WL, SINGLE, DALI P2 _____                            | 805      |
| FENDA GLASS SHADE 12.5 CM, ROUND _____                             | 261           |          | GRID CUBE FL _____                                          | 639      | HELIA PRO L WL, UP/DOWN, DALI P1 _____                           | 804      |
| FENDA Ø 45 CM, ROUND _____                                         | 261           |          | GRID SUN FL _____                                           | 639      | HELIA PRO L WL, UP/DOWN, DALI P2 _____                           | 805      |
| FENDA Ø 70 CM, ROUND _____                                         | 261           |          | GRIP! FLAT SINGLE-PHASE, PD, PHASE _____                    | 511      | HELIA PRO S WL, SINGLE, DALI P1 _____                            | 802      |
| FENDA PD, E27 _____                                                | 260           |          | GRIP! FLAT SINGLE-PHASE, PHASE _____                        | 511      | HELIA PRO S WL, SINGLE, DALI P2 _____                            | 803      |
| FENDA TL, E27 _____                                                | 411           |          | GRIP! FLAT 48V, DALI _____                                  | 459      | HELIA PRO S WL, UP/DOWN, DALI P1 _____                           | 802      |
| FENDA WL BASE, E27 _____                                           | 355           |          | GRIP! FLAT 48V, PD, DALI _____                              | 459      | HELIA PRO S WL, UP/DOWN, DALI P2 _____                           | 803      |
| FERA 25 CL _____                                                   | 159           |          | GRIP! FLAT CL, PHASE _____                                  | 329      | HELIA SLIM POLE, DOUBLE _____                                    | 747      |
| FERA 25 CL, DALI _____                                             | 159           |          | GRIP! FLAT PD, PHASE _____                                  | 255      | HELIA SLIM POLE, SINGLE _____                                    | 747      |
| FITU PD, E27 _____                                                 | 258           |          | GRIP! L SINGLE-PHASE, PD, QPAR51,<br>Ø 5,7 CM _____         | 507      | HELIA SPOT L SP, SINGLE, PHASE _____                             | 740      |
| FITU PD, E27 RIBBED _____                                          | 258           |          | GRIP! L SINGLE-PHASE, QPAR51,<br>Ø 5,7 CM _____             | 507      | HELIA SPOT S SP, SINGLE _____                                    | 740      |
| FITU PD, E27 STONE _____                                           | 258           |          | GRIP! L THREE-PHASE, PD, QPAR51,<br>Ø 5,7 CM _____          | 569      | HORN 1 EL, SINGLE, QPAR51 _____                                  | 92       |
| FITU WALL BRACKET _____                                            | 354           |          | GRIP! L THREE-PHASE, QPAR51,<br>Ø 5,7 CM _____              | 569      | HORN DL, DOUBLE, QPAR51 _____                                    | 91       |
| FIX-IT! 48V, DALI, ROUND, DEEP<br>SURFACE MOUNTED TRACK _____      | 455           |          | GRIP! L CL, DOUBLE, QPAR51,<br>Ø 5,7 CM _____               | 147      | HORN DL, GU10, BLOWER DOOR TESTED _____                          | 93       |
| FIX-IT! 48V, DALI, ROUND, STANDARD<br>SURFACE MOUNTED TRACK _____  | 454, 455      |          | GRIP! L CL, QPAR51, Ø 5,7 CM _____                          | 147      | HORN DL, SINGLE, ASYMMETRICAL,<br>QPAR51 _____                   | 91       |
| FIX-IT! 48V, DALI, SQUARE, DEEP<br>SURFACE MOUNTED TRACK _____     | 457           |          | GRIP! L CL, SINGLE, QPAR51,<br>Ø 5,7 CM _____               | 147      | HORN DL, SINGLE, QPAR51 _____                                    | 91, 92   |
| FIX-IT! 48V, DALI, SQUARE, STANDARD<br>SURFACE MOUNTED TRACK _____ | 456, 457      |          | GRIP! L DECORATIVE RING _____                               | 509, 569 | HORN MAGNA EL _____                                              | 93       |
| FLAC BEAM SP _____                                                 | 741           |          | GRIP! L WL, UP OR DOWN, 1X QPAR51,<br>Ø 5,7 CM _____        | 329      | HORN MINI EL _____                                               | 90       |
| FLATT 100 POLE _____                                               | 675           |          | GRIP! L WL, UP/DOWN, 2X QPAR51,<br>Ø 5,7 CM _____           | 329      | HORN T EL, QPAR111 _____                                         | 93       |
| FLATT 65 POLE _____                                                | 675           |          | GRIP! M SINGLE-PHASE, PHASE,<br>Ø 4,3 CM _____              | 506      | <b>I</b>                                                         |          |
| FLATT II 36 POLE, PHASE _____                                      | 674           |          | GRIP! M THREE-PHASE, DALI,<br>Ø 4,3 CM _____                | 566      | I-RING 65 POLE _____                                             | 653      |
| FLATT II 62 POLE, PHASE _____                                      | 675           |          | GRIP! M THREE-PHASE, PHASE,<br>Ø 4,3 CM _____               | 567      | I-RING WL _____                                                  | 783      |
| FLATT II WL, UP/DOWN, PHASE _____                                  | 793           |          | GRIP! M 48V, DALI, DEEP & RECESSED<br>TRACK, Ø 4,3 CM _____ | 465      | IN-LINE 22 48V, DARKLIGHT REFLECTOR,<br>DALI _____               | 450      |
| FLATT II WL, UP/DOWN, SENSOR _____                                 | 793           |          | GRIP! M CL, DOUBLE, PHASE, Ø 4,3 CM _____                   | 145      | IN-LINE 22 48V, OPAL, DALI _____                                 | 450      |
| FLATT SENSOR WL _____                                              | 794           |          | GRIP! M CL, SINGLE, PHASE, Ø 4,3 CM _____                   | 145      | IN-LINE 24 48V, MOVE, DARKLIGHT<br>REFLECTOR, DALI _____         | 453      |
| FLATT WL _____                                                     | 794           |          | GRIP! M DECORATIVE RING _____                               | 145, 567 | IN-LINE 44 48V, DARKLIGHT REFLECTOR,<br>DALI _____               | 451      |
| FORCHINI 50 PD, E27 _____                                          | 268           |          | GRIP! M DECORATIVE RING + SPACER _____                      | 509      | IN-LINE 44 48V, OPAL, DALI _____                                 | 451      |
| FORCHINI 70 PD, E27 _____                                          | 269           |          | GRIP! M EL, PHASE, Ø 4,3 CM _____                           | 111      | IN-LINE 46 48V, MOVE, DARKLIGHT<br>REFLECTOR, DALI _____         | 453      |
| FORCHINI M 40 PD, E27 _____                                        | 269           |          | GRIP! S SINGLE-PHASE, PHASE, Ø 3,0 CM _____                 | 505      | IPERI 50 POLE _____                                              | 726      |
| FORCHINI M 40 TRACK<br>SINGLE-PHASE, E27 _____                     | 489           |          | GRIP! S 48V, DALI, DEEP & RECESSED<br>TRACK, Ø 3,0 CM _____ | 461      | IPERI WL _____                                                   | 849      |
| FORCHINI M 40 TRACK<br>THREE-PHASE, PD, E27 _____                  | 599           |          |                                                             |          | <b>K</b>                                                         |          |
| FORCHINI M 50 PD, E27 _____                                        | 269           |          |                                                             |          | KADUX DL, DOUBLE, DALI _____                                     | 14       |
| FRAME BASIC RL _____                                               | 116, 117      |          |                                                             |          | KADUX DL, DOUBLE, PHASE _____                                    | 15       |
| FRAME BASIC RL, HV _____                                           | 116           |          |                                                             |          | KADUX DL, SINGLE, DALI _____                                     | 14       |
| FRAME CURVE EL _____                                               | 117           |          |                                                             |          | KADUX DL, SINGLE, PHASE _____                                    | 15       |

|                                                    |     |
|----------------------------------------------------|-----|
| KADUX DL, TRIPLE, PHASE                            | 15  |
| KADUX EL, DOUBLE, QPAR111                          | 17  |
| KADUX EL, DOUBLE, QPAR51                           | 16  |
| KADUX EL, SINGLE, QPAR111                          | 17  |
| KADUX EL, SINGLE, QPAR51                           | 16  |
| KADUX EL, TRIPLE, QPAR51                           | 16  |
| KALU 2.0 SINGLE-PHASE, PHASE                       | 519 |
| KALU 2.0 THREE-PHASE, DALI                         | 589 |
| KALU 2.0 THREE-PHASE, PHASE                        | 589 |
| KALU 2.0 48V, DALI, STANDARD SURFACE MOUNTED TRACK | 439 |
| KALU 2.0 CW, DOUBLE LONG, PHASE                    | 374 |
| KALU 2.0 CW, SINGLE, PHASE                         | 374 |
| KALU 2.0 CW, TRIPLE LONG, PHASE                    | 374 |
| KALU CW, DOUBLE, QPAR111                           | 383 |
| KALU CW, QPAR111                                   | 383 |
| KALU CW, QUAD, QPAR111                             | 383 |
| KALU CW, SINGLE, QPAR111                           | 383 |
| KALU CW, TRIPLE, QPAR111                           | 383 |
| KALU TRACK SINGLE-PHASE, QPAR111                   | 519 |
| KALU TRACK THREE-PHASE, QPAR111                    | 589 |
| KARDAMOD CL, DOUBLE, SQUARE, QPAR111               | 153 |
| KARDAMOD CL, SINGLE, SQUARE, QPAR111               | 153 |
| KARPO 30 CW, SINGLE                                | 357 |
| KARPO 30 EL                                        | 110 |
| KARPO 30 WL, SINGLE                                | 357 |
| KARPO FL                                           | 415 |
| KARPO GOOSE WL                                     | 356 |
| KARPO MAGN CW, SINGLE, PHASE                       | 356 |
| KARPO TL                                           | 415 |
| KARPO WL                                           | 357 |
| KENKUA SPOT WL, E27                                | 355 |
| KINI EL, PHASE                                     | 115 |

## L

|                                             |          |
|---------------------------------------------|----------|
| L-LINE 120 WL                               | 321      |
| L-LINE 60 WL                                | 321      |
| L-LINE OUT 30 FL, HORIZONTAL                | 696      |
| L-LINE OUT 50 POLE                          | 697      |
| L-LINE OUT 60 FL, HORIZONTAL                | 697      |
| L-LINE OUT 80 POLE                          | 697      |
| L-LINE OUT WL                               | 847      |
| LALU® SET SINGLE-PHASE, PD, LED BASE, PHASE | 491, 493 |
| LALU® SET 48V, PD, LED BASE, DALI           | 466, 467 |
| LALU® SET PD, E27 BASE                      | 216, 217 |
| LALU® SET PD, LED BASE, PHASE               | 218, 219 |
| LALU® SET PD, LED BASE, PHASE, RECESSED     | 220, 221 |
| LED SPIKE SP                                | 749      |
| LED SPOT SP                                 | 853      |
| LED STRIP COB   M                           | 622      |
| LED STRIP COB   S                           | 616      |
| LED STRIP COB   XS                          | 614      |
| LED STRIP COB IP67   S                      | 620      |
| LED STRIP COB IP67 RGBW   S                 | 620      |
| LED STRIP COB IP67 TW   S                   | 620      |
| LED STRIP COB RGBW   S                      | 618      |
| LED STRIP COB TW   S                        | 618      |
| LED STRIP PROFILE CORNER   M                | 630      |
| LED STRIP PROFILE CORNER   S                | 628      |
| LED STRIP PROFILE RECESSED   M              | 630      |
| LED STRIP PROFILE RECESSED   S              | 628      |
| LED STRIP PROFILE RECESSED PLASTER   XS     | 626      |
| LED STRIP PROFILE RECESSED TILES   XS       | 626      |
| LED STRIP PROFILE SURFACE   M               | 630      |
| LED STRIP PROFILE SURFACE   S               | 628      |
| LED STRIP PROFILE SURFACE   XS              | 626      |
| LED STRIP PROFILE SURFACE FLAT   M          | 630      |

|                                              |               |
|----------------------------------------------|---------------|
| LED STRIP PROFILE SURFACE FLAT   S           | 628           |
| SMD LED STRIP   M                            | 623           |
| SMD LED STRIP   S                            | 617           |
| SMD LED STRIP   XS                           | 615           |
| IP67 SMD LED STRIP   S                       | 621           |
| RGBW SMD LED STRIP   S                       | 619, 621      |
| TW SMD LED STRIP   S                         | 619, 621      |
| LED STRIP, ACCESSORIES                       | 624, 625      |
| LED STRIP PROFILES, ACCESSORIES              | 618-625       |
| LID I 45 POLE, SINGLE, PHASE                 | 654           |
| LID I 75 POLE, DOUBLE, PHASE                 | 654           |
| LID I WL, DOUBLE, PHASE                      | 781           |
| LID I WL, SINGLE, PHASE                      | 780           |
| LID II WL, SINGLE, PHASE                     | 781           |
| LID II WL. UP/DOWN, PHASE                    | 781           |
| LIGHT EYE® 150 SINGLE-PHASE, PD, QPAR111     | 515           |
| LIGHT EYE® 150 SINGLE-PHASE, QPAR111         | 514           |
| LIGHT EYE® 150 THREE-PHASE, PD, QPAR111      | 601           |
| LIGHT EYE® 150 THREE-PHASE, QPAR111          | 601           |
| LIGHT EYE® 150 DECORATIVE RING Ø 13,6 CM     | 243, 515, 601 |
| LIGHT EYE® 150 PD, QPAR111                   | 243           |
| LIGHT EYE® 2.0 SINGLE-PHASE, PD, Ø 7,5 CM    | 517           |
| LIGHT EYE® 2.0 SINGLE-PHASE, PHASE, Ø 7,5 CM | 517           |
| LIGHT EYE® 2.0 48V, DALI, Ø 7,5 CM           | 439           |
| LIGHT EYE® 2.0 48V, PD, DALI, Ø 7,5 CM       | 439           |
| LIGHT EYE® 90 SINGLE-PHASE, PD, QPAR51       | 515           |
| LIGHT EYE® 90 SINGLE-PHASE, QPAR51           | 514           |
| LIGHT EYE® 90 THREE-PHASE, PD, QPAR51        | 600           |
| LIGHT EYE® 90 DECORATIVE RING Ø 5,7 CM       | 243, 515, 601 |
| LIGHT EYE® 90 PD, QPAR51                     | 243           |
| LINIUS 120 PD, DALI, CANOPY                  | 235           |
| LINIUS 120 PD, DALI, RECESSED                | 235           |
| LINIUS 120 PD, PHASE, CANOPY                 | 234           |
| LINIUS 120 PD, PHASE, RECESSED               | 235           |
| LINIUS 150 PD, DALI, CANOPY                  | 237           |
| LINIUS 150 PD, DALI, RECESSED                | 237           |
| LINIUS 150 PD, PHASE, CANOPY                 | 236           |
| LINIUS 150 PD, PHASE, RECESSED               | 237           |
| LIPSY® 2.0 30 CW, DOME                       | 390           |
| LIPSY® 2.0 30 CW, DRUM                       | 392           |
| LIPSY® 2.0 30 CW, HF, DOME                   | 390           |
| LIPSY® 2.0 30 CW, HF, DRUM                   | 392           |
| LIPSY® 2.0 40 CW, 3H EM, DOME                | 391           |
| LIPSY® 2.0 40 CW, 3H EM, DRUM                | 393           |
| LIPSY® 2.0 40 CW, DOME                       | 391           |
| LIPSY® 2.0 40 CW, DRUM                       | 393           |
| LIPSY® 2.0 40 CW, HF, DOME                   | 391           |
| LIPSY® 2.0 40 CW, HF, DRUM                   | 393           |
| LISENNE 40 POLE, E27                         | 708           |
| LISENNE 70 POLE, E27                         | 708           |
| LOGS 40 POLE                                 | 679           |
| LOGS 70 POLE                                 | 679           |
| LOGS IN L WL, DALI                           | 345           |
| LOGS IN L WL, PHASE                          | 345           |
| LOGS IN WL                                   | 344           |
| LOGS IN WL, PHASE                            | 344           |
| LOGS WL                                      | 847           |
| LYGANT WL, DOUBLE                            | 279           |
| LYGANT WL, SINGLE                            | 279           |

## LIGHT BULB

|             |     |
|-------------|-----|
| LED A60 E27 | 900 |
|-------------|-----|

|                                                             |          |
|-------------------------------------------------------------|----------|
| LED A60 E27, HIGH EFFICIENCY                                | 900      |
| LED A60 E27, MIRRORHEAD CHROM                               | 903      |
| LED A60 GU10                                                | 897      |
| LED C35 E14                                                 | 896, 897 |
| LED C35 E14, GOLD CURLY FILAMENT                            | 896      |
| LED G45 E14, GOLD CURLY FILAMENT                            | 896      |
| LED GLOBE 125 E27                                           | 903      |
| LED GLOBE 125 E27, BLACK SMOKEY                             | 901      |
| LED GLOBE 125 E27, CRESCENT SLANTING SMOKEY                 | 901      |
| LED GLOBE 125 E27, HALF MOON                                | 903      |
| LED GLOBE 125 E27, SLANTING TOP SMOKEY                      | 901      |
| LED GLOBE 125 E27, SOFT CURVE SMOKEY                        | 900      |
| LED GLOBE 150 E27, BLACK SMOKEY                             | 901      |
| LED GLOBE 150 E27, TWISTED SMOKEY GREY                      | 900      |
| LED GLOBE 200 E27, BLACK SMOKEY                             | 901      |
| LED GLOBE 300 E27, BLACK SMOKEY                             | 901      |
| LED QPAR 111 GU10                                           | 899      |
| LED QPAR111 GU10                                            | 899      |
| LED QPAR51 GU10                                             | 898      |
| LED QR51 GU5.3                                              | 897      |
| LED QT-DE12 R7S, 118 MM                                     | 896      |
| LED QT-DE12 R7S, 78 MM                                      | 896      |
| LED QT14 G9                                                 | 896      |
| LED ST58 E27                                                | 903      |
| LED ST64 E27, GOLD                                          | 902      |
| LED ST64 E27, GOLD CURLY FILAMENT                           | 903      |
| LED T32 E27, SLIM TUBE                                      | 902      |
| LED T32 E27, SOFT SPIRAL                                    | 902      |
| LED T32 E27, SOFT TUBE                                      | 902      |
| LED T32 GU10                                                | 897      |
| LED T38 E27                                                 | 902      |
| LED T45 E27                                                 | 902      |
| LED TCR-TSE GX53                                            | 897      |
| LED, PAR11 GU10                                             | 899      |
| SLVconnect® LED A60 SMART E27, RGBW, ZIGBEE 3.0             | 904      |
| SLVconnect® LED A60 SMART E27, ZIGBEE 3.0                   | 904      |
| SLVconnect® LED PAR16 SMART GU10, RGBW, ZIGBEE 3.0          | 904      |
| SLVconnect® LED PAR16 SMART GU10, TUNABLE WHITE, ZIGBEE 3.0 | 904      |
| SLVconnect® LED PAR16 SMART GU10, ZIGBEE 3.0                | 904      |

## M

|                                         |     |
|-----------------------------------------|-----|
| M-POL 30 POLE                           | 667 |
| M-POL 60 POLE                           | 667 |
| M-POL 60 POLE, SOCKET                   | 666 |
| M-POL 90 POLE                           | 667 |
| M-POL COVER                             | 666 |
| M-POL M POLEHEAD                        | 663 |
| M-POL M POLEHEAD, DALI                  | 663 |
| M-POL M POLEHEAD, LOUVER                | 665 |
| M-POL M POLEHEAD, LOUVER, DALI          | 665 |
| M-POL M POLEHEAD, SHADER                | 664 |
| M-POL M POLEHEAD, SHADER, DALI          | 665 |
| M-POL S POLEHEAD                        | 661 |
| M-POL S POLEHEAD 180°, GLARE-FREE       | 660 |
| M-POL S POLEHEAD 180°, GLARE-FREE, DALI | 661 |
| M-POL S POLEHEAD 360°, GLARE-FREE       | 660 |
| M-POL S POLEHEAD 360°, GLARE-FREE, DALI | 660 |
| M-POL S POLEHEAD, DALI                  | 661 |
| M-POL S POLEHEAD, LOUVER                | 662 |
| M-POL S POLEHEAD, LOUVER, DALI          | 663 |
| M-POL S POLEHEAD, SHADER                | 662 |

|                                         |          |                                                   |          |                                       |          |
|-----------------------------------------|----------|---------------------------------------------------|----------|---------------------------------------|----------|
| M-POL S POLEHEAD, SHADER, DALI          | 362      | MOLAT CL, E27                                     | 763      | NOBLO® SPOT THREE-PHASE, PHASE        | 585      |
| MAGANDA WL                              | 319      | MOLAT PD, E27                                     | 707      | NOBLO® SPOT LV, ROPE TRACK            | 477      |
| MAGICO 20 PD, E27                       | 185      | MOLAT WL, E27                                     | 848      | NOTAPO L RL                           | 119      |
| MAGICO 38 PD, E27                       | 185      | MOTUNA CW, PHASE                                  | 163, 375 | NOTAPO S RL                           | 119      |
| MAGICO 55 PD, E27                       | 185      | MOTUNA PD, PHASE                                  | 197      | NUMINOS® GIMBLE L                     | 44       |
| MANA 40 SHADE, ROUND                    | 335      | MYRA CW, SINGLE, QPAR51                           | 853      | NUMINOS® GIMBLE M                     | 42       |
| MANA 40 SHADE, ROUND,<br>ACOUSTIC FELT  | 334      | MYRA DISPLAY WL, CURVED, QPAR51                   | 851      | NUMINOS® GIMBLE S                     | 40       |
| MANA 40 SHADE, ROUND,<br>MOON STRUCTURE | 335      | MYRA SPOT DOUBLE, GU10                            | 727      | NUMINOS® GIMBLE XL                    | 46       |
| MANA 60 SHADE, ROUND                    | 335      | MYRA UP/DOWN WL, QPAR51                           | 839      | NUMINOS® GIMBLE XS                    | 38       |
| MANA 60 SHADE, ROUND,<br>ACOUSTIC FELT  | 334      | MYRA WL, DOUBLE, QPAR51                           | 851      | NUMINOS® L DL                         | 24       |
| MANA 60 SHADE, ROUND,<br>MOON STRUCTURE | 335      | NAUTILUS 10 SP, SQUARE                            | 742      | NUMINOS® L THREE-PHASE, PHASE         | 576      |
| MANA BASE ROUND                         | 334      | NAUTILUS 10 SP, ROUND, QPAR51                     | 743      | NUMINOS® L CL                         | 134      |
| MANA BASE WL, ROUND, PHASE              | 333      | NAUTILUS 10 SPOT SP, LED                          | 744      | NUMINOS® L CL, PHASE                  | 294      |
| MARONA CL, PHASE                        | 163      | NAUTILUS 10 SPOT SP, QPAR51                       | 744      | NUMINOS® L PD, PHASE                  | 190      |
| MECANICA 2.0 TL, LED, CCT               | 414      | NAUTILUS SP, QR-C51                               | 744      | NUMINOS® M DL                         | 22       |
| MEDO® 2.0 SLIM 30 CL, DALI              | 200, 300 | NAUTILUS WL QPAR51                                | 853      | NUMINOS® M THREE-PHASE, PHASE         | 574      |
| MEDO® 2.0 SLIM 30 CL, PHASE             | 198, 298 | <b>N</b>                                          |          | NUMINOS® M CL                         | 132      |
| MEDO® 2.0 SLIM 40 CL, DALI              | 201, 300 | NEW TRIA®                                         | 64       | NUMINOS® M CL, PHASE                  | 292      |
| MEDO® 2.0 SLIM 40 CL, PHASE             | 199, 299 | NEW TRIA® 150 DL, ROUND, QPAR111                  | 86       | NUMINOS® M PD, PHASE                  | 188      |
| MEDO® 2.0 SLIM 60 CL, DALI              | 201, 300 | NEW TRIA® 155 DL, DOUBLE                          | 73       | NUMINOS® MOVE L                       | 34       |
| MEDO® 2.0 SLIM 60 CL, PHASE             | 199, 299 | NEW TRIA® 155 DL, DOUBLE, QPAR51                  | 73       | NUMINOS® MOVE M                       | 32       |
| MEDO® 2.0 SLIM 80 CL, DALI              | 201, 301 | NEW TRIA® 155 RING, DOUBLE, SQUARE                |          | NUMINOS® MOVE S                       | 30       |
| MEDO® 2.0 SLIM 80 CL, PHASE             | 199, 299 | GU10/LED MODULE                                   | 83       | NUMINOS® MOVE XL                      | 36       |
| MEDO® 2.0 SUSPENSION KIT 1.5 M          |          | NEW TRIA® 300 DL, ANGULAR, QPAR111                | 87       | NUMINOS® MOVE XS                      | 28       |
| CENTRAL SUSPENSION KIT                  | 205, 301 | NEW TRIA® 45 DL, ROUND                            | 73       | NUMINOS® S DL                         | 20       |
| MEDO® 2.0 SUSPENSION KIT 3 M            |          | NEW TRIA® 68 DL, DTW, PHASE                       | 62       | NUMINOS® S THREE-PHASE, PHASE         | 572      |
| PARALLEL SUSPENSION KIT                 | 205, 301 | NEW TRIA® 68 DL, PHASE                            | 58, 60   | NUMINOS® S 48V, DALI                  | 444, 448 |
| MEDO® 2.0 SUSPENSION KIT 5 M            |          | NEW TRIA® 68 DL, PHASE, AIRTIGHT                  | 66       | NUMINOS® S CL                         | 130      |
| CENTRAL SUSPENSION KIT                  | 205, 301 | NEW TRIA® 68 DL, QPAR51                           | 68       | NUMINOS® S CW, PHASE                  | 290      |
| MEDO® 30 RL, FRAME                      | 88       | NEW TRIA® 68 RING, ROUND,<br>GU10/LED MODULE      | 77       | NUMINOS® S PD, PHASE                  | 186      |
| MEDO® 40 RL, FRAME                      | 89       | NEW TRIA® 68 RING, ROUND,<br>GU10/LED MODULE      | 76, 77   | NUMINOS® XL DL                        | 26       |
| MEDO® 60 RL, FRAME                      | 89       | NEW TRIA® 68 RING, SQUARE,<br>GU10/LED MODULE     | 77       | NUMINOS® XL THREE-PHASE, PHASE        | 578      |
| MEDO® 90 RL, FRAME                      | 89       | NEW TRIA® 68 RING, SQUARE,<br>GU10/LED MODULE     | 76, 77   | NUMINOS® XL CL                        | 136      |
| MEDO® 2.0 HYVE 40 CL, DALI              | 202, 302 | NEW TRIA® 75 / XL DL, QPAR51                      | 70       | NUMINOS® XL CL, PHASE                 | 296      |
| MEDO® 2.0 HYVE 40 CL, PHASE             | 202, 302 | NEW TRIA® 75 DL, ROUND, PHASE                     | 60       | NUMINOS® XL PD, DALI                  | 192      |
| MEDO® 2.0 HYVE 60 CL, DALI              | 203, 303 | NEW TRIA® 75 RING, ROUND,<br>GU10/LED MODULES     | 79       | NUMINOS® XS DL                        | 18       |
| MEDO® 2.0 HYVE 60 CL, PHASE             | 202, 302 | NEW TRIA® 75 RING, SQUARE,<br>GU10/LED MODULES    | 79       | NUMINOS® XS 48V, DALI                 | 442, 446 |
| MEDO® 2.0 HYVE 80 CL, DALI              | 203, 303 | NEW TRIA® 75 XL RING, ROUND,<br>GU10/LED MODULES  | 79       | NUMINOS® ZOOM M THREE-PHASE           |          |
| MEDO® 2.0 HYVE 80 CL, PHASE             | 203, 303 | NEW TRIA® 75 XL RING, SQUARE,<br>GU10/LED MODULES | 79       | PHASE                                 | 580      |
| MEDO® PRO 30 CW, DALI                   | 210, 307 | NEW TRIA® 95 RING, ROUND,<br>LED MODULES          | 81       | <b>O</b>                              |          |
| MEDO® PRO 30 CW, DALI, UGR<19           | 208, 304 | NEW TRIA® 95 RING, SQUARE,<br>LED MODULES         | 81       | OCCULDAS 13 CL, INDIRECT, PHASE       | 150      |
| MEDO® PRO 30 CW, PHASE                  | 211, 307 | NEW TRIA® DL, DOUBLE, LED MODULE,<br>PHASE        | 83       | OCCULDAS 14 EL, INDIRECT, PHASE       | 107      |
| MEDO® PRO 30 CW, PHASE, UGR<19          | 208, 305 | NEW TRIA® DL, DOUBLE, QPAR111                     | 87       | OCCULDAS 23 CL, INDIRECT, PHASE       | 151      |
| MEDO® PRO 40 CW, DALI                   | 211, 308 | NEW TRIA® DL, LED MODULE, DTW,<br>PHASE           | 75       | OCCULDAS 23 EL, INDIRECT, PHASE       | 107      |
| MEDO® PRO 40 CW, DALI, UGR<19           | 208, 305 | NEW TRIA® DL, LED MODULE, PHASE                   | 75, 81   | OCULUS CL DTW, PVD                    | 148      |
| MEDO® PRO 40 CW, PHASE                  | 211, 308 | NEW TRIA® UNIVERSAL DL, LED MODULE,<br>PHASE      | 75       | OCULUS CL, MOVE, PHASE                | 107      |
| MEDO® PRO 40 CW, PHASE, UGR<19          | 209, 305 | NOBLO® CW, DOUBLE, PHASE                          | 373      | OCULUS CL, PHASE                      | 148      |
| MEDO® PRO 60 CW, DALI                   | 212, 308 | NOBLO® CW, DOUBLE, PHASE, DTW                     | 371      | OCULUS PD DTW, PVD                    | 257      |
| MEDO® PRO 60 CW, DALI, UGR<19           | 209, 306 | NOBLO® CW, SINGLE, PHASE                          | 373      | OCULUS PD, SINGLE, PHASE              | 257      |
| MEDO® PRO 60 CW, PHASE                  | 213, 309 | NOBLO® CW, SINGLE, PHASE, DTW                     | 371      | OCULUS UP/DOWN WL, PHASE              | 337      |
| MEDO® PRO 60 CW, PHASE, UGR<19          | 209, 306 | NOBLO® CW, TRIPLE, PHASE                          | 373      | OCULUS WL UP/DOWN DTW, PVD            | 337      |
| MEDO® PRO 90 CL, DALI                   | 213, 309 | NOBLO® CW, TRIPLE, PHASE, DTW                     | 371      | OCULUS WL, SINGLE, PHASE              | 337      |
| MEDO® PRO 90 CL, DALI, UGR<19           | 210, 306 | NOBLO® SPOT SINGLE-PHASE,<br>PHASE                | 521      | OLYPSO 40 PD, E27                     | 183      |
| MEDO® PRO 90 CL, PHASE                  | 213, 309 | NOBLO® SPOT SINGLE-PHASE,<br>TRIPLE TRACK SET     | 521      | OLYPSO 50 PD, E27                     | 183      |
| MEDO® PRO 90 CL, PHASE, UGR<19          | 210, 307 |                                                   |          | ONE 40 CW, DALI                       | 313      |
| MEDO® RING 60 PD, DALI                  | 206      |                                                   |          | ONE 40 CW, DALI, UP/DOWN              | 311      |
| MEDO® RING 60 PD, PHASE                 | 207      |                                                   |          | ONE 40 CW, PHASE, UP/DOWN             | 310      |
| MEDO® RING 90 PD, DALI                  | 207      |                                                   |          | ONE 60 CW, DALI                       | 313      |
| MEDO® RING 90 PD, PHASE                 | 207      |                                                   |          | ONE 60 CW, DALI, UP/DOWN              | 311      |
| MELAN CW, E27                           | 395      |                                                   |          | ONE 60 CW, PHASE, UP/DOWN             | 311      |
| MERADO FLOOD WL, PHASE                  | 361      |                                                   |          | ONE 60 PD, DALI                       | 229      |
| MERIDIAN BOX WL, E27                    | 827      |                                                   |          | ONE 60 PD, PHASE, UP/DOWN             | 227      |
| MERIDIAN BOX WL, E27, SENSOR            | 827      |                                                   |          | ONE 80 PD, DALI                       | 229      |
| MERIDIAN WL, E27                        | 826      |                                                   |          | ONE 80 PD, DALI, UP/DOWN              | 229      |
| MIBO UP/DOWN WL, QT14                   | 319      |                                                   |          | ONE BOW FL                            | 405      |
| MOBALA EL                               | 121      |                                                   |          | ONE CUBE PD, DALI                     | 225      |
| MOBELA WL, UP/DOWN, PHASE               | 778      |                                                   |          | ONE CUBE UP/DOWN PD, DALI,<br>UP/DOWN | 225      |
| MOLAT 100 POLE, E27                     | 707      |                                                   |          | ONE DOUBLE PD, DALI, UP/DOWN          | 231      |
|                                         |          |                                                   |          | ONE DOUBLE PD, PHASE, UP/DOWN         | 231      |

|                                                              |          |
|--------------------------------------------------------------|----------|
| ONE FELT PLATE, ACOUSTIC FELT,<br>FOR ONE 80/ ONE CUBE _____ | 225, 229 |
| ONE FLAT PD, DALI, TRIPLE _____                              | 223      |
| ONE FLAT PD, PHASE, SINGLE _____                             | 223      |
| ONE LINEAR 100 PD, PHASE, UP/DOWN _____                      | 233      |
| ONE LINEAR 140 PD, PHASE, UP/DOWN _____                      | 233      |
| ONE LINEAR 50 WL, PHASE, UP/DOWN _____                       | 312      |
| ONE LINEAR 70 WL, PHASE, UP/DOWN _____                       | 313      |
| ONE STRAIGHT FL _____                                        | 405      |
| ONE TRIPLE PD, DALI _____                                    | 231      |
| ONE VERTICAL PD, PHASE _____                                 | 224      |
| ORDI II 45 POLE, PHASE _____                                 | 723      |
| ORDI II 70 POLE, PHASE _____                                 | 723      |
| ORDI II 70 POLE, SENSOR _____                                | 723      |
| ORDI II WL, PHASE _____                                      | 845      |
| ORDI II WL, SENSOR _____                                     | 845      |
| ORDI WL _____                                                | 844      |
| ORDI WL, SENSOR _____                                        | 844      |
| OSSA 180 WL, QT-DE12 _____                                   | 349      |
| OSSA 300 WL, QT-DE12 _____                                   | 349      |
| OTOS GLAS POLE, E27 _____                                    | 705      |
| OUT-BEAM UP/ FLOOD DOWN WL,<br>UP/FLOOD DOWN _____           | 847      |
| OVAL 14 WL, UP/DOWN _____                                    | 784      |
| OVAL 18 WL, UP/DOWN _____                                    | 784      |
| OVALISK 100 POLE _____                                       | 701      |
| OVALISK 75 POLE _____                                        | 701      |
| OVALISK CL _____                                             | 763      |
| OVALISK SENSOR WL _____                                      | 831      |
| OVALISK WL _____                                             | 831      |
| OVANA 30 CL, LED, PHASE, CCT _____                           | 165      |
| OVANA 30 CL, LED, ZIGBEE, TW _____                           | 164      |
| OVANA 44 CL, LED, PHASE, CCT _____                           | 165      |
| OVANA 44 CL, LED, ZIGBEE, TW _____                           | 165      |
| OVANA 44 PD, LED, PHASE, CCT _____                           | 197      |

## P

|                                              |     |
|----------------------------------------------|-----|
| PANEL 60 CL, ROUND, DALI _____               | 169 |
| PANEL 60 CL, ROUND, PHASE _____              | 169 |
| PANEL 60 PD, ROUND, DALI _____               | 253 |
| PANEL 60 PD, ROUND, PHASE _____              | 253 |
| PANEL TRACK SINGLE-PHASE, SQUARE _____       | 527 |
| PANEL TRACK SINGLE-PHASE, ROUND _____        | 527 |
| PANTILO 20 PD, E27 _____                     | 240 |
| PANTILO 28 PD, E27 _____                     | 240 |
| PANTILO CONVEX 29 PD, E27 _____              | 241 |
| PANTILO CONVEX 40 PD, E27 _____              | 241 |
| PANTILO OVAL PD, E27 _____                   | 240 |
| PANTILO ROPE 19 TL, E27 _____                | 409 |
| PANTILO ROPE 19 CW, E27 _____                | 375 |
| PANTILO ROPE 19 PD, E27 _____                | 239 |
| PANTILO ROPE 20 PD, E27 _____                | 239 |
| PANTILO ROPE 27 CW, E27 _____                | 375 |
| PANTILO ROPE 27 FL, E27 _____                | 409 |
| PANTILO ROPE 27 PD, E27 _____                | 239 |
| PANTILO ROPE WL, G9 _____                    | 322 |
| PANTILO SLIM TL, E27 _____                   | 408 |
| PANTILO TL, E27 _____                        | 409 |
| PARA 380 PD E27 _____                        | 273 |
| PARA CONE 14 SINGLE-PHASE, GU10 _____        | 525 |
| PARA CONE 14 SINGLE-PHASE, PD,<br>GU10 _____ | 525 |
| PARA CONE 14 THREE-PHASE, GU10 _____         | 596 |
| PARA CONE 14 THREE-PHASE, PD,<br>GU10 _____  | 597 |
| PARA CONE 20 PD, E27 _____                   | 265 |
| PARA CONE 30 PD, E27 _____                   | 265 |
| PARA CONE GL SINGLE-PHASE, GU10 _____        | 525 |
| PARA CONE GL THREE-PHASE, GU10 _____         | 597 |
| PARA CONE GL PD, GU10 _____                  | 597 |
| PARA CONE SH, E27 _____                      | 273 |
| PARA DOME SHADE _____                        | 273 |

|                                                             |          |
|-------------------------------------------------------------|----------|
| PATTA-F EL, SQUARE, PHASE _____                             | 123      |
| PATTA-F EL, ROUND, PHASE _____                              | 123      |
| PATTA-I DL, ANGULAR, PHASE _____                            | 122      |
| PATTA-I EL, SQUARE, PHASE _____                             | 123      |
| PATTA-I EL, ROUND, PHASE _____                              | 122      |
| PEMA® WL _____                                              | 832, 833 |
| PEMA® WL, E27 _____                                         | 833      |
| PHELIA 10 PD, E27 _____                                     | 267      |
| PHELIA 25 PD, E27 _____                                     | 267      |
| PHELIA 30 PD, E27 _____                                     | 267      |
| PHELIA FL, E27 _____                                        | 415      |
| PHELIA WL, QPAR51 _____                                     | 361      |
| PHOTONI 45 POLE, E27 _____                                  | 649      |
| PHOTONI 75 POLE, E27 _____                                  | 649      |
| PHOTONI CL, E27 _____                                       | 754      |
| PHOTONI CYL 45 POLE, E27 _____                              | 648      |
| PHOTONI CYL 75 POLE, E27 _____                              | 649      |
| PHOTONI CYL CL, E27 _____                                   | 754      |
| PHOTONI CYL WL, E27 _____                                   | 779      |
| PHOTONI WL, E27 _____                                       | 779      |
| PHOTONIA POLE, E27 _____                                    | 705      |
| PHOTONIA WL, E27 _____                                      | 848      |
| PIKA DL, ROUND, QPAR51, PIVOTING _____                      | 105      |
| PIKA DL, ROUND, QPAR51, FIXED _____                         | 105      |
| PL-BEAM PRO M LAMP SHIELD _____                             | 737      |
| PL-BEAM PRO M SP, DALI _____                                | 735      |
| PL-BEAM PRO M SP, DALI, ASYM _____                          | 735      |
| PL-BEAM PRO M HONEYCOMB GRID _____                          | 737      |
| PL-BEAM PRO S LAMP SHIELD _____                             | 737      |
| PL-BEAM PRO S SP, DALI _____                                | 734      |
| PL-BEAM PRO S SP, DALI, ASYM _____                          | 734      |
| PL-BEAM PRO S HONEYCOMB GRID _____                          | 737      |
| PL-BEAM PRO S/M MAST CLAMP _____                            | 737      |
| PL-BEAM WALL BRACKET _____                                  | 737      |
| PLASTRA 101 WL, E14 _____                                   | 341      |
| PLASTRA 104 CL, E27 _____                                   | 159      |
| PLASTRA 104 WL, QT14 _____                                  | 341      |
| PLASTRA 105 CL, E27 _____                                   | 158      |
| PLASTRA CL, PHASE _____                                     | 158      |
| PLASTRA CL, QPAR51 _____                                    | 158      |
| PLASTRA RL, SQUARE, QPAR51 _____                            | 113      |
| PLASTRA RL, ROUND, QPAR51 _____                             | 113      |
| PLASTRA WL, CUBE, QT14 _____                                | 338      |
| PLASTRA WL, CURVE, QT-DE12 _____                            | 341      |
| PLASTRA WL, E14 _____                                       | 339      |
| PLASTRA WL, ANGULAR _____                                   | 340      |
| PLASTRA WL, SEMICIRCULAR _____                              | 339      |
| PLASTRA WL, QPAR51 _____                                    | 340      |
| PLASTRA WL, RECTANGULAR,<br>QT-DE12 _____                   | 339      |
| PLASTRA WL, ROUND SHIELD _____                              | 340      |
| POWER TRAIL-LITE® EL, SQUARE _____                          | 887      |
| POWER TRAIL-LITE® EL, ROUND _____                           | 887      |
| PROFIL SETS   S SURFACE-MOUNTED<br>PROFILE + DIFFUSER _____ | 613      |
| PURI 2.0 SINGLE-PHASE,<br>TRIPLE TRACK SET, QPAR51 _____    | 498      |
| PURI 2.0 CONE SINGLE-PHASE,<br>PD, QPAR51 _____             | 497      |
| PURI 2.0 CONE SINGLE-PHASE, QPAR51 _____                    | 495      |
| PURI 2.0 CONE THREE-PHASE, PD,<br>QPAR51 _____              | 559      |
| PURI 2.0 CONE THREE-PHASE, QPAR51 _____                     | 557      |
| PURI 2.0 CONE CW, DOUBLE ASYM.,<br>QPAR51 _____             | 365      |
| PURI 2.0 CONE CW, DOUBLE LONG,<br>QPAR51 _____              | 364      |
| PURI 2.0 CONE CW, QPAR51 _____                              | 364      |
| PURI 2.0 CONE CW, QUADRUPLE LONG,<br>QPAR51 _____           | 365      |
| PURI 2.0 CONE CW, SWITCH, SINGLE,<br>QPAR51 _____           | 365      |

|                                                   |               |
|---------------------------------------------------|---------------|
| PURI 2.0 CONE CW, SINGLE, QPAR51 _____            | 365           |
| PURI 2.0 CONE CW, TRIPLE LONG,<br>QPAR51 _____    | 365           |
| PURI 2.0 CONE CW, TRIPLE ROUND,<br>QPAR51 _____   | 365           |
| PURI 2.0 CONE SHADE _____                         | 369, 499, 561 |
| PURI 2.0 DOME SINGLE-PHASE,<br>QPAR51 _____       | 495, 497      |
| PURI 2.0 DOME THREE-PHASE, PD,<br>QPAR51 _____    | 559           |
| PURI 2.0 DOME THREE-PHASE, QPAR51 _____           | 557           |
| PURI 2.0 DOME CW, DOUBLE ASYM.,<br>QPAR51 _____   | 367           |
| PURI 2.0 DOME CW, DOUBLE LONG,<br>QPAR51 _____    | 366           |
| PURI 2.0 DOME CW, QPAR51 _____                    | 366           |
| PURI 2.0 DOME CW, QUADRUPLE LONG,<br>QPAR51 _____ | 367           |
| PURI 2.0 DOME CW, SWITCH, SINGLE,<br>QPAR51 _____ | 367           |
| PURI 2.0 DOME CW, SINGLE, QPAR51 _____            | 367           |
| PURI 2.0 DOME CW, TRIPLE LONG,<br>QPAR51 _____    | 367           |
| PURI 2.0 DOME CW, TRIPLE ROUND,<br>QPAR51 _____   | 367           |
| PURI 2.0 DOME SHADE _____                         | 369, 499, 561 |
| PURI 2.0 TUBE SINGLE-PHASE, PD,<br>QPAR51 _____   | 497           |
| PURI 2.0 TUBE SINGLE-PHASE, QPAR51 _____          | 495           |
| PURI 2.0 TUBE THREE-PHASE, PD,<br>QPAR51 _____    | 559           |
| PURI 2.0 TUBE THREE-PHASE, QPAR51 _____           | 557           |
| PURI 2.0 TUBE CW, DOUBLE ASYM.,<br>QPAR51 _____   | 363           |
| PURI 2.0 TUBE CW, DOUBLE LONG,<br>QPAR51 _____    | 362           |
| PURI 2.0 TUBE CW, QPAR51 _____                    | 362           |
| PURI 2.0 TUBE CW, QUADRUPLE LONG,<br>QPAR51 _____ | 363           |
| PURI 2.0 TUBE CW, SWITCH, SINGLE,<br>QPAR51 _____ | 363           |
| PURI 2.0 TUBE CW, SINGLE, QPAR51 _____            | 363           |
| PURI 2.0 TUBE CW, TRIPLE LONG,<br>QPAR51 _____    | 363           |
| PURI 2.0 TUBE CW, TRIPLE ROUND,<br>QPAR51 _____   | 363           |
| PURI 2.0 TUBE SHADE _____                         | 369, 499, 561 |

## Q

|                                               |     |
|-----------------------------------------------|-----|
| Q-LINE® WL _____                              | 321 |
| Q-RING WL, PHASE _____                        | 782 |
| Q-RING WL, SENSOR _____                       | 782 |
| QUAD FRAME 14 WL _____                        | 346 |
| QUAD FRAME 19 WL _____                        | 346 |
| QUAD POLE _____                               | 726 |
| QUAD PRO 60 POLE, DALI _____                  | 655 |
| QUAD PRO 90 POLE, DALI _____                  | 655 |
| QUAD UP/DOWN 15 WL _____                      | 811 |
| QUAD WL _____                                 | 811 |
| QUADRASYL 75 POLE, TCR-TSE _____              | 726 |
| QUADRASYL PRO 70 POLE, DALI _____             | 645 |
| QUADRASYL PRO 90 POLE, DALI _____             | 645 |
| QUADRASYL PRO WL, SINGLE,<br>DALI, ASYM _____ | 777 |
| QUADRASYL PRO WL, UP/DOWN, DALI _____         | 777 |
| QUADRASYL WL, TCR-TSE _____                   | 849 |
| QUADRULO CL _____                             | 825 |
| QUADRULO FL _____                             | 685 |
| QUADRULO SENSOR WL, E27 _____                 | 824 |
| QUADRULO WL _____                             | 824 |
| QUADRULO WL, E27 _____                        | 825 |
| QUIMERA SINGLE-PHASE, PD _____                | 489 |



|                   |     |
|-------------------|-----|
| QUIMERA PD, PHASE | 177 |
| QUIMERA TL        | 403 |
| QUIMERA WL, PHASE | 279 |

**R**

|                                |          |
|--------------------------------|----------|
| R-CUBE 35 POLE, PHASE          | 651      |
| R-CUBE 75 POLE, PHASE          | 651      |
| R-CUBE WL, PHASE               | 778      |
| RASTERLYS 70 POLE, PHASE       | 673      |
| RASTERLYS WL, PHASE            | 787      |
| RASTERLYS WL, UP/DOWN, PHASE   | 787      |
| ROCCI 200 EL, ANGULAR          | 891      |
| ROCCI 200 EL, ROUND            | 891      |
| ROCCI EL, SQUARE               | 890      |
| ROCCI EL, ROUND                | 890      |
| ROTOBALL 25 FL, E27            | 703      |
| ROTOBALL 25 PD, E27            | 271      |
| ROTOBALL 40 FL, E27            | 703      |
| ROTOBALL 40 PD, E27            | 271      |
| ROTOBALL 50 FL, E27            | 703      |
| ROTOBALL 50 PD, E27            | 271      |
| ROX ACRYL 30 POLE, E27         | 713      |
| ROX ACRYL 60 POLE, E27         | 713      |
| ROX ACRYL 90 POLE, E27         | 713      |
| ROX CL, GX53                   | 765      |
| ROX CL, QPAR111                | 765      |
| ROX WL, UP/DOWN, QPAR111       | 840      |
| RUSTY® 40 POLE                 | 692      |
| RUSTY® 40 POLE, E27            | 692, 693 |
| RUSTY® 70 POLE                 | 692      |
| RUSTY® 70 POLE, E27            | 693      |
| RUSTY® CONE 24 FL, E14         | 689      |
| RUSTY® CONE 40 POLE, E27       | 689      |
| RUSTY® CONE 70 POLE, E27       | 689      |
| RUSTY® PATHLIGHT 40 POLE       | 688      |
| RUSTY® PATHLIGHT 70 POLE       | 688      |
| RUSTY® PATHLIGHT POLE, TCR-TSE | 688      |
| RUSTY® SLOT 50 POLE            | 686      |
| RUSTY® SLOT 50 POLE, E27       | 687      |
| RUSTY® SLOT 80 POLE            | 687      |
| RUSTY® SLOT 80 POLE, E27       | 687      |
| RUSTY® UP/DOWN WL, SQUARE      | 812      |
| RUSTY® UP/DOWN WL, ROUND       | 812      |

**S**

|                                 |     |
|---------------------------------|-----|
| S-CUBE 35 POLE, PHASE           | 650 |
| S-CUBE 75 POLE, PHASE           | 651 |
| S-CUBE CW, PHASE                | 778 |
| S-TUBE 32 POLE, GU10            | 646 |
| S-TUBE 75 POLE, GU10            | 646 |
| S-TUBE CW                       | 791 |
| SAMRINA SP, SINGLE, GU10        | 741 |
| SEDO 14 WL                      | 316 |
| SEDO 21 WL                      | 317 |
| SEJERO 90 POLE, E27             | 643 |
| SEJERO PD, E27                  | 755 |
| SEJERO WL, E27                  | 771 |
| SENDER 2.0 12 CW, ROUND, DALI   | 388 |
| SENDER 2.0 12 CW, ROUND, PHASE  | 386 |
| SENDER 2.0 12 CW, SQUARE, DALI  | 388 |
| SENDER 2.0 12 CW, SQUARE, PHASE | 386 |
| SENDER 2.0 12 RL, ROUND, DALI   | 100 |
| SENDER 2.0 12 RL, ROUND, PHASE  | 96  |
| SENDER 2.0 12 RL, SQUARE, DALI  | 98  |
| SENDER 2.0 12 RL, SQUARE, PHASE | 94  |
| SENDER 2.0 18 CW, ROUND, DALI   | 389 |
| SENDER 2.0 18 CW, ROUND, PHASE  | 387 |
| SENDER 2.0 18 CW, SQUARE, DALI  | 389 |
| SENDER 2.0 18 CW, SQUARE, PHASE | 387 |
| SENDER 2.0 18 RL, ROUND, DALI   | 101 |
| SENDER 2.0 18 RL, ROUND, PHASE  | 97  |
| SENDER 2.0 18 RL, SQUARE, DALI  | 99  |

|                                         |     |
|-----------------------------------------|-----|
| SENDER 2.0 18 RL, SQUARE, PHASE         | 95  |
| SENDER 2.0 24 CW, ROUND, DALI           | 389 |
| SENDER 2.0 24 CW, ROUND, PHASE          | 387 |
| SENDER 2.0 24 CW, SQUARE, DALI          | 389 |
| SENDER 2.0 24 CW, SQUARE, PHASE         | 387 |
| SENDER 2.0 24 RL, ROUND, DALI           | 101 |
| SENDER 2.0 24 RL, ROUND, PHASE          | 97  |
| SENDER 2.0 24 RL, SQUARE, DALI          | 99  |
| SENDER 2.0 24 RL, SQUARE, PHASE         | 95  |
| SENDER 2.0 30 CW, ROUND, DALI           | 389 |
| SENDER 2.0 30 CW, ROUND, PHASE          | 387 |
| SENDER 2.0 30 CW, SQUARE, DALI          | 389 |
| SENDER 2.0 30 CW, SQUARE, PHASE         | 387 |
| SENDER 2.0 30 RL, ROUND, DALI           | 101 |
| SENDER 2.0 30 RL, ROUND, PHASE          | 97  |
| SENDER 2.0 30 RL, SQUARE, DALI          | 99  |
| SENDER 2.0 30 RL, SQUARE, PHASE         | 95  |
| SHELL 30 WL, PHASE                      | 347 |
| SIGHT EASY THREE-PHASE                  | 593 |
| SIGHT EASY THREE-PHASE, DALI            | 593 |
| SIGHT EVO 1200 THREE-PHASE, SINGLE      | 590 |
| SIGHT EVO 1200 THREE-PHASE, SINGLE DALI | 591 |
| SIGHT EVO 600 THREE-PHASE, DOUBLE       | 590 |
| SIGHT EVO 600 THREE-PHASE, DOUBLE DALI  | 591 |
| SIGHT EVO 600 THREE-PHASE, SINGLE       | 590 |
| SIGHT EVO 600 THREE-PHASE, SINGLE DALI  | 591 |
| SIGHT MOVE THREE-PHASE                  | 595 |
| SIGHT MOVE THREE-PHASE, DALI            | 595 |
| SIGHT PANEL THREE-PHASE                 | 592 |
| SIGHT PANEL THREE-PHASE, DALI           | 592 |
| SIGHT TRACK THREE-PHASE                 | 594 |
| SIGHT TRACK THREE-PHASE, DALI           | 594 |
| SIMA CW, SQUARE, PHASE                  | 394 |
| SIMA CW, SQUARE, SENSOR                 | 394 |
| SITRA 360 CW, TCR-TSE                   | 856 |
| SITRA 360 POLE, TCR-TSE                 | 727 |
| SITRA 360 SPIKE SP, DOUBLE, TCR-TSE     | 751 |
| SITRA 360 SPIKE SP, SINGLE, TCR-TSE     | 751 |
| SITRA CL, TCR-TSE                       | 765 |
| SITRA CUBE WL, TCR-TSE                  | 809 |
| SITRA L WL, UP/DOWN, ANGULAR            | 809 |
| SITRA M WL, UP/DOWN                     | 809 |
| SITRA S WL, SINGLE                      | 807 |
| SITRA S WL, UP/DOWN                     | 807 |
| SITRA WL, TCR-TSE                       | 839 |
| SITRA WL, UP/DOWN, TCR-TSE              | 839 |
| SLOTBOX 40 POLE                         | 721 |
| SLOTBOX 70 POLE                         | 721 |
| SLOTS 45 POLE                           | 719 |
| SLOTS 65 POLE                           | 719 |
| SLVconnect® OVANA 44 PD, LED,           |     |
| ZIGBEE, TW                              | 197 |
| SMALL PLOT COVER, 2-PACK                | 888 |
| SMALL PLOT COVER, 4-PACK                | 888 |
| SMALL PLOT MODULE                       | 888 |
| SOLASTO EL, SQUARE                      | 893 |
| SOLASTO EL, ROUND                       | 893 |
| SOLID CUBE WL, QT14                     | 354 |
| SOMNILA FLEX WL, LEFT                   | 358 |
| SOMNILA FLEX WL, RIGHT                  | 359 |
| SOMNILA SPOT WL, LEFT                   | 358 |
| SOMNILA SPOT WL, RIGHT                  | 358 |
| SOPRANA CL, E27                         | 157 |
| SPOT 79 CW, QPAR51                      | 385 |
| SQUARE 30 POLE, E27                     | 717 |
| SQUARE 60 POLE, E27                     | 717 |
| SQUARE 90 POLE, E27                     | 717 |
| SQUARE TURN WL, G9                      | 850 |
| SQUARE WL, E27                          | 824 |

|                               |     |
|-------------------------------|-----|
| STRIP SETS   S STRIP + DRIVER | 612 |
| SUN 20 CL, E27                | 126 |
| SUN 20 PD, E27                | 182 |
| SUN 30 CL, E27                | 126 |
| SUN 30 PD, E27                | 182 |
| SUN 40 PD, E27                | 182 |
| SUN FL, G9                    | 407 |
| SUN MIRROR WL, QUAD           | 281 |
| SUN MIRROR WL, TRIPLE         | 281 |
| SUN TL, G9                    | 407 |
| SUN WL, DOUBLE, G9, ANGULAR   | 287 |
| SUN WL, G9, ANGULAR           | 286 |
| SUN WL, G9, CURVED            | 287 |
| SUN WL, UP, G9, ANGULAR       | 287 |
| SYNA GARDEN SP                | 733 |
| SYNA PLANT SP                 | 733 |
| SYNA SHADE SP, GU10           | 732 |
| SYNA SP                       | 733 |
| SYNA WIDE SP                  | 732 |

**T**

|                                      |          |
|--------------------------------------|----------|
| T-TUBE 70 POLE, GU10, DOUBLE         | 647      |
| T-TUBE 70 POLE, GU10, DOUBLE, SENSOR | 647      |
| T-TUBE 70 POLE, GU10, SINGLE         | 647      |
| T-TUBE 70 POLE, GU10, SINGLE, SENSOR | 646      |
| T-TUBE WL GU10, DOUBLE               | 789      |
| T-TUBE WL GU10, DOUBLE, SENSOR       | 789      |
| T-TUBE WL GU10, SINGLE               | 789      |
| T-TUBE WL GU10, SINGLE, SENSOR       | 788      |
| TAHA II 45 POLE, PHASE               | 698      |
| TAHA II 70 POLE, SENSOR              | 699      |
| TAHA II 70 POLE, PHASE               | 698      |
| TAHA II 90 POLE, SENSOR              | 699      |
| TAHA II 90 POLE, PHASE               | 698      |
| TAHA II WL, PHASE                    | 830      |
| TAHA II WL, SENSOR                   | 830      |
| TELESKOP LV, QR-C51                  | 475      |
| TENORA CL, E27                       | 157      |
| TERANG 200 CW                        | 861      |
| THEO BRACKET CW                      | 856      |
| THEO BRACKET SP                      | 749      |
| THEO PATHLIGHT 73 POLE, DOUBLE       | 729      |
| THEO PRO L WL, SINGLE, DALI P1       | 799      |
| THEO PRO L WL, SINGLE, DALI P2       | 801      |
| THEO PRO L WL, UP/DOWN, DALI P1      | 799      |
| THEO PRO L WL, UP/DOWN, DALI P2      | 801      |
| THEO PRO S WL, SINGLE, DALI P1       | 798      |
| THEO PRO S WL, SINGLE, DALI P2       | 798      |
| THEO PRO S WL, UP/DOWN, DALI P1      | 798      |
| THEO PRO S WL, UP/DOWN, DALI P2      | 799      |
| THEO UP/DOWN WL, QPAR51              | 354, 795 |
| THEO WL, QPAR51                      | 796      |
| TODAY PRO DISPLAY                    | 850      |
| TRAIL-LITE® 60 EL                    | 886      |
| TRAIL-LITE® 60 POWER SUPPLY          | 887      |
| TRAIL-LITE® 60 SET EL                | 886      |
| TRAIL-LITE® 60 SINGLE EL             | 886      |
| TRILEDO CL CL, DOUBLE, SQUARE        | 128      |
| TRILEDO CL, DOUBLE, SQUARE, QPAR51   | 129      |
| TRILEDO CL, SINGLE, SQUARE           | 128      |
| TRILEDO CL, SINGLE, SQUARE, QPAR51   | 129      |
| TRILEDO CL, SINGLE, ROUND            | 128      |
| TRILEDO CL, SINGLE, ROUND, QPAR51    | 129      |
| TRUKKO 60 WL                         | 315      |
| TRUKKO 80 WL, ROUND                  | 315      |
| TRUKKO 90 WL                         | 315      |

|                        |     |
|------------------------|-----|
| TRUKKO WL, ROUND       | 314 |
| TRUKKO WL, RECTANGULAR | 314 |
| TRUST 30 POLE          | 711 |
| TRUST 60 POLE          | 711 |

## U

|                                                                          |     |
|--------------------------------------------------------------------------|-----|
| UNIVERSAL 68 DL, PHASE                                                   | 64  |
| UNIVERSAL DOWNLIGHT COVER,<br>PIVOTING, SQUARE, IP20                     | 13  |
| UNIVERSAL DOWNLIGHT COVER,<br>PIVOTING, ROUND, IP20                      | 13  |
| UNIVERSAL DOWNLIGHT COVER,<br>FIXED, SQUARE, IP65                        | 13  |
| UNIVERSAL DOWNLIGHT COVER,<br>FIXED, ROUND, IP65                         | 13  |
| UNIVERSAL DOWNLIGHT FIX RL,<br>LED, PHASE, IP65                          | 12  |
| UNIVERSAL DOWNLIGHT MOVE RL,<br>LED, PHASE                               | 12  |
| UNIVERSAL DOWNLIGHT SLIM RL,<br>PHASE                                    | 12  |
| UNIVERSAL TRACKSPOT THREE-PHASE L,<br>24/28/32/36W 927/930/940 24°...60° | 583 |
| UNIVERSAL TRACKSPOT THREE-PHASE M,<br>12/16/20/24W 927/930/940 24°...60° | 583 |

## V

|                              |                    |
|------------------------------|--------------------|
| VAP SLIM 30 POLE, E27        | 714                |
| VAP SLIM 60 POLE, E27        | 714                |
| VAP SLIM 90 POLE, E27        | 714                |
| VARU EL, QPAR51              | 113                |
| VARYT CL, E14                | 127                |
| VARYT DIAMOND<br>GLASS SHADE | 127, 179, 285, 401 |
| VARYT GLOBE<br>GLASS SHADE   | 127, 179, 285, 401 |
| VARYT LINED<br>GLASS SHADE   | 127, 179, 285, 401 |
| VARYT PLEATED<br>GLASS SHADE | 127, 179, 285, 401 |
| VARYT PD, E14                | 179                |
| VARYT TL, E14                | 401                |
| VARYT WL, E14                | 285                |
| VERLUX EL, SQUARE, PHASE     | 104                |
| VILUA L WL                   | 837                |
| VILUA S WL                   | 837                |
| VILUA WL, UP/DOWN            | 837                |

## W

|                            |          |
|----------------------------|----------|
| WALLYX WL, QPAR51          | 840      |
| WL 106 E14                 | 318, 319 |
| WL 149 WL, PHASE           | 347      |
| WL 149 WL, QT-DE12         | 347      |
| WORKLIGHT EASY FL 940      | 417      |
| WORKLIGHT FL               | 417      |
| WORKLIGHT PD, DALI         | 251      |
| WORKLIGHT PRO 120 PD, DALI | 251      |
| WORKLIGHT PRO 150 PD, DALI | 251      |
| WORKLIGHT PRO FL, DOUBLE   | 419      |
| WORKLIGHT PRO FL, SINGLE   | 419      |
| WORKLIGHT TL               | 417      |
| WORO EL                    | 121      |
| WUD PD, E27, CYLINDRICAL   | 181      |
| WUD PD, E27, SEMICIRCULAR  | 181      |
| WUD TL, E27, CYLINDRICAL   | 399      |
| WUD WL, E27, CYLINDRICAL   | 343      |



SUN  
1009144

# SYMBOLS KEY



**Recommendations**  
Displays accessories and recommended light bulbs for the chosen products



**Preservation of luminous flux:**  
Describes the amount by which the luminous flux of an LED decreases during a specified period.



**Dark Sky**  
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

**MIX**  
match

**Mix & Match**  
Indicates products that can be combined



**Unified Glare Rating:**  
The lower the UGR value, the lower the psychological glare.




**Primary/Replica**  
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.



**Energy efficiency class**  
"This light is suitable for bulbs with an energy efficiency rating of ..."



**Pendant cable length**  
in cm



**Cable length:**  
Mains plugs, connectors and supply cables (with open cable end) in cm




**Through-wiring possible**



**Connected lighting:**  
Indicates smart products that use the following protocols:  
• Zigbee®  
• DALI  
• Bluetooth



**Protection classes**  
• Protection class I / Protective conductor  
• Protection class II / Protection by double or reinforced insulation  
• Protection class III / Protection by extra-low voltage



**Shape of the installation opening**



**Specification of the installation depth**



**Drive-over capability** of the product ensured



**Weight-bearing capacity** of the product up to the specified value in tonnes. Measurements based on installation in concrete.



**Sea-air resistant coating**



**Independent converter:**  
Control equipment also for use outside of lights




**Short-circuit protected safety control equipment**



Light colour temperature in Kelvin (K)



Luminous flux in lumens (lm)



**Dimmable with:**  
• **C** = Trailing-edge phase dimmer  
• **L** = Leading-edge phase dimmer  
• **Uni** = Universal dimmer  
• **1-10 V**  
• **Dali** = DALI bus system  
• **Switch** = Switch/button or touch control on the light  
• **Touch** = Simple, stepless operation; responds to touch




**IP protection rating:**  
Indicates the suitability of electrical equipment for different environmental conditions.



**IK impact resistance rating:**  
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.



**Half-diffusion angle:**  
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.



**Rotation and pivoting capacity in degrees:**  
• Rotation range  
• Pivot range  
• Gimbaled



**CCT switch:**  
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.



**Dim-to-warm:**  
With dimmers, the light colour can be altered from cold white to warm white.



**Indicates lights with RGB+W and RGB**  
(Red-Green-Blue + White and Red-Green-Blue)



**Indicates lights with motion sensors**  
(Microwaves (MR) - Technology / Infrared / Radio)



Products with integrated LEDs



Products with light socket





## STAY WELL-INFORMED

Scan the QR code, select your country and get our latest prices. Visit us at **slv.com**

Unless otherwise agreed, all deliveries and services are subject to our General Terms and Conditions, which can be viewed on our website at **slv.com**

SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value-added tax or procurement prices.

\*Please note the guarantee conditions available at  
slv.com → Service → Downloads → Guarantee conditions.

Many of the products shown in this catalogue are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this catalogue are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. All product descriptions/information are therefore subject to change and errors excepted.

All products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This catalogue contains a general range and is not country-specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes.

The presentation of our lights with realistic photos showing them in use is possible thanks to the kind cooperation and agreement of the owners or designers of the settings depicted in the images. We would like to take this opportunity to thank all those who consented to having photos taken and used.

The publication of this catalogue invalidates the prices specified in previous lists and catalogues. SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value-added tax or procurement prices.

All prices are recommended retail prices (RRP) and indicated without VAT.

Publisher  
SLV GmbH, Germany  
Daimlerstrasse 21-23  
52531 Übach-Palenberg  
T +49 (0) 2451 4833-0  
slv.com

Copyright  
© SLV GmbH, 2026





SLV GmbH  
Daimlerstraße 21-23, 52531 Übach-Palenberg  
Germany | +49 (0) 2451 4833 - 333 | [info@slv.de](mailto:info@slv.de)

SLV Österreich GmbH  
Zaunergasse 4/4, Stock, 1030 Wien  
Austria | +49 (0)2451 4833 - 355 | [info@slv.de](mailto:info@slv.de)

SLV Belgium N.V.  
Herentalsebaan 429, 2160 Wommelgem  
Belgium | +32 (0)3 385 30 08 | [info.be@slv.com](mailto:info.be@slv.com)

SLV Czech s.r.o.  
V Sedlci 28/17, 160 00 Praha 6 - Sedlec  
Czech Republic | +420 739 282 151 | [info@cz.slv.com](mailto:info@cz.slv.com)

SLV France S.A.S.  
88 rue Henri Dépagneux, ZAC du Martelet - Bât B, 69400 Limas  
France | +33 4 74 02 71 20 | [infofr@slv.com](mailto:infofr@slv.com)

SLV Italia s.r.l.  
Via Lecco, 19/D, 23896 Bevera di Sirtori (LC)  
Italy | +39 039 5983575 | [infoit@slv.com](mailto:infoit@slv.com)

SLV Nederland BV  
Sint Jansweg 15, 5928 RC Venlo  
The Netherlands | +31 773204343 | [info.nl@slv.com](mailto:info.nl@slv.com)

SLV Poland sp. z o.o. ul.  
Aleje Jerozolimskie 200, 02-486 Warsaw  
Poland | +48 22 722-49-75 | [slv@slv.pl](mailto:slv@slv.pl)

SLV Portugal, LDA.  
Rua Margarida de Abreu N°15 - B, Casal Vistoso, 1900-410 Lisboa  
Portugal | +351 210 185 961 | [info@pt.slv.com](mailto:info@pt.slv.com)

SLV d.o.o.  
Barjanska cesta 50, 1000 Ljubljana  
Slovenia | +386 1 2009 730 | [info.si@slv.com](mailto:info.si@slv.com)

Soluciones Luminotécnicas Visuales, S.L.  
Antic Camí Ral de Valencia, 38, L17, 8860 Castelldefels Barcelona  
Spain | +34 931 168 161 | [info@slv.es](mailto:info@slv.es)

SLV Swiss SA  
Route du Bey 6, 1847 Rennaz  
Switzerland | +41 218113232 | [info@slv-swiss.ch](mailto:info@slv-swiss.ch)

SLV Lighting UK Ltd.  
Unit E Chiltern Park, Boscombe Road, LU5 4LT Dunstable  
UK | +44 (0)203 968 11 00 | [info@uk.slv.com](mailto:info@uk.slv.com)

SLV Nordics  
Daimlerstraße 21-23, 52531 Übach-Palenberg  
Germany | +46 70 854 9770 | [info@nordics.slv.com](mailto:info@nordics.slv.com)



**slv.com**

