

ULTRACAR LIGHTING



AU SERVICE
DES CONCESSIONNAIRES
TEXTO INFO: 514-592-0005

depuis 1982
2025
514.592.0005



Suivez-nous Instagram
ultracarmontreal

www.ultracar.com

ULTRACAR



MINI POD LED BARS



ULTMPD6



ULTMPD6FL



PART #	ACTUAL LUMENS	CURRENT	POWER	BEAM PATTERN	DIMENSIONS	VOLTAGE	PROTECTION
6" MINI POD BAR							
ULTMPD6	722 lumens	1.3A@13.6V	18W	Flood Beam	5.86 x 1.41 x 1.53"	10-36V Dc	IP67
ULTMPD6FL	722 lumens	1.3A@13.6V	18W	Flood Beam	7.67 x 1.77 x 2.44"	10-36V Dc	IP67

SWITCH & HARNESS

VOLTAGE: 9-16V DC



PART #	POWER OUTPUT	DESCRIPTION
1 OUTPUT		
ULTSWRH12	MAX 288W	Single output single function LED light harness & switch
ULTSWRH13	MAX 288W	Single output dual function LED light harness & switch
ULTWH12	MAX 250W	Single output single function (use with single function LED bar + ULTRKSP2)
*ULTXOA830003	MAX 250W	Single output triple function (use with ULTBARS20HFS + ULTRKSP3)
*ULTXOA830004	MAX 250W	Single output dual function (use with ULTBARS6FS or ULTBARS10FS + ULTRKSP2)
2 OUTPUTS		
ULTSWRH22	MAX 144W X 2	Dual output single function LED light harness & switch (use with single function LED bar)
ULTWH22	MAX 125W X 2	Dual output single function (use with single function LED bar + CLDRKSP2)
*ULTXOA830002	MAX 125W X 2	Dual output dual function (use with ULTBARS6FS or ULTBARS10FS + ULTRKSP2)
ULTWH24	MAX 125W X 2	Dual output triple function (use with ULTBARS20HFS + ULTRKSP3)


*These products are still available under the RTX brand while supplies last.

SWITCH PANELS

VOLTAGE: 12V DC



ULTRKSP2

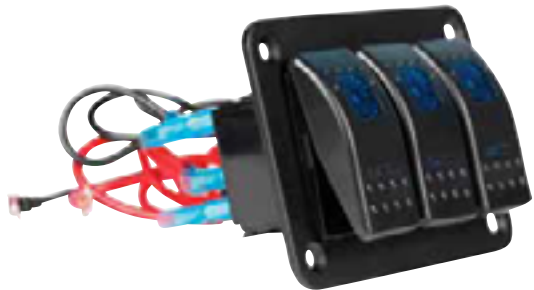

ULTRKSP3

PART #	DESCRIPTION
2 SWITCHES	
ULTRKSP2	Dual on-off rocker switch panel for led light bars & led pod lights
3 SWITCHES	
ULTRKSP3	Triple on-off rocker switch panel for led light bars & led pod lights

CONNECTORS

VOLTAGE: 9-16V DC



ULTWCONM



ULTWCONF

PART #	DESCRIPTION
MALE	
ULTWCONM	7" Single function male deutsch connector
FEMALE	
ULTWCONF	7" single function female deutsch connector

HITCH MOUNTING BRACKET



ULTBRK24

2-2.5" (Diameter) tow hitch mounting bracket, fits one pair of LED pod lights (not included).



JEEP AUXILIARY MOUNTING BRACKETS



ULTBRK01

Jeep Wrangler JK 07-17
Upper windshield cowl mounting bracket kit, fits one piece of 50-inch straight LED light bar (not included).
Simple installation: just peel the foam tape, stick them to the bracket, mount the bracket to the windshield frame with vehicles original factory bolts, and then use the mounting hardware comes with the light bar, to install the light bar on the bracket.
(Note: if mounting hardware size from the light bar are not same as mounting holes size on bracket, you can use washers to make them fit)
Package include: 2 x mounting bracket, 2 x foam tape
Compatible with: (1) 50"LED light bar



ULTBRK02

Jeep Wrangler JK 07-15
Upper windshield mounting bracket kit, fits one piece of 50-inch straight LED light bar and 1 pair of LED pod light (not included).
Simple installation: just peel the foam tape, stick them to the bracket, mount the bracket to the windshield frame with vehicles original factory bolts, and then use the mounting hardware comes with the light bar, to install the light bar on the bracket.
(Note: if mounting hardware size from the light bar are not same as mounting holes size on bracket, you can use washers to make them fit)
Compatible with: (1) 50" LED light bar + (2) LED pod lights



ULTBRK03

Jeep 97-06 Wrangler TJ 4WD / 04-06 Wrangler Unlimited LJ 4WD
Upper windshield mounting bracket kit, fits one piece of 50-inch straight LED light bar (not included)
Simple installation: just peel the foam tape, stick them to the bracket, mount the bracket to the windshield frame with vehicles original factory bolts, and then use the mounting hardware comes with the light bar, to install the light bar on the bracket.
(Note: if mounting hardware size from the light bar are not same as mounting holes size on bracket, you can use washers to make them fit)
Compatible with: (1) 50" LED light bar



ULTBRK04

Jeep 97-06 / Wrangler TJ 4WD 04-06 /Wrangler Unlimited LJ 4WD
Upper windshield mounting bracket kit, fits one piece of 50-inch straight LED light bar and 1 pair of LED pod light (not included)
Simple installation: just peel the foam tape, stick them to the bracket, mount the bracket to the windshield frame with vehicles original factory bolts, and then use the mounting hardware comes with the light bar, to install the light bar on the bracket.
(Note: if mounting hardware size from the light bar are not same as mounting holes size on bracket, you can use washers to make them fit)
Compatible with: (1) 50" LED light bar + (2) LED pod lights



JEEP AUXILIARY MOUNTING BRACKETS



Jeep Wrangler 07-17
Lower a-pillar mounting bracket kit, fits 2 pairs of LED pod lights (not included)



Jeep Wrangler 07-13
Lower a-pillar mounting bracket kit, fits 1 pair of LED pod lights (not included)



Jeep Wrangler 07-13, Jeep JK
Engine hood mounting bracket kit, fits one 20-inch LED light bar (not included)



Jeep Wrangler 07-13
Lower a-pillar mounting bracket kit, fits 1 pair of LED pod lights (not included)



Stainless steel 2-inch tubular bar clamp mounting bracket kit, fits 2 pieces of led light bars or 1 pair of led pod lights/light bars (not included)

Useful rubber: high quality rubber inserts dampen driving vibration and avoid scraping bull bar surface

Wide application: can be used on tubes of 1", 1-1/2", 1-3/4" & 2" in diameter

Compatible with:
(2) LED light pods or (1) LED light bar



Jeep Wrangler JK 07-17
Upper windshield cowl mounting bracket kit, fits one 50-inch straight LED light bar (not included)



JEEP AUXILIARY MOUNTING BRACKETS



Jeep Wrangler JK 07-17
Engine hood mounting bracket kit, fits one 20-inch straight LED light bar (not included)



Jeep Wrangler JK 07-17
Engine hood mounting bracket, fits slim light bar, work light or driving light (not included)

Compatible with:
(1) 20" LED light bar



Jeep Wrangler JK 07-17
Lower a-pillar mounting bracket kit, fits 2 pairs of LED pod lights (not included)



Jeep Wrangler JK 07-2017
Front grille mounting bracket kit, fits one 20-inch straight single row or dual row LED light bar (not included)



UNIVERSAL AUXILIARY MOUNTING BRACKETS



ULTBRK10

Stainless steel 2-inch tubular bar clamp mounting bracket kit, fits 1 LED light bar or 1 pair of LED pod lights (not included)



ULTBRK11

Stainless steel 2.5-Inch tubular bar clamp mounting bracket kit, fits 1 LED light bar or 1 pair of LED pod lights (not included)



ULTBRK12

Stainless steel 3-Inch tubular bar clamp mounting bracket kit, fits 1 LED light bar or 1 pair of LED pod lights (not included)



ULTBRK21

Front license plate mounting bracket, fits 1 short LED light bar or 1 pair of LED pod lights (not included)



FOG LIGHTS

FOG LIGHTS

FORD F150 • Set of 2



ULTRTXG2FLWA

3x 5W CREE and 3x 3W Amber
48W • EPI
Double Color : White/Amber
Switch



G2-FL-LED-WA
WHITE/AMBER SWITCH,
AMBER COLOR FOR FOG/RAIN/SNOW

JEEP 7" - LED

HEADLIGHT WITH DRL TURNING LIGHT • SOLD IN PAIRS



ULTRGB001

48W - 9-32V - IP67 - 6500K
Angel Eye:
RGB / white / red / green / blue / pink
Function:
Jumping, fading, flashing, dimming
Control:
Bluetooth App
200 color change mode





SINGLE ROW LED BARS

10"



ULTLW881008

ULTLW881008
Effective Lumens
2495
Raw Lumens
3780
Opt. Penetration
2300 - 2050 ft.
LED
9 x 5W
Dimension
10" L x 1.88" H x 2.14" D
Amp Draw
3.35 @ 12V

20"



ULTLW882008

ULTLW882008
Effective Lumens
5975
Raw Lumens
8820
Opt. Penetration
4100 - 3600 ft.
LED
21 x 5W
Dimension
20" L x 1.88" H x 2.14" D
Amp Draw
7.95 @ 12V

32"



ULTLW883208

ULTLW883208
Effective Lumens
9221
Raw Lumens
13860
Opt. Penetration
5100 - 4460 ft.
LED
33 x 5W
Dimension
32" L x 1.88" H x 2.14" D
Amp Draw
12.5 @ 12V

32"
CURVED





ULTLW883268

ULTLW883268
Effective Lumens
7808
Raw Lumens
13860
Opt. Penetration
2890 - 2300 ft.
LED
33 x 5W
Dimension
32" L x 1.88" H x 2.14" D
Amp Draw
11.77 @ 12V

ULTRA NXT

IP68 & IP69K - RoHS - EMC - CE - 10V - 30V
Flood/Spot Combo Beam Pattern
Black Aluminum Housing
Side Mount

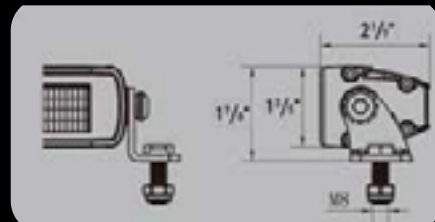

DOUBLE ROW LED BARS

13"



ULTLW91308

ULTLW91308
Effective Lumens
6600
Raw Lumens
10080
Opt. Penetration
3900 - 3000 ft.
LED
24 x 5W
Dimension
13" L x 2.75" H x 2.63" D
Amp Draw
7.73 @ 12V

21.5"



ULTLW92108

ULTLW92108
Effective Lumens
11000
Raw Lumens
16080
Opt. Penetration
5200 - 3900 ft.
LED
40 x 5W
Dimension
21.5" L x 2.75" H x 2.63" D
Amp Draw
14.6 @ 12V

30"



ULTLW93008

ULTLW93008
Effective Lumens
16500
Raw Lumens
25200
Opt. Penetration
6000 - 4500 ft.
LED
60 x 5W
Dimension
30" L x 2.75" H x 2.63" D
Amp Draw
20.8 @ 12V

30"
CURVED




ULTLW93068

ULTLW93068
Effective Lumens
12264
Raw Lumens
25200
Opt. Penetration
4000 - 3000 ft.
LED
60 x 5W
Dimension
30" L x 2.75" H x 2.63" D
Amp Draw
20.8 @ 12V

ULTRA NXT

IP68 & IP69K - RoHS - EMC - CE - 10V - 30V
Flood/Spot Combo Beam Pattern
Black Aluminum Housing
Side Mount

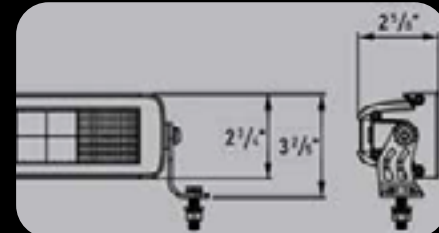

RTX



WORK LIGHTS


LED WORK LIGHTS

S SERIES PREMIUM WORK LIGHT
VOLTAGE: 10-36V DC - PROTECTION: IP68



ULTXOA6C4110

2600 LM • 30W
2.2A@13.6V
OSRAM LED

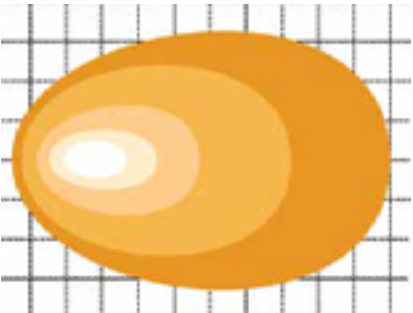


RTX

LED LIGHT BARS

2 INSTALLATION METHODS (ONLY FOR STRAIGHT BARS): Side brackets or sliding feet



- No screw front frame leads new trends in light bar design.
- Updated heat sink design for effective heat dissipation and better fitment
- The straight bars have a combined spot and flood beam
- The curved bars have a spot beam

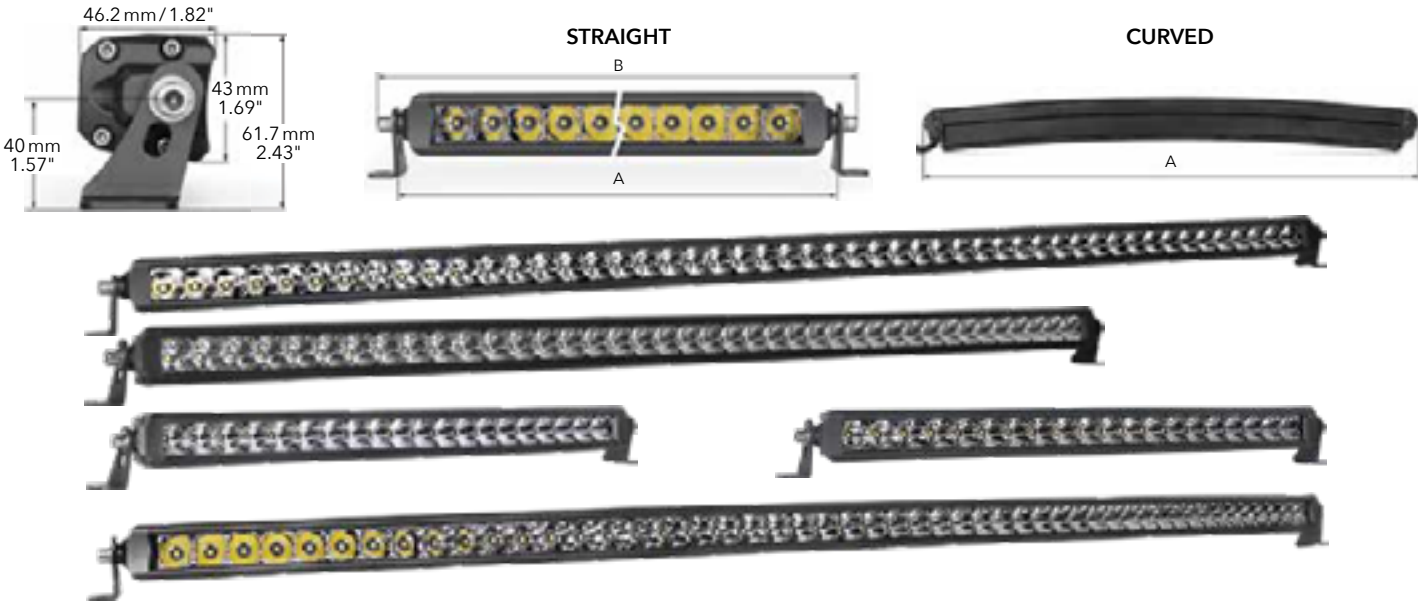

SINGLE ROW LIGHT BARS • 2525 LED
VOLTAGE: 10-36V DC - PROTECTION: IP67

STRAIGHT	A	B	CURVED	A	LUMENS	AMP	WATTS
ULTXOA48B811	558 mm / 21.97"	584 mm / 22.99"	ULTXOA48B311	559 / 22.01"	2420 lm	4.4A@13.6V	60W
			ULTXOA48C311	811 / 31.93"	3470 lm	6.6A@13.6V	90W
ULTXOA48D811	1063 mm / 41.85"	1089 mm / 42.87"	ULTXOA48D311	1064 / 41.89"	4730 lm	8.8A@13.6V	120W
ULTXOA48E811	1316 mm / 51.81"	1342 mm / 52.83"	ULTXOA48E311	1313 / 51.69"	5880 lm	11.0A@13.6V	150W

STREET LEGAL



- Low profile slim single row with no screw frong frame
- Half convex optics with automotive grade modular chip
- Patented optical design combine legal driving lights and strobe lights all in one
- High beam, fog light & strobe light
- Innovative harness design for no drill installation and adaptive control

SAE / DOT



MULTI-FUNCTION SLIM SINGLE ROW LIGHT BARS
VOLTAGE: 10-36V DC - PROTECTION: IP67


ULTXOA41A610	1430 lm	3.0A@13.6V	40W	Fog Beam	SAE J583
--------------	---------	------------	-----	----------	----------

LED LIGHT BARS

2 INSTALLATION METHODS (ONLY FOR STRAIGHT BARS): Side brackets or sliding feet



- No screw front frame leads new trends in light bar design.
- Updated heat sink design for effective heat dissipation and better fitment
- The straight bars have a combined spot and flood beam
- The curved bars have a spot beam

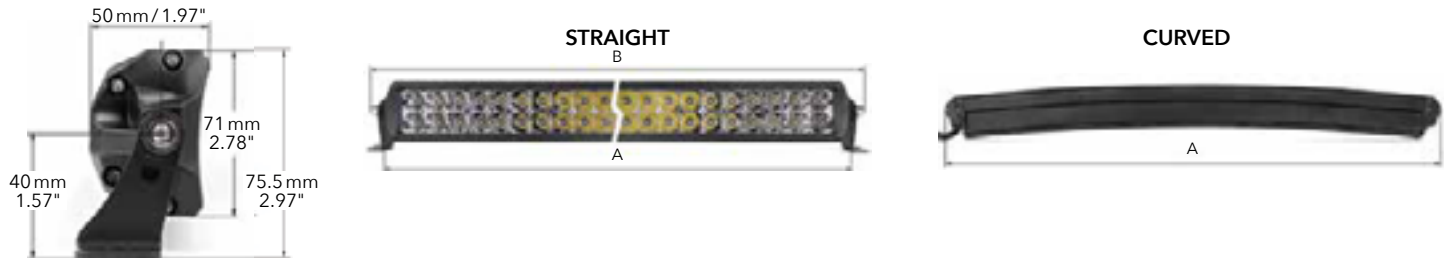

HIGH POWER DUAL ROW LIGHT BARS • OSRAM LED
VOLTAGE: 10-36V DC - PROTECTION: IP67

STRAIGHT	A	B	CURVED	A	LUMENS	AMP	WATTS
ULTXOA49B810	558 mm / 21.97"	584 mm / 22.99"			7982 lm	17.6A@13.6V	240W
ULTXOA49C810	811 mm / 31.93"	837 mm / 32.95"			11990 lm	26.5A@13.6V	360W
ULTXOA49D810	1063 mm / 41.85"	1089 mm / 42.87"			15780 lm	35.3A@13.6V	480W
ULTXOA49E810	1316 mm / 51.81"	1342 mm / 52.83"	ULTXOA49E310	1311 / 51.61"	18940 lm	44.1A@13.6V	600W

DUAL ROW LIGHT BARS • 2525 LED
VOLTAGE: 10-36V DC - PROTECTION: IP67

STRAIGHT	A	B	CURVED	A	LUMENS	AMP	WATTS
ULTXOA49A811	305 mm / 12.01"	331 mm / 13.03"			2420 lm	4.4A@13.6V	60W
ULTXOA49B811	558 mm / 21.97"	584 mm / 22.99"	ULTXOA49B311	558 / 21.97"	4730 lm	8.8A@13.6V	120W
ULTXOA49C811	811 mm / 31.93"	837 mm / 32.95"			7040 lm	13.2A@13.6V	180W
ULTXOA49D811	1063 mm / 41.85"	1089 mm / 42.87"			9450 lm	17.6A@13.6V	240W
ULTXOA49E811	1316 mm / 51.81"	1342 mm / 52.83"	ULTXOA49E311	1311 / 51.61"	11550 lm	22.0A@13.6V	300W

LED LIGHT BARS

10-30 DC • IP67 • Color Temperature: 6000°K • 10 W RGB LED
Spot and flood combo • Diecast aluminum housing • Stainless steel bracket



ULTX0452830W	7.1"	180.4 x 93.2 x 82.6 mm	3 LED	30 W	2550 lumens
ULTX0452860W	12.4"	315.4 x 93.2 x 82.6 mm	6 LED	60 W	5100 lumens
ULTX0452890W	17.7"	450.4 x 93.2 x 82.6mm	9 LED	90 W	7650 lumens
ULTX04528240W	44.3"	1125.4 x 93.2 x 82.6 mm	24 LED	240 W	20400 lumens
ULTX04528270W	49.6"	1260.4 x 93.2 x 82.6 mm	27 LED	270 W	22950 lumens

LED LIGHT BARS

9-32V DC • Anti-Glare • Spot and flood combo • IP68 • Optic designed for a minimum loss of illumination



	A	B	C	D	E	LED Qty	Lumens	Watts
ULTX0150C	65 mm / 2.56"	54 mm / 2.13"	77 mm / 3.03"	1299 mm / 51.14"	1335 mm / 52.56"	33	12015	165



DUAL ROW SIDE LIGHT LED LIGHTBARS (240°)

This new series features a set of diffused LED end caps on both sides of the bar that produce a 240-degree field of light.



ACCESSORIES

CONNECTOR



ULTXDTCONN
2-pin male
Deutsch
connector.

STONE GUARDS FOR LED LIGHT BAR



ULTXCOVER1
200mm x 80mm x 35mm
ULTXCOVER2
150mm x 80mm x 35mm

AMBER
ULTXCOVER1-A
200mm x 80mm x 35mm

CURVED 50" LED LIGHT ROOF MOUNTING BRACKETS



ULTXB66
DODGE / RAM
1500/2500/3500 09-16



ULTXB33
FORD
F150 SVT Raptor 10-14
F150 09-14

VOLTAGE: 9-30V DC - PROTECTION: IP67

LED LIGHT BARS

WITH 7 CONFIGURATIONS
OF AMBER FLASHES



ULTXOA765123
LED Beacon - 3 Bolt Mount, 7 Flash Patterns, Amber
• Dimension: 5.11 x 3.11"
• Source: 24x1.5W LED
• Power: 18W
• Voltage: 9-30V
• Protection: IP67
• Approval: ECE R65/R10 - SAE J845 - CAP 168



ULTXOA76512M
LED Beacon - Magnetic Mount, Cigarette Lighter Socket, 7 Flash Patterns, Amber
• Dimension: 5.12 x 3.19"
• Source: 24x1.5W LED
• Puissance / Power: 18W
• Voltage: 9-30V
• Protection: IP67
• Approval: ECE R65/R10 - SAE J845 - CAP 168

WINDSHIELD COWL LIGHT MOUNTS

SOLD IN PAIRS. LIGHTS NOT INCLUDED.
18-22 JEEP Wrangler JL & 20-22 JEEP Gladiator



ULTBIG730066T
6" Square



ULTBIG730230T
2 x 3" Square



ULTBIG730060T
6" Single Row



ULTBIG730231T
2 x 3" Square

HOOD HINGE LIGHT MOUNTS

SOLD IN PAIRS. LIGHTS NOT INCLUDED.
18-22 JEEP Wrangler JL & 20-22 JEEP Gladiator



ULTBIG731060T
6" Single Row



ULTBIG731230T
2 x 3" Square



ULTBIG731030T
2 x 3" Square



ULTBIG731200T
20" Single Row

HOOD HINGE LIGHT MOUNTS

SOLD IN PAIRS. LIGHTS NOT INCLUDED.
18-22 JEEP Wrangler JL & 20-22 JEEP Gladiator

These LED Light mounts
replace the windshield
bump stops.



ULTBIG732060T
6" Single Row



ULTBIG732100T
10" Double Row



ULTBIG732230T
3" Square



ULTBIG732231T
2 x 3" Square

HARD TOP REAR LIGHT MOUNTS

SOLD IN PAIRS. LIGHTS NOT INCLUDED.




ULTBIG599502T
2 x 3" Square

18-22 JEEP Wrangler JL



Hamsar

SINGLE BEAM HALOGEN

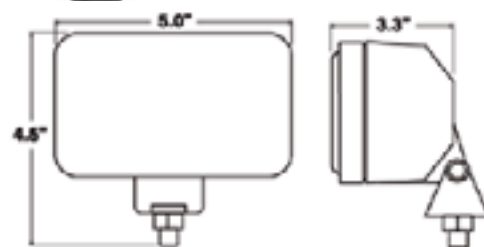

ULTH81044
12V, 55W. Flood pattern.
Polymer housing. Hardened glass lens.

LED WORK LIGHTS

30 000+ hours life. Die cast aluminium housing & polycarbonate lens.
Stainless steel mounting hardware.



5.6"
ULTH81257
IP68
1800 LUMENS



DRIVING LAMPS

ANGEL EYES
With light ring
H3 55W



4.0" W x 4.0" H x 3.1" D
ULTHE71010451
Halogen

WORKLAMP

Sold per unit



6.2" x 3.9" x 3.7"
• **H3 12V/55W** •
Halogen double beam reflector
ULTHEH15161031
Long range. Shock-proof housing



AUXILIARY LIGHT



ULTHE357200001
20W • 6000K • 1080 lumens
10-30V DC • 178mm (7")
IP67 • DOT

FOG LIGHT KITS
500



ULTHE005750952
6.4" x 6.8" H x 2.6"

2 halogen lamps, 2 protective stone shields, 2 bulbs H3 12V/55W, 1 complete plug & play harness, 1 illuminated switch, 1 12V relay, step-by-step mounting instructions.

2 LED DAYTIME RUNNING LIGHT KIT



ULTHE980860801
15°
6.3"W x 1"H x 1.4"D



FOG LIGHTS

HONDA CIVIC 13-15 SEDAN



ULTPA88001
Clear Fog Light Kit



ULTPA88002
Yellow Fog Light Kit

HONDA CIVIC 2 DR 06-08 OEM STYLE



ULTPA55-CV0608-2DC
Clear

H4 CONVERSION KITS

Sold in pairs. Wiring harness not included



ULTPA11-700CL
5 3/4" dia. • Clear



ULTPA11-701CL
6" x 4" • Clear



ULTPA11-703CL
7" x 6" • Clear

CONVERSION HEADLAMPS



H4 - 55/60W
7"W x 7"H x 4.2"D

ULTHE002395801
Pair



LED WARNING LIGHTS



ULTE-2232AM

23" x 3 11/16" x 2 3/16" H • 12V - 30V.

12 flash patterns. **40 1W amber LEDs**. Aluminum housing with polycarbonate amber lens. 2 magnets with suction cups. Cigarette power adaptor with switch for flash pattern selection & 12.5 ft of wire.



ULTE-2150AM

15" x 3 11/16" x 2 3/16" H • 12V - 30V.

Quad flash alternating left & right. **32 1W amber LEDs**. Aluminum housing with polycarbonate amber lens. 2 magnets with suction cups. Cigarette power adaptor with on/off switch & 12.5' of wire.



ULTE-280AA

16 1/2" x 8 1/16" x 4 3/16" H

32 high output amber LED with amber dome & lens. Quad flash alternating left & right.



ULTE-2161AM

16 5/8" x 6 1/4" x 3" H • 12V

18 patterns. **18 1W LEDs**.

12V applications. Polycarbonate base & lens. Cigarette power adaptor with On/Off switch.



LED WARNING LIGHTS PERMANENT MOUNT



ULTW7900A

48" x 12" x 4" H
12V • 6.50 A

88 amber LED's. 15 selectable warning light patterns. 3 amber traffic advisory patterns. Control panel has LED flash pattern indicator and 10 push button switches. 12' cable from light bar to switch control panel.



LED WARNING LIGHTS

9.76" x 6.77" x 1.45" H • 12-24V.
LED mini lightbar with 360 degree visibility. Polycarbonate UV stabilized dome and robust ABS plastic base. **30 25.2W amber LEDs.** Dimensions de la lampe/Lamp dimension:

ULTHEH27996001
Permanent mount

ULTHEH27996011
Magnet mounts



LED WARNING LIGHTS



ULTE-2223AC
23" x 6 3/4" x 2 1/2" H
23" Amber LED. Magnetic Mount.
22 flash patterns. Clear lens.
Polycarbonate Lens & Base.




ULTE-2110AC
9.75" x 6.77" x 2" H
12V - 24V

Quad flash alternating left & right.
30 1W clear LEDs. ABS base with polycarbonate lens.



ULTE-2110ACM
9.75" x 6.77" x 2" H
12V - 24V

23 patterns. **30 1W LEDs.** 4-magnet mount. ABS base with polycarbonate lens. Fused cigarette power adaptor with On/Off switch.

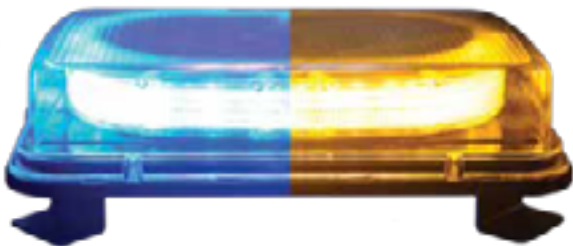

ULTE-7211AB
Amber & Blue
11" x 6.75" x 2.5" H

Synchronizable with **ULTE728AB/AW & ULTE-725AB/AW.** 4 flash patterns per color setting. No controller required. Wired synchronization.



ULTE-725AW
Amber & White

6" x 1.38" x 1.25" H
Synchronizable with **ULTE7211AB/AW & ULTE728AB/AW.** 4 flash patterns per color setting. Surface mount with lead wires. No controller required.



ULTE-728AB
Amber & Blue
6.5" dia. x 6.75" H

Synchronizable with **ULTE7211AB/AW & ULTE-725AB/AW.** Polycarbonate base and lens. 4 flash patterns per color setting. No controller required. Wired synchronization.



ULTE-890A
Amber
8.63" dia. x 7.88" H • 12V - 36V
Heavy Duty. 6 flash patterns.
2 speed flash settings for rotating flash.

LED WARNING LIGHTS



ULTE882AC
8.625" dia. x 7.875" H • **4 LED**
12V-40V • 0.9 A @ 12V
Heavy duty - Quint Flash



ULTC-250A
2.75" dia. x 5" H
12V • 0.24 A
Strobe light/Single flash



ULTC450AD
6.5" dia. x 4.5" H
Rubber base. Single flash.
0.3 Amps. 14V - 48V



ULTE480AM
5" dia. x 4.5" H
20 Diodes. **Magnetic base.**
On/Off Switch. Use 4 AA batteries (not included). Rotating flash.



ULTE-350A
5" dia. x 4" H
12V
30 LEDs.
Rotating flash pattern.



ULTE-530AM
5 5/8" Dia. x 3 1/4" H
12V - 110V.
Low profile, multi-pattern. 3 x 1W LED.
Magnetic base.
Polycarbonate base & lens.



ULTE-438AM
4 1/8" dia. x 4" H
36 LED
Magnetic base.
On/Off switch.
Uses 4 AA batteries (not included).
Quad flash.

LED WARNING LIGHTS



ULTW3030MP-A
6.25" dia. x 5" H
60-Super bright LEDs.
Permanent or magnet mount.
10 ft power wire with cigarette lighter plug.



ULTW3100-A
4 5/8" DIA. x 5 1/2" H
Magnetic base. 10' cord with cigarette lighter plug.



ULTW3300-A
4" dia. x 4" H.
Magnetized base.
10' cord with cigarette lighter plug.
200,000 candle power.



HAWKEYE™
ULTW3000-A
4" dia. x 4" H.
108 High intensity LED's.
10 different light patterns.
5 Flashing. 5 Rotating.



REVOLVING LIGHTS



ULTRDWL08
6" H • 12-24V

Magnetic base. Revolving or flashing. Plugs into your cigarette lighter.

ULTRDC1535
12V
Magnetic base.
Plugs into your cigarette lighter.



LED WARNING LIGHTS



5" x 1" x 11/16" H

ULTE-915AA

Two modules of 3 amber diodes each. 12V - 24V applications. Black powder coated aluminium base & clear polycarbonate lens. 19 flash patterns including simultaneous & alternating flashes.

ULTE-915AW

Two modules of 3 amber diodes & 3 white diodes. 12V - 24V applications. Black powder coated aluminium base & clear polycarbonate lens. 19 flash patterns including simultaneous & alternating flashes.

3 5/16" x 1 1/8" x 11/16" H



ULTE-913A

3 amber diodes. 12V - 24V applications. Black powder coated aluminium base & clear polycarbonate lens. 12 flash patterns.

5 1/8" x 1 1/4" x 3/8" H



ULTE-917AA

6 amber diodes. 14 Flash patterns • Clear lens. Aluminium base & polycarbonate lens. Surface mount - 2 holes @ 4-3/4" centres.

4 3/4" x 1 7/8" x 1 5/8" • QUAD FLASH



ULTE-950A


Amber lens
4 amber diodes

ULTE-950CA

Clear lens
4 amber diodes

ULTE-950CG

Clear lens
4 green diodes

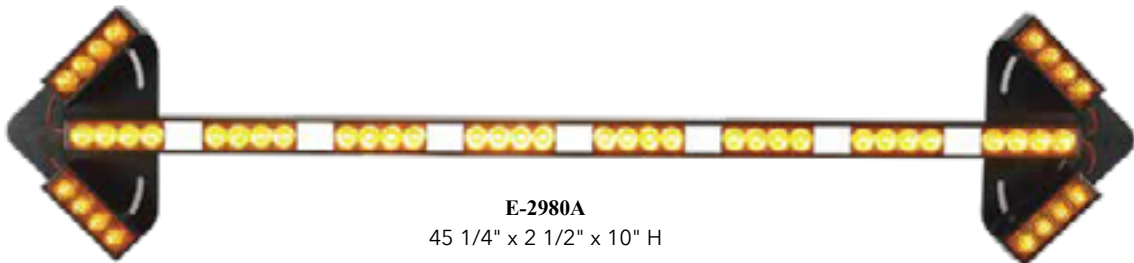

E-2980A
45 1/4" x 2 1/2" x 10" H

8 patterns. Amber. Aluminium light bar with polycarbonate lens. Mounts with "L" or "T" brackets (included). Comes with control box for flash selection. foldable arrows for easy storage.

WARNING ARROW BOARDS

DOT



- Its rugged construction meets specifications dictated by the Ministry of Transport of Quebec, paragraph 4.37.1, VOLUME V.
- Continuous light source with 14 optical blocks of 40 LED
- LED for better performance and reduced energy consumption
- DOT compliant



ULTFL1-L21240
57.9" x 4.9" x 25.1" H
40' harness. 2.4A

ARROW BOARD CONTROLLER



ULTCTRL-FL1

- Protection against short circuits on all outputs
- Day / night operating mode with integrated photocell
- One 5A output for accessory control
- Programmable operating parameters (Intensity, flashing speed, up and down motor runtime, etc.)
- Integrated no clutch actuator control
- Wireless Ignition detection
- Protection against overvoltage and reverse polarity
- Lighted membrane
- Low battery detection (programmable)
- VSS mod (CAN BUS, differential VSS, 1 wire VSS, preprogrammed speeds)

Jammy

LED SCENE LIGHTS



ULTJ-137
24-F 24"
7500 lumens
24" x 4.5" x 0.625"



ULTJ-13712-A
12" Angled
3500 lumens
12" x 3.5" x 1.25"

FLEX LED



2 x 12"

ULTAP77423B

White

- 2x12" Surface mount LED
- Premium 3M red tape
- Cut to size
- Water resistant iP65



MAX LED 24"



2 x 12"

ULTAP77706

Blue

At over 80% brighter than our standard FlexLED product. SMD LED technology. Flexible and can be cut to size for unlimited applications. Water resistant IP65. 3M peel & stick adhesive included.



LED TAILGATE LIGHT BARS



- Super bright
- Brake lights

ULTRAM960134
60"

- Emergency Hazard
- Turn signals

ULTRAM960135
49"

LED CAB ROOF LIGHTS

CHEVROLET / GMC 07-14



15 1/2" L x 2 3/8" x 1 1/16" H • 3 3/4" L x 2 3/8" x 1 1/16" H

ULTPAC20-265

Amber 3 light kit

Provides maximum visibility
Adapts to curved & flat roofs
Complete wire harness with quick wire connectors
All necessary hardware & illustrated installation instructions


RUNNING LIGHTS KITS



ULTPAC20-105

Kit includes 5 amber lights, connectors, harness & screws

Kit includes 5 amber lights, gaskets, wire harness and dash mount switch with indicator light

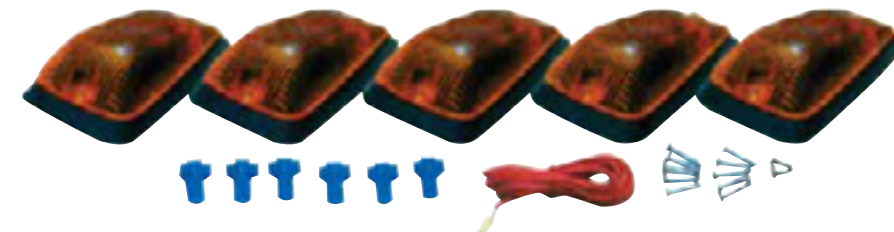

ULTPAC20-220

CHEVROLET 88-02

5 7/8" L x 3 1/2" x 1 1/2" H


LED



ULTPAC20-247

DODGE / RAM 03-17 5 1/2" L

x 3 1/8" x 1 3/8" H

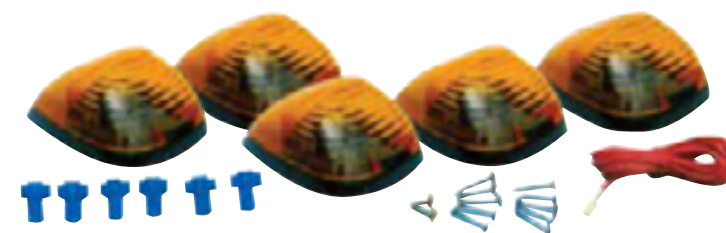

ULTPAC20-235

FORD 99-16

4" L x 3" x 1 3/4" H

LED



ULTPAC20-236

FORD 99-16

4" L x 3" x 1 3/4" H

ROUES POWDERCOAT NOIR LUSTRÉ GLOSS BLACK POWDERCOAT WHEELS



\$149
CHAQUE

DAN
(514) 592-0005



Ultracar Performance Inc. 1254 boul. Marcel-Laurin, Saint Laurent, Montréal, QC H4R 1J7
www.ultracar.com