


SPOOLABLE CONNECTOR

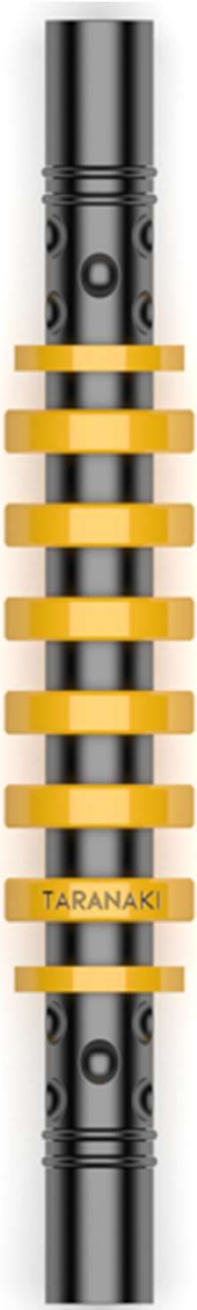

TOOL APPLICATIONS

The Spoolable Connector with one-piece design provides a robust, cost effective means of joining two sections of coil. They are available in both dimple-on and roll-on styles.

The roll-on design incorporates three O-ring grooves providing added security in high-pressure applications. There are also three crimping grooves to give improved tensile strength.

The Spoolable Connector is available for any combination of coil tubing.

FEATURES AND BENEFITS

- Robust, cost effective joining of two sections of coil
- Available in coil sizes from 1-1/4" to 2-7/8"
- One-piece design
- Available in both dimple-on and roll-on
- Available for all coil sizes

SPECIFICATIONS

Technical Variable	Units	Coiled Tubing Size					
		1 1/2"	1 3/4"	2"	2 3/8"	2 7/8"	
Max OD	in	1.50	1.75	2	2.375	2.875	
Min ID	in	0.688	0.750	1.000	1.313	1.750	
Make Up Length	in	18.48	17.52	17.52	18.48	18.72	
Weight	lbs	-	-	-	-	-	
Working Pressure	psi	5,000	5,000	5,000	5,000	5,000	
Strength	SWL	lbs	-	-	-	-	
	Yield	lbs	-	-	-	-	
	UTS	lbs	38,390	69,080	77,440	144,800	165,110
	Torsional	ft.lbs	-	-	-	-	-
Make Up Torque	ft.lbs	-	-	-	-	-	