
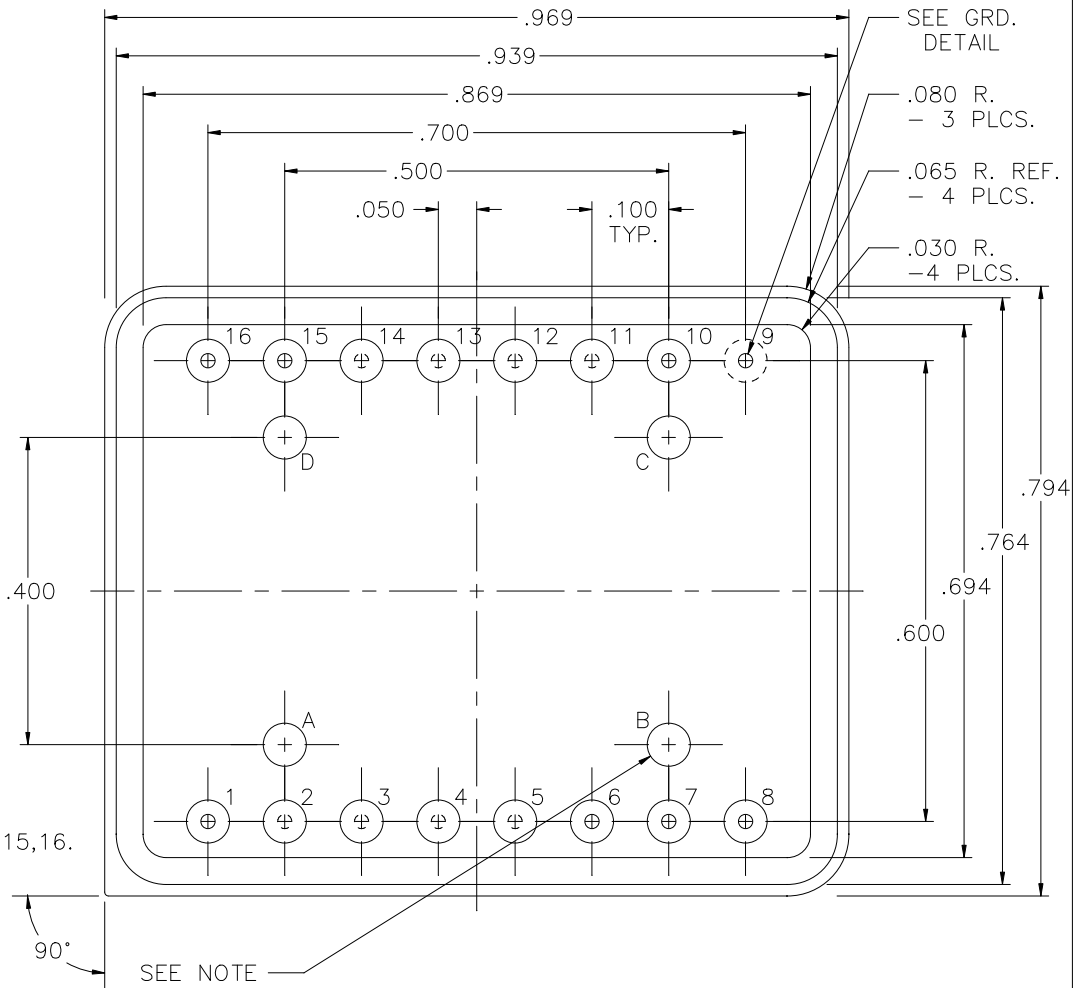


REV	DESCRIPTION OF REVISION	E.C.N.	BY	APPROVED	DATE
-----	-------------------------	--------	----	----------	------

**PIN 9 GRD. DETAIL**  
SCALE: 8:1

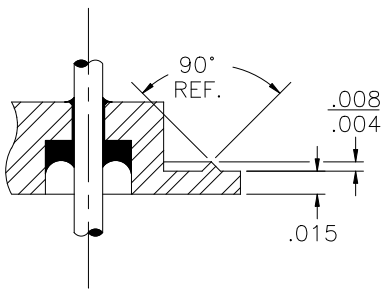

**NOTE:**


1. L.T.I./K.C. RETAINS THE OPTION TO GLASS IN UN-USED HOLES IN POSITIONS A,B,C,D.
2. POST IN POSITIONS 1,6,7,8,9,10,15,16.
3. LEAD IN POSITIONS 1 THRU 16.


**MATERIAL:**

- EYELET - 1010 C.R.S. OR EQUAL.
- GLASS - 7052 OR EQUAL.
- LEADS - ASTM F-15 ALLOY, KOVAR.
- BRAZE - BT VTG AG. CU. EUTECTIC.

**PLATING:**

1. RoHS COMPLIANT ELECTROLESS NICKEL PLATE OF 100 MICROINCHES MINIMUM FOLLOWED BY A RoHS COMPLIANT LEAD FREE SOLDER COAT, ON POSTS AND LEADS.

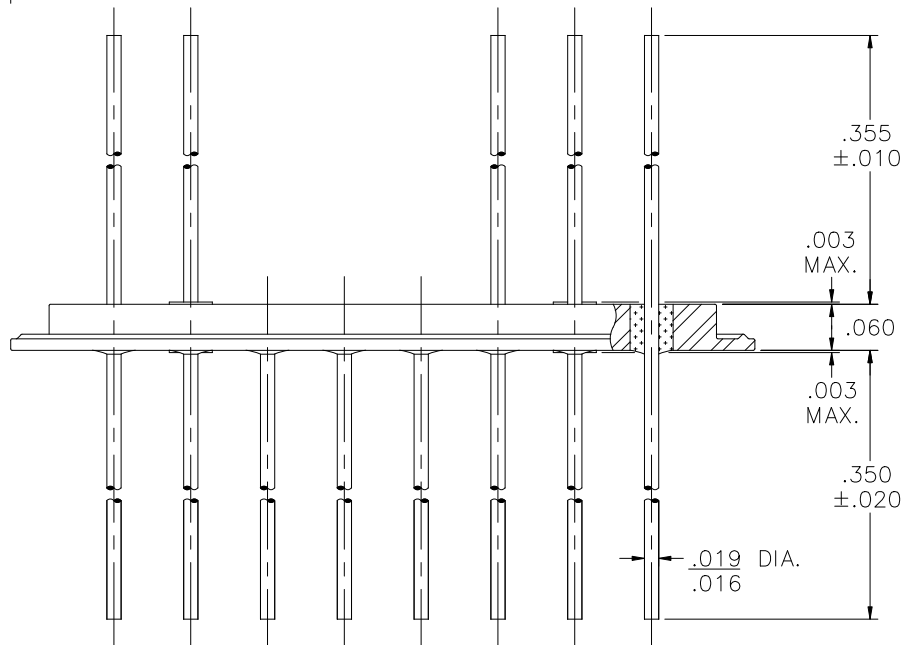

DRAWN BY: E.T.W. 03-18-11	MATERIAL: SEE ABOVE			TOLERANCING PER ANSI Y14.5 .X ±.005 .XXX ±.005 .XX ±.005 ANG ±5° UNLESS OTHERWISE SPECIFIED		 6700 W. 47th TERR. MISSION, KS. 66203 TEL: 913-432-2487 FAX: 913-432-0570
	CHECKED BY:	APP. SPECS	SUPERSEDES	NEXT ASSY	SCALE: 4:1	
APPROVED BY:	TITLE: .795x.970 D.I.P. 8 POSTS 11 LEADS, P9G, NO S.O. .355 PH. .350 LL.				PART NUMBER: RR-795970-DA RoHS	
				FILE:	UF00057B	PAGE 1 of 1