



REV	DESCRIPTION OF REVISION	E.C.N.	BY	APPROVED	DATE
-----	-------------------------	--------	----	----------	------

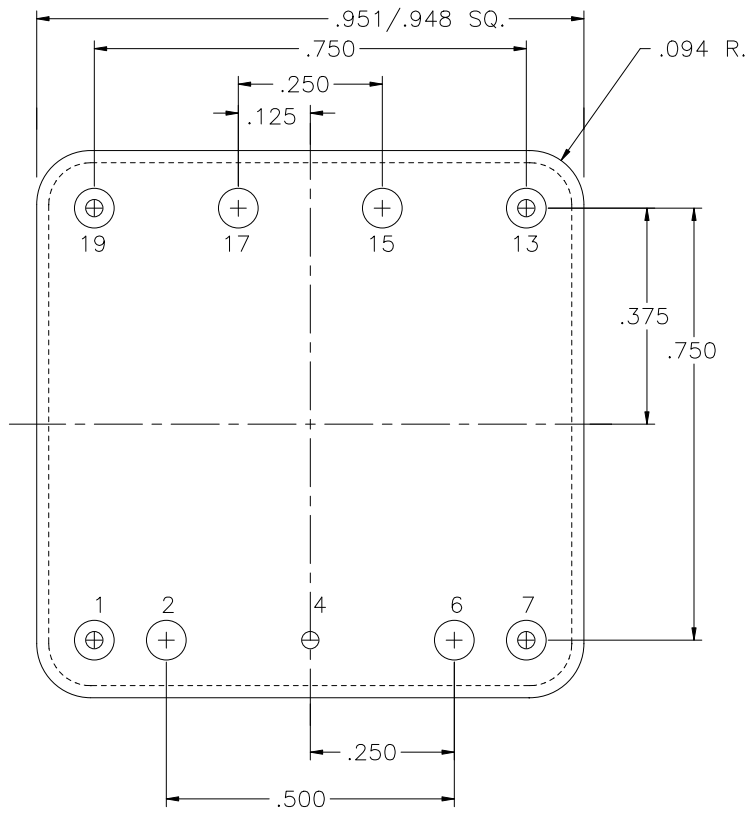

PIN 4 GRD. DETAIL  
SCALE: 8:1



NOTES:


THE PART WILL PASS  $1 \times 10^{-4}$  CC/SEC. HELIUM HERMETICITY AFTER PLATING.


MATERIAL:

EYELET- 1010 C.R.S. OR EQUAL.  
GLASS - 7052 OR EQUAL.  
LEADS - ASTM F-15, KOVAR.  
BRAZE - BT VTG AG. CU. EUTECTIC.

PLATING:

1. ELECTROLESS NICKEL FINAL PLATE OF 100 MICROINCHES MINIMUM.
2. SOLDER COAT ON POST AND LEADS PER MIL-STD QQ-S-571-D TIN LEAD ALLOY.

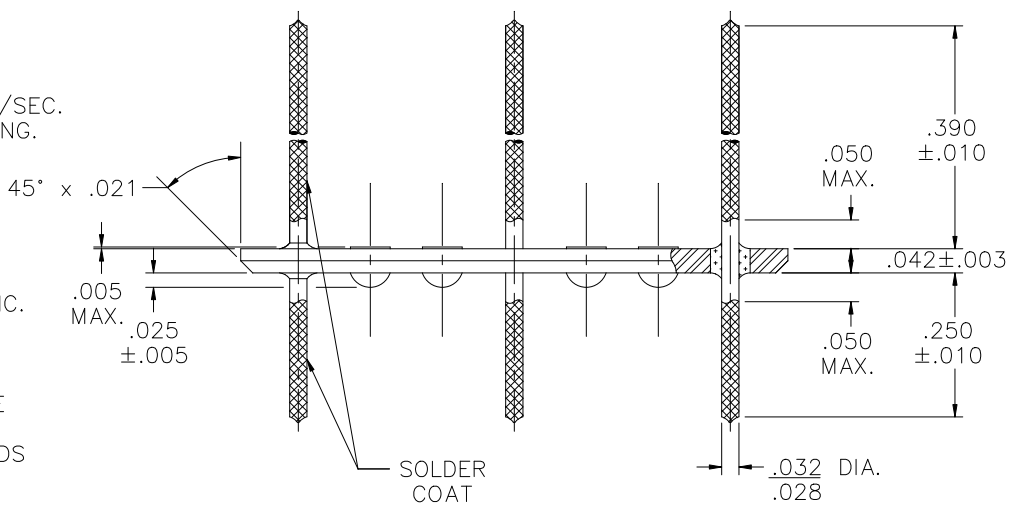

DRAWN BY: E.T.W. 01-08-01	MATERIAL: SEE ABOVE			TOLERANCING PER ANSI Y14.5 .X ±.005 .XXX ±.005 .XX ±.005 ANG ±5° UNLESS OTHERWISE SPECIFIED		 6700 W. 47th TERR. MISSION, KS. 66203 TEL: 913-432-2487 FAX: 913-432-0570
	CHECKED BY:	APP. SPECS	SUPERSEDES	NEXT ASSY	SCALE: N.T.S.	
APPROVED BY:	TITLE: .950 SQUARE D.I.P.				PART NUMBER: DC-950-P PT/LT	
				FILE: WA00055	PAGE 1	OF 1