



REV	DESCRIPTION OF REVISION	E.C.N.	BY	APPROVED	DATE
A	UPDATE TO CAD	0010	T.J.M.	E.T.W.	04-07-97
B	WAS 75° REF. W.R.P.		E.T.W.	E.T.W.	09-11-98
C	ADDED .003 MAX.		E.T.W.	E.T.W.	12-17-04
D	SHOWED FLUSH PINS ON TOP VIEW		E.T.W.	D.P.	05-04-09

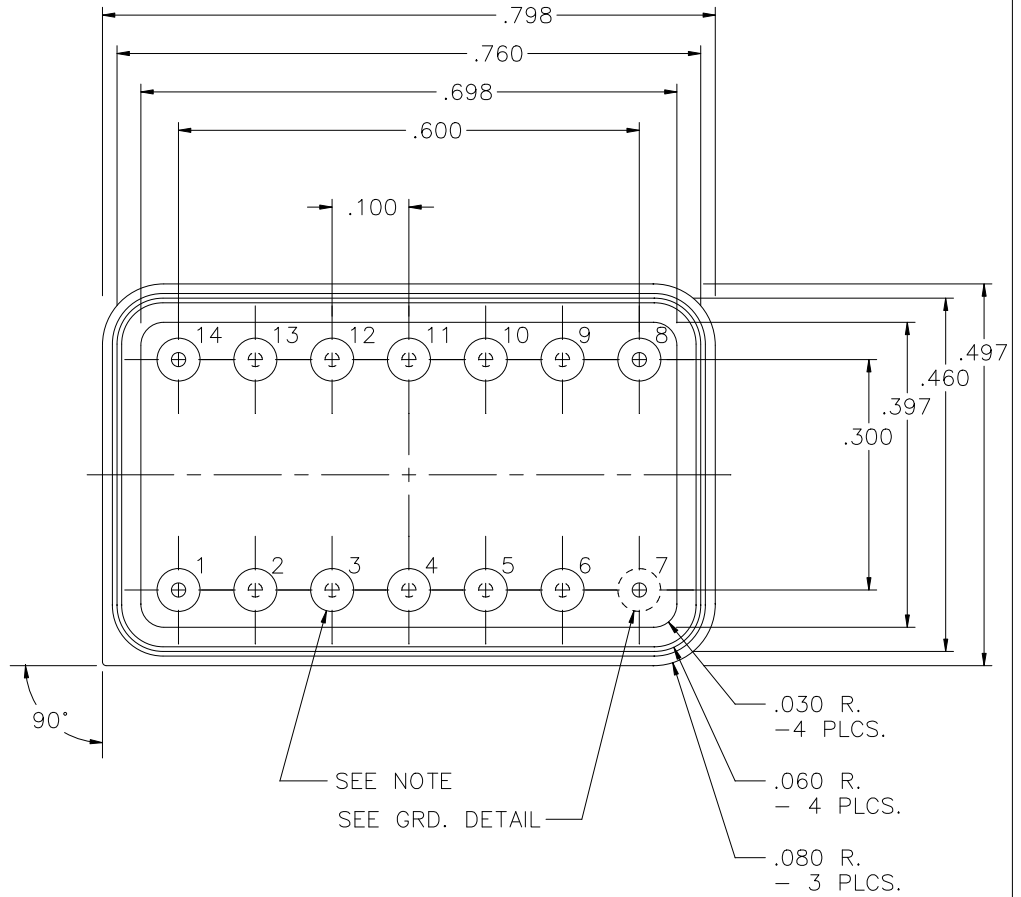

PIN 7 GRD. DETAIL
SCALE: 8:1

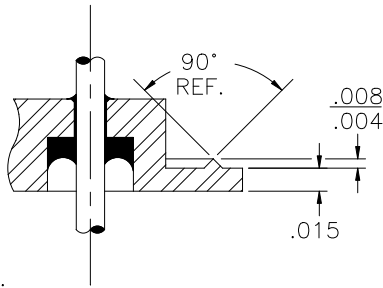

NOTE:


- PINS 1, 7, 8 & 14 WITH .050 P.H. REST OF PINS FLUSH.


MATERIAL:

- EYELET - 1010 C.R.S. OR EQUAL.
- GLASS - 7052 OR EQUAL.
- LEADS - ASTM F-15 ALLOY, KOVAR.
- BRAZE - BT VTG AG. CU. EUTECTIC.

PLATING:

- OPTION: RoHS COMPLIANT ELECTROLESS NICKEL PLATE OF 100 MICROINCHES MINIMUM FINAL PLATE.
- OPTION: RoHS COMPLIANT ELECTROLESS NICKEL PLATE OF 100 MICROINCHES MINIMUM FOLLOWED BY A RoHS COMPLIANT SOLDER COAT OF A TIN ALLOY, ON LEADS ONLY.
- OPTION: RoHS COMPLIANT ELECTROLESS NICKEL PLATE OF 100 MICROINCHES MINIMUM FOLLOWED BY A GOLD FLASH OF .99999 PURE 24 KARAT GOLD UP TO A MAX. OF 8 MICROINCHES.

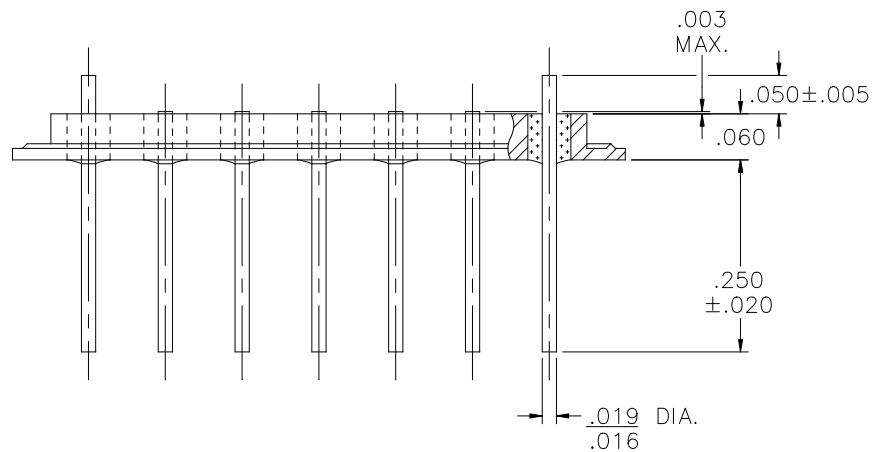

DRAWN BY: TINA MOSS 04-07-97		MATERIAL: SEE ABOVE		TOLERANCING PER ANSI Y14.5 .X ±.005 .XXX ±.005 .XX ±.005 ANG ±5° UNLESS OTHERWISE SPECIFIED		 6700 W. 47th TERR. MISSION, KS. 66203 TEL: 913-432-2487 FAX: 913-432-0570		
CHECKED BY: E.T.W. 04-07-97		APP. SPECS	SUPERSEDES	NEXT ASSY	SCALE: 4:1			FINISH: UNLESS OTHERWISE SPECIFIED
APPROVED BY:		TITLE: .498x.798 D.I.P. 14 PIN, P7G 4 PINS .050 PH. & REST FLUSH .250 LL.				FILE: UB00069B	PAGE 1 of 1	C