



REV	DESCRIPTION OF REVISION	E.C.N.	BY	APPROVED	DATE
F	UPDATE TO CAD	0010	E.T.W.	A.J.A.	10-27-95

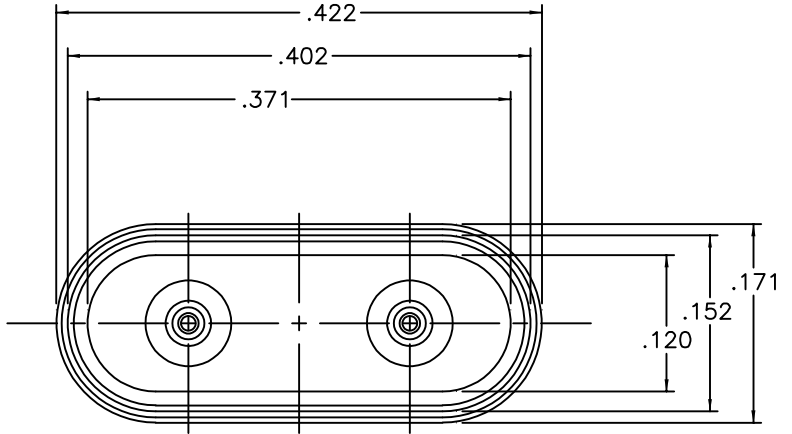

G	.250±.010
F	.095±.005
E	.125±.010
D	.156±.010
C	.172±.010
B	.187±.010
A	.238±.010
DASH	"A" DIM.

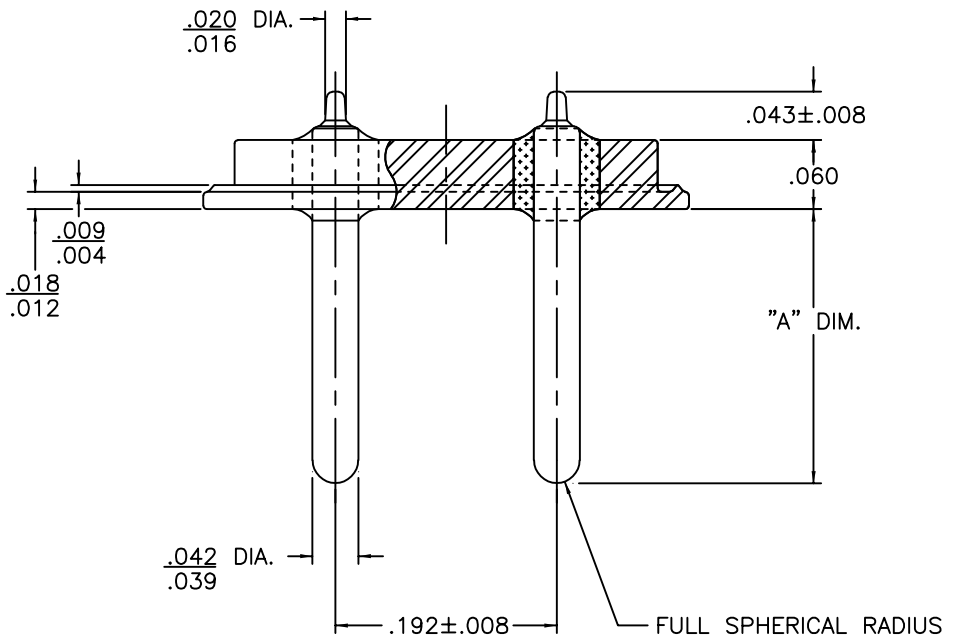

**MATERIAL:**

EYELET - 1010 C.R.S. OR EQUAL.  
 GLASS - 9013 OR EQUAL.  
 LEADS - ASTM F-30, 52 ALLOY.

**PLATING:**

1. ELECTROLESS NICKEL FINAL PLATE OF 100 MICROINCHES MINIMUM.
2. OPTIONAL SOLDER COAT ON LEADS ONLY PER MIL-STD QQ-S-571-D TIN LEAD ALLOY.
3. OPTIONAL GOLD FLASH .99999 PURE 24 KARAT GOLD UP TO A MAX. OF 8 MICROINCHES OVER THE ELECTROLESS NICKEL FINAL PLATE.

AMERICAN	RR-	EUROPEAN	ERR-

DRAWN BY: TINA MOSS 10-27-95	MATERIAL: SEE ABOVE	TOLERANCING PER ANSI Y14.5 .X ±.005 .XXX ±.005 .XX ±.005 ANG ±5° UNLESS OTHERWISE SPECIFIED		 Legacy Technologies Inc. 6700 W. 47th TERR. MISSION, KS. 66203 TEL: 913-432-2487 FAX: 913-432-0570
CHECKED BY: E.T.W. 10-27-95	APP. SPECS	SUPERSEDES	NEXT ASSY	
APPROVED BY: D.B. 10-27-95	TITLE: HC-50/U			FILE: SB00001
				PAGE 1 of 1