



# ELASTEC Turbidity Curtains

- Dredging Operations
- Marine Construction
- Remediation Projects

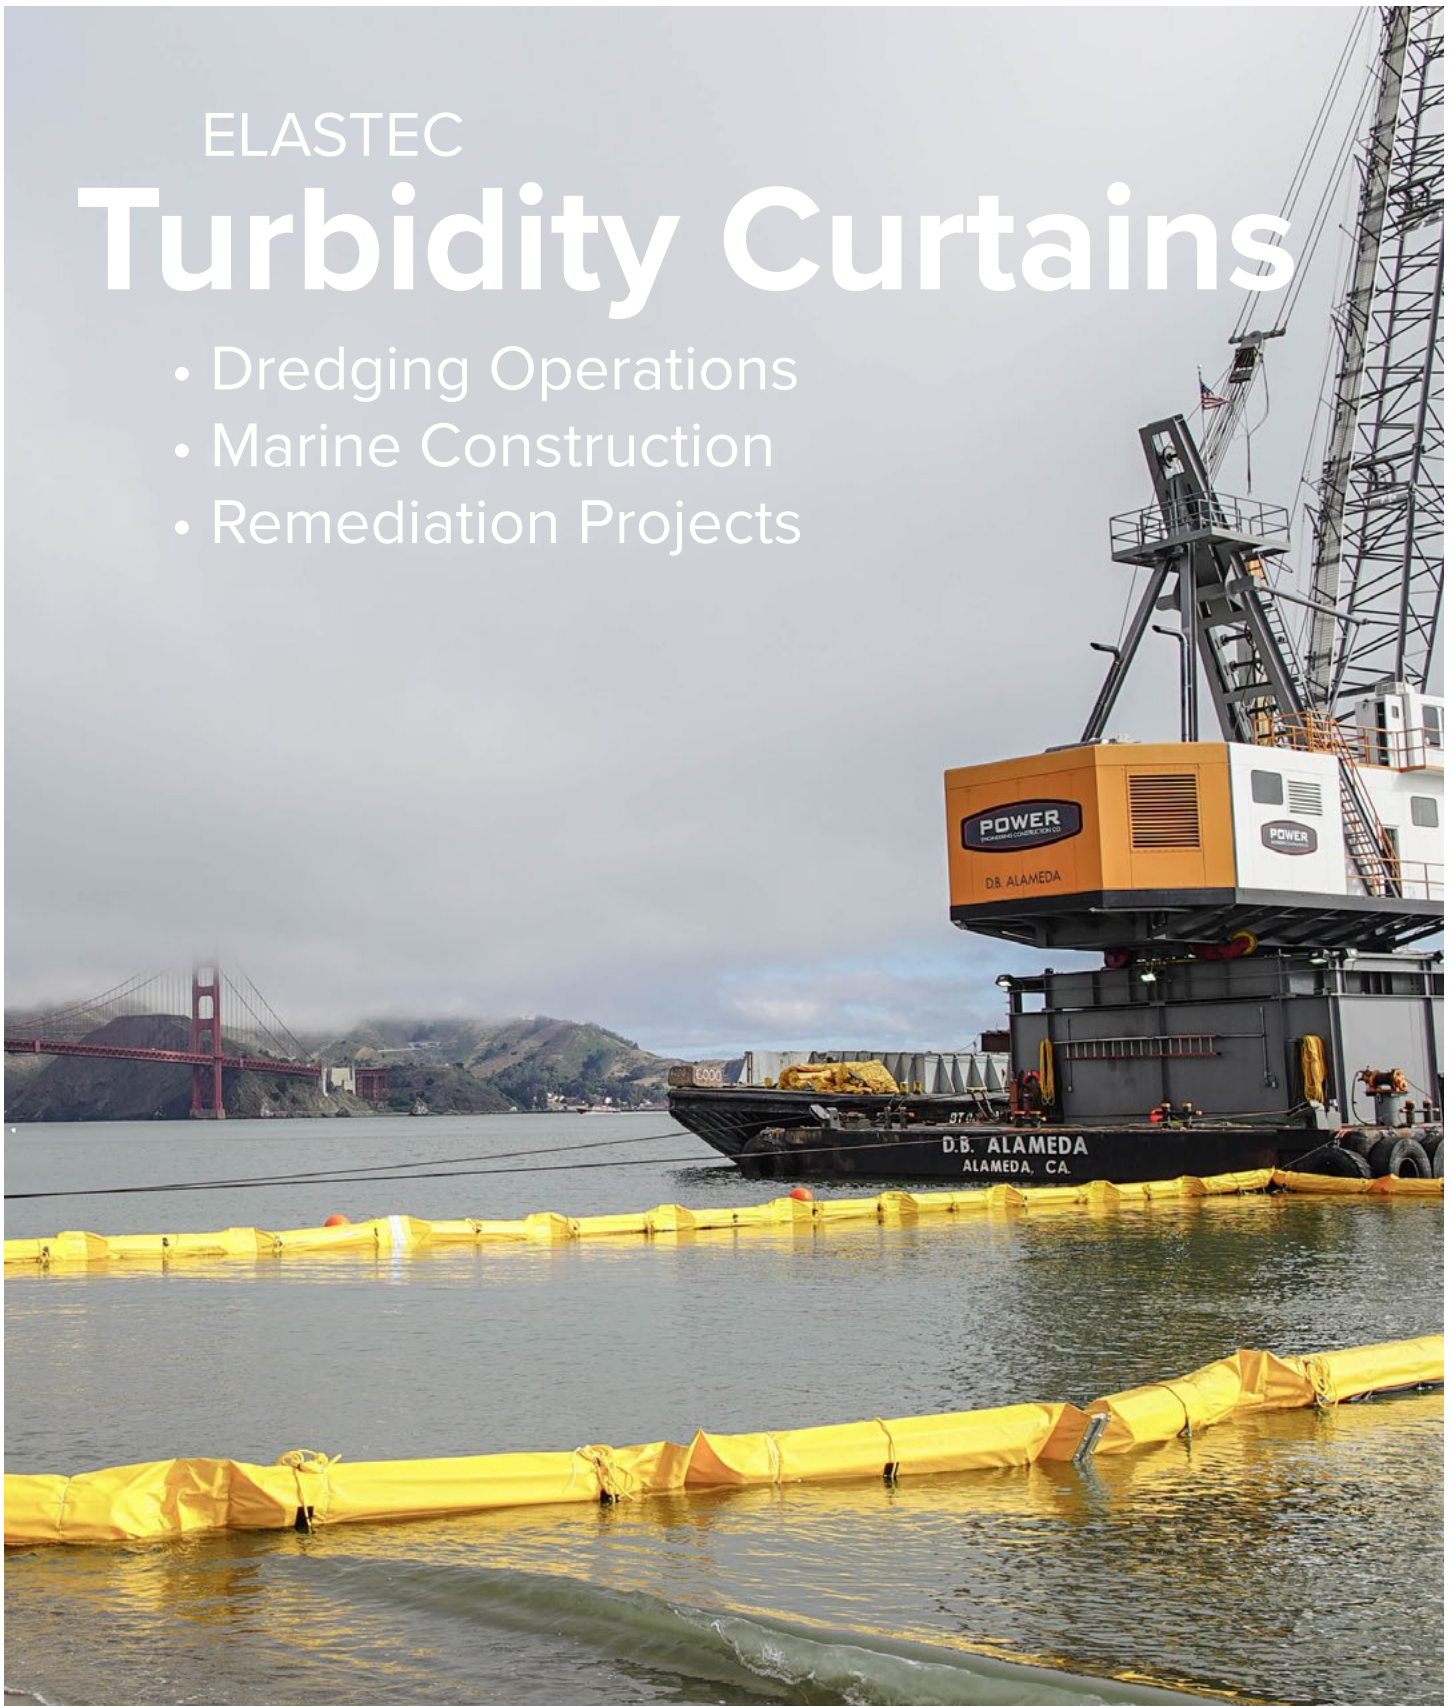


Oil Spill Equipment | Floating Barriers | Incinerators

### Stillwater Screen - Type I Light Duty Turbidity Curtain

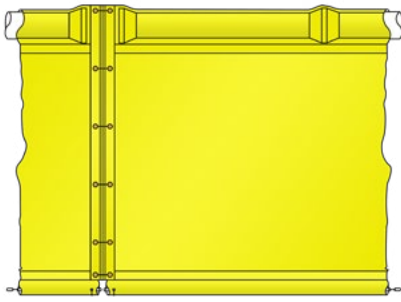


|                   |                                                       |
|-------------------|-------------------------------------------------------|
| Fabric            | 18 oz. vinyl laminated fabric                         |
| Size              | 6 inch / 15 cm up to 10 ft / 3 m depth                |
|                   | 8 inch / 20 cm - 11 ft / 3.3 m to 17 ft / 5 m depth   |
|                   | 12 inch / 30 cm - 18 ft / 5.4 m to 30 ft 9.14 m depth |
| Net Buoyancy      | 6 inch / 15 cm - 13 lb/ft / 19.2 kg/m                 |
|                   | 8 inch / 20 cm - 21 lb/ft / 31 kg/m                   |
|                   | 12 inch / 30 cm - 52 lb/ft / 76.8 kg/m                |
| Breaking Strength | 5,000 lb / 2,267 kg                                   |
| Ballast           | 1/4 inch / 6 mm galvanized chain                      |
| Available Depths  | 3 to 30 ft / .91 to 9.14 m                            |
| Length            | 100 ft / 30 m standard                                |

### Fastwater Screen - Type II Medium Duty Turbidity Curtain

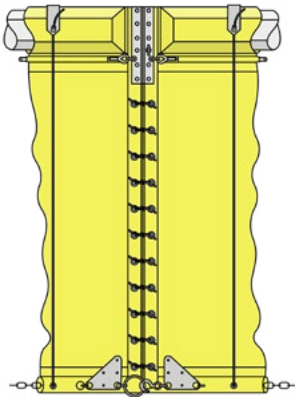

|                   |                                                      |
|-------------------|------------------------------------------------------|
| Fabric            | 22 oz. vinyl coated fabric                           |
| Size              | 8 inch / 20 cm up to 10 ft / 3 m depth               |
|                   | 12 inch / 30 cm - 11 ft / 3.3 m to 17 ft / 5 m depth |
| Net Buoyancy      | 6 inch / 15 cm - 13 lb/ft / 19.2 kg/m                |
|                   | 8 inch / 20 cm - 21 lb/ft / 31 kg/m                  |
|                   | 12 inch / 30 cm - 52 lb/ft / 76.8 kg/m               |
| Breaking Strength | 9,200 lb / 4,173 kg                                  |
| Ballast           | 5/16 inch / 8 mm galvanized chain                    |
| Available Depths  | 3 to 30 ft / .91 to 9.14 m                           |
| Length            | 100 ft / 30 m standard                               |

### Ruffwater Screen - Type III Heavy Duty Turbidity Curtain

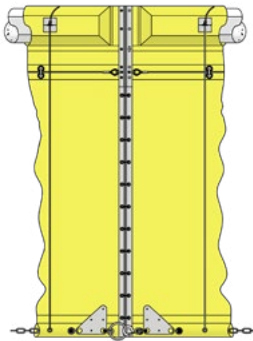

|                   |                                        |
|-------------------|----------------------------------------|
| Fabric            | 22 oz. vinyl coated fabric             |
| Size              | 12 inch / 30 cm                        |
| Net Buoyancy      | 6 inch / 15 cm - 13 lb/ft / 19.2 kg/m  |
|                   | 8 inch / 20 cm - 21 lb/ft / 31 kg/m    |
|                   | 12 inch / 30 cm - 52 lb/ft / 76.8 kg/m |
| Breaking Strength | 18,400 lb / 8,346 kg                   |
| Ballast           | 3/8 inch / 10 mm galvanized chain      |
| Available Depths  | 3 to 30 ft / .91 to 9.14 m             |
| Length            | 100 ft / 30 m standard                 |

*Alternate fabrics, flotation material and section lengths available upon request for all models.*



1309 West Main St  
Carmi, Illinois 62821, USA  
+1 (618) 382-2525  
www.elastec.com    elastec@elastec.com