



# ADDING WELCOME NEW DIMENSION TO AMERICA'S PREMIERE CONTRACT SPACES

Wayflor USA represents a commitment to the American market on the part of Waytex, an internationally recognized leader in luxury woven textiles. It means the texture and performance of our woven flooring is available how you want it and when you need it.

Get 2-week shipping on all the Wayflor products featured here—every pattern, every colorway. No waiting, no extra charge.

High performance flooring has never been so charismatic or innovative. Lay it in a fitness center, an airport or conference room. Wayflor welcomes even your most challenging environments.

Online or through your local WayflorUSA representative, more information is at your fingertips. Visit WayflorUSA.com

Front Cover: Twill Square | 5214 Envy

Mystic Plank | PMY6 Green with Envy

Detail at Left: Twill Square | 5217 Blue Sapphire



### TWILL SQUARE

Fashion's most enduring weave comes to floor's fore. Add a classic, tailored finish to any interior with Twill—perfect for drawing attention to soft furnishings, creating a sense of calm or elevating a casual space.

50cm x 50cm | RECOMMENDED INSTALLATIONS









5210 Shades of Grey



5211 Thicket



5212 Salt & Pepper



5213 Aged Parchment



5214 Envy



5217 Blue Sapphire



5219 Midnight Sky



### SHADOWCRETE SQUARE

There's no substitute for age when it comes to creating character—or is there? Shadowcrete uses subtle shifts of tint and shade for an intriguing, aged look, adding unmistakable presence to any space. Sunlight makes the effect even more dramatic.

50cm x 50cm | RECOMMENDED INSTALLATIONS









5SH6 Blank Canvas



5SH7 Grey Area



5SH8 Black and Blue



5SH9 Brownie Points



5SH10 In the Black



### MARBLERIDGE SQUARE

Set a fresh tone with this playful take on a classic stone pattern. Marbleridge is an unapologetically manmade choice that shows off the depths of its 3D construction in ways that surpass its natural inspiration.

50cm x 50cm | RECOMMENDED INSTALLATIONS










5MA1 Azul



5MA2 Emperador



5MA6 Venetian

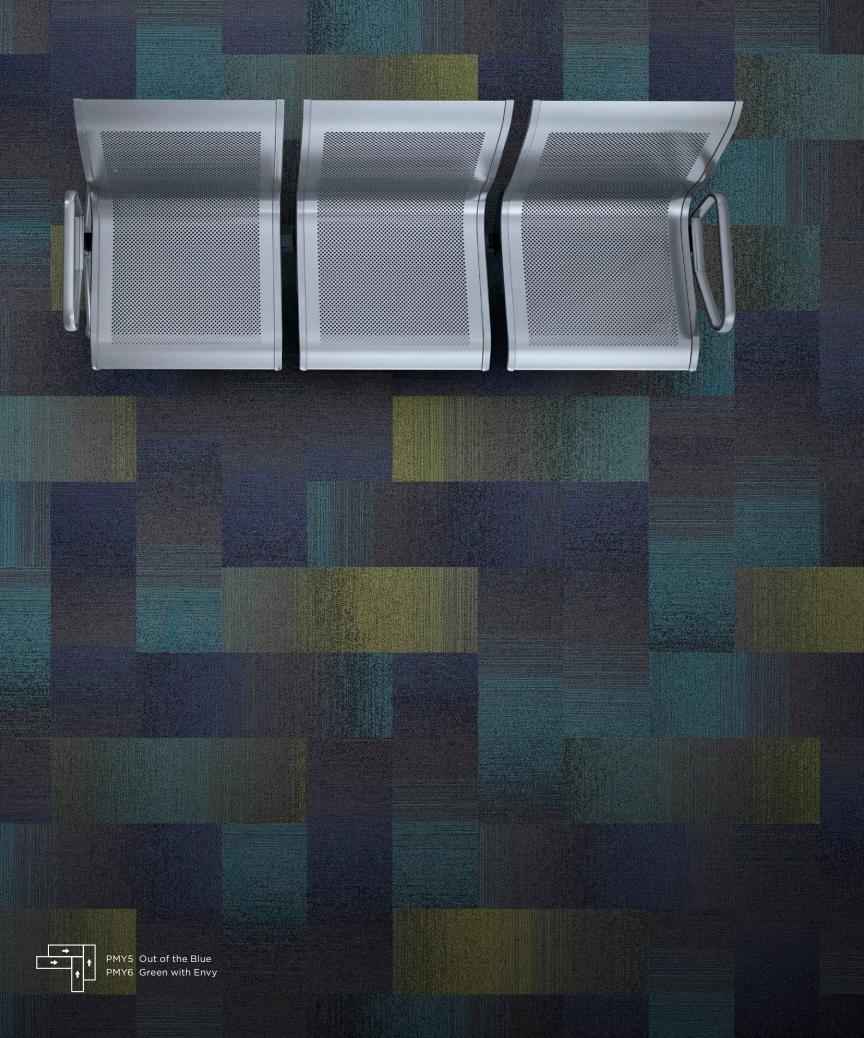

### MYSTIC PLANK

The classic jewel tones and neutrals of Mystic planks maximize the drama and depth of its woven surface. Lay it straight for an effortless gradient, or mix it up to add interest to a large space. A memorable choice for eclectic designs.

25cm x 75cm | RECOMMENDED INSTALLATIONS Patterns and colors vary from plank to plank.





PMY5 Out of the Blue



PMY6 Green with Envy




PMY7 Red Carpet Treatment

#### SHIPPING NOW AND INSTANTLY FRESH

Take your Wayflor Quick Ship designs to the next level with these EZ Design installation ideas.

#### 50cm x 50cm TILES


1	1	1	1	1	1	-	1	>	1	1	1		•	->	1	1	_	1	-	1	1	1	1	1	
1	1	1	1	1	->	1	-	1	->	1	1 1		> ·	<b>→</b>	1	1	T .	1	T .	1	1	H	1	1	+
1	1	1	1	1	1	-	1	->	1	->	-	- 1	H	1	->	1	T .	1	1	1	1	1	1	1	
1	1	1	1	1	->	1	-	1	->	->	-	- 1	t	1	->	1	T .	1	1	1	1	H	1	1	1
1	1	1	1	1	1	-	1	>	1	1	1 1		•	<b>→</b>	1	1	T .	1	T .	1	1	1	1	1	

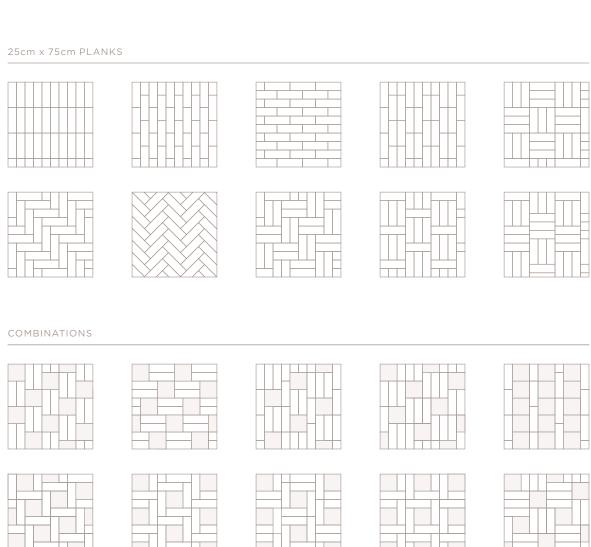

#### WITH EXTRA TIME THE SKY'S THE LIMIT

Set your imagination free. Wayflor offers geometric tile shapes to create innovative solutions in floor design. Or perhaps you have special backing requirements. With a little more time, your dreams can come true. Go to WayflorUSA.com and get started.

#### SHAPES AVAILABLE WITH EXTRA TIME

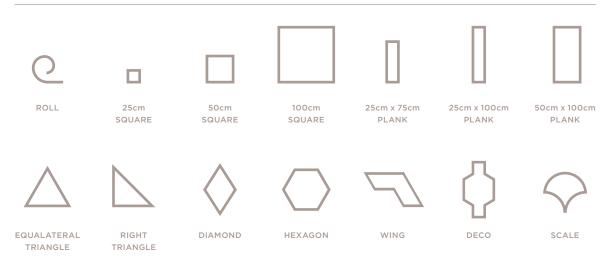




# PURSUING SUSTAINABILITY MEANS NEVER COMPROMISING.

For over fifty years, we've worked to perfect a continual cycle of environmental, social and economic improvements. The work continues.

As you'd expect, we source only the best environmentally low-impact materials to create beautiful products. We're also always exploring ways to eliminate manufacturing waste. Success is measured by our ability to reduce Wayflor's environmental footprint while improving quality. That's why we invite third parties to certify and monitor our pursuit of ever-higher standards.

By understanding what our clients require, we're better able to focus efforts improving our processes to meet the stringent global standards of today and surpass the challenges of tomorrow. We take community and communication very seriously.

Perhaps most important to our sustainability commitment is how our products perform over time. Products that maintain a "like new" appearance with vibrant color, stable structure and cleanability. After all, every year a floor is in service represents maximizing performance for you, even as it reduces pressure to consume new materials in manufacturing.

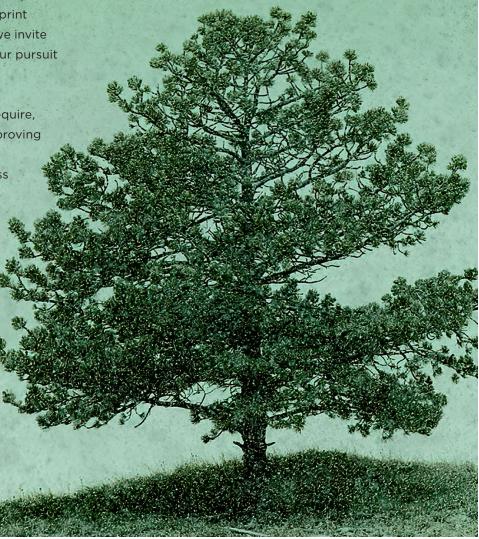


Phthalate Free · Heavy Traffic Rated · 100% Recyclable · Sound Absorbing Slip Resistant · Dimensionally Stable · Waterproof · Anti-fungal · Colorfast





Protecting Wayflor's distinctive depths from the grind of high traffic wear, you'll find EZ Care, the most durable and comprehensive coating for textured woven vinyl flooring. Developed by PPG alongside Wayflor, EZ Care creates a surface that cleans so easily and completely that there's really no comparison. EZ Care is Certified by Sanitized and carries the Greenguard Gold seal.

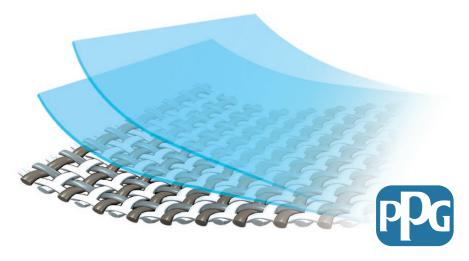




CERTIFIED BY SANITIZED

SWISS ANTIMICROBIAL TECHNOLOGY AVAILABLE FOR ALL WAYFLOR PRODUCTS



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSION UL.COM/GG





## SPECIFICATIONS

PATTERN	DESIGN CODE	DIMENSIONS	WOVEN THICKNESS/mm	BACKING THICKNESS/mm	WEIGHT kg/m²
Twill Square	5200	50cm x 50cm	3.30	3.0	3.80
Shadowcrete Square	5SH0	50cm x 50cm	3.28	3.0	3.90
Marbleridge Square	5MAO	50cm x 50cm	2.98	3.0	3.74
Mystic Plank	PMY0	25cm x 75cm	3.11	3.0	3.77

TESTING			
Classification		EN 685:2007	33 Heavy Commercial
Castor Chair Resistance		EN 985	Continuous Use
Residual Indentation	(J	EN 433:1994	0.08 mm
Dimensional Stability	K Z	EN 434:1994	0.05% (X + Y direction)
Curling		EN 434:1994	1.5 mm
Thermal Conductivity		EN 12667 (2001)	0.0416W/m.K
Thermal Resistance		EN 12667 (2001)	0.0639m².K/W
Assessment of Static Electrical Propensity	<b>1</b>	EN 1815:1997	< 2.0 kV
Acoustics		ISO 140-8:1997	ΔLw=14dB CI, Δ=-9dB
Colour Fastness to Light		ISO 105-802:1994	>6
Surface Flammability		ASTM D2859	Passes
Radiant Panel		ASTM E648	Passes Class I
Smoke Density (Flaming Mode)		ASTM E662	Passes
Fire Rating	B <sub>H</sub> -s1	EN 13501-1 : 2007 EN ISO 11925-2 EN ISO 9239-1	B <sub>ff</sub> -s1
Slip Resistance	The DS	EN 13893 DIN 51130 ASTM C1028	>0.3 R10 Dry: 0.73 Wet: 0.51
Mold Resistance	A. 1720 802.67	EN ISO 846 Section A JIS Z 2801:2010	Microscopic >99.99%
Formaldehyde Release	E1	EN 717-1	E1
Certification		EN 14041 : 2008	No WWVF-DOP-180519



