

**POPCORN 3.5 TURBO RECESSED**



**POPCORN 3.5 TURBO RECESSED**

**LUMINAIRE**

HIGH POWER-TO-SIZE RATIO  
 SUPER INTENSE 12W OR 16W LED LIGHT SOURCE  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 SCREWLESS FACEPLATE  
 OPTION OF RGBA, RGBW, TUNEABLE WHITE AVAILABLE  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS

**PERFORMANCE**

INTELLIMODE  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST

**FINISHES**

- BODY**
- 02 BLACK ALUMINIUM
  - 03 ELECTRO-POLISHED 316L STAINLESS STEEL
- TRIM**
- 01 DOUBLE-ANODISED ALUMINIUM
  - 02 BLACK ALUMINIUM
  - 03 ELECTRO-POLISHED 316L STAINLESS STEEL
  - 04 POLISHED COPPER

**PHOTOMETRY**

LUX @ / BEAM	10°	16°	29°	44°
1M	20616	11473	4172	1729
2M	5154	2870	1043	434
3M	2291	1274	462	189
4M	1288	714	259	105
5M	825	462	168	70
DELIVERED LUMENS	1422LM	1235LM	1027LM	871LM

TEST CONDITION: 2700K, 700MA, 16W, CLEAR GLASS, w/o VISUAL COMFORT



**LIGHT CONFIGURATOR** ENGINE: PC35R

**POWER**

- 12W (6 X 2W)
- 16W (8 X 2W)

**BEAM**

- 10°
- 16°
- 29°
- 44°
- 25°\*
- 50°\*

**CCT**

- 2700K
- 3000K
- 4000K
- 5000K
- BLUE
- OTHERS
- 2700K 5700K
- RGB 12W 25° / 50°
- RGBA/RGBW 16W 25° / 50°

**GLASS**

- CL CLEAR

**IP**

- IP20
- IP67
- IP68 (316L ONLY)

**BODY**

- 02 AL 0.9KG
- 03 316L SS 1.8KG

**TRIM**

- 01 AL
- 02 AL
- 03 316L SS
- 04 CU


**FACEPLATE**

- RT ROUND

**INCLUDED**

- / RECESSED
- o FOR IP67, NICHE S35 600MM CABLE LENGTH
- o FOR IP68, NICHE S35 w/ ENDCAP 3000MM CABLE LENGTH

- OPTIONS**
- / VISUAL COMFORT
    - DEEP (PG 136)
    - HONEYCOMB (PG 137)
  - / REMOTE DRIVER
    - VERSA (PG 147)
    - DRIVE (PG 148)
  - / IP68 CONNECTOR
    - 2 POLE
    - 4 POLE
    - 6 POLE

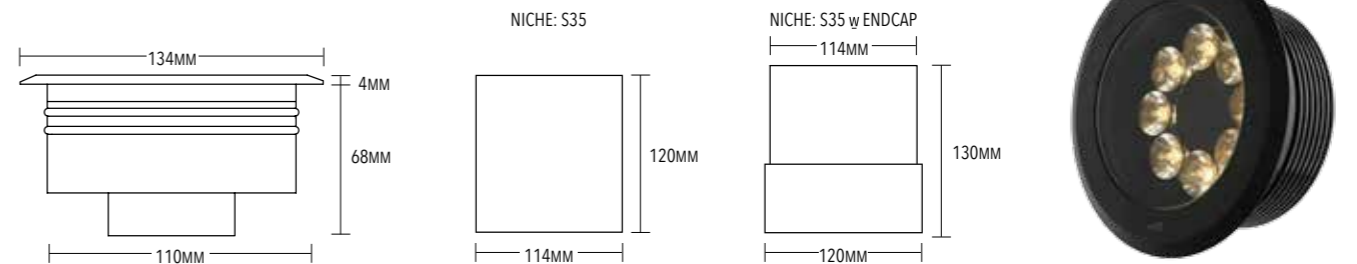

**POPCORN 3.5 TURBO RECESSED**

**POPCORN 3.5 TURBO**



**POPCORN 3.5 TURBO**

**LUMINAIRE**

HIGH POWER-TO-SIZE RATIO  
 SUPER INTENSE 12W OR 16W LED LIGHT SOURCE  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 VERSATILE MOUNTING SYSTEM  
 OPTION OF RGBA, RGBW, TUNEABLE WHITE AVAILABLE  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS

**PERFORMANCE**

INTELLIMODE  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST

**FINISHES**


CLASSIC 01 DOUBLE-ANODISED ALUMINIUM  
 02 BLACK ALUMINIUM  
 03 ELECTRO-POLISHED 316L STAINLESS STEEL  
 04 POLISHED COPPER

SPECIAL BY REQUEST

**PHOTOMETRY**

LUX @ / BEAM	10°	16°	29°	44°
1M	20616	11473	4172	1729
2M	5154	2870	1043	434
3M	2291	1274	462	189
4M	1288	714	259	105
5M	825	462	168	70
DELIVERED LUMENS	1422LM	1235LM	1027LM	871LM

TEST CONDITION: 2700K, 700MA, 16W, CLEAR GLASS, w/o VISUAL COMFORT



**LIGHT CONFIGURATOR** ENGINE: PC35S

**POWER**  12W (6 x 2W)  16W (8 x 2W)

**BEAM**  10°  16°  29°  44°

**CCT**  2700K  3000K  4000K  5000K  BLUE  OTHERS  2700K 5700K  RGB 12W 25°/50°  RGBA/RGBW 16W 25°/50°

**GLASS**  CL CLEAR


**IP**  IP20  IP67  IP68 (316L ONLY)

**FINISHES**  01 AL 0.9KG  02 AL 0.9KG  03 316L SS 1.8KG  04 CU 1.8KG

**INCLUDED**  U-BRACKET, 3000MM CABLE LENGTH

**OPTIONS**

<input type="checkbox"/> HOOD (PG 132)	<input type="checkbox"/> SPIKE (PG 140)	<input type="checkbox"/> REMOTE DRIVER
<input type="checkbox"/> SNOOT (PG 133)	<input type="checkbox"/> PLATE (PG 141)	<input type="checkbox"/> VERSA (PG 147)
<input type="checkbox"/> SNOOT w/o HOLES (PG 133)	<input type="checkbox"/> BASE (PG 141)	<input type="checkbox"/> DRIVE (PG 148)
<input type="checkbox"/> DARK (PG 134)	<input type="checkbox"/> STRAP ON w 1 ADAPTOR (PG 143)	<input type="checkbox"/> IP68 CONNECTOR
<input type="checkbox"/> HONEYCOMB (PG 137)	ADDITIONAL ADAPTOR QTY _____	<input type="checkbox"/> 2 POLE
		<input type="checkbox"/> 4 POLE
		<input type="checkbox"/> 6 POLE

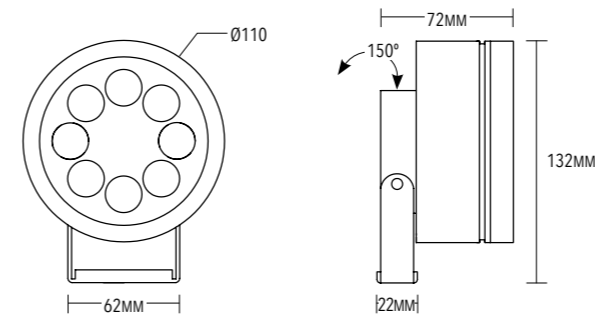

POPCORN 3S



POPCORN 3S

LUMINAIRE

SMALL AND COMPACT  
 SUPER INTENSE 8W SINGLE LED LIGHT SOURCE  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 VERSATILE MOUNTING SYSTEM  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS

PERFORMANCE

INTELLIMODE  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST


FINISHES

- CLASSIC
- 01 DOUBLE-ANODISED ALUMINIUM
  - 02 BLACK ALUMINIUM
  - 03 ELECTRO-POLISHED 316L STAINLESS STEEL
  - 04 POLISHED COPPER
- SPECIAL BY REQUEST

PHOTOMETRY

LUX @ / BEAM	16°	21°	26°	45°
1M	5258	2259	1990	903
2M	1314	565	497	226
3M	584	251	221	100
4M	329	141	124	56
5M	210	90	80	36
DELIVERED LUMENS	562LM	526LM	526LM	483LM

TEST CONDITION: 2700K, 700MA, 8W, CLEAR GLASS, w/o VISUAL COMFORT



LIGHT CONFIGURATOR ENGINE: PC3SS

POWER  4W  8W

BEAM  16°\*  21°  26°  45°  28°x49° \*10MM TALLER

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS


GLASS  CL CLEAR  FR FROSTED  HF HALF FROSTED  HB HALF BLACK

IP  IP20  IP67  IP68 (316L ONLY)

FINISHES  01 AL 0.6KG  02 AL 0.6KG  03 316L SS 1.2KG  04 CU 1.2KG

INCLUDED • U-BRACKET, 3000MM CABLE LENGTH

- OPTIONS
- |  |  |  |
|--|--|--|
| / VISUAL COMFORT                                       | / VERSATILE MOUNTING                                   | / REMOTE DRIVER                                |
| <input type="checkbox"/> HOOD (PG 132)                 | <input type="checkbox"/> SPIKE (PG 140)                | <input type="checkbox"/> VERSA (PG 147)        |
| <input type="checkbox"/> SNOOT (PG 133)                | <input type="checkbox"/> PLATE (PG 141)                | <input type="checkbox"/> DRIVE (PG 148)        |
| <input type="checkbox"/> SNOOT w/o HOLES (PG 133)      | <input type="checkbox"/> BASE (PG 141)                 | <input type="checkbox"/> CV CONVERTER (PG 151) |
| <input type="checkbox"/> DARK (PG 134)                 | <input type="checkbox"/> WONDER BAR 600MM (PG 142)     |  |
| <input type="checkbox"/> DARK w BLACKOUT RING (PG 134) | <input type="checkbox"/> WONDER BAR 1200MM (PG 142)    | / IP68 CONNECTOR                               |
| <input type="checkbox"/> HONEYCOMB (PG 137)            | <input type="checkbox"/> STRAP ON w 1 ADAPTOR (PG 143) | <input type="checkbox"/> 2 POLE                |
|  | ADDITIONAL ADAPTOR QTY _____                           | <input type="checkbox"/> 4 POLE                |

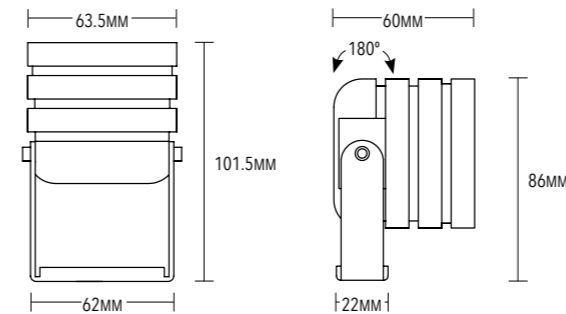



**POPCORN 3S INTEGRATED**



**POPCORN 3S INTEGRATED**

**LUMINAIRE**

SETBACK LIGHT SOURCE FOR VISUAL COMFORT  
 INTEGRATED NON-DIMMABLE DRIVER  
 SUPER INTENSE 8W SINGLE LED LIGHT SOURCE  
 VERSATILE MOUNTING SYSTEM  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS

**PERFORMANCE**

HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI >80, HIGHER CRI AVAILABLE UPON REQUEST

**FINISHES**


CLASSIC 01 DOUBLE-ANODISED ALUMINIUM  
 02 BLACK ALUMINIUM

SPECIAL BY REQUEST

**PHOTOMETRY**

LUX @ / BEAM	16°	21°	26°	45°
1M	5258	2259	1990	903
2M	1314	565	497	226
3M	584	251	221	100
4M	329	141	124	56
5M	210	90	80	36
DELIVERED LUMENS	562LM	526LM	526LM	483LM

TEST CONDITION: 2700K, 700MA, 8W, CLEAR GLASS



**LIGHT CONFIGURATOR** ENGINE: PC3SI

POWER  4W  8W

BEAM  16°  21°  26°  45°

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS


GLASS  CL CLEAR

IP  IP20  IP67

FINISHES  01 AL 1.3KG  02 AL 1.3KG

INCLUDED  INTEGRATED NON-DIMMABLE DRIVER  U-BRACKET, 3000MM CABLE LENGTH

- OPTIONS / VERSATILE MOUNTING
- SPIKE (PG 140)
  - PLATE (PG 141)
  - BASE (PG 141)
  - WONDER BAR 600MM (PG 142)
  - STRAP ON w 1 ADAPTOR (PG 143)
  - ADDITIONAL ADAPTOR QTY \_\_\_\_\_

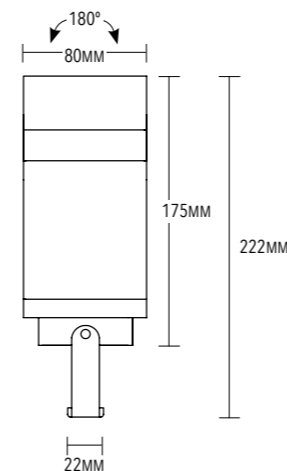

**POPCORN 3S RECESSED**



**POPCORN 3S RECESSED**

**LUMINAIRE**

SUPER INTENSE 8W SINGLE LED LIGHT SOURCE  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 HIGH LIGHT OUTPUT UP TO 96W PER METER  
 SCREWLESS FACEPLATE  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS  
 POPCORN SEQUEL - PINHOLES AND ADJUSTABLE COLLECTION

**PERFORMANCE**

INTELLIMODE  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST

**FINISHES**

- BODY 02 BLACK ALUMINIUM
- BODY 03 ELECTRO-POLISHED 316L STAINLESS STEEL
- CLASSIC TRIM 01 DOUBLE-ANODISED ALUMINIUM
- CLASSIC TRIM 02 BLACK ALUMINIUM
- CLASSIC TRIM 03 ELECTRO-POLISHED 316L STAINLESS STEEL
- CLASSIC TRIM 04 POLISHED COPPER
- SPECIAL TRIM 05 WHITE POWDER COATED ALUMINIUM
- SPECIAL TRIM 06 'TITANIUM GREY' ALUMINIUM
- SPECIAL TRIM 07 'GRAPHITE BLACK' ALUMINIUM
- SPECIAL TRIM 08 BLACK 316L STAINLESS STEEL

**PHOTOMETRY**

LUX @ / BEAM	16°	21°	26°	45°
1M	5258	2259	1990	903
2M	1314	565	497	226
3M	584	251	221	100
4M	329	141	124	56
5M	210	90	80	36
DELIVERED LUMENS	562LM	526LM	526LM	483LM

TEST CONDITION: 2700K, 700MA, 8W, CLEAR GLASS, w/o VISUAL COMFORT

**LIGHT CONFIGURATOR** ENGINE: PC3SR

POWER  4W  8W

BEAM  16°\*  21°  26°  45°  28°x49°\*\* \* 10MM DEEPER \*\* APPLICABLE FOR ROUND TRIM ONLY

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS

GLASS  CL CLEAR  FR FROSTED

IP  IP20  IP67  IP68 (316L ONLY)

BODY  02 AL 0.7KG  03 316L SS 1.4KG

TRIM  01 AL  02 AL  03 316L SS  04 CU  05 AL  06 AL  07 AL  08 316L SS


FACEPLATE  RT ROUND  ST SQUARE PG145  3T SIXSOME 250MM PG144  6T SIXSOME 500MM PG144

INCLUDED / CEILING RECESSED / RECESSED  
 WINGS, 300MM CABLE LENGTH (AL ONLY)  FOR IP67, NICHE S3 600MM CABLE LENGTH  
  $\phi = 69MM$   FOR IP68, NICHE S3 w/ ENDCAP 3000MM CABLE LENGTH

**OPTIONS**

- / VISUAL COMFORT
  - SEMI DEEP (PG 135)
  - DEEP (PG 136)
  - DEEP w/ BLACKOUT RING (PG 136)
  - HONEYCOMB (PG 137)
- / VERSATILE MOUNTING
  - POP UP (PG 145)
- / REMOTE DRIVER
  - VERSA (PG 147)
  - DRIVE (PG 148)
  - CV CONVERTER (PG 151)
- / IP68 CONNECTOR
  - 2 POLE
  - 4 POLE

side cable entry (4W only), height 50mm

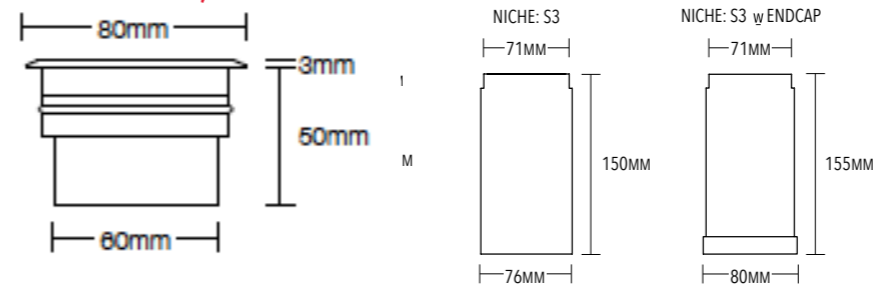

**POPCORN 3S RECESSED**



**POPCORN 3S RECESSED**

**LUMINAIRE**

SUPER INTENSE 8W SINGLE LED LIGHT SOURCE  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 HIGH LIGHT OUTPUT UP TO 96W PER METER  
 SCREWLESS FACEPLATE  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS  
 POPCORN SEQUEL - PINHOLES AND ADJUSTABLE COLLECTION

**PERFORMANCE**

INTELLIMODE  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST

**FINISHES**

- BODY 02 BLACK ALUMINIUM
- BODY 03 ELECTRO-POLISHED 316L STAINLESS STEEL
- CLASSIC TRIM 01 DOUBLE-ANODISED ALUMINIUM
- CLASSIC TRIM 02 BLACK ALUMINIUM
- CLASSIC TRIM 03 ELECTRO-POLISHED 316L STAINLESS STEEL
- CLASSIC TRIM 04 POLISHED COPPER
- SPECIAL TRIM 05 WHITE POWDER COATED ALUMINIUM
- SPECIAL TRIM 06 'TITANIUM GREY' ALUMINIUM
- SPECIAL TRIM 07 'GRAPHITE BLACK' ALUMINIUM
- SPECIAL TRIM 08 BLACK 316L STAINLESS STEEL

**PHOTOMETRY**

LUX @ / BEAM	16°	21°	26°	45°
1M	5258	2259	1990	903
2M	1314	565	497	226
3M	584	251	221	100
4M	329	141	124	56
5M	210	90	80	36
DELIVERED LUMENS	562LM	526LM	526LM	483LM

TEST CONDITION: 2700K, 700MA, 8W, CLEAR GLASS, w/o VISUAL COMFORT



**LIGHT CONFIGURATOR** ENGINE: PC3SR

POWER  4W  8W

BEAM  16°\*  21°  26°  45°  28°x49°\*\* \* 10MM DEEPER \*\* APPLICABLE FOR ROUND TRIM ONLY

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS

GLASS  CL CLEAR  FR FROSTED

IP  IP20  IP67  IP68 (316L ONLY)


BODY  02 AL 0.7KG  03 316L SS 1.4KG

TRIM  01 AL  02 AL  03 316L SS  04 CU  05 AL  06 AL  07 AL  08 316L SS

FACEPLATE  RT ROUND  ST SQUARE PG145  3T SIXSOME 250MM PG144  6T SIXSOME 500MM PG144

INCLUDED / CEILING RECESSED / RECESSED  
 WINGS, 300MM CABLE LENGTH (AL ONLY)  FOR IP67, NICHE S3 600MM CABLE LENGTH  
 = 69MM  FOR IP68, NICHE S3 w/ ENDCAP 3000MM CABLE LENGTH

- OPTIONS
- / VISUAL COMFORT
    - SEMI DEEP (PG 135)
    - DEEP (PG 136)
    - DEEP w/ BLACKOUT RING (PG 136)
    - HONEYCOMB (PG 137)
  - / VERSATILE MOUNTING
    - POP UP (PG 145)
  - / REMOTE DRIVER
    - VERSA (PG 147)
    - DRIVE (PG 148)
    - CV CONVERTER (PG 151)
  - / IP68 CONNECTOR
    - 2 POLE
    - 4 POLE

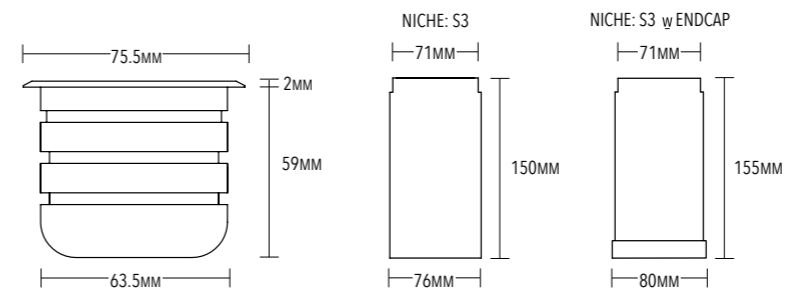



**POPCORN 3S**



**POPCORN 3S**

**LUMINAIRE**

SMALL AND COMPACT  
 SUPER INTENSE 8W SINGLE LED LIGHT SOURCE  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 VERSATILE MOUNTING SYSTEM  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS

**PERFORMANCE**

INTELLIMODE  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST


**FINISHES**

- CLASSIC
- 01 DOUBLE-ANODISED ALUMINIUM
  - 02 BLACK ALUMINIUM
  - 03 ELECTRO-POLISHED 316L STAINLESS STEEL
  - 04 POLISHED COPPER
- SPECIAL BY REQUEST

**PHOTOMETRY**

LUX @ / BEAM	16°	21°	26°	45°
1M	5258	2259	1990	903
2M	1314	565	497	226
3M	584	251	221	100
4M	329	141	124	56
5M	210	90	80	36
DELIVERED LUMENS	562LM	526LM	526LM	483LM

TEST CONDITION: 2700K, 700MA, 8W, CLEAR GLASS, w/o VISUAL COMFORT



**LIGHT CONFIGURATOR** ENGINE: PC3SS

POWER  4W  8W

BEAM  16°\*  21°  26°  45°  28°x49° \*10MM TALLER

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS

GLASS  CL CLEAR  FR FROSTED  HF HALF FROSTED  HB HALF BLACK

IP  IP20  IP67  IP68 (316L ONLY)

FINISHES  01 AL 0.6KG  02 AL 0.6KG  03 316L SS 1.2KG  04 CU 1.2KG

INCLUDED • U-BRACKET, 3000MM CABLE LENGTH

- OPTIONS
- |  |  |  |
|--|--|--|
| / VISUAL COMFORT                                       | / VERSATILE MOUNTING                                   | / REMOTE DRIVER                                |
| <input type="checkbox"/> HOOD (PG 132)                 | <input type="checkbox"/> SPIKE (PG 140)                | <input type="checkbox"/> VERSA (PG 147)        |
| <input type="checkbox"/> SNOOT (PG 133)                | <input type="checkbox"/> PLATE (PG 141)                | <input type="checkbox"/> DRIVE (PG 148)        |
| <input type="checkbox"/> SNOOT w/o HOLES (PG 133)      | <input type="checkbox"/> BASE (PG 141)                 | <input type="checkbox"/> CV CONVERTER (PG 151) |
| <input type="checkbox"/> DARK (PG 134)                 | <input type="checkbox"/> WONDER BAR 600MM (PG 142)     |  |
| <input type="checkbox"/> DARK w BLACKOUT RING (PG 134) | <input type="checkbox"/> WONDER BAR 1200MM (PG 142)    | / IP68 CONNECTOR                               |
| <input type="checkbox"/> HONEYCOMB (PG 137)            | <input type="checkbox"/> STRAP ON w 1 ADAPTOR (PG 143) | <input type="checkbox"/> 2 POLE                |
|  | ADDITIONAL ADAPTOR QTY _____                           | <input type="checkbox"/> 4 POLE                |

