

**POPCORN 2 RECESSED**



**POPCORN 2 RECESSED**

**LUMINAIRE**

SUPER SMALL & COMPACT  
 INTENSE LIGHT PERFORMANCE  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 SCREWLESS FACEPLATE  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS  
 POPCORN SEQUEL - EYELIDS, PINHOLES AND  
 ADJUSTABLE COLLECTION

**PERFORMANCE**

INTELLIMODE OPTION  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80


**FINISHES**

- BODY** 02 BLACK ALUMINIUM  
 03 ELECTRO-POLISHED 316L STAINLESS STEEL
- CLASSIC** 01 DOUBLE-ANODISED ALUMINIUM  
**TRIM** 02 BLACK ALUMINIUM  
 03 ELECTRO-POLISHED 316L STAINLESS STEEL  
 04 POLISHED COPPER
- SPECIAL** 05 WHITE POWDER COATED ALUMINIUM  
**TRIM** 06 'TITANIUM GREY' ALUMINIUM  
 07 'GRAPHITE BLACK' ALUMINIUM  
 08 BLACK 316L STAINLESS STEEL

**PHOTOMETRY**

LUX @ / BEAM	10°	25°	50°
1M	430	301	199
2M	115	81	50
3M	51	36	22
4M	29	20	12
5M	18	13	8
DELIVERED LUMENS	107LM	118LM	130LM

TEST CONDITION: 2700K, 700MA, 2W, CLEAR GLASS, w/o VISUAL COMFORT



**LIGHT CONFIGURATOR** ENGINE: PC2AR

POWER  1W  2W  INTELLIMODE (12MM DEEPER)

BEAM  10°  25°  50°  120°

CCT  2700K  3000K  4000K  5000K  AMBER  BLUE  OTHERS  RGB \* \*25° / 50° ONLY

GLASS  CL CLEAR  FR FROSTED  HF HALF FROSTED  HB HALF BLACK

IP  IP20  IP67  IP68 (316L ONLY)


BODY  02 AL 0.2KG  03 316L SS 0.3KG

TRIM  01 AL  02 AL  03 316L SS  04 CU  05 AL  06 AL  07 AL  08 316L SS

FACEPLATE  RT ROUND  ST SQUARE PG145  3T SIXSOME 250MM PG144  6T SIXSOME 500MM PG144

INCLUDED / CEILING RECESSED / RECESSED  
 WINGS, 300MM CABLE LENGTH (AL ONLY)  FOR IP67, NICHE S1 600MM CABLE LENGTH  
  $\frac{1}{4}$  = 44MM  FOR IP68, NICHE F1 w ENDCAP 3000MM CABLE LENGTH

- OPTIONS** / VISUAL COMFORT / REMOTE DRIVER / IP68 CONNECTOR
- SEMI DEEP (PG 135)
  - DEEP (PG 136)
  - DEEP w BLACKOUT RING (PG 136)
  - HONEYCOMB (PG 137)
  - VERSA (PG 147)
  - DRIVE (PG 148)
  - CV CONVERTER (PG 151)
  - 2 POLE
  - 4 POLE

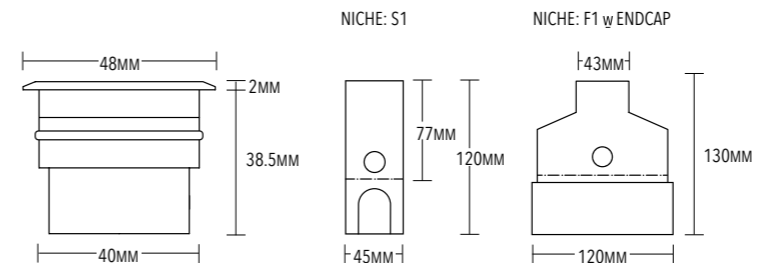

options: side cable entry 45mm depth



**POPCORN 2 RECESSED**



**POPCORN 2 RECESSED**

**LUMINAIRE**

SUPER SMALL & COMPACT  
 INTENSE LIGHT PERFORMANCE  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 SCREWLESS FACEPLATE  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS  
 POPCORN SEQUEL - EYELIDS, PINHOLES AND  
 ADJUSTABLE COLLECTION

**PERFORMANCE**

INTELLIMODE OPTION  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80


**FINISHES**

- BODY** 02 BLACK ALUMINIUM  
 03 ELECTRO-POLISHED 316L STAINLESS STEEL
- CLASSIC** 01 DOUBLE-ANODISED ALUMINIUM  
**TRIM** 02 BLACK ALUMINIUM  
 03 ELECTRO-POLISHED 316L STAINLESS STEEL  
 04 POLISHED COPPER
- SPECIAL** 05 WHITE POWDER COATED ALUMINIUM  
**TRIM** 06 'TITANIUM GREY' ALUMINIUM  
 07 'GRAPHITE BLACK' ALUMINIUM  
 08 BLACK 316L STAINLESS STEEL

**PHOTOMETRY**

LUX @ / BEAM	10°	25°	50°
1M	430	301	199
2M	115	81	50
3M	51	36	22
4M	29	20	12
5M	18	13	8
DELIVERED LUMENS	107LM	118LM	130LM

TEST CONDITION: 2700K, 700MA, 2W, CLEAR GLASS, w/o VISUAL COMFORT



**LIGHT CONFIGURATOR** ENGINE: PC2AR

POWER  1W  2W  INTELLIMODE (12MM DEEPER)

BEAM  10°  25°  50°  120°

CCT  2700K  3000K  4000K  5000K  AMBER  BLUE  OTHERS  RGB \* \*25° / 50° ONLY

GLASS  CL CLEAR  FR FROSTED  HF HALF FROSTED  HB HALF BLACK

IP  IP20  IP67  IP68 (316L ONLY)


BODY  02 AL 0.2KG  03 316L SS 0.3KG

TRIM  01 AL  02 AL  03 316L SS  04 CU  05 AL  06 AL  07 AL  08 316L SS

FACEPLATE  RT ROUND  ST SQUARE PG145  3T SIXSOME 250MM PG144  6T SIXSOME 500MM PG144

INCLUDED / CEILING RECESSED / RECESSED  
 WINGS, 300MM CABLE LENGTH (AL ONLY)  FOR IP67, NICHE S1 600MM CABLE LENGTH  
  $\frac{1}{4}$ " = 44MM  FOR IP68, NICHE F1 w/ ENDCAP 3000MM CABLE LENGTH

- OPTIONS**
- / VISUAL COMFORT
    - SEMI DEEP (PG 135)
    - DEEP (PG 136)
    - DEEP w/ BLACKOUT RING (PG 136)
    - HONEYCOMB (PG 137)
  - / REMOTE DRIVER
    - VERSA (PG 147)
    - DRIVE (PG 148)
    - CV CONVERTER (PG 151)
  - / IP68 CONNECTOR
    - 2 POLE
    - 4 POLE

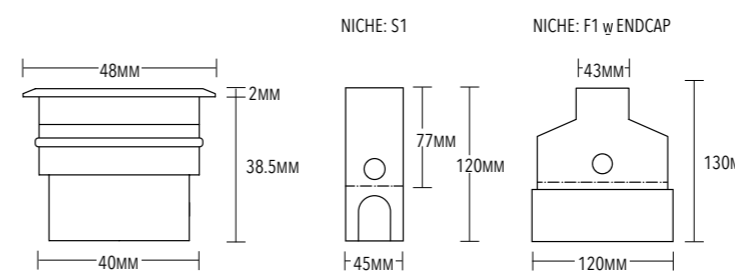

POPCORN 2 TURBO INTEGRATED



POPCORN 2 TURBO INTEGRATED

LUMINAIRE

SETBACK LIGHT SOURCE FOR VISUAL COMFORT  
 INTEGRATED NON-DIMMABLE DRIVER  
 SUPER INTENSE 2W SINGLE LED LIGHT SOURCE  
 VERSATILE MOUNTING SYSTEM  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS

PERFORMANCE

HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST

FINISHES


CLASSIC 01 DOUBLE-ANODISED ALUMINIUM  
 02 BLACK ALUMINIUM

SPECIAL BY REQUEST

PHOTOMETRY

LUX @ / BEAM	10°	16°	29°	44°
1M	2786	1639	596	247
2M	696	410	149	62
3M	310	182	66	27
4M	174	102	37	15
5M	111	66	24	10
DELIVERED LUMENS	202LM	190LM	158LM	134LM

TEST CONDITION: 2700K, 700MA, 2W, CLEAR GLASS



LIGHT CONFIGURATOR ENGINE: PC2TI

POWER  2W

BEAM  10°  16°  29°  44°

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS


GLASS  CL CLEAR

IP  IP20  IP67

FINISHES  01 AL 0.6KG  02 AL 0.6KG

INCLUDED  INTEGRATED NON-DIMMABLE DRIVER  U-BRACKET, 3000MM CABLE LENGTH

- OPTIONS / VERSATILE MOUNTING
- SPIKE (PG 140)
  - PLATE (PG 141)
  - BASE (PG 141)
  - WONDER BAR 600MM (PG 142)
  - WONDER BAR 1200MM (PG 142)
  - STRAP ON w 1 ADAPTOR (PG 143)
  - ADDITIONAL ADAPTOR QTY \_\_\_\_\_

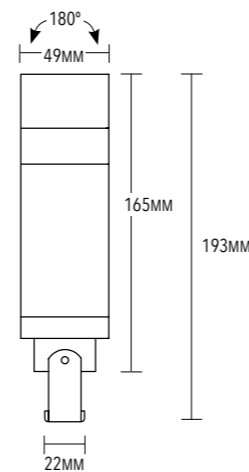

**POPCORN 2 TURBO RECESSED**



**POPCORN 2 TURBO RECESSED**

**LUMINAIRE**

SUPER SMALL AND COMPACT  
 SUPER INTENSE 2W SINGLE LED LIGHT SOURCE  
 HIGH POWER-TO-SIZE RATIO  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 SCREWLESS FACEPLATE  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS  
 POPCORN SEQUEL - EYELIDS, PINHOLES AND  
 ADJUSTABLE COLLECTION

**PERFORMANCE**

INTELLIMODE OPTION  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST

**FINISHES**

- |              |    |                                       |
|--------------|----|---------------------------------------|
| BODY         | 02 | BLACK ALUMINIUM                       |
|              | 03 | ELECTRO-POLISHED 316L STAINLESS STEEL |
| CLASSIC TRIM | 01 | DOUBLE-ANODISED ALUMINIUM             |
|              | 02 | BLACK ALUMINIUM                       |
|              | 03 | ELECTRO-POLISHED 316L STAINLESS STEEL |
|              | 04 | POLISHED COPPER                       |
| SPECIAL TRIM | 05 | WHITE POWDER COATED ALUMINIUM         |
|              | 06 | 'TITANIUM GREY' ALUMINIUM             |
|              | 07 | 'GRAPHITE BLACK' ALUMINIUM            |
|              | 08 | BLACK 316L STAINLESS STEEL            |

**PHOTOMETRY**

LUX @ BEAM	10°	16°	29°	44°	12°X54°
1M	2786	1639	596	247	682
2M	696	410	149	62	171
3M	310	182	66	27	76
4M	174	102	37	15	43
5M	111	66	24	10	27
DELIVERED LUMENS	202LM	190LM	158LM	134LM	161LM

TEST CONDITION: 2700K, 700MA, 2W, CLEAR GLASS, w/o VISUAL COMFORT



**LIGHT CONFIGURATOR** ENGINE: PC2TR

POWER  2W  INTELLIMODE (12MM DEEPER)

BEAM  10°  16°  29°  44°  12°X54°\* \*ONLY FOR ROUND TRIM

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS

GLASS  CL CLEAR  FR FROSTED  HF HALF FROSTED  HB HALF BLACK

IP  IP20  IP67  IP68 (316L ONLY)

BODY  02 AL 0.2KG  03 316L SS 0.3KG


TRIM  01 AL  02 AL  03 316L SS  04 CU  05 AL  06 AL  07 AL  08 316L SS

FACEPLATE  RT ROUND  ST SQUARE PG145  3T SIXSOME 250MM PG144  6T SIXSOME 500MM PG144

INCLUDED / CEILING RECESSED / RECESSED

- WINGS, 300MM CABLE LENGTH (AL ONLY)  $\approx$  44MM
- FOR IP67, NICHE S1 600MM CABLE LENGTH
- FOR IP68, NICHE F1 w/ ENDCAP 3000MM CABLE LENGTH

- OPTIONS
- |                                                                                                                                                                 |                                                                  |                                                                                                                                                |                                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>SEMI DEEP (PG 135)</li> <li>DEEP (PG 136)</li> <li>DEEP w/ BLACKOUT RING (PG 136)</li> <li>HONEYCOMB (PG 137)</li> </ul> | <ul style="list-style-type: none"> <li>VISUAL COMFORT</li> </ul> | <ul style="list-style-type: none"> <li>REMOTE DRIVER</li> <li>VERSA (PG 147)</li> <li>DRIVE (PG 148)</li> <li>CV CONVERTER (PG 151)</li> </ul> | <ul style="list-style-type: none"> <li>IP68 CONNECTOR</li> <li>2 POLE</li> <li>4 POLE</li> </ul> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|

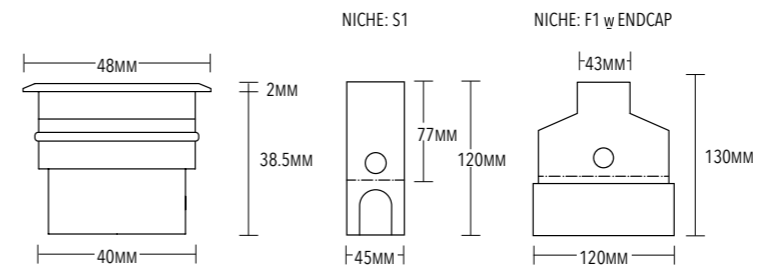

OPTIONS: side cable entry 45mm depth



**POPCORN 2 TURBO RECESSED**



**POPCORN 2 TURBO RECESSED**

**LUMINAIRE**

SUPER SMALL AND COMPACT  
 SUPER INTENSE 2W SINGLE LED LIGHT SOURCE  
 HIGH POWER-TO-SIZE RATIO  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 SCREWLESS FACEPLATE  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS  
 POPCORN SEQUEL - EYELIDS, PINHOLES AND  
 ADJUSTABLE COLLECTION

**PERFORMANCE**

INTELLIMODE OPTION  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST

**FINISHES**

- BODY 02 BLACK ALUMINIUM
- BODY 03 ELECTRO-POLISHED 316L STAINLESS STEEL
- CLASSIC TRIM 01 DOUBLE-ANODISED ALUMINIUM
- CLASSIC TRIM 02 BLACK ALUMINIUM
- CLASSIC TRIM 03 ELECTRO-POLISHED 316L STAINLESS STEEL
- CLASSIC TRIM 04 POLISHED COPPER
- SPECIAL TRIM 05 WHITE POWDER COATED ALUMINIUM
- SPECIAL TRIM 06 'TITANIUM GREY' ALUMINIUM
- SPECIAL TRIM 07 'GRAPHITE BLACK' ALUMINIUM
- SPECIAL TRIM 08 BLACK 316L STAINLESS STEEL

**PHOTOMETRY**

LUX @ / BEAM	10°	16°	29°	44°	12°x54°
1M	2786	1639	596	247	682
2M	696	410	149	62	171
3M	310	182	66	27	76
4M	174	102	37	15	43
5M	111	66	24	10	27
DELIVERED LUMENS	202LM	190LM	158LM	134LM	161LM

TEST CONDITION: 2700K, 700MA, 2W, CLEAR GLASS, w/o VISUAL COMFORT



**LIGHT CONFIGURATOR** ENGINE: PC2TR

POWER  2W  INTELLIMODE (12MM DEEPER)

BEAM  10°  16°  29°  44°  12°x54°\* \*ONLY FOR ROUND TRIM

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS

GLASS  CL CLEAR  FR FROSTED  HF HALF FROSTED  HB HALF BLACK

IP  IP20  IP67  IP68 (316L ONLY)

BODY  02 AL 0.2KG  03 316L SS 0.3KG


TRIM  01 AL  02 AL  03 316L SS  04 CU  05 AL  06 AL  07 AL  08 316L SS

FACEPLATE  RT ROUND  ST SQUARE PG145  3T SIXSOME 250MM PG144  6T SIXSOME 500MM PG144

INCLUDED / CEILING RECESSED / RECESSED

- o WINGS, 300MM CABLE LENGTH (AL ONLY)  $\frac{1}{4}$ " = 44MM
- o FOR IP67, NICHE S1 600MM CABLE LENGTH
- o FOR IP68, NICHE F1 w/ ENDCAP 3000MM CABLE LENGTH

- OPTIONS / VISUAL COMFORT / REMOTE DRIVER / IP68 CONNECTOR
- SEMI DEEP (PG 135)
  - DEEP (PG 136)
  - DEEP w/ BLACKOUT RING (PG 136)
  - HONEYCOMB (PG 137)
  - VERSA (PG 147)
  - DRIVE (PG 148)
  - CV CONVERTER (PG 151)
  - 2 POLE
  - 4 POLE

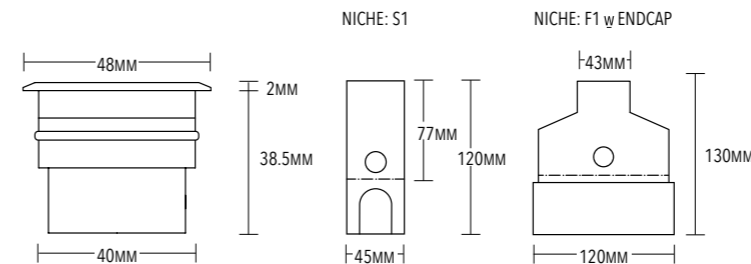

**POPCORN 2 TURBO**



**POPCORN 2 TURBO**

**LUMINAIRE**

SUPER SMALL AND COMPACT  
 SUPER INTENSE 2W SINGLE LED LIGHT SOURCE  
 HIGH POWER-TO-SIZE RATIO  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 VERSATILE MOUNTING SYSTEM  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS

**PERFORMANCE**

INTELLIMODE OPTION  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST

**FINISHES**


CLASSIC 01 DOUBLE-ANODISED ALUMINIUM  
 02 BLACK ALUMINIUM  
 03 ELECTRO-POLISHED 316L STAINLESS STEEL  
 04 POLISHED COPPER

SPECIAL BY REQUEST

**PHOTOMETRY**

LUX @ / BEAM	10°	16°	29°	44°	12°x54°
1M	2786	1639	596	247	682
2M	696	410	149	62	171
3M	310	182	66	27	76
4M	174	102	37	15	43
5M	111	66	24	10	27
DELIVERED LUMENS	202LM	190LM	158LM	134LM	161LM

TEST CONDITION: 2700K, 700MA, 2W, CLEAR GLASS, w/o VISUAL COMFORT



**LIGHT CONFIGURATOR** ENGINE: PC2TS

POWER  2W  INTELLIMODE (12MM TALLER)

BEAM  10°  16°  29°  44°  12°x54°

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS


GLASS  CL CLEAR  FR FROSTED  HF HALF FROSTED  HB HALF BLACK

IP  IP20  IP67  IP68 (316L ONLY)

FINISHES  01 AL 0.2KG  02 AL 0.2KG  03 316L SS 0.3KG  04 CU 0.3KG

INCLUDED • U-BRACKET, 3000MM CABLE LENGTH

- |                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>OPTIONS</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> HOOD (PG 132)</li> <li><input type="checkbox"/> SNOOT (PG 133)</li> <li><input type="checkbox"/> SNOOT w/o HOLES (PG 133)</li> <li><input type="checkbox"/> DARK (PG 134)</li> <li><input type="checkbox"/> DARK w BLACKOUT RING (PG 134)</li> <li><input type="checkbox"/> HONEYCOMB (PG 137)</li> </ul> | <p>/ VISUAL COMFORT</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> HOOD (PG 132)</li> <li><input type="checkbox"/> SNOOT (PG 133)</li> <li><input type="checkbox"/> SNOOT w/o HOLES (PG 133)</li> <li><input type="checkbox"/> DARK (PG 134)</li> <li><input type="checkbox"/> DARK w BLACKOUT RING (PG 134)</li> <li><input type="checkbox"/> HONEYCOMB (PG 137)</li> </ul> | <p>/ VERSATILE MOUNTING</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> DUO (PG 140)</li> <li><input type="checkbox"/> SPIKE (PG 140)</li> <li><input type="checkbox"/> PLATE (PG 141)</li> <li><input type="checkbox"/> BASE (PG 141)</li> <li><input type="checkbox"/> ULTRA BASE (PG 142)</li> <li><input type="checkbox"/> WONDER BAR 600MM (PG 142)</li> <li><input type="checkbox"/> WONDER BAR 1200MM (PG 142)</li> <li><input type="checkbox"/> STRAP ON w 1 ADAPTOR (PG 143)</li> </ul> <p>ADDITIONAL ADAPTOR QTY _____</p> | <p>/ REMOTE DRIVER</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> VERSA (PG 147)</li> <li><input type="checkbox"/> DRIVE (PG 148)</li> <li><input type="checkbox"/> CV CONVERTER (PG 151)</li> </ul> <p>/ IP68 CONNECTOR</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> 2 POLE</li> <li><input type="checkbox"/> 4 POLE</li> </ul> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

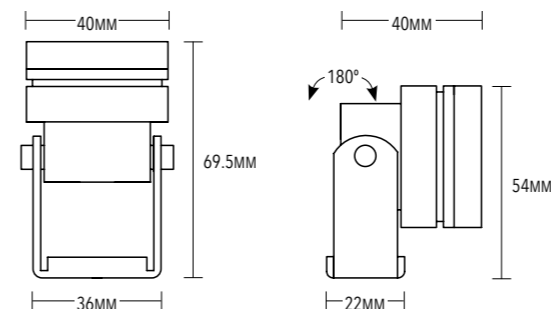

POPCORN 2



POPCORN 2

LUMINAIRE

SUPER SMALL & COMPACT  
 INTENSE LIGHT PERFORMANCE  
 ANTI-GLARE OPTIONS FOR VISUAL COMFORT  
 VERSATILE MOUNTING SYSTEM  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS  
 CONTROLLABLE USING 1-10V, DALI OR DMX DRIVERS

PERFORMANCE

INTELLIMODE OPTION  
 HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80

FINISHES

- CLASSIC
- 01 DOUBLE-ANODISED ALUMINIUM
  - 02 BLACK ALUMINIUM
  - 03 ELECTRO-POLISHED 316L STAINLESS STEEL
  - 04 POLISHED COPPER

SPECIAL BY REQUEST

PHOTOMETRY

LUX @ / BEAM	10°	25°	50°
1M	430	301	199
2M	115	81	50
3M	51	36	22
4M	29	20	12
5M	18	13	8
DELIVERED LUMENS	107LM	118LM	130LM

TEST CONDITION: 2700K, 700MA, 2W, CLEAR GLASS, w/o VISUAL COMFORT



LIGHT CONFIGURATOR ENGINE: PC2AS

POWER  1W  2W  INTELLIMODE (12MM TALLER)

BEAM  10°  25°  50°  120°

CCT  2700K  3000K  4000K  5000K  AMBER  BLUE  OTHERS  RGB \* \*25° / 50° ONLY

GLASS  CL CLEAR  FR FROSTED  HF HALF FROSTED  HB HALF BLACK

IP  IP20  IP67  IP68 (316L ONLY)

FINISHES  01 AL 0.2KG  02 AL 0.2KG  03 316L SS 0.3KG  04 CU 0.3KG

INCLUDED • U-BRACKET, 3000MM CABLE LENGTH

- OPTIONS
- |                                                        |                                                        |                                                |
|--------------------------------------------------------|--------------------------------------------------------|------------------------------------------------|
| / VISUAL COMFORT                                       | / VERSATILE MOUNTING                                   | / REMOTE DRIVER                                |
| <input type="checkbox"/> HOOD (PG 132)                 | <input type="checkbox"/> DUO (PG 140)                  | <input type="checkbox"/> VERSA (PG 147)        |
| <input type="checkbox"/> SNOOT (PG 133)                | <input type="checkbox"/> SPIKE (PG 140)                | <input type="checkbox"/> DRIVE (PG 148)        |
| <input type="checkbox"/> SNOOT w/o HOLES (PG 133)      | <input type="checkbox"/> PLATE (PG 141)                | <input type="checkbox"/> CV CONVERTER (PG 151) |
| <input type="checkbox"/> DARK (PG 134)                 | <input type="checkbox"/> BASE (PG 141)                 |                                                |
| <input type="checkbox"/> DARK w BLACKOUT RING (PG 134) | <input type="checkbox"/> ULTRA BASE (PG 142)           | / IP68 CONNECTOR                               |
| <input type="checkbox"/> HONEYCOMB (PG 137)            | <input type="checkbox"/> WONDER BAR 600MM (PG 142)     | <input type="checkbox"/> 2 POLE                |
|                                                        | <input type="checkbox"/> WONDER BAR 1200MM (PG 142)    | <input type="checkbox"/> 4 POLE                |
|                                                        | <input type="checkbox"/> STRAP ON w 1 ADAPTOR (PG 143) |                                                |
|                                                        | ADDITIONAL ADAPTOR QTY _____                           |                                                |

