


Shape the light

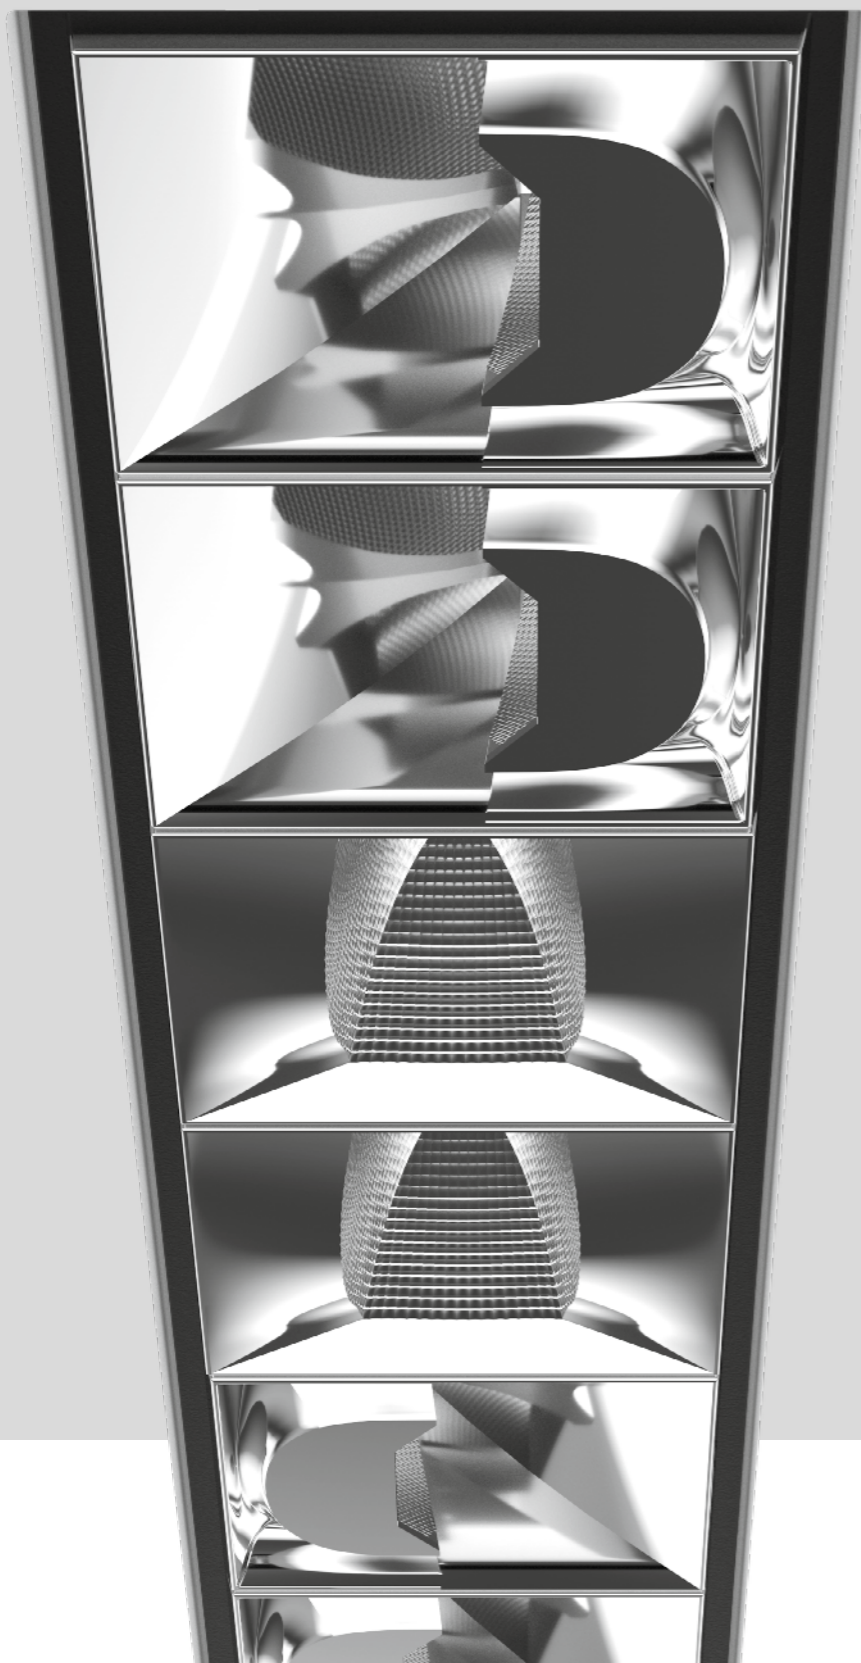


UNICO


EN With UNICO, XAL crafted a unique product built for flexibility. The luminaire offers a solution for every requirement and need. The luminaire can be shaped from five mounting options, seven shapes, eleven optics, two sensors, four colour temperatures and three control options. The intuitive UNICO configurator helps guide the flexible composition and selection of the different beam characteristics. A single luminaire has never offered this much planning freedom in professional lighting design.

DE Mit UNICO ist XAL ein Unikat in punkto Flexibilität gelungen. Die Leuchte bietet für jede Anforderung und jedes Bedürfnis eine Lösung. Aus fünf Montage-Optionen, sieben Formen, elf Optiken, zwei Sensoren, vier Farbtemperaturen und drei Steuerungsmöglichkeiten kann die Leuchte individuell kombiniert werden. Der intuitive UNICO Konfigurator unterstützt bei der flexiblen Zusammenstellung und der Auswahl der verschiedenen Abstrahlcharakteristiken. Mehr planerische Freiheit hat es bei der professionellen Lichtplanung mit einer einzigen Leuchte nie gegeben.


Types

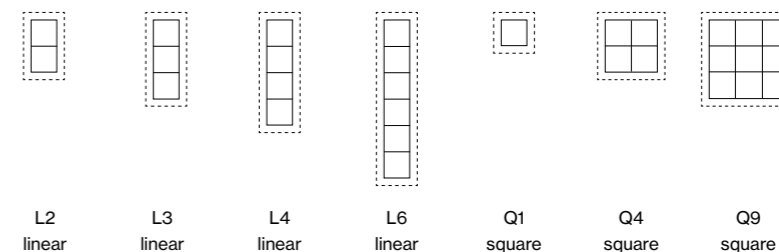

Mountings

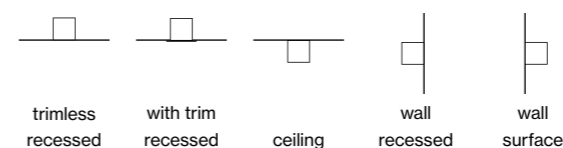

Light optics Sensors

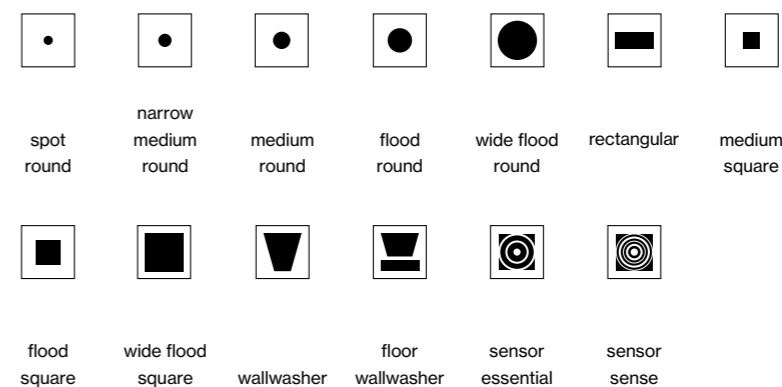

UNICO recessed



Installation housing


	Q1	Q4	Q9	L2
TYPE	with trim (white or black)	with trim (white or black)	with trim (white or black)	with trim (white or black)
CEILING THICKNESS	intermediate 2-25 mm	intermediate 2-25 mm	intermediate 2-25 mm	intermediate 2-25 mm
DIMENSION _{max}	63 × 63 mm	101 × 101 mm	138 × 138 mm	101 × 63 mm
CUTOUT DIMENSION	50 × 50 mm	90 × 90 mm	130 × 130 mm	90 × 50 mm
RECESS DEPTH	155 mm	110 mm	90 mm	140 mm
TYPE	trimless	trimless	trimless	trimless
CEILING THICKNESS	plasterboard 12/15/20/25	plasterboard 12/15/20/25	plasterboard 12/15/20/25	plasterboard 12/15/20/25
DIMENSION	50 × 50 mm	85 × 85 mm	125 × 125 mm	88 × 50 mm
CUTOUT DIMENSION	50 × 50 mm	90 × 90 mm	130 × 130 mm	90 × 50 mm
RECESS DEPTH	155 mm	110 mm	90 mm	140 mm

	L3	L4	L6
TYPE	with trim (white or black)	with trim (white or black)	with trim (white or black)
CEILING THICKNESS	intermediate 2-25 mm	intermediate 2-25 mm	intermediate 2-25 mm
DIMENSION _{max}	138 × 63 mm	176 × 63 mm	251 × 63 mm
CUTOUT DIMENSION	130 × 50 mm	165 × 50 mm	240 × 50 mm
RECESS DEPTH	110 mm	100 mm	100 mm
TYPE	trimless	trimless	trimless
CEILING THICKNESS	plasterboard 12/15/20/25	plasterboard 12/15/20/25	plasterboard 12/15/20/25
DIMENSION	125 × 50 mm	163 × 50 mm	238 × 50 mm
CUTOUT DIMENSION	130 × 50 mm	165 × 50 mm	240 × 50 mm
RECESS DEPTH	110 mm	100 mm	100 mm

Light optic

	spot round	narrow med. round	medium round	flood round	wide flood round	medium square	flood square	wide flood square	rectangular	wallwasher	wallwasher floor
LUMINOUS EFFICACY	up to 46 lm/W	up to 51 lm/W	up to 78 lm/W	up to 90 lm/W	up to 89 lm/W	up to 77 lm/W	up to 91 lm/W	up to 93 lm/W	up to 79 lm/W	up to 79 lm/W	up to 82 lm/W
LUMINOUS FLUX	179 lm, 190 lm	196 lm, 208 lm	300 lm, 319 lm	345 lm, 367 lm	342 lm, 363 lm	295 lm, 314 lm	351 lm, 373 lm	361 lm, 383 lm	305 lm, 324 lm	305 lm, 324 lm	318 lm, 338 lm
COLOUR TEMPERATURE	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K
COLOUR RENDERING INDEX	CRI ≥ 90	CRI ≥ 90	CRI ≥ 90	CRI ≥ 90	CRI ≥ 90	CRI ≥ 90	CRI ≥ 90	CRI ≥ 90	CRI ≥ 90	CRI ≥ 90	CRI ≥ 90

LIGHT DISTRIBUTION

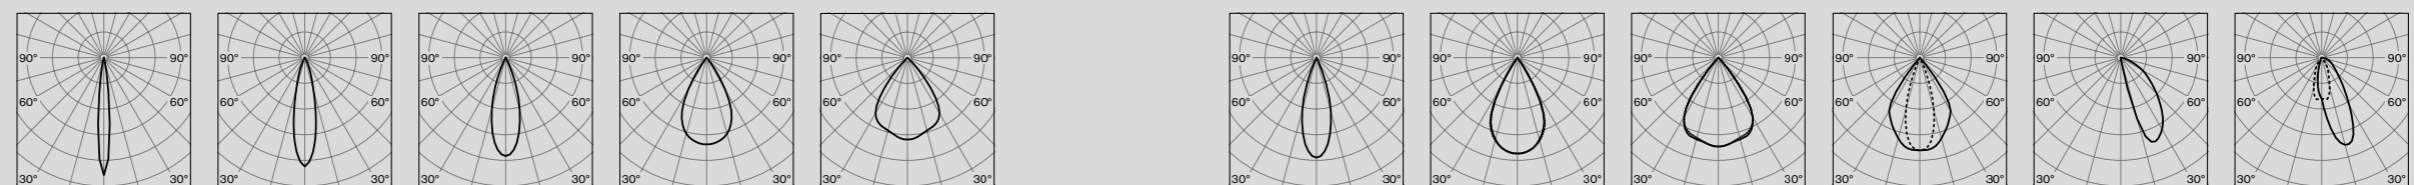


Create your own UNICO

unico.xal.com

EN XAL's UNICO is uniquely flexible. The luminaire offers a solution for every requirement. A UNICO can be flexibly assembled with eleven optics, two sensors and a selection of different light colours as well as Tunable White. XAL delivers this planning freedom with an intuitive online configurator. Solve concrete lighting concepts by creating a bespoke luminaire. unico.xal.com

DE Mit UNICO ist XAL ein Unikat in punkto Flexibilität gelungen. Für jede Anforderung bietet die Leuchte eine Lösung. Ein UNICO kann mit elf Optiken, zwei Sensoren und einer Auswahl verschiedener Lichtfarben sowie Tunable White flexibel zusammengestellt werden. Diese planerische Freiheit unterstützt XAL mit einem intuitiven Online-Konfigurator. Lösen Sie konkrete Beleuchtungskonzepte durch die flexible Zusammenstellung einer einzigartigen Leuchte: unico.xal.com

1. Define your shape

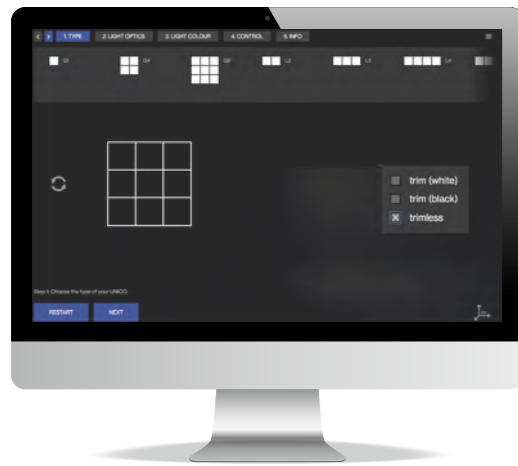

EN Select your preferred mounting type and then one of the seven shapes.

DE Wählen Sie eine passende Montageart und anschließend eine der sieben Formen aus.


2. Choose your light optic and colour



EN Combine the eleven light insets and two sensors. Then select the desired light temperature 2700K, 3000K, 4000K or Tunable White.

DE Kombinieren Sie die elf Lichteinsätze sowie zwei Sensoren und wählen Sie die passende Lichttemperatur 2700K, 3000K, 4000K oder Tunable White, beliebig nach Ihren Anforderungen.

3. Control

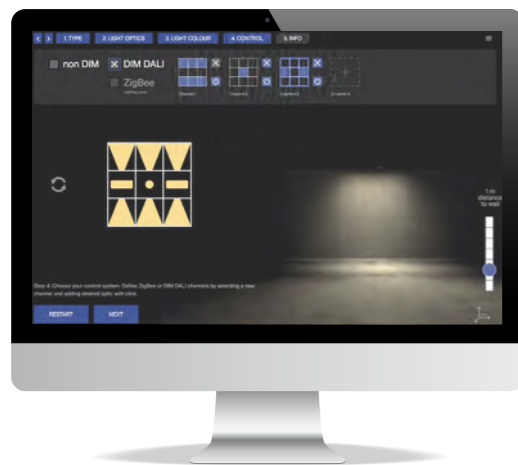

EN The configurator helps you set up a maximum of four control channels.

DE Mit Hilfe des Konfigurators können Sie bis zu vier Steuerungskanäle einrichten.

4. Info



EN Get an overview of your configured UNICO. You can download all the specifications as a datasheet.



DE Verschaffen Sie sich einen Überblick über Ihren konfigurierten UNICO. Zusätzlich haben Sie die Möglichkeit sich alle Informationen in Form eines Datenblattes herunterzuladen.

One luminaire – four channels – various light scenes

EN Use the online configurator and address concrete lighting concepts by creating a bespoke luminaire. Assign each optic in a UNICO to one of up to four control channels. Each of the four channels can then be dimmed and controlled separately. Control is via DALI-2 or Zigbee 3.0. Just one luminaire can create custom lighting scenarios for every application. There has never been more freedom in professional lighting design delivered by a single luminaire.

DE Nutzen Sie den Online-Konfigurator um konkrete Beleuchtungskonzepte durch die flexible Zusammenstellung der Optiken umzusetzen. Weisen Sie jede Optik in einer UNICO einem der bis zu vier Steuerungskanäle zu. Jeder der vier Kanäle kann dann separat gedimmt und angesteuert werden. Mit nur einer Leuchte realisieren Sie so für jede Anwendung individuelle Lichtszenarien. Die Steuerung erfolgt via DALI-2 oder Zigbee 3.0. Mehr Freiheit hat es bei der professionellen Lichtplanung mit einer einzigen Leuchte nie gegeben.



Light scene 1 wall



3 × wallwasher





Light scene 2 wall + floor



3 × wallwasher
5 × flood square





Light scene 3 floor



5 × flood square



Light scene 4 spots



1 × spot round





92.2 quadrillion possibilities

EN The luminaire can be customised from five mounting options, seven shapes, eleven light insets, two sensors, four colour temperatures, and three control options. The downlight optics for generating round or angular light projections are available with different beam characteristics. There are also rectangular downlights and wallwasher optics for wall or wall / floor lighting. Highly glare-free versions (UGR ≤ 19) are ideal for use at computer workstations. Dedicated sensors help adjust the lighting according to daylight and room activity. In addition, the reflectors are available in the colours chrome, black, and gold. Values such as temperature, air quality, and noise levels can be recorded. This delivers valuable knowledge about the conditions of your premises.





DE Aus fünf Montageoptionen, sieben Formen, elf Lichteinsätzen, zwei Sensoren, vier Farbtemperaturen und drei Steuerungsmöglichkeiten kann die Leuchte individuell kombiniert werden. Die Downlight-Optiken zur Generierung runder oder eckiger Lichtprojektionen gibt es mit unterschiedlichen Abstrahlcharakteristiken. Zusätzlich gibt es rechteckige Downlights und Wallwasher-Optiken für Wand- oder Wand / Boden-Beleuchtung. Hochentblendete Versionen (UGR ≤ 19) sind ideal für den Einsatz an Bildschirmarbeitsplätzen. Zudem sind die Reflektoren in den Farben Chrome, Schwarz und Gold verfügbar. Spezielle Sensoren ermöglichen es die Beleuchtung an Tageslicht und Raumaktivität anzupassen, sowie Werte wie Temperatur, Luftqualität und Geräuschpegel zu erfassen. Hiermit lassen sich wertvolle Erkenntnisse über die Umgebungsbedingungen Ihrer Räumlichkeiten gewinnen.



Q1 trimless




L3 trimless tunable white

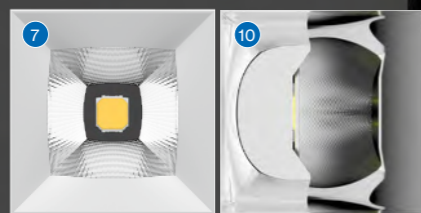


Q9 with trim

11 light optics and 2 sensors

- 1 spot round
- 2 narrow medium round
- 3 medium round
- 4 flood round
- 5 wide flood round
- 6 medium square

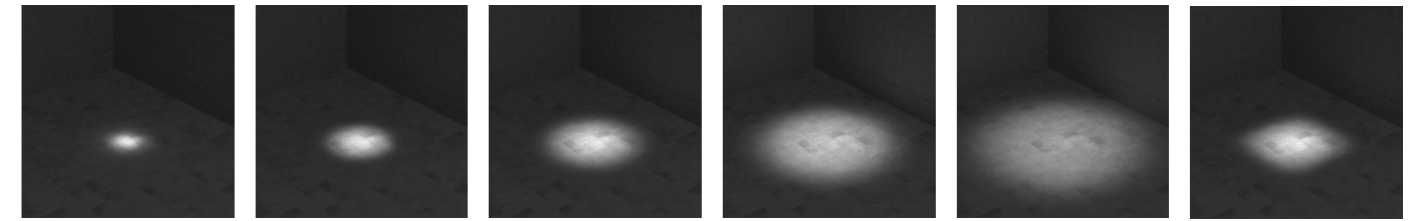

- 7 flood square
- 8 wide flood square
- 9 rectangular
- 10 wallwasher
- 11 wallwasher floor

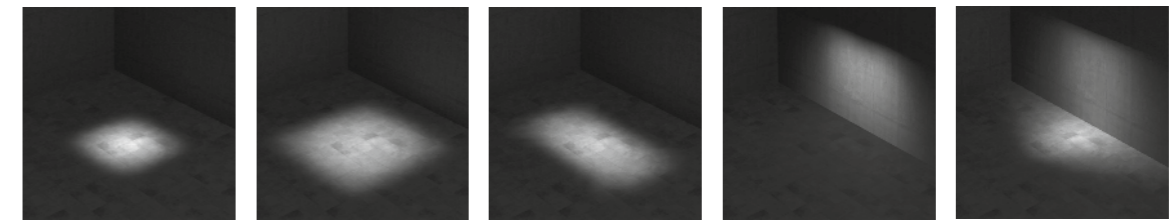

Sensors

12 sensor essential

- brightness
- presence



13 sensor sense


- brightness
- presence
- temperature
- humidity
- sound pressure
- CO₂

Precision cut-off

EN XAL Light optics deliver the latest development in the field of micro-faceted reflector technology. Architects and lighting planners have entirely new design options thanks to clearly defined contrasts and maximised efficiency. Compared with conventional optics, XAL Light optics offer, with the same beam angle, a clearly defined light cone break with minimal stray light at the edges.

DE Mit XAL Light optics bietet XAL die neueste Entwicklung auf dem Gebiet der mikro-facettierten Reflektortechnologie. Für ArchitektInnen und LichtplanerInnen ergeben sich dank klar definierter Kontraste bei gleichzeitig maximierter Effizienz völlig neue Gestaltungsmöglichkeiten. Verglichen mit konventionellen Optiken bieten XAL Light optics bei gleichem Abstrahlwinkel einen klar begrenzten Lichtkegelabriss mit wenig Streulicht im Randbereich.

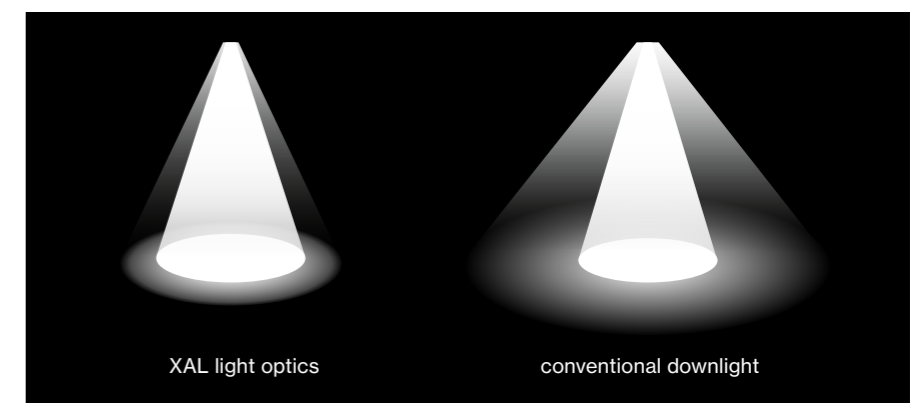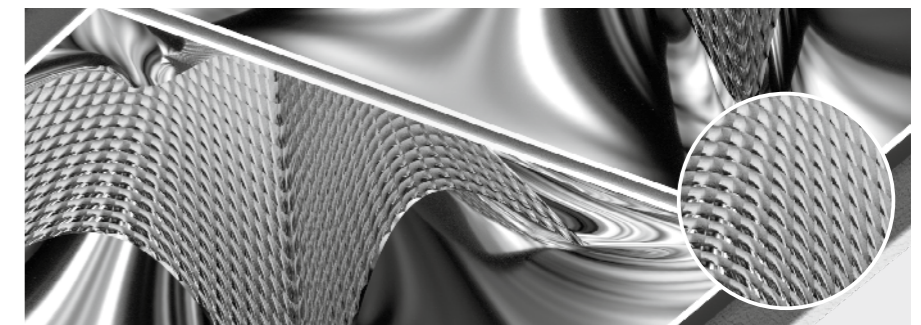



UNICO linear

recessed


EN Rectangular recessed multi-downlight made of die-cast aluminium; equipped with two (L2) / three (L3) / four (L4) / six (L6) individually selectable or pre-specified, customised light elements; installation without tools in mounting set with ball catch system; easy electrical installation by means of reverse polarity protected plug-in connections; suitable for ceiling thickness of 2-25 mm; surface powder coated; installation possible in different housings; high-quality reflector with micro-faceted, aluminium-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

DE Rechteckiger Einbau-Multi-Downlight aus Aluminiumdruckguss; bestückt mit zwei (L2) / drei (L3) / vier (L4) / sechs (L6) individuell wählbaren oder fix definierten, anwendungsspezifischen Optiken; werkzeuglose Montage im Montageset durch Kugelschnappsystem; einfache elektrische Montage durch verpolungssichere Steckverbindung; geeignet für Deckenstärken von 2-25 mm; Oberfläche pulverbeschichtet; Einbau in unterschiedlichen Gehäusen möglich; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit unterschiedlichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe; klirrfrei

Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90, 3 SDCM
UGR ≤ 19 / 65° ≤ 1500 cd/m²
L2 up to 98 lm/W
L3 up to 99 lm/W
L4 up to 112 lm/W
L6 up to 112 lm/W
L90 @ 50 000 h
non DIM, DALI-2


Types

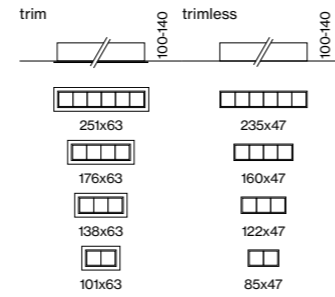


Colours




Light optics




DiiA® standards
251, 252, 253



one luminaire
multiple scenes



plug / socket
connector



black & gold
reflector



tunable white
2700-5000 K

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
4000 K	6

CONTROL	
non DIM	1
DALI-2	3

LIGHT OPTIC	
spot round (UGR ≤ 10)	K
narrow medium round (UGR ≤ 10)	N
medium round (UGR ≤ 10)	B
medium square (UGR ≤ 10)	E
flood round (UGR ≤ 16)	C
flood square (UGR ≤ 19)	F
wide flood round	D
wide flood square	G

MATERIAL COLOUR	
○ traffic white RAL 9016	W
● jet black RAL 9005	B

LIGHT OPTIC COLOUR	
chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

Options on request

COLOUR TEMPERATURE	
tunable white 2700-5000 K	
DALI-2 DT8	

LIGHT OPTIC COLOUR	
gold reflector	


MOUNTING SET	
acoustic soft ceilings	

Product configurator



Create your own UNICO PRO
unico.xal.com

Planning information



The icons of the light optics are shown in the reflected ceiling plan (RCP) view.

UNICO L2 basic recessed

FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
7.9 W	up to 723 lm	090-7L2::▲0■21	

choose one light optic ▲ from the options on the left depending on your room needs

WALL	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
2x wallwasher 7.9 W	611 lm	090-7L2::▲A0022	

CORRIDOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
2x rectangular 7.9 W	610 lm	090-7L2::▲R0■21	

WALL + FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
2x wallwasher floor 7.9 W	638 lm	090-7L2::▲W0■22	

UNICO L3 basic recessed

FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
11.2 W	up to 1030 lm	090-7L3::▲0■21	

choose one light optic ▲ from the options on the left depending on your room needs

WALL	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
3x wallwasher 11.2 W	872 lm	090-7L3::▲A0021	

Accessories

MOUNTING SET WITH TRIM for intermediate ceilings 2-25 mm			
TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
L2	101-63-30	90-50	090-7L2020■
L3	138-63-30	130-50	090-7L3020■

TRIMLESS MOUNTING SET for installation in plasterboard ceilings 12.5/15/20/25 mm			
TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
L2	88-50-47	90-50	090-7L20100
L3	125-50-47	130-50	090-7L30100

THROUGH WIRING CONNECTION BOX			
TYPE	L-W-H (mm)	ORDER CODE	
non DIM cable ø 4-12 mm	105-58-30	005-2531110	
DALI cable ø 4-12 mm	105-58-30	005-2551110	

LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white, reflector chrome 2700 K -6%, 4000 K +7%

← back

Order options

COLOUR TEMPERATURE

2700K	4
3000K	5
4000K	6

CONTROL

non DIM	1
DALI-2	3

LIGHT OPTIC

spot round (UGR≤10)	K
narrow medium round (UGR≤10)	N
medium round (UGR≤10)	B
medium square (UGR≤10)	E
flood round (UGR≤16)	C
flood square (UGR≤19)	F
wide flood round	D
wide flood square	G

MATERIAL COLOUR

○ traffic white RAL 9016	W
● jet black RAL 9005	B

LIGHT OPTIC COLOUR

chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

Options on request

COLOUR TEMPERATURE

tunable white 2700–5000K
DALI-2 DT8

LIGHT OPTIC COLOUR

gold reflector

MOUNTING SET

acoustic soft ceilings


Product configurator



Create your own UNICO PRO


unico.xal.com

Planning information



The icons of the light optics are shown in the reflected ceiling plan (RCP) view.

UNICO L4 basic recessed



FLOOR

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
13.9W	up to 1450lm	090-7L4::▲0■21

choose one light optic ▲ from the options on the left depending on your room needs



WALL

4x wallwasher

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
13.9W	1220lm	090-7L4::◆A0021




WALL + FLOOR

4x wallwasher floor


SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
13.9W	1280lm	090-7L4::◆W0■22

Accessories




MOUNTING SET WITH TRIM
for intermediate ceilings 2–25mm

TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
L4	176-63-30	165-50	090-7L4020



TRIMLESS MOUNTING SET
for installation in plasterboard ceilings 12.5/15/20/25mm

TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
L4	163-50-47	165-50	090-7L40100



THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (mm)	ORDER CODE
non DIM cable ø4–12mm	105-58-30	005-2531110
DALI cable ø4–12mm	105-58-30	005-2551110

Order options

COLOUR TEMPERATURE

2700K	4
3000K	5
4000K	6

CONTROL

non DIM	1
DALI-2	3

LIGHT OPTIC

spot round (UGR≤10)	K
narrow medium round (UGR≤10)	N
medium round (UGR≤10)	B
medium square (UGR≤10)	E
flood round (UGR≤16)	C
flood square (UGR≤19)	F
wide flood round	D
wide flood square	G

MATERIAL COLOUR

○ traffic white RAL 9016	W
● jet black RAL 9005	B

LIGHT OPTIC COLOUR

chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

Options on request

COLOUR TEMPERATURE


tunable white 2700–5000K
DALI-2 DT8

LIGHT OPTIC COLOUR


gold reflector

MOUNTING SET

acoustic soft ceilings



UNICO L6 basic recessed



FLOOR

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
19.8W	up to 2060lm	090-7L6::▲0■21

choose one light optic ▲ from the options on the left depending on your room needs



WALL

6x wallwasher

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
19.8W	1740lm	090-7L6::◆A0021



CORRIDOR

6x rectangular

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
19.8W	1740lm	090-7L6::◆R0■21




WALL + FLOOR

6x wallwasher floor


SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
19.8W	1820lm	090-7L6::◆W0■21

Accessories




MOUNTING SET WITH TRIM
for intermediate ceilings 2–25mm

TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
L6	251-63-30	240-50	090-7L6020



TRIMLESS MOUNTING SET
for installation in plasterboard ceilings 12.5/15/20/25mm

TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
L6	238-50-47	240-50	090-7L60100



THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (mm)	ORDER CODE
non DIM cable ø4–12mm	105-58-30	005-2531110
DALI cable ø4–12mm	105-58-30	005-2551110

LUMINOUS FLUX value calculated for 3000K, CRI≥90, colour white, reflector chrome 2700K -6%, 4000K +7%

LUMINOUS FLUX value calculated for 3000K, CRI≥90, colour white, reflector chrome 2700K -6%, 4000K +7%



West Tower
Manchester, UK – by SimpsonHaugh with
lighting design by Troup, Bywaters & Anders






Penthouse Wörthersee
Carinthia, AT – by ROOMS GmbH



← back

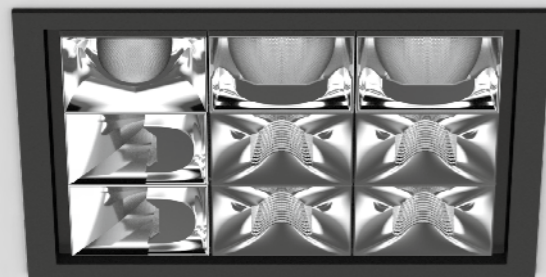

UNICO square

recessed


EN Square recessed multi-downlight made of die-cast aluminium; equipped with one (Q1) / four (Q4) / nine (Q9) individually selectable or pre-specified, customised light element(s); or with a sensor; installation without tools in mounting set with ball catch system; easy electrical installation by means of reverse polarity protected plug-in connections; suitable for ceiling thickness of 2-25 mm; surface powder coated; installation possible in different housings; high-quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

DE Quadratischer Einbau-Multi-Downlight aus Aluminiumdruckguss; bestückt mit einer (Q1) / vier (Q4) / neun (Q9) individuell wählbaren oder fix definierten, anwendungsspezifischen Optik(en); oder mit einem Sensor (Q1); werkzeuglose Montage im Montageset durch Kugelschnappsystem; einfache elektrische Montage durch verpolungssichere Steckverbindung; geeignet für Deckenstärken von 2-25 mm; Oberfläche pulverbeschichtet; Einbau in unterschiedlichen Gehäusen möglich; hochwertiger Reflektor mit mikrofacetierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit unterschiedlichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe; klirrfrei

Quickinfo

2700 K, 3000 K, 4000 K
 CRI ≥ 90, 3 SDCM
 UGR ≤ 19 / 65° ≤ 1500 cd/m²
 Q1 up to 85 lm/W
 Q4 up to 112 lm/W
 Q9 up to 111 lm/W
 L90 @ 50 000 h
 non DIM, DALI-2


Types

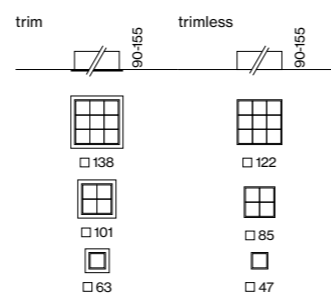


Colours




Light optics / sensors

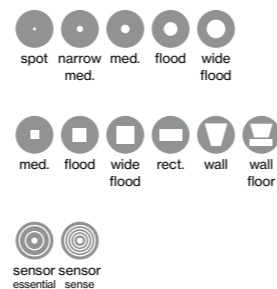

DiiA® standards 251, 252, 253 sensor version available



one luminaire multiple scenes plug / socket connector



black & gold reflector tunable white 2700-5000K

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
4000 K	6

CONTROL	
non DIM	1
DALI-2	3

LIGHT OPTIC	
spot round (UGR ≤ 10)	K
narrow medium round (UGR ≤ 10)	N
medium round (UGR ≤ 10)	B
medium square (UGR ≤ 10)	E
flood round (UGR ≤ 16)	C
flood square (UGR ≤ 19)	F
wide flood round	D
wide flood square	G

MATERIAL COLOUR	
○ traffic white RAL 9016	W
● jet black RAL 9005	B

LIGHT OPTIC COLOUR	
chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

Options on request

COLOUR TEMPERATURE	
tunable white 2700-5000K	
DALI-2 DT8	

LIGHT OPTIC COLOUR	
gold reflector	


MOUNTING SET	
acoustic soft ceilings	

Product configurator



Create your own UNICO PRO unico.xal.com

Planning information



UNICO Q1 basic recessed

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
6 W	up to 490 lm	090-7 Q 1 :: A 0 2 1

choose one light optic ▲ from the options on the left depending on your room needs

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
6 W	up to 415 lm	090-7 Q 1 :: A 0 2 1

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
6 W	up to 414 lm	090-7 Q 1 :: R 0 2 1

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
6 W	up to 432 lm	090-7 Q 1 :: W 0 2 1

UNICO Q1 sensor recessed

TYPE	ORDER CODE
brightness & presence	090-7 Q 1 0 0 0 0

TYPE	ORDER CODE
brightness, presence, temperature, sound pressure, humidity, CO ₂	090-7 Q 1 0 0 1 0

Accessories

MOUNTING SET WITH TRIM			
for intermediate ceilings 2-25 mm			
TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
Q1	63-63-30	50-50	090-7 Q 1 0 2 0 2

TRIMLESS MOUNTING SET			
for installation in plasterboard ceilings 12.5/15/20/25 mm			
TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
Q1	50-50-47	50-50	090-7 Q 1 0 1 0 0

LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white, reflector chrome 2700 K -6%, 4000 K +7%

← back

Order options

COLOUR TEMPERATURE

2700K	4
3000K	5
4000K	6

CONTROL

non DIM	1
DALI-2	3

LIGHT OPTIC

spot round (UGR≤10)	K
narrow medium round (UGR≤10)	N
medium round (UGR≤10)	B
medium square (UGR≤10)	E
flood round (UGR≤16)	C
flood square (UGR≤19)	F
wide flood round	D
wide flood square	G

MATERIAL COLOUR

○ traffic white RAL 9016	W
● jet black RAL 9005	B

LIGHT OPTIC COLOUR

chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

Options on request

COLOUR TEMPERATURE

tunable white 2700–5000K	
--------------------------	--

DALI-2 DT8


LIGHT OPTIC COLOUR

gold reflector	
----------------	--

MOUNTING SET


acoustic soft ceilings	
------------------------	--

Product configurator

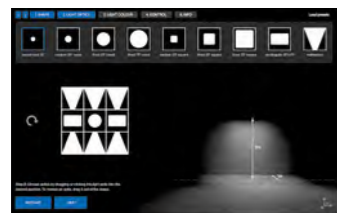

Create your own UNICO PRO
unico.xal.com

Planning information



The icons of the light optics are shown in the reflected ceiling plan (RCP) view.

UNICO Q4 basic recessed

FEATURES: UGR ≤10, cd/m² ≤1500, CRI ≥90, DALI 1ADDR, 220-240V, XPERT

FLOOR

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
13.9W	up to 1450lm	090-7Q4::▲021

choose one light optic ▲ from the options on the left depending on your room needs

WALL

4x wallwasher		
SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
13.9W	1220lm	090-7Q4::▲A0021

CORRIDOR

4x wallwasher		
SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
13.9W	1220lm	090-7Q4::▲A0022

WALL + FLOOR

2x wallwasher + 2x medium square		
SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
13.9W	1200lm	090-7Q4::▲90021

CORNER + FLOOR

2x wallwasher + 2x medium square		
SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
13.9W	1200lm	090-7Q4::▲90022

WALL + FLOOR

4x wallwasher floor		
SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
13.9W	1280lm	090-7Q4::▲W021

Accessories

MOUNTING SET WITH TRIM
for intermediate ceilings 2–25 mm

TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
Q4	101-101-30	90-90	090-7Q4020

TRIMLESS MOUNTING SET
for installation in plasterboard ceilings 12.5/15/20/25 mm

TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
Q4	85-85-47	90-90	090-7Q40100

THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (mm)	ORDER CODE
non DIM cable ø4–12mm	105-58-30	005-2531110
DALI cable ø4–12mm	105-58-30	005-2551110

LUMINOUS FLUX value calculated for
3000K, CRI≥90, colour white, reflector chrome
2700K -6%, 4000K +7%

Order options

COLOUR TEMPERATURE

2700K	4
3000K	5
4000K	6

CONTROL

non DIM	1
DALI-2	3

LIGHT OPTIC

spot round (UGR≤10)	K
narrow medium round (UGR≤10)	N
medium round (UGR≤10)	B
medium square (UGR≤10)	E
flood round (UGR≤16)	C
flood square (UGR≤19)	F
wide flood round	D
wide flood square	G

MATERIAL COLOUR

○ traffic white RAL 9016	W
● jet black RAL 9005	B

LIGHT OPTIC COLOUR

chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

Options on request

COLOUR TEMPERATURE

tunable white 2700–5000K	
--------------------------	--

DALI-2 DT8

LIGHT OPTIC COLOUR

gold reflector	
----------------	--

MOUNTING SET

acoustic soft ceilings	
------------------------	--

LUMINOUS FLUX value calculated for
3000K, CRI≥90, colour white, reflector chrome
2700K -6%, 4000K +7%

FEATURES: UGR ≤10, cd/m² ≤1500, CRI ≥90, DALI 1ADDR, 220-240V, XPERT

FLOOR

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
32W	up to 3310lm	090-7Q9::▲021

choose one light optic ▲ from the options on the left depending on your room needs

WALL

9x wallwasher		
SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
32W	2800lm	090-7Q9::▲A0021

WALL + FLOOR

3x wallwasher + 6x flood square		
SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
32W	3080lm	090-7Q9::▲90021

WALL + CORRIDOR

6x wallwasher + 3x rectangular		
SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
32W	2790lm	090-7Q9::▲90022

WALL + FLOOR

9x wallwasher floor		
SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
32W	2920lm	090-7Q9::▲W021

Accessories

MOUNTING SET WITH TRIM
for intermediate ceilings 2–25 mm

TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
Q9	138-138-30	130-130	090-7Q9020

TRIMLESS MOUNTING SET
for installation in plasterboard ceilings 12.5/15/20/25 mm

TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
Q9	125-125-47	130-130	090-7Q90100

THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (mm)	ORDER CODE
non DIM cable ø4–12mm	105-58-30	005-2531110
DALI cable ø4–12mm	105-58-30	005-2551110

LUMINOUS FLUX value calculated for
3000K, CRI≥90, colour white, reflector chrome
2700K -6%, 4000K +7%





Aertssen Group Beveren, BE –
by Mertens Architecten with
lighting design by Eef Debeuf



Fortuna Financial Group
Antwerp, BE – by Kris Rymenants
Architectenbureau



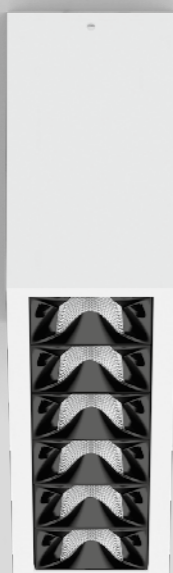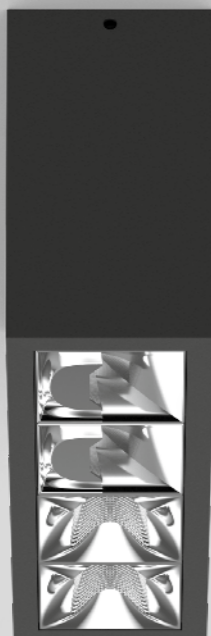

UNICO linear ceiling


EN Rectangular surface mounted multi-downlight made of aluminium; equipped with two (L2) / three (L3) / four (L4) / six (L6) individually selectable or pre-specified, customised light elements; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high-quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

DE Rechteckiger Anbau-Multi-Downlight aus Aluminium; bestückt mit zwei (L2) / drei (L3) / vier (L4) / sechs (L6) individuell wählbaren oder fix definierten, anwendungsspezifischen Optiken; Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; Konverter im Leuchtenkörper integriert; Oberfläche pulverbeschichtet; hochwertiger Reflektor mit mikrofacettierter, aluminiumverdampfter Oberfläche; präzise Abstrahlcharakteristik mit unterschiedlichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe; klirrfrei

Quickinfo

2700 K, 3000 K, 4000 K
 CRI ≥ 90, 3 SDCM
 UGR ≤ 19 / 65° ≤ 3000 cd/m²
 L2 up to 95 lm/W
 L3 up to 97 lm/W
 L4 up to 103 lm/W
 L6 up to 103 lm/W
 L90 @ 50 000h
 non DIM, DALI-2

Types

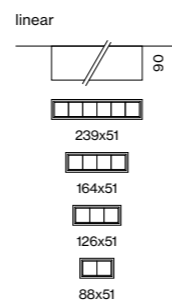

Colours



Light optics



Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
4000 K	6

CONTROL	
non DIM	1
DALI-2	3

LIGHT OPTIC	
spot round (UGR ≤ 10)	K
narrow medium round (UGR ≤ 10)	N
medium round (UGR ≤ 10)	B
medium square (UGR ≤ 10)	E
flood round (UGR ≤ 16)	C
flood square (UGR ≤ 19)	F
wide flood round	D
wide flood square	G

MATERIAL COLOUR	
○ traffic white RAL 9016	W
● white aluminium RAL 9006	G
● jet black RAL 9005	B
● gold dust RAL 260-M	9

LIGHT OPTIC COLOUR	
chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

Options on request

COLOUR TEMPERATURE	
tunable white 2700–5000 K	
DALI-2 DT8	


LIGHT OPTIC COLOUR	
gold reflector	

Product configurator



Create your own UNICO PRO
unico.xal.com


Planning information




The icons of the light optics are shown in the reflected ceiling plan (RCP) view.



one luminaire multiple scenes



black & gold reflector



tunable white 2700–5000 K

UNICO L2 basic ceiling

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
12.6 W	up to 1150 lm	090-1L2:::A■01

choose one light optic ▲ from the options on the left depending on your room needs

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
12.6 W	971 lm	090-1L2:::R■01

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
12.6 W	973 lm	090-1L2:::A■001

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
12.6 W	947 lm	090-1L2:::W■01

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
12.6 W	1020 lm	090-1L2:::W■02

UNICO L3 basic ceiling

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
18.9 W	up to 1720 lm	090-1L3:::A■01

choose one light optic ▲ from the options on the left depending on your room needs

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
18.9 W	1460 lm	090-1L3:::A■001

LUMINOUS FLUX value calculated for 3000K, CRI ≥ 90, colour white, reflector chrome 2700 K -6%, 4000 K +7%

← back

Order options

COLOUR TEMPERATURE

2700K	4
3000K	5
4000K	6

CONTROL

non DIM	1
DALI-2	3

LIGHT OPTIC

spot round (UGR≤10)	K
narrow medium round (UGR≤10)	N
medium round (UGR≤10)	B
medium square (UGR≤10)	E
flood round (UGR≤16)	C
flood square (UGR≤19)	F
wide flood round	D
wide flood square	G

MATERIAL COLOUR

○ traffic white RAL 9016	W
● white aluminium RAL 9006	G
● jet black RAL 9005	B
● gold dust RAL 260-M	9

LIGHT OPTIC COLOUR

chrome reflector	O
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

Options on request


COLOUR TEMPERATURE

tunable white 2700-5000K
DALI-2 DT8

LIGHT OPTIC COLOUR


gold reflector

Product configurator

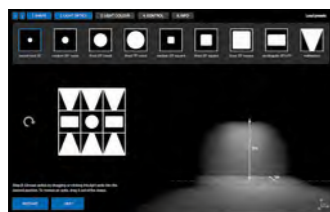


Create your own UNICO PRO
unico.xal.com

Planning information



The icons of the light optics are shown in the reflected ceiling plan (RCP) view.

UNICO L4 basic ceiling



FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
	20.4W	up to 1920lm	090-1L4::A01
choose one light optic ▲ from the options on the left depending on your room needs			



WALL	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
4x wallwasher	20.4W	1620lm	090-1L4::AW01





FLOOR/WALL + FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
4x wallwasher floor	20.4W	1690lm	090-1L4::W01



WALL + FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
4x wallwasher floor	20.4W	1690lm	090-1L4::W02

UNICO L6 basic ceiling



FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
	28.6W	up to 2790lm	090-1L6::A01
choose one light optic ▲ from the options on the left depending on your room needs			



CORRIDOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
6x rectangular	28.6W	2350lm	090-1L6::R01



WALL	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
6x wallwasher	28.6W	2360lm	090-1L6::AW01






WALL + FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
6x wallwasher floor	28.6W	2460lm	090-1L6::W01

LUMINOUS FLUX value calculated for 3000K, colour white, reflector chrome
 2700K -6%, 4000K +7%



Babylon
 Den Haag, NL – by Studio Linse

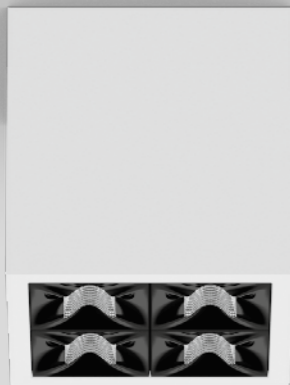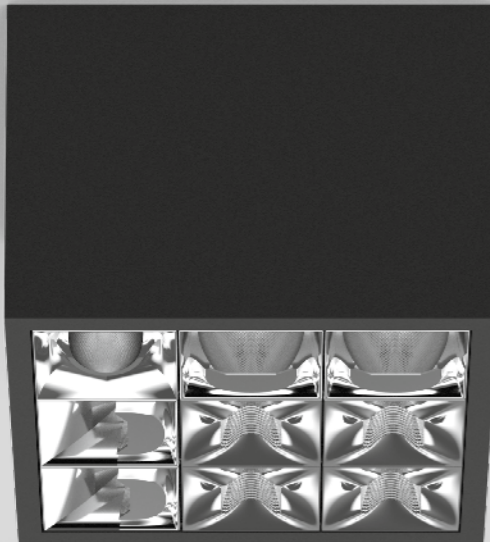

reddot winner 2020

UNICO square

ceiling


EN Square surface mounted multi-downlight made of aluminium; equipped with one (Q1) / four (Q4) / nine (Q9) individually selectable or pre-specified, customised light element(s); luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high-quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

DE Quadratischer Anbau-Multi-Downlight aus Aluminium; bestückt mit einer (Q1) / vier (Q4) / neun (Q9) individuell wählbaren oder fix definierten, anwendungsspezifischen Optik(en); Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; Konverter im Leuchtenkörper integriert; Oberfläche pulverbeschichtet; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit unterschiedlichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe; klirrfrei

Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90, 3 SDCM
UGR ≤ 19 / 65° ≤ 3000 cd/m²
Q1 up to 95 lm/W
Q4 up to 103 lm/W
Q9 up to 105 lm/W
L90 @ 50 000 h
non DIM, DALI-2


Types




Colours




Light optics



one luminaire
multiple scenes



black & gold
reflector



tunable white
2700–5000 K

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
4000 K	6

CONTROL	
non DIM	1
DALI-2	3

LIGHT OPTIC	
spot round (UGR ≤ 10)	K
narrow medium round (UGR ≤ 10)	N
medium round (UGR ≤ 10)	B
medium square (UGR ≤ 10)	E
flood round (UGR ≤ 16)	C
flood square (UGR ≤ 19)	F
wide flood round	D
wide flood square	G

MATERIAL COLOUR	
○ traffic white RAL 9016	W
● white aluminium RAL 9006	G
● jet black RAL 9005	B
● gold dust RAL 260-M	9

LIGHT OPTIC COLOUR	
chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

Options on request

COLOUR TEMPERATURE	
tunable white 2700–5000 K	
DALI-2 DT8	


LIGHT OPTIC COLOUR	
gold reflector	

Product configurator




Create your own UNICO PRO
unico.xal.com

Planning information



The icons of the light optics are shown in the reflected ceiling plan (RCP) view.



UNICO Q1 basic ceiling



FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
	6.5 W	up to 575 lm	090-1Q1::1▲■01

choose one light optic ▲ from the options on the left depending on your room needs

UNICO Q4 basic ceiling



FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
	20.4 W	up to 1920 lm	090-1Q4::4▲■01

choose one light optic ▲ from the options on the left depending on your room needs





WALL	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
4x wallwasher	20.4 W	1620 lm	090-1Q4::4▲■001



CORNER + FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
2x wallwasher floor + 2x medium square	20.4 W	1630 lm	090-1Q4::4▲■01

UNICO Q9 basic ceiling



FLOOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
	36 W	up to 3550 lm	090-1Q9::9▲■01

choose one light optic ▲ from the options on the left depending on your room needs



WALL	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
9x wallwasher	36 W	3000 lm	090-1Q9::9▲■001




WALL + CORRIDOR	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
6x wallwasher floor + 3x rectangular	36 W	3090 lm	090-1Q9::9▲■01

LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white, reflector chrome 2700 K -6%, 4000 K +7%

Granitlab Coworking
St. Martin im Mühlkreis, AT –
by GHT-Plan GmbH with lighting design
by GHT-Plan GmbH, AREA C.I. Design GmbH



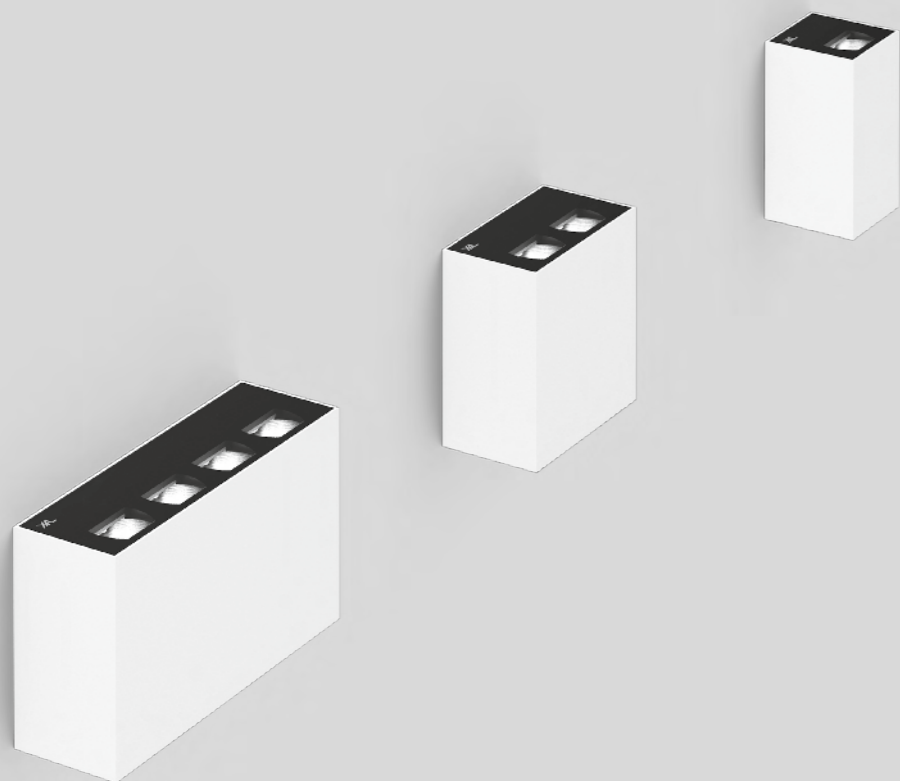

UNICO

wall surface


EN Rectangular wall surface mounted multi-uplight made of aluminium; equipped with one light inset (1 lamp) / two (2 lamps) / four (4 lamps) light insets; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high-quality reflector with micro-faceted, aluminum-vaporised surface; homogeneous wall or ceiling illumination through uniform light distribution; energy-efficient high power LEDs with very good colour rendering; luminaire for through wiring

DE Rechteckiger Wandanbau-Multi-Uplight aus Aluminium; bestückt mit einem Lichteinsatz (1 lamp) / zwei (2 lamps) / vier (4 lamps) Lichteinsätzen; Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; Konverter im Leuchtenkörper integriert; Oberfläche pulverbeschichtet; hochwertiger Reflektor mit mikrofaccettierter, aluminiumbedampfter Oberfläche; homogene Wand- bzw. Deckenaufhellung durch gleichmäßige Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe; Leuchte für Weiterverdrahtung

Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90, 3 SDCM
up to 49 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types

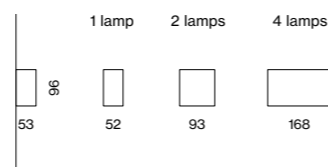

Colours




Light distribution




ceiling washer



homogeneous ceiling illumination



safety glass for dust protection



tunable white 2700–5000 K

Order options


COLOUR TEMPERATURE	
2700 K	4
3000 K	5
4000 K	6

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR	
○ traffic white RAL 9016	W
● white aluminium RAL 9006	G
● jet black RAL 9005	B

Options on request

COLOUR TEMPERATURE
tunable white 2700–5000 K
only available for 2 lamps and 4 lamps
DALI-2 DT8




UNICO wall surface




1 LAMP

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
5.9 W	240 lm	090-0L1:::T001

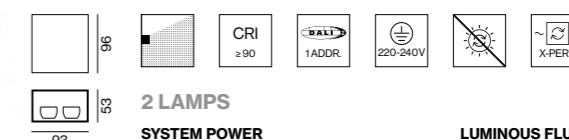

2 LAMPS


SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
17.4 W	740 lm	090-0L2:::T001

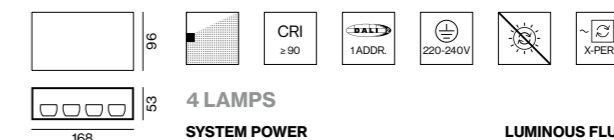

4 LAMPS

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
30.0 W	1380 lm	090-0L4:::T001

Light distribution




microprismatic
direct/indirect power

LUMINOUS FLUX value calculated for
3000 K, CRI ≥ 90, colour white, reflector chrome
2700 K -6%, 4000 K +7%

Office
Visualisation



← back

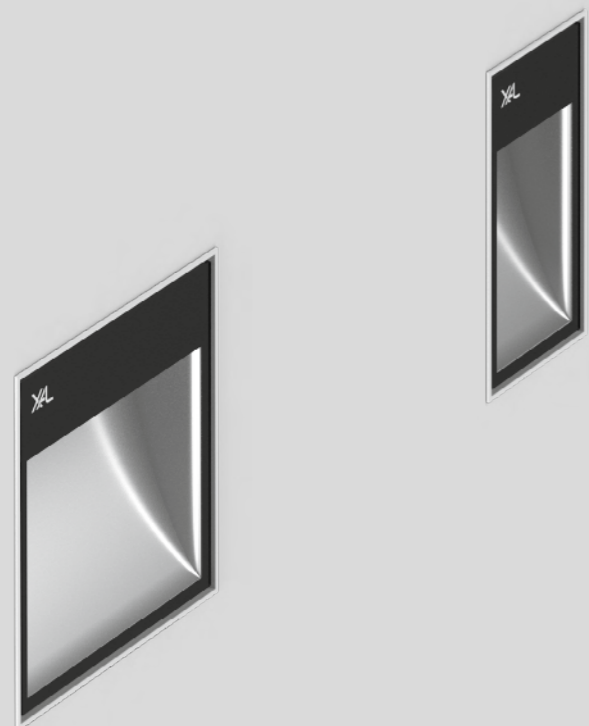

UNICO

wall recessed

EN Recessed wall luminaire in aluminium; installation without tools in mounting set (trimless or with trim) with ball catch system; installation possible in different housings; surface powder coated; incl. external converter; high-quality reflector with micro-faceted, aluminum-vaporised surface; different asymmetrical light distributions; installation optionally for floor or ceiling illumination; energy-efficient high power LEDs with very good colour rendering

DE Wandeinbauleuchte aus Aluminium; werkzeuglose Montage im Montageset (randlos oder mit umlaufendem Rand) durch Kugelschnappsystem; Einbau in unterschiedlichen Gehäusen möglich; Oberfläche pulverbeschichtet; inkl. externem Konverter; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; unterschiedliche asymmetrische Lichtverteilungen; Montage wahlweise zur Boden- oder Deckenaufhellung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe

Quickinfo

2700 K, 3000 K, 4000 K
 CRI ≥ 90, 3 SDCM
 up to 53 lm/W
 L90 @ 50 000 h
 non DIM, DALI-2

Types




Colours




Light distribution



homogeneous floor illumination



safety glass for dust protection



tunable white 2700–5000 K

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
4000 K	6

CONTROL	
non DIM	1
DALI-2	3

LIGHT OPTIC	
wide floor	


MATERIAL COLOUR	
○ traffic white RAL 9016	W
● jet black RAL 9005	B

Options on request

COLOUR TEMPERATURE	
tunable white 2700–5000 K	

only available for 2 lamps | DALI-2 DT8


Light distribution




microprismatic direct/indirect power

LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white, reflector chrome 2700 K -6%, 4000 K +7%

UNICO wall recessed



1 LAMP		LUMINOUS FLUX	ORDER CODE
SYSTEM POWER	7.3 W	340 lm	090-6L1::UB001



2 LAMPS		LUMINOUS FLUX	ORDER CODE
SYSTEM POWER	12.5 W	610 lm	090-6L2::UB001

Accessories

MOUNTING SET WITH TRIM

for intermediate ceilings 2–25 mm

TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
1 lamp	101-63-20	90-50	090-7L2020
2 lamps	101-101-30	90-50	090-7Q4020

TRIMLESS MOUNTING SET

for installation in plasterboard ceilings 12.5/15/20/25 mm

TYPE	L-W-H (mm)	CUTOUT (mm)	ORDER CODE
1 lamp	88-50-47	90-50	090-7L20100
2 lamps	85-85-47	90-50	090-7Q40100

PRIMED CONCRETE MOUNTING SET

TYPE	L-W-H (mm)	ORDER CODE
primed concrete ceilings	240-400-130	052-1914320


order mounting set separately

EXPOSED CONCRETE MOUNTING SET

TYPE	ORDER CODE
1 lamp exposed concrete	090-6L10500
2 lamps exposed concrete	090-6L20600

order mounting set separately

Planning information

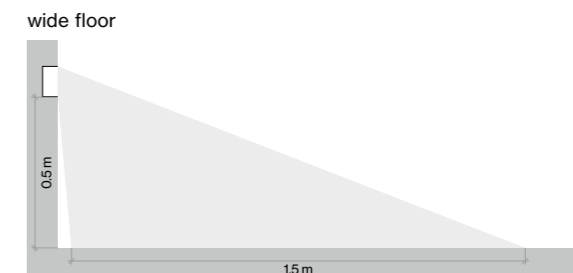

Office
Visualisation

