

# Rai 40


## Downlight Series

**arcolight**




**Class III**

**IP44**

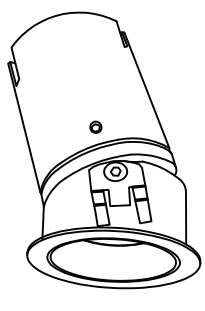


**B**


**A**

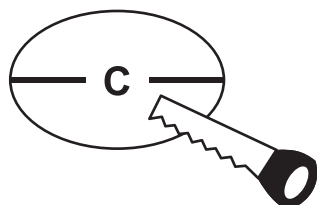

| Model  | A    | B    | C    |
|--------|------|------|------|
| Rai 40 | 42mm | 75mm | 35mm |



**Rai 40 has a 36° lens fitted, with an optional 12° and 24° lens supplied.**

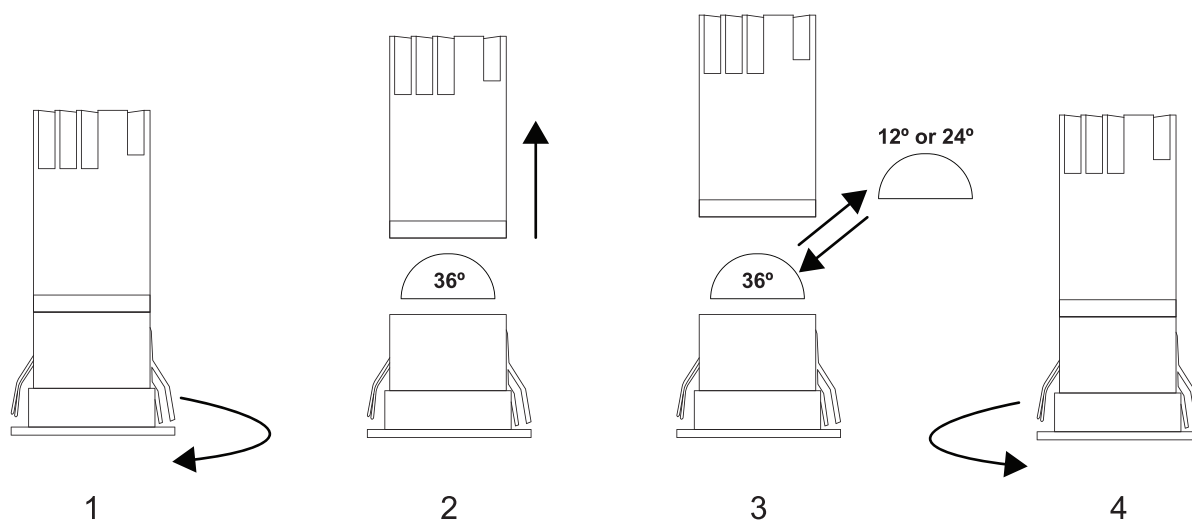

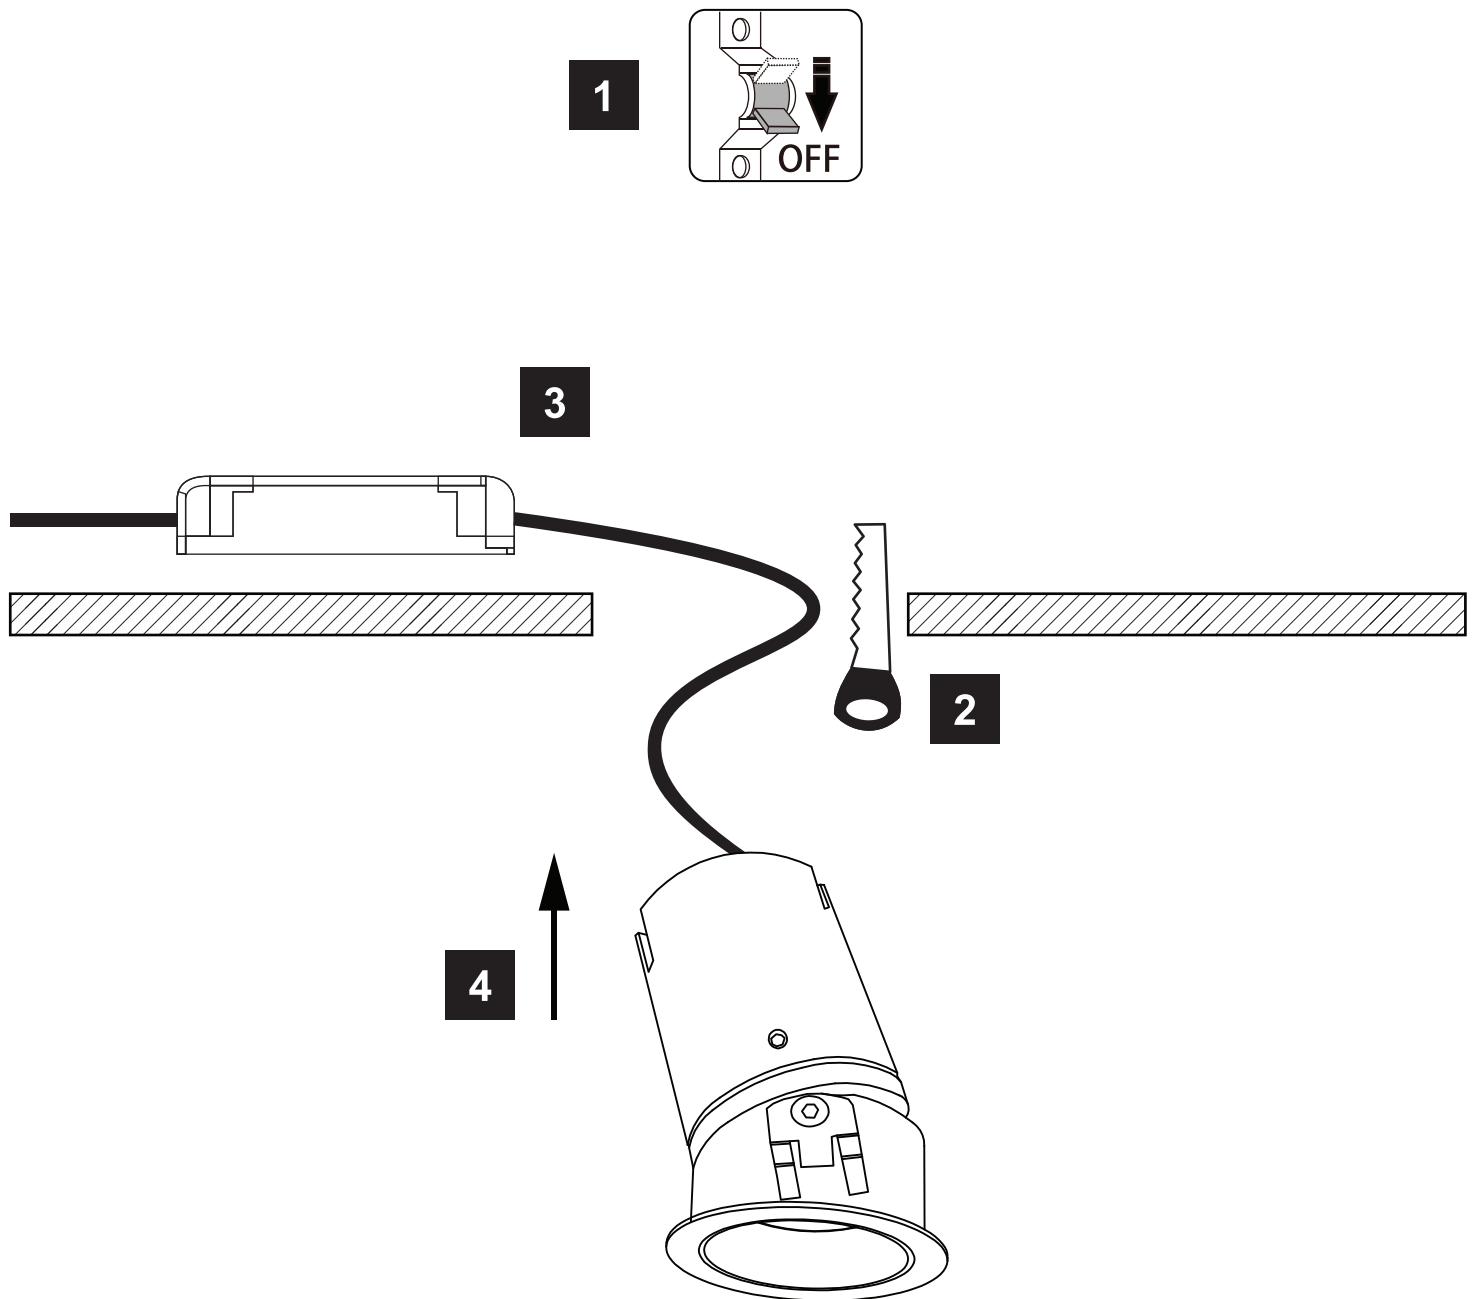

**WARNING - Declared electrical work must be installed by licensed electrician.**

## Clearance Information - AS/NZS 3000 Wiring Rules

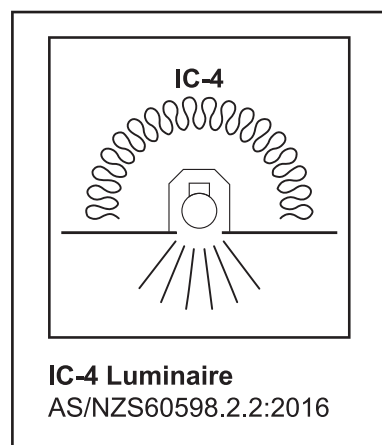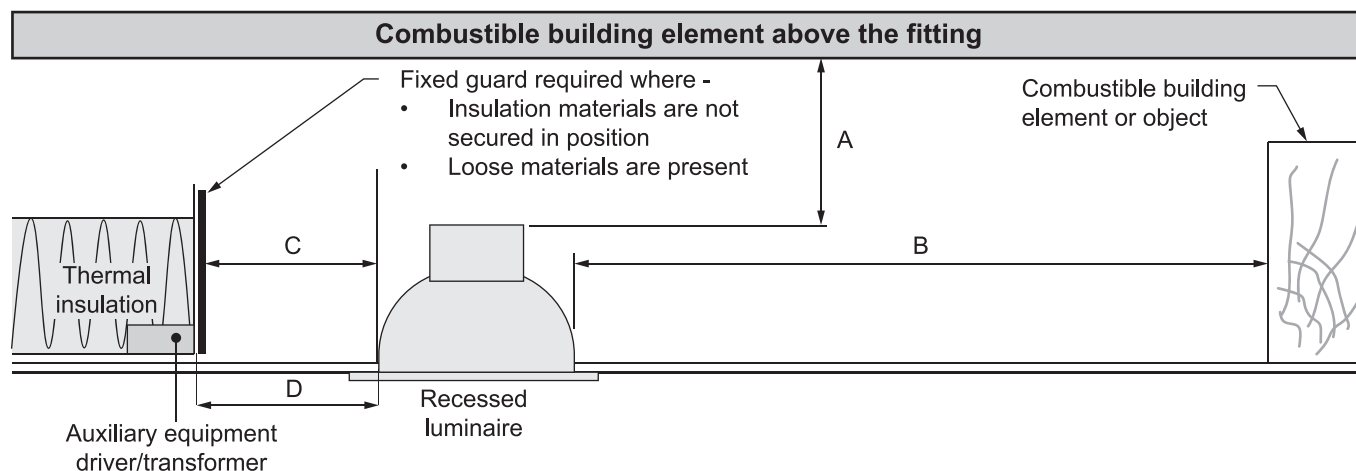

| Location                                | Distance |
|-----------------------------------------|----------|
| A - Clearance above luminaire           | 0mm      |
| B - Side clearance to Structural member | 0mm      |
| C - Clearance to thermal insulation     | 0mm      |