

Door Closers



Door Closers

- **Hold Open Arm**

Hold Open is the ability of the door closer to hold the door in the open position. Most over head door closers achieve this function via a special type arm (Hold Open Arm).



Warning Note: Hold open function are not allow to install for fire doors and smoke doors.

- **Swing Speed**


To adjustment controls how fast the door closes from fully open to within about fifteen degrees of closed.

- **Latching Speed**

To adjustment controls how fast the door closes for those last few inches.

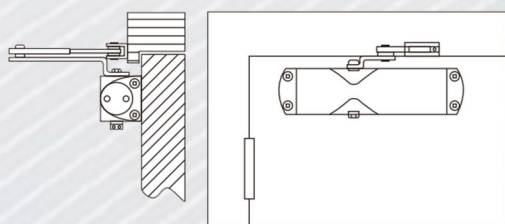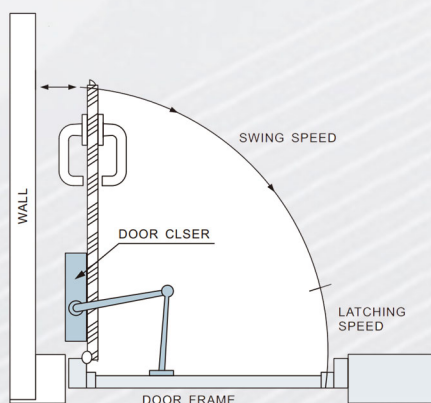


Standard Door Installation

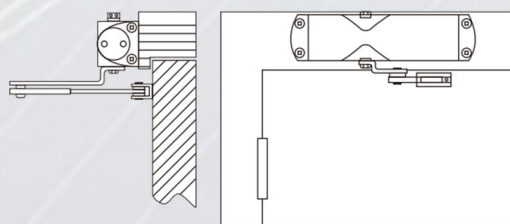

Door Frame Installation

Surface Closer

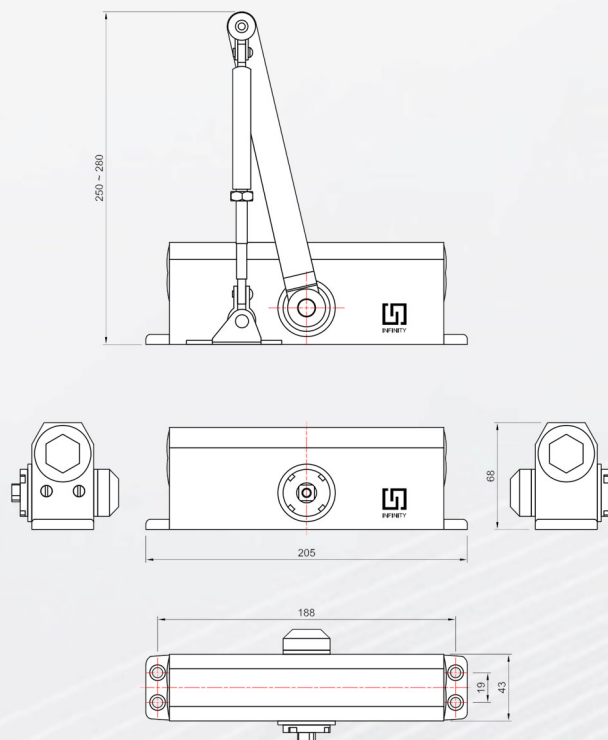


Art. No.	IDC-SC-85HO
Power Size	EN3
Width of Door (mm)	950
Weight of Door (KG)	60
Minimum Door Thickness (mm)	40
Speed	Latching & Closing Speed adjustable
Material	Aluminum
Finish	Silver
Other Finishes available upon request	

Features

- High quality imported Gaskets to prevent oil leakage.
- Strong Spring to guarantee powerful closing.
- Reliable closing with adjustable latching action
- Comply with BS EN1154

Concealed Closer

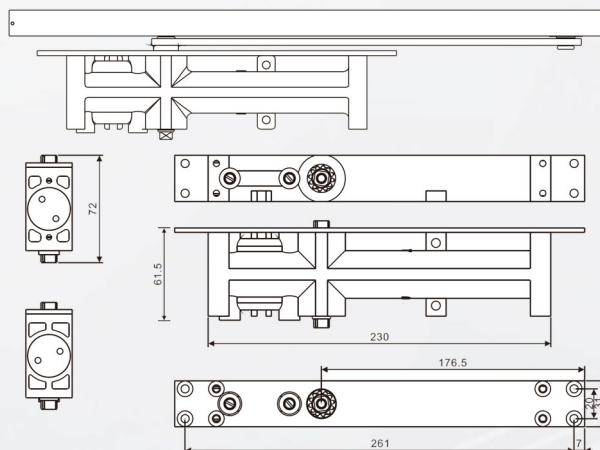


Art. No.	IDC-CC-65HO
Power Size	EN2-3
Width of Door (mm)	950
Weight of Door (KG)	60
Minimum Door Thickness (mm)	40
Speed	Latching & Closing Speed adjustable
Material	Aluminum
Finish	Silver
Other Finishes available upon request	

Features

- High quality imported Gaskets to prevent oil leakage.
- Strong Spring to guarantee powerful closing.
- Reliable closing with adjustable latching action
- 2 Speed controls: Closing speed and Latching speed.

Concealed Closer

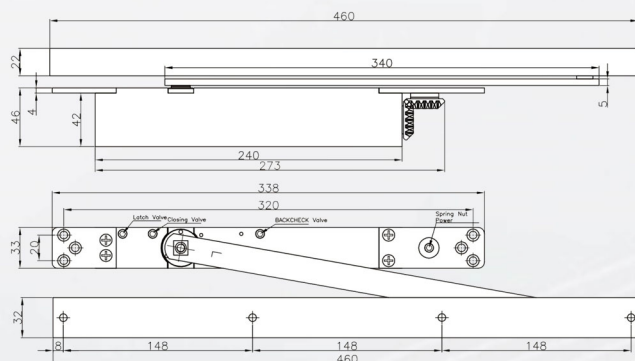

Art. No.	IDC-CC-100HO
Power Size	EN2-4
Width of Door (mm)	1100
Weight of Door (KG)	85
Minimum Door Thickness (mm)	44
Speed	Latching & Closing Speed adjustable
Material	Aluminum
Finish	Silver
Other Finishes available upon request	

Features

- Global popular style. Cam Action Mechanical, Concealed door closer.
- Suitable for all kind of doors
- Aluminum Extrusion body, Imported O-Seal ring, Full needle bearing, antifreeze and rated Hydraulic oil
- 2 Speed controls: Closing speed and Latching speed.