





Art. No. CH105SC

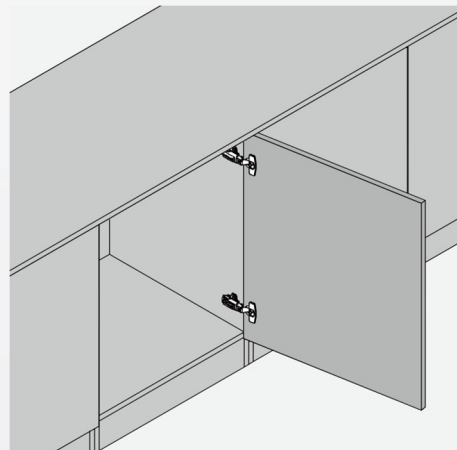


Art. No. CH105SCHO

Full overlay




Half overlay




Wooden screw(M4X16)

D	H	K	3	4	5	6	7	
0			17	18	19	20	21	H=14+k-D

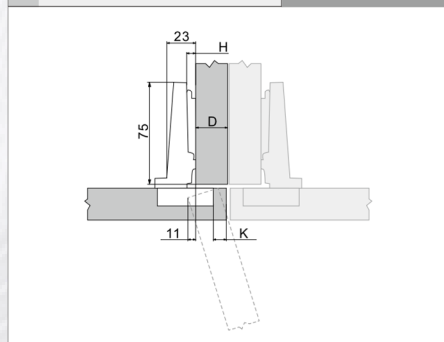


Wooden screw(M4X16)


D	H	K	3	4	5	6	7	
0			7	8	9	10	11	H=4+k-D

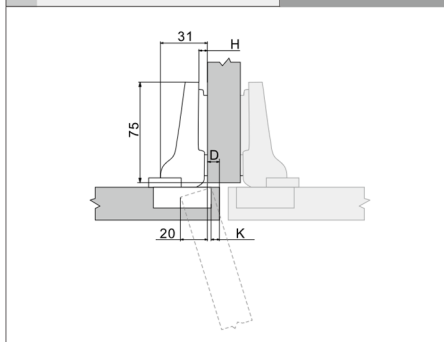

Screw mounting

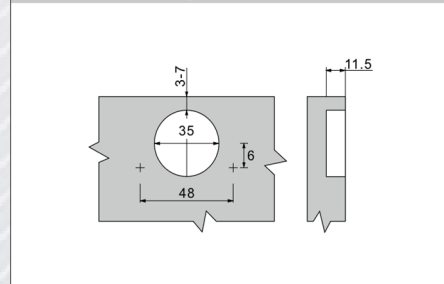

Adjustment

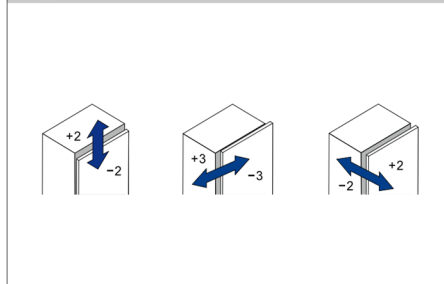


- 105°Opening Angle
- cup Diameter: 35mm
- Depth: 11.5mm
- Distance: 3~7mm
- Hoel Distance: 48mm
- Leaf Thickness: 14~20mm
- Two way structure, soft and quite
- Clip-on Adjustment with soft closing



Drawer Accessories




Item Code	Nominal length	X1	X2
CSFE2.300	300mm	230mm	275mm
CSFE2.350	350mm	275mm	320mm
CSFE2.400	400mm	300mm	376mm
CSFE2.450	450mm	335mm	421mm
CSFE2.500	500mm	360mm	466mm
CSFE2.550	550mm	405mm	511mm

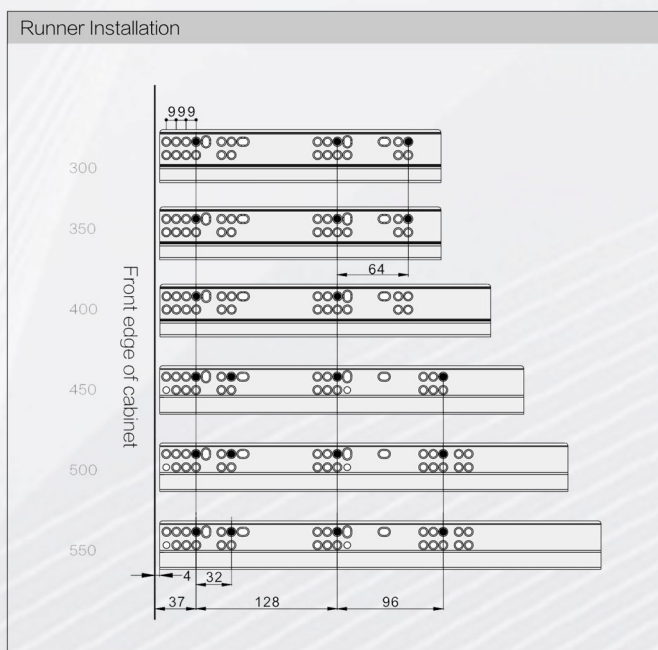

- Full Extension
- Synchronized Concealed Slide
- Load Capacity 30kg
- Smooth rolling Mechanism
- Quick Assembly

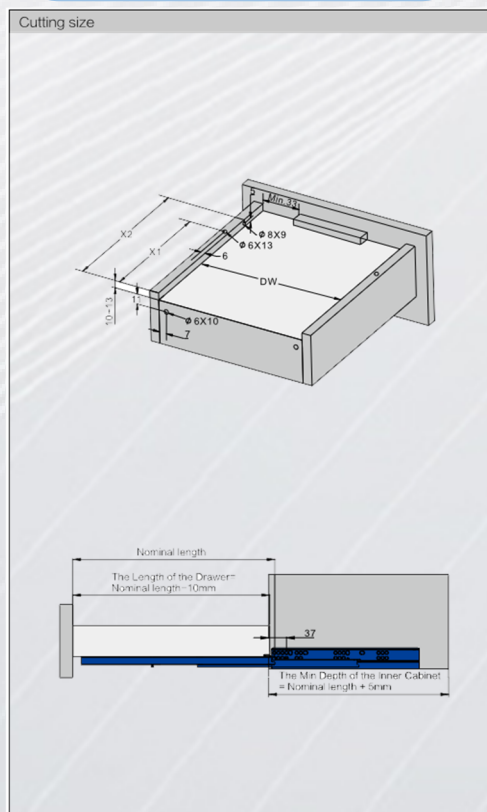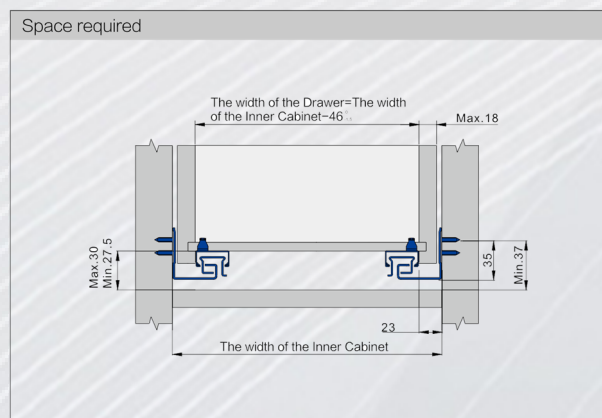




Item Code	Nominal length	Height
CS1.500A	500 mm	80 mm
CS3.500C	500 mm	170mm

- Fashionable Appearance, Slow motion, easy assembling
- Drawer height 120mm
- Synchronized concealed slide Loading Capacity 35KG
- Epoxy Coated
- 3D regulations, up and down, left and right, front and back

Space required

NL: Nominal length

Note: net height +3mm when installed
with huggen PTO system

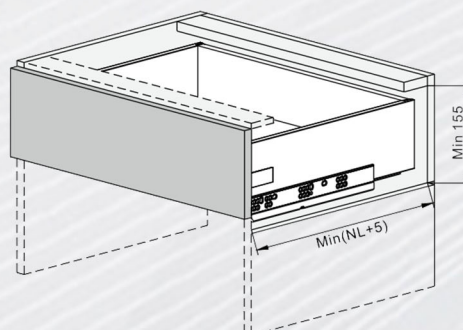

Cutting size

NL: Nominal length

LW: Inner Cabinet Width

