

Cylinders





Cylinders


Conforms with EN1303 And DIN 18252/09-1999 Standards.


Quality Solid Brass Body

30 Degree Offset Cam Inhibits Knock Through 6 Pins Standard.

Cylinders Available In A Variety Of Finish

Key Management: Kd, Master Key, Keyed Alike Grand Master Key, Construction Key

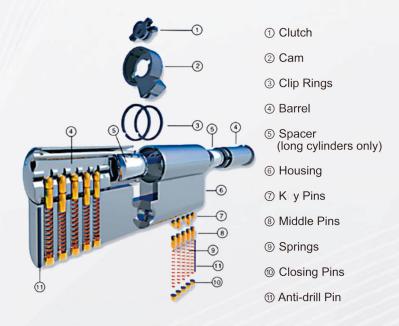




The following factors have to be considered when determining the length A of the locking cylinder:


- Door thickness
- Position of the lock in the door
- Thickness of Escutcheon on the outside
- Thickness of Escutcheon on the inside

Note:

- The Lengths B and C are each measured from the centre of the fixing screw.
- The following applies to the Length A must protrude only max. 4 mm from the Escutcheon on the outside and inside.



Double Entrance Function



Single Entrance Function



Offset Cylinder



Half Cylinder



EuroProfile Cylinders



Double Cylinder

Art. No. IC-CD70



Single Cylinder

Art. No. IC-CS45



Cylinder & Turn

Art. No. IC-CT70



Bathroom Cylinder

Art. No. IC-BT70

-	A	1		
В	- -	С	-	
				
				INFINITY 65
	-	M5		(Ne-Pril 1 Y

Material: Quality Solid Brass Body And Plug

Keys: 3 Brass Keys

Pins: 6 Brass Pins Standard

Standard: Conforms To EN1303

• Fastening screw: 65mm (standard)

 Key Management Function: Master Key, Grand Master Key, Construction Key, Keyed Alike

A(mm)	B(mm)	C(mm)			
70	35	35			
70	30	40			
80	40	40			
80	30	50			
90	45	45			
90	40	50			
45	30	10			
Finish: SN, PB, AB, CP, MB					

