




RISER CONSTRUCTED AS SPECIFIED, STANDARD 1'-8", 6" TALL, TUF-TITE OR OR EQUIVALENT.

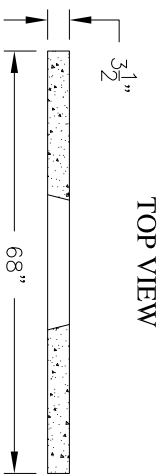


SPECIFICATIONS

- CONCRETE** - 6000 PSI minimum in 28 days.
 - REINFORCEMENT** - 6X6 10 gauge ASTM A185 65 KSI plain finish cont. around perimeter of tank. #3 bars (Grade 60) rebar, per engineering spec. as required for tanks design.
 - LID REINFORCEMENT** - #3 rebar 6" center, both ways plus a mat on 6X6 10 gauge wire.
 - PIPE PENETRATIONS** - Inlet and outlet seals water tight that meet ASTM C923.
 - PARTITION WALLS** - If present, is poured monolithically.
 - INSTALLATION** - By contractor per code with minimum of 12" on allsides of unit is required. Depth of base and material shall meet the specifications and requirements for the type of soil at the setting location. The leveling of the material will prevent tank from cracking after filling with water.
 - BACK FILL** - Before filling with water! This must be done on all sides by lowering sand.
 - DO NOT PUSH FROM SIDES.**
 - BUOYANCY** - 18" of water must remain in the tank with ___" of soil on the top of the tank.
 - TANK WARRANTY** - Limited to replacement for 1 year.
- Full warranty provided with tank purchase at location and at www.texasprecast.net
 Approx. Capacity - 836 gallons
 Approx. Weight - 4860 lbs.

**SECTION "B"
SEPTIC TANK LID**

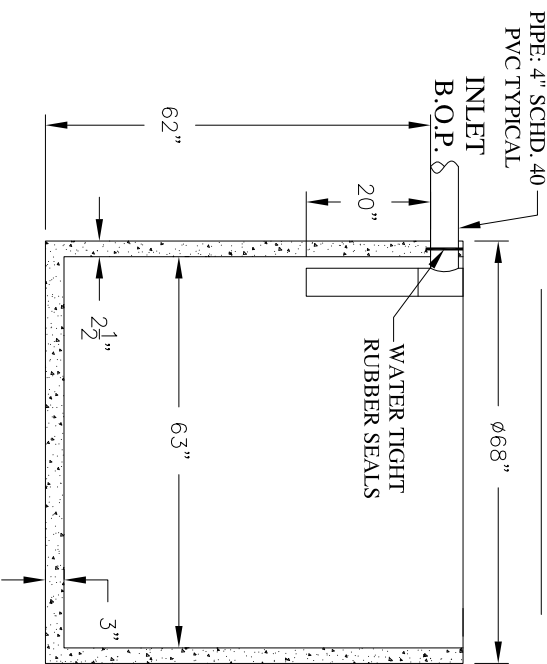

FRONT VIEW SECTION "A"

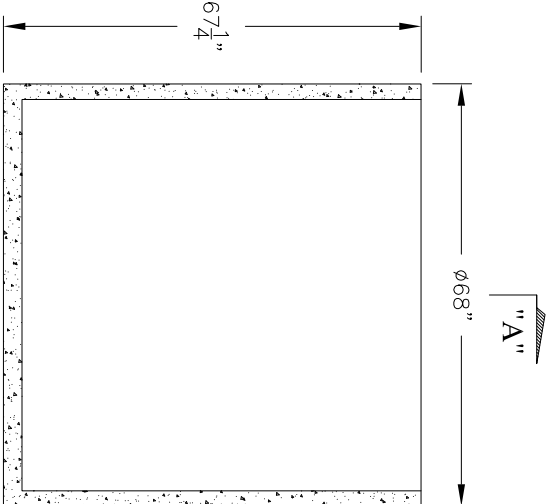

RIGHT SIDE VIEW

SEPTIC TANK BODY

WWW.TEXASPRECAST.NET
 TOLL FREE: 800-633-3235
 PHONE: 409-925-2502

TEXAS PRECAST, L.L.C.
 18303 HIGHWAY 6
 SANTA FE, TEXAS 77510

MODEL
 800R PUMP TANK