


SPECIFICATIONS


CONCRETE - 6000 PSI minimum in 28 days.

REINFORCEMENT - 2X4 12 gauge ASTM A185 65 KSI plain finish cont. around perimeter of box, #3 bars (Grade 60) rebar, per engineering spec. as required for boxes design.

LID REINFORCEMENT - #3 rebar 6" center, both ways plus a mat on 2X4 12 gauge wire.

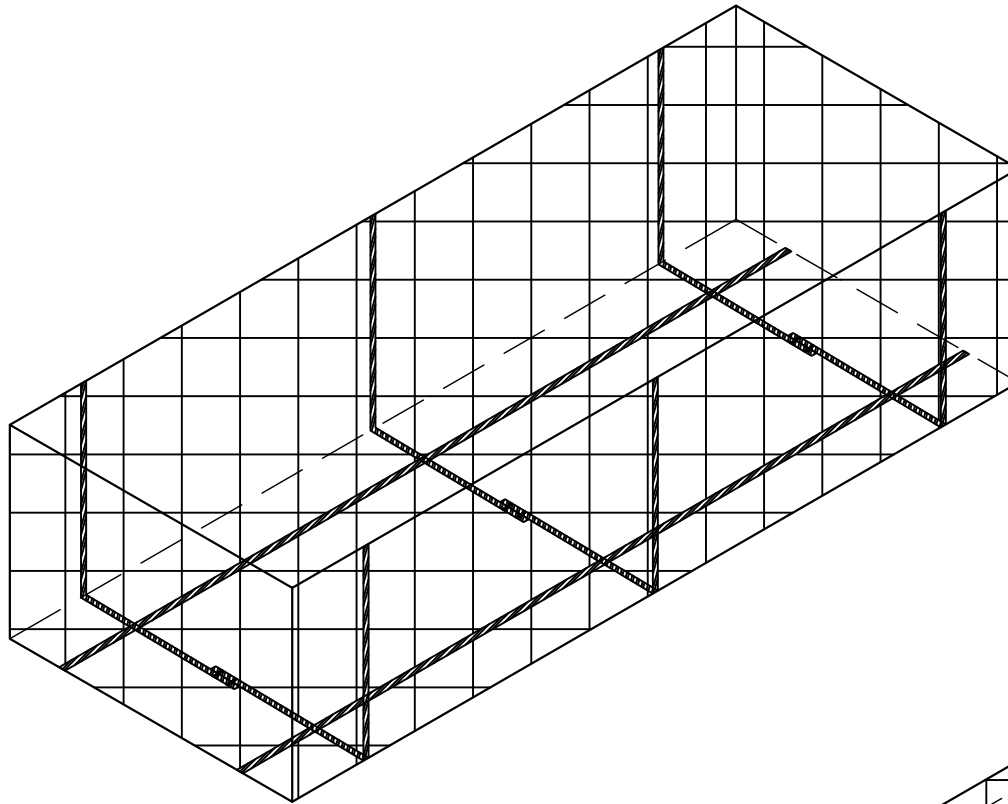

VAULT BODY

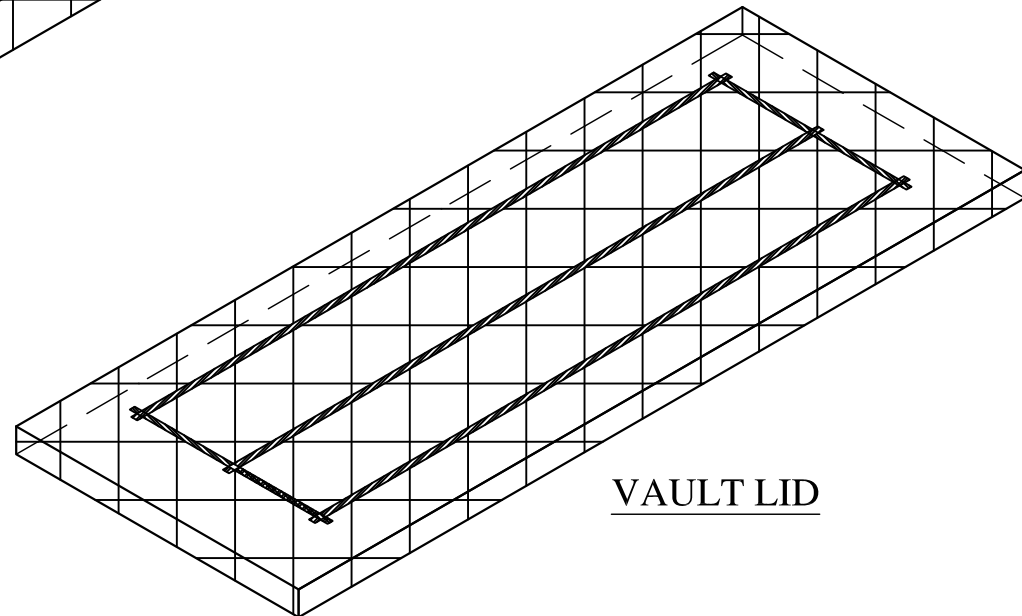

VAULT LID

WWW.TEXASPRECAST.NET

TOLL FREE: 800-633-3235
PHONE: 409-925-2502

TEXAS PRECAST, L.L.C.

18303 HIGHWAY 6
SANTA FE, TEXAS 77510

**MODEL
CONSTRUCTION OF VAULT**