

PlateRite HD 8900N-Z/S/E

Thermal Plate Recorder

*High
Definition*

*High Quality
High Speed
Automation
Environment*



High-definition CtP delivers exceptional speed and quality

Speed

Efficient production with super-fast output

70 plates* per hour

* Z model

Quality

Remarkable quality

Max. resolution of 4,000 dpi*

* Option for S and E models.

Automation

Improved operability

Autoloading system

Environment

Safe for employees, gentle on environment

Environmentally conscious CtP

Speed

Industry-leading productivity, ideal for rapid turnaround

High-speed output of 70 plates per hour

The high-end PlateRite HD 8900N-Z features a 1,024-channel imaging head that utilizes GLV™ technology and is able to output 70 plates* per hour. Additionally, with A4 size 4-page plates (650 x 550 mm, 25.5" x 21.6"), it is capable of impressive high-speed output of 80 plates per hour. A single PlateRite HD 8900N-Z can also replace output of A4 size 8-page or smaller plates using multiple CtP units. This makes processing easier to manage, and running costs and liquid waste are lower than ever.

The PlateRite HD 8900N-Z delivers the almost instantaneous response required for today's small lots and ultrashort deadlines, providing a new level of added value for clients. The S and E models also feature a 512-channel imaging head, with respective throughputs of up to 48 and 36 plates per hour.

* At 2,400 dpi, with 1,030 x 800 mm (40.5" x 31.5") plates.

Variety of plate sizes for different presses

The PlateRite HD 8900N series supports plates ranging from 304 x 305 mm (12" x 12.1") to 1,165 x 950 mm (45.8" x 37.4"). Compatibility with 6-mm leading and tailing edge clamps also enables output from a wider variety of presses. Simplified plate setting further improves operating ratios, boosting the productivity delivered by the series' high-speed output.

Increased channels boost productivity



GLV™ 1,024 channel imaging head



Quality

Outstanding reproduction, cutting-edge exposure technology

Creation of sharper halftone dots with the latest technology

Use of the latest GLV-equipped exposure heads creates significant improvements in the optical system, producing more uniform distribution of illumination. A high-precision auto-focus mechanism also enables output of SCREEN's proprietary Spekta 2 hybrid screening and Randot X 20 (20 μm) FM screening.*

* For supported plate types

High-resolution, high-quality output

The high-definition S and E models support ultrafine AM halftone dots that provide a maximum resolution of up to 700 lpi. Tuning



175 lpi at 2,400 dpi



700 lpi at 4,000 dpi (print sample)
*Not multi screening

also enables output using Randot X 10 (10 μm) FM screening. Together these features deliver the extremely high quality required for detailed output such as art printing.*


All models now also support lenticular output mode, which uses spiral imaging correction to cancel out pixel shift. This mode eliminates the interference moire created by lenticular lenses and is highly effective for the imaging of high-precision straight lines, such as those in microtext and bar codes.

In addition, using either 4,000 or 4,800 dpi mode enables high-resolution output that includes 3D lenticular printing.*

* For supported plate types



Example of high-end lenticular production

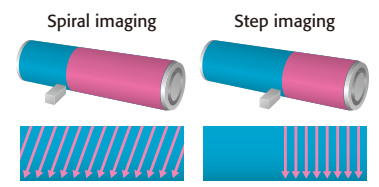

3D lenticular mode specification

Automation

An autoloader system can be installed to automate the entire platemaking process, from plate loading through imaging and transport to developing. The autoloader enables extended periods of continuous operation and significantly increases both productivity and press operating ratios.

Loading of plates during processing

The MA-L8900 allows plates to be loaded into the cassette during continuous operation. This avoids downtime when additional plates are required and maximizes productivity and press operating ratios.




The ergonomic design ensures easy operation even when adding plates to cassettes.

Autoloader maximizes productivity

MA-L8900 multi-cassette autoloader


The MA-L8900 comes standard with three plate cassettes (up to five as an option) and full automation of both plate supply and cassette switching. Each cassette holds up to 100 plates,* for a maximum of 500 plates stored in the autoloader. Even if different plate sizes are loaded into separate cassettes, the autoloader flexibly switches between the cassettes as required. Loading all cassettes with the same plate size enables extended periods of continuous operation.

* For 0.3-mm plates



SA-L8900 single-cassette autoloader


The SA-L8900 features a single cassette that holds up to 100 plates*, as well as automatic detection and removal of interleaf paper. Its transport system only contacts the rear side of a plate, preventing damage to the sensitive emulsion side. Manual loading is also possible, giving operators the flexibility to select plate sizes as required. * For 0.3-mm plates



SKID Autoloader*


The skid autoloader enables a pallet to be set directly to the system. This reduces operator intervention, improving productivity and eliminates the risk of damaging plates during preparation.

* This product is provided by a third-party manufacturer.



SA-L8600E single-cassette autoloader

The SA-L8600E features a single cassette that holds up to 120 plates (0.24 mm thickness). This highly compact system offers major reductions in initial costs.






PlateRite HD 8900N + MA-L8900

Remote monitoring optimizes operation

Constant checking of CtP status from a remote location

CtP operating conditions and output history can easily be checked from a remote location via Web browser or email*. An external PC can also be effectively used as a substitute operation panel, allowing users at remote locations to make CtP settings and send commands. In addition, inclusion of a self-diagnosis function allows the confirmation of correct operation of the CtP and autoloader units. This provides straightforward assessment of required parts if a problem occurs, enabling rapid recovery of the equipment. Emails* are also automatically forwarded to a service center, allowing an in-depth understanding of the operation status of the equipment. This information can be used during maintenance, repairs, and periodic inspections, ensuring the system remains in optimal condition at all times (support contract required).

* Can be forwarded to up to five email addresses

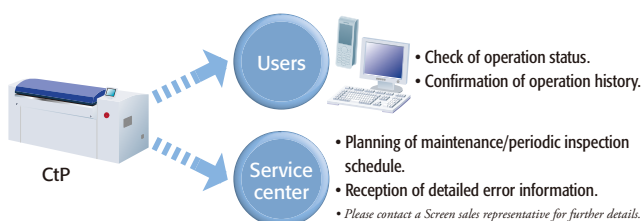

Minimization of plate exchange/replacement times


If an autoloader is connected, the number of plates remaining in the cassettes is monitored in real time. When there are only a few plates left, an instruction to prepare for cassette replacement can be displayed on either the Web browser or operation panel. As cassettes can be moved to the plate insertion position from a remote location, the time required for plate exchange and replacement is minimized. This contributes to the achievement of an even higher CtP operation rate.

| No. | Plate | Remain |
|------|----------|--------|
| No.1 | 650*550 | 9 |
| No.2 | 300*370 | 90 |
| No.3 | 910*600 | 45 |
| No.4 | 910*600 | Empty |
| No.5 | 1030*800 | 20 |


Screen assesses the environmental impact of all its products as a form of design review. The PlateRite HD 8900N series has been developed with the goals of minimizing energy use and environmental impact while maximizing safety.

- Energy use during operation has been cut by up to 43%.*
- A power-saving mode allows energy savings of up to 88%* during idling.
- The PlateRite HD8900N has a low environmental impact and complies with the RoHS directive.
- All models are compatible with chemical-less plates from a range of manufacturers.

Gentle on the environment

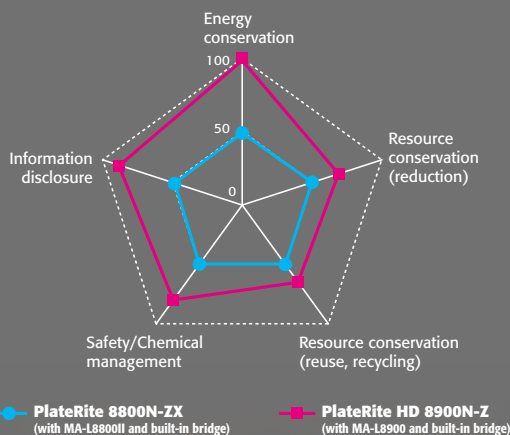

Trends in PlateRite 8000 series electricity consumption (Screen measurements)

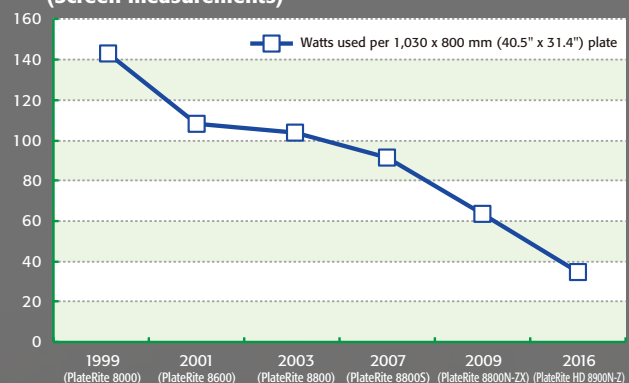

The PlateRite series supports all types of chemical-less plates sold by plate makers. This reduces both the electricity consumption and chemical volume used by the developing unit after imaging as well as the ink volume used when Spekta 2 AM/FM hybrid screening is applied. These features demonstrate the significant progress of Screen's environmental efforts. In addition, the latest PlateRite HD

8900N models for the high-demand A4-8 page size have been developed with even greater emphasis on environmental concerns. With the Z model, power consumption during operation has been reduced by up to 43 percent per plate,* while the installation of a power saving mode decreases power consumption during standby by 88 percent.*

* As power consumption levels are also affected by the operating environment and other external factors, the above values cannot be guaranteed.

Comparison of the PlateRite HD 8900N-Z and PlateRite 8800N-ZX when an MA-L and built-in bridge are connected. The conditions of a room temperature of 25°C (77°F) and during operation are for a resolution of 2,400 dpi and plate size of 1,030 x 800 mm (40.5" x 31.4").

PlateRite HD 8900N-Z/S/E specifications

| Product Name | PlateRite HD 8900N-Z | PlateRite HD 8900N-S | PlateRite HD 8900N-E |
|---------------------------|---|--|--|
| Model Name | PT-R8900N | | |
| Recording system | External drum | | |
| Light source | 1,024-channel laser diode | 512-channel laser diode | |
| Plate size | Maximum: 1,165 × 950 mm (45.8" × 37.4"); Minimum: 304 × 305 mm (12" × 12.1")*1 | | |
| Exposure size | Maximum: 1,165 × 938 mm (45.8" × 36.9") | | |
| Plate | Thermal aluminum plate | | |
| Plate thickness | 0.15 to 0.3 mm (5.9 mil to 11.8 mil) [0.4 mm (15.7 mil)*2 available as an option] | | |
| Resolutions | 1,200*3/2,400/2,438/2,540 dpi | 1,200*3/2,400/2,438/2,540 dpi 4,000 dpi (only available when the high resolution option*4 is selected) 4,800 dpi (only available when the lenticular option*4 is selected) | |
| Repeatability | ±5 µm*5 | | |
| Productivity *6 | 70 plates/hr at 2,400 dpi (1,030 × 800 mm/40.5" × 31.4" plates) 80 plates/hr at 2,400 dpi (650 × 550 mm/25.5" × 21.6" plates) | 48 plates/hr at 2,400 dpi (1,030 × 800 mm/40.5" × 31.4" plates) 64 plates/hr at 2,400 dpi (650 × 550 mm/25.5" × 21.6" plates) | 36 plates/hr at 2,400 dpi (1,030 × 800 mm/40.5" × 31.4" plates) 49 plates/hr at 2,400 dpi (650 × 550 mm/25.5" × 21.6" plates) |
| Interface | Gigabit Ethernet | | |
| Punch systems | Screen, Heidel, Heidelbach W, Protocol, and Komori punch systems are standard; all others are special orders. (Up to twelve individual punch blocks can be selected and mounted as an option, depending on the plate sizes and printing press types being used.) | | |
| Step imaging | Standard | Option (Only available when the high resolution option*4 is selected) | |
| Dimensions (W × D × H) | Main unit: 2,640 × 1,475 × 1,394 mm (104" × 58.1" × 54.9")(blower unit is internal) | | |
| Weight | Main unit: 1,115 kg (2,530 lb) | | |
| Power requirements | Main unit: Single phase 200 to 240 V, 3.2 kW, 16 A Chiller unit*7: Single phase 200 to 240 V, 0.7 kW (0.6 kW), 4 A (3 A) (SA-L/MA-L8900 are supplied by main unit)*9 | | |
| Environment | Recommended: 21 to 25°C (69.8 to 77°F); Required: 18 to 26°C (64.4 to 78.8°F); Relative humidity: 40 to 70% (no condensation) | | |
| Required options *8 | MA-L8900, SA-L8900, SA-L8600E or plate insertion table | | |
| Options | Plate transport system to connect with plate processor (built-in bridge, AT-M8001), various press punches, support for 0.4 mm (15.7 mil) thickness, support for 4,000 dpi high resolution*4, support for 4,800 dpi lenticular*4, air filter unit (AF-190), upgrade to S specifications, skid autoloader connection kit*10, signal tower | | |
| Applicable standard | Main unit: Approved UL, CSA, Declared CE Chiller unit: Approved UL, CSA, Declared CE | | |

*1 Plates wider than 590 mm (23.3") and narrower than 610 mm (24") cannot be used. *2 Plates that are 0.4 mm (15.7 mil) thick must be 900 × 770 mm (35.5" × 30.4") or larger.

*3 1,200 dpi uses 2,400 dpi double dots. *4 Option must be selected before the unit is shipped from the factory. *5 Over four consecutive exposures on one plate at 23°C (73.4°F) and 60% relative humidity.

*6 This value is for when an autoloader is connected. Productivity may vary depending on the sensitivity of the plate. *7 The specification of the chiller depends on the region.

*8 One of the options must be selected. Consult a Screen representative regarding throughput when the plate insertion table is chosen.


*9 The SA-L8600E requires an independent power supply. *10 The kit only includes the interface for connection.

Autoloader specifications


| Product Name | SA-L8900 | MA-L8900 | SA-L8600E |
|---------------------------|---|---|--|
| Compatible models*1 | PlateRite HD 8900N-Z/S/E, PlateRite HD 8900-Z/S/E, PlateRite 8600NII-Z/S/E | | PlateRite HD 8900N-Z/S/E, PlateRite 8600NII-Z/S/E |
| No. of cassettes | 1 | Up to 5 cassettes (3 cassettes as standard) | |
| Cassette capacity | 100 plates (0.15 to 0.3 mm thickness) 75 plates (More than 0.3 mm thickness) | 100 plates per cassette (0.15 to 0.3 mm thickness) 75 plates per cassette (More than 0.3 mm thickness) | 100 plates (0.15 to 0.3 mm thickness) |
| Plate size | Maximum: 1,165 × 950 mm (45.8" × 37.4"); Minimum: 304 × 305 mm (12" × 12.1") | | |
| Plate thickness | 0.15 to 0.4 mm (5.9 mil to 15.7 mil) | | 0.15 to 0.3 mm (5.9 mil to 11.8 mil) |
| Dimensions (W × D × H) | 1,827 × 2,351 × 1,530 mm (72" × 92.6" × 60.3") | 3,345 × 2,351 × 1,530 mm (131.7" × 92.6" × 60.3") | 1,700 × 1,510 × 1,285 mm (67.0" × 59.5" × 50.6") |
| Weight*2 | 600 kg (1,320 lb) | 1,088 kg (2,393.6 lb) | 300 kg (660 lb) |
| Power requirements | Supplied by main unit | | Independent supply (Single phase 200 to 240 V, 5 A) |
| Environment | Recommended: 21 to 25°C (69.8 to 77°F); Required: 18 to 26°C (64.4 to 78.8°F); Relative humidity: 40 to 70% (no condensation) | | |
| Options | Additional carrier-type cassette (with dustproof cover) Left layout kit | Additional cassette Left layout(Factory option) | PlateRite HD 8900N connection kit PlateRite 8600NII connection kit PlateRite 8600NII external loading connection kit |

*1. Not supported for the PlateRite 8800N/8600N/8300N. *2. Not including the weight of the plates.

Dimensions

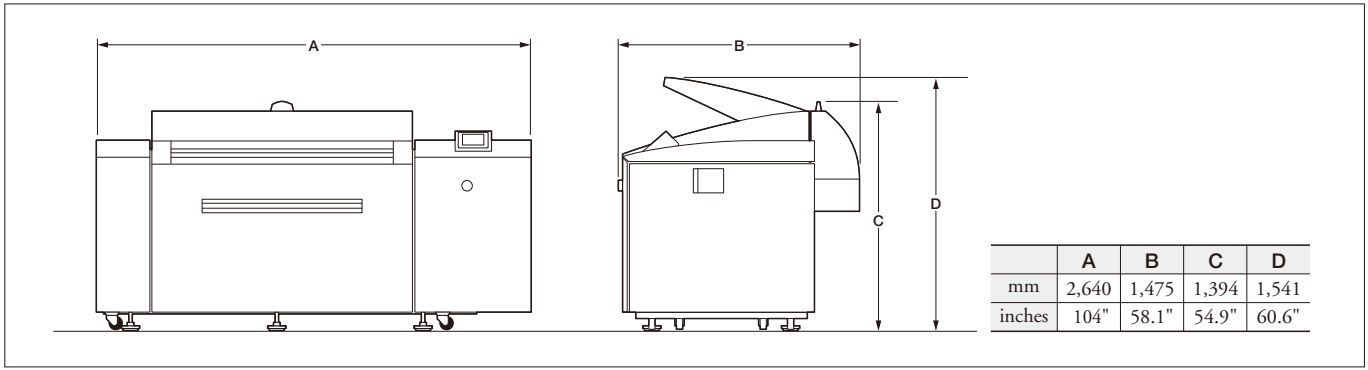

Floor plan

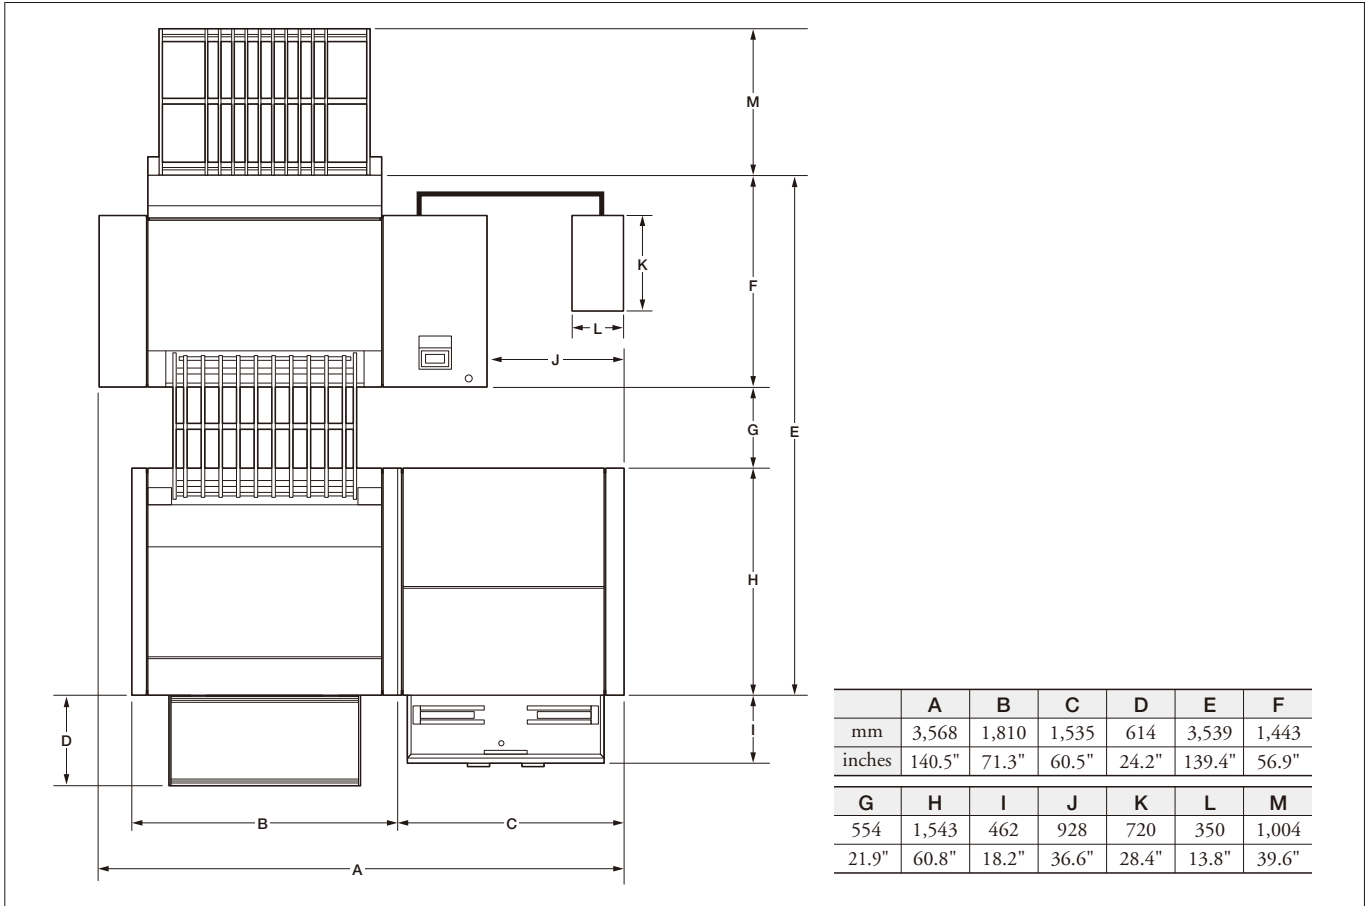

SCREEN Graphic Solutions Co., Ltd.

HEAD OFFICE

• Tenjinkita-machi 1-1, Teranouchi-agaru 4-chome, Horikawa-dori, Kamigyo-ku, Kyoto 602-8585, Japan / Tel: +81-75-414-7610

SCREEN GP Americas, LLC

• 150 Innovation Drive - Ste A, Elk Grove Village, IL 60007, U.S.A. / Tel: +1-847-870-7400 / Fax: +1-847-870-0149 www.screenamericas.com

SCREEN GP Europe B.V.

• Boswerf 46, 1185XX Amstelveen, The Netherlands / Tel: +31-20-456-78-00 www.screeneurope.com

U.K. office / Tel: +44-1582-72-5400

SCREEN GA Shanghai Co., Ltd.

• Room A06, 1/F, Building No.1, No.40 Wen Shui Road, Shanghai, China, 200072 / Tel: +86-21-3126-5122 www.screenchina.com

Beijing office / Tel: +86-10-6708-9271

Guangzhou office / Tel: +86-20-8928-9363

Hongkong office / Tel: +852-2953-0038

SCREEN HD Korea Co., Ltd.

• K-TOWER 11F, 88, Ilijik-ro, Manan-gu, Anyang-si, Gyeonggi-do, 13901, Korea / Tel: +82-2-727-0800 / Fax: +82-2-727-0876 www.screen-korea.com

SCREEN GP Australia PTY., Ltd.

• Suite 16A, 2 Eden Park Drive, Macquarie Park, NSW 2113, Australia / Tel: +61-2-9016-3400 / Fax: +61-2-9016-3425 www.screenaustralia.com.au

SCREEN GP Taiwan Co., Ltd.

• 4th Floor, No. 126-1, Min-tsu West Road, Taipei, Taiwan R.O.C. / Tel: +886-2-2586-2711 / Fax: +886-2-2591-4367 www.screen-gptw.com.tw

Internet web site : www.screen.co.jp/ga/en
www.screenamericas.com
www.screeneurope.com

The QR code on the right can be used to check whether this brochure is the latest version.



We reserve the right to alter product design and specifications without prior notice.

No.205-177E V2-E SCI 04-22

Printed by the Truepress Jet520HD+ / SC inks