



BLOCK ENCLOSURE DETAIL "A"

TRASH ENCLOSURE CONSTRUCTION STANDARDS


- 1.) Walls are to be of decorative block, masonry, or similar materials. (Not precision block)
- 2.) Gates are to be solid and painted to match.
- 3.) Accessible pedestrian access is required if in multi-family areas. See page (4) for these requirements.
- 4.) Double swing gates shall have the swivel spots outside of the opening area of the enclosure. Swivel points shall be attached to concrete filled steel posts/columns at ends of walls.
- 5.) Enclosure shall be on a level pad at ground level. The area between the pad and the pick up area shall be paved area 6" deep for the width of the enclosure and shall not exceed a grade of 2 percent.
- 6.) Enclosures shall be configured, at a minimum of 7'-6" deep with a 6' high decorative wall and a sight obscuring gate. (Specific design criteria refer to Exhibit A or B)
- 7.) 8" x 8" concrete curb around perimeter of enclosure.
- 8.) Maximum wall and gate height to be 6'-0"
- 9.) Trash enclosure shall have a trellis above the gates and enclosure to prevent unauthorized trash dumping into the bins. Said trellis shall be made of steel and painted to match the building trim colors to accentuate the enclosure.
- 10.) TOTAL Enclosure height (including block wall and trellis shall be no more than 8'-0".
- 11.) (3) bays may be required dependent on amount of green waste produced – Per California AB 1826 (See Page 3 for dimensions)

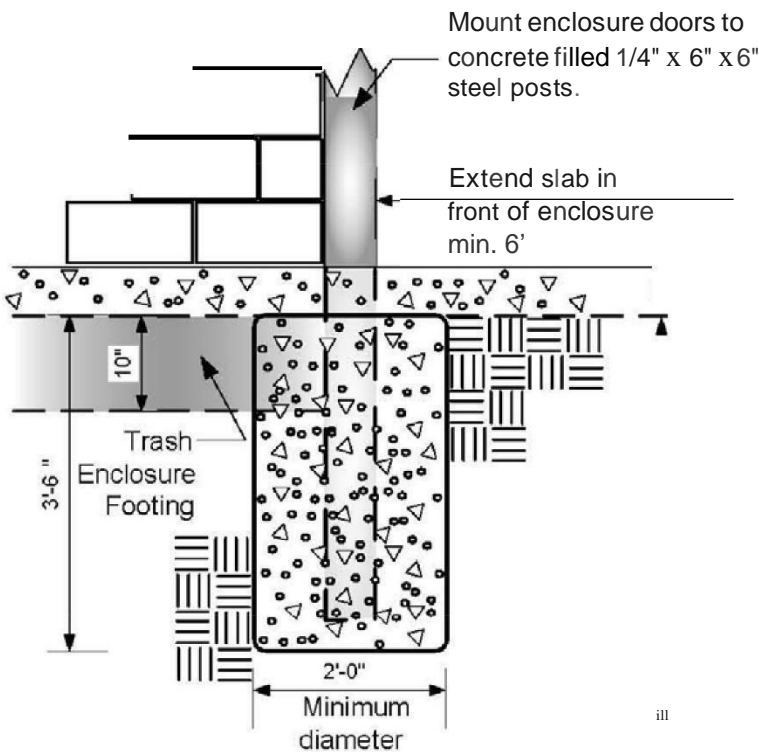

DOOR FOOTING DETAIL "B"

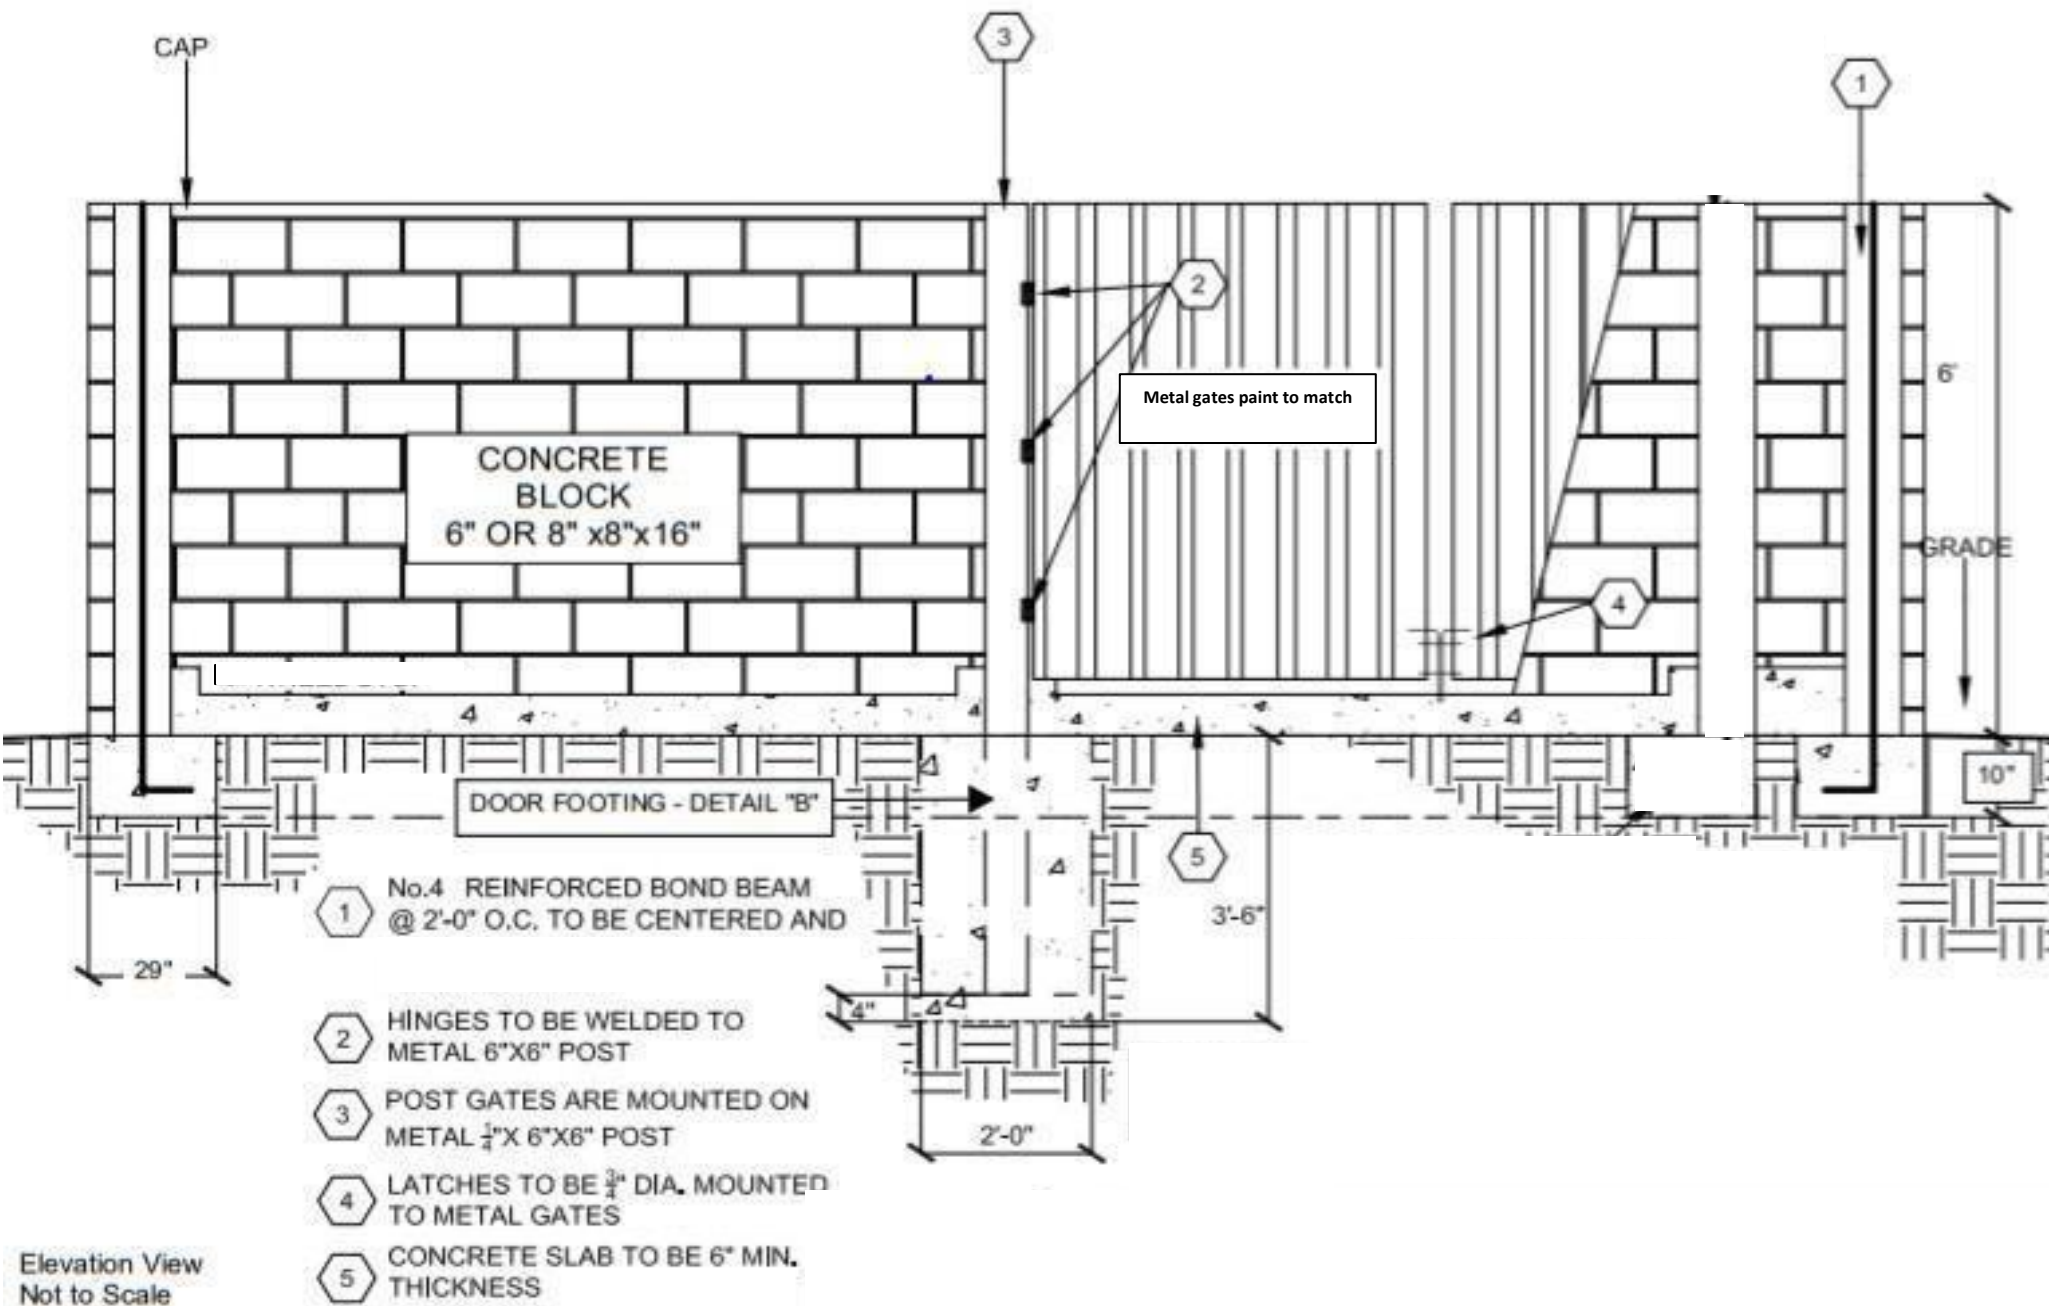

Elevation View
Not to Scale

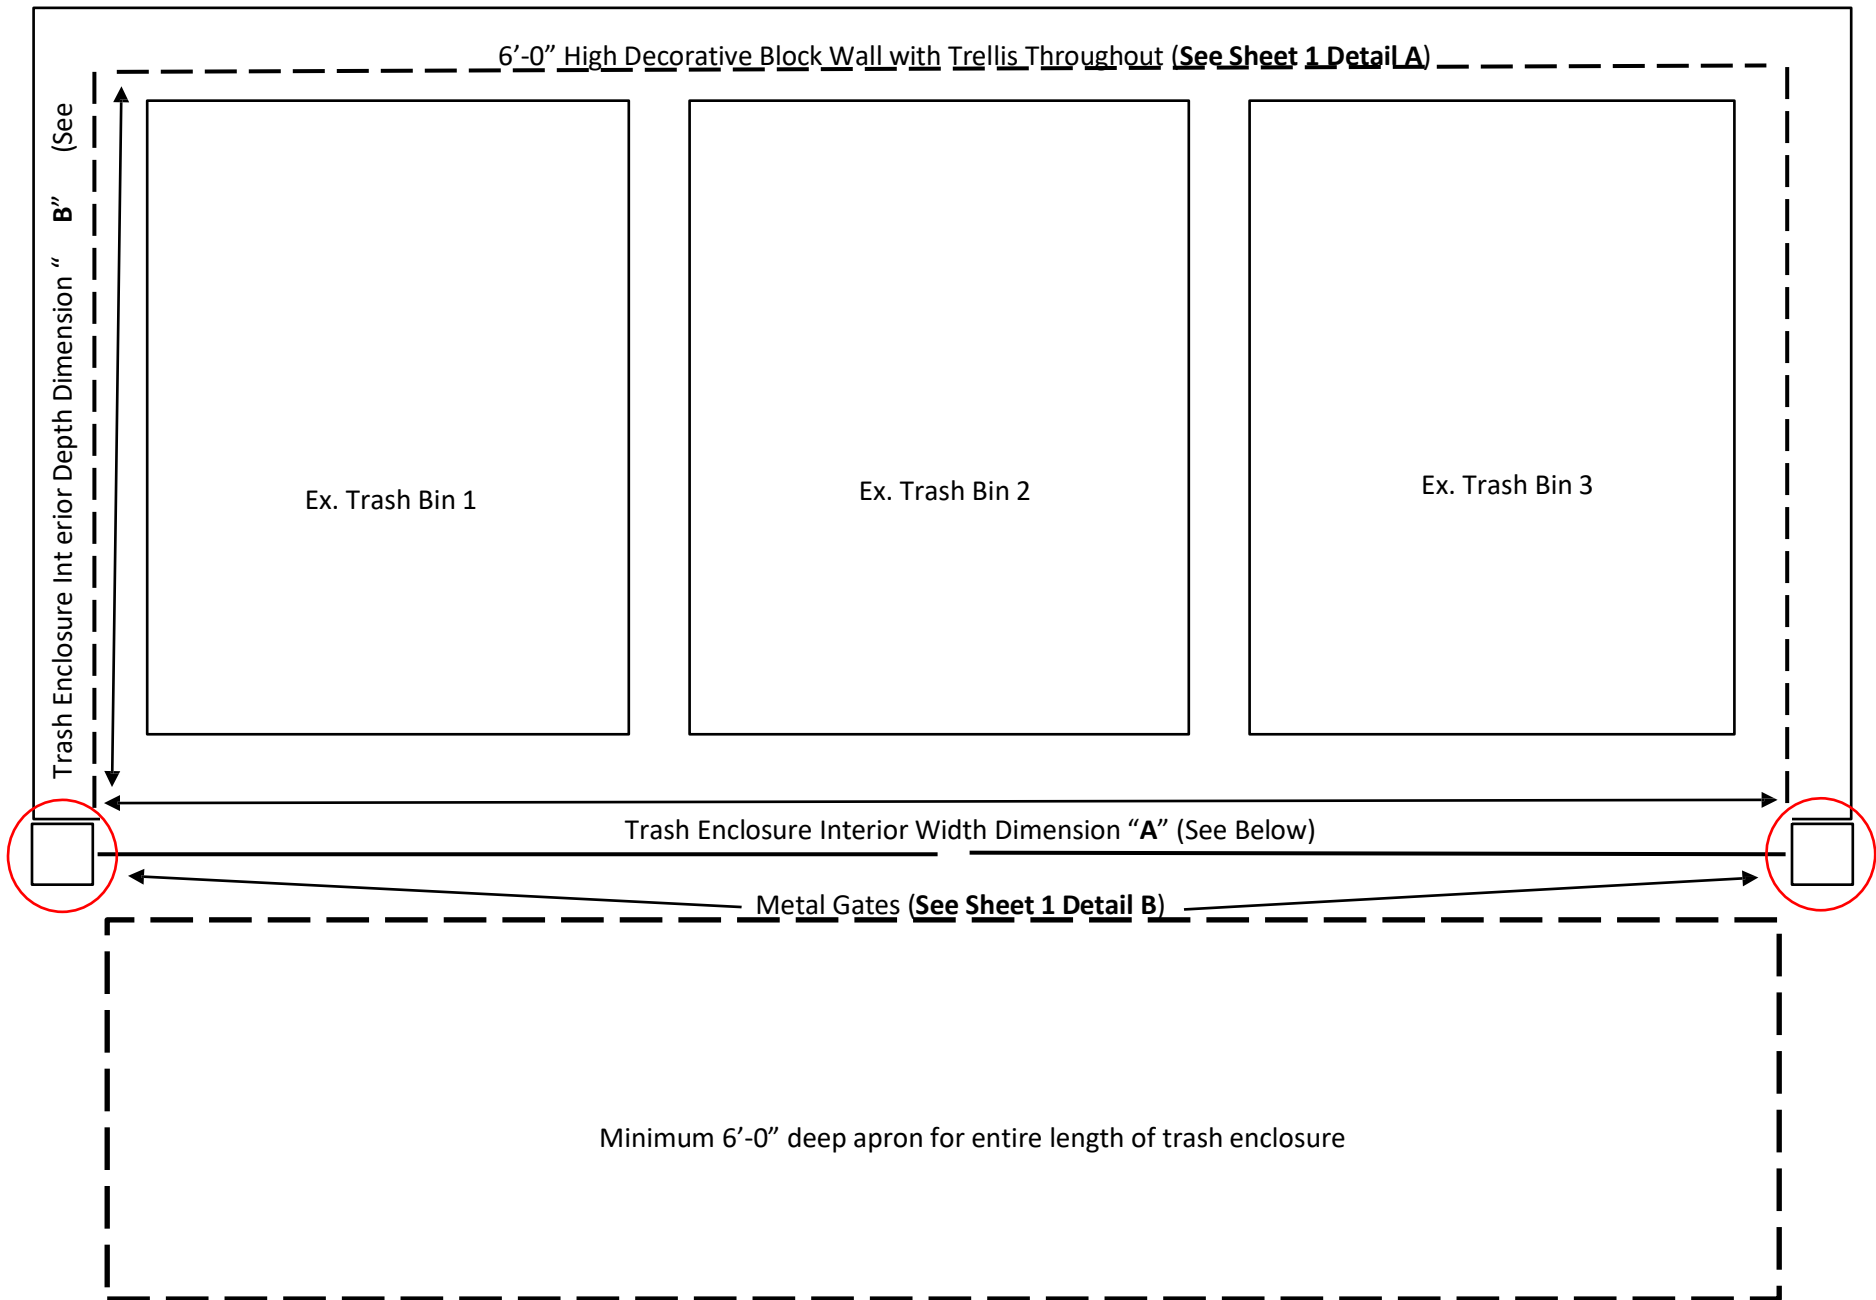

Dimensions for **2 CU. YARD** bin:

"A" – Width: 11'-0"

"B" – Depth: 7'-9"

Dimensions for **3 CU. YARD** bin:

"A" – Width: 14'-0"

"B" – Depth: 7'-9"

Dimensions for **4 CU. YARD** bin:

"A" – Width: 16'-0"

"B" – Depth 7'-9"

Accessible Pedestrian Path of Travel Details

