

GENERAL NOTES FOR ALL ELECTRICAL WORK

1. The location of all conduits, junction boxes, ground boxes, and electrical services is diagrammatic and may be shifted to accommodate field conditions.
2. Provide new and unused materials. Ensure that all materials and installations comply with the applicable articles of the National Electrical Code (NEC), TxDOT standards and specifications, National Electrical Manufacturers Association (NEMA), and are listed by Underwriters Laboratories (UL) or a Nationally Recognized Testing Lab (NRTL). NRTLs such as Canadian Standard Association (CSA), Intertek Testing Services NA Inc., or FM Approvals LLC can be considered equivalent to UL. Where reference is made to NEMA listed devices, International Electrotechnical Commission (IEC) listed devices will not be considered an acceptable equal to a NEMA listed device. Acceptable devices may have both a NEMA and IEC listing. Faulty fabrication or poor workmanship in any material, equipment, or installation is justification for rejection. Replace or reinstall rejected material or equipment at no additional cost to the Department.
3. Miscellaneous nuts, bolts and hardware, except for high strength bolts, may be stainless steel when plans specify galvanized, provided the bolt size is 1/2 in. or less in diameter.
4. Provide the following test equipment as required by the Engineer to confirm compliance with the contract and the NEC: voltmeter, ammeter, megohm meter (1000 volt DC), ground resistance tester, torque wrenches, and torque screwdrivers. Ensure all equipment has been properly calibrated within the last year. Provide calibration certification to the Engineer upon request. Operate test equipment during inspection as requested by the Engineer.
5. Install grounding as shown on the plans and in accordance with the NEC. Ensure all metallic conduits; metal poles; luminaires; and metal enclosures are bonded to the equipment grounding conductor. Provide stranded bare copper or green insulated grounding conductors. Ground rods, connectors, and bonding jumpers are subsidiary to the various bid items.
6. When required by the Engineer, notify the Department in writing of materials from the Material Producers List (MPL) intended for use on each project. Prequalified materials are listed on the MPL on TxDOT's website under "Roadway Illumination and Electrical Supplies." No substitutions will be allowed for materials on this list.

CONDUIT

A. MATERIALS

1. Provide conduit, junction boxes, fittings, and hardware as per TxDOT Departmental Material Specification (DMS) 11030 "Conduit" and Item 618 "Conduit" of TxDOT's "Standard Specifications For Construction And Maintenance Of Highways, Streets, And Bridges," latest edition. Provide conduits listed under Item 618 on the MPL under "Roadway Illumination and Electrical Supplies." Provide conduit types according to the descriptive code or as shown on the plans. Do not substitute other types of conduits for those shown. Provide liquidtight flexible metal conduit (LFMC) when flexible conduit is called for on galvanized steel rigid metallic conduit (RMC) systems. Provide liquidtight flexible nonmetallic conduit (LFNC) when flexible conduit is called for on polyvinyl chloride (PVC) systems.
2. Provide galvanized steel RMC for all exposed conduits, unless otherwise shown on the plans. Properly bond all metal conduits.
3. Unless otherwise shown on the plans, provide junction boxes with a minimum size as shown in the following table, which applies to the greatest number of conductors entering the box through one conduit with no more than four conduits per box. When a mixture of conductor sizes is present, count the conductors as if all are of the larger size. For situations not applicable to the table, size junction boxes in accordance with NEC.

AWG	3 CONDUCTORS	5 CONDUCTORS	7 CONDUCTORS
#1	10" x 10" x 4"	12" x 12" x 4"	16" x 16" x 4"
#2	8" x 8" x 4"	10" x 10" x 4"	12" x 12" x 4"
#4	8" x 8" x 4"	10" x 10" x 4"	10" x 10" x 4"
#6	8" x 8" x 4"	8" x 8" x 4"	10" x 10" x 4"
#8	8" x 8" x 4"	8" x 8" x 4"	8" x 8" x 4"

4. Junction boxes with an internal volume of less than 100 cu. in. and supported by entering raceways must have threaded entries or hubs identified for the intended purpose and supported by connection of two or more rigid metal conduits. Secure conduit within 3 ft. of the enclosure or within 18 in. of the enclosure if all conduit entries are on the same side. Mechanically secure all junction boxes with an internal volume greater than 100 cu. inches.
5. Provide hot dipped galvanized cast iron or sand cast aluminum outlet boxes for junction boxes containing only 10 AWG or 12 AWG conductors. Do not use die cast aluminum boxes. Size outlet boxes according to the NEC.
6. Do not use intermediate metal conduit (IMC) or electrical metallic tubing (EMT) unless specifically required by the plan sheets. When EMT is called for, provide junction boxes made from galvanized steel sheeting, listed and approved for outdoor use, unless otherwise noted on the plans. Size all galvanized steel junction boxes in accordance with the NEC. Provide junction boxes for IMC conduit systems that meet the same requirements for junction boxes used with RMC systems.
7. Provide PVC junction boxes intended for outdoor use on PVC conduit systems, unless otherwise noted on the plans.


8. Provide PVC elbows in PVC conduit systems, unless otherwise shown on the plans. Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the PVC conduit system. When galvanized steel RMC elbows are specifically called for in the plans and any portion of the RMC elbow is buried less than 18 in., ground the RMC elbow by means of a grounding bushing on a rigid metal extension. Grounding of the rigid metal elbow is not required if the entire RMC elbow is encased in a minimum of 2 in. of concrete. PVC extensions are allowed on these concrete encased rigid metal elbows. RMC or PVC elbows are subsidiary to various bid items.
9. When required, provide High-Density Polyethylene (HDPE) conduit with factory installed internal conductors according to Item 622 "Duct Cable." At the Contractor's request and with approval by the Engineer, substitute HDPE conduit with no conductors for bored schedule 40 or schedule 80 PVC conduit bid under Item 618. Ensure bored HDPE substituted for PVC is schedule 40 and of the same size PVC called for in the plans. Ensure the substituted HDPE meets the requirements of Item 622, except that the conduit is supplied without factory-installed conductors. Make the transition of the HDPE conduit to PVC (or RMC elbow when required) at the bore pit. Provide conduit of the size and schedule as shown on the plans. Do not extend substituted conduit into ground boxes or foundations. Provide PVC or galvanized steel RMC elbows as called for at all ground boxes and foundations.
10. Use two-hole straps when supporting 2 in. and larger conduits. On electrical service poles, properly sized stainless steel or hot dipped galvanized one-hole standoff straps are allowed on the service riser conduit.

B. CONSTRUCTION METHODS

1. Provide and install expansion joint conduit fittings on all structure-mounted conduits at the structure's expansion joints to allow for movement of the conduit. In addition, provide and install expansion joint fittings on all continuous runs of galvanized steel RMC conduit externally exposed on structures such as bridges at maximum intervals of 150 ft. When requested by the project Engineer, supply manufacturer's specification sheet for expansion joint conduit fittings. Repair or replace expansion joint fittings that do not allow for movement at no additional cost to the Department. Provide the method of determining the amount of expansion to the Engineer upon request. Do not use LFMC or LFNC as a substitute for the required expansion conduit fittings.
2. Space all conduit supports at maximum intervals of 5 ft. Install conduit spacers when attaching metal conduit to surface of concrete structures. See "Conduit Mounting Options" on ED(2). Install conduit support within 3 ft. of all enclosures and conduit terminations.
3. Do not attach conduit supports directly to pre-stressed concrete beams except as shown specifically in the plans or as approved by the Engineer.
4. Unless otherwise shown on the plans, jack or bore conduit placed beneath existing roadways, driveways, sidewalks, or after the base or surfacing operation has begun. Backfill and compact the bore pits below the conduit per Item 476 "Jacking, Boring, or Tunneling Pipe or Box" prior to installing conduit or duct cable to prevent bending of the connections.
5. When placing conduit in the sub-grade of new roadways, backfill all trenches with excavated material unless otherwise noted on the plans. When placing conduit in the sub-base of new roadways, backfill all trenches with cement-stabilized base as per requirements of Items 110 "Excavation", 400 "Excavation and Backfill for Structures", 401 "Flowable Backfill", 402 "Trench Excavation Protection", and 403 "Temporary Special Shoring."
6. Provide and place warning tape approximately 10 in. above all trenched conduit as per Item 618.
7. During construction, temporarily cap or plug open ends of all conduit and raceways immediately after installation to prevent entry of dirt, debris and animals. Temporary caps constructed of durable duct tape are allowed. Tightly fix the tape to the conduit opening. Clean out the conduit and prove it clear in accordance with Item 618 prior to installing any conductors.
8. Ensure conduit entry into the top of any enclosure is waterproof by installing conduit sealing hubs or using boxes with threaded bosses. This includes surface mounted safety switches, meter cans, service enclosures, auxiliary enclosures and junction boxes. Grounding bushings on water tight sealing hubs are not required.
9. Fit the ends of all PVC conduit terminations with bushings or bell end fittings. Provide and install a grounding type bushing on all metal conduit terminations.
10. Install a bonding jumper from each grounding bushing to the nearest ground rod, grounding lug, or equipment grounding conductor. Ensure all bonding jumpers are the same size as the equipment grounding conductor. Bonding of conduit used as a casing under roadways for duct cable is not required, if the duct extends the full length through the casing.
11. At all electrical services, install a 6 AWG solid copper grounding electrode conductor.
12. Place conduits entering ground boxes so that the conduit openings are between 3 in. and 6 in. from the bottom of the box. See the ground box detail on sheet ED(4).
13. Seal ends of all conduits with duct seal, expandable foam, or by other methods approved by the Engineer. Seal conduit immediately after completion of conductor installation and pull tests. Do not use duct tape as a permanent conduit sealant. Do not use silicone caulk as a conduit sealant.
14. File smooth the cut ends of all mounting strut and conduit. Before installing, paint the field cut ends of all mounting strut and RMC (threaded or non-threaded) with zinc rich paint (94% or more zinc content) to alleviate overspray. Use zinc rich paint to touch up galvanized material as allowed under Item 445 "Galvanizing." Do not paint non-galvanized material with a zinc rich paint as an alternative for materials required to be galvanized.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

				Traffic Operations Division Standard	
<h1>ELECTRICAL DETAILS CONDUITS & NOTES</h1>					
<h2>ED(1) - 14</h2>					
FILE:	ed1-14.dgn	DWG:	CK:	DW:	CK:
© TxDOT	October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS		1392	01	044	FM 1378
		DIST	COUNTY		SHEET NO.
		18	COLLIN		252

ELECTRICAL CONDUCTORS

A. MATERIAL INFORMATION

1. Provide Type XHHW insulated conductors in accordance with Departmental Material Specification (DMS) 11040 "Conductors" and Item 620 "Electrical Conductors." Provide conductors as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies" Item 620. Color code insulated conductors in conformance with the NEC. Identify grounded (neutral) conductors with white insulation. Identify grounding conductors (ground wires) with green insulation or bare conductors. Identify ungrounded (hot) conductors with any color insulation except green, white, or gray. Keep color scheme consistent throughout the wiring system. Identify conductors 6 American Wire Gauge (AWG) and smaller by continuous color jacket. Identify electrical conductors 4 AWG and larger by continuous color jacket or by colored tape. When identifying conductors with colored tape, mark at least 6 in. of the conductor's insulation with half laps of tape.
2. Provide a solid copper 6 AWG grounding electrode conductor to bond the electrical service equipment to the concrete encased grounding electrode or the ground rod at the service location. Connect the grounding electrode conductor to the ground rod with a UL listed connector in accordance with DMS 11040. Connect the grounding electrode conductor to the concrete encased grounding electrode as shown in the plans.
3. Where two or more circuits are present in one conduit or enclosure, permanently identify the conductors of each branch circuit by attaching a non-metallic tag around both circuit conductors at each accessible location. Provide tags with two straps, large enough to indicate circuit number, letter, or other identification as shown in the plans. Print circuit identification on the tag with a permanent marker.
4. Use listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors for splicing as specified in DMS 11040. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Provide UL listed gel-filled insulating splice covers. Splicing materials, insulating materials, breakaway disconnects, splice covers, and fuse holders are subsidiary to various bid items.

B. CONSTRUCTION METHODS

1. Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the conduit system. After installing conductors in conduit, perform conductor pull test. If a conductor cannot be freely pulled, make any needed alterations or repairs at no additional cost to the department. Perform insulation resistance tests in accordance with Item 620. Coordinate with the Engineer to witness the tests.
2. Leave 2 ft. minimum, 3 ft. maximum length for each conductor up to the splice in ground boxes. Leave 3 ft. minimum, 4 ft. maximum length of conductor in ground boxes when pulled through with no splice. Leave 1 ft. minimum, 1.5 ft. maximum length of conductor at enclosures, weatherheads and pole bases.
3. Make splices only in junction boxes, ground boxes, pole bases, or electrical enclosures and use only listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors. Insulate splices with heavy wall heat shrink tubing or gel-filled insulating splice covers to provide a watertight splice. Overlap conductor insulation with heat shrink tubing a minimum of 2 in. past both sides of the splice. Where heat shrink tubing may not shrink sufficiently to provide a watertight seal around the individual conductors, prior to heating the tubing, increase the diameter of the conductor insulation using hot melt adhesive tape to provide a watertight seal between the individual conductors and the heat shrink tubing. Ensure the tape extends past the heat shrink tubing. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Heat shrink tubing that appears to have been burned, or overheated, is considered defective and must be replaced.
4. Size and install gel-filled insulating splice covers according to manufacturer's specifications when used in place of heat shrink tubing.
5. Wire nuts with factory applied waterproof sealant may be used for 8 AWG or smaller conductors in above ground junction boxes, but not in pole bases or ground boxes. Install wire nuts in an upright position to prevent the accumulation of water.
6. Support conductors in illumination poles with a J-hook at the top of the pole.
7. When terminating conductors, remove the insulation and jacketing material without nicking the individual strands of the conductor. Conductors with nicked individual conductor strands or removed strands will be considered damaged.
8. Replace conductors and cables that are damaged beyond repair or that fail an insulation resistance test at no additional cost to the department.
9. Do not repair damaged conductors with duct tape, electrical tape, or wire nuts. Use only approved splicing methods.
10. Do not terminate more than one conductor under a single connector, unless the connector is rated for multiple conductors. Do not exceed the pressure connector's listing for maximum number and size of conductors allowed.
11. Install breakaway connectors on conductors bid under Item 620 whenever those conductors pass through a breakaway support device. Follow manufacturer's instructions when terminating conductors to breakaway connectors. Properly torque threaded connections. Proper terminations are critical to the safe operation of breakaway devices. Trim waterproofing boots on breakaway connectors to fit snugly around the conductor to ensure waterproof connection. Only one conductor may enter a single opening in a boot. Provide waterproof boots with the correct number of openings. Leave unused openings factory sealed. Use prequalified breakaway connectors as shown on the MPL.

12. Provide and install a separate stranded equipment grounding conductor (EGC) in all conduits that contain circuit wiring of 50 volts or more. Unless shown elsewhere, size the EGC to be the same size as the largest current carrying conductor contained in the conduit. Ensure all EGCs are bonded together at every accessible location. For traffic signal installations, provide a minimum size 8 AWG EGC. The EGC is paid for under Item 620.

C. TEMPORARY WIRING

1. Install temporary conductors and electrical equipment in accordance with the NEC article "Temporary Installations" and Department standard sheets.
2. Provide a ground fault circuit interrupter (GFCI) for power outlets for portable electrical equipment, power tools, ice machines, ice storage bins and refrigerators located outdoors at grade. GFCI may be any one of the following: molded cord and plug set, receptacle, or circuit breaker type.
3. Use listed wire nuts with factory applied sealant for temporary wiring where approved.
4. Enclose conductor splices within a listed enclosure or ground box, or ensure the splices are more than 10 ft. above grade vertically and more than 5 ft. horizontally from any metal structure. Where installing temporary conductors in areas subject to vehicle traffic or mobile construction equipment, ensure the vertical clearance to ground is at least 18 ft. when measured at the lowest point. Ground messenger wires that support power conductors in conformance with the NEC.
5. Protect and when necessary repair any existing electrical conduits uncovered during the construction process in a timely manner and in conformance with the NEC.


GROUND RODS & GROUNDING ELECTRODES

A. MATERIAL INFORMATION


1. Provide and install a grounding electrode at electrical services. Provide ground rods according to DMS 11040 and the plans. Larger diameter or longer length rods may be called for in some specific locations, see the individual plans sheets. Concrete encased grounding electrodes may be called for in specific locations including electrical service, see individual plan sheets.

B. CONSTRUCTION METHODS


1. Furnish auxiliary ground rods for lightning protection and install in soil, concrete, or both, as called for in the plans. For ground rods installed in concrete, ensure the connection of the conductor to the ground rod is readily accessible for inspection or repairs. For ground rods installed in soil, ensure that the upper end is between 2 to 4 in. below finished grade.
2. Do not place ground rods in the same drilled hole as a timber pole.
3. Install ground rods so the imprinted part number is at the upper end of the rod.
4. Remove all non-conductive coatings such as concrete splatter from the rod at the clamp location.
5. Route all conductors as short and straight as possible for connection to lightning protection ground rods. When a bend is required, ensure a minimum radius bend of four inches for these conductors.
6. Unless otherwise called for in the plans, protect grounding electrode conductors with non-metallic conduit. When protecting grounding electrode conductors with metal conduit, provide and install a grounding type bushing and properly sized bonding jumper on each end of the metal conduit.
7. Written authorization is required before installing a ground rod in a horizontal trench for rocky soil or a solid rock bottom.

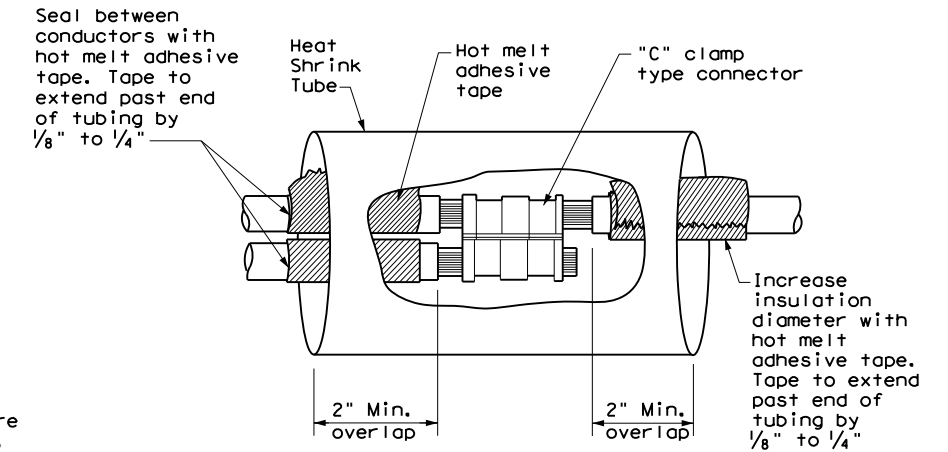

**SPLICE OPTION 1
Compression Type**

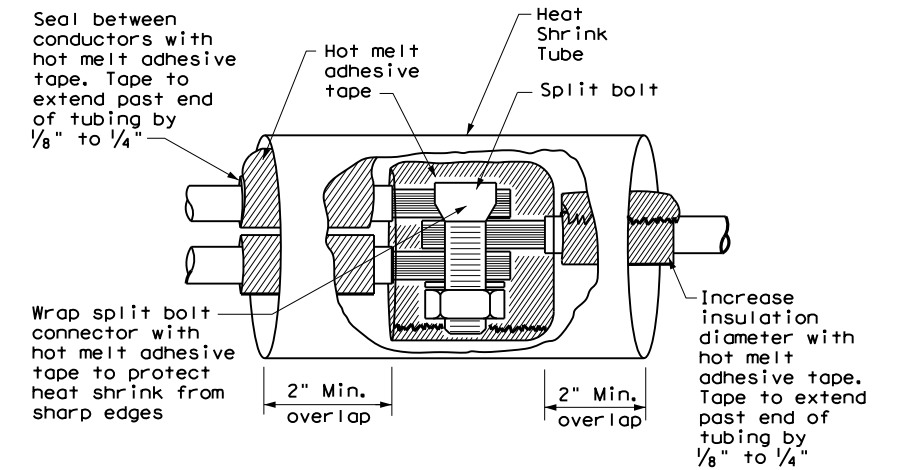

**SPLICE OPTION 2
Split Bolt Type**

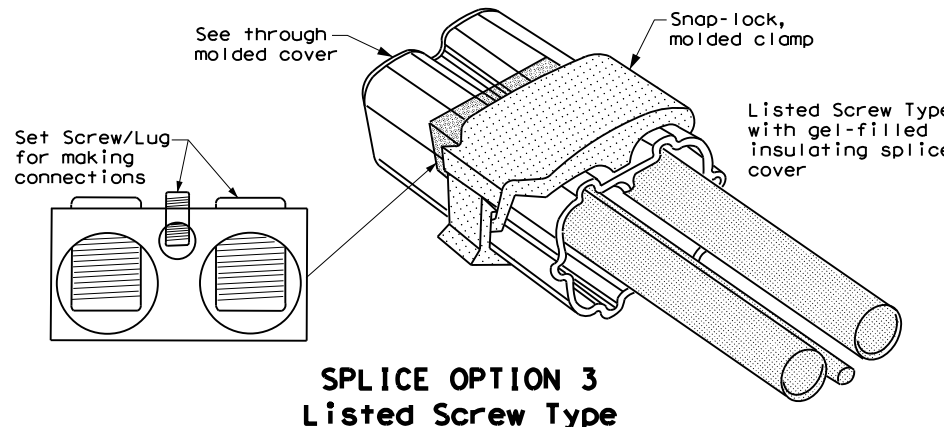

**SPLICE OPTION 3
Listed Screw Type**


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

		Texas Department of Transportation		Traffic Operations Division Standard	
<h1>ELECTRICAL DETAILS CONDUCTORS</h1>					
<h2>ED(3) - 14</h2>					
FILE:	ed3-14.dgn	DN:	TxDOT	CK:	TxDOT
© TxDOT	October 2014	CONT:	SECT	JOB:	HIGHWAY
REVISIONS		1392	01	044	fm 1378
		DIST:	COUNTY	SHEET NO.	
		18	COLLIN	253	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

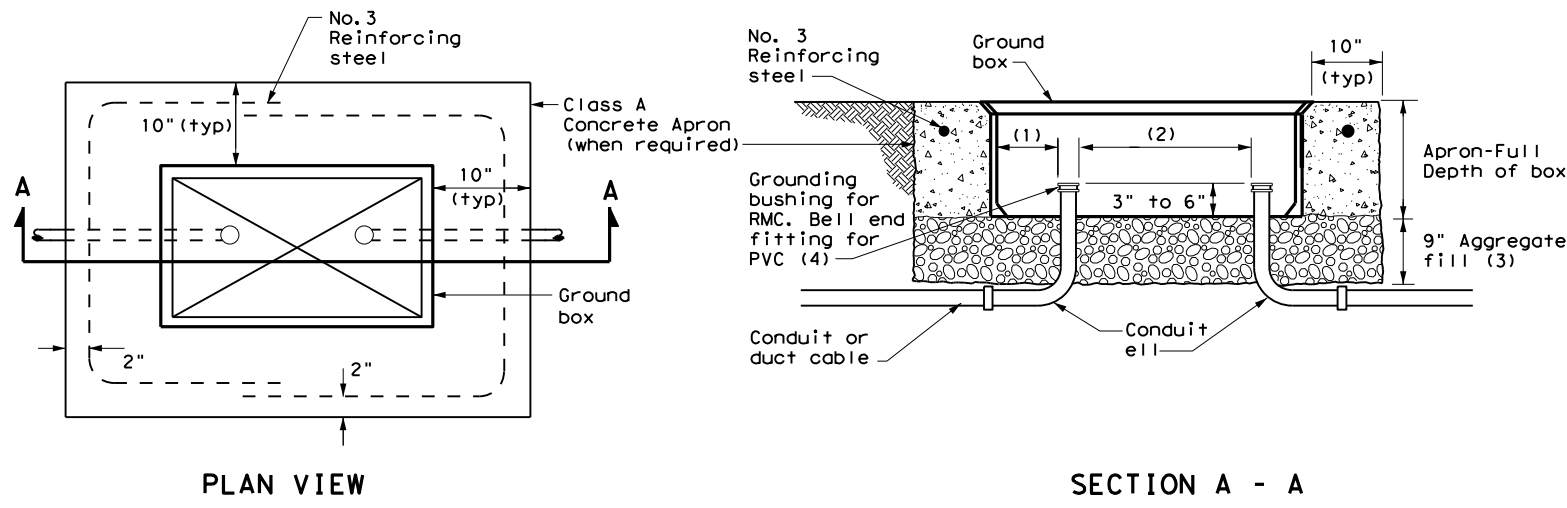


APRON FOR GROUND BOX

- (1) Uniformly space ends of conduits within the ground box. Position ends of conduits so that ground box walls do not interfere with the installation of grounding bushings or bell end fittings.
- (2) Maintain sufficient space between conduits to allow for proper installation of bushing.
- (3) Place aggregate under the box, not in the box. Aggregate should not encroach on the interior volume of the box.
- (4) Install a grounding bushing on the upper end of all RMC terminating in a ground box. Ground RMC elbows when any part of the elbow is less than 18 in. below the bottom of the ground box. Install a PVC bushing or bell end fitting on the upper end of all PVC conduits terminating in a ground box.

GROUND BOX DIMENSIONS	
TYPE	OUTSIDE DIMENSIONS (INCHES) (Width x Length X Depth)
A	12 X 23 X 11
B	12 X 23 X 22
C	16 X 29 X 11
D	16 X 29 X 22
E	12 X 23 X 17

GROUND BOX COVER DIMENSIONS								
TYPE	DIMENSIONS (INCHES)							
	H	I	J	K	L	M	N	P
A, B & E	23 1/4	23	13 3/4	13 1/2	9 7/8	5 1/8	1 3/8	2
C & D	30 1/2	30 1/4	17 1/2	17 1/4	13 1/4	6 3/4	1 3/8	2

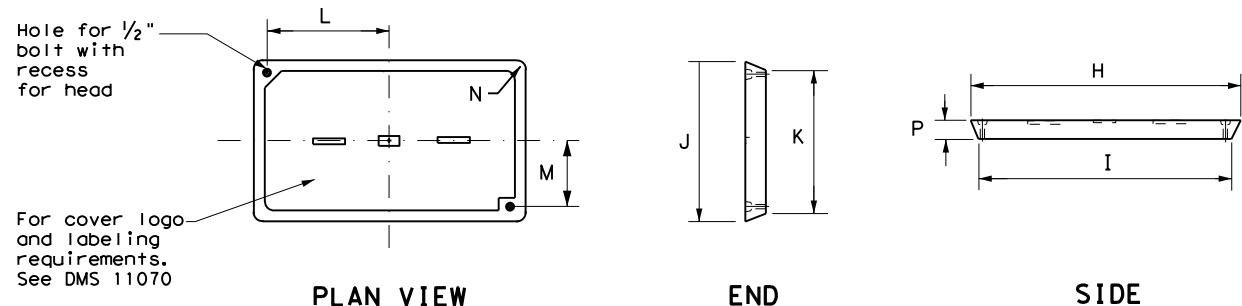

GROUND BOX COVER

GROUND BOXES

A. MATERIALS

1. Provide polymer concrete ground boxes measuring 16x30x24 in. (WxLxD) or smaller in accordance with Departmental Material Specification (DMS) 11070 "Ground Boxes" and Item 624 "Ground Boxes."
2. Provide Type A, B, C, D, and E ground boxes as shown in the plans, and as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies," Item 624.

3. Ensure ground box cover is correctly labeled in accordance with DMS 11070.

4. Provide larger ground boxes in accordance with Item 624 and as shown in the plans.

B. CONSTRUCTION METHODS

1. Remove all gravel and dirt from conduit. Cap all conduits prior to placing aggregate and setting ground box. Provide Grade 3 or 4 coarse aggregate as shown on Table 2 of Item 302 "Aggregates for Surface Treatments." Ensure aggregate bed is in place and at least 9 inches deep, prior to setting the ground box. Install ground box on top of aggregate.
2. Cast ground box aprons in place. Reinforcing steel may be field bent. Ensure the depth of concrete for the apron extends from finished grade to the top of the aggregate bed under the box. Ground box aprons, including concrete and reinforcing steel, are subsidiary to ground boxes when called for by descriptive code.
3. Keep bolt holes in the box clear of dirt. Bolt covers down when not working in ground boxes.
4. Install all conduits and ells in a neat and workmanlike manner. Uniformly space conduits so grounding bushings and bell end fittings can easily be installed.
5. Temporarily seal all conduits in the ground box until conductors are installed.
6. Permanently seal conduits immediately after the completion of conductor installation and pull tests. Permanently seal the ends of all conduits with duct seal, expandable foam, or other method as approved. Do not use duct tape as a permanent conduit sealant. Do not use silicone caulk as a sealant.
7. When a ground rod is present in a ground box, bond all equipment grounding conductors together and to the ground rod with listed connectors.
8. When a type B or D ground box is stacked to meet volume requirements, it is allowable to cut an appropriately sized hole for conduit entry in the side wall at least 18 inches below grade.
9. If an existing ground box in the contract has a metal cover, bond the cover to the equipment grounding conductor with a 3 ft. long stranded bonding jumper the same size as the grounding conductor. The bonding jumper is subsidiary to various bid items. Verify existing ground boxes with metal covers are shown on the plans, with notes fully describing the work required.
10. If other ground boxes with metal covers are within the project limits but are not part of the contract, the Engineer may direct the Contractor to bond the metal covers, identifying the specific boxes in writing. This work will be paid for separately.
11. Bond metal ground box covers to the grounding conductor with a tank ground type lug.

				Traffic Operations Division Standard	
<h2>ELECTRICAL DETAILS GROUND BOXES</h2>					
<h3>ED(4) - 14</h3>					
FILE:	ed4-14.dgn	DN:	TxDOT	CK:	TxDOT
© TxDOT	October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS		1392	01	044	FM 1378
		DIST	COUNTY	SHEET NO.	
		18	COLLIN	254	

ELECTRICAL SERVICES NOTES

- Provide new materials. Ensure installation and materials comply with the applicable provisions of the National Electrical Code (NEC) and National Electrical Manufacturers Association (NEMA) standards. Ensure material is Underwriters Laboratories (UL) listed. Provide and install electrical service conduits, conductors, disconnects, contactors, circuit breaker panels, and branch circuit breakers as shown on the Electrical Service Data chart in the plans. Faulty fabrication or poor workmanship in material, equipment, or installation is justification for rejection. Where manufacturers provide warranties and guarantees as a customary trade practice, furnish these to the State.
- Provide electrical services in accordance with Electrical Details standard sheets, Departmental Material Specification (DMS) 11080 "Electrical Services," DMS 11081 "Electrical Services-Type A," DMS 11082 "Electrical Services-Type C," DMS 11083 "Electrical Services-Type D," DMS 11084 "Electrical Services-Type T," DMS 11085 "Electrical Services-Pedestal (PS)", and Item 628 "Electrical Services" of the Standard Specifications. Provide electrical service types A, C, and D, as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies," Item 628. Provide other service types as detailed on the plans.
- Provide all work, materials, services, and any incidentals needed to install a complete electrical service as specified in the plans.
- Coordinate with the Engineer and the utility provider for metering and compliance with utility requirements. Primary line extensions, connection charges, meter charges, and other charges by the utility company to provide power to the location are paid for in accordance with Item 628. Get approval for the costs associated with these charges prior to engaging the utility company to do the work. Consult with the utility provider to determine costs and requirements, and coordinate the work as approved.
- The enclosure manufacturer will provide Master Lock Type 2 with brass tumblers keyed #2195 for all custom electrical enclosures. Installing Contractor is to provide Master Lock #2195 Type 2 with brass tumblers for "off the shelf" enclosures. Master Lock #2195 keys and locks become property of the State. Unless otherwise approved, do not energize electrical service equipment until locks are installed.
- Enclosures with external disconnects that de-energize all equipment inside the enclosure do not need a dead front trim. Protect incoming line terminations from incidental contact as required by the NEC.
- When galvanized is specified for nuts, screws, bolts or miscellaneous hardware, stainless steel may be used.
- Provide wiring and electrical components rated for 75°C. Provide red, black, and white colored XHHW service entrance conductors of minimum size 6 American Wire Gauge (AWG). Identify size 6 AWG conductors by continuous color jacket. Identify electrical conductors sized 4 AWG and larger by continuous color jacket or by colored tape. Mark at least 6 inches of the conductor's insulation with half laps of colored tape, when identifying conductors. Ensure each service entrance conductor exits through a separately bushed non-metallic opening in the weatherhead. The lengths of the conductors outside the weatherhead are to be 12 inches minimum, 18 inches maximum, or as required by utility.
- All electrical service conduit and conductors attached to the electrical service including the riser or the elbow below ground are subsidiary to the electrical service. For an underground utility feed, all service conduit and conductors after the elbow, including service conduit and conductors for the utility pole riser when furnished by the Contractor, will be paid for separately.
- Provide rigid metal conduit (RMC) for all conduits on service, except for the 1/2 in. PVC conduit containing the electrical service grounding electrode conductor. Size the service entrance conduit as shown in the plans. Ensure conduit for branch circuit entry to enclosure is the same size as that shown on the layout sheets for branch circuit conduit. Extend all rigid metal conduits a minimum of 6 inches underground and then couple to the type and schedule of the conduit shown on the layout for that particular branch circuit. Install a grounding bushing on the RMC where it terminates in the service enclosure.
- Use of liquidtight flexible metal conduit (LFMC) is allowed between the meter and service enclosure when they are mounted 90 to 180 degrees to each other. Size the LFMC the same size as service entrance conduit. LFMC must not exceed 3 feet in length. Strap LFMC within 1 foot of each end. LFMC less than 12 inches in length need not be strapped. Each end of LFMC must have a grounding bushing or be terminated with a grounding fitting. The LFMC must contain a grounded (neutral) conductor. Ensure any bend in LFMC never exceeds 180 degrees. A pull test is required on all installed conductors, with at least six inches of free conductor movement demonstrated to the satisfaction of the Engineer.
- Ensure all mounting hardware and installation details of services conform to utility company specifications.
- For all electrical service enclosures listed under Item 628 on the MPL, the UL 508 enclosure manufacturers will prepare and submit a schematic drawing unique to each service. Before shipment to the job site, place the applicable laminated schematic drawings and the laminated plan sheet showing the electrical service data chart used to build the enclosure in the enclosure's data pocket. The installing contractor will copy and laminate the actual project plan sheets detailing all equipment and branch circuits supplied by that service. The laminated plan sheets are to be placed in the service enclosure's document pocket. Reduce 11 in. x 17 in. plan sheets to 8 1/2 in. x 11 in. before laminating. If the installation differs from the plan sheets, the installing contractor is to redline plan sheets before laminating.
- When providing an "Off The Shelf" Type D or Type T service, provide laminated plan sheets detailing equipment and branch circuits supplied by that service. Reduce 11 in. x 17 in. plan sheets to 8 1/2 in. x 11 in. before laminating. Deliver these drawings before completion of the work to the Engineer, instead of placing in enclosure that has no door pocket.
- Do not install conduit in the back wall of a service enclosure where it would penetrate the equipment mounting panel inside the enclosure. Provide grounding bushings on all metal conduits, and terminate bonding jumpers to grounding bus. Grounding bushings are not required when the end of the metal conduit is fitted with a conduit sealing hub or threaded boss, such as a meter base hub.

SERVICE ASSEMBLY ENCLOSURE

- Provide threaded hub for all conduit entries into the top of enclosure.
- Type galvanized steel (GS) enclosures may be used for Type C panelboards and for Type D and T services that do not use an enclosure mounted photoceII or lighting contactor. Provide GS enclosures in accordance with DMS 11080, 11082, 11083, and 11084.
- Provide aluminum (AL) and stainless steel (SS) enclosures for Types A, C, and D in accordance with DMS 11080, 11081, 11082, 11083, and 11084. Do not paint stainless steel.
- Provide pedestal service (PS) enclosures in accordance with ED(9) and DMS 11080 and 11085. Do not provide GS pedestal services. If GS is shown in the PS descriptive code, provide an AL enclosure.

MAIN DISCONNECT & BRANCH CIRCUIT BREAKERS

- Field drill flange-mounted remote operator handle if needed, to ensure handle is lockable in both the "On" and "Off" positions.
- When the utility company provides a transformer larger than 50 KVA, verify that the available fault current is less than the circuit breaker's ampere interrupting capacity (AIC) rating and provide documentation from the electric utility provider to the Engineer.



PHOTOELECTRIC CONTROL

- Provide photocell as listed on the MPL. Move, adjust, or shield the photocell from stray or ambient night time light to ensure proper operation. Mount photocell facing north when practical. Mount top of pole photocells as shown on Top Mounted Photocell Detail.

* ELECTRICAL SERVICE DATA												
Elec. Service ID	Plan Sheet Number	Electrical Service Description	Service Conduit *xSize	Service Conductors No./Size	Safety Switch Amps	Main Ckt. Bkr. Pole/Amps	Two-Pole Contractor Amps	Panelbd/ Loadcenter Amp Rating	Branch Circuit ID	Branch Ckt. Bkr. Pole/Amps	Branch Circuit Amps	KVA Load
SB 183	289	ELC SRV TY A 240/480 100(SS)AL(E)SF(U)	2"	3/#2	100	2P/100	100	N/A	Lighting NB	2P/40	26	28.1
									Lighting SB	2P/40	25	
									Underpass	1P/20	15	
NB Access	30	ELC SRV TY D 120/240 060(NS)SS(E)TS(O)	1 1/4"	3/#6	N/A	2P/60		100	Sig. Controller	1P/30	23	5.3
							30		Luminaires	2P/20	9	
									CCTV	1P/20	3	
2nd & Main	58	ELC SRV TY T 120/240 000(NS)GS(N)SP(O)	1 1/4"	3/#6	N/A	N/A	N/A	70	Flashing Beacon 1	1P/20	4	1.0
									Flashing Beacon 2	1P/20	4	

* Example only, not for construction. All new electrical services must have electrical service data chart specific to that service as shown in the plans.
 ** Verify service conduit size with utility. Size may change due to utility meter requirements. Ensure conduit size meets the National Electrical Code.

EXPLANATION OF ELECTRICAL SERVICE DESCRIPTIVE CODE

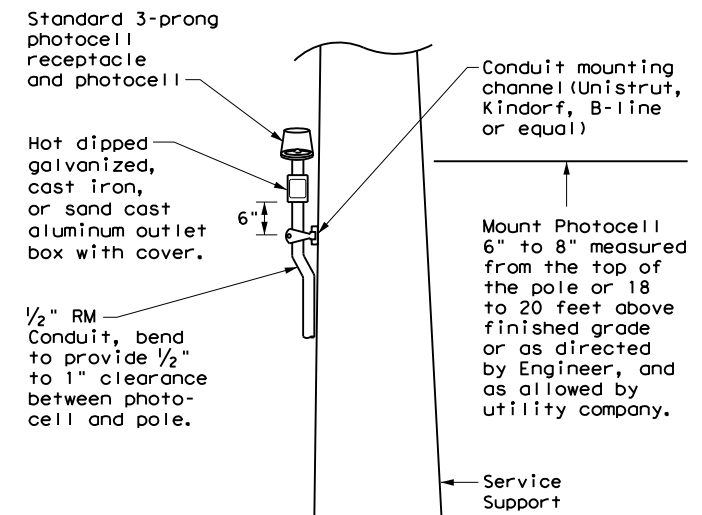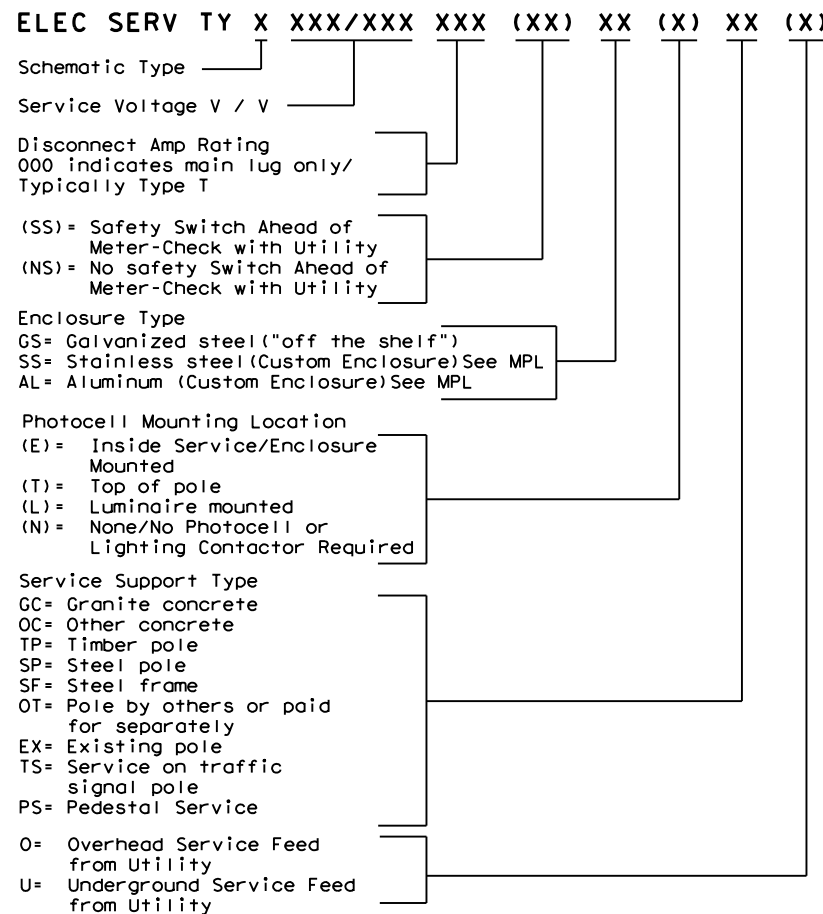

TOP MOUNTED PHOTOCELL

Install conduit strap maximum 3 feet from box. 5 foot maximum spacing between straps supporting conduit.

Texas Department of Transportation Traffic Operations Division Standard


ELECTRICAL DETAILS SERVICE NOTES & DATA

ED(5) - 14


FILE: ed5-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392 01		044	FM 1378
	DIST		COUNTY	SHEET NO.
	18		COLLIN	255

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: FILE:


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

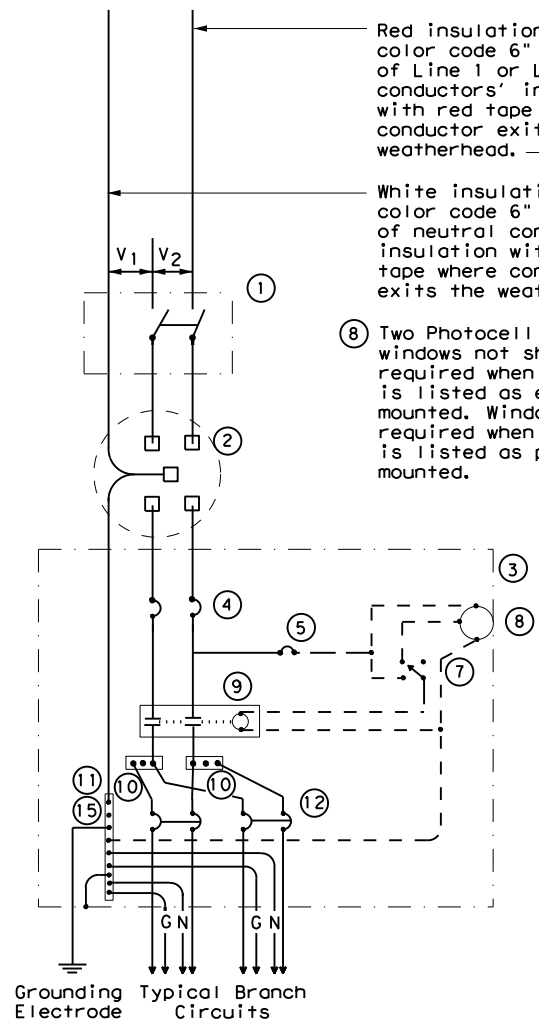


**SCHEMATIC TYPE A
THREE WIRE**

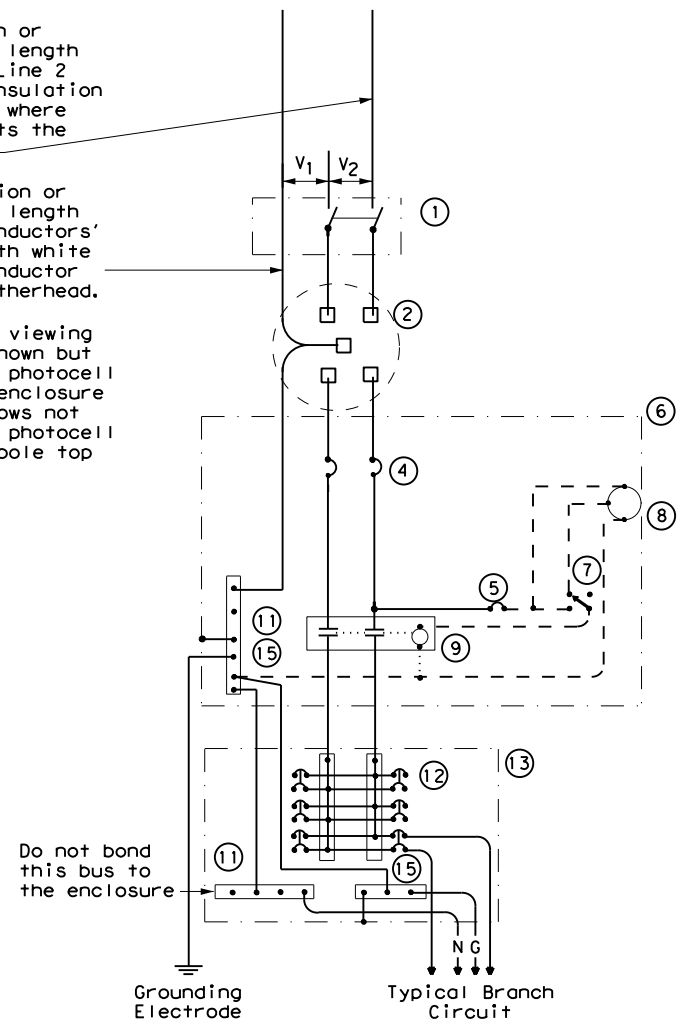

**SCHEMATIC TYPE C
THREE WIRE**

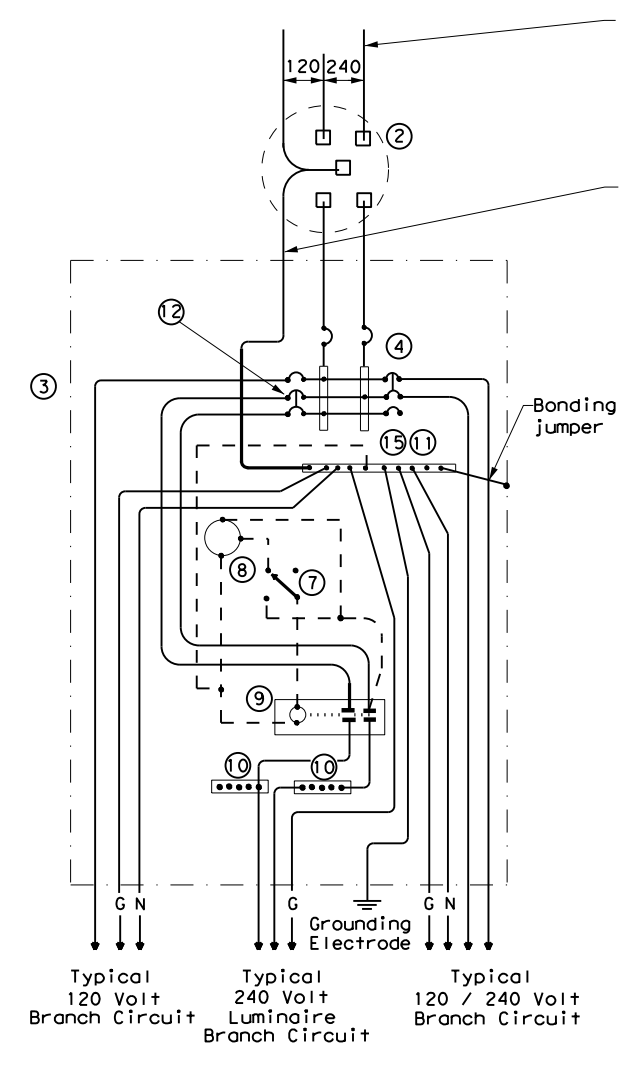

**SCHEMATIC TYPE D - CUSTOM
120/240 VOLTS - THREE WIRE**

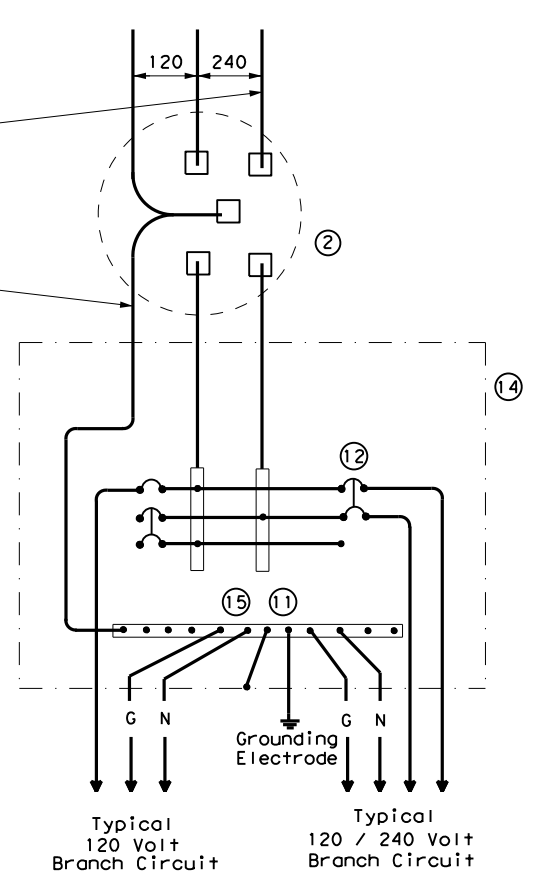

**SCHEMATIC TYPE T
120/240 VOLTS - THREE WIRE**
Galvanized steel - "Buy Off The Shelf" only. When required install photo cell top of the pole or on luminaire only, no lighting contractor will be installed.

WIRING LEGEND	
————	Power Wiring
- - - -	Control Wiring
—N—	Neutral Conductor
—G—	Equipment grounding conductor-always required

SCHEMATIC LEGEND	
1	Safety Switch (when required)
2	Meter (when required-verify with electric utility provider)
3	Service Assembly Enclosure
4	Main Disconnect Breaker (See Electrical Service Data)
5	Circuit Breaker, 15 Amp (Control Circuit)
6	Auxiliary Enclosure
7	Control Station ("H-O-A" Switch)
8	Photo Electric Control (enclosure-mounted shown)
9	Lighting Contactor
10	Power Distribution Terminal Blocks
11	Neutral Bus
12	Branch Circuit Breaker (See Electrical Service Data)
13	Separate Circuit Breaker Panelboard
14	Load Center
15	Ground Bus


		Traffic Operations Division Standard	
ELECTRICAL DETAILS SERVICE ENCLOSURE AND NOTES			
ED(6) - 14			
FILE: ed6-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT October 2014	CONT	SECT	JOB
REVISIONS	1392	01	044
	DIST	COUNTY	SHEET NO.
	0392	COLLIN	256

DATE:
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

TRAFFIC SIGNAL NOTES

1. Do not pass luminaire conductors through the signal controller cabinet.
2. Include an equipment grounding conductor in all conduits throughout the electrical system. Bond all exposed metal parts to the grounding conductor.
3. Provide roadway luminaires, when required, in accordance with the material and construction sections of Item 610, "Roadway Illumination Assemblies," except for performance testing of luminaires. Test installed roadway luminaires for proper operation as a part of the associated traffic signal system test.
4. If internally illuminated street name signs are approved for use, ground the fixture to the pole with a 12 AWG green XHHW conductor.
5. Bond anchor bolts to rebar cage in two locations using #3 bars or 6 AWG stranded copper conductors. Use listed mechanical connectors rated for embedment in concrete. See TxDOT standard TS-FD for further details.
6. Drill and tap signal poles for 1/2 in. X 13 UNC tank ground fitting. Provide and install tank ground fitting 4 in. to 6 in. directly below electrical service enclosure. Provide properly sized hole through the bottom of the enclosure for the service grounding electrode conductor. Connect the electrical service grounding electrode conductor to the tank ground fitting. Ensure electrical service grounding electrode conductor is as short and straight as possible from the enclosure to the tank ground fitting. See Inset A detail for further information. Size service entrance conduit and branch circuit conduit as shown in the plans.
7. Mount electrical service enclosure and meter to signal pole with stainless steel bands. Ensure bands are a minimum width of 3/4 in. Secure enclosures to bands using two-bolt brackets. Install brackets near top and bottom of each enclosure. Install properly sized stainless steel washers on each bolt in the enclosure. Band or drill and tap properly sized stand-off straps to signal pole for attaching conduit.
8. Conduct pull tests and insulation resistance tests on all illumination and power conductors as required in Item 620 "Electrical Conductors" and ED(3). To prevent electronics damage, do not conduct insulation resistance tests on traffic signal cables after termination.
9. Lock all enclosures and bolt down all ground box covers before applying power to the signal installation.
10. Terminate conduits entering the top of enclosures with a conduit-sealing hub or threaded boss such as meter hub. Install a grounding bushing on all metal conduits not connected to conduit-sealing hub or threaded boss. Bond the grounding bushing to the ground bus with a bonding jumper. Seal all conduits entering enclosures with duct seal or expanding foam. Do not use silicone to seal conduit ends.
11. For all conduits, ensure the burial depth is a minimum of 18". Ensure the minimum burial depth for conduit placed under a roadway is 24".

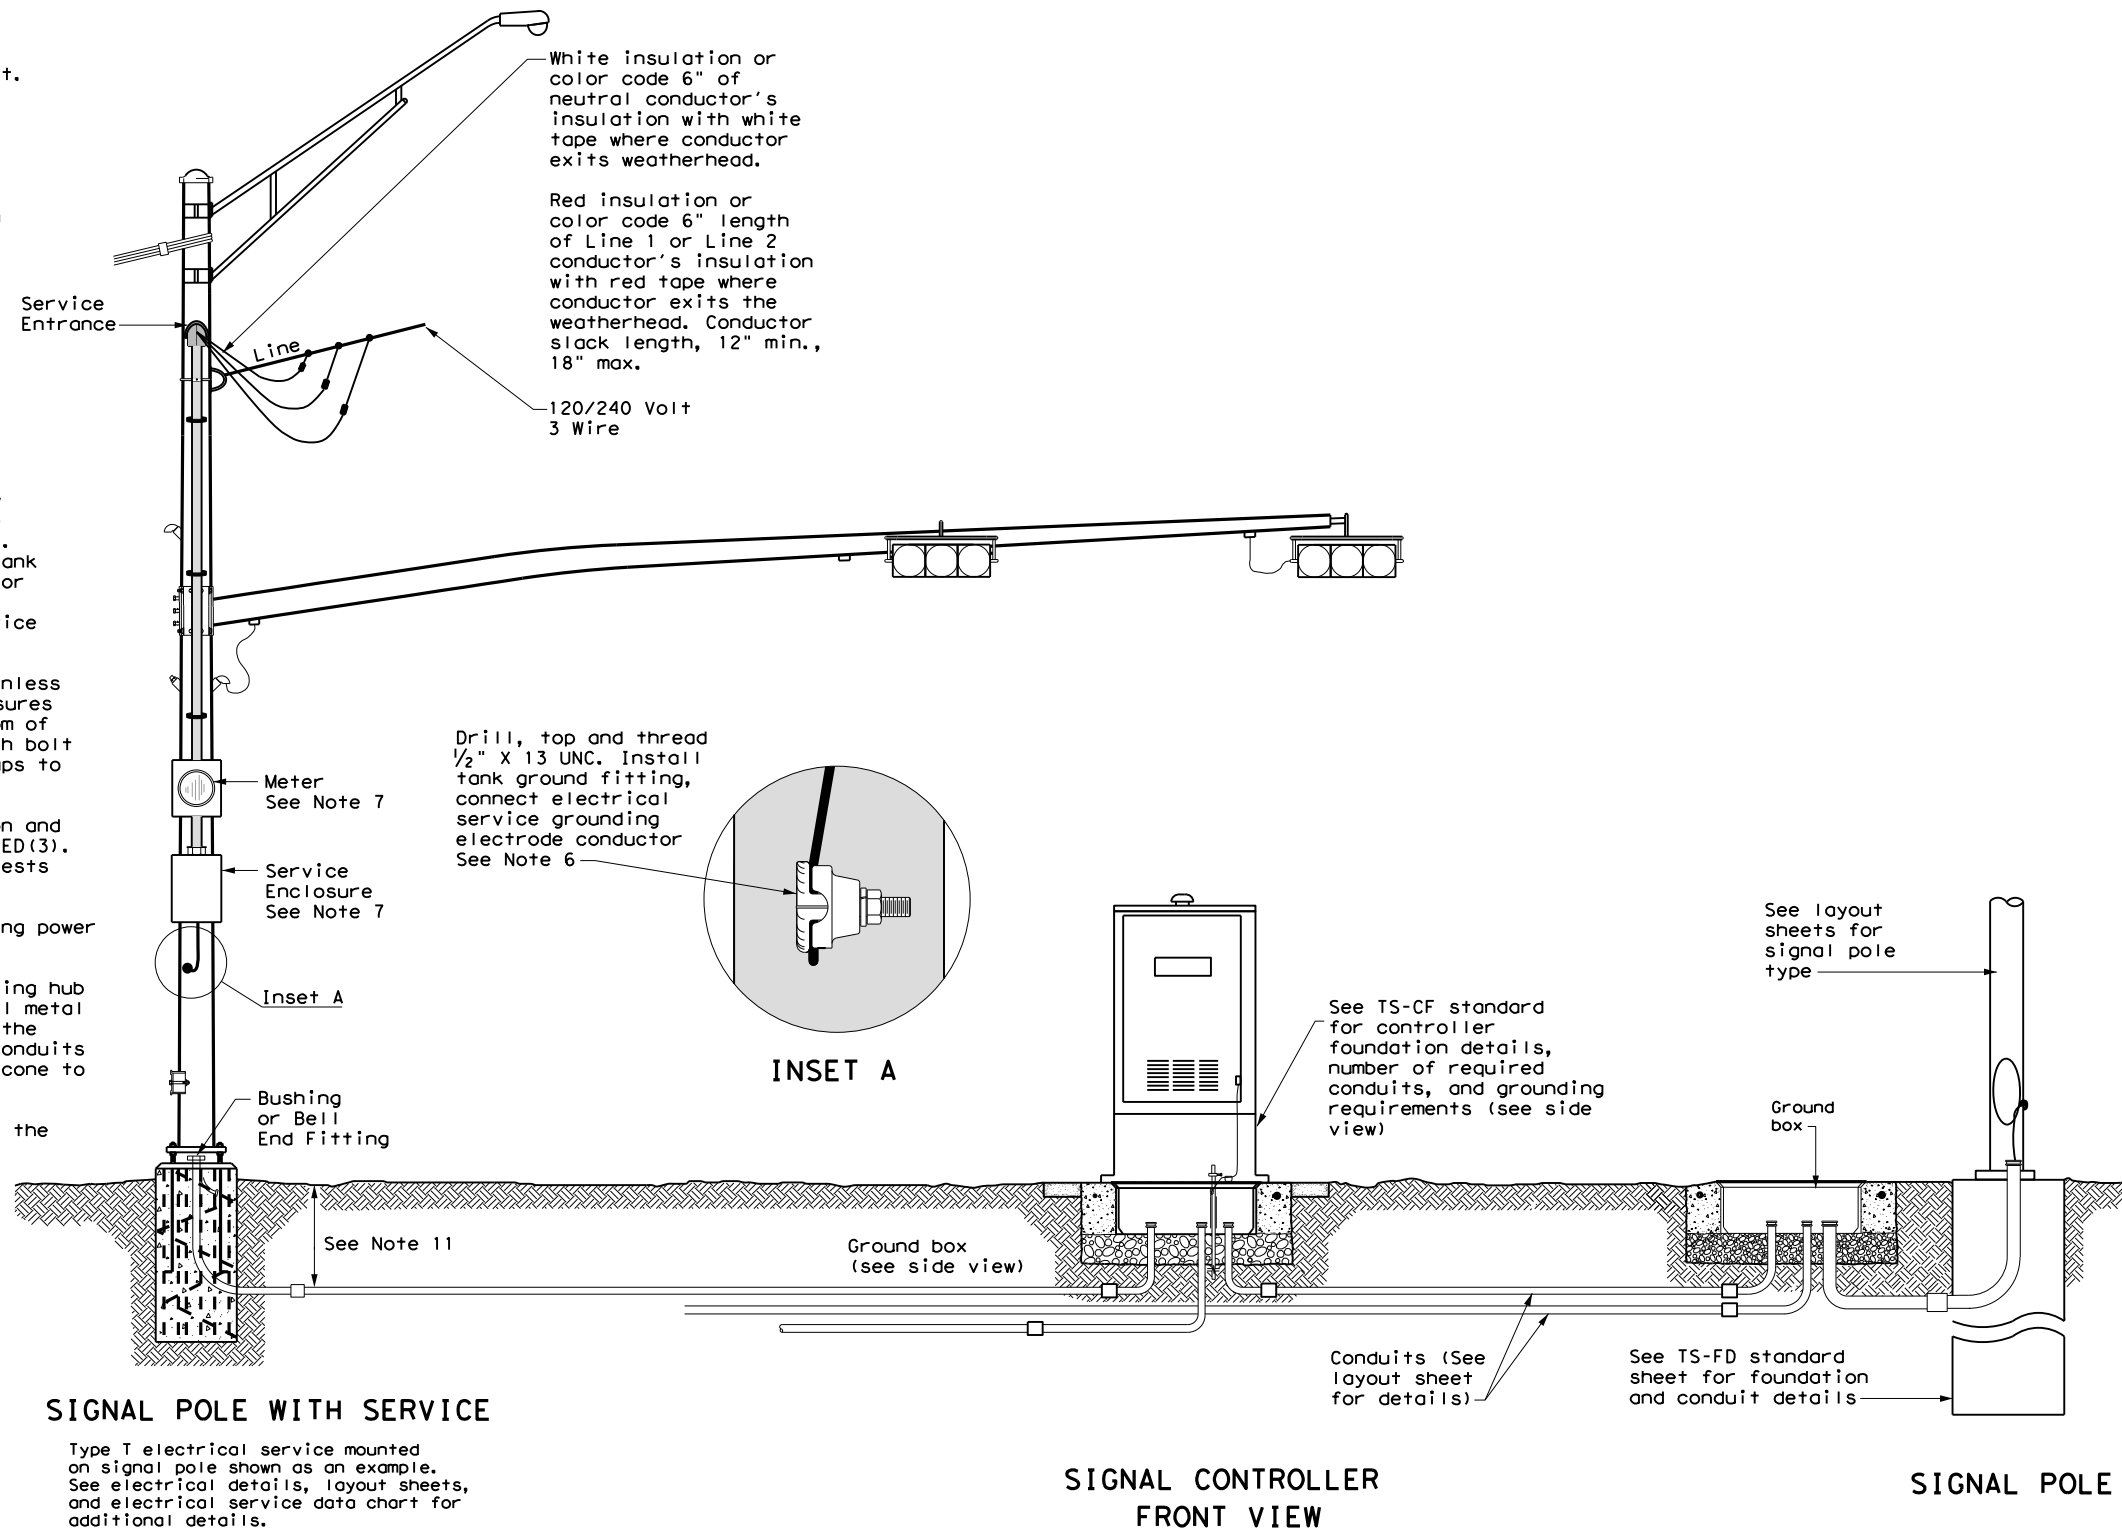

SIGNAL POLE WITH SERVICE

Type T electrical service mounted on signal pole shown as an example. See electrical details, layout sheets, and electrical service data chart for additional details.

SIGNAL CONTROLLER FRONT VIEW

SIGNAL POLE

SIGNAL CONTROLLER SIDE VIEW

See TS-CF standard for conduit and grounding requirements. See layout sheets for ground box locations and any additional conduits that are required.

ELECTRICAL DETAILS TYPICAL TRAFFIC SIGNAL SYSTEM DETAILS

ED(8) - 14


FILE: ed8-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044	FM 1378
	DIST	COUNTY	SHEET NO.	
	18	COLLIN	257	

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

PEDESTAL SERVICE NOTES


1. Manufacture pedestal electrical services in accordance with Departmental Material Specifications (DMS) 11080 "Electrical Services", 11085 "Electrical Services-Pedestal (PS)" and Item 628 "Electrical Services." Provide pedestal electrical services as listed on the Material Producers List (MPL) on the Department's web site under "Roadway Illumination and Electrical Supplies," Item 628. Ensure all mounting hardware and installation details of services meet utility company specifications. Contact the local utility company for approval of pedestal details prior to installing the electrical pedestal service. Submit any changes required by the utility company prior to manufacturing the pedestal enclosure.
2. When a meter socket is required, provide a socket with a minimum 100 amp rating that complies with local utility requirements.
3. Provide Class A or C concrete for pedestal service foundations in accordance with Item 420, "Concrete Substructures," except that concrete will not be paid for directly but is considered subsidiary to Item 628.
4. Provide #4 reinforcing steel for foundations in accordance with Item 440, "Reinforcement for Concrete."
5. Install 1/2 in. X 2 1/16 in. minimum length concrete single expansion type anchors for mounting pedestal enclosure to foundation. Anchor location to match mounting holes in each corner of enclosure. Secure each of the four corners of the pedestal enclosure to the anchors in the foundation with a 1/2 in. galvanized or stainless steel machine thread bolt, a properly sized locknut and a flat washer.
6. Finish top of concrete foundation in a neat and workmanlike manner. If leveling washers are used, ensure no more than 1/8 in. gap at any corner. Do not exceed a maximum dip or rise in the foundation of 1/8 in. per foot. When properly installed, ensure the top of the service enclosure is level front to back and side to side within 1/4 in. Repair rocking or movement of the service enclosure at no additional cost to the department.
7. Do not use liquidtight flexible metal conduit (LFMC) on pedestal type services.
8. Ensure all elbows in the foundation are sized as per utility provider's conduit requirements for underground conduit and feeders. PVC extensions may be installed provided the ends of the rigid metal conduits are more than 2 in. below the top of the concrete foundation. Where extension conduits are metal, grounding bushings must be installed with a bonding jumper properly terminated.

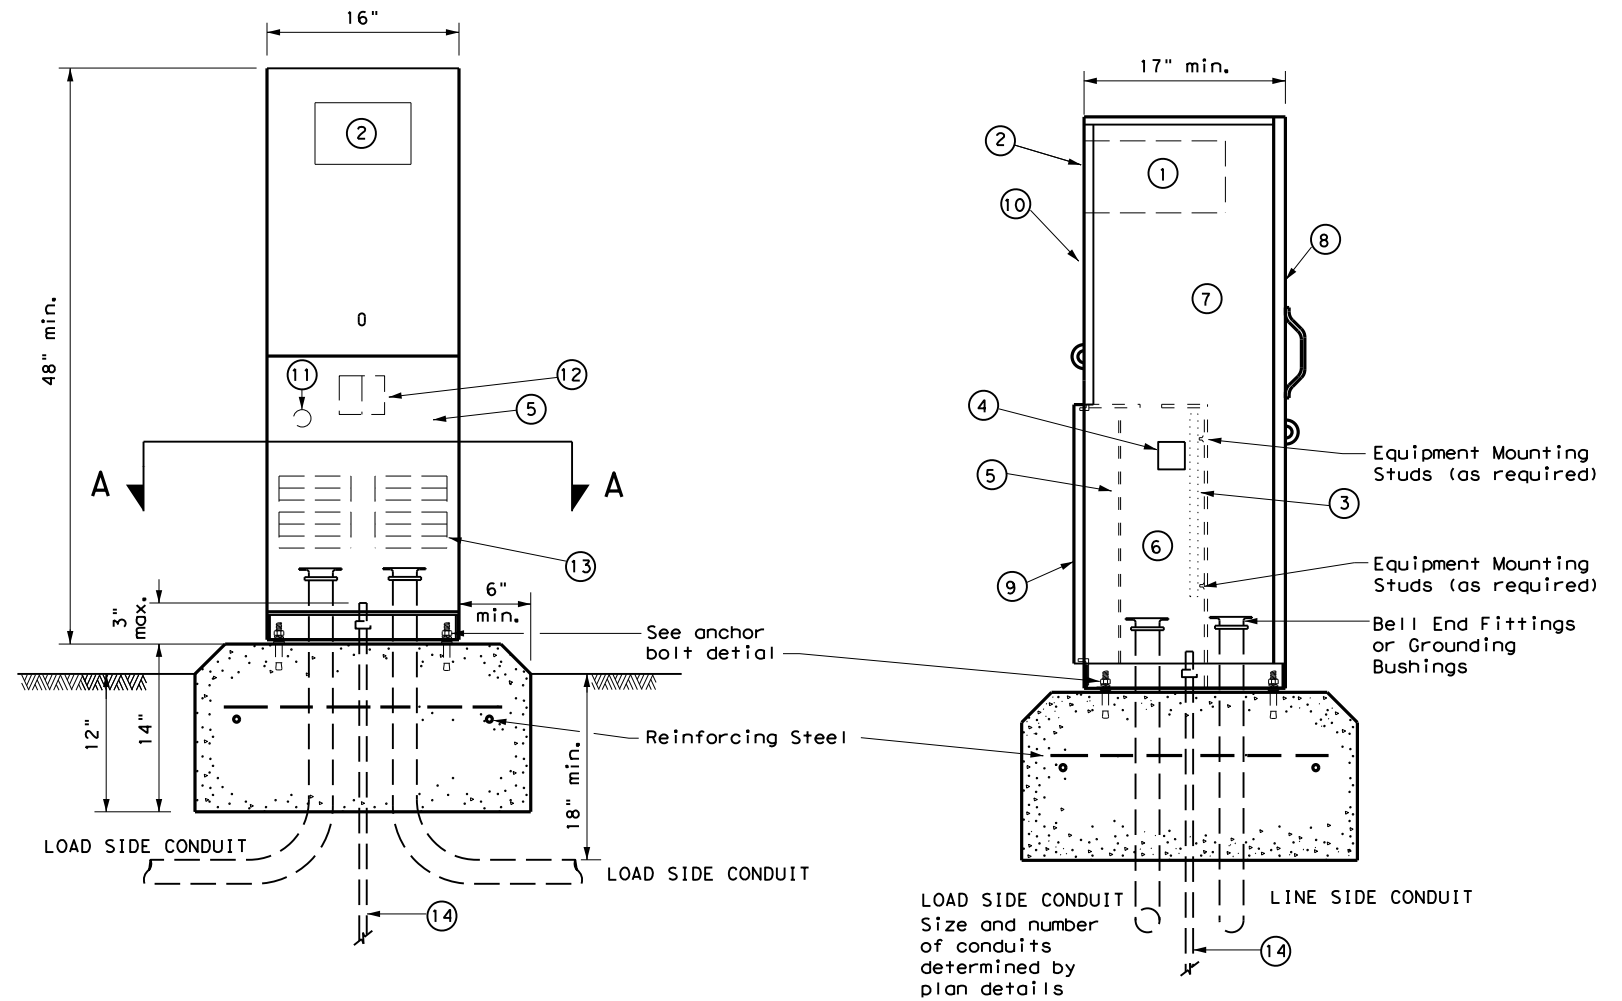

FRONT VIEW

SIDE VIEW

TYPE C shown, TYPE A similar except that TYPE A shall have individual circuit breakers (CB) mounted on an equipment mounting panel. CB Handles shall protrude through hinged deadfront trim.

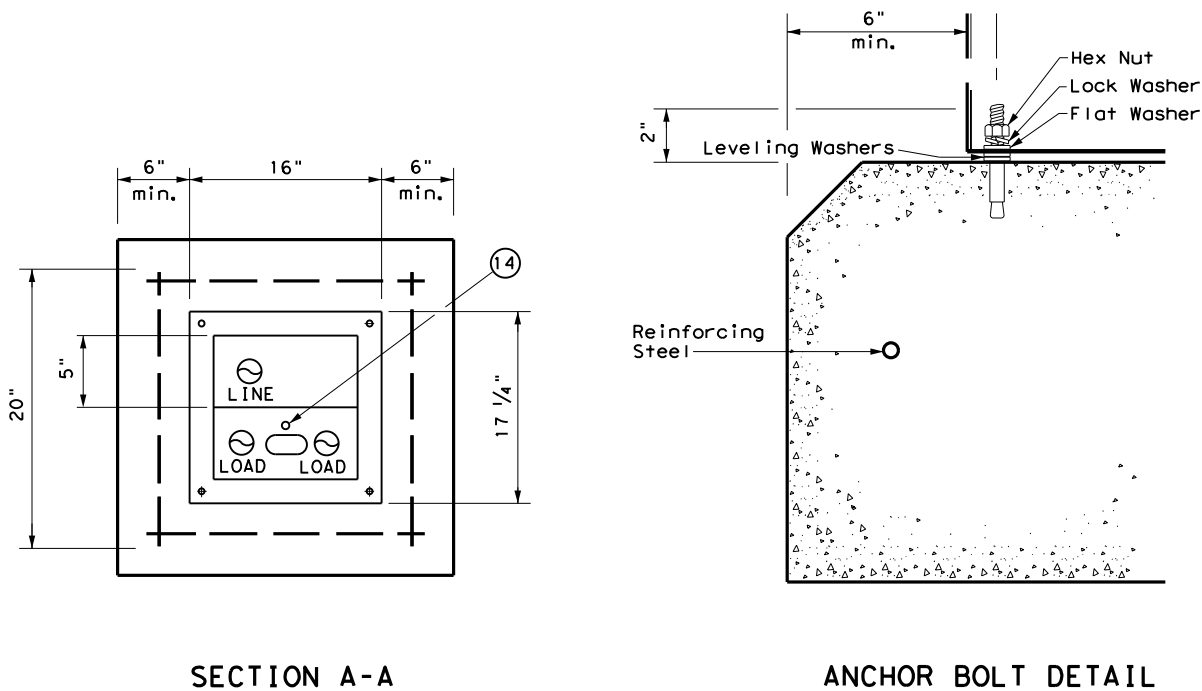

SECTION A-A

ANCHOR BOLT DETAIL


LEGEND

1	Meter Socket, (when required)
2	Meter Socket Window, (when required)
3	Equipment Mounting Panel
4	Photo Electric Control Window, (When required)
5	Hinged Deadfront Trim
6	Load Side Conduit Trim
7	Line Side Conduit Area
8	Utility Access Door, with handle
9	Pedestal Door
10	Hinged Meter Access
11	Control Station (H-O-A Switch)
12	Main Disconnect
13	Branch Circuit Breakers
14	Copper Clad Ground Rod - 5/8" X 10'

		Traffic Operations Division Standard	
ELECTRICAL DETAILS ELECTRICAL SERVICE SUPPORT PEDESTAL SERVICE TYPE PS			
ED(9) - 14			
FILE: ed9-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT October 2014	CONT	SECT	JOB
REVISIONS	1392	01	044
	DIST	COUNTY	SHEET NO.
	18	COLLIN	258

DATE:
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

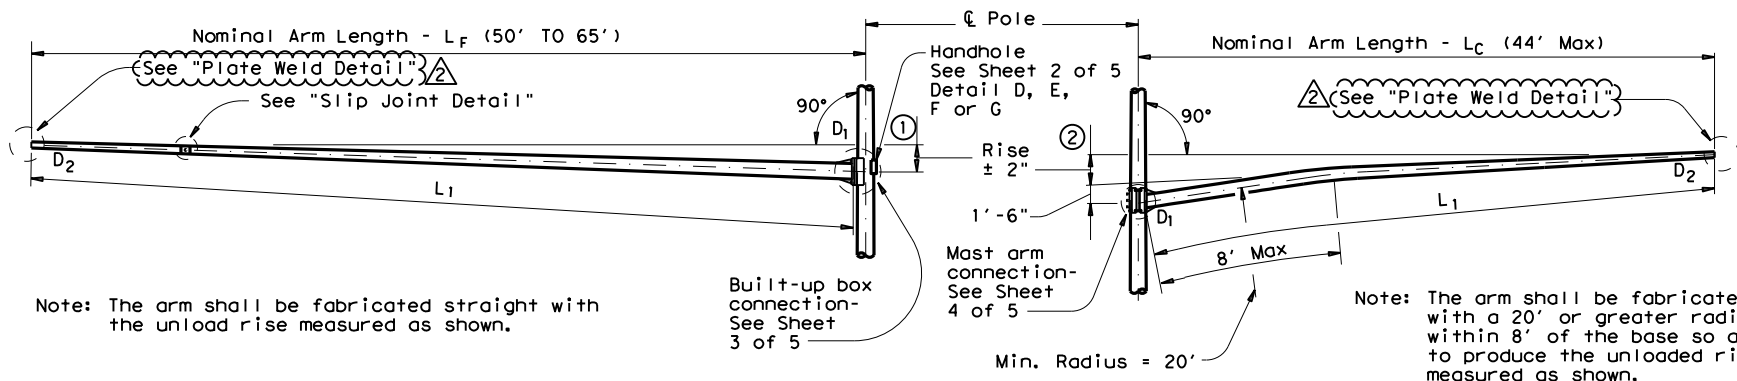

Note: The arm shall be fabricated straight with the unload rise measured as shown.


Note: The arm shall be fabricated with a 20' or greater radius within 8' of the base so as to produce the unloaded rise measured as shown.

FIXED MOUNT TRAFFIC SIGNAL ARM

① See Sheet 3 of 5 for Arm Rise

CLAMP-ON TRAFFIC SIGNAL ARM (IF REQUIRED)

② See Sheet 4 of 5 for Arm Rise and Clamp-on Arm Details

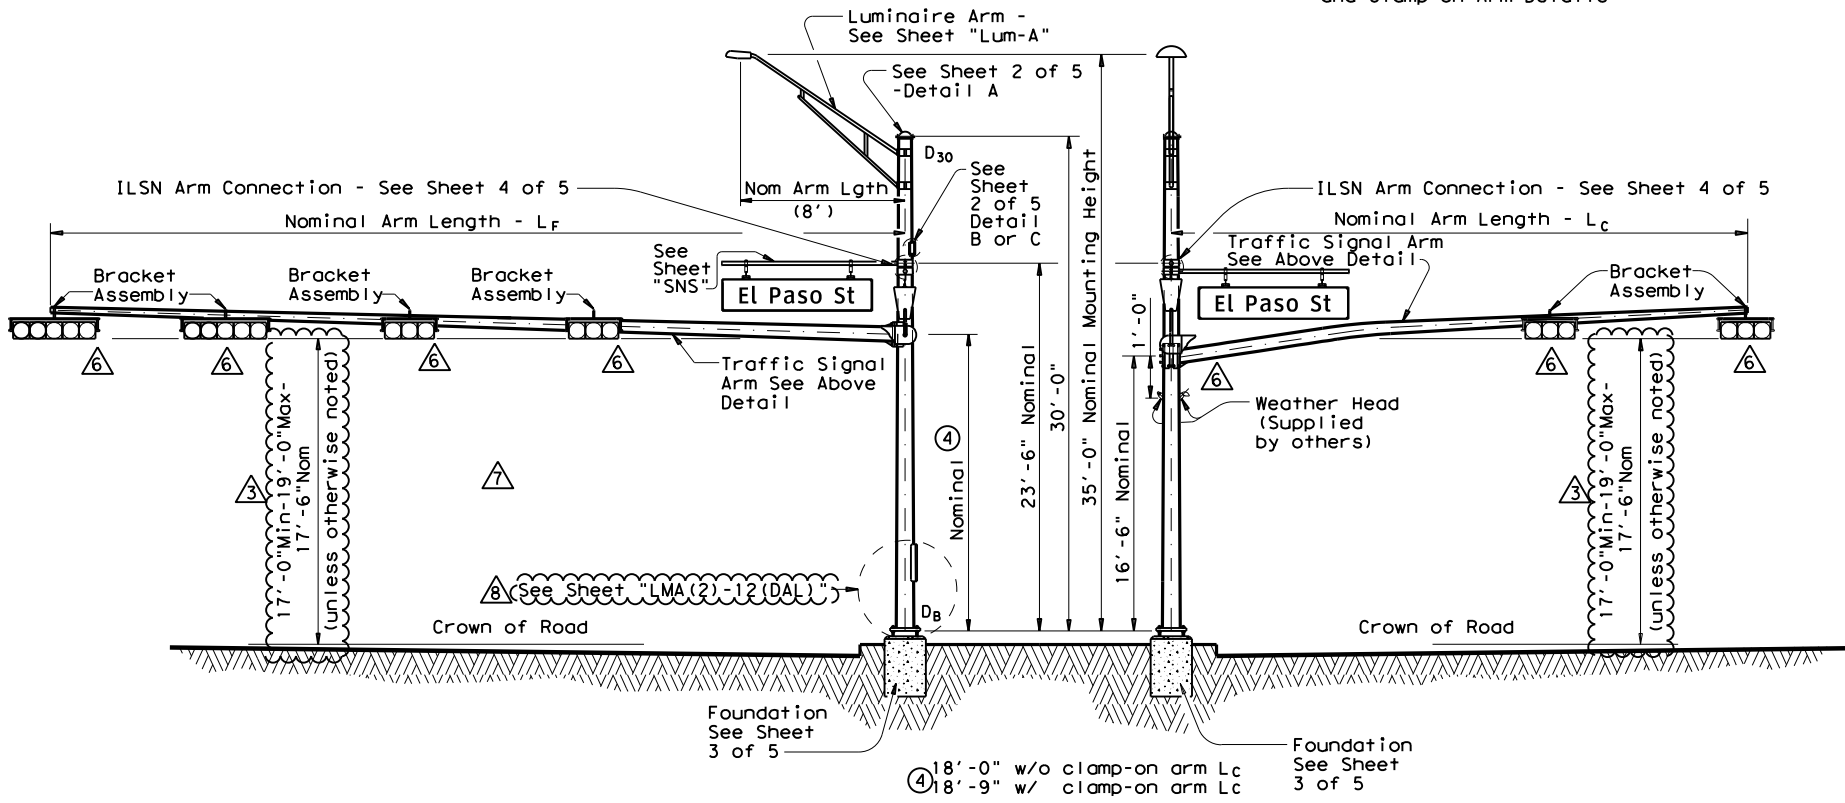

ELEVATION

(Showing fixed mount arm)

STRUCTURE ASSEMBLY

ELEVATION

(Showing clamp-on arm)

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications thereto. Design Wind Speed can be either 100 mph or 80 mph plus a 1.3 gust factor. If clamp-on traffic signal is required, designs are based on an arm included angle of 90 degrees or more. Angles of less than approximately 75 degrees will require a special design.

Poles are designed to support one 8'-0" luminaire arm, two 9'-0" internally lighted street name (ILSN) signs and two traffic signal arms with limited length combinations.

Each arm with its related attachment is shown below

Arm	Equivalent DL ⑤	WL EPA ⑤⑥
8' Luminaire Arm	Luminaire 60 lbs	1.6 sq ft
9' ILSN Arm	Sign 85 lbs	11.5 sq ft
50' to 65' Fixed Mount Arm	Signal Loads 310 lbs	52 sq ft
Up to 44' Clamp-on Arm	Signal Loads 180 lbs	32.4 sq ft

⑤ Equivalent dead load plus horizontal wind load applied at the end of arm except ILSN arm, which applied 4.5' from the centerline of the pole.

⑥ Effective projected area (actual area times drag coefficient) for the application of horizontal wind load.

Except as noted in Sheet 1 thru 5 of 5, other details not covered shall refer to Standard Sheet "LUM-A" for luminaire arm and connection details, "SNS" for internally lighted street name sign details, and "TS-FD" for anchor bolt and foundation details.

Fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the fabricator must obtain prior to fabrication. Material, fabrication tolerances, and shipping practices shall also meet the requirements of this sheet and Item 686, "Traffic Signal Pole Assemblies (Steel)".

Unless otherwise noted, all parts shall be galvanized in accordance with Item 445, "Galvanizing" after fabrication.

Deviations from the details and dimensions shown herein require submission of shop drawings in accordance with the Item 441, "Steel Structures". Alternate designs are not acceptable.

Installation of damping plate for the long mast arm is not recommended.

Provision of the bracket assembly used to support the traffic signal heads shall be under the direction of the Engineer for approval.

Design also conforms to NCHRP Report 412 for fatigue resistance except that there are no stiffeners at the base plate. TxDOT is conducting tests to determine if stiffeners at the base plate will or will not result in optimal performance; depending upon the results of the tests, poles may need a retrofit to ensure optimal fatigue performance.

MODIFICATIONS:

- ① NOT USED
- ② REPLACED TENON DETAIL WITH PLATE WELD DETAIL. (2/12)
- ③ REVISED MINIMUM SIGNAL HEIGHT. (3/12)
- ④ REMOVED "MA-D" REFERENCE. (2/12)
- ⑤ REMOVED TABLE OF DIMENSIONS "A". (2/12)
- ⑥ REMOVED CGB CONNECTORS. (2/12)
- ⑦ REMOVED THREADED COUPLING FOR CGB CONNECTOR. (2/12)
- ⑧ REVISED THE ELEVATION OF ACCESS COMPARTMENT. (3/12)

NOTE:

Pole manufacturer shall drill 1/2" hole in bottom of mast arm at end plate. (for hot-dip galvanizing)


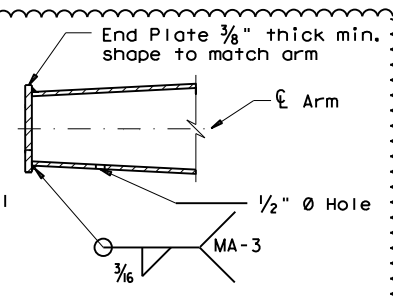


PLATE WELD DETAIL

.239" thickness is permissible for Tip Section

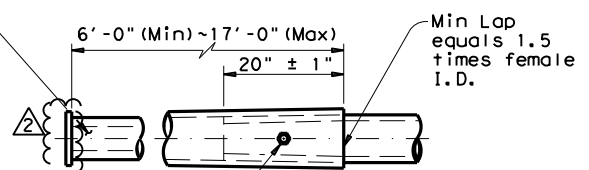

Note: A slip joint is permissible for arms 50' and greater in length. The slip joint shall be made in the shop, but may be match marked and shipped disassembled.

4 - 3/4" Dia holes and 1 - 5/8" Dia galv A307 bolt. Tack weld nut to thread projection after making joint. Repair damaged galvanizing in accordance with Item 445, "Galvanizing".

SLIP JOINT DETAIL (FIXED MOUNT ARM)




TRAFFIC SIGNAL SUPPORT STRUCTURES LONG MAST ARM ASSEMBLY (50 TO 65 FT) (80 AND 100 MPH WIND ZONE) LMA(1)-12(DAL)


Sheet 1 of 5

© TxDOT July 2000		DN: JK	CK: GRB	DW: FDN	CK: CAL
REVISIONS		CONT	SECT	JOB	HIGHWAY
4-20-01	1-12	1392	01	044	FM 1378
DIST		COUNTY		SHEET NO.	
DAL		COLLIN		259	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

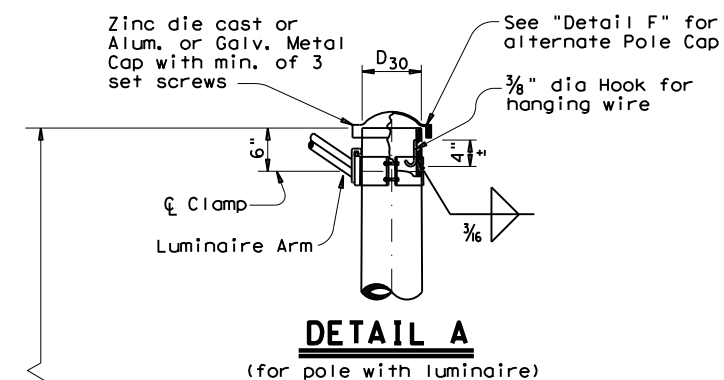


DETAIL A
(for pole with luminaire)

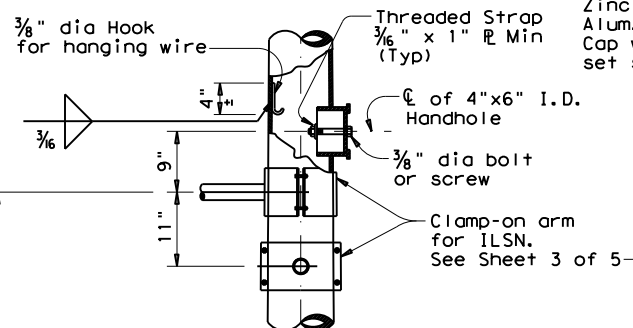


DETAIL B
(If ILSN applied)

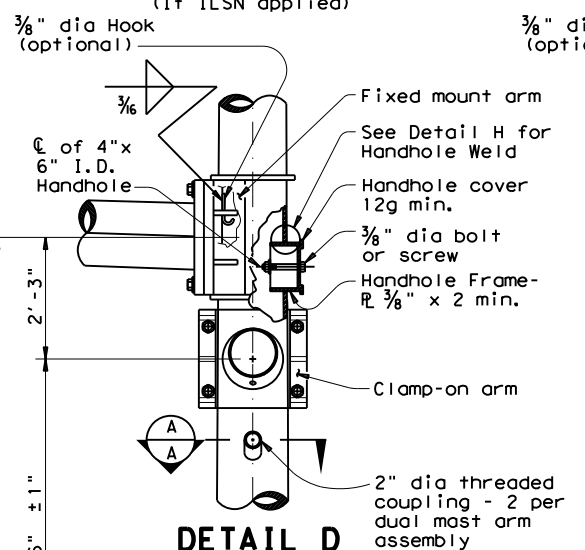


DETAIL D
(for 30' pole with luminaire and ILSN sign)

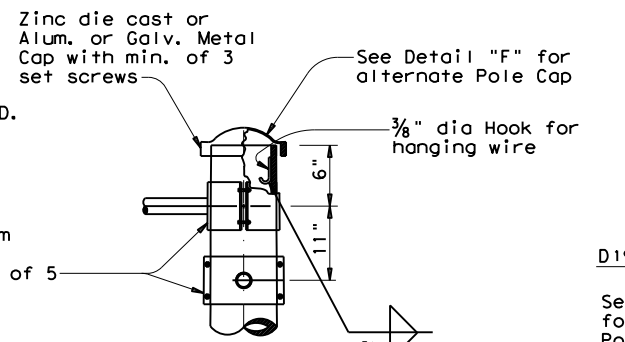


DETAIL C

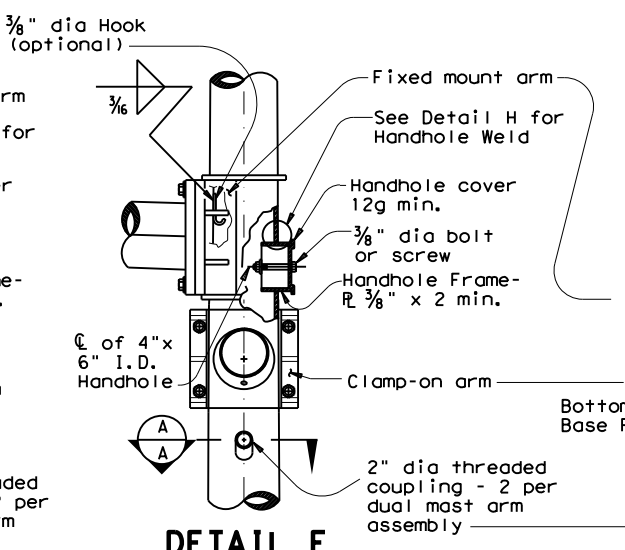


DETAIL E
(for 24' pole with ILSN sign and no luminaire, single or dual mast arm)




DETAIL H

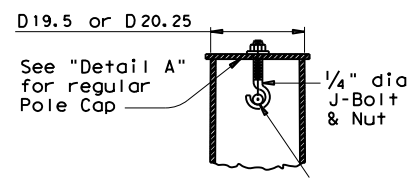


SECTION Y-Y

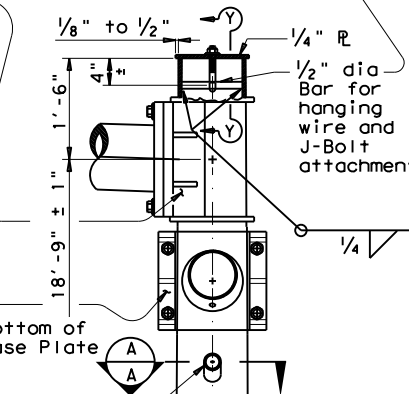

DETAIL F
(for 20.25' pole with no ILSN sign and no luminaire, dual mast arm)

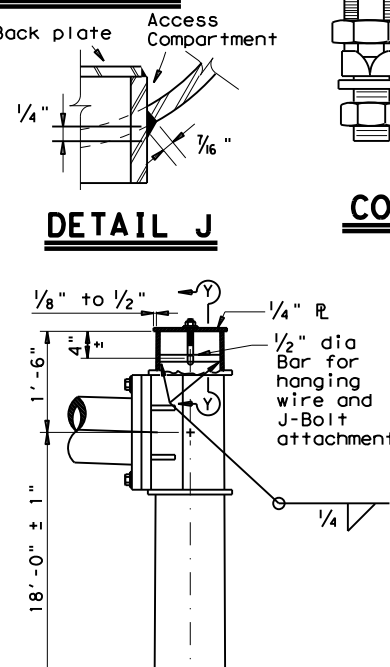


DETAIL G
(for 19.5' pole with no ILSN sign and no luminaire, single mast arm)

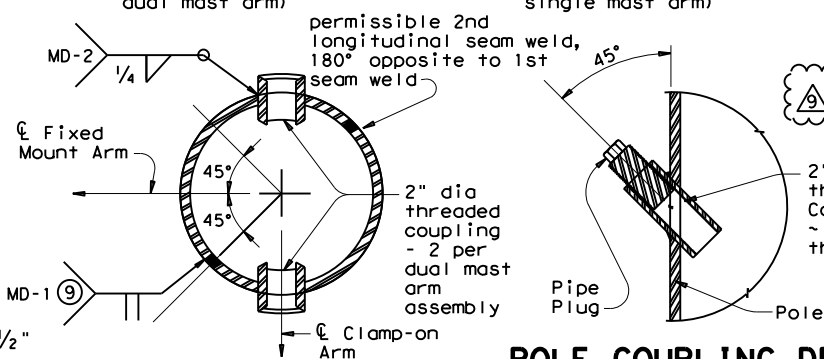


SECTION A-A


⑨ Longitudinal seam weld must be oriented within 90° (45° rotation each side) along the fixed mount arm. 60% min penetration required, 100% penetration within 6" of circumferential base weld.

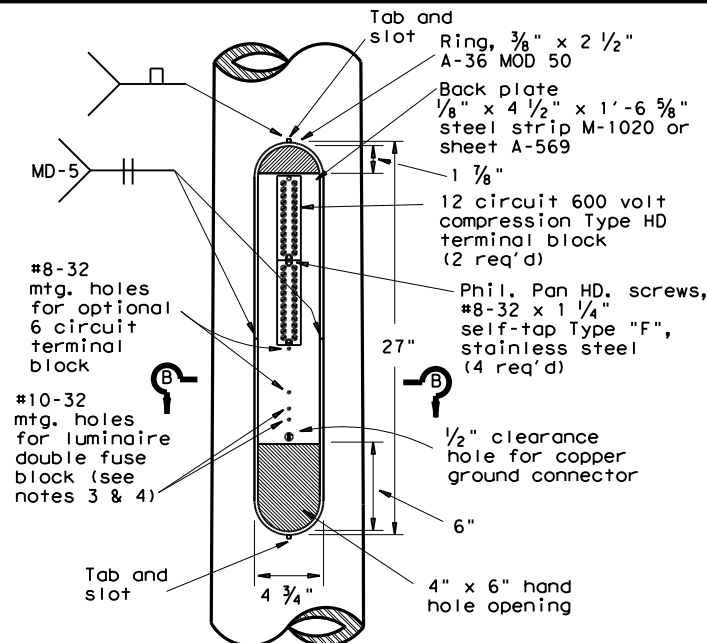


ACCESS COMPARTMENT

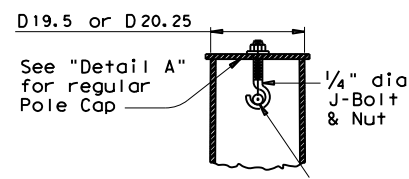

DETAIL J

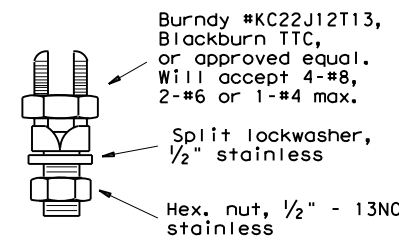

COPPER GROUND CONNECTOR

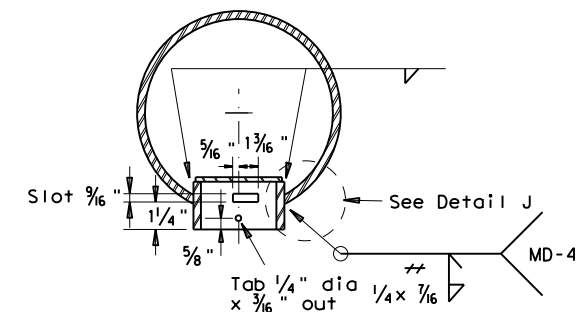

SECTION B-B

Opening for access compartment shall be no more than 1/16 inch wider than the access compartment itself.

ACCESS COMPARTMENT NOTES:


- The cover shall be one piece formed from ABS plastic, shall be a pearl gray color, and shall be suitable for exposure to harsh sunlight and extreme weather. Cover shall latch with two screw latches and shall fit tightly to the enclosure ring to create a rainproof seal. Latch screws shall be 1/4-20 stainless flat socket head screws with tamper proof feature.
- The pole manufacturer shall provide with each pole a separate kit consisting of: one cover with two latching assemblies, two terminal strips (Marathon #985GP12CU or approved equal), four #8-32 x 1 1/4" self tapping type "F" stainless steel pan head screws, and one ground connector (Blackburn TTC, Burndy KC22J12T13, or Ilco SSS-5). The traffic signal contractor shall install the kit items in the field.
- The screw hole spacing on the enclosure back plate shall be for two Marathon #985GP12 terminal strips, one Marathon #985GP06CU terminal strip, and one Bussmann #BM6032B fuse block.
- Install one Bussmann #BM6032B, Littelfuse #L60030M-2C, or Ferraz-Shawmut #30352 fuse block for poles where luminaires are to be installed.

REVISED THE ELEVATION OF ACCESS COMPARTMENT (2/12).


MATERIALS	
Round Shafts or Polygonal Shafts ⑦	ASTM A595 Gr. A, A588, A1008 HSLAS Gr.50 Class 2, A1011 HSLAS Gr.50 Class 2, A572 Gr.50 or A1011 SS Gr.50 ⑧
Plates ⑦	ASTM A36, A588, or A572 Gr.50
Connection Bolts	ASTM A325, or A449 except where noted
Pin Bolts	ASTM A325
Pipe ⑦	ASTM A53 Gr. B, A501, A1008 HSLAS-F Gr.50, A1011 HSLAS-F Gr.50
Misc. Hardware	Galvanized steel or stainless steel or as noted

⑦ ASTM A572, A1008 HSLAS, A1011 HSLAS, A1008 HSLAS-F, A1011 HSLAS-F, or A1011 SS may have higher yield strengths but shall not have less elongation than the grade indicated.

⑧ ASTM A1011 SS Gr.50 shall also have a minimum elongation of 18 percent in 8 inches or 23 percent in 2 inches. Material thickness in excess of those stipulated under A1011 SS will be acceptable providing the material meets all other A1011 SS requirements and the requirements of this item.



POLE ELEVATION

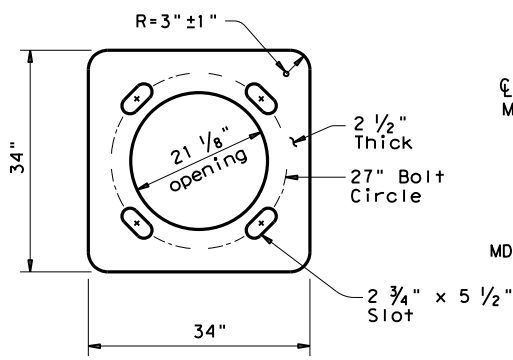

BASE PLATE

POLE COUPLING DETAIL


Texas Department of Transportation

TRAFFIC SIGNAL SUPPORT STRUCTURES LONG MAST ARM ASSEMBLY (50 TO 65 FT) (80 AND 100 MPH WIND ZONE) LMA(2)-12(DAL)

Sheet 2 of 5


© TxDOT July 2000		DN: JK	CK: GRB	DW: FDN	CK: CAL
REVISIONS		CONT	SECT	JOB	HIGHWAY
4-20-01	1-12	1392	01	044	FM 1378
		DIST	COUNTY	SHEET NO.	
		DAL	COLLIN	260	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

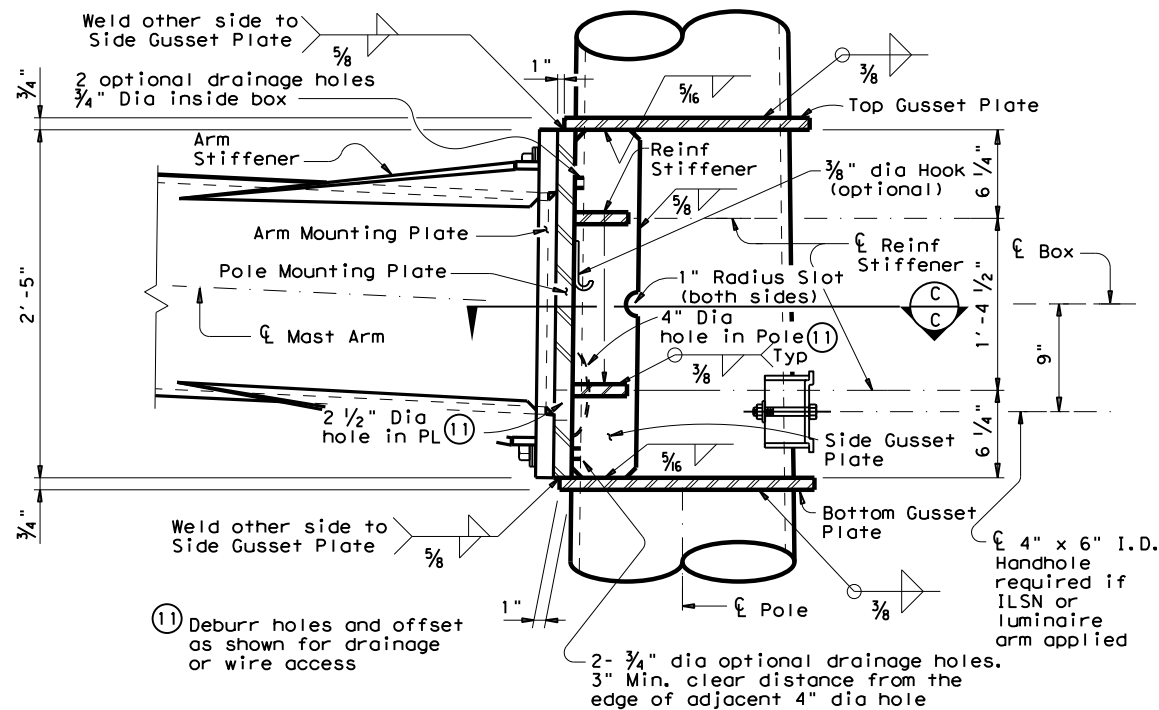

BUILT-UP BOX CONNECTION


REINFORCING STIFFENER

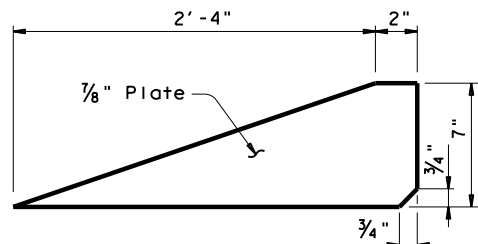

ARM STIFFENER


(Cut to match arm inclination and taper)

Provide Detail shown in SECTION F-F or equivalent 100% complete joint penetration weld from both sides.




Only 4" length at tip of Arm Stiffener requires a complete joint penetration weld. Smooth weld radius to connect Stiffener. Only a fillet weld is required for the remaining weld length.


DETAIL "K"

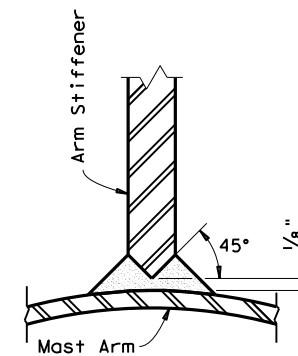

SECTION F-F

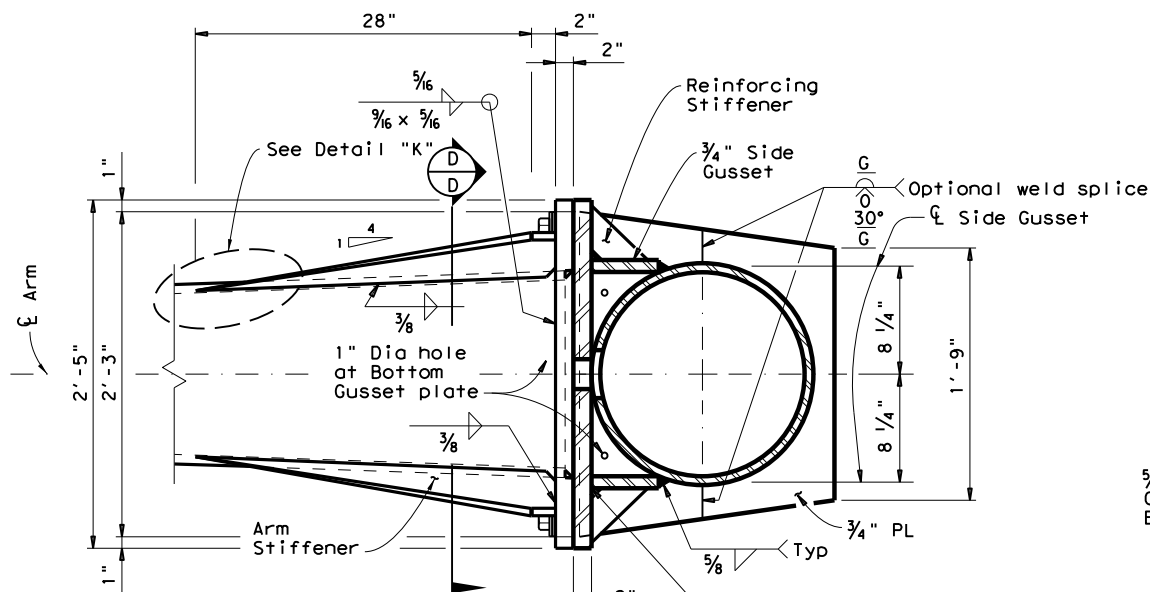


SECTION C-C

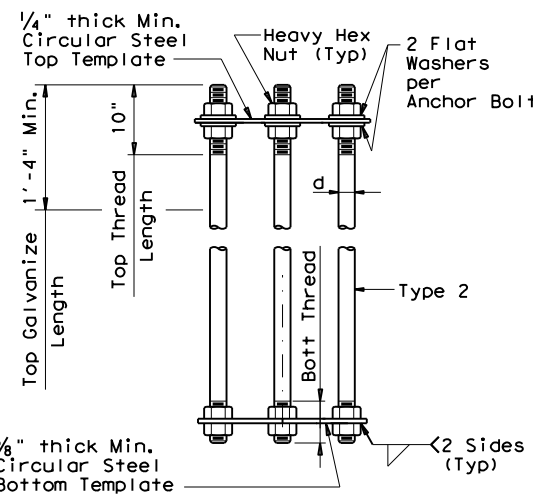

NUT ANCHOR (TYPE 2)

ANCHOR BOLT ASSEMBLY

Steel Template with holes 1/16" greater than bolt diameter



TEMPLATE DETAIL

Fixed Mount Arm L _F	ROUND POLES (13)					Foundation Type
	D _B	D _{19.5}	D _{20.25}	D ₂₄	D ₃₀	
ft.	in.	in.	in.	in.	(12)thk in.	
50', 55', 60', 65'	21.0	18.2	17.6	16.8	.3125	48-A

Fixed Mount Arm L _F	ROUND ARMS (13)				
	L ₁	D ₁	D ₂	(12)thk in.	Rise
ft.	ft.	in.	in.	in.	
50	49	18.5	11.7	.3125	3'- 3"
55	54	18.5	11.0	.3125	3'- 7"
60	59	18.5	10.3	.3125	3'- 11"
65	64	18.5	9.6	.3125	4'- 4"

- D_B = Pole Base O.D.
- D_{19.5} = Pole Top O.D. with no Luminaire and no ILSN (single mast arm)
- D_{20.25} = Pole Top O.D. with no Luminaire and no ILSN (dual mast arm)
- D₂₄ = Pole Top O.D. with ILSN w/out Luminaire
- D₃₀ = Pole Top O.D. with Luminaire
- D₁ = Arm Base O.D.
- D₂ = Arm End O.D.
- L₁ = Shaft Length
- L_F = Fixed Arm Length


- (12) Thickness shown is minimum, thicker materials may be used.
- (13) Shaft profile 16-sided or 18-sided is considered to be equivalent to round section.

GENERAL NOTES:

Built-up Box Connection: For the welded arm-to-pole connection as a built-up box configuration illustrated here is an example only, fabricators are required to submit a shop drawing of box connection for approval. The drawing shall specify the details of each box element, welds of arm-to-pole connection, arm-to-plate socket connection, and arm rise creation. Specify the proper location of drain holes along the pole. 2 1/2" dia hole in the pole mounting plate and 4" dia hole in the pole need to be aligned for wiring access or drainage. Arm stiffeners cut to match arm inclination and taper shall also be included.

The deviation from flat for either arm or pole mounting plate shall not exceed 1/32 in., which is measured along the center of mounting plate to a radial distance of 13.5 in. The deformed-from-flat connection between arm and pole mounting plates shall not be allowed if the center of both mounting plates cannot contact directly.

Fixed mount details are used for single mast arm assemblies and for the first arm on dual mast arm assemblies.

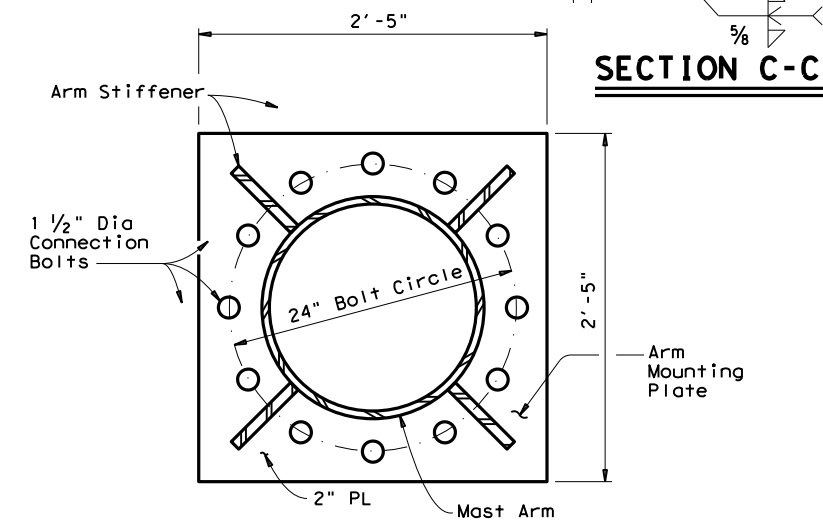

SECTION D-D

FDN TYPE	DRILLED SHAFT DIA	REINFORCING STEEL		DRILLED SHAFT LENGTH-ft (16), (17), (18)			ANCHOR BOLT DESIGN (14)			FOUNDATION DESIGN LOAD (15)		TYPICAL APPLICATION	
		VERT BARS	SPIRAL & PITCH	TEXAS CONE PENETROMETER N blows/ft			ANCHOR BOLT DIA	F _y (ksi)	BOLT CIR DIA	ANCHOR TYPE	MOMENT K-ft		SHEAR Kips
				10	15	40							
48-A	48"	20 #9	#4 at 6"	21.9	19.5	14.7	2 1/2"	55	27"	2	490	10	50' to 65' Mast arm assembly.

SEE SHEET "TS-FD" FOR ADDITIONAL DETAILS.

- (14) Anchor bolt design develops the foundation capacity given under Foundation Design Loads.
- (15) Foundation Design Loads are the allowable moments and shears at the base of the structure.
- (16) Field Penetrometer readings at a depth of approximately 3 to 5 feet may be used to adjust shaft lengths.
- (17) If rock is encountered, the Drilled Shaft shall extend a minimum of two diameters into solid rock.
- (18) Decimal lengths in Design Table are to allow interpolation for other penetrometer values. Round to nearest foot for entry into Summary Table.

ANCHOR BOLT & TEMPLATE SIZE						
Bolt Dia in.	Length #	Top Thread	Bottom Thread	Bolt Circle	R ₂	R ₁
2 1/2"	5'-2"	10"	6 1/2"	27"	16"	11"


*Min dimension given, longer bolts are acceptable.

Texas Department of Transportation

TRAFFIC SIGNAL SUPPORT STRUCTURES LONG MAST ARM ASSEMBLY (50 TO 65 FT) (80 AND 100 MPH WIND ZONE)
 Sheet 3 of 5 **LMA (3)-12**

REVISIONS		DN: JK	CK: GRB	DW: FDN	CK: CAL
4-20-01	1-12	CON: SECT	JOB	HIGHWAY	
		1392 01	044	FM 1378	
		DIST	COUNTY	SHEET NO.	
		DAL	COLLIN	261	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

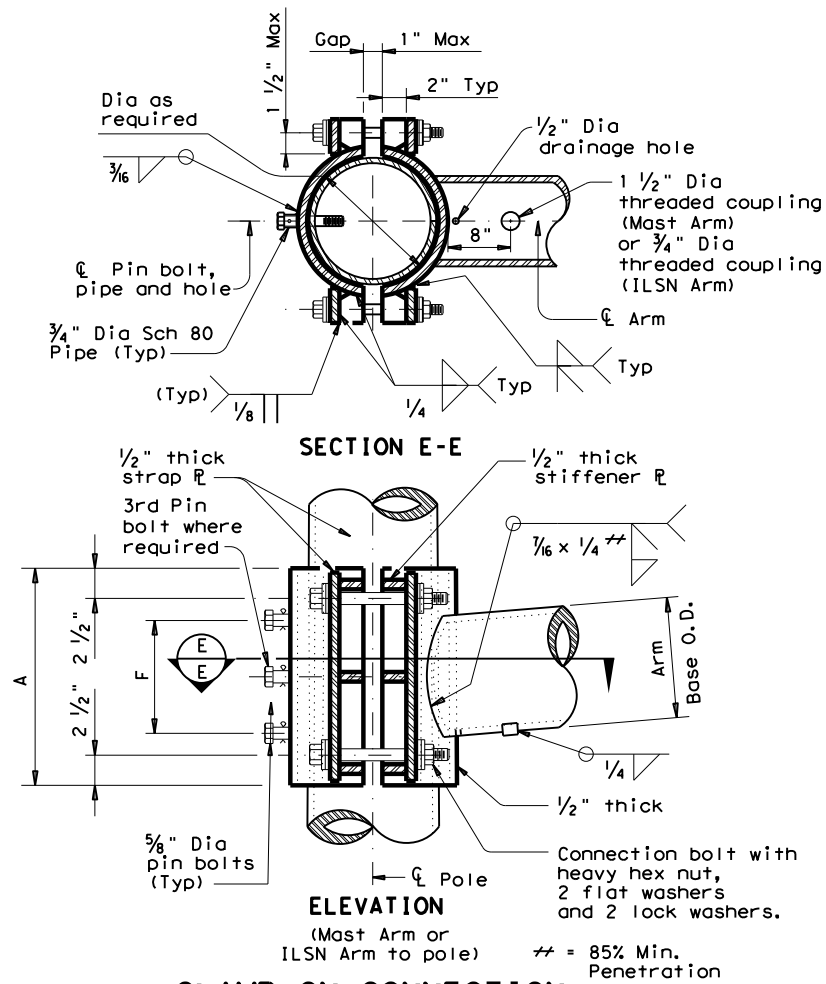

CLAMP-ON CONNECTION

80 MPH WIND										
Clamp-on Arm LC	ROUND ARMS					POLYGONAL ARMS				
	L ₁	D ₁	D ₂	thk (12)	Rise	L ₁	D ₁	D ₂	thk (12)	Rise
20	19.1	6.5	3.8	.179	1'-9"	19.1	7.0	3.5	.179	1'-8"
24	23.1	7.5	4.3	.179	1'-10"	23.1	7.5	3.5	.179	1'-9"
28	27.1	8.0	4.2	.179	1'-11"	27.1	8.0	3.5	.179	1'-10"
32	31.0	9.0	4.7	.179	2'-0"	31.0	9.0	3.5	.179	2'-0"
36	35.0	9.5	4.6	.179	2'-4"	35.0	10.0	3.5	.179	2'-1"
40	39.0	9.5	4.1	.239	2'-8"	39.0	9.5	3.5	.239	2'-3"
44	43.0	10.0	4.1	.239	2'-11"	43.0	10.0	3.5	.239	2'-6"

100 MPH WIND										
Clamp-on Arm LC	ROUND ARMS					POLYGONAL ARMS				
	L ₁	D ₁	D ₂	thk (12)	Rise	L ₁	D ₁	D ₂	thk (12)	Rise
20	19.1	8.0	5.3	.179	1'-8"	19.1	8.0	3.5	.179	1'-7"
24	23.1	9.0	5.8	.179	1'-9"	23.1	9.0	3.5	.179	1'-8"
28	27.1	9.5	5.7	.179	1'-10"	27.1	10.0	3.5	.179	1'-9"
32	31.0	9.5	5.2	.239	1'-11"	31.0	9.5	3.5	.239	1'-10"
36	35.0	10.0	5.1	.239	2'-0"	35.0	10.0	3.5	.239	1'-11"
40	39.0	10.5	5.1	.239	2'-3"	39.0	11.0	3.5	.239	2'-1"
44	43.0	11.0	5.1	.239	2'-8"	43.0	11.5	4.0	.239	2'-3"

D₁ = Arm Base O.D.
D₂ = Arm End O.D.
L₁ = Shaft Length
LC = Clamp-on Arm Length

(12) Thickness shown is minimum, thicker materials may be used.

CLAMP-ON ARM CONNECTION					
Sch 40 pipe Dia	Thick	A	F	4 Conn. Bolts	5/8" Dia. Pin Bolts
				Dia	No.
in.	in.	in.	in.	in.	ea
3	.216	10	4	3/4	2

Mast Arm Size					
Base Dia	Thick	A	F	4 Conn. Bolts	5/8" Dia. Pin Bolts
				Dia	No.
in.	in.	in.	in.	in.	ea
6.5	.179	12	6	1	2
7.5	.179	14	8	1	2
8.0	.179	14	8	1	2
9.0	.179	16	10	1	2
9.5	.179	18	12	1 1/4	3
9.5	.239	18	12	1 1/4	3
10.0	.239	18	12	1 1/4	3
10.5	.239	18	12	1 1/4	3
11.0	.239	18	12	1 1/4	3
11.5	.239	18	12	1 1/4	3


GENERAL NOTES:

Clamp-on details are used for the second arm on dual mast arm assemblies or ILSN arm support. For a clamp-on mast arm, a maximum 1 1/2" wide vertical slotted hole may be cut in the front clamp plate to facilitate drainage during galvanizing. The slot shall be centered behind the arm and shall be no longer than the arm diameter minus 1". For an ILSN arm, a 1 1/2" diameter hole shall be cut in the front clamp plate for wire access. A matched hole shall be field drilled through the pole to provide wire access after arm is oriented. Deburr both holes.


Where duplicate parts occur on a detail, welds shown for part shall apply to all similar parts on the detail.

Pin bolts are required to prevent rotation of clamp-on arms under design wind forces. Pin bolts shall be ASTM A325 with threads excluded from the shear plane. Pin bolt and 3/4" diameter pipe shall have 3/16" diameter holes for a 1/8" diameter galvanized cotter pin. Back clamp plate shall be furnished with a 3/4" diameter hole for each pin bolt. An 1/16" diameter hole for each pin bolt shall be field drilled through the pole after arm orientations have been approved by the Engineer.


REPLACED TENON DETAIL WITH PLATE WELD DETAIL (2/12).

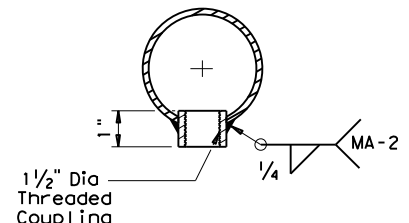

ARM COUPLING DETAIL

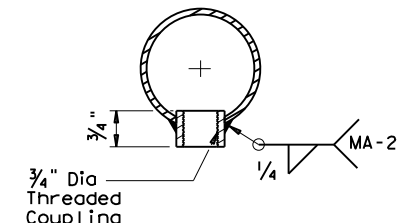


ILSN ARM COUPLING DETAIL

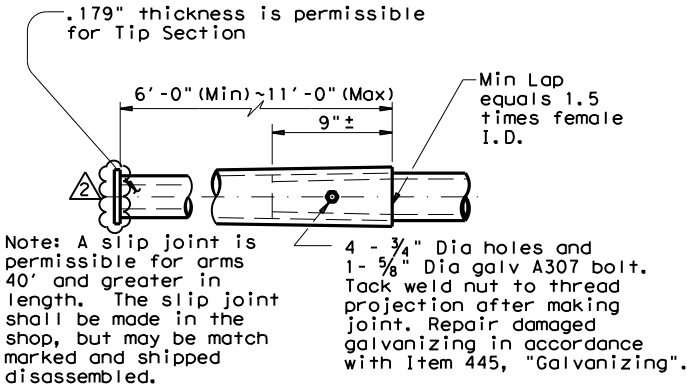

SLIP JOINT DETAIL (CLAMP-ON ARM)

Stainless steel bands (or Cables) and cast bracket as in "Astro-Brac", "Sky Bracket" or "Easy Bracket" with 1 1/2" Dia Threaded Coupling.

BRACKET ASSEMBLY



ARM WELD DETAIL

(19) Longitudinal Seam Weld must be oriented within the lower 90° of the signal arm. 60% Min penetration 100% penetration within 6" of circumferential base welds.

Texas Department of Transportation


TRAFFIC SIGNAL SUPPORT STRUCTURES LONG MAST ARM ASSEMBLY (50 TO 65 FT) (80 AND 100 MPH WIND ZONE)

Sheet 4 of 5 LMA(4)-12(DAL)

© TxDOT November 2000	DN: JK	CK: GRB	DW: FDN	CK: CAL
4-20-01 1-12	REVISIONS	CONT	SECT	JOB
		1392	01	044
		DIST	COUNTY	SHEET NO.
		DAL	COLLIN	262


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

ARM SIZE		A	B	C	D	E	CONN BOLT DIA
D ₁	Ø	in.	in.	in.	in.	in.	in.
6.5	.179	12	9	9	6	1 3/4	1
7.5	.179	13	9	10	6	1 3/4	1
8.0	.179	14	10	11	7	2	1 1/4
9.0	.179	16	11	13	8	2	1 1/4
9.5	.179	17	12	14	9	2	1 1/4
9.5	.239	18	12	15	9	2	1 1/4
10.0	.239	18	12	15	9	2	1 1/4
10.5	.239	18	13	15	10	3	1 1/2
11.0	.239	18	13	15	10	3	1 1/2

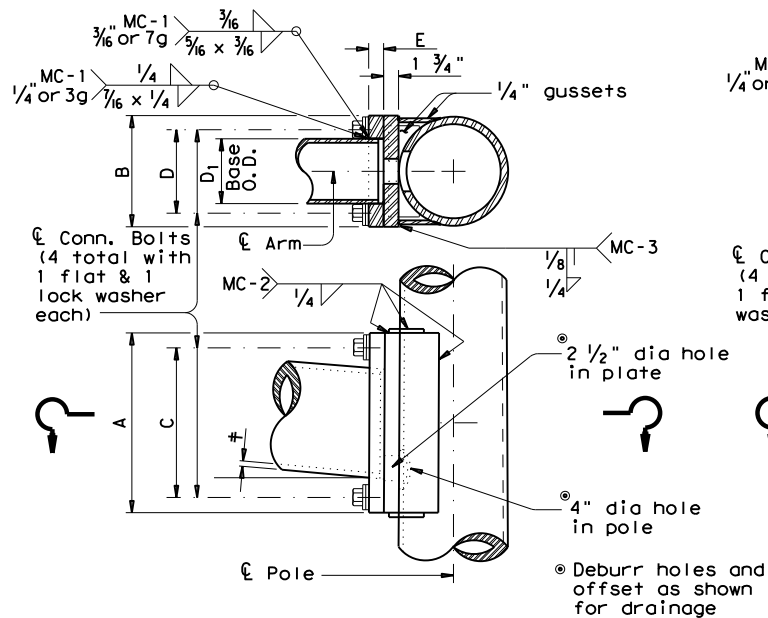


FIXED MOUNT DETAIL 1

ARM SIZE		A	F	CONN. BOLTS		PIN BOLTS	
D ₁	Ø	in.	in.	No.	Dia	No.	Dia
6.5	.179	12	6	4	1	2	5/8
7.5	.179	14	8	4	1	2	5/8
8.0	.179	14	8	4	1	2	5/8
9.0	.179	16	10	4	1	2	5/8
9.5	.179	18	12	4	1 1/4	3	5/8
9.5	.239	18	12	4	1 1/4	3	5/8
10.0	.239	18	12	4	1 1/4	3	5/8

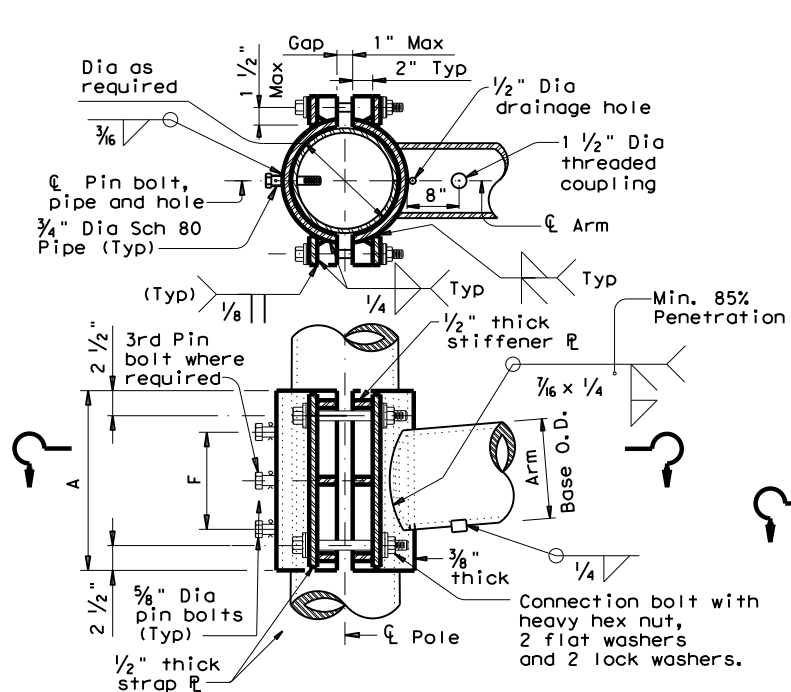


CLAMP-ON DETAIL 1

ARM SIZE		A	B	C	D	E	CONN BOLT DIA
D ₁	Ø	in.	in.	in.	in.	in.	in.
7.0	.179	11	11	8	8	1 3/4	1 1/4
7.5	.179	11	11	8	8	1 3/4	1 1/4
8.0	.179	11	11	8	8	2	1 1/4
9.0	.179	13	13	10	10	2	1 1/4
10.0	.179	13	13	10	10	2	1 1/4
9.5	.239	13	13	10	10	2	1 1/4
10.0	.239	14	14	11	11	2	1 1/2
11.0	.239	14	14	11	11	3	1 1/2
11.5	.239	14	14	11	11	3	1 1/2

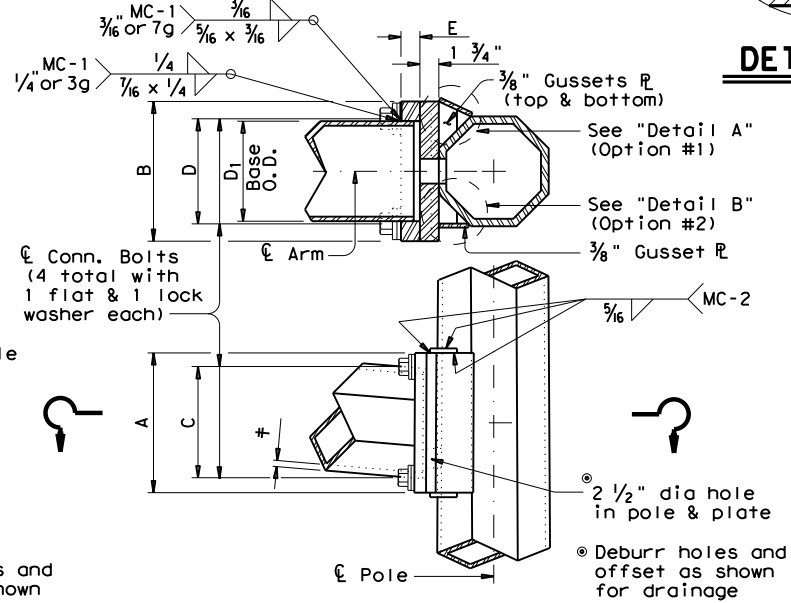


FIXED MOUNT DETAIL 2

ARM SIZE		A	F	T	CONN. BOLTS		PIN BOLTS	
D ₁	Ø	in.	in.	in.	No.	Dia	No.	Dia
7.0	.179	12	6	3/4	4	3/4	2	5/8
7.5	.179	14	8	3/4	4	3/4	2	5/8
8.0	.179	14	8	3/4	4	3/4	2	5/8
9.0	.179	16	10	7/8	4	1	2	5/8
10.0	.179	18	10	7/8	4	1	2	5/8
9.5	.239	18	10	1	6	1	3	5/8
10.0	.239	18	10	1	6	1	3	5/8

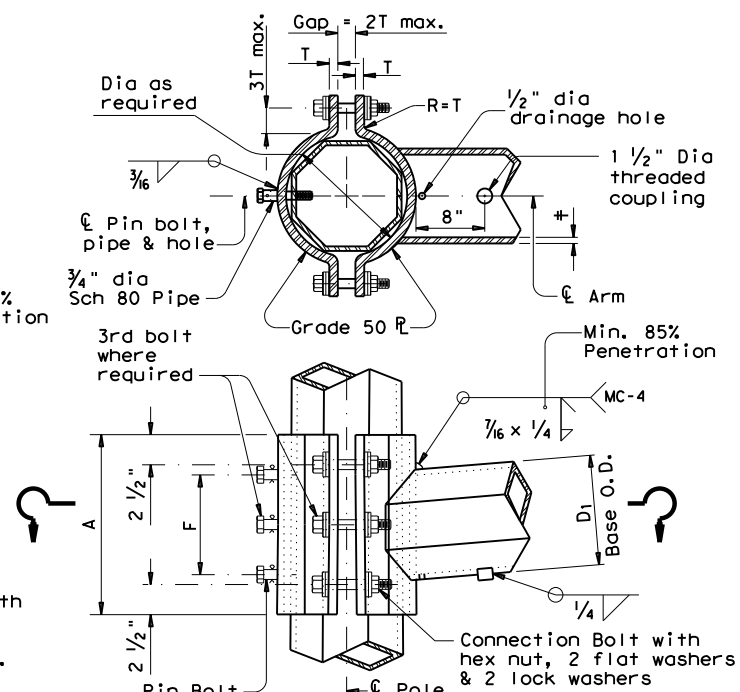


CLAMP-ON DETAIL 2

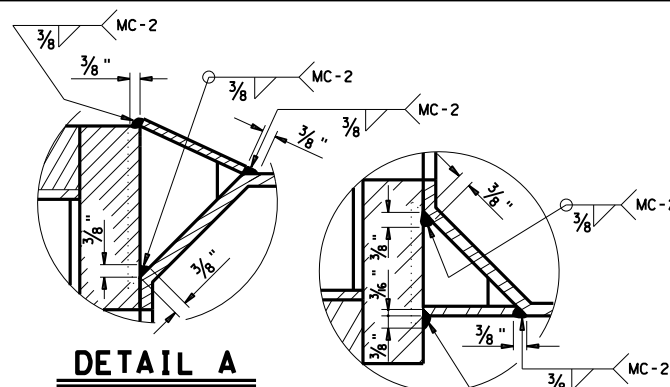

DETAIL A

DETAIL B

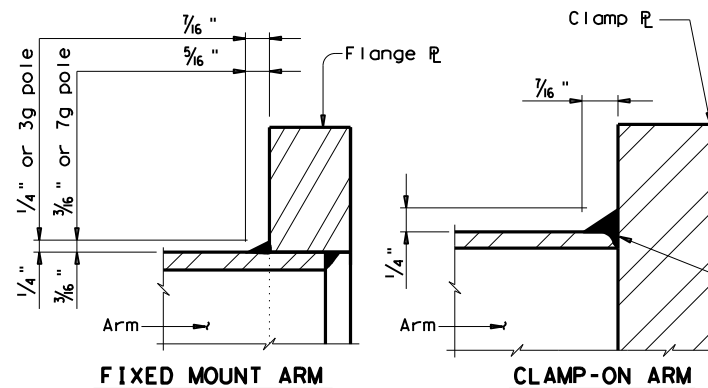


FIXED MOUNT ARM

CLAMP-ON ARM

ARM BASE WELD DETAILS

ARM SIZE		A	F	CONN. BOLTS		PIN BOLTS	
D ₁	Ø	in.	in.	No.	Dia	No.	Dia
6.5	.179	12	6	4	1	2	5/8
7.5	.179	14	8	4	1	2	5/8
8.0	.179	14	8	4	1	2	5/8
9.0	.179	16	10	4	1	2	5/8
9.5	.179	18	12	6	1	3	5/8
9.5	.239	18	12	6	1	3	5/8
10.0	.239	18	12	6	1	3	5/8

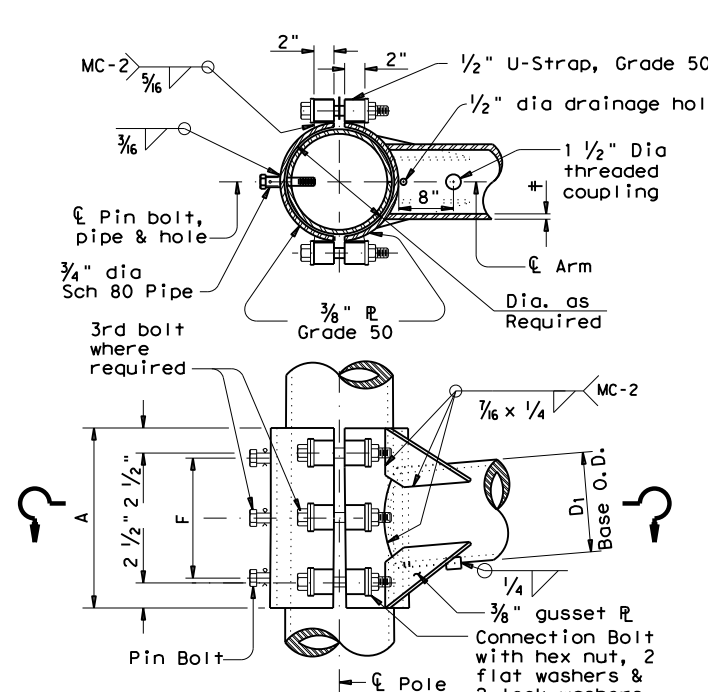

CLAMP-ON DETAIL 3

MATERIALS	
Round Shafts or Polygonal Shafts ¹	ASTM A595 Gr.A, A588, A1008 HSLAS Gr.50 Class 2, A1011 HSLAS Gr.50 Class 2, A572 Gr.50 or A1011 SS Gr.50 ²
Plates ¹	ASTM A36, A588, or A572 Gr.50
Connection Bolts	ASTM A325 or A449, except where noted
Pin Bolts	ASTM A325
Pipe ¹	ASTM A53 Gr.B, A501, A1008 HSLAS-F Gr.50, A1011 HSLAS-F Gr.50
Misc. Hardware	Galvanized steel or stainless steel or as noted

- ¹ ASTM A572, A1008 HSLAS, A1011 HSLAS, A1008 HSLAS-F, A1011 HSLAS-F or A1011 SS may have higher yield strengths but shall not have less elongation than the grade indicated.
- ² ASTM A1011 SS Gr.50 material shall also have a minimum elongation of 18 percent in 8 inches or 23 percent in 2 inches. Material thickness in excess of those stipulated under A1011 SS will be acceptable providing the material meets all other A1011 SS requirements and the requirements of this item.

GENERAL NOTES:

Clamp-on details are used for the second arm on dual mast arm assemblies. A Maximum 1 1/2" wide vertical slotted hole shall be cut in the front clamp plate to facilitate drainage during galvanizing. The slot shall be centered behind the arm and shall be no longer than the arm diameter minus 1"

Fixed mount details are used for single mast arm assemblies and for the first arm on dual mast arm assemblies.

Where duplicate parts occur on a detail, welds shown for one part shall apply to all similar parts on the detail.

Pin bolts are required to prevent rotation of clamp-on arms under design wind forces.

NOTE:

Pin bolts shall be A325 with threads excluded from the shear plane. Pin bolt and 3/4" dia pipe shall have 3/16" dia holes for a 1/8" dia galvanized cotter pin. Back clamp plate shall be furnished with a 3/4" dia hole for each pin bolt. An 1/16" dia hole for each pin bolt shall be field drilled through the pole after arm orientations have been approved by the Engineer.


Texas Department of Transportation
Traffic Operations Division

**STANDARD ASSEMBLY FOR TRAFFIC SIGNAL SUPPORT STRUCTURES
MAST ARM CONNECTIONS
MA-C-12**

© TxDOT August 1995		DN: MS	CK: JSY	DW: MMF	CK: JSY
REVISIONS		CONT	SECT	JOB	HIGHWAY
5-96	1392	01	044	FM 1378	
5-09	DIST		COUNTY	SHEET NO.	
1-12	18		COLLIN	264	

DATE: FILE:



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

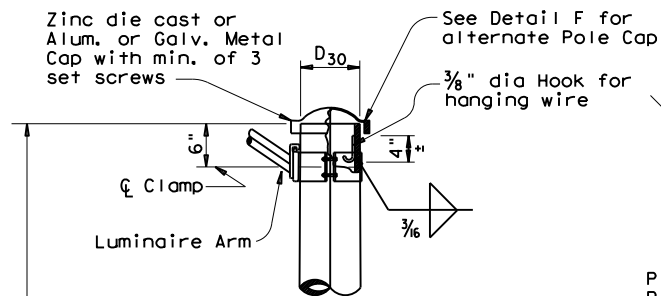


DETAIL A

(for pole with luminaire)

POLE COUPLING DETAIL

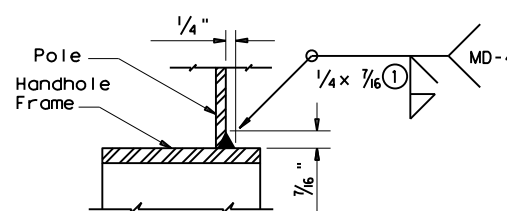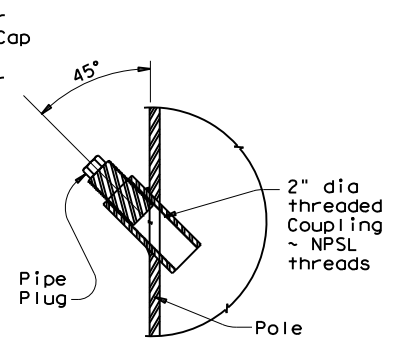


DETAIL G

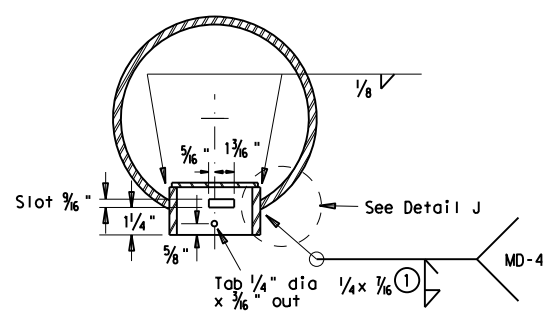


SECTION X-X

Opening for access compartment shall be no more than 1/16 inch wider than the access compartment itself.




Round Pole



Polygonal Pole


DETAIL J

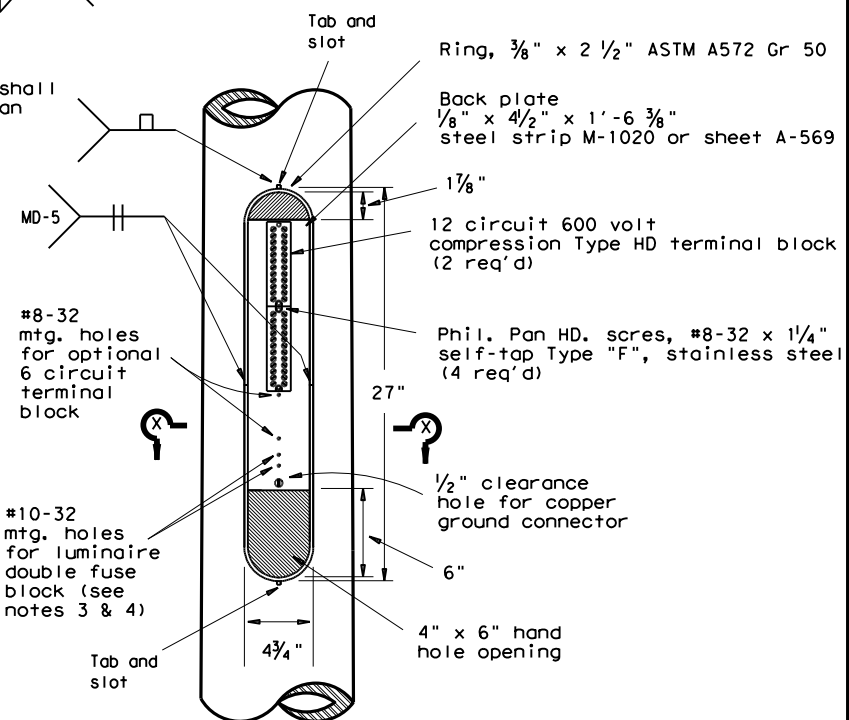

ACCESS COMPARTMENT


NOTES:

- The cover shall be one piece formed from ABS plastic, shall be a pearl gray color, and shall be suitable for exposure to harsh sunlight and extreme weather. Cover shall latch with two screw latches and shall fit tightly to the enclosure ring to create a rainproof seal. Latch screws shall be 1/4-20 stainless flat socket head screws with tamper proof feature.
- The pole manufacturer shall provide with each pole a separate kit consisting of: one cover with two latching assemblies, two terminal strips (Marathon #985GP12CU or approved equal), four #8-32 x 1 1/4 self tapping type 'F' stainless steel pan head screws, and one ground connector (Blackburn TTC, Burndy KC22J12T13, or IlSCO SSS-5). The traffic signal contractor shall install the kit items in the field.
- The screw hole spacing on the enclosure back plate shall be for two Marathon #985GP12 terminal strips, one Marathon #985GP06CU terminal strip, and one Bussmann #BM6032B fuse block.
- Install one Bussmann #BM6032B, Littelfuse #L60030M-2C, or Ferraz-Shawmut #30352 fuse block for poles where luminaires are to be installed.

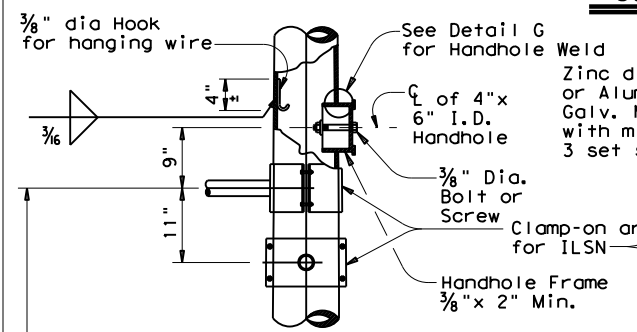


DETAIL B


(If ILSN applied)

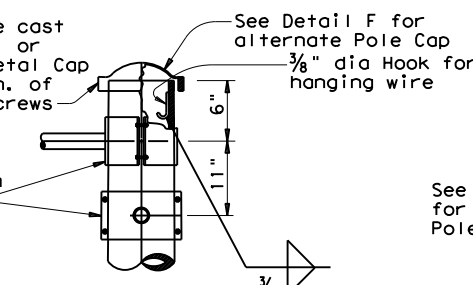

DETAIL C

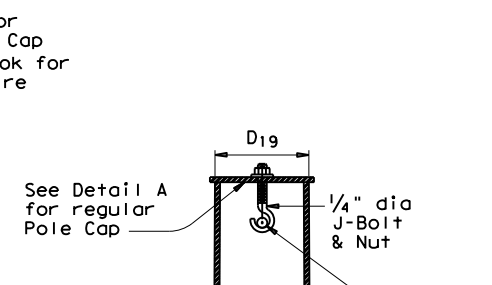


SECTION Y-Y

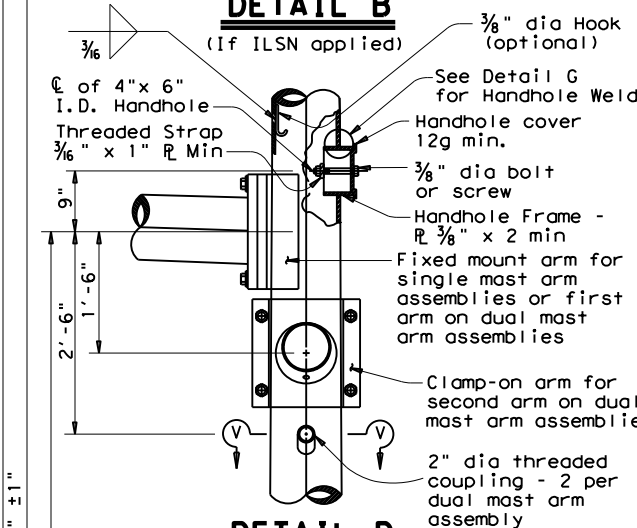


DETAIL D

(for 30' pole with luminaire and ILSN sign)

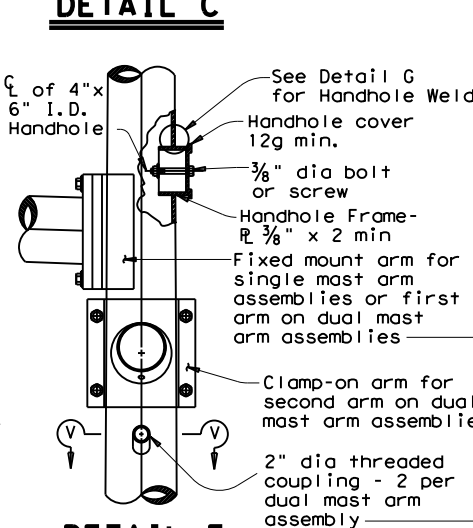


DETAIL E

(for 24' pole with ILSN sign and no luminaire)

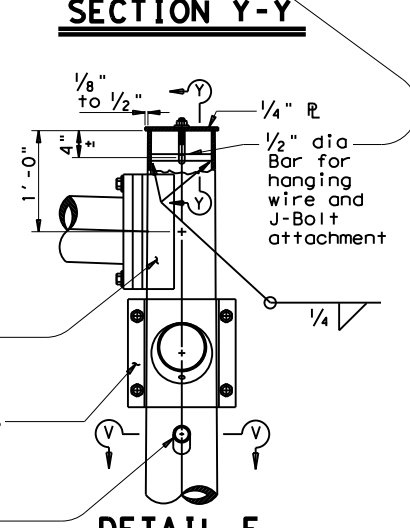


DETAIL F

(for 19' pole with no ILSN sign and no luminaire)

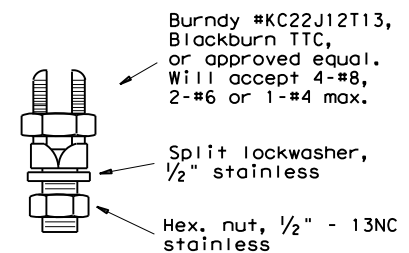


COPPER GROUND CONNECTOR

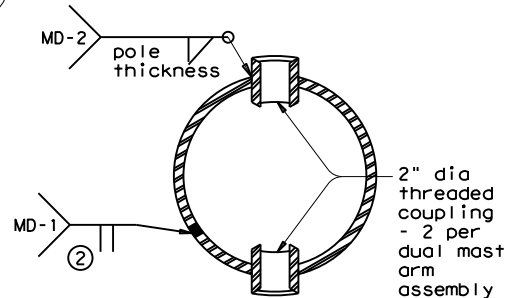

SECTION V-V


Anchor Bolt Diameter	Bolt Hole Diameter	Slot Length	Bolt Circle Diameter	Base R Dim. L x T	Adjust. Range
1 1/2"	1 3/4"	3 1/2"	17"	18" x 1 1/2"	13.4°
1 3/4"	2"	4"	19"	20" x 1 3/4"	13.5°
2"	2 1/4"	4 1/2"	21"	22" x 2"	13.6°
2 1/4"	2 1/2"	5"	23"	24" x 2 1/4"	13.7°

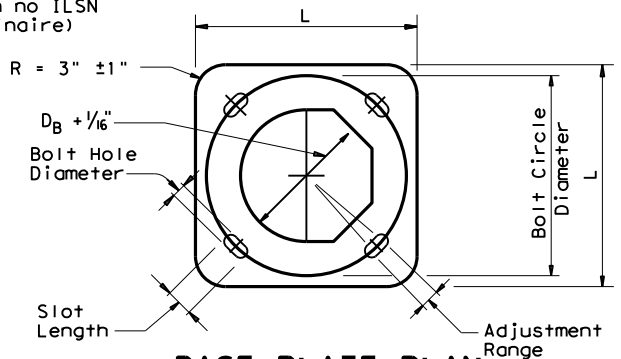


BASE PLATE PLAN

- ① 85% Min. penetration
- ② 60% Min. penetration 100% penetration within 6" of circumferential base welds.

△ REVISED THE ELEVATION OF ACCESS COMPARTMENT (2/12).

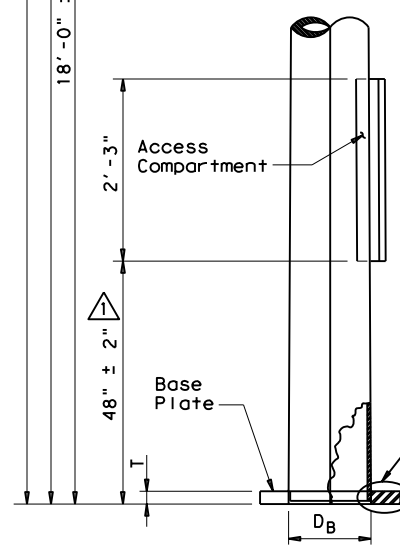

POLE ELEVATION

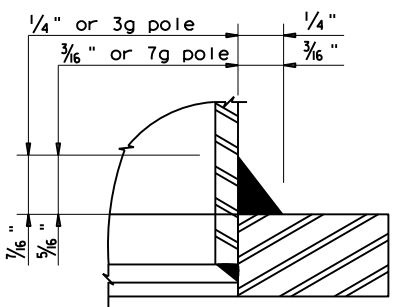

DETAIL H




TRAFFIC SIGNAL SUPPORT STRUCTURES MAST ARM POLE DETAILS MA-D-12 (DAL)


© TxDOT August 1995		DN: MS	CK: JSY	DW: FDN	CK: CAL
REVISIONS		CONT	SECT	JOB	HIGHWAY
8-99	1-12	1392	01	044	FM 1378
DIST		COUNTY		SHEET NO.	
DAL		COLLIN		265	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

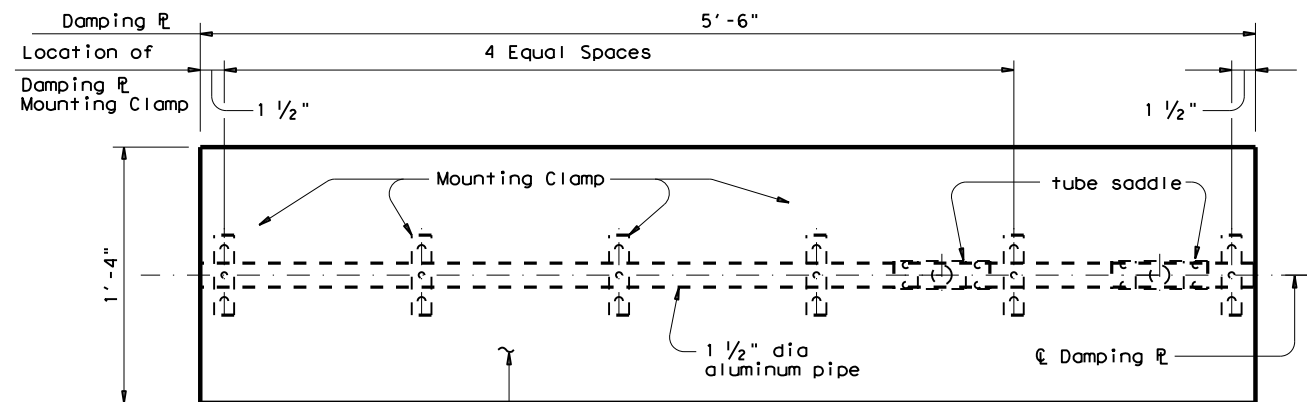


PLAN

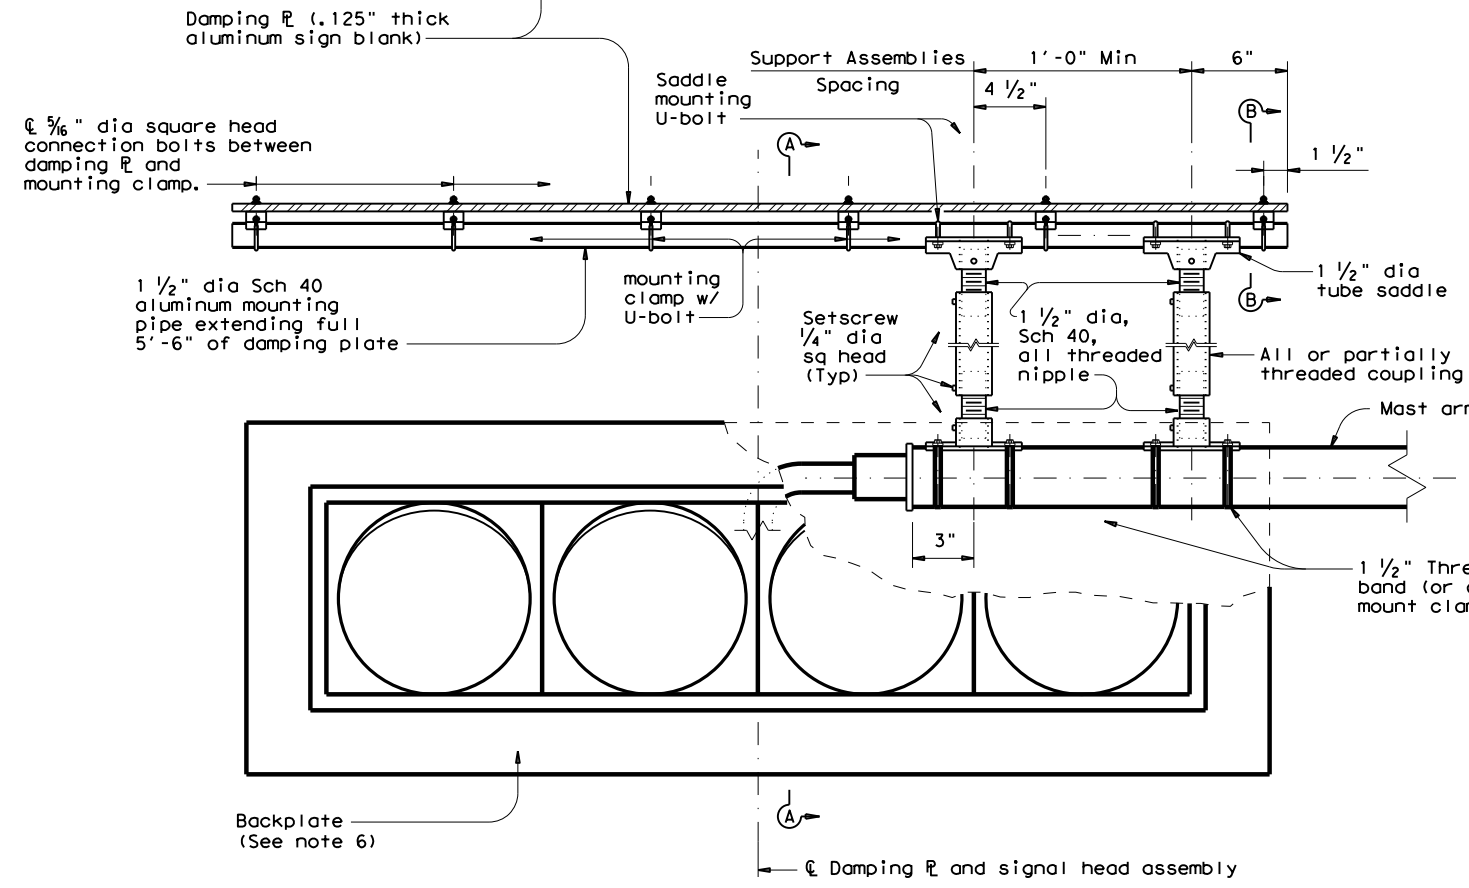


ELEVATION

DAMPING PLATE MOUNTING DETAILS
(Showing alternate placement of signal head)

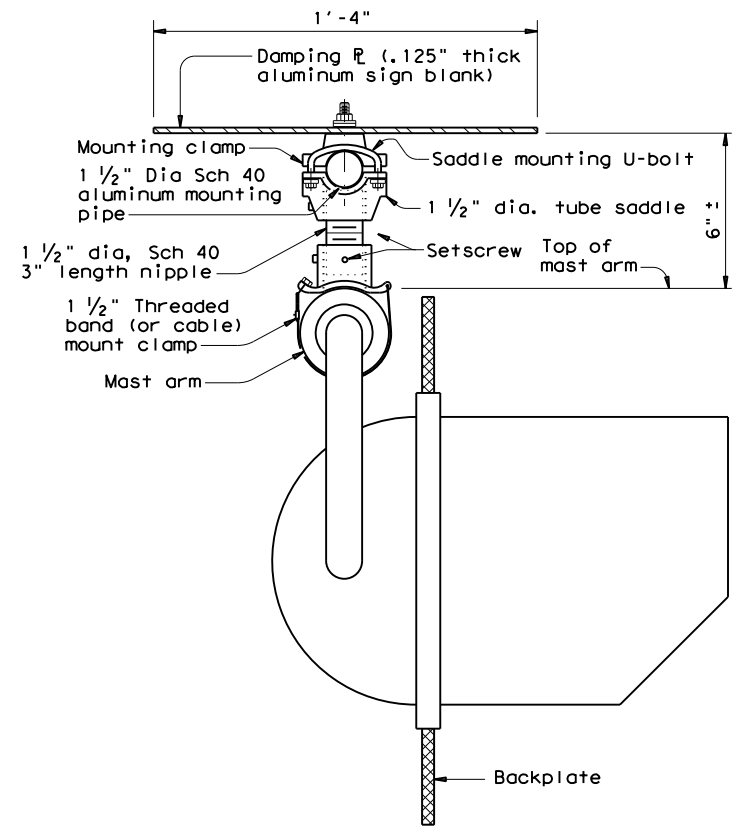

SECTION A-A

(Showing standard placement of signal head)
(Mounting clamp U-bolt is not shown for clarity)

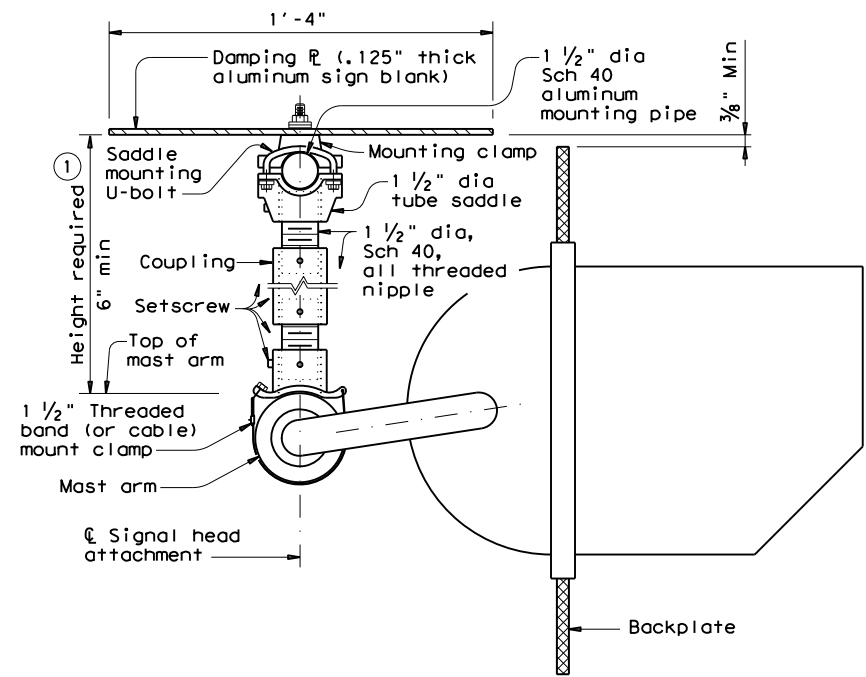

SECTION A-A


(Showing alternate placement of signal head)
(Mounting clamp U-bolt is not shown for clarity)

① Recommended supporting assemblies to achieve required height for horizontal section heads

Height required	One nipple each length	Two nipples each length plus	One coupling each length
6"-6 3/4"	3"	-	-
7"-8 1/2"	4"	-	-
9"-10 1/2"	6"	-	-
11"-15 1/2"	-	4"	5"
16"-24"	-	6"	10"

GENERAL NOTES:

- In accordance with the findings of TxDOT sponsored research, the installation of a damping plate in accordance with the details shown here at the end of signal mast arms of SMA and DMA standard structures reduces excessive harmonic vertical vibration, and thus fatigue damage. Any deviation from these details may reduce the effectiveness of this damping device.
- Aluminum sign blank for damping plate will conform to Departmental Material Specifications DMS-7110. Materials for mast arm mounting clamp and tube saddle will be aluminum castings or aluminum alloys as in accordance with manufacturers' stipulations. Mounting pipe, pipe nipple and coupling will be aluminum alloy 6061-T6 or 6063-T6. Damping plate mounting clamp and u-bolt assemblies will conform to Standard sheet SMD(GEN). U-bolts for saddle mounting will have a minimum yield strength of 36 ksi.
- Damping plate will be mounted horizontally. Position centerline of damping plate to align with centerline of mast arm or horizontal signal head assembly. Vertical clearance between signal head (with or without backing plate) and bottom of damping plate will be maintained as shown. The attachments shown here are examples only, other supporting details which meet both alignment and vertical clearance requirements are also acceptable.
- Unless stipulated by the manufacturers, all steel parts will be galvanized finish in accordance with Standard Specification Item 445, "Galvanizing".
- Contractor will verify applicable field dimensions before the installation.
- Backplates are optional for traffic signals. When backplates are used, Backplates will have a 2-inch fluorescent yellow AASHTO Type BFL or CFL retroreflective border conforming to TxDOT DMS-8300 "Sign Face Materials." See Sheet TS-BP-20 for backplate details.

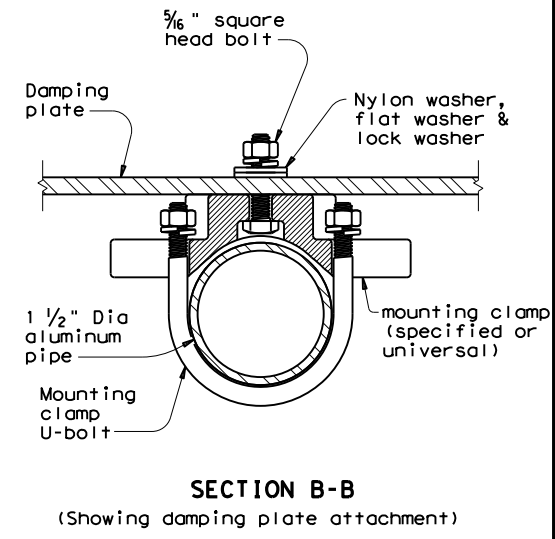

SECTION B-B

(Showing damping plate attachment)

Texas Department of Transportation Traffic Safety Division Standard


MAST ARM DAMPING PLATE DETAILS

MA-DPD-20


FILE: ma-dpd-20.dgn DWN: TxDOT CK: TxDOT DW: TxDOT CK: TxDOT
 © TxDOT January 2012 CONT SECT JOB HIGHWAY
 1392 01 044 FM 1378
 REVISIONS
 6-20 DIST COUNTY SHEET NO.
 18 COLLIN 266

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

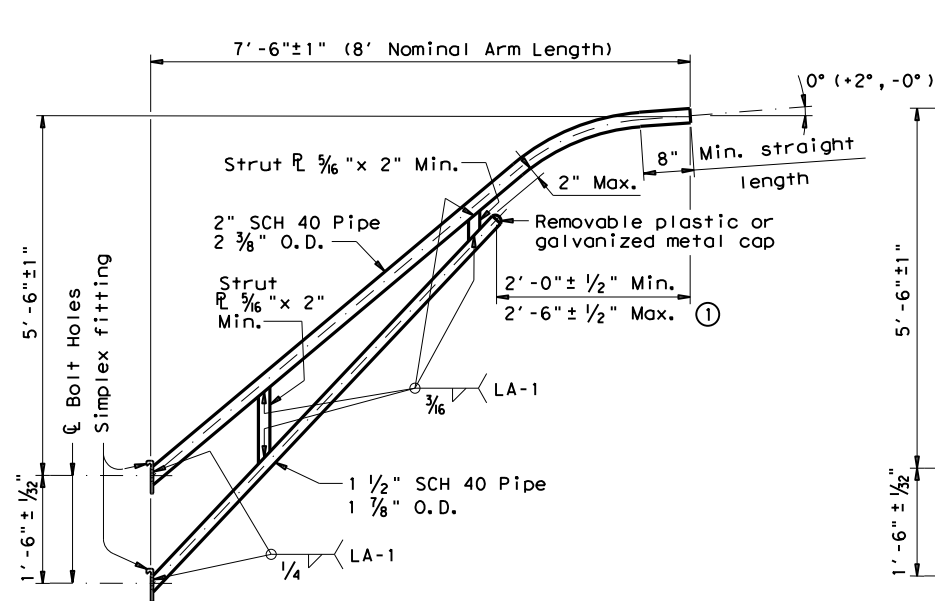

8-FOOT LUMINAIRE ARM

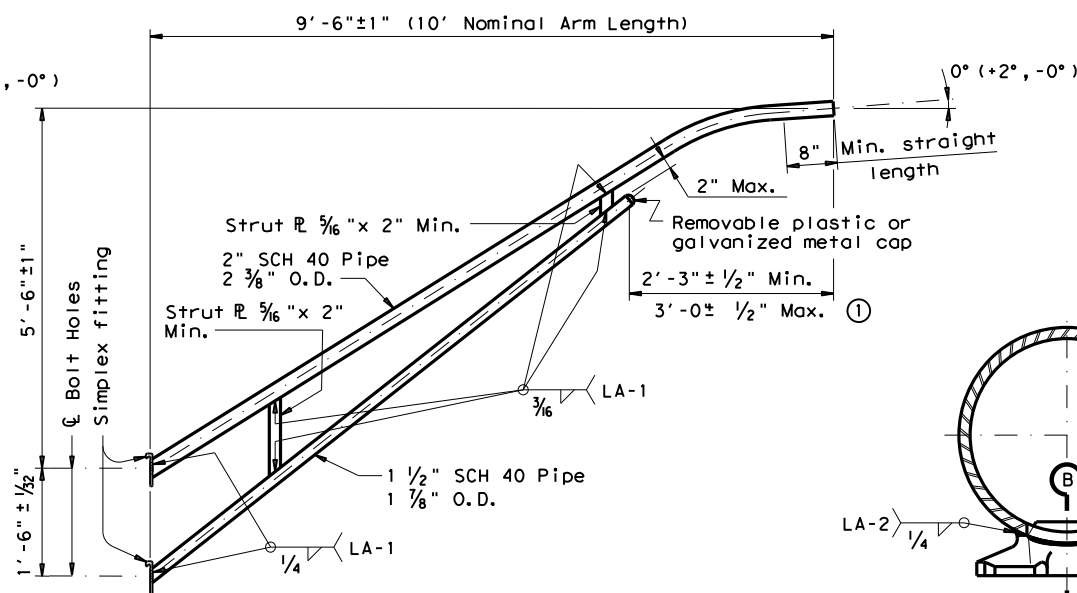

10-FOOT LUMINAIRE ARM



DIRECT ATTACHMENT DETAIL

MATERIALS	
Pole or Arm Simplex	ASTM A27 Gr. 65-35 or A148 Gr. 80-50, A576 Gr. 1021 (3), or A36 (Arm only)
Arm Pipes	ASTM A53 Gr. B, A501, A1008 HSLAS-F Gr. 50 (4), or A1011 HSLAS-F Gr. 50 (4)
Arm Strut Plates (2)	ASTM A36, A572 Gr. 50 (4), or A588
Misc.	ASTM designations as noted

- Dimensional limits are given to show acceptable variation in design. All of a Fabricator's production of a particular arm length shall have the same dimensions within specified tolerances.
- Any of the materials listed for plates may be used where the drawings do not specify a particular ASTM designation.
- A576 must be suitable for forging and also meet minimum tensile strength of 65 ksi, minimum yield of 35 ksi, and elongation in 2 inches of 22 percent.
- ASTM A572, A1008 HSLAS-F, and A1011 HSLAS-F may have higher yield strengths but shall not have less elongation than the grade indicated.

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Revisions thereto. Design Wind Speed equals 90 mph plus a 1.3 gust factor. Arms are designed to support a 60 lb. luminaire having an effective projected area (actual area times drag coefficient) of 1.6 sq. ft.


Materials and fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. In the absence of specified Fabricator tolerances, dimensions shall be within the tolerances generally obtainable in normal fabrication practice.

Unless otherwise noted, all parts shall be galvanized after fabrication in accordance with Item 445, "Galvanizing".

Deviation from the details and dimensions shown herein require submission of shop drawings in accordance with Item 441, "Steel Structures". Alternate designs are not acceptable.


Each pole simplex fitting shall be supplied with 2 ASTM A325 bolts and 2 lock washers of the size specified. The bolts and lock washers shall be secured to the pole with the other hardware items called for in the plans. When clamp attachment is specified, the Fabricator shall ship the clamp assembly securely attached to the pole at the location shown on the plans.

If clamp assemblies are ordered without poles, the Fabricator shall ship one upper and one lower clamp assembly together in a single package, including all nuts and washers required for the clamps and simplex fittings.

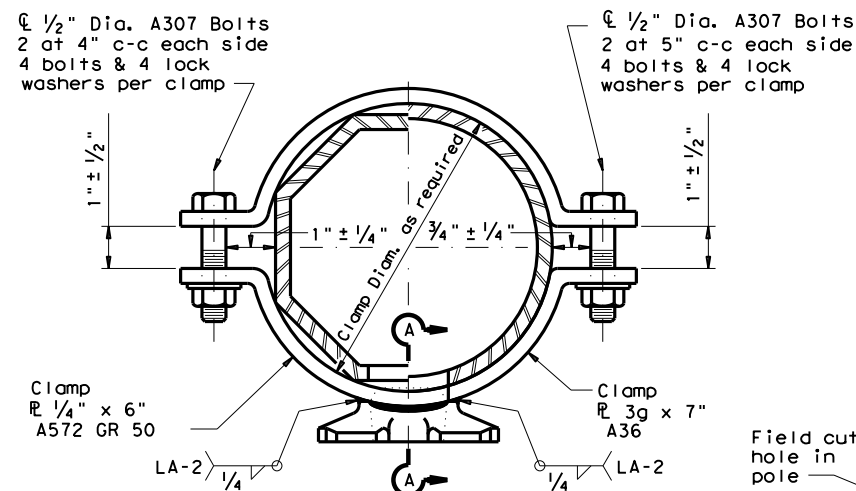


CLAMP ATTACHMENT DETAIL NO. 1 (HALF SECTION)

CLAMP ATTACHMENT DETAIL NO. 2 (HALF SECTION)

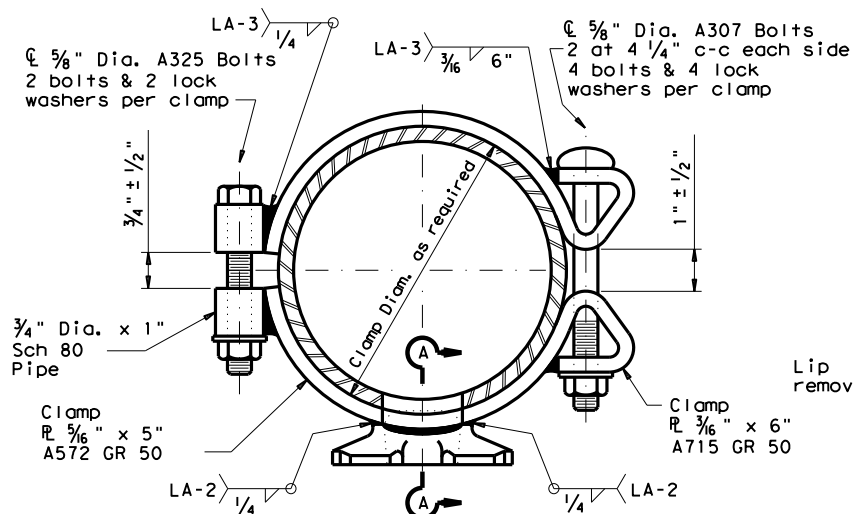


CLAMP ATTACHMENT DETAIL NO. 3 (HALF SECTION)

CLAMP ATTACHMENT DETAIL NO. 4 (HALF SECTION)

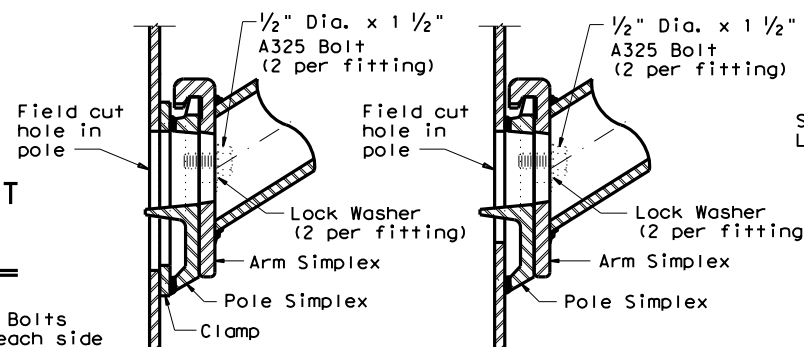


UPPER SIMPLEX FITTING

UPPER SIMPLEX FITTING

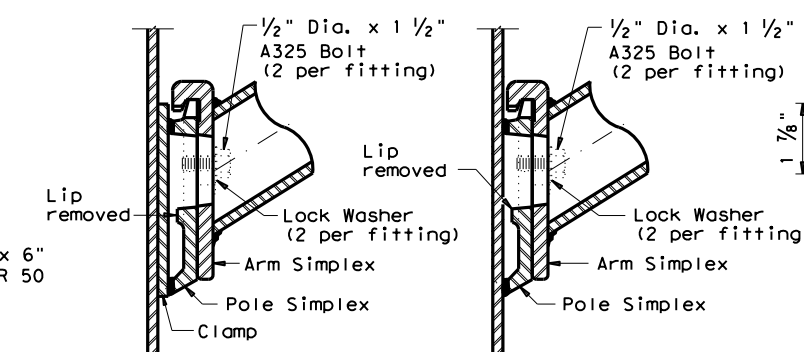


LOWER SIMPLEX FITTING

LOWER SIMPLEX FITTING

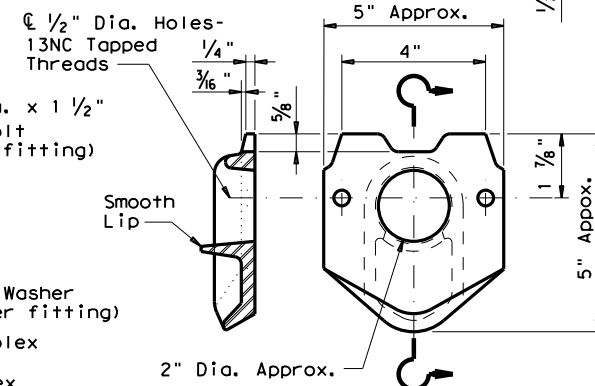

POLE SIMPLEX DETAIL

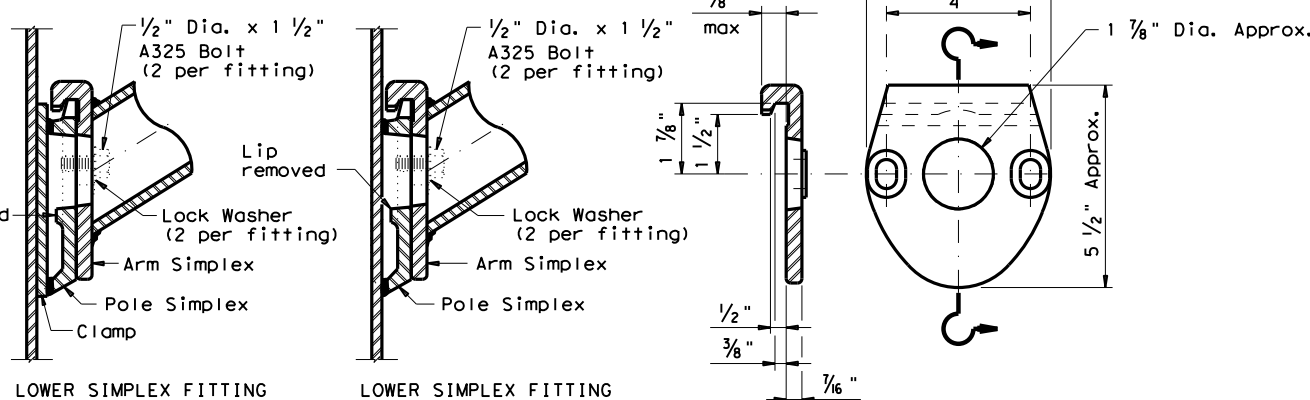

SECTION A-A

SECTION B-B

ARM SIMPLEX DETAIL

Texas Department of Transportation
Traffic Operations Division
STANDARD ASSEMBLY DRAWINGS FOR LUMINAIRE SUPPORT STRUCTURES
ARM DETAILS
LUM-A-12

REVISIONS		DN: LEH	CK: JSY	DW: LTT	CK: TEB
5-96		CON	SECT	JOB	HIGHWAY
1-99		1392	01	044	FM 1378
1-12		DIST	COUNTY	SHEET NO.	
		18	COLLIN	267	

The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DISCLAIMER:

DATE: \$DATE\$
 TIMES: \$TIME\$
 FILE: \$FILE\$

FOUNDATION DESIGN TABLE


FDN TYPE	DRILLED SHAFT DIA	REINFORCING STEEL		EMBEDDED DRILLED SHAFT LENGTH-ft (4), (5), (6)			ANCHOR BOLT DESIGN (1)				FOUNDATION DESIGN LOAD (2)		TYPICAL APPLICATION
		VERT BARS	SPIRAL & PITCH	TEXAS CONE PENETROMETER N blows/ft			ANCHOR BOLT DIA	F _y (ksi)	BOLT CIR DIA	ANCHOR TYPE	MOMENT K-ft	SHEAR Kips	
				10	15	40							
24-A	24"	4-#5	#2 qt. 12"	5.7	5.3	4.5	3/4"	36	12 3/4"	1	10	1	Pedestal pole, pedestal mounted controller.
30-A	30"	8-#9	#3 qt. 6"	11.3	10.3	8.0	1 1/2"	55	17"	2	87	3	Most arm assembly. (see Selection Table)
36-A	36"	10-#9	#3 qt. 6"	13.2	12.0	9.4	1 3/4"	55	19"	2	131	5	Most arm assembly. (see Selection Table) 30' strain pole with or without luminaire.
36-B	36"	12-#9	#3 qt. 6"	15.2	13.6	10.4	2"	55	21"	2	190	7	Most arm assembly. (see Selection Table) Strain pole taller than 30' & strain pole with most arm
42-A	42"	14-#9	#3 qt. 6"	17.4	15.6	11.9	2 1/4"	55	23"	2	271	9	Most arm assembly. (see Selection Table)

FOUNDATION SELECTION TABLE FOR STANDARD MAST ARM PLUS ILSN SUPPORT ASSEMBLIES (ft)

		FDN 30-A	FDN 36-A	FDN 36-B	FDN 42-A
80 MPH DESIGN WIND SPEED	MAX SINGLE ARM LENGTH	32'	48'		
	MAXIMUM DOUBLE ARM LENGTH COMBINATIONS	24' X 24'			
		28' X 28'			
		32' X 28'			
100 MPH DESIGN WIND SPEED	MAX SINGLE ARM LENGTH		36'	44'	
	MAXIMUM DOUBLE ARM LENGTH COMBINATIONS	24' X 24'			
		28' X 28'			
		32' X 24'			
		32' X 32'			
		36' X 36'			
		40' X 24'	40' X 36'		
			44' X 36'	40' X 36'	


EXAMPLE:

- For 80mph design wind speed, foundation 30-A can support up to a 32' arm with another arm up to 28'
- For 100mph design wind speed, foundation 36-A can support a single 36' mast arm.

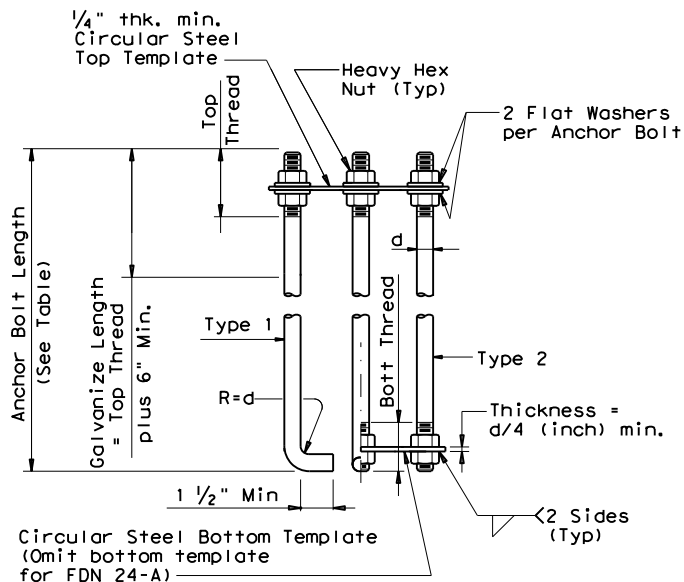


HOOKED ANCHOR (TYPE 1) **NUT ANCHOR (TYPE 2)**
ANCHOR BOLT ASSEMBLY


⑧ Orient anchor bolts orthogonal with the fixed arm direction to ensure that two bolts are in tension under dead load.

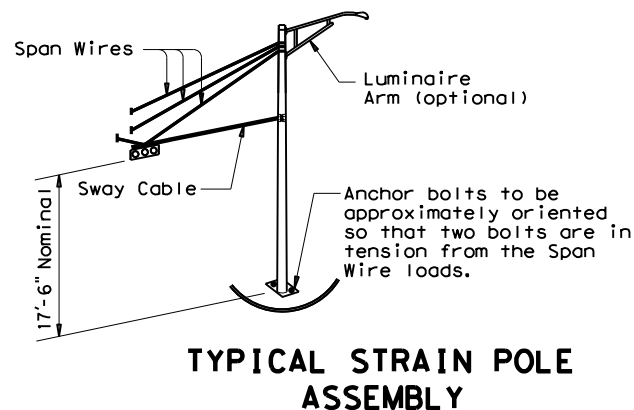

TYPICAL STRAIN POLE ASSEMBLY

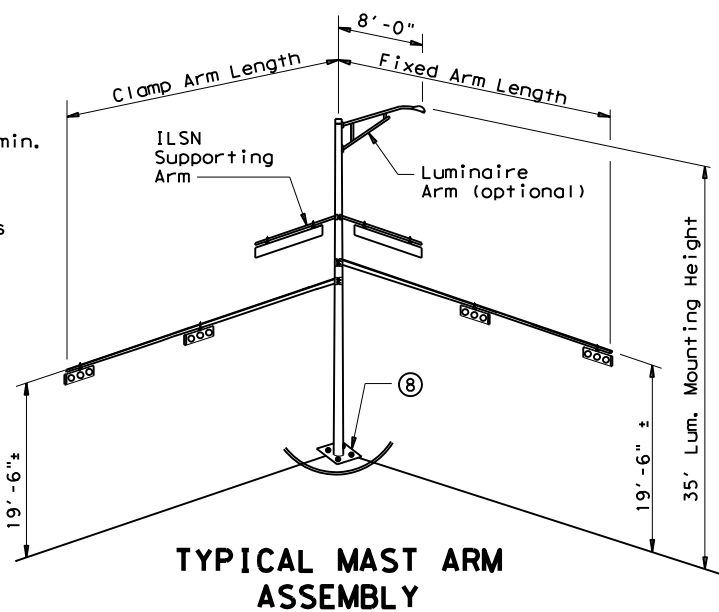


TYPICAL MAST ARM ASSEMBLY

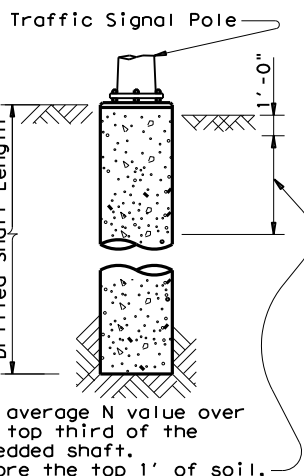


Use average N value over the top third of the embedded shaft. Ignore the top 1' of soil.

ANCHOR BOLT & TEMPLATE SIZES						
BOLT DIA IN.	⑦ BOLT LENGTH	TOP THREAD	BOTTOM THREAD	BOLT CIRCLE	R ₂	R ₁
3/4"	1'-6"	3"	—	12 3/4"	7 1/8"	5 5/8"
1 1/2"	3'-4"	6"	4"	17"	10"	7"
1 3/4"	3'-10"	7"	4 1/2"	19"	11 1/4"	7 3/4"
2"	4'-3"	8"	5"	21"	12 1/2"	8 1/2"
2 1/4"	4'-9"	9"	5 1/2"	23"	13 3/4"	9 1/4"

⑦ Min dimensions given, longer bolts are acceptable.

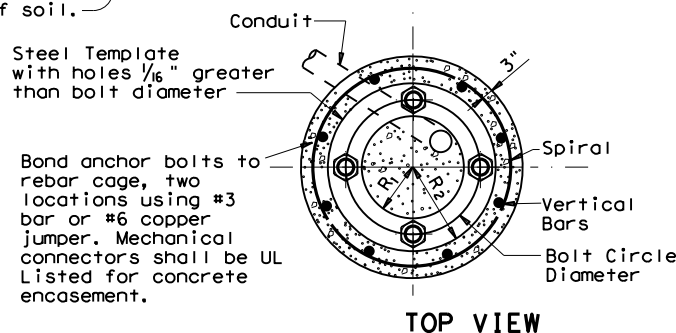

TOP VIEW

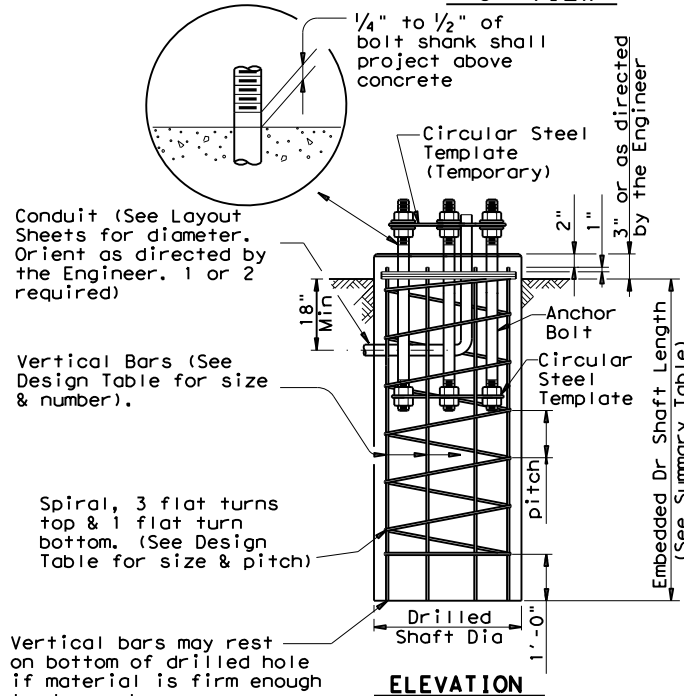

ELEVATION

FOUNDATION DETAILS

Vertical bars may rest on bottom of drilled hole if material is firm enough to do so when concrete is placed.

NOTES:

- Anchor bolt design develops the foundation capacity given under Foundation Design Loads.
- Foundation Design Loads are the allowable moments and shears at the base of the structure.
- Foundations may be listed separately or grouped according to similarity of location and type. Quantities are for the Contractor's information only.
- Field Penetrometer readings at a depth of approximately 3 to 5 feet may be used to adjust shaft lengths.
- If rock is encountered, the Drilled Shaft shall extend a minimum of two diameters into solid rock.
- Decimal lengths in Design Table are to allow interpolation for other penetrometer values. Round to nearest foot for entry into Summary Table.

FOUNDATION SUMMARY TABLE (3)

LOCATION IDENTIFICATION	AVG. N BLOW /ft.	FDN TYPE	NO. EA	DRILLED SHAFT LENGTH (6) (FEET)						
				24-A	30-A	36-A	36-B	42-A		
FM 1378 AT FM 3826										
P2	10	36-A	1			13				
P3	10	30-A	1		11					
**P4	10	24-A	1	4						
**P5	10	24-A	1	4						
*P7	10	24-A	2	6						
TOTAL DRILLED SHAFT LENGTHS				24	11	13				

*SUBSIDIARY TO ITEM 685
**SUBSIDIARY TO ITEM 687

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals and interim revisions thereto.

Reinforcing steel shall conform to Item 440, "Reinforcing Steel".

Concrete shall be Class "C".

Threads for anchor bolts and nuts shall be rolled or cut threads of 8UN series up to 2" in diameter or UNC series for all sizes. Bolts and nuts shall have Class 2A and 2B fit tolerances. Galvanized nuts shall be tapped after galvanizing.

Anchor bolts that are larger than 1" in diameter shall conform to "alloy steel" or "medium-strength mild steel" per Item 449, "Anchor Bolts". Anchor bolts that are 1" in diameter or less shall conform to ASTM A36. Galvanize a minimum of the top end thread length plus 6" for all anchor bolts unless otherwise noted. Exposed washers and exposed nuts shall be galvanized. All galvanizing shall be in accordance with Item 445, "Galvanizing".

Templates and embedded nuts need not be galvanized. Lubricate and tighten anchor bolts when erecting the structure in accordance with Item 449, "Anchor Bolts".




TRAFFIC SIGNAL POLE FOUNDATION

TS-FD-12





© TxDOT August 1995		DN: MS	CK: JSY	DW: MAO/MMF	CK: JSY/TEB
5-96	REVISIONS	CONT	SECT	JOB	HIGHWAY
11-99		1392	01	044	FM 1378
1-12		DIST	COUNTY		SHEET NO.
		DAL	COLLIN		268

RADAR DETECTION ZONE LOCATIONS

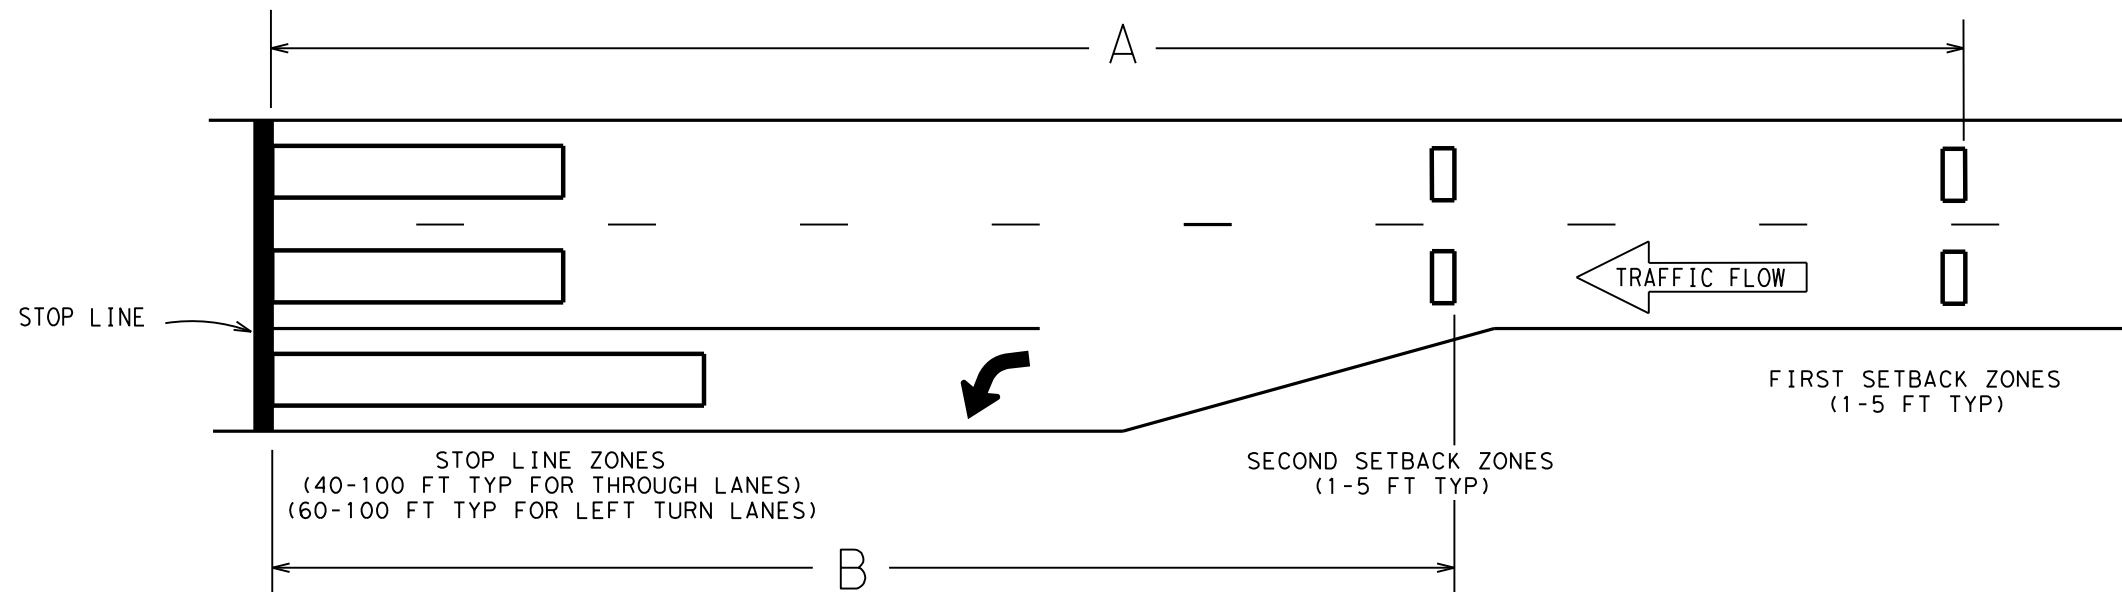

APPROACH SPEED LIMIT (MPH)	DISTANCE A (FT)	DISTANCE B (FT)	MINIMUM RANGE OF DETECTION (LF)
45	360	245	400
50	405	300	440
55	445	325	490
60	485	355	530
65	525	380	575
70	565	410	620

RADAR DETECTION INSTALLATION DETAILS

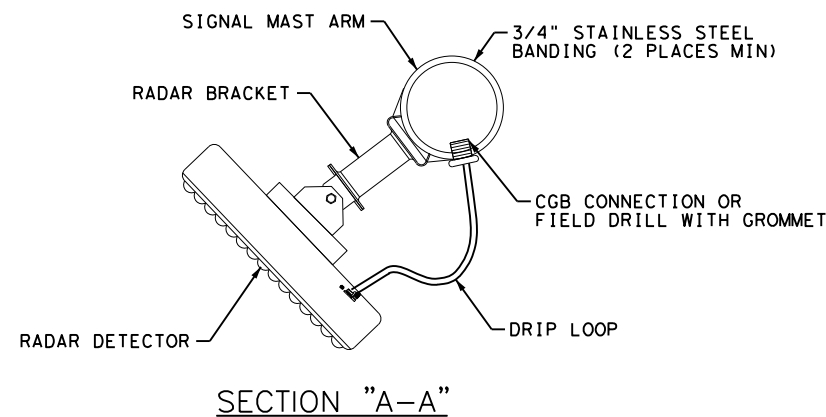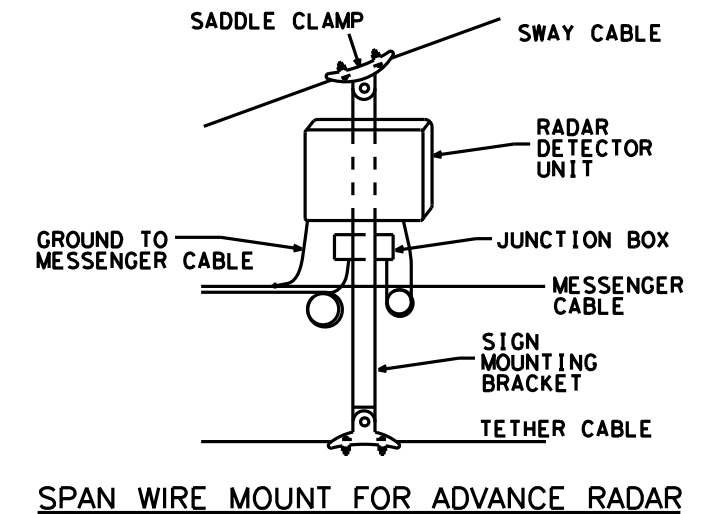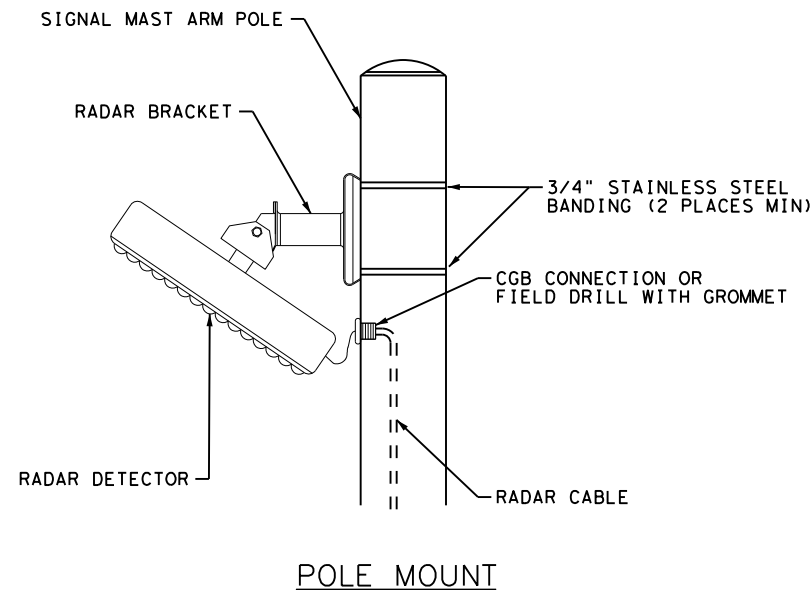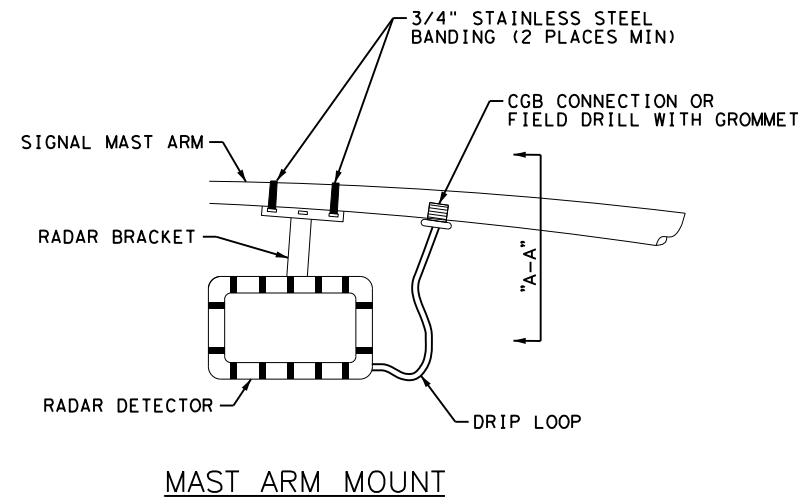

NOTES:


1. THE RADAR SENSOR MOUNTING BRACKET MUST BE ADJUSTABLE TO TILT UP, DOWN, LEFT, RIGHT, AND TO ROTATE.
2. THE RADAR DETECTOR UNITS SHOWN ARE NOT INTENDED TO REPRESENT ANY SPECIFIC BRAND OR PRODUCT, AND ALTERNATE MOUNTING METHODS MAY BE SUBMITTED FOR APPROVAL.

DALLAS DISTRICT STANDARD



RADAR VEHICLE DETECTION SYSTEM RVDS-18 (DAL)

REVISIONS	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
	6	(SEE TITLE SHEET)	FM 1378
	STATE	DISTRICT	COUNTY
	TEXAS	18	COLLIN
	CONTROL	SECTION	JOB
	1392	01	044

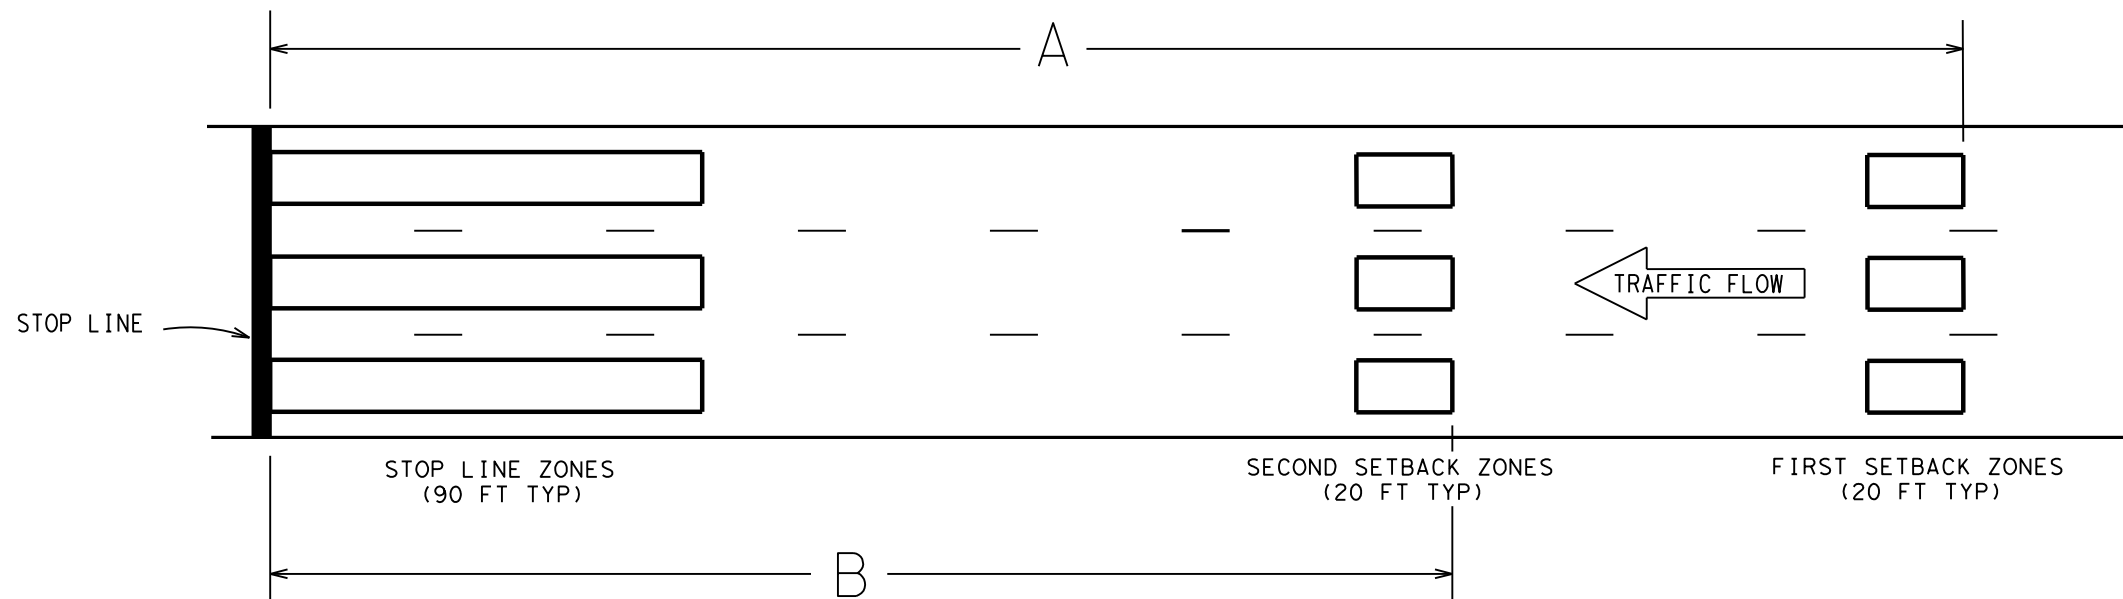

APPROACH SPEED LIMIT (MPH)	DISTANCE ² BETWEEN CAMERA AND STOP LINE (FT)	DISTANCE ¹ A (FT)	CAMERA HEIGHT (FT)									
			24	28	32	36	40	24	28	32	36	40
			DISTANCE B (FT)					EXTENSION ON 2ND DET. ZONE (SEC.)				
60	80	470	280	295	305	310	315	0.0	0.0	0.0	0.5	0.5
	150	470	270	285	295	300	310	0.0	0.0	0.0	0.0	0.5
55	80	430	255	265	275	280	285	0.0	0.0	0.0	0.5	0.5
	150	430	245	255	265	275	280	0.0	0.0	0.0	0.0	0.5
50	80	390	235	245	250	255	260	0.0	0.0	0.5	0.5	0.5
	150	390	220	230	240	245	250	0.0	0.0	0.0	0.0	0.5
45	80	350	210	215	220	225	230	0.0	0.0	0.5	0.5	0.5
	150	350	190	200	210	215	220	0.0	0.0	0.0	0.0	0.5

- Distances shown are based on a 20' detection zone and a 1.0 second passage time setting.
- Distance between the camera and the stop line, as measured parallel to the direction of travel.

DALLAS DISTRICT STANDARD




VIDEO DETECTION ZONE PLACEMENT
VDZ-04 (DAL)


© TxDOT September 2004	DR- THW	CK- CDB	DR- BES	CK- TRF-Aus.
REVISIONS	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
	6	(SEE TITLE SHEET)		FM 1378
	STATE	DISTRICT	COUNTY	SHEET NO.
	TEXAS	18	COLLIN	270
	CONTROL	SECTION	JOB	
	1392	01	044	

NOTES:


1. INSTALL 1/2" ALL THREAD NIPPLE WITH BONDING BUSHINGS ON BOTH ENDS AND 6 EA OF 1/2" X 1/2" 13 UNC MOUNTING BOLTS BETWEEN THE TWO CABINETS (SIGNAL AND BBU).
2. INSTALL 2" FITTING FOR EVP CABLES/WIRES AND 4 EA OF 1/2" X 1/2" 13 UNC MOUNTING BOLTS BETWEEN THE TWO CABINETS (SIGNAL AND EVP).
3. USE SILICON SEALANT TO SEAL BETWEEN THE CABINETS OF THE CONTROLLER, EVP AND BBU UNIT.
4. THE ABOVE WORK PERFORMED AND MATERIALS FURNISHED WILL NOT BE PAID FOR DIRECTLY, BUT WILL BE SUBSIDIARY TO PERTINENT ITEMS.

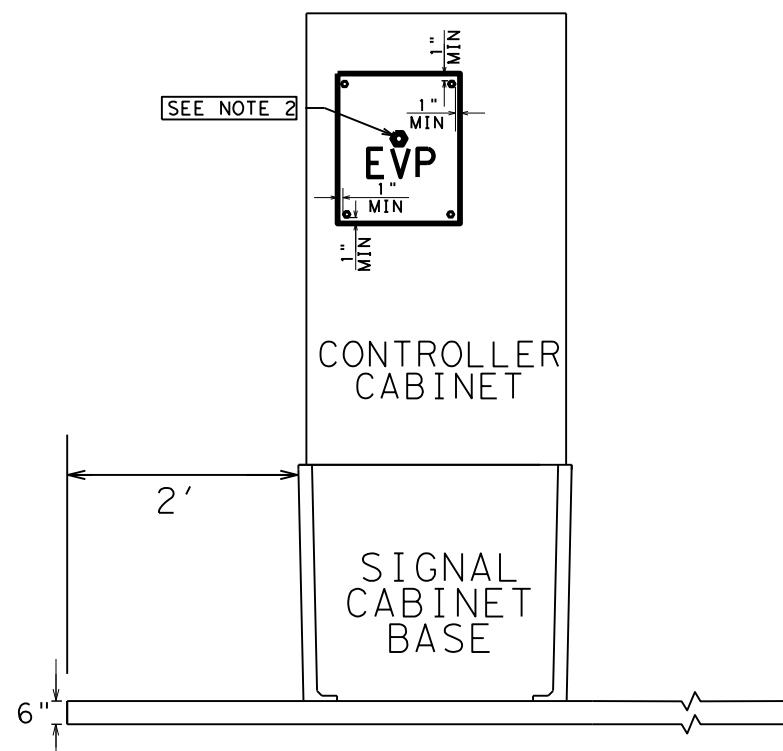

SIDE VIEW
(EVP)

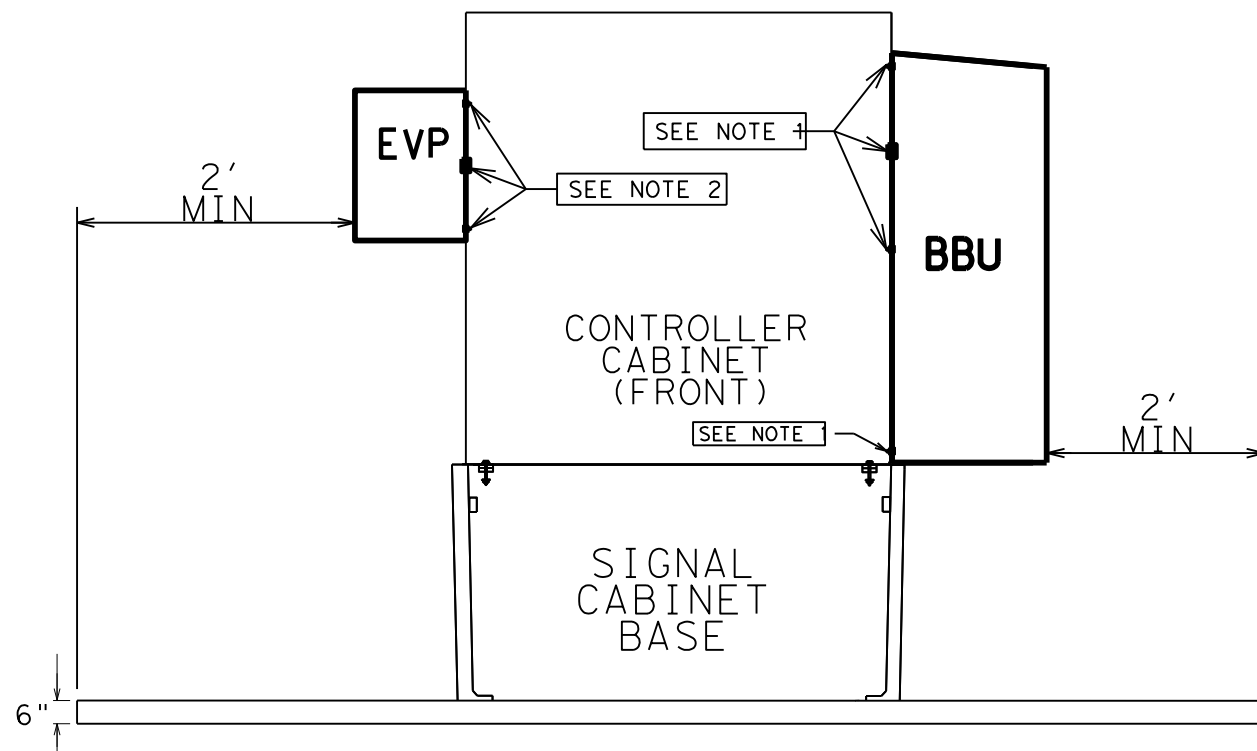

ELEVATION VIEW

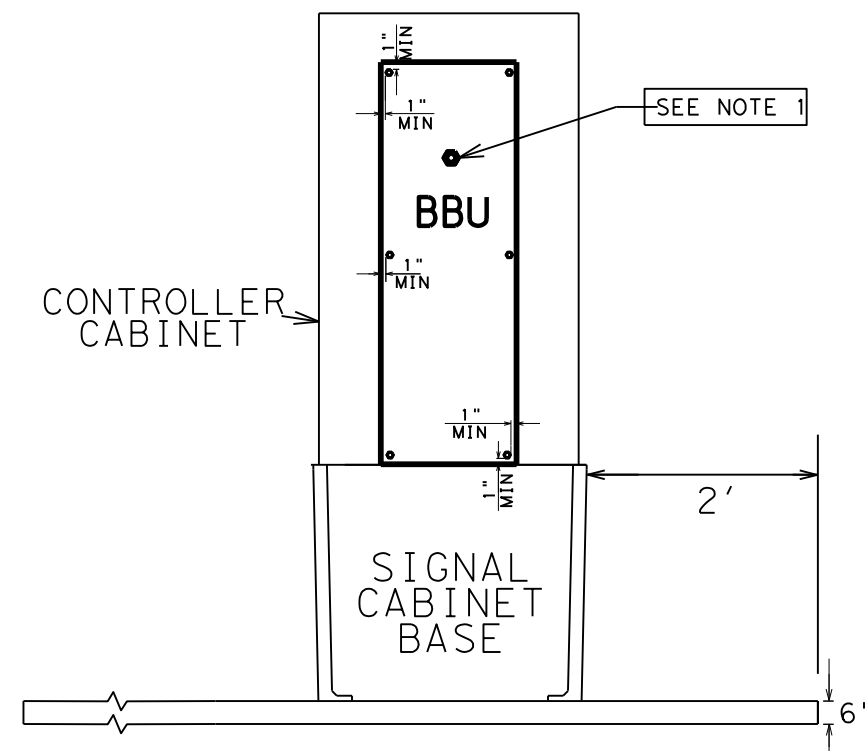


SIDE VIEW
(BBU)

REQUIRED CABLE/CONDUCTORS FOR EVP			
QUANTITY EACH	WIRE SIZE	COLOR	FUNCTION
1	#14	BLACK	120 VAC FOR EVP
1	#14	RED	120 VAC FOR FAN & CABINET LIGHT
1	#14	WHITE	AC NEUTRAL
1	#14	GREEN	CHASIS GROUND
1	#18	GRAY	LOGIC GROUND
4	#18	BLUE	PREEMPT COMMANDS
4	-	-	CABLE FROM DETECTOR UNIT

REQUIRED CONDUCTORS FOR BBU			
QUANTITY EACH	WIRE SIZE	COLOR	FUNCTION
1	-	BLACK	120 VAC FROM SERVICE
1	-	WHITE	AC NEUTRAL FROM SERVICE
1	#6	BLACK	120 VAC TO CONTROLLER
1	#6	WHITE	AC NEUTRAL TO CONTROLLER
1	#6	GREEN	GROUND

LEGEND:
EVP-EMERGENCY VEHICLE PREEMPTION CABINET.
BBU-BATTERY BACKUP UNIT.

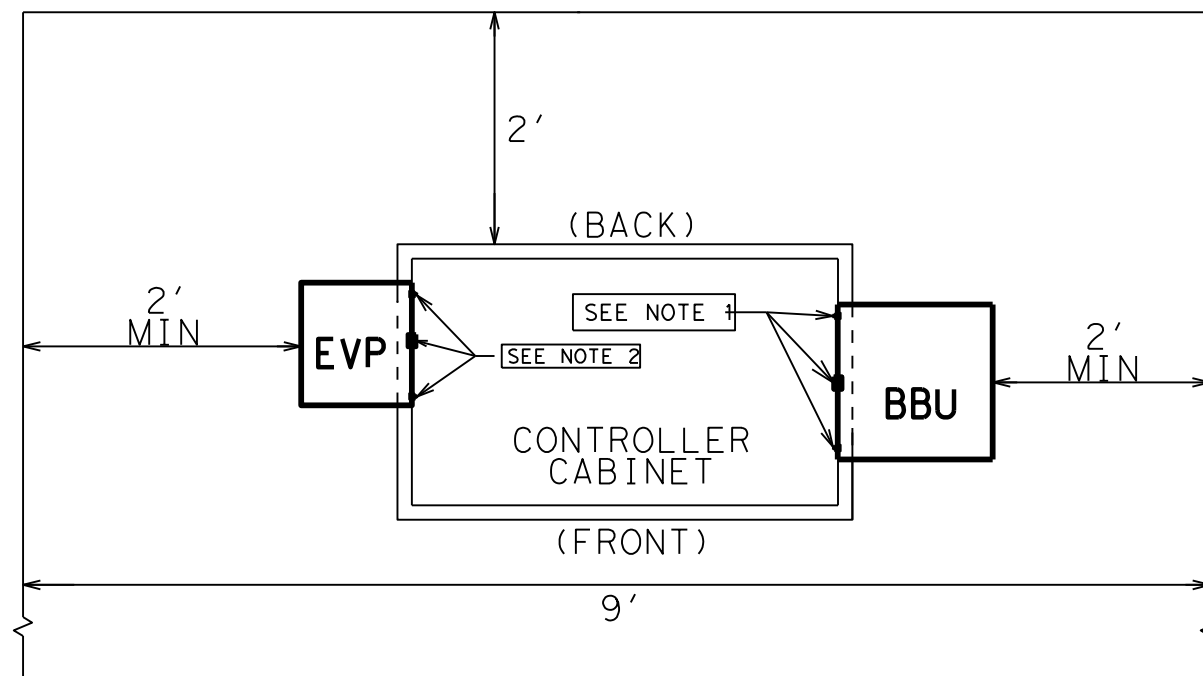

PLAN VIEW




INSTALLATION OF BBU/EVP
EXTERNAL SIDE MOUNT CABINET
INSTALLATION DETAILS
DALLAS DISTRICT STANDARD

N. T. S. SHEET 1 OF 3

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	(SEE TITLE SHEET)	FM 1378
STATE	DISTRICT	COUNTY
TEXAS	DAL	COLLIN
CONTROL	SECTION	JOB
1392	01	044

271

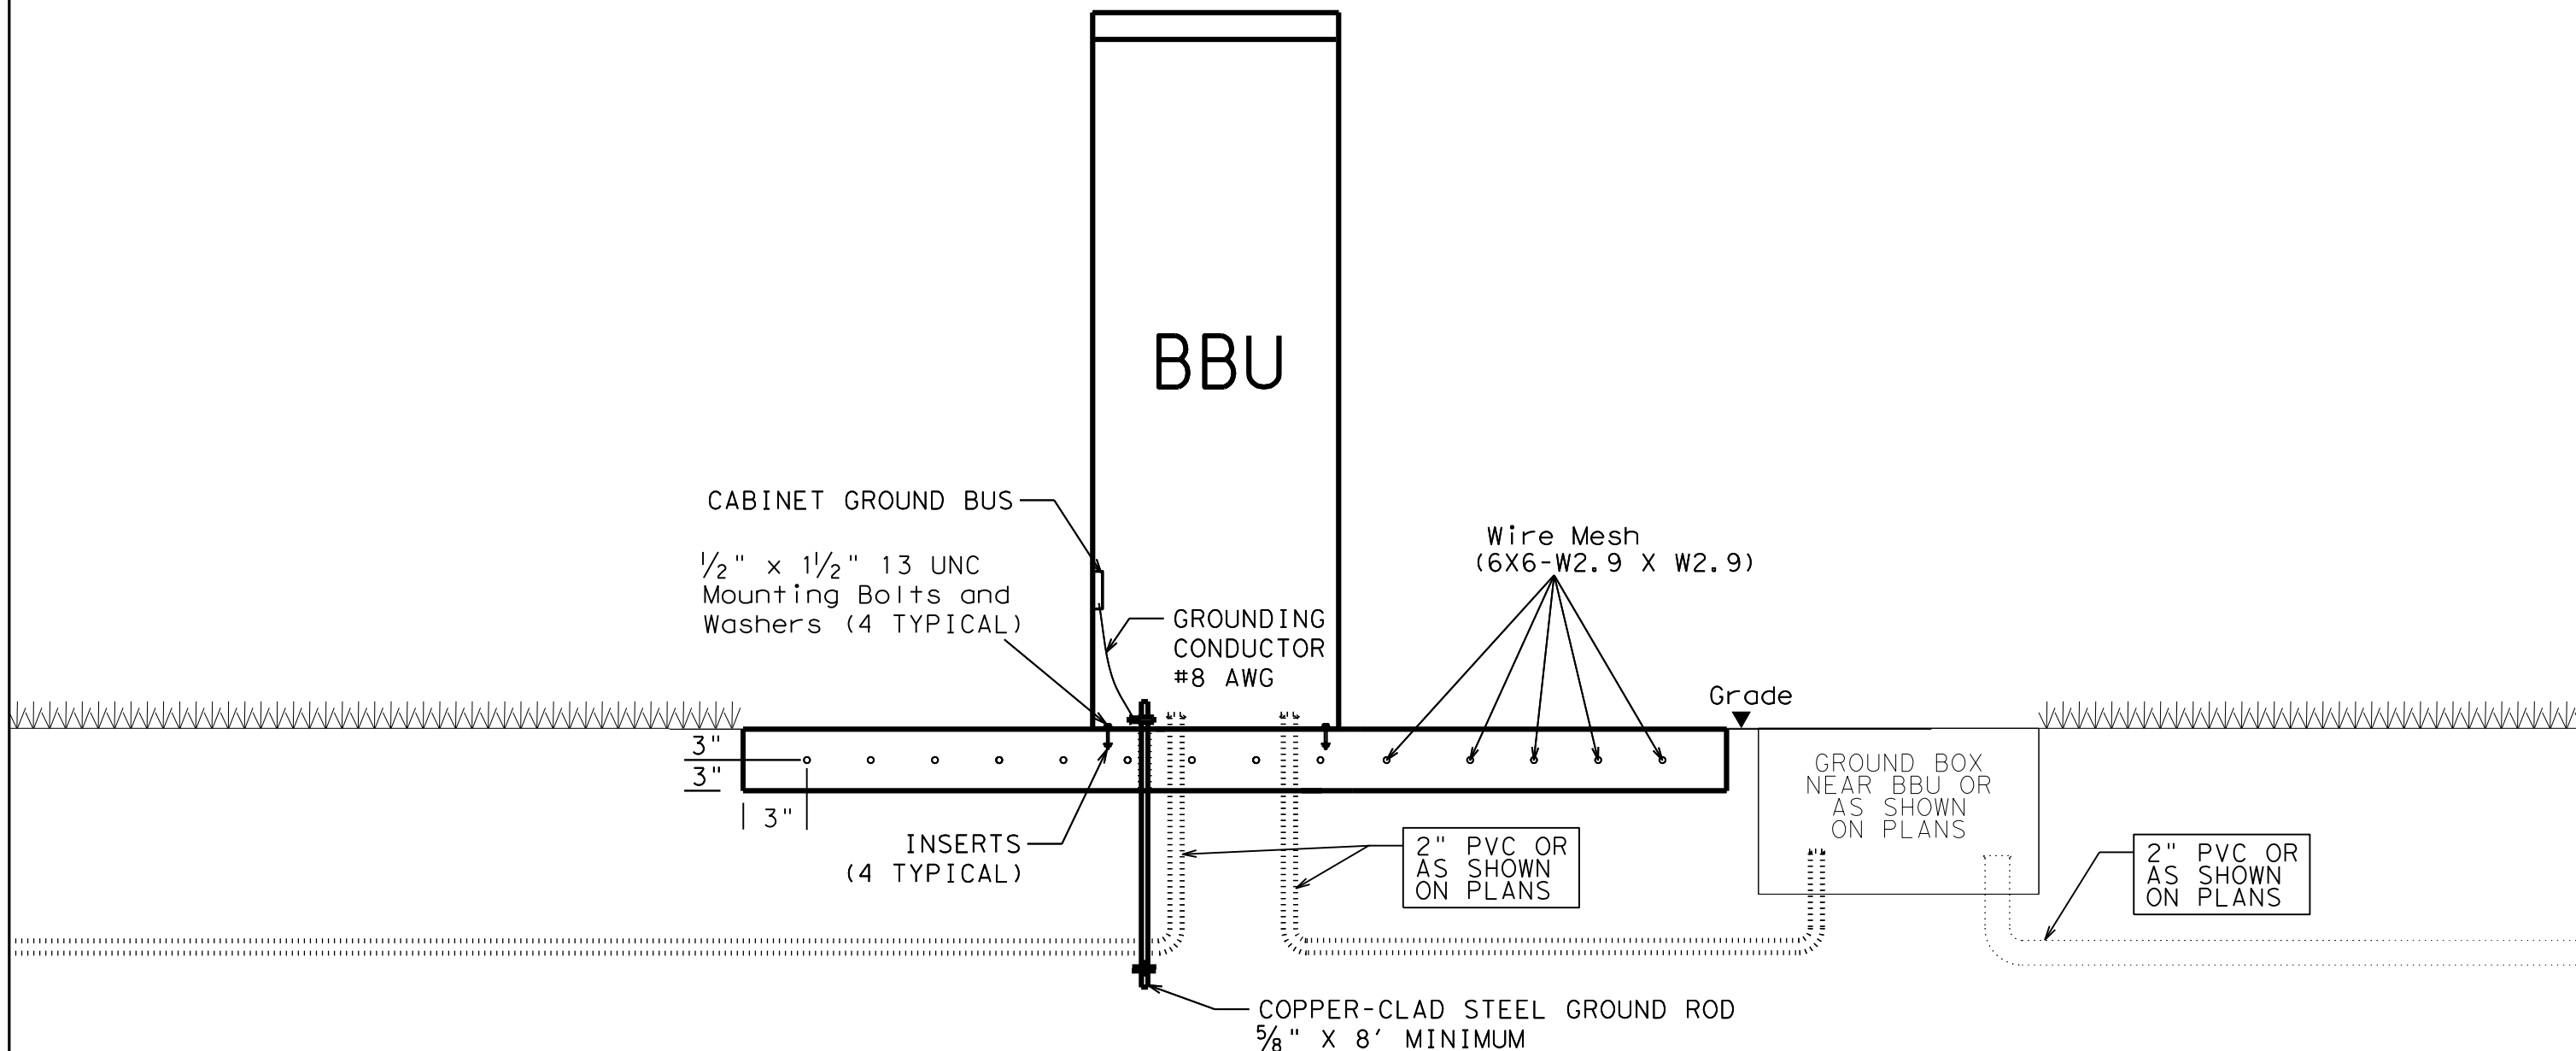

NOTES:


1. INSTALL A 5' X 5' CONCRETE PAD AT THE LOCATION DIRECTED BY THE ENGINEER. THE PAD MAY BE CAST-IN-PLACE OR PRE-CAST AS APPROVED BY THE ENGINEER.
2. PROVIDE WELDED WIRE MESH 6X6-W2.9 X W2.9 FOR REINFORCEMENT. PROVIDE JOINTS AND SPLICES IN THE MESH WITH A MINIMUM 6-INCH OVERLAP. PROVIDE A MINIMUM 3 INCH COVER BETWEEN WIRE MESH AND EDGE OF CONCRETE PAD.
3. PROVIDE CLASS B CONCRETE MINIMUM FOR THE CONCRETE PAD IN ACCORDANCE WITH ITEM 421. CONSTRUCT THE CONCRETE PAD IN ACCORDANCE WITH ITEM 531, EXCEPT FOR PAYMENT.
4. INSTALL THE BACK OF BBU CABINET 10" FROM THE EDGE OF CONCRETE PAD AND CENTER THE CABINET ON THE PAD FROM SIDE TO SIDE.
5. SUPPLY FOUR 1/2" X 1/2" 13 UNC STAINLESS STEEL INSERTS FOR ATTACHMENT OF THE BBU CABINET TO THE CONCRETE PAD. INSERTS MUST WITHSTAND A MINIMUM TORQUE OF 50 FT-LB AND A MINIMUM STRAIGHT PULL OUT STRENGTH OF 750 LBS.
6. BOND A #8 AWG COPPER GROUND WIRE AND AN 8 FT GROUND ROD TO THE REINFORCING MESH WITH A SUITABLE UL LISTED CLAMP, AND TERMINATE THE GROUND WIRE TO THE CABINET GROUNDING BUS.
7. INSTALL A PVC SLEEVE TO PREVENT THE GROUND ROD FROM DIRECT EMBEDMENT IN THE CONCRETE PAD.
8. THE ABOVE WORK PERFORMED AND MATERIALS FURNISHED WILL NOT BE PAID FOR DIRECTLY, BUT WILL BE SUBSIDIARY TO PERTINENT ITEMS.




**INSTALLATION OF BBU/EVP
STAND ALONE BBU CABINET (GROUND MOUNT)
DALLAS DISTRICT STANDARD**

N. T. S.			SHEET 2 OF 3
FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. (SEE TITLE SHEET)	HIGHWAY NO. FM 1378	
STATE TEXAS	DISTRICT 18	COUNTY COLLIN	SHEET NO. 272
CONTROL 1392	SECTION 01	JOB 044	


SCENARIO A: GROUND MOUNTED CONTROLLER CABINET WITH CABINET MOUNTED BBU

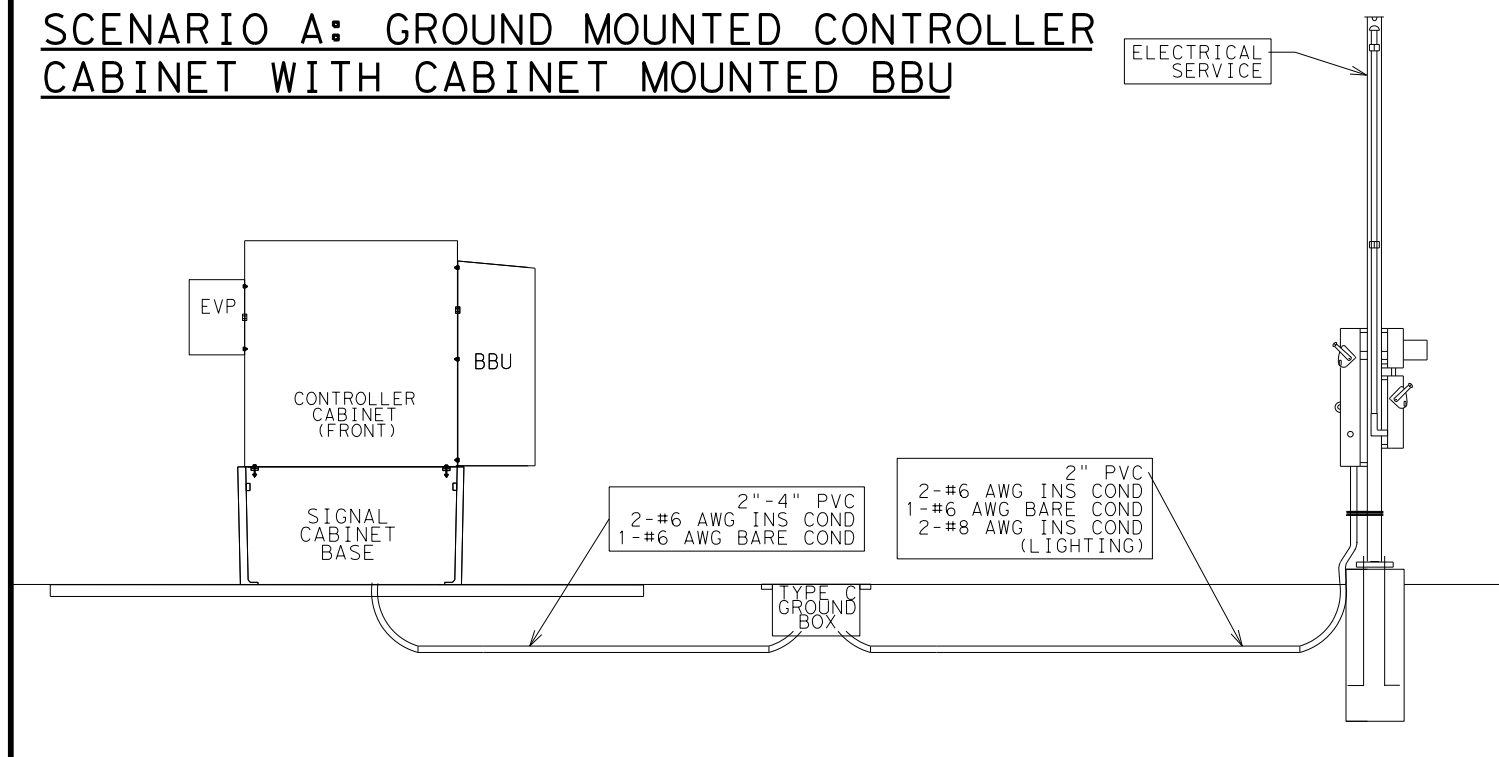


SCENARIO C: STAND-ALONE BBU FOR POLE MOUNTED CONTROLLER CABINET

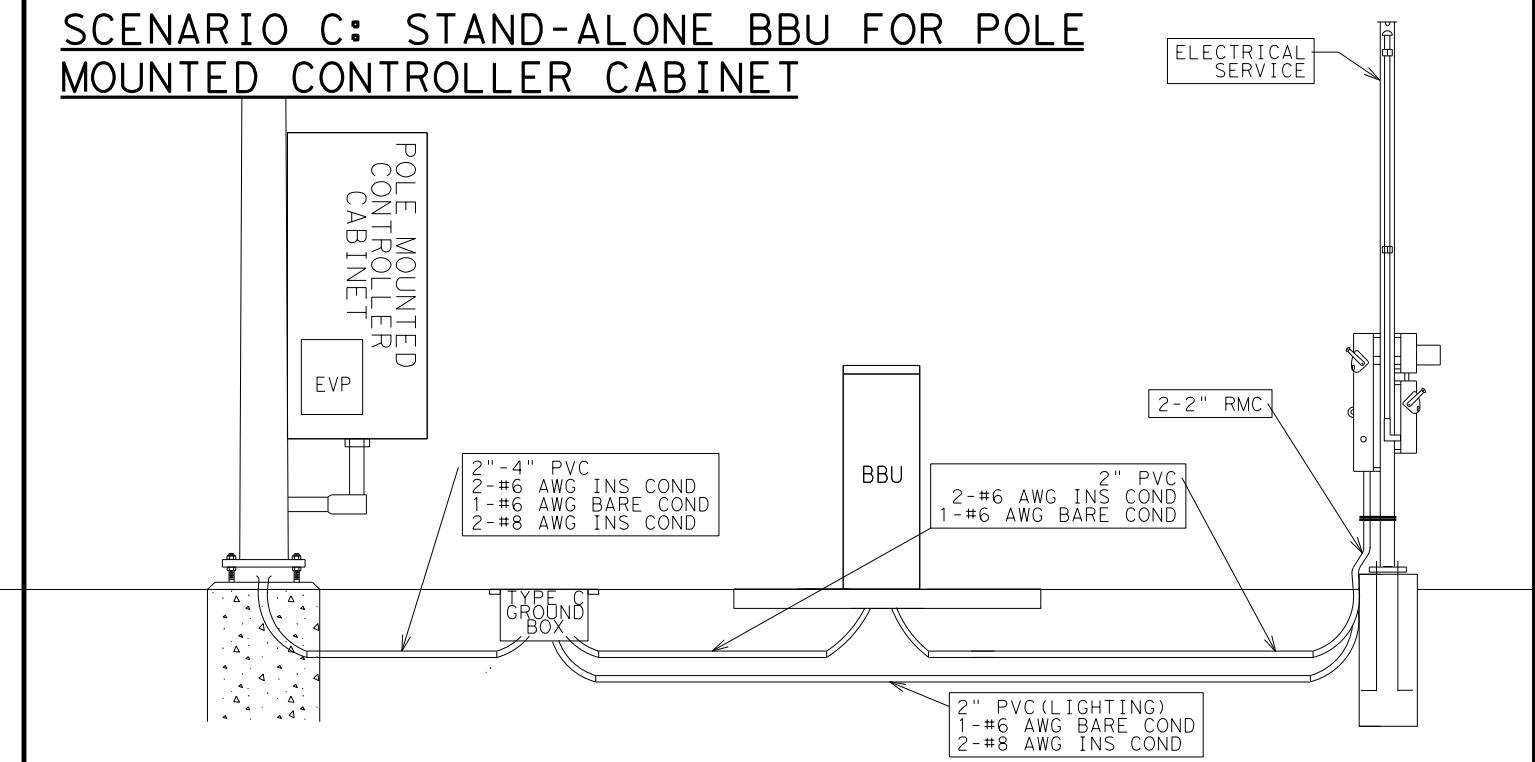

SCENARIO B: STAND-ALONE BBU FOR GROUND MOUNTED CONTROLLER CABINET

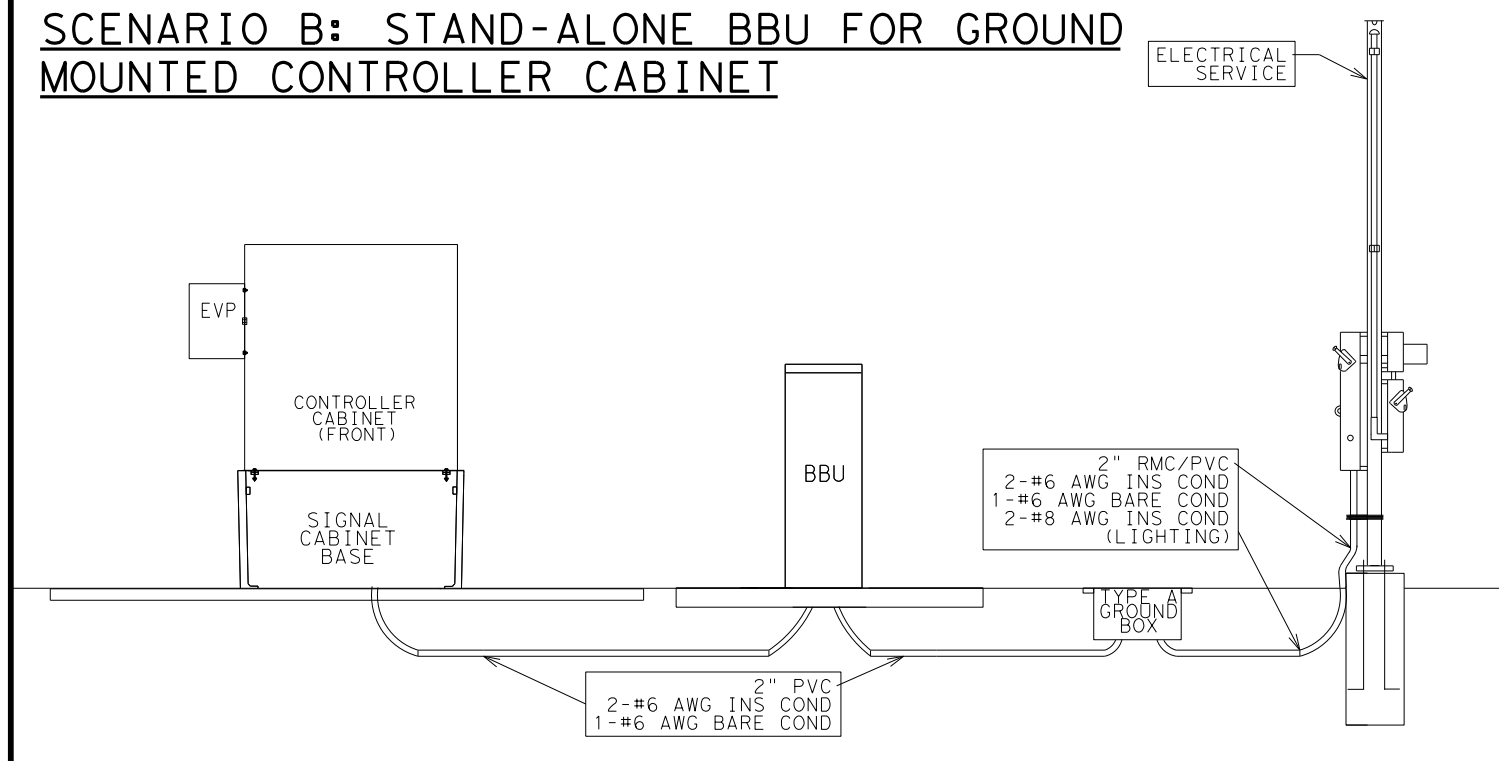

SCENARIO D: POLE MOUNTED CONTROLLER CABINET WITH CABINET MOUNTED BBU

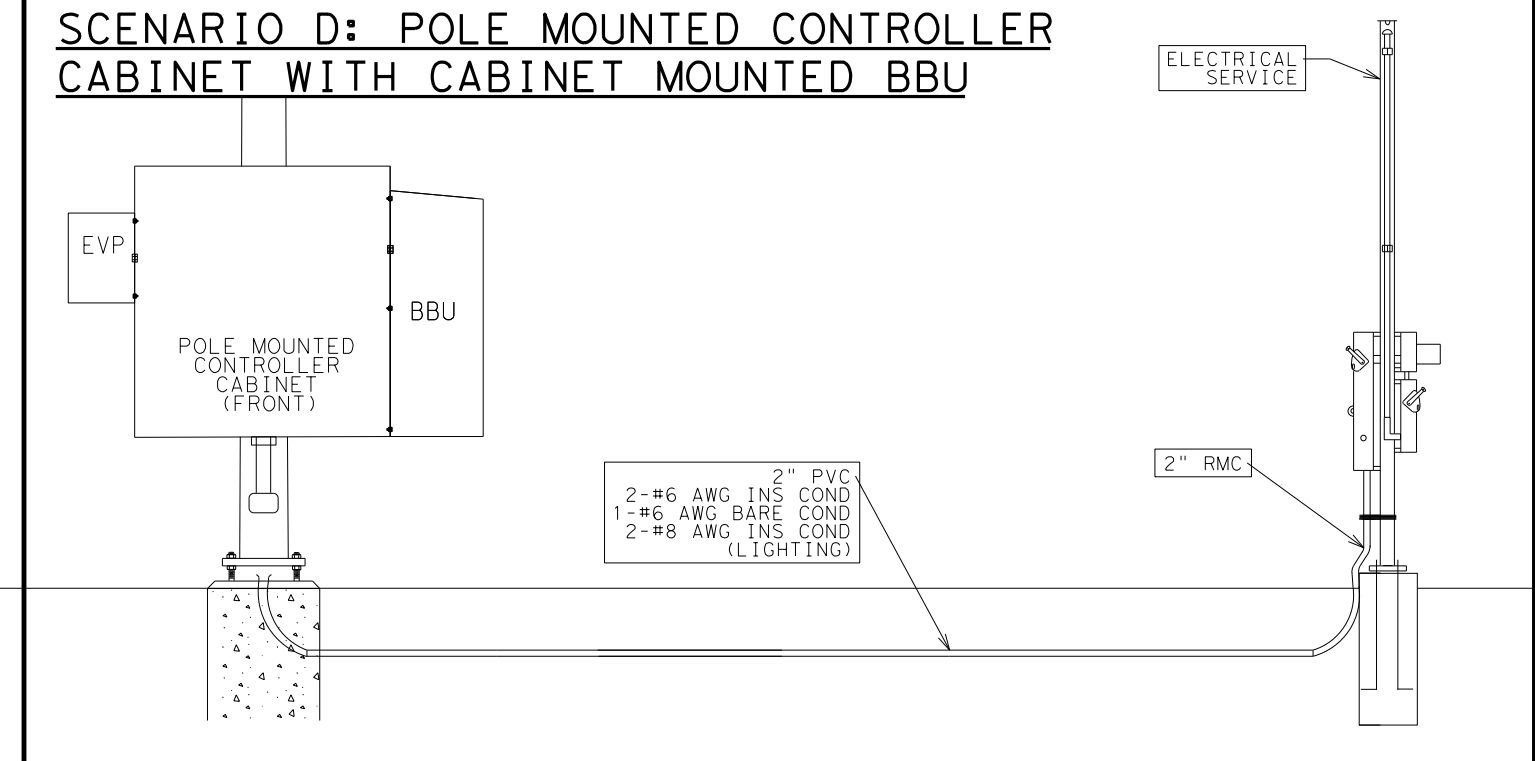


NOTE:


ABOVE SCENARIOS ARE TYPICAL BBU/EVP INSTALLATIONS USED IN THE DALLAS DISTRICT. SEE TRAFFIC SIGNAL DESIGN PLANS FOR GROUND BOX, CONDUIT AND CONDUCTOR QUANTITIES AND SIZES SPECIFIC TO EACH INTERSECTION.

**INSTALLATION OF BBU/EVP
INSTALLATION SCENARIOS
DALLAS DISTRICT STANDARD**


N. T. S.		SHEET 3 OF 3	
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.	
6	(SEE TITLE SHEET)	FM 1378	
STATE	DISTRICT	COUNTY	SHEET NO.
TEXAS	18	COLLIN	273
CONTROL	SECTION	JOB	
1392	01	044	

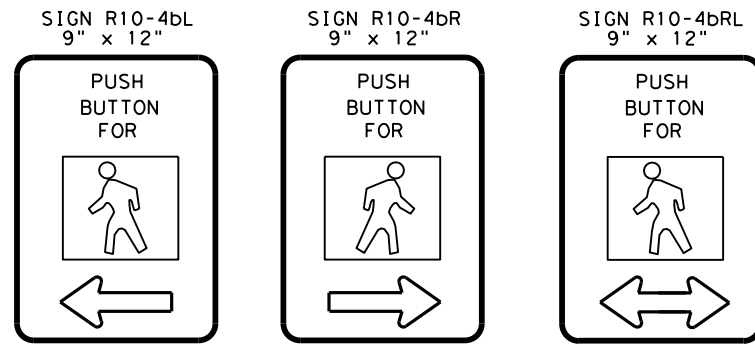


PEDESTRIAN PUSHBUTTON SIGN DETAILS

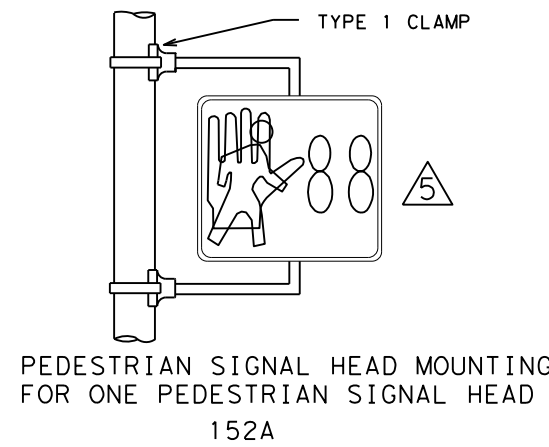


PEDESTRIAN SIGNAL HEAD MOUNTING FOR ONE PEDESTRIAN SIGNAL HEAD 152A

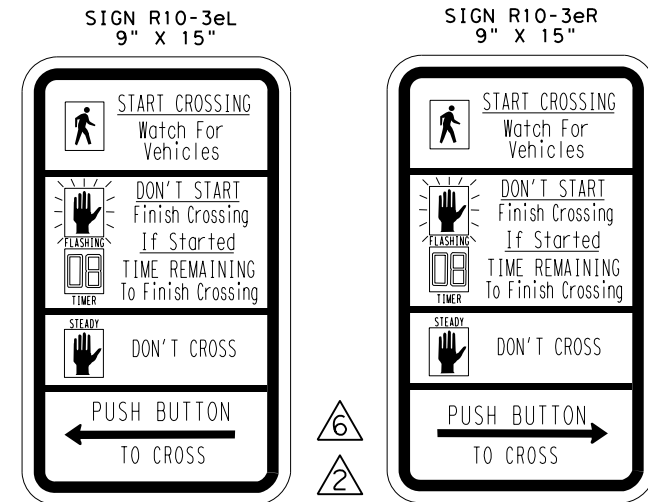


COUNTDOWN PEDESTRIAN PUSHBUTTON SIGN DETAILS

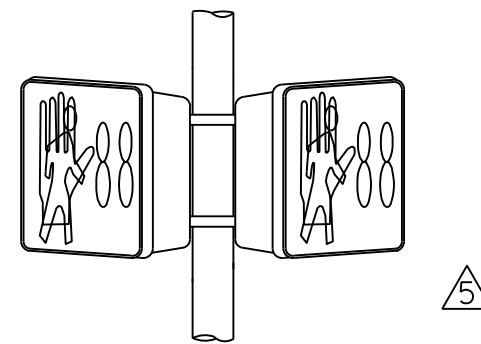


PEDESTRIAN SIGNAL HEAD MOUNTING FOR TWO PEDESTRIAN SIGNAL HEADS 143C

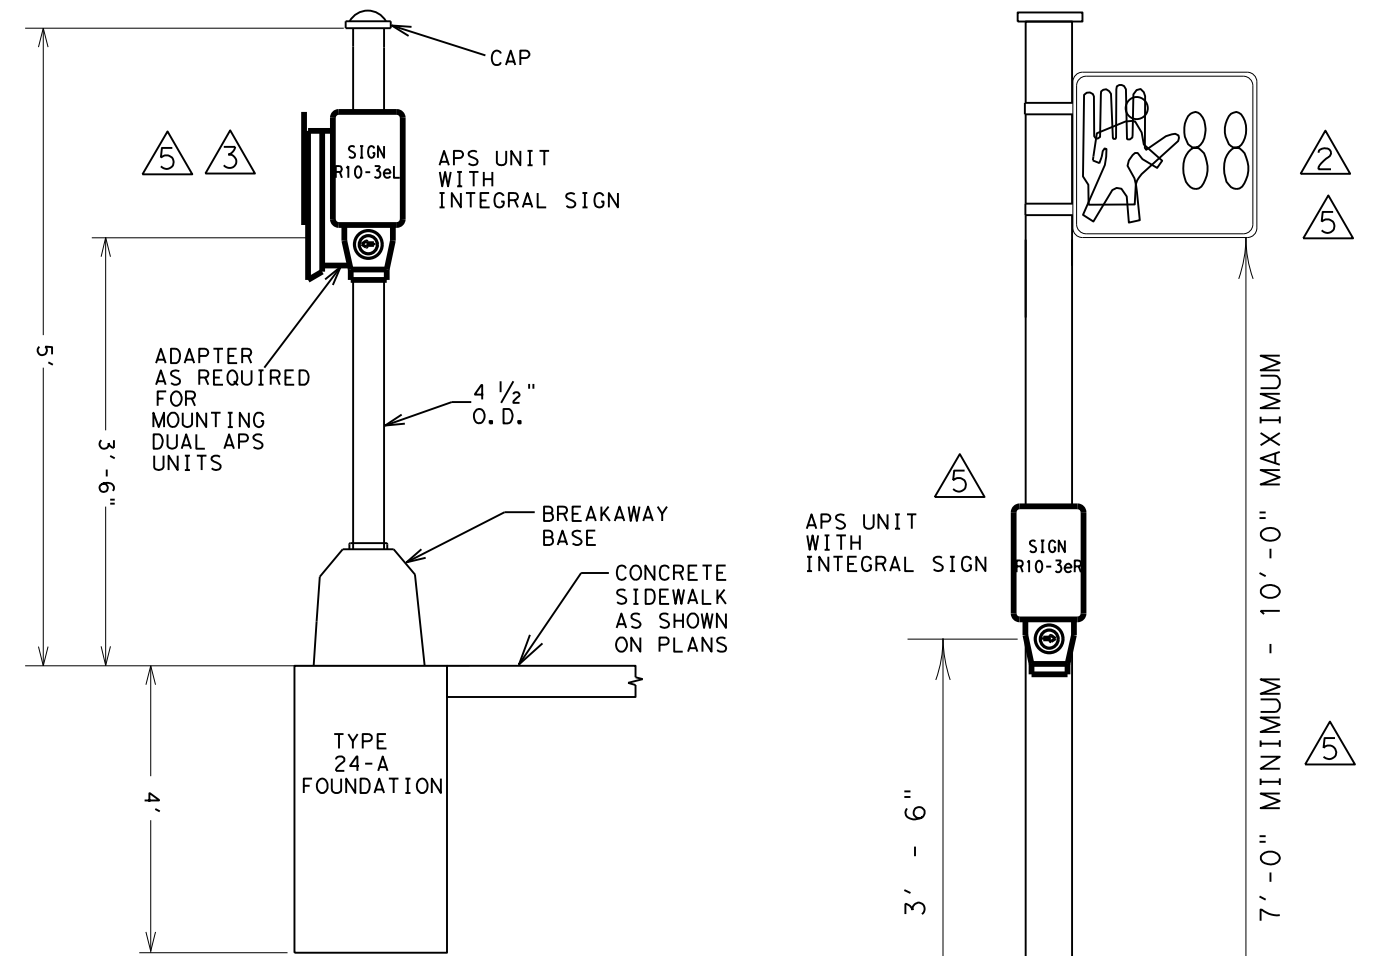

PEDESTRIAN PUSH BUTTON POLE

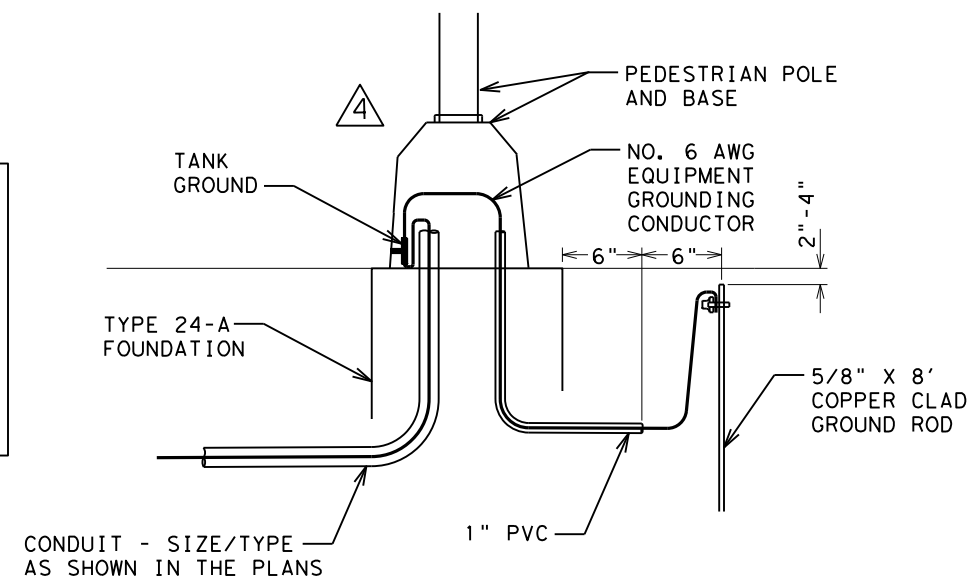

PEDESTRIAN PUSH BUTTON POLE GROUNDING DETAILS

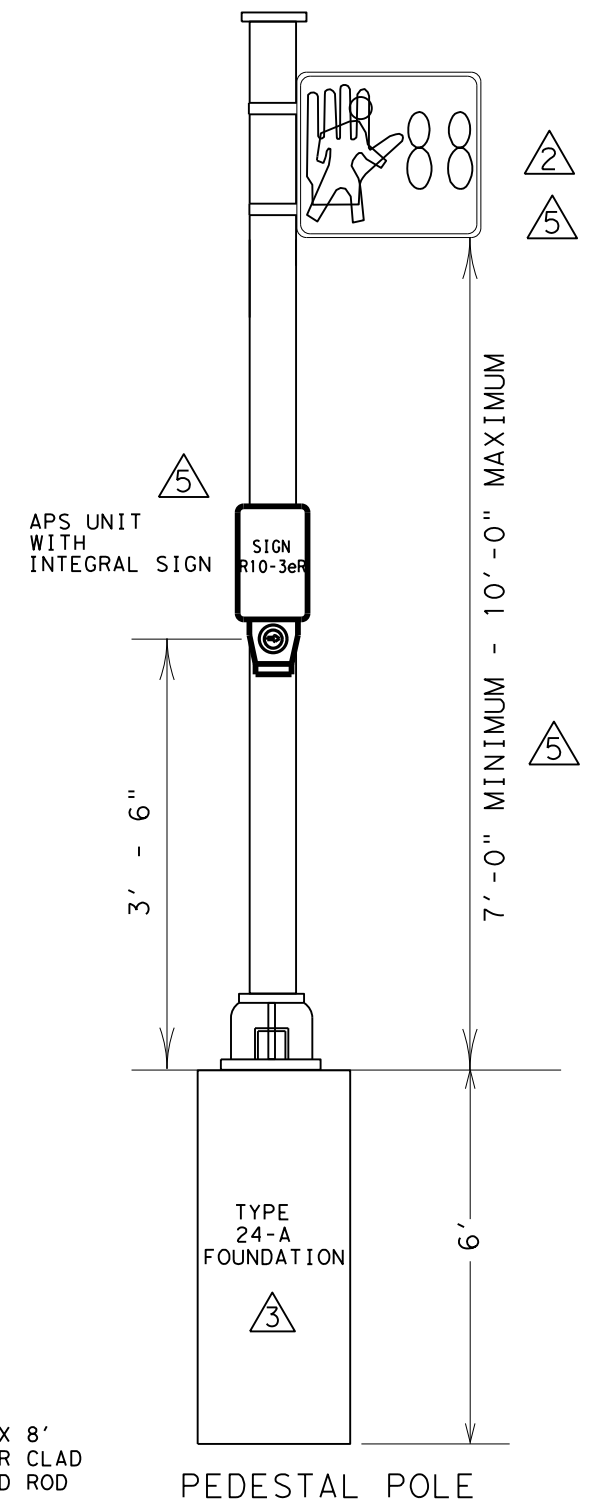


PEDESTAL POLE

NOTE: EITHER TYPE 1 CLAMPS OR CLAM SHELL MOUNTING HARDWARE MAY BE USED AS APPROVED BY THE ENGINEER. FOR CLAM SHELLS, USE ICC P/N 4805 OR McCAIN QUICKMOUNT OR APPROVED EQUAL.

- 1 ALTERNATIVE MOUNTING METHOD revised 12-92
- 2 ALTERNATIVE PEDESTRIAN SIGNAL HEAD AND SIGNING revised 10-08
- 3 PEDESTRIAN PUSH BUTTON POLE revised 01-11
- 4 PEDESTRIAN PUSH BUTTON POLE GROUNDING DETAILS revised 09-15
- 5 APS UNIT ADDED "SYMBOLS ONLY" PEDESTRIAN SIGNAL HEAD REMOVED MOUNTING HARDWARE NOTES REVISED MOUNTING HEIGHT REVISED revised 06-17
- 6 APS SIGN REVISED revised 11-20

- NOTES:
- 1. ALL PEDESTRIAN SIGNAL HEADS SHALL BE INSTALLED ON THE AWAY-FROM-TRAFFIC SIDE OF THE PEDESTAL OR MAST ARM POLE.
 - 2. ALL WIRING FOR PEDESTRIAN SIGNALS SHALL BE TOTALLY ENCLOSED WITHIN THE SIGNAL MOUNTING HARDWARE.
 - 3. ALL PEDESTRIAN SIGNAL HEADS AND PUSH BUTTON SIGNS SHALL DISPLAY THE SYMBOLIZED MESSAGES SHOWN ABOVE.




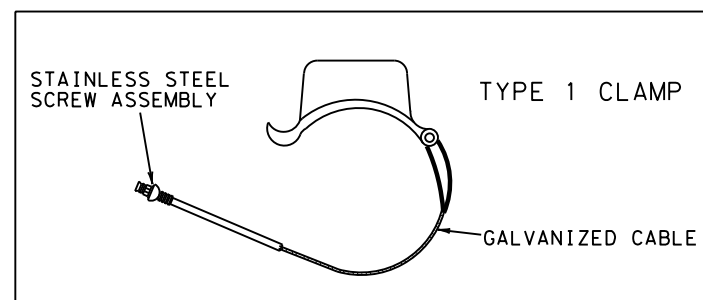


NOTE: THE POLES ON THIS DRAWING ARE SHOWN AS AN EXAMPLE ONLY. POLES OF SIMILAR DESIGN FOR ANY CROSS SECTION WHICH MEET THE SPECIFICATIONS AND REQUIREMENTS SHOWN ON THESE DRAWINGS AND ARE APPROVED BY THE ENGINEER WILL BE DEEMED ACCEPTABLE.





PEDESTRIAN SIGNAL HEAD DETAILS (DAL)

© TXDOT 2020
DALLAS DISTRICT STANDARD

FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
6	(SEE TITLE SHEET)	274
STATE	STATE DIST.	COUNTY
TEXAS	18	COLLIN
CONT.	SECT.	JOB HIGHWAY NO.
1392	01	044 FM 1378

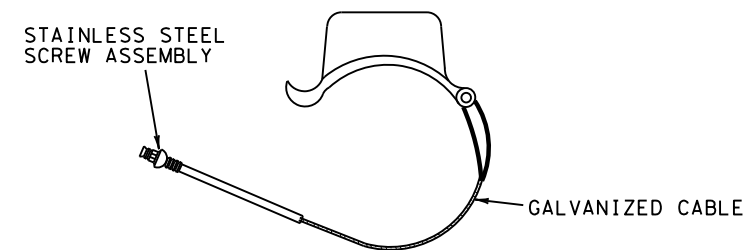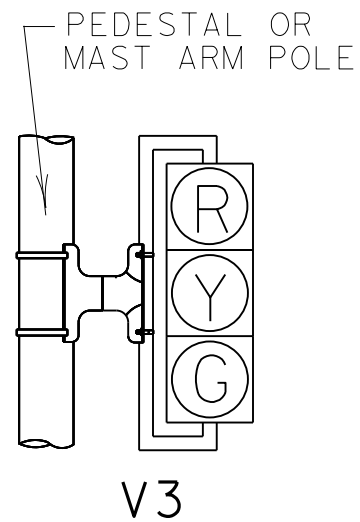
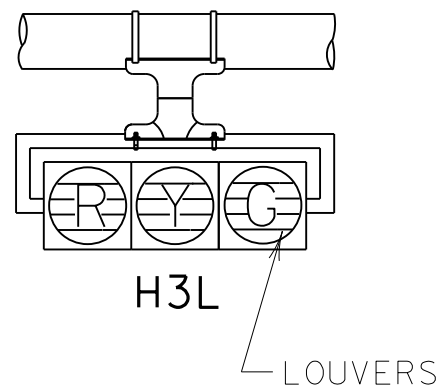
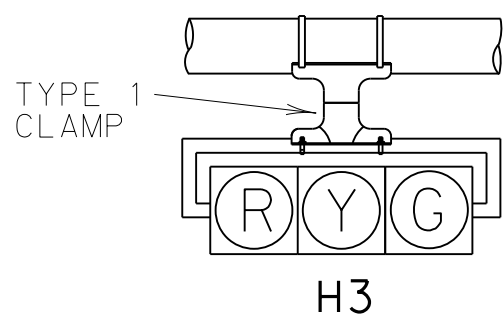


TYPE 1 AND 2 CLAMPS

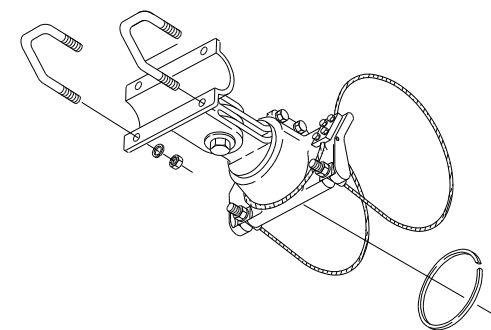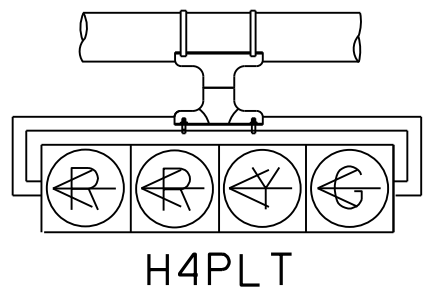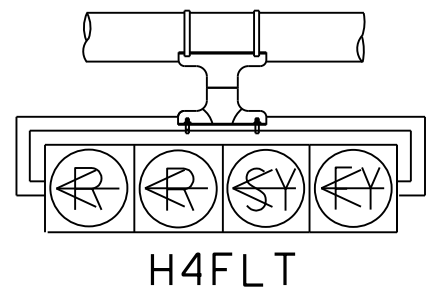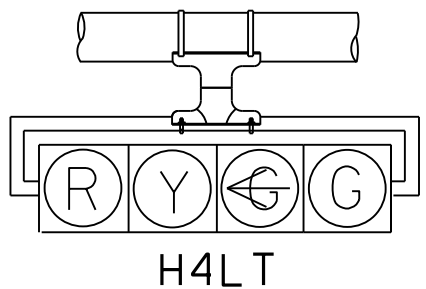

TYPE 2 CLAMP KIT

SHALL BE INSTALLED WHEN ROTATION ABOUT THE HORIZONTAL AND VERTICAL AXES ARE NEEDED.

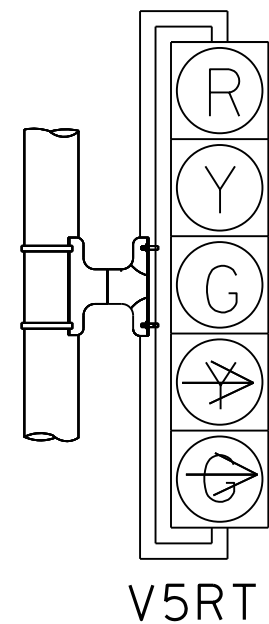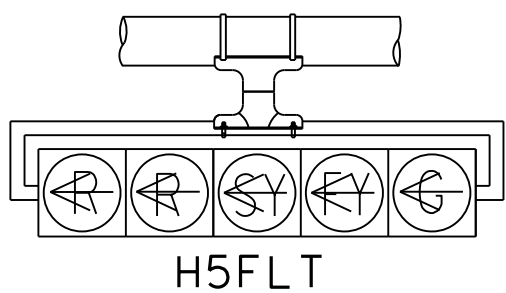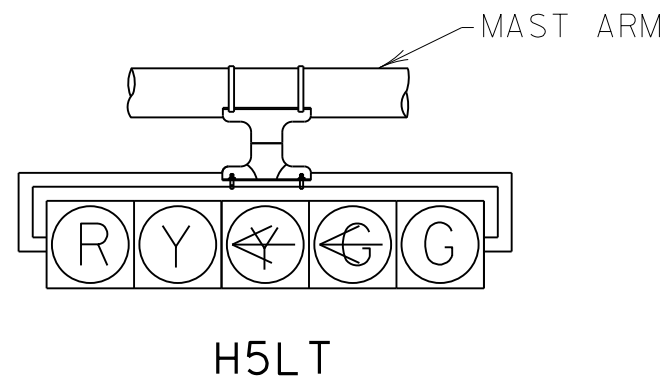


NOTES:

1. VEHICLE SIGNAL HEADS SHALL BE MOUNTED WITH TYPE 1 CLAMP AND APPROPRIATE TUBING.
2. ALL POLE MOUNTED VEHICLE HEADS SHALL BE INSTALLED ON THE AWAY-FROM-TRAFFIC SIDE OF THE PEDESTAL OR MAST ARM POLE.
3. THE SIGNAL HEADS SHOWN ARE NOT MEANT TO REFLECT ALL POSSIBLE SIGNAL HEADS, BUT ARE REPRESENTATIVE OF SIGNAL HEADS COMMONLY IN USE. SEE THE TRAFFIC SIGNAL LAYOUT FOR REQUIRED SIGNAL HEADS, AND THE NUMBER AND ORIENTATION OF LOUVERS.

TRAFFIC SIGNAL HEAD DETAILS (DAL)

© TXDOT 2018
DALLAS DISTRICT STANDARD


FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
6	(SEE TITLE SHEET)	275
STATE	STATE DIST.	COUNTY
TEXAS	DALLAS	COLLIN
CONT.	SECT.	JOB HIGHWAY NO.
1392	01	044 FM 1378



COMPRESSION FITTING

SOURCES:
RELIABLE ELECTRIC NO. 5264
FARGO NO. OR EQUAL

MINIMUM 1" SEPARATION FROM
SIGNAL HEAD MOUNTING BRACKET

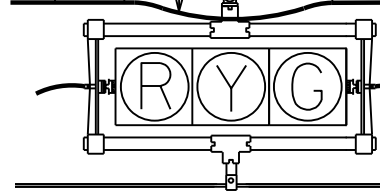


1/4" STRANDED STEEL CABLE

1/2" BLACK PLASTIC CABLE STRAPS OR
MESSENGER RINGS AT 12" CTRS.





THIMBLEYE BOLT (Angle Type)

SOURCES:
HUBBELL POWER SYS. NO. 5016
MCLEAN POWER SYS. NO. J8154
OR EQUAL



EYE NUTS (Twineye & tripeye)

SOURCES:
HUBBELL POWER SYS. NO. 6560 (TWIN), 6510 (SINGLE)
MCLEAN POWER SYS. NO. J6515 (TWIN), J6510 (SINGLE)
OR EQUAL




8-WAY ANCHOR

SOURCES:
HUBBELL POWER SYS. NO. 1283
MCLEAN POWER SYS. NO. J0283
OR EQUAL

LIFT PLATE

SOURCES:
HUBBELL POWER SYS. NO. 7898
MCLEAN POWER SYS. NO. J7890
OR EQUAL




GUY CLAMP (3-Bolt)


6" HEAVY GUY CLAMP WITH 3-5/8"
BOLTS OR RELIABLE ELECTRIC
STRANDVISE WITH FLEXIBLE BAIL
(NO. 5264), FARGO STRANDVISE,
HUBBELL POWER SYS. NO. 6460,
OR EQUAL

PENTACHLOROPHENOL TREATED
40' SOUTHERN YELLOW PINE POLE
(CLASS 2)

HOLE DIA = POLE DIA
AT BOTTOM + 18"

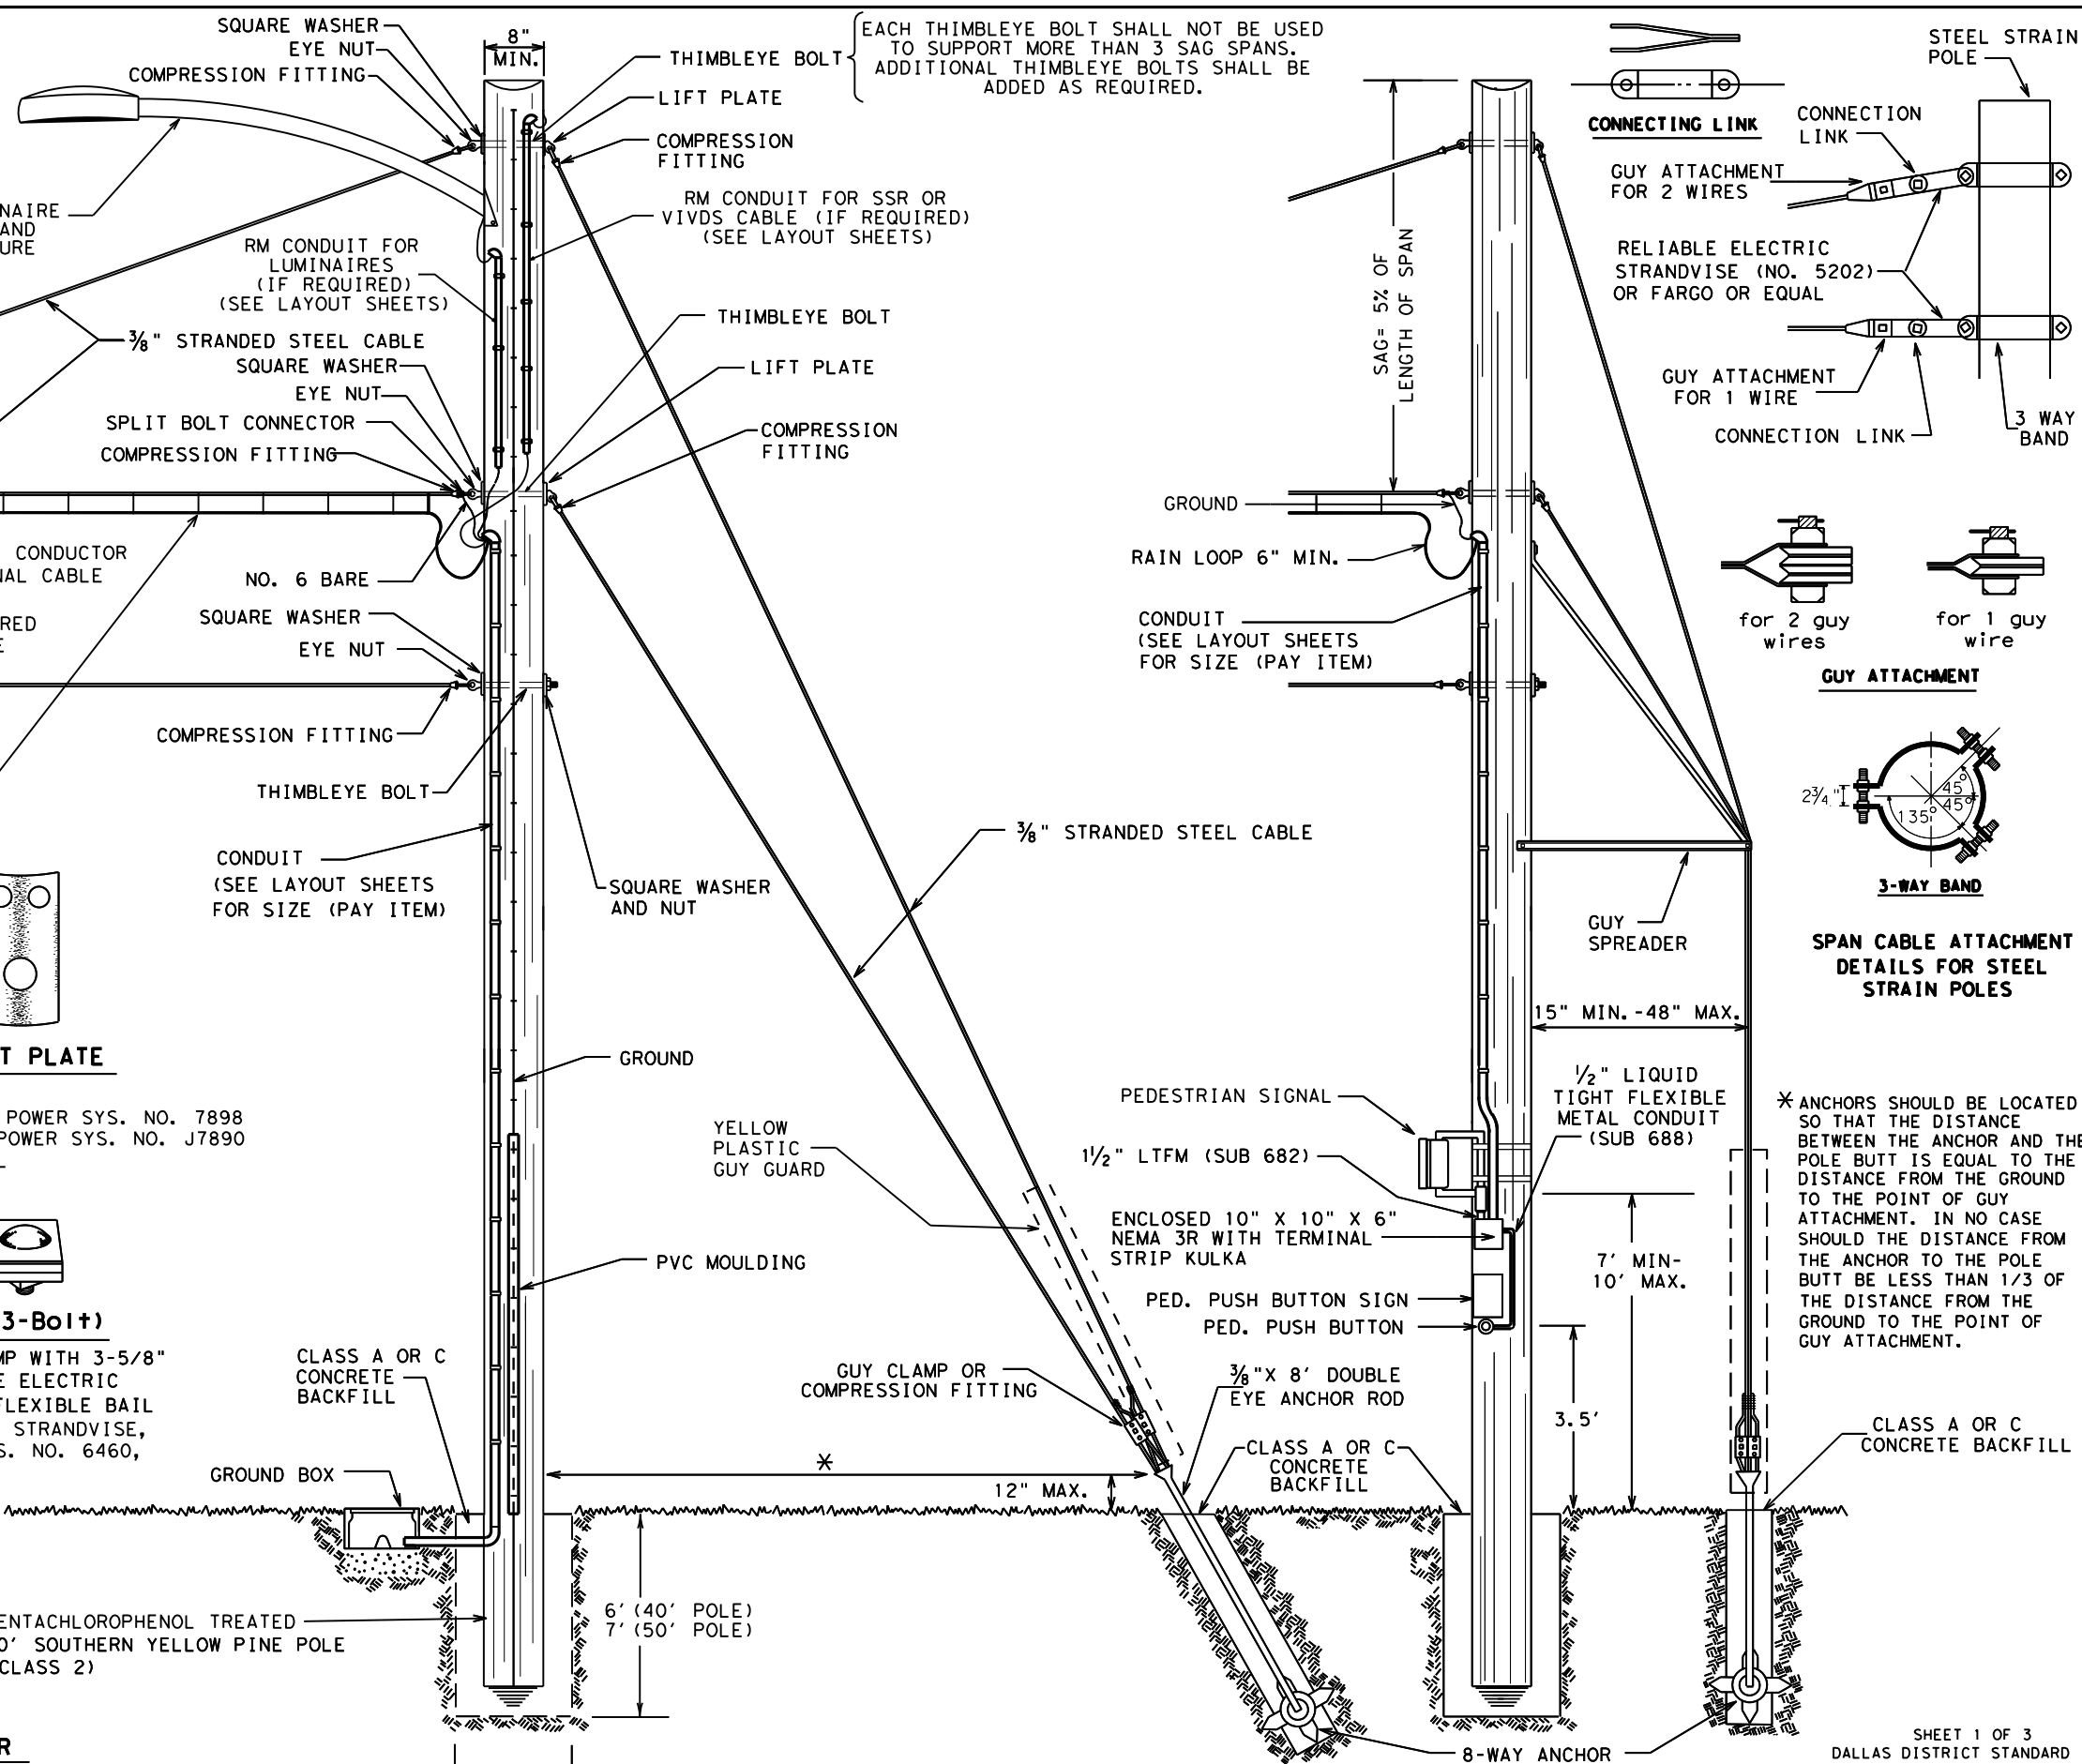

EACH THIMBLEYE BOLT SHALL NOT BE USED
TO SUPPORT MORE THAN 3 SAG SPANS.
ADDITIONAL THIMBLEYE BOLTS SHALL BE
ADDED AS REQUIRED.

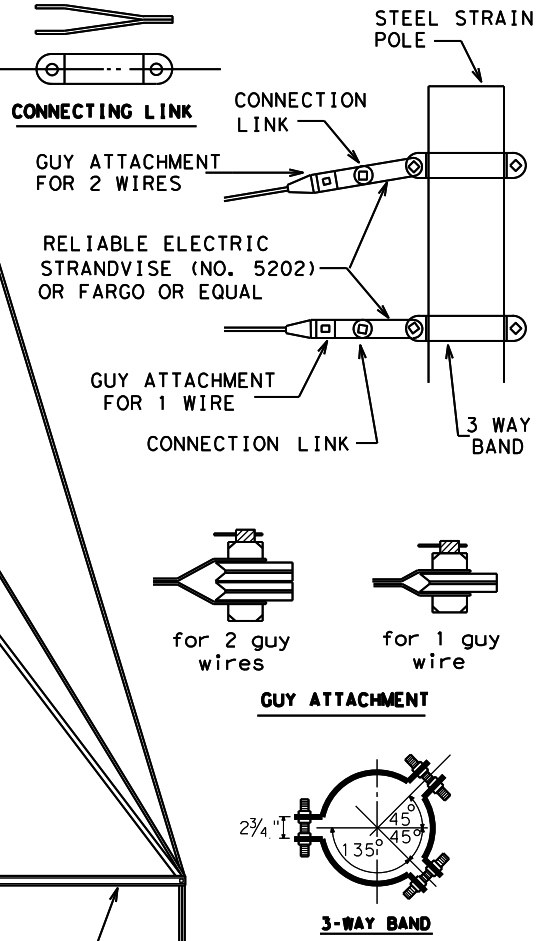

SPAN CABLE ATTACHMENT DETAILS FOR STEEL STRAIN POLES


* ANCHORS SHOULD BE LOCATED
SO THAT THE DISTANCE
BETWEEN THE ANCHOR AND THE
POLE BUTT IS EQUAL TO THE
DISTANCE FROM THE GROUND
TO THE POINT OF GUY
ATTACHMENT. IN NO CASE
SHOULD THE DISTANCE FROM
THE ANCHOR TO THE POLE
BUTT BE LESS THAN 1/3 OF
THE DISTANCE FROM THE
GROUND TO THE POINT OF
GUY ATTACHMENT.

CONSTRUCTION DETAILS FOR SPAN WIRE MOUNTED TRAFFIC SIGNALS


SHEET 1 OF 3
DALLAS DISTRICT STANDARD

FED. RD. DIST. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
6	(SEE TITLE SHEET)	276
STATE	DIST. NO.	COUNTY
TEXAS	DAL	COLLIN
CONT.	SECT.	JOB
1392	01	044
		HIGHWAY NO.
		FM 1378


**BOTTOM TETHERED, SPAN WIRE
SIGNAL HEAD HARDWARE
ASSEMBLY (BACKPLATE NOT SHOWN)**

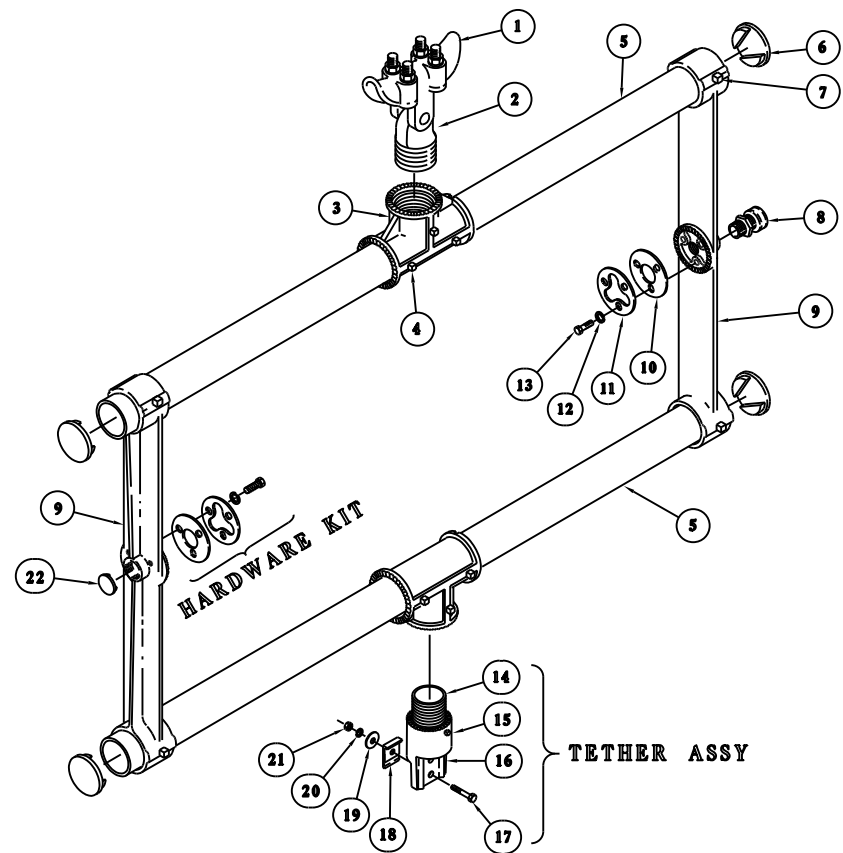

ITEM	DESCRIPTION	QTY
1	SPAN WIRE CLAMP, IRON, W/ U-BOLTS	1
2	SPAN WIRE ADAPTER, ALUM W/ STAINLESS BUSHING	1
3	TEE HORIZONTAL SLIP, DIE CAST ALUM	2
4	SCREW, SET SQ HD, 1/4"-20 X 1/2", STAINLESS	6
5	TUBE, 1/2" X LENGTH, ALUM	2
6	TUBE CAP, 1/2", PLASTIC	4
7	SCREW, SET SQ HD, 5/16"-18 X 5/8", STAINLESS	8
8	CGB, 3/4" .55-.65, ZINC 1	1
9	CAST ARM, FOR HORIZONTAL MOUNTED SIGNAL, ALUM	2
10	GASKET, TRI-BOLT, 1/16" X 70 DURO NEOPRENE	2
11	WASHER, SLOTTED, ZINC 2	2
12	WASHER, LOCK SPLIT, 1/4", STAINLESS	6
13	BOLT, HEX HD, 1/4"-20 X 1/2", GRADE 5, STAINLESS	6
14	NIPPLE, ALLTHREAD, 1/2" NPS X 2.13", ALUM	1
15	SCREW, SET SQ HD, 1/4"-20 X 5/8", STAINLESS	1
16	BODY, 1/2", HANGER, ALUM	1
17	BOLT, HEX HD, 5/16"-18 X 1 1/2", STAINLESS	1
18	PLATE, TETHER, 1-HOLE, ALUM	1
19	WASHER, FENDER, 5/16", STAINLESS	1
20	WASHER, SPLIT LOCK, 5/16", STAINLESS	1
21	NUT, HEX HD, 5/16"-18, STAINLESS	1
22	CAP, EN-3/4, BLUE (FOR CGB)	1

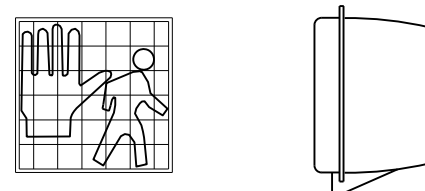


"EGGCRATE" VISOR PEDESTRIAN SIGNAL
WITH ONE-PIECE REFLECTOR

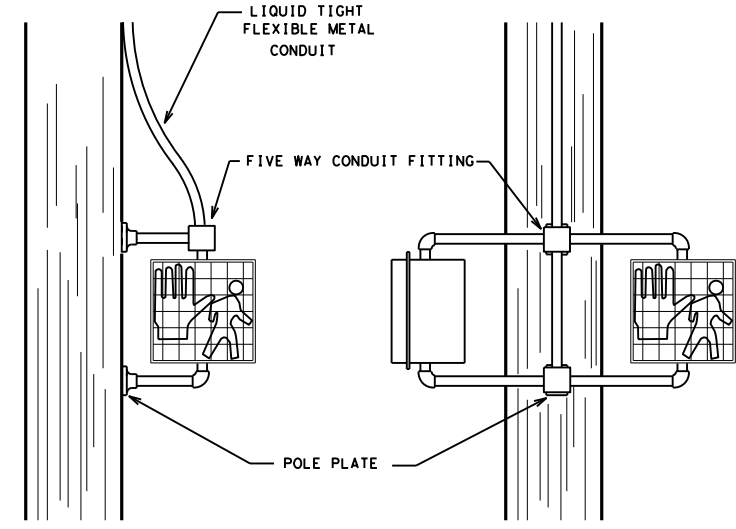


152A
ONE-WAY
ADJUSTABLE FACE SIGNAL FOR
WOOD POLE MOUNTING

143C
TWO-WAY
ADJUSTABLE FACE SIGNAL FOR
WOOD POLE MOUNTING




143C
PLAN VIEW


SIGN R10-4bR
SIGN R10-4bL
9"X12"




PEDESTRIAN PUSHBUTTON
SIGN DETAILS




H5LT
TYPICAL SPAN WIRE
HORIZONTAL MOUNT
INSTALLATION




H4LT
TYPICAL SPAN WIRE
HORIZONTAL MOUNT
INSTALLATION




H3
TYPICAL SPAN WIRE
HORIZONTAL MOUNT
INSTALLATION

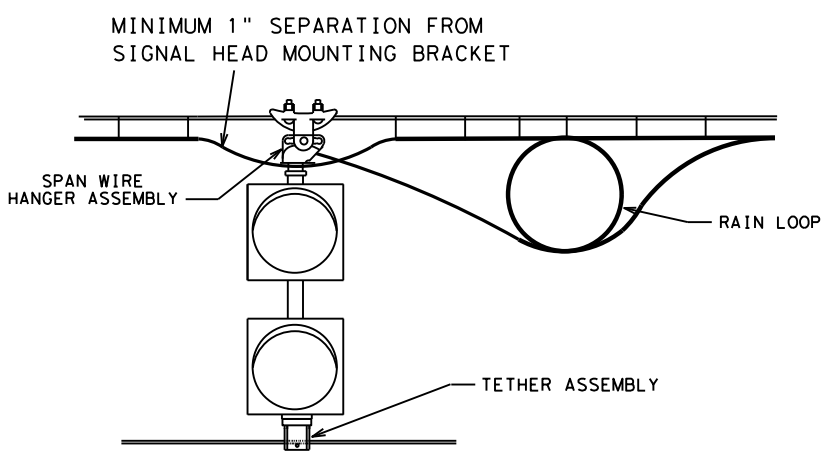

TYPICAL
ONE-WAY FLASHING BEACON
INSTALLATION

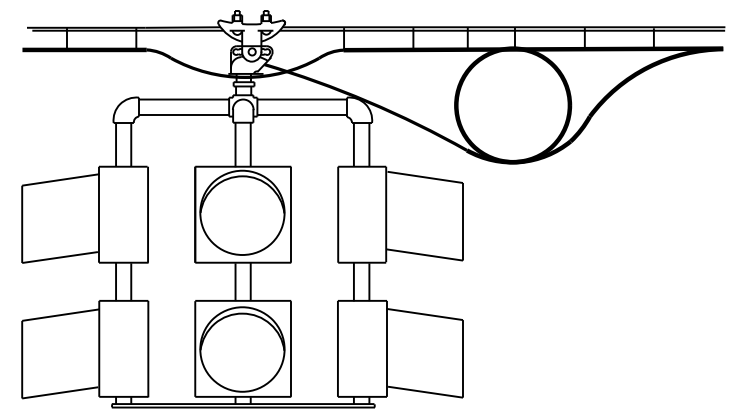

TYPICAL
FOUR-WAY FLASHING BEACON
INSTALLATION


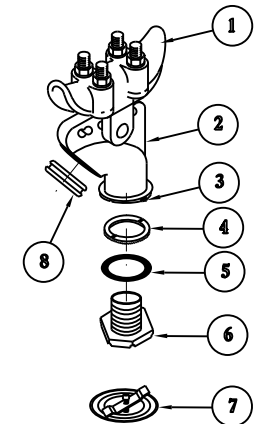


SPAN WIRE FLASHING BEACON
SIGNAL HEAD HANGER ASSEMBLY

**SPAN WIRE FLASHING BEACON
SIGNAL HEAD HANGER ASSEMBLY**

ITEM	DESCRIPTION	QTY
1	SPAN WIRE CLAMP, IRON, W/ U-BOLTS	1
2	WIRE OUTLET BODY, 3/4", ALUM	1
3	SET SCREW, SQUARE HD, CUP POINT, 1/4"-20X5/8", TYPE 304 STAINLESS	1
4	LOCKRING, SERRATED, 380 DIE CAST ALUM	1
5	GASKET, 70 DURO NEOPRENE	1
6	NIPPLE, HEX, 1-1/2" NPS, ALUM	1
7	KIT, SIGNAL CLOSURE	1
8	GROMMET, 1-1/2", W/ DIAPHRAGM	1


CONSTRUCTION DETAILS FOR SPAN
WIRE MOUNTED TRAFFIC SIGNALS

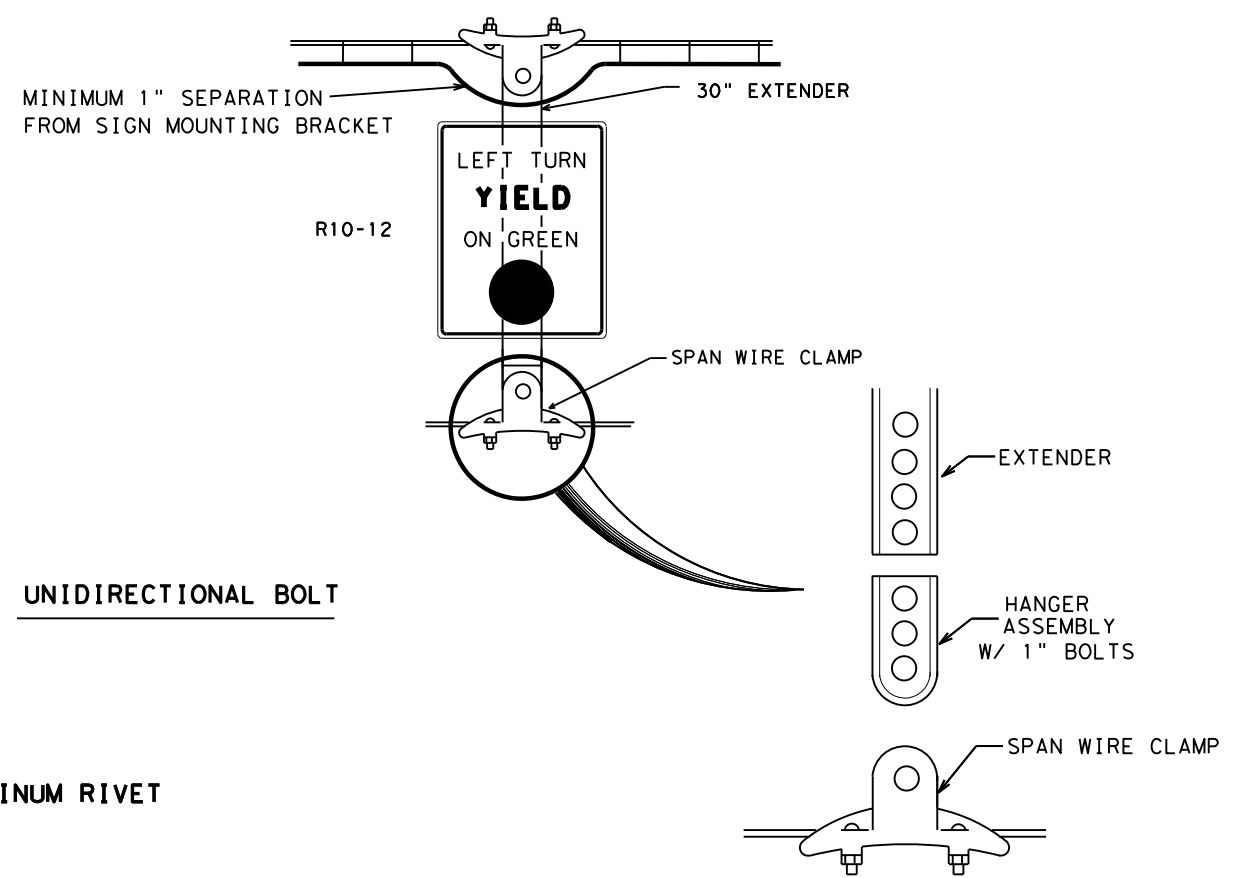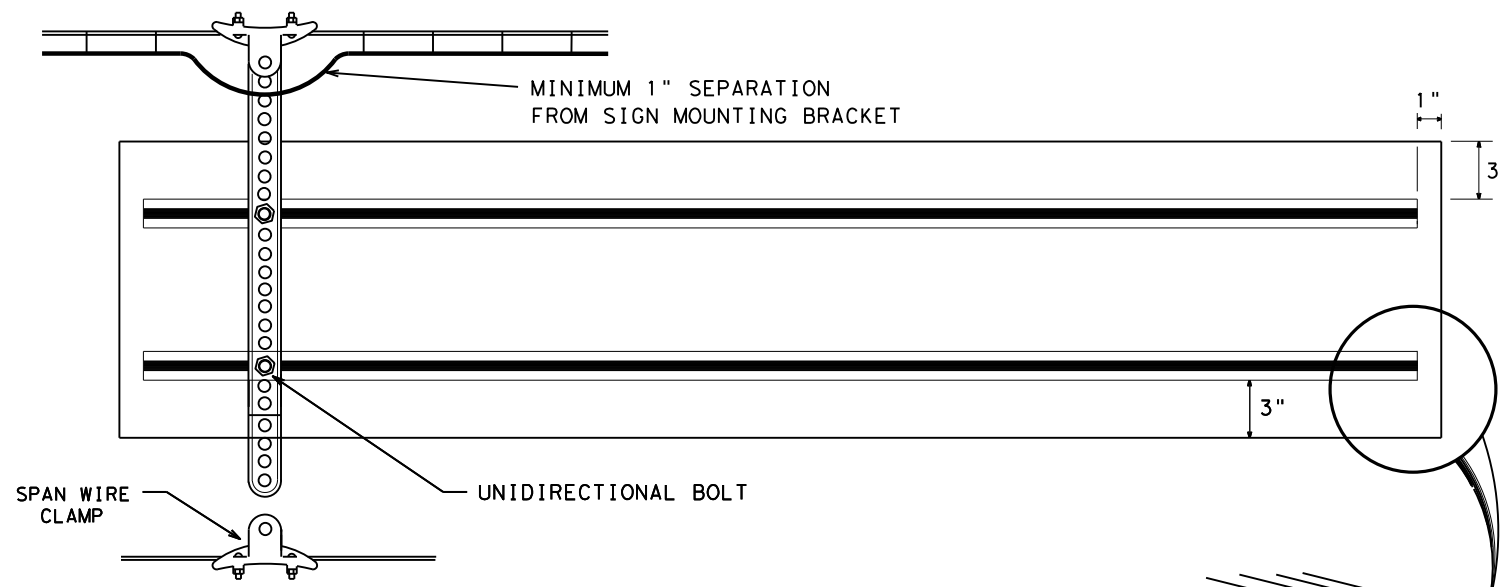

MEDIUM EXTRUSION HPN053

UNIDIRECTIONAL BOLT



ALUMINUM RIVET




HANGER ASSEMBLY DETAILS

NOTES: 1. BASED ON SIGN WIDTH, THE NUMBER OF VERTICAL SUPPORTS REQUIRED ARE AS FOLLOWS:
 3'-0" OR LESS - 1 SUPPORT REQUIRED
 >3'-0" UP TO 8'-0" - 2 SUPPORTS REQUIRED
 >8'-0" - 3 SUPPORTS REQUIRED
 SEE DIAGRAMS FOR SIGN SUPPORT SPACING

2. FOR STREET NAME SIGNS, EXTRUDED ALUMINUM SHALL BE MOUNTED FOR HORIZONTAL SUPPORT AS SHOWN.

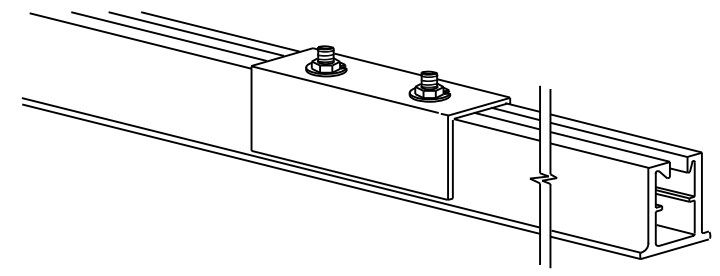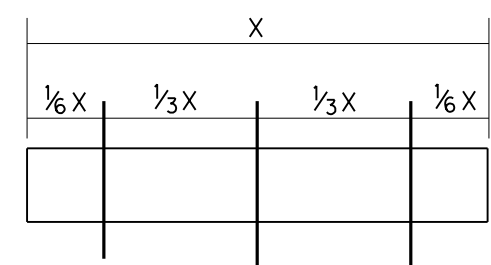

5" ALUMINUM COUPLING
6061-T6



ALUMINUM RIVET

NOTE: ALUMINUM RIVETS SHALL BE USED TO ATTACH THE SIGN TO THE EXTRUDED ALUMINUM. SPACINGS OF RIVETS SHALL BE 6" O.C.




CONSTRUCTION DETAILS FOR SPAN WIRE MOUNTED TRAFFIC SIGNALS

SHEET 3 OF 3
DALLAS DISTRICT STANDARD

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
	6 (SEE TITLE SHEET)	278
STATE	STATE DIST. NO.	COUNTY
TEXAS	DAL	COLLIN
CONT.	SECT.	JOB HIGHWAY NO.
1392	01	044 FM 1378

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

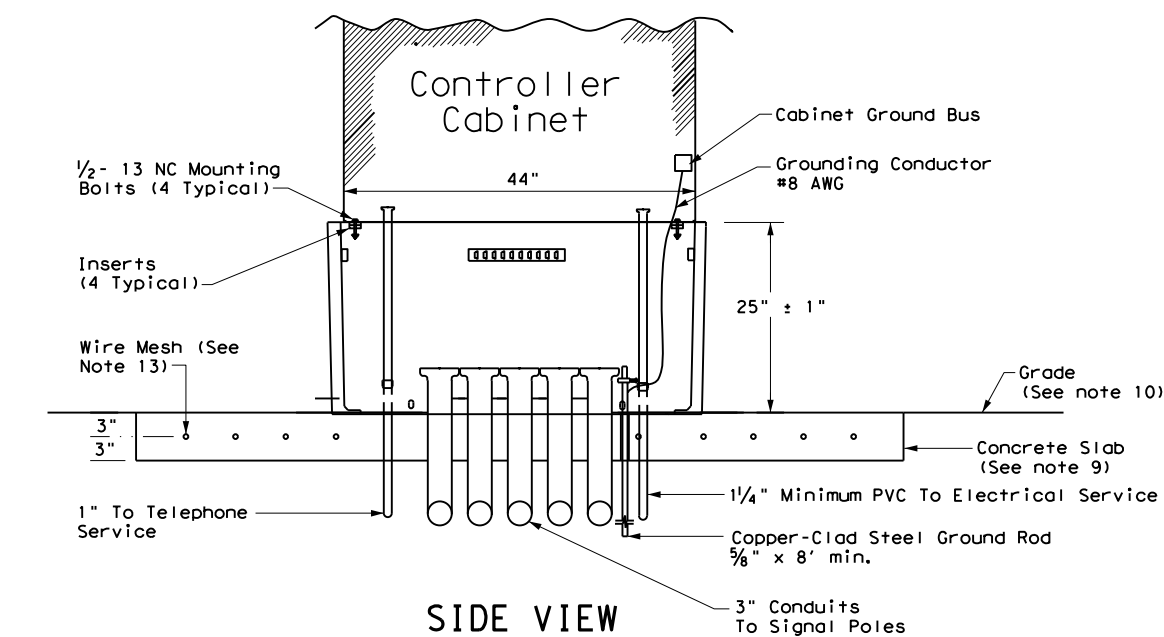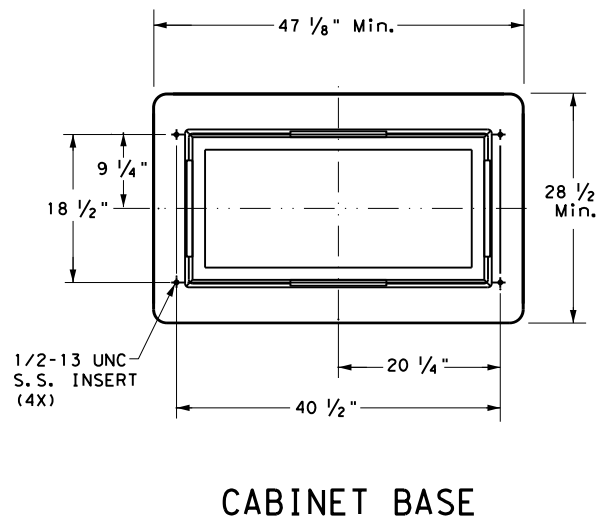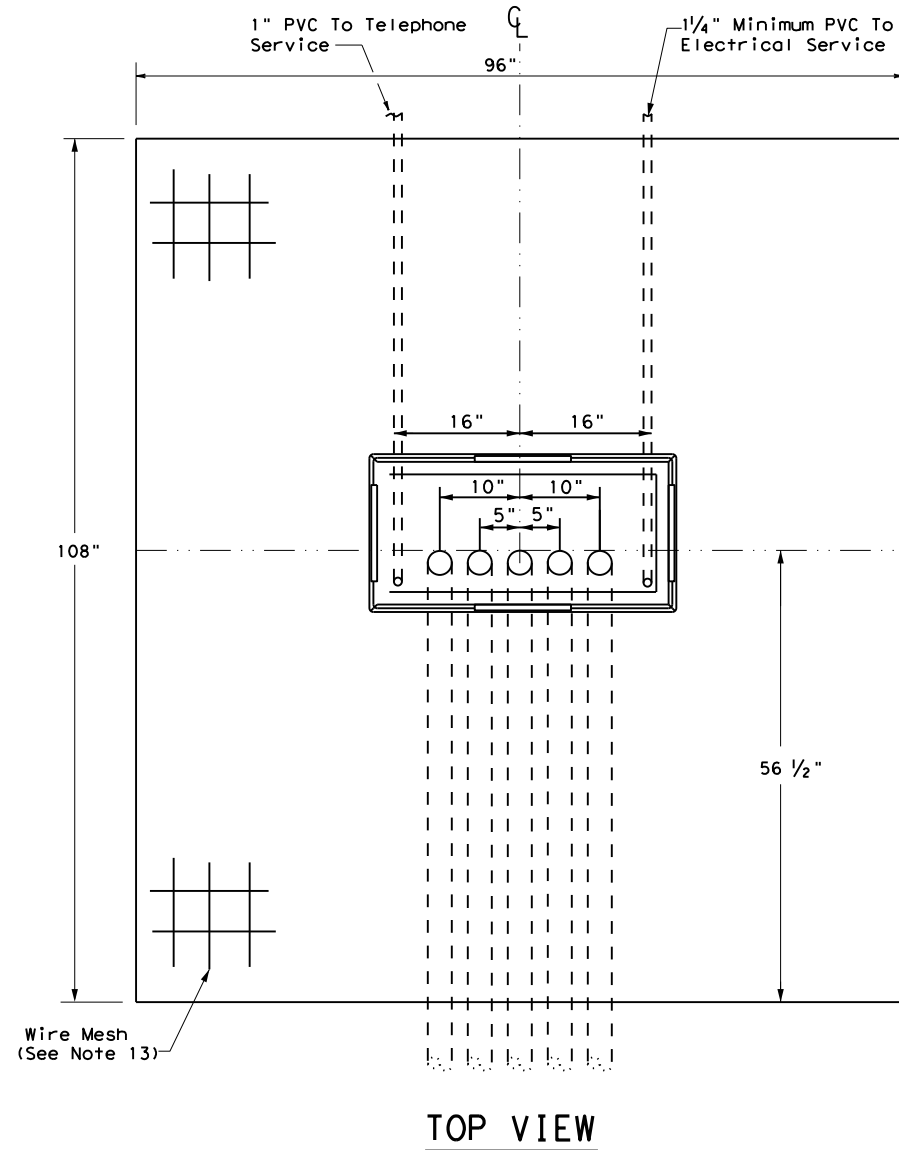

TRAFFIC SIGNAL CONTROLLER BASE:

1. Provide a traffic signal controller base (cabinet base) manufactured of polymer concrete material consisting of calcareous and siliceous stone; glass fibers and thermoset polyester resin. The polymer concrete cabinet base must be reinforced on the inside of the cabinet base with fiberglass matting. Provide one of the following bases: Armorcast Part # A6001848X24, Quazite Model # PG3048Z709, or other as approved by TxDOT Traffic Safety Division.
2. The polymer concrete material must have a minimum compressive strength of 10,300 pounds per square inch (psi), minimum flexural strength of 3600 psi, and minimum shear strength of 3600 psi.
3. The polymer concrete cabinet base must conform to the dimensions shown and must accommodate a standard TxDOT basemount cabinet.
4. Supply the cabinet base with four 1#2"-13 UNC stainless steel inserts for attachment of the cabinet to the base. Inserts must withstand a minimum torque of 50 ft-lb and a minimum straight pull out strength of 750 lbs.
5. Provide the cabinet base with 4 cable racks mounted one on each side of the base 2" to 7" from the top edge of the base. Unless approved otherwise, cable racks must be 1-1/2 x 9#16x 3#16inch steel channel with eight T-slots spaced at 1-1/2 inches. The cable racks must easily accommodate the insertion of tie wraps to attach field wiring to the racks to serve as strain relief. Secure cable racks to the base using 1#2"-13 UNC stainless steel screws and inserts.
6. The cabinet base, when secured to the concrete slab with controller cabinet attached, must withstand a minimum wind load of 125 mph or a 850 lb force applied at 49" above the bottom of the base without causing the base or cabinet to come out of their anchored position or cause any permanent deformation. The manufacturer must supply certification by an independent testing laboratory or sealed by a Texas Licensed Professional Engineer. Provide the cabinet base with hardware for attachment to a concrete slab.
7. The traffic signal base must be permanently marked either by impress or by permanent ink with the manufacturer's model number and name or logo.
8. Seal the base to the concrete with a silicone caulk bead and fastened to the slab per manufacturer's instructions.

CONCRETE SLAB:

9. Traffic signal controller pad must be a portland cement concrete slab poured in place, must conform to the dimensions shown, and must be level.
 10. Grade earthwork such that it is flush with the concrete pad on all four sides, unless otherwise shown on the plans. Subsidiary to ITEM 680, four inch rip rap may be used in lieu of earthwork. Slopes shall gradually contour to match plans.
 11. Bond a #8 AWG copper ground wire and an 8 ft ground rod bonded to the reinforcing mesh by a suitable UL Listed clamp and terminated to the cabinet grounding bus for the purpose of providing a local ground for the electrical grounding conductor. The electrical grounding conductor specified in Item 680-3.A.4 is required and must be terminated to the cabinet ground bus.
 12. Install a PVC sleeve to prevent the ground rod from direct embedment in the slab.
 13. Provide welded wire mesh 6X6-W2.9 X W2.9 for reinforcement. Provide joints and splices in the mesh with a minimum 6-inch overlap. Center the mesh between top and bottom and provide a minimum 3 inch cover on the edges.
 14. Provide Class B concrete minimum for the slab in accordance with Item 421. Construct the slab in accordance with Item 531.
- ### CONDUITS:
15. Stub up and run 3-inch conduits through the slab to the various traffic signal poles and ground boxes as shown on the layouts. Install the number of conduits as shown on layouts plus two additional 3 inch conduits for future use. Terminate the conduits with a bushing between 2 and 4-inches above the slab.
 16. Extend conduits for future use at least 18-inches from the edge of the slab, terminate underground with a coupling, and cap and seal so that the seal can be removed without damaging the coupling. This must also apply to unused telephone conduit.
 17. Stub up two separate conduits through the slab from the electrical and telephone services. Run the conduit for the electrical feed directly to the electrical service enclosure. Run the conduit for the telephone line directly to the telephone service, usually located on the same pole as the electrical service. Telephone must not under any circumstance share a conduit with any other function.
 18. Terminate electric and telephone conduits above the slab with a coupling. After the base is installed, extend the conduits above the top of the base and secure to the base using a steel one-hole strap or similar suitable substitute.

CONTROLLER CABINET:

19. Anchor the controller cabinet to the base using four stainless steel 1/2-13 NC bolts.
20. The silicone caulk bead specified in Item 680.3.B must be RTV 133.

PAYMENT:

21. Bid TS-CF as subsidiary to Item 680.




TRAFFIC SIGNAL CONTROLLER CABINET BASE AND PAD TS-CF-21

FILE: ts-cf-21.dgn	DN:	CK:	DW:	CK:
© TxDOT October 2000	CONT	SECT	JOB	HIGHWAY
12-04 REVISIONS	1392	01	044	FM 1378
2-21	DIST	COUNTY	SHEET NO.	
	18	COLLIN	279	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

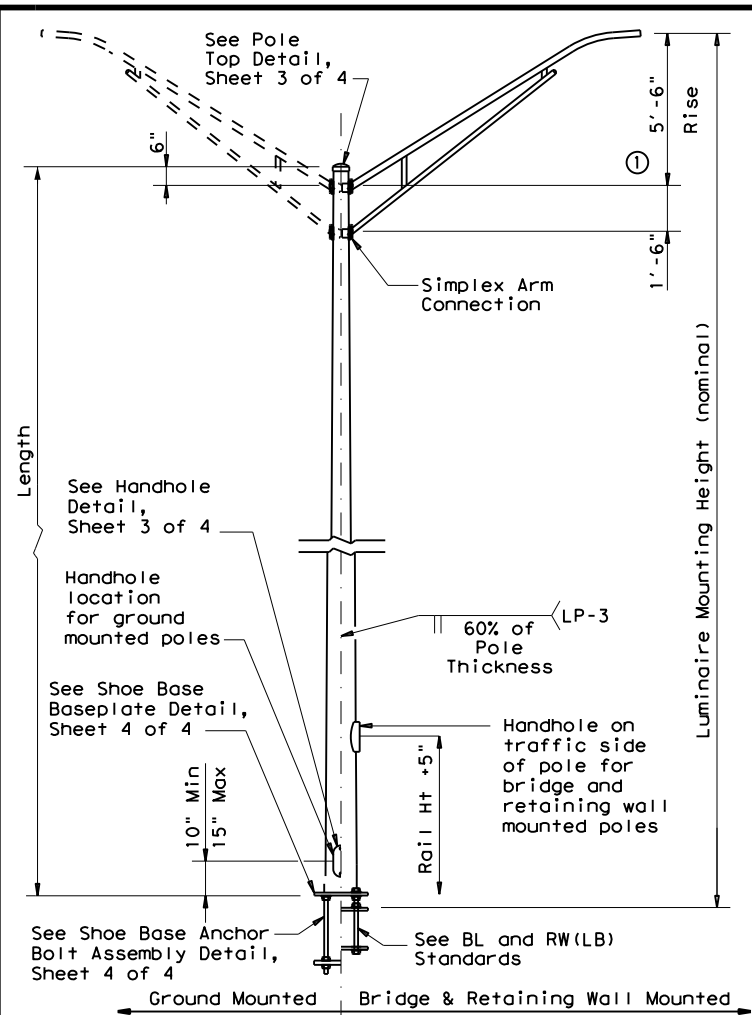


SHOE BASE POLE

SHOE BASE POLE					
Luminaire Mounting Height (Nominal) (ft)	Base Diameter (in)	Top Diameter (in)	Length (ft)	Pole Thickness (in)	Design Moment (K-ft)
20.00	7.00	4.90	15.00	0.1196	7.1
30.00	7.50	4.00	25.00	0.1196	13.2
31.00-39.00	8.00	4.36-3.24	26.00-34.00	0.1196	20.7
40.00	8.50	3.60	35.00	0.1196	20.7
50.00	10.50	4.20	45.00	0.1196	30.3

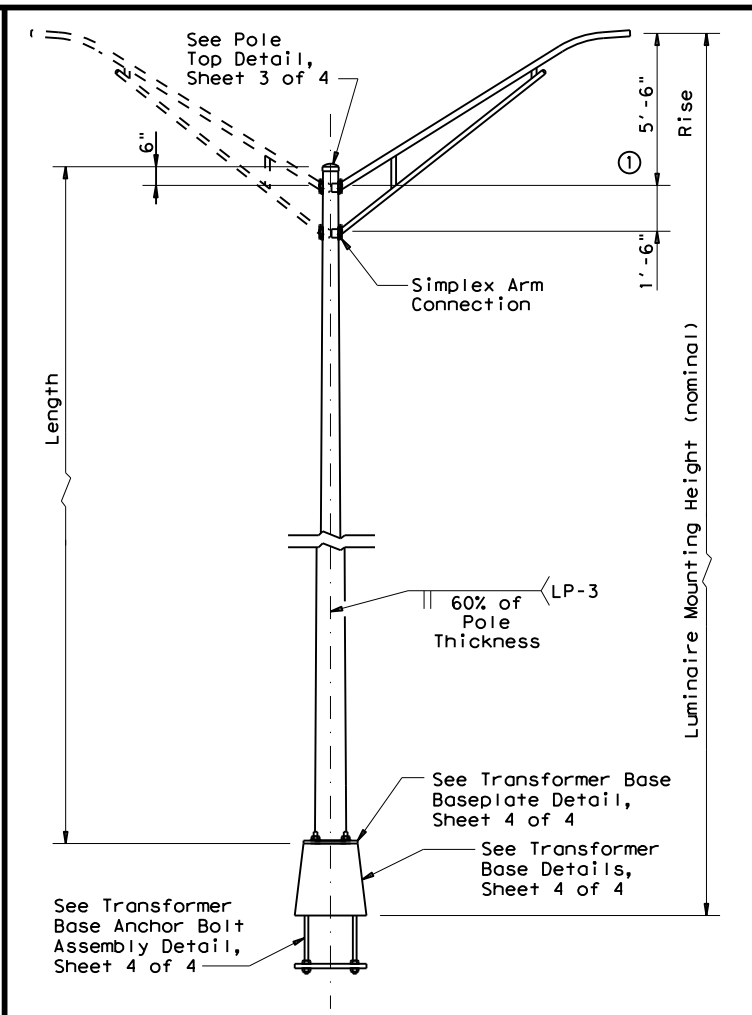

TRANSFORMER BASE POLE

TRANSFORMER BASE POLE					
Luminaire Mounting Height (Nominal) (ft)	Base Diameter (in)	Top Diameter (in)	Length (ft)	Pole Thickness (in)	Design Moment (K-ft)
20.00	7.00	5.11	13.50	0.1196	7.1
30.00	7.50	4.21	23.50	0.1196	13.2
31.00-39.00	8.00	4.57-3.45	24.50-32.50	0.1196	20.7
40.00	8.50	3.81	33.50	0.1196	20.7
50.00	10.00	3.91	43.50	0.1196	30.3

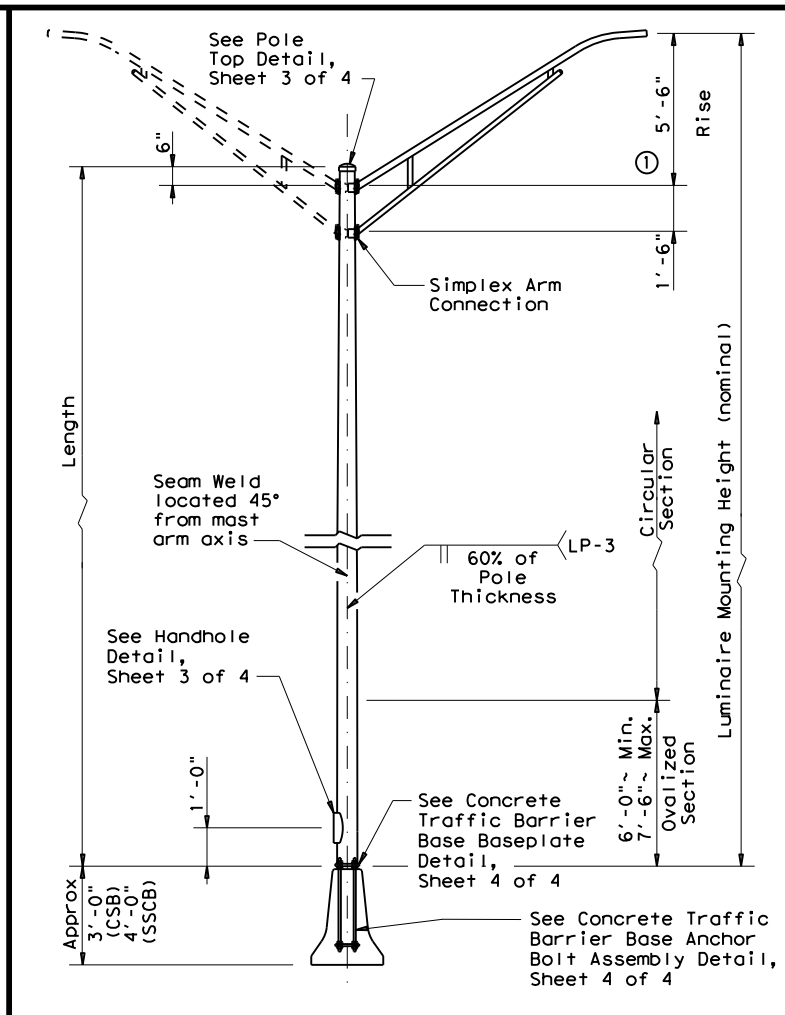

CONCRETE TRAFFIC BARRIER BASE POLE

CONCRETE TRAFFIC BARRIER BASE POLE (CSB/SSCB)						
Luminaire Mounting Height (Nominal) (ft)	Base Diameter (in)	Top Diameter (in)	Length (ft)	Pole Thickness (in)	Design Moment (K-ft)	
					About C of Rail	Perp. to Rail
28.00	9.00	5.78	23.00	0.1196	10.3	13.2
38.00	9.00	4.38	33.00	0.1196	16.6	20.8
48.00	10.50	4.48	43.00	0.1345	25.1	30.5

GENERAL NOTES:

- Designs conform to AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminares, and Traffic Signals, 6th Edition (2013) and Interim Revisions thereto. Design 3-Second Gust Wind Speed equals 110 mph with a 1.14 gust factor. A wind importance factor of 0.80 is applied to adjust the wind speed to a 25 year recurrence interval. Design moments listed in tables assume base of pole is 25' above natural ground level.
- Structures are designed to support two 12' luminaire mast arms and luminaires. Mast arms are designed to support a 60-pound luminaire having an effective projected area of 1.6 square feet.
- Fabrication shall be in accordance with the Specifications and with the details, dimensions, and weld procedures shown herein. Do not submit shop drawings for roadway illumination pole assemblies fabricated in accordance with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. Materials, fabrication tolerances, and shipping practices shall meet the requirements of these sheets and the Specifications. In the absence of specified fabrication tolerances, dimensions shall be within the tolerances generally obtainable in normal fabrication practice.
- For mounting heights between values shown in the tables, use base diameter and thickness values for the larger height.
- Unless otherwise noted, all steel parts shall be galvanized in accordance with Item 445, "Galvanizing."
- Steel poles shall be fabricated in accordance with Item 441, "Steel Structures." Longitudinal seam welds for pole sections shall have 60% minimum penetration. All welding shall be in accordance with AWS D1.1, Structural Welding Code-Steel.
- Two-section poles joined by circumferential welds will not be permitted, unless otherwise shown on the plans. Poles may be fabricated in two sections and field-assembled by the lap-joint method. The two sections shall telescope together with a lap length of not less than 1-1/2 times the shaft diameter at the lap joint.
- Alternate material equal to or better than material specified may be substituted with the approval of the Engineer.
- Lubricate and tighten anchor bolts, when erecting shoe base poles and concrete traffic barrier base poles, in accordance with Item 449, "Anchor Bolts."
- All poles, except Transformer Base Poles, shall have hand holes with reinforcing frames and covers. For ground mounted shoe base poles, hand holes shall be placed 90 degrees to mast arm unless otherwise noted on the plans. For poles mounted on a concrete traffic barrier with one luminaire arm, hand holes shall be located 180 degrees from luminaire arm. For poles mounted on a concrete traffic barrier with two luminaire arms, all hand holes shall be on the same side of the barrier. For poles mounted on a bridge lighting bracket or a retaining wall lighting bracket, hand hole shall be on traffic side of the pole, at a height that will clear the barrier.
- The finished pole shall have a smooth, uniform finish free of pits, blisters, or other defects. Scratched, chipped, and other damaged galvanized areas on poles and mast arms shall be repaired in accordance with Item 445, "Galvanizing."
- Pole length is based on a 5'-6" luminaire arm rise. 4 ft. luminaire arms have a 2'-6" rise. A pole with 4 ft. luminaire arms will have an actual mounting height 3'-0" less than the nominal mounting height. Increasing the pole length to meet the nominal mounting height is allowed, but unnecessary unless otherwise directed by the engineer.
- Erect transformer base poles in accordance with sheet RID(1).

MATERIAL DATA

COMPONENT	ASTM DESIGNATION	MIN. YIELD (ksi)
Pole Shaft (0.14"/ft. Taper)	A572 Gr 50, A595 Gr A, A1011 HSLAS Gr 50 Cl 2 ③, or A1008 HSLAS Gr 50 Cl 2	50
Base Plate and Handhole Frame	A572 Gr.50, or A36	36
T-Base Connecting Bolts	F3125 Gr A325	92
Anchor Bolts	F1554 Gr 55, A193-B7 or A321	55 105
Anchor Bolt Templates	A36	36
Heavy Hex (H.H.) Nuts	A194 Gr 2H, or A563 Gr DH	
Flat Washers	F436	

NOTES:

- 2'-6" rise for 4 ft. luminaire arms.
- Before ovalized as shown on Concrete Traffic Barrier Base Baseplate details, Sheet 4 of 4.
- A1011 SS Gr 50 may be used instead of HSLAS, provided the material meets the elongation requirements for HSLAS.

POLE ASSEMBLY FABRICATION TOLERANCES TABLE

DIMENSION	TOLERANCE
Shaft length	+1"
I.D. of outside piece of slip fitting pieces	+1/8", -1/16"
O.D. of inside piece of slip fitting pieces	+1/32", -1/8"
Shaft diameter: other	+3/16"
Out of "round"	1/4"
Straightness of shaft	±1/4" in 10 ft
Twist in multi-sided shaft	4° in 50 ft
Perpendicular to baseplate	1/8" in 24"
Pole centered on baseplate	±1/4"
Location of Attachments	±1/4"
Bolt hole spacing	±1/16"

Texas Department of Transportation
Traffic Safety Division Standard


ROADWAY ILLUMINATION POLES

RIP(2) - 19

FILE: rip-19.dgn	DN:	CK:	DW:	CK:
© TxDOT January 2007	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044	FM 1378
7-17	DIST	COUNTY	SHEET NO.	
12-19	DAL	COLLIN	281	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

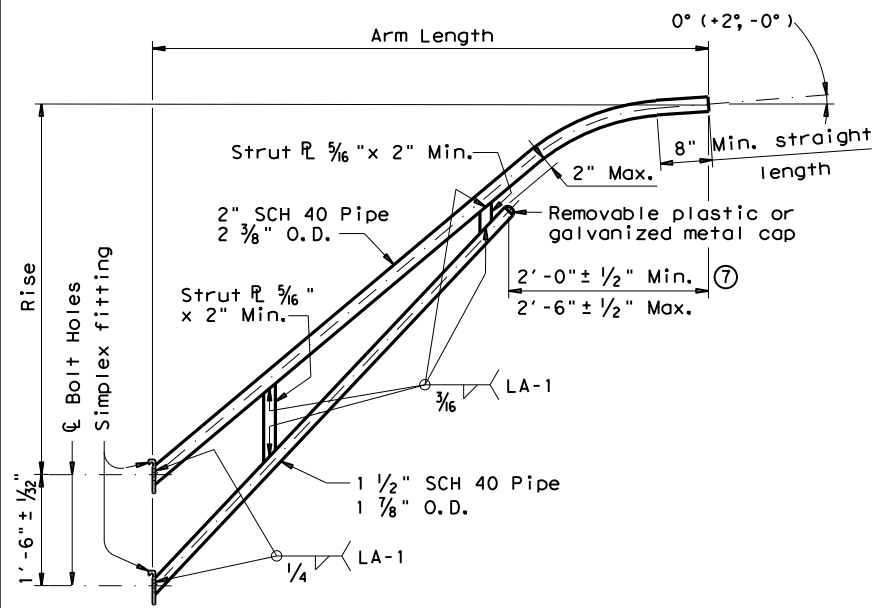


LUMINAIRE ARM

LUMINAIRE ARM DIMENSIONS		
Nominal Arm Length	Arm Length	Rise
4'-0"	3'-6"	2'-6"
6'-0"	5'-6"	5'-6"
8'-0"	7'-6"	5'-6"
10'-0"	9'-6"	5'-6"
12'-0"	11'-6"	5'-6"


ARM ASSEMBLY FABRICATION TOLERANCES TABLE	
DIMENSION	TOLERANCE
Arm Length	±1"
Arm Rise	±1"
Deviation from flat	1/8" in 12"
Spacing between holes	±1/32"

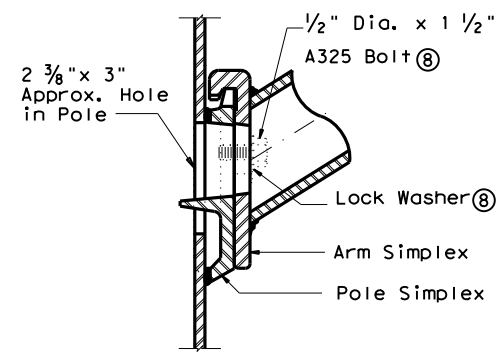


UPPER SIMPLEX FITTING
(Gusset not shown for clarity)

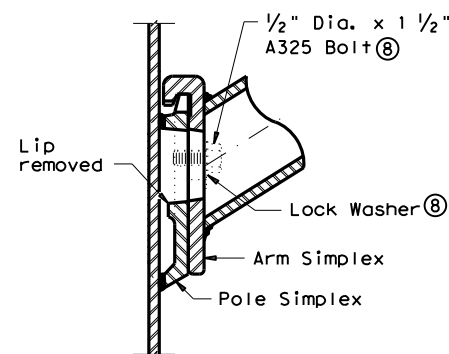




LOWER SIMPLEX FITTING
(Gusset not shown for clarity)
SECTION B-B

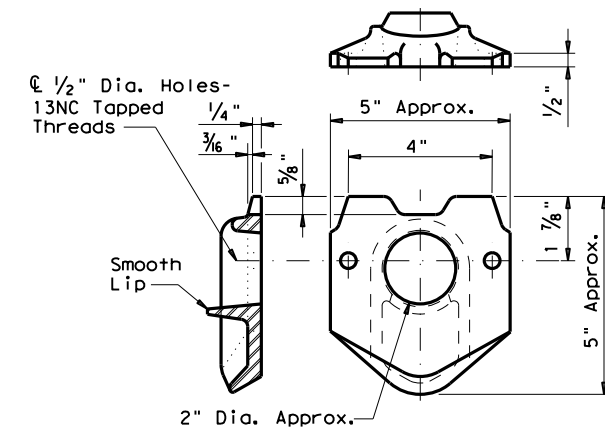


POLE SIMPLEX DETAIL

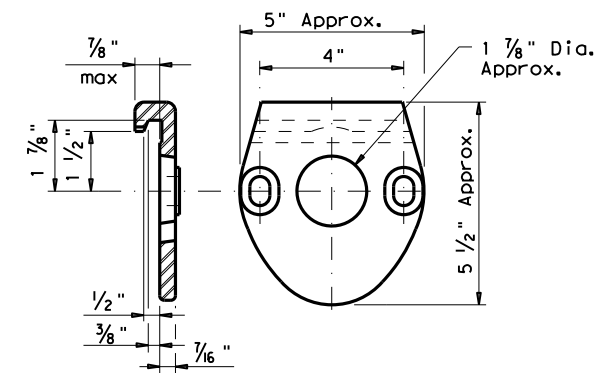


ARM SIMPLEX DETAIL

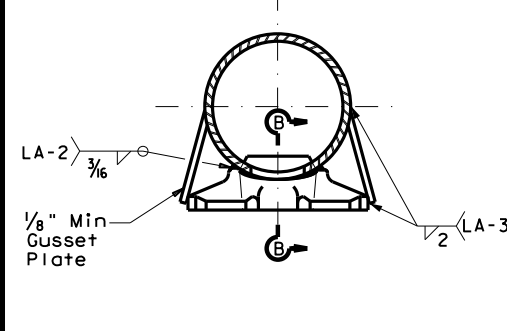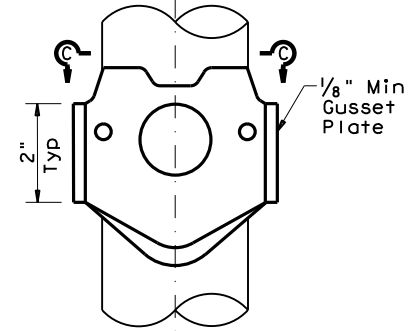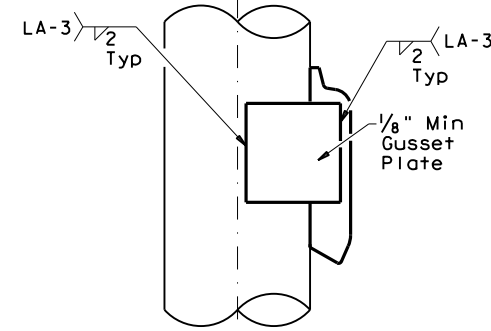


SIMPLEX ATTACHMENT DETAIL

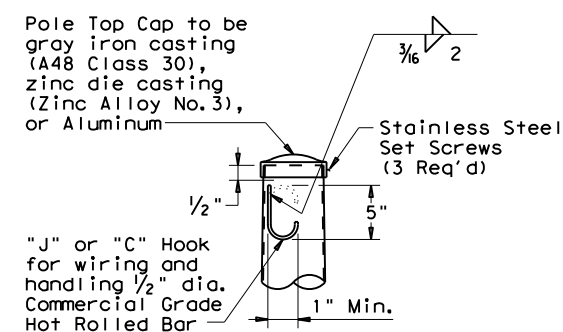

POLE TOP

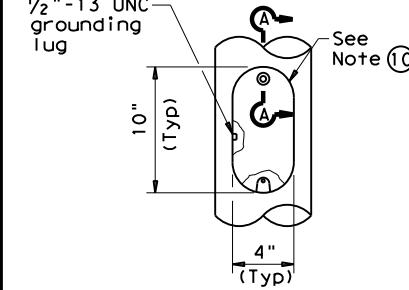

ELEVATION

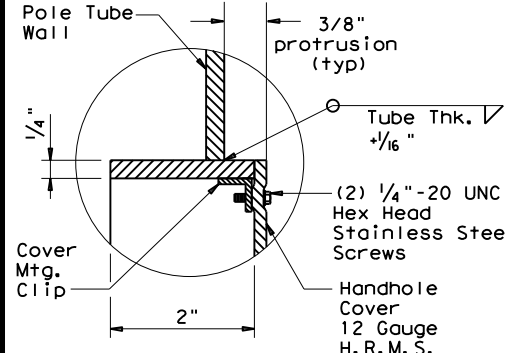

SECTION A-A

HANDHOLE

NOTES:

- ④ Any of the materials listed for plates may be used where the drawings do not specify a particular ASTM designation.
- ⑤ A576 must be suitable for forging and also meet minimum tensile strength of 65 ksi, minimum yield of 35 ksi, and elongation in 2 inches of 22 percent.
- ⑥ A572, A1008 HSLAS-F, and A1011 HSLAS-F materials may have higher yield strengths but shall not have less elongation than the grade indicated.
- ⑦ Dimensional limits are given to show acceptable variation in design. All of a Fabricator's production of a particular arm length shall have the same dimensions within specified tolerances.
- ⑧ Each pole simplex fitting shall be supplied with 2 bolts and 2 lock washers of the size specified. The bolts and lock washers shall be secured to the pole with the other hardware items called for in the plans.
- ⑨ Proposed deviations in arm simplex dimensions or materials must be submitted to the Department for approval.
- ⑩ A welded handhole frame is permissible. Maximum of two (2) CJP weld splices is allowed.


MATERIALS

Pole or Arm Simplex	ASTM A27 Gr 65-35 or Gr 70-36, A148 Gr 80-50, A576 Gr 1021 ⑤, or A36 (Arm only)
Arm Pipes	ASTM A53 Gr A or B, A500 Gr B, A501, A 1008 HSLAS-F Gr 50 ⑥, or A1011 HSLAS-F Gr 50 ⑥
Arm Struts and Gusset Plates ④	ASTM A36, A572 Gr 50 ⑥, or A588
Misc.	ASTM designations as noted

ROADWAY ILLUMINATION POLES
RIP(3) - 19


FILE: rip-19.dgn	DN:	CK:	DW:	CK:
©TxDOT January 2007	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044	FM 1378
7-17	DIST	COUNTY	SHEET NO.	
12-19	DAL	COLLIN	282	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

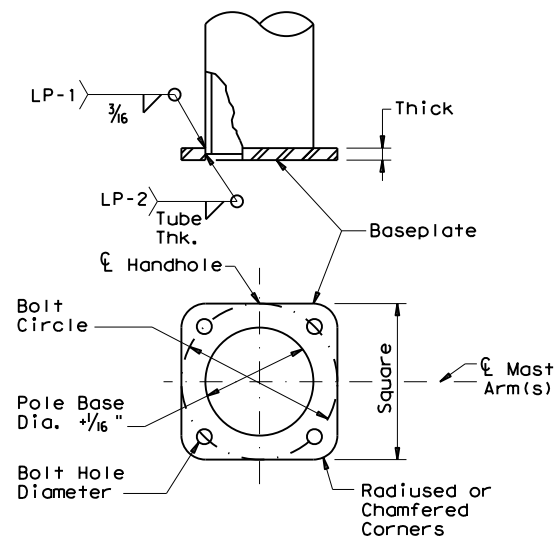


SHOE BASE BASEPLATE

SHOE BASE BASEPLATE TABLE				
MOUNTING HEIGHTS (nominal)	BOLT CIRCLE	SQUARE	THICK	BOLT HOLE DIAMETER
20' - 39'	13"	13"	1 1/4"	1 1/4"
40'	15"	15"	1 1/4"	1 1/2"
50'	15"	15"	1 1/2"	1 1/2"

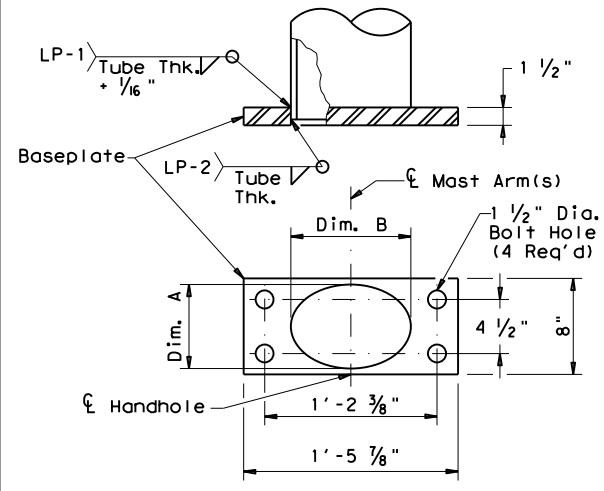


CONCRETE TRAFFIC BARRIER BASE BASEPLATE

CONCRETE TRAFFIC BARRIER BASE BASEPLATE TABLE			
MOUNTING HEIGHTS (nominal)	POLE DIA. (12)	DIM. A	DIM. B
28' - 38'	9"	7" ± 1/4"	10" ± 1/4"
48'	10 1/2"	7" ± 1/4"	13" ± 1/4"

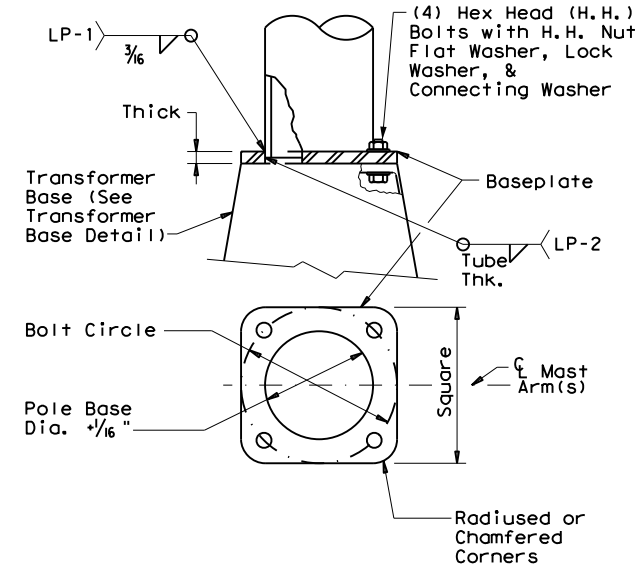


TRANSFORMER BASE BASEPLATE

TRANSFORMER BASE BASEPLATE TABLE						
MOUNTING HEIGHTS (nominal)	BOLT CIRCLE	SQUARE	THICK	CONNECTING BOLT DIA.	BOLT HOLE DIAMETER	TRANSFORMER BASE TYPE
20' - 39'	13"	13"	1 1/4"	1"	1 1/4"	A
40'	15"	15"	1 1/4"	1 1/4"	1 1/2"	B
50'	15"	15"	1 1/2"	1 1/4"	1 1/2"	B

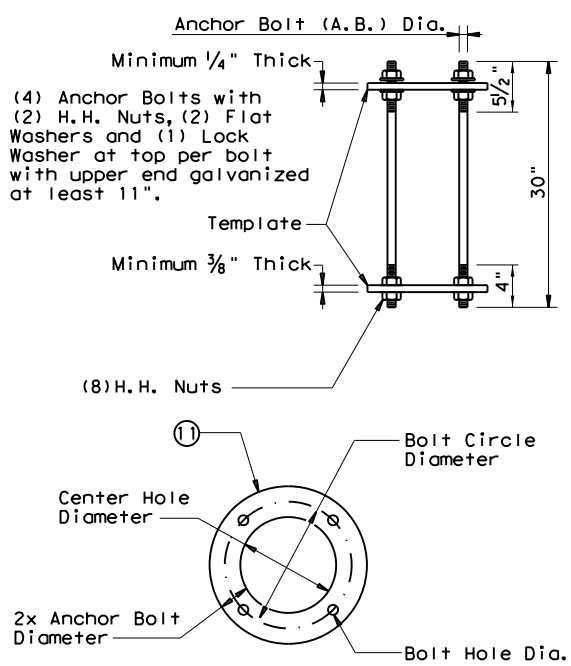


SHOE BASE ANCHOR BOLT ASSEMBLY

SHOE BASE ANCHOR BOLT ASSEMBLY TABLE				
MOUNTING HEIGHTS (nominal)	A.B. Dia.	BOLT CIRCLE DIAMETER	CTR. HOLE DIAMETER	BOLT HOLE DIAMETER
20' - 39'	1"	13"	11"	1 1/16"
40' - 50'	1 1/4"	15"	12 1/2"	1 5/16"

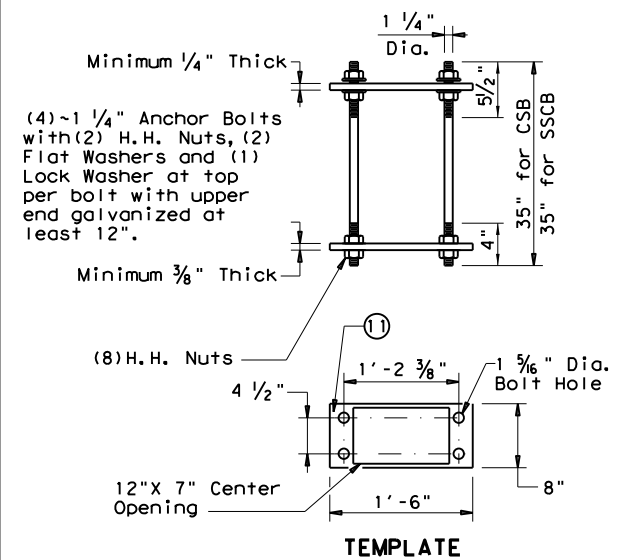


CONCRETE TRAFFIC BARRIER BASE ANCHOR BOLT ASSEMBLY

CONCRETE TRAFFIC BARRIER BASE ANCHOR BOLT ASSEMBLY TABLE				
MOUNTING HEIGHTS (nominal)	A.B. Dia.	BOLT CIRCLE DIAMETER	CTR. HOLE DIAMETER	BOLT HOLE DIAMETER
20' - 39'	1"	14"	12"	1 1/16"
40' - 50'	1 1/4"	17 1/4"	14 3/4"	1 5/16"

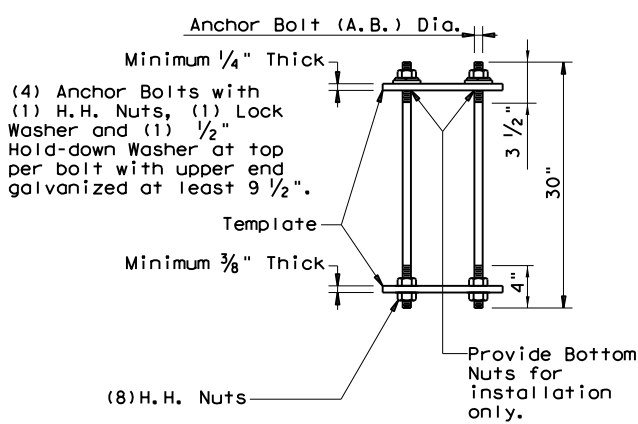


TRANSFORMER BASE ANCHOR BOLT ASSEMBLY


TRANSFORMER BASE TABLE		
TYPE	TOP B.C.	BTM. B.C.
A	13"	14"
B	15"	17 1/4"

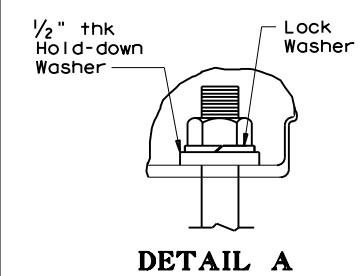


DETAIL A

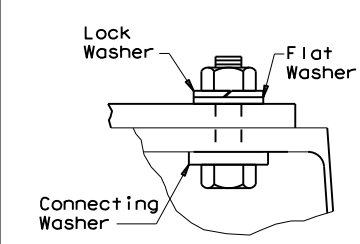


DETAIL B



TOP PLAN



BOTTOM PLAN

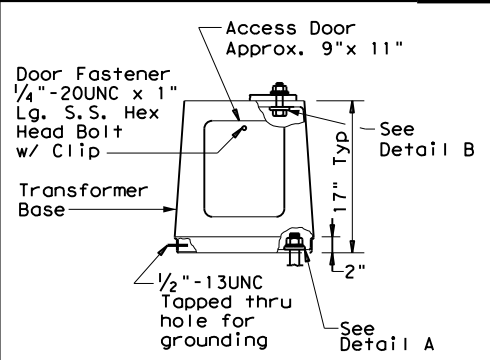

ELEVATION

TRANSFORMER BASE DETAILS

GENERAL NOTES:

- For mounting heights between those shown in the table, use the values in the table for the larger mounting height.
- All breakaway bases shall meet the breakaway requirements of the AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals, 6th Edition (2013) and Interim Revisions thereto, and shall have been tested by FHWA-approved methods. All bases shall have been structurally tested to resist 150% of the design moment.
- Transformer bases shall be cast from aluminum, ASTM B108 or B26 Alloy 356.0-T6, or other material approved by the Engineer. Four Hex Head (H.H.) bolts with four H.H. nuts, four lock washers, four flat washers, and connecting and hold-down washers as recommended by the manufacturer, galvanized to ASTM A153 Class C or D, or B695 Class 50, shall be provided with each transformer base for connecting the pole. Bolts shall be ASTM A325 or approved equal. Nuts shall be ASTM A563 grade DH galvanized.
- Bases shall be stamped, incised or by other approved permanent means, marked to show fabricator's name or logo, and model number. Such information shall be placed in a readily seen location, inside or outside the base, but shall not be placed on the door.
- Doors for transformer bases shall be made of plastic, fiberglass or other non-metallic material approved by the Engineer and shall be attached with stainless steel screws or bolts. Transformer bases shall be cleaned by grit blast cleaning after heat treatment. Certification by the manufacturer of heat treatment shall be furnished with transformer bases. The certification shall show the metal alloy and temper and that the base meets those requirements, chemical and physical. The certification shall also show the material ASTM specification. Transformer bases shall be cast with a removable tab bar for material testing. Some bars may have been removed by the manufacturer for testing.

NOTES:

- Anchor Bolt Templates do not need to be galvanized.
- Pole diameter before ovalized.

ANCHOR BOLT FABRICATION TOLERANCES TABLE

DIMENSION	TOLERANCE
Length	± 1/2"
Threaded length	± 1/2"
Galvanized length (if required)	- 1/4"



ROADWAY ILLUMINATION POLES

RIP(4) - 19

FILE: rip-19.dgn	DN:	CK:	DW:	CK:
©TxDOT January 2007	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044	FM 1378
7-17	DIST	COUNTY	SHEET NO.	
12-19	DAL	COLLIN	283	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

Arm Length	ROUND POLES					POLYGONAL POLES					Foundation Type
	D _B	D ₁₉	D ₂₄	D ₃₀	① thk	D _B	D ₁₉	D ₂₄	D ₃₀	① thk	
ft.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	
20	10.5	7.8	7.1	6.3	.179	11.5	8.5	7.7	6.8	.179	30-A
24	11.0	8.3	7.6	6.8	.179	12.0	9.0	8.2	7.3	.179	30-A
28	11.5	8.8	8.1	7.3	.179	12.5	9.5	8.7	7.8	.179	30-A
32	12.5	9.8	9.1	8.3	.179	12.0	9.0	8.2	7.3	.239	30-A
36	12.0	9.3	8.6	7.8	.239	12.5	9.5	8.7	7.8	.239	36-A
40	12.0	9.3	8.6	7.8	.239	13.5	10.5	9.7	8.8	.239	36-A
44	12.5	9.8	9.1	8.3	.239	14.0	11.0	10.2	9.3	.239	36-A
48	13.0	10.3	9.6	8.8	.239	15.0	12.0	11.2	10.3	.239	36-A


Arm Length	ROUND ARMS					POLYGONAL ARMS				
	L ₁	D ₁	D ₂	① thk	Rise	L ₁	D ₁	② D ₂	① thk	Rise
ft.	ft.	in.	in.	in.		ft.	in.	in.	in.	
20	19.1	6.5	3.8	.179	1'-9"	19.1	7.0	3.5	.179	1'-8"
24	23.1	7.5	4.3	.179	1'-10"	23.1	7.5	3.5	.179	1'-9"
28	27.1	8.0	4.2	.179	1'-11"	27.1	8.0	3.5	.179	1'-10"
32	31.0	9.0	4.7	.179	2'-1"	31.0	9.0	3.5	.179	2'-0"
36	35.0	9.5	4.6	.179	2'-4"	35.0	10.0	3.5	.179	2'-1"
40	39.0	9.5	4.1	.239	2'-8"	39.0	9.5	3.5	.239	2'-3"
44	43.0	10.0	4.1	.239	2'-11"	43.0	10.0	3.5	.239	2'-6"
48	47.0	10.5	4.1	.239	3'-4"	47.0	11.0	3.5	.239	2'-9"

D_B = Pole Base O.D.
D₁₉ = Pole Top O.D. with no Luminaire and no ILSN
D₂₄ = Pole Top O.D. with ILSN w/out Luminaire
D₃₀ = Pole Top O.D. with Luminaire
D₁ = Arm Base O.D.
D₂ = Arm End O.D.
L₁ = Shaft Length
L = Nominal Arm Length

- ① Thickness shown are minimums, thicker materials may be used.
- ② D₂ may be increased by up to 1" for polygonal arms.

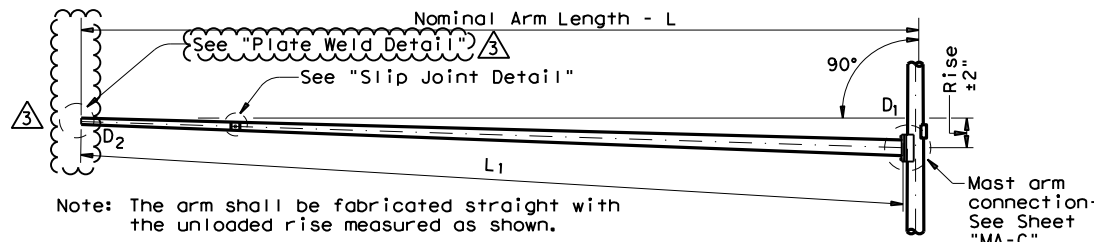

TRAFFIC SIGNAL ARM
(Fixed Mount)

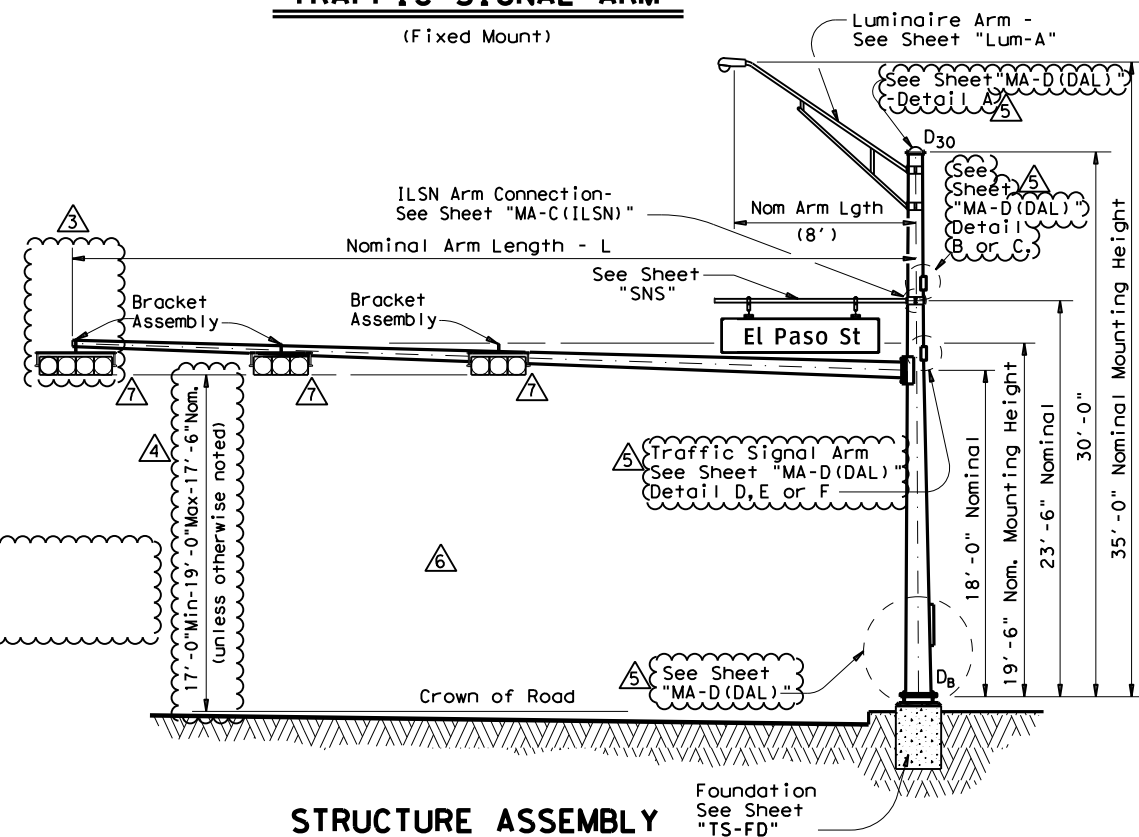

STRUCTURE ASSEMBLY

SHIPPING PARTS LIST

Ship each pole with the following attached: enlarged hand hole, pole cap, fixed-arm connection bolts and washers and any additional hardware listed in the table.

Nominal Arm Length	30' Poles With Luminaire		24' Poles With ILSN		19' Poles With No Luminaire and No ILSN	
	Designation	Quantity	Designation	Quantity	Designation	Quantity
20	20L-80		20S-80		20-80	
24	24L-80		24S-80		24-80	
28	28L-80	1	28S-80		28-80	
32	32L-80		32S-80		32-80	
36	36L-80		36S-80		36-80	
40	40L-80	1	40S-80		40-80	
44	44L-80		44S-80		44-80	
48	48L-80		48S-80		48-80	

Traffic Signal Arms (1 per Pole) Ship each arm with the listed equipment attached

Nominal Arm Length	Type I Arm (1 Signal)		Type II Arm (2 Signals)		Type III Arm (3 Signals)	
	Designation	Quantity	Designation	Quantity	Designation	Quantity
20	20I-80					
24	24I-80		24II-80			
28	28I-80		28II-80	1		
32			32II-80		32III-80	
36			36II-80		36III-80	
40			40II-80		40III-80	1
44			44II-80		44III-80	
48					48III-80	

Luminaire Arms (1 per 30' pole)

Nominal Arm Length	Quantity
8' Arm	2

ILSN Arm (Max. 2 per pole) Ship with clamps, bolts and washers

Nominal Arm Length	Quantity
7' Arm	
9' Arm	

Anchor Bolt Assemblies (1 per pole)

Anchor Bolt Diameter	Anchor Bolt Length	Quantity
1 1/2"	3'-4"	1
1 3/4"	3'-10"	1

Each anchor bolt assembly consists of the following: Top and Bottom templates, 4 anchor bolts, 8 nuts, 8 flat washers, and 4 nut anchor devices (Type 2) per Standard Drawing "TS-FD".

Templates may be removed for shipment.


MODIFICATIONS:

- △ REPLACED CGB CONNECTOR WITH BRACKET ASSEMBLY. (2/12)
- △ ADDITIONAL OPTION. (3/12)
- △ REPLACED TENON DETAIL WITH PLATE WELD DETAIL. (2/12)
- △ REVISED MINIMUM SIGNAL HEIGHT. (3/12)
- △ REPLACED "MA-D" WITH "MA-D(DAL)". (2/12)
- △ REMOVED TABLE OF DIMENSIONS "A". (2/12)
- △ REMOVED CGB CONNECTORS. (2/12)

TRAFFIC SIGNAL SUPPORT STRUCTURES
SINGLE MAST ARM ASSEMBLY
(80 MPH WIND ZONE)
SMA-80(1)-12(DAL)

© TxDOT August 1995		DN: MS	CK: JSY	DW: MMF	CK: JSY
REVISIONS		CONT	SECT	JOB	HIGHWAY
5-96	11-99	1392	01	044	FM 1378
1-12		DIST	COUNTY		SHEET NO.
		DAL	COLLIN		284

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

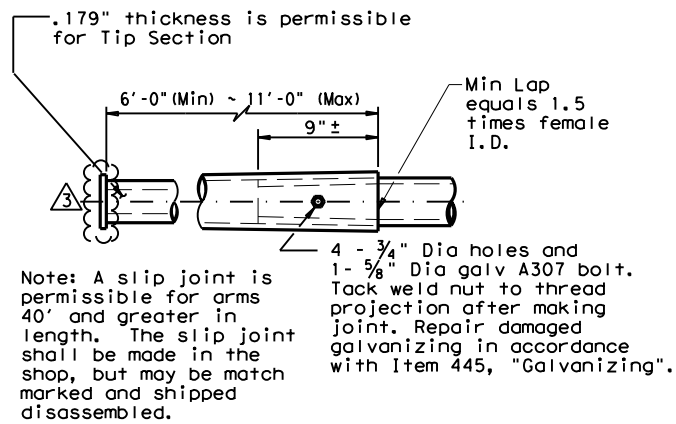

SLIP JOINT DETAIL

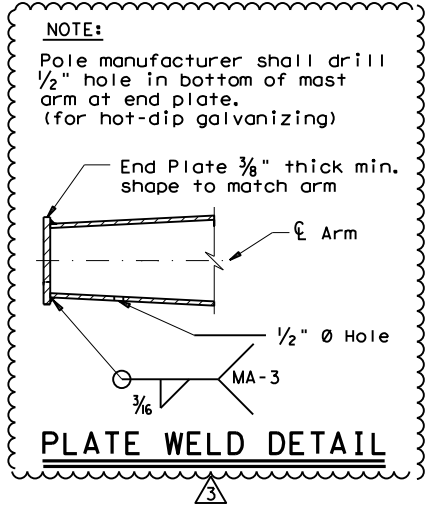


PLATE WELD DETAIL

Stainless steel bands (or Cables) and cast bracket as in "Astro-Brac", "Sky Bracket" or "Easy Bracket" with 1 1/2" Dia Threaded Coupling.

BRACKET ASSEMBLY

VIBRATION WARNING

Mast Arms of SMA and DMA structures and clamp-on Arms of LMA structures of approximately 40 ft or longer are subject to harmonic vertical vibrations in light wind conditions due to the aeroelastic characteristics of a few of the myriads of possible combinations of the following: signal numbers, weights and positions; existence/solidity of backplates; presence of additional attachments to the arm, such as signs and cameras; arm-wind orientation; and arm-pole stiffness.

Such vibrations may cause fatigue damage to the structure and may lead to galloping in moderate wind conditions which may further damage the structure and alarm the public. Tests have indicated that when wind is blowing toward the back side of signal heads having un-vented backplates attached the probability of unacceptable harmonic vibration and/or galloping is rather high.

If backplates are not required for improved visibility they should not be applied to the signal heads or, if they must be applied, they should be vented as a first and inexpensive measure to mitigate vibrations.

The traffic signal mast arms shall be visually inspected in 5 to 20 mph wind conditions after installation of signal heads and any attachments, including any required backplates. If vertical movements with a total excursion (maximum upward excursion to maximum downward excursion) of more than approximately 8" are observed at the arm tip, a damping plate shall be fitted to the arm. See "Damping Plate Mounting Details" on standard sheet, MA-DP-10.

This visual inspection shall be repeated after each modification of the structure that could affect its aeroelastic response. Excessive vibrations shall not be allowed to continue for more than two days.

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications thereto. Design Wind Speed equals 80 mph plus a 1.3 gust factor.


Poles are designed to support one 8'-0" luminaire arm, one 9'-0" internally lighted street name sign and one traffic signal arm with a length as tabulated. The specified luminaire load applied at the end of the luminaire arm equals 60 lbs vertical dead load plus the horizontal wind load on an effective projected area of 1.6 sq ft. The specified internally lighted street name sign load applied 4.5 ft from the centerline of the pole equals 85 lbs vertical dead load plus horizontal wind load on an effective projected area of 11.5 sq ft. The specified signal load applied at the end of the traffic signal arm equals 180 lbs vertical dead load plus the horizontal wind load on an effective projected area of 32.4 sq ft (actual area times drag coefficient).

See Standard Sheet "MA-D(DAL)" for pole details, "MA-C" for traffic signal arm connection details, "MA-C (ILSN)" for internally lighted street name sign arm connection details, "LUM-A" for luminaire arm and connection details, "SNS" for internally lighted street name sign details, and "TS-FD" for anchor bolt and foundation details. See "MA-C" for material specifications.

Fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. Materials, fabrication tolerances, and shipping practices shall meet the requirements of this sheet and Item 686, "Traffic Signal Pole Assemblies (Steel)".


Unless otherwise noted, all parts shall be galvanized in accordance with Item 445, "Galvanizing", after fabrication.

Deviation from the details and dimensions shown herein require submission of shop drawings in accordance with Item 441, "Steel Structures". Alternate designs are not acceptable.

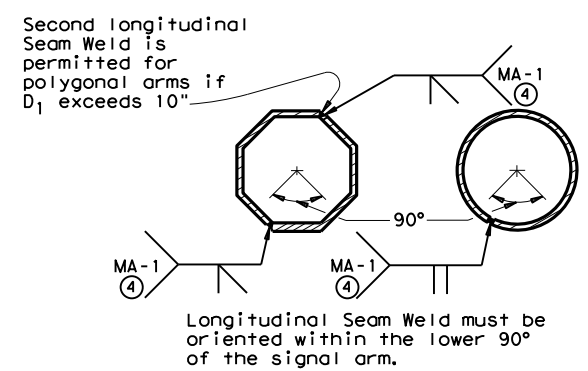

ARM WELD DETAIL

④ 60% Min. penetration
100% penetration within
6" of circumferential
base welds.

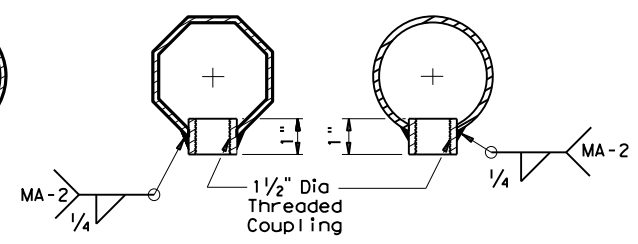

ARM COUPLING DETAILS

REPLACED TENON DETAIL WITH PLATE WELD DETAIL (2/12).
REPLACED "MA-D" WITH "MA-D(DAL)" (2/12).

TRAFFIC SIGNAL SUPPORT STRUCTURES
SINGLE MAST ARM ASSEMBLY
(80 MPH WIND ZONE)
SMA-80(2)-12(DAL)




© TxDOT August 1995		DN: MS	CK: JSY	DW: MMF	CK: JSY
REVISIONS		CONT	SECT	JOB	HIGHWAY
5-96	1392	01	044		FM 1378
1-12	DIST		COUNTY	SHEET NO.	
	DAL		COLLIN	285	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/11/2022 1:04:29 PM
 FILE: D:\MARK D-DRIVE\SIGNING STANDARDS WITH PRINT SET\tsr3-13.dgn

REQUIREMENTS FOR INDEPENDENT MOUNTED ROUTE SIGNS



SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	ALL OTHERS	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE A SHEETING
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND & BORDERS	ALL OTHERS	TYPE B or C SHEETING

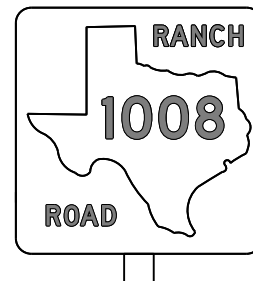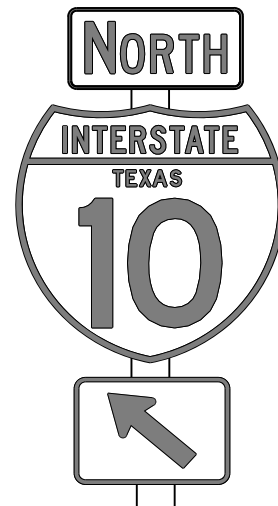

TYPICAL EXAMPLES

REQUIREMENTS FOR BLUE, BROWN & GREEN D AND I SERIES GUIDE SIGNS

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	ALL	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE D SHEETING
LEGEND, SYMBOLS & BORDERS	ALL OTHERS	TYPE B OR C SHEETING

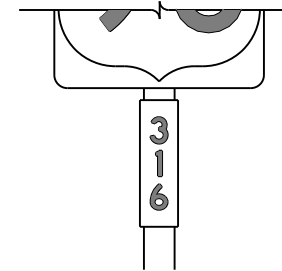

TYPICAL EXAMPLES

GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- White legend shall use the Clearview Alphabet. The following Clearview fonts shall be used to replace the existing white Federal Highway Administration (FHWA) Standard Highway Alphabets, when not specified in the SHSD, or in the plans.

B	CV-1W
C	CV-2W
D	CV-3W
E	CV-4W
Emod	CV-5WR
F	CV-6W

- Route sign legend (ie. IH, US, SH and FM shields) shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets B, C, D, E, Emod or F).
- Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Independent mounted route sign with white or colored legend and borders shall be applied by screening process with transparent color ink, transparent colored overlay film to white background sheeting or cut-out white sheeting to colored background sheeting, or combination thereof. White legend, symbols and borders on all other signs shall be cut-out white sheeting applied to colored background sheeting.
- Information regarding borders and radii for signs is found in the "Standard Highway Sign Designs for Texas". Dimensions shown and described for borders and corner radii on parent sign are nominal. Borders may vary in width as much as 1/2 inch. Corner radii above 3 inches may vary in width as much as 1 inch. Borders and corner radii within a parent sign must be of matching widths. The sign area outside the corner radius should be trimmed or rounded.
- Sign substrate shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative.
- Mounting details of roadside signs are shown in the "SMD series" Standard Plan Sheets.

DEPARTMENTAL MATERIAL SPECIFICATIONS	
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080
7.5 to 15	0.100
Greater than 15	0.125

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website:
<http://www.txdot.gov/>


Texas Department of Transportation		<i>Traffic Operations Division Standard</i>
<h1 style="margin: 0;">TYPICAL SIGN REQUIREMENTS</h1> <h2 style="margin: 0;">TSR(3) - 13</h2>		
FILE: tsr3-13.dgn	DN: TxDOT	CK: TxDOT
©TxDOT October 2003	CON: SECT	JOB: HIGHWAY
REVISIONS	1392 01	044, ETC FM 1378, ETC
12-03 7-13	DIST: COUNTY	SHEET NO.
9-08	DAL COLLIN	286

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/11/2022 1:04:30 PM
 FILE: D:\MARK D-DRIVE\SIGNING STANDARDS WITH PRINT SET\tsr-4-13.dgn

REQUIREMENTS FOR RED BACKGROUND REGULATORY SIGNS

(STOP, YIELD, DO NOT ENTER AND WRONG WAY SIGNS)

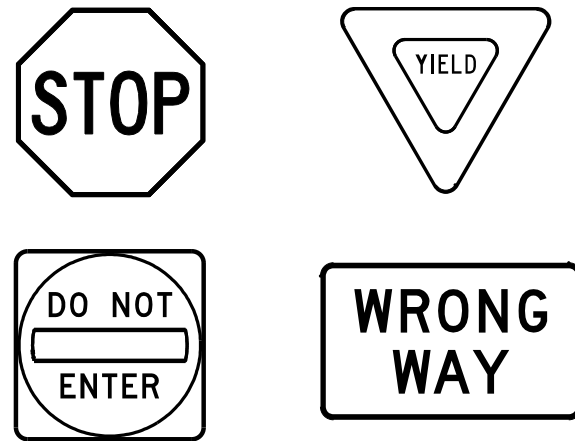

REQUIREMENTS FOR FOUR SPECIFIC SIGNS ONLY

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	WHITE	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE B OR C SHEETING
LEGEND	RED	TYPE B OR C SHEETING

REQUIREMENTS FOR WHITE BACKGROUND REGULATORY SIGNS


(EXCLUDING STOP, YIELD, DO NOT ENTER AND WRONG WAY SIGNS)



TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	ALL OTHERS	TYPE B OR C SHEETING
LEGEND, BORDERS AND SYMBOLS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND, BORDERS AND SYMBOLS	ALL OTHER	TYPE B OR C SHEETING

REQUIREMENTS FOR WARNING SIGNS

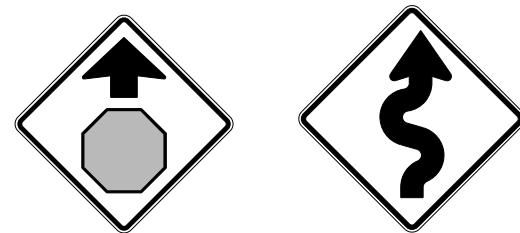

TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	FLOURESCENT YELLOW	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND & SYMBOLS	ALL OTHER	TYPE B OR C SHEETING

REQUIREMENTS FOR SCHOOL SIGNS



TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	FLOURESCENT YELLOW GREEN	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND, BORDERS AND SYMBOLS	BLACK	ACRYLIC NON-REFLECTIVE FILM
SYMBOLS	RED	TYPE B OR C SHEETING

GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- Sign legend shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets (B, C, D, E, Emod or F).
- Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Black legend and borders shall be applied by screening process or cut-out acrylic non-reflective black film to background sheeting, or combination thereof.
- White legend and borders shall be applied by screening process with transparent colored ink, transparent colored overlay film to white background sheeting or cut-out white sheeting to colored background sheeting, or combination thereof.
- Colored legend shall be applied by screening process with transparent colored ink, transparent colored overlay film or colored sheeting to background sheeting, or combination thereof.
- Sign substrate shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative.
- Mounting details for roadside mounted signs are shown in the "SMD series" Standard Plan Sheets.

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080
7.5 to 15	0.100
Greater than 15	0.125

DEPARTMENTAL MATERIAL SPECIFICATIONS	
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website:
<http://www.txdot.gov/>


		<i>Traffic Operations Division Standard</i>	
<h2>TYPICAL SIGN REQUIREMENTS</h2>			
<h3>TSR(4) - 13</h3>			
FILE:	tsr4-13.dgn	DN:	TxDOT
© TxDOT	October 2003	CK:	TxDOT
REVISIONS		DW:	TxDOT
12-03	7-13	CK:	TxDOT
9-08		CON:	SECT
		1392	01
		JOB	HIGHWAY
		044, ETC	FM 1378, ETC
DIST	COUNTY	SHEET NO.	
DAL	COLLIN	287	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 1/11/2022 1:04:31 PM
 FILE: D:\MARK D-DRIVE\SIGNING STANDARDS WITH PRINT SET\tsr5-13.dgn

ARROW DETAILS


for Large Ground-Mounted and Overhead Guide Signs




Type A




Type B



E-3



E-4



Down Arrow

TYPE	LETTER SIZE	USE
A-1	10.67" U/L and 10" Caps	Single Lane Exits
A-2	13.33" U/L and 12" Caps	
A-3	16" & 20" U/L	
B-1	10.67" U/L and 10" Caps	Multiple Lane Exits
B-2	13.33" U/L and 12" Caps	
B-3	16" & 20" U/L	

CODE	USED ON SIGN NO.
E-3	E5-1aT
E-4	E5-1bT


NOTE

Arrow dimensions are shown in the "Standard Highway Sign Designs for Texas" manual.

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website.


<http://www.txdot.gov/>

SIGN BLANK PUNCHING DETAILS FOR ATTACHMENTS WHEN SPECIFIED TO BE TYPE A ALUMINUM SIGNS (FOR MOUNTING TO GUIDE SIGN FACE)

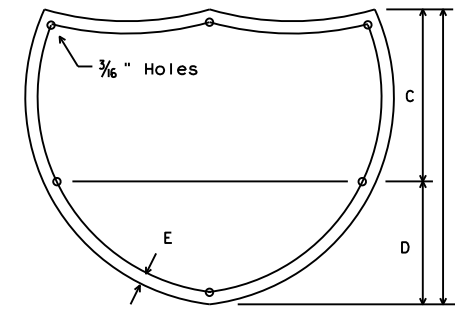


INTERSTATE ROUTE MARKERS

A	C	D	E
36	21	15	1 1/2
48	28	20	1 3/4

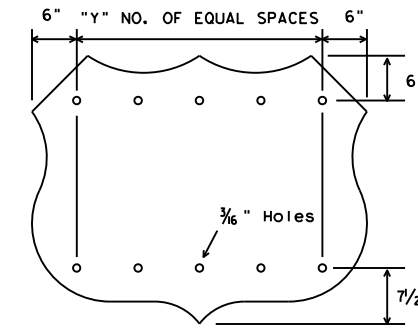


U.S. ROUTE MARKERS

Sign Size	"Y"
24x24	2
30x24	3
36x36	3
45x36	4
48x48	4
60x48	5

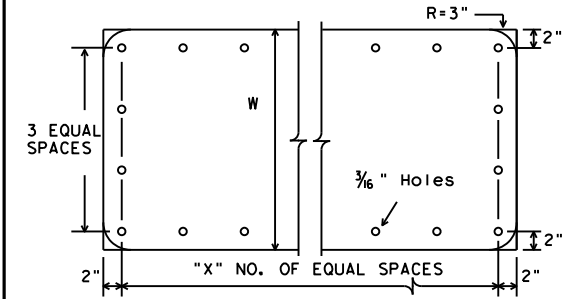


STATE ROUTE MARKERS

No. of Digits	W	X
4	24	4
4	36	5
4	48	6
3	24	3
3	36	4
3	48	5

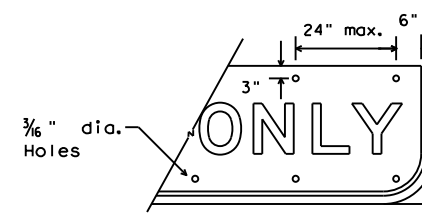

EXIT ONLY PANEL


MOUNTING DETAILS OF ATTACHMENTS TO GUIDE SIGN FACE ("EXIT ONLY" AND "LEFT EXIT" PANELS, ROUTE MARKERS AND OTHER ATTACHMENTS)

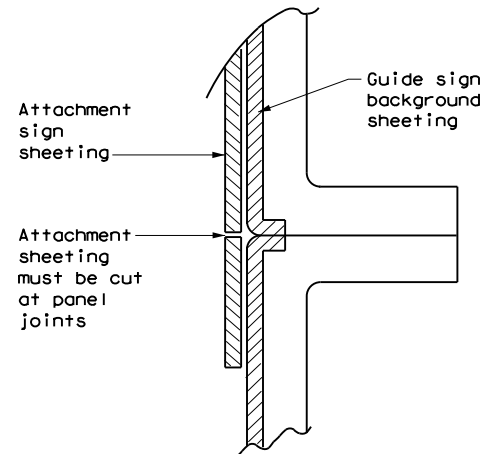


DIRECT APPLIED ATTACHMENT

NOTE:

- Sheeting for legend, symbols, and borders must be cut at panel joints.
- Direct applied attachment signs will be subsidiary to "Aluminum Signs" or "Fiberglass Signs".

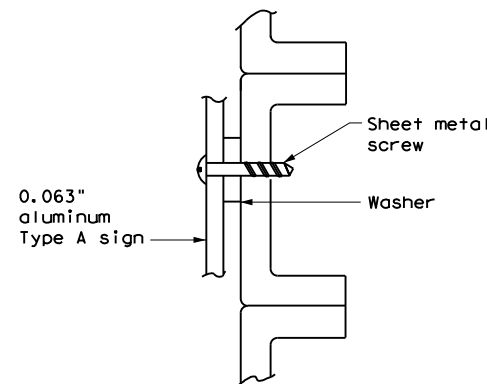

SCREW ATTACHMENT

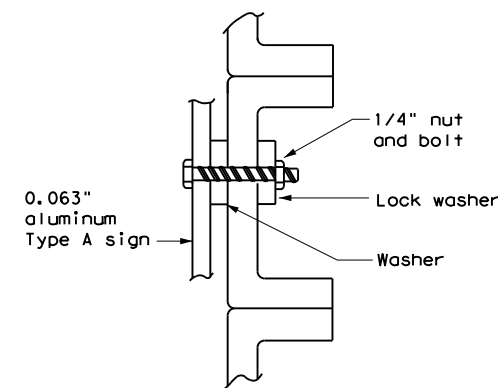


NUT/BOLT ATTACHMENT


NOTE:

Furnish Type A aluminum sign attachments only when specified in the plans. These signs will be paid for under "Aluminum Signs".

ARROW DETAILS for Destination Signs (Type D)

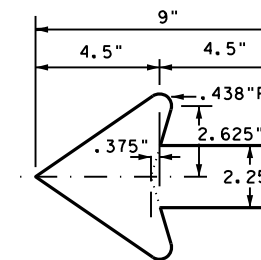

Standard arrow to be used with 6 inch letters.

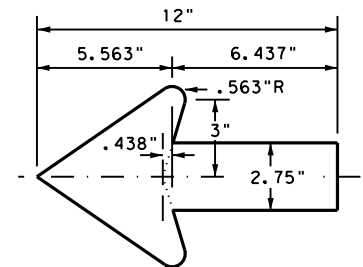

Standard arrow to be used with 8 inch letters.



TYPICAL SIGN REQUIREMENTS

TSR (5) - 13

FILE: tsr5-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT October 2003	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044, ETC	FM 1378, ETC
12-03 7-13	DIST	COUNTY	SHEET NO.	
9-08	DAL	COLLIN	288	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for damages resulting from its use.

DATE: 1/11/2022 1:04:32 PM
 FILE: D:\MARK D-DRIVE\SIGNING STANDARDS WITH PRINT SET\SMDGEN - 08.DGN

SIGN SUPPORT DESCRIPTIVE CODES

(Descriptive Codes correspond to project estimate and quantities sheets)

SM RD SGN ASSM TY XXXXX(X)XX(X-XXXX)


Post Type
 FRP = Fiberglass Reinforced Plastic Pipe (see SMD(FRP))
 TWT = Thin-Walled Tubing (see SMD(TWT))
 10BWG = 10 BWG Tubing (see SMD(SLIP-1) to (SLIP-3))
 S80 = Schedule 80 Pipe (see SMD(SLIP-1) to (SLIP-3))

Number of Posts (1 or 2)

Anchor Type
 UA = Universal Anchor - Concreted (see SMD(FRP) and (TWT))
 UB = Universal Anchor - Bolted down (see SMD(FRP) and (TWT))
 WS = Wedge Anchor Steel - (see SMD(TWT))
 WP = Wedge Anchor Plastic (see SMD(TWT))
 SA = Slipbase - Concreted (see SMD(SLIP-1) to (SLIP-3))
 SB = Slipbase - Bolted Down (see SMD(SLIP-1) to (SLIP-3))

Sign Mounting Designation
 P = Prefab. "Plain" (see SMD(SLIP-1) to (SLIP-3), (TWT), (FRP))
 T = Prefab. "T" (see SMD(SLIP-1) to (SLIP-3), (TWT))
 U = Prefab. "U" (see SMD(SLIP-1) to (SLIP-3))
 IF REQUIRED
 1EXT or 2EXT = Number of Extensions (see SMD(SLIP-1) to (SLIP-3), (TWT))
 BM = Extruded Wind Beam (see SMD(SLIP-1) to (SLIP-3))
 WC = 1.12 #/ft Wing Channel (see SMD(SLIP-1) to (SLIP-3))
 EXAL = Extruded Aluminum Sign Panels (see SMD(SLIP-3))


REQUIRED CLEARANCE FOR BREAKAWAY SUPPORT

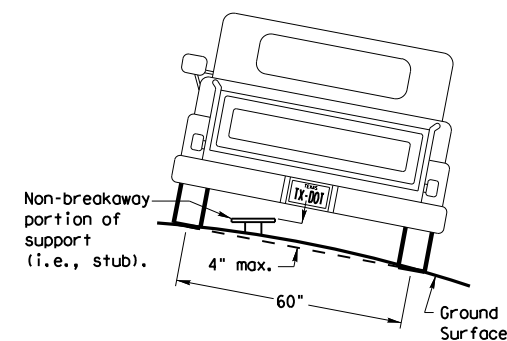

To avoid vehicle undercarriage snagging, any substantial remains of a breakaway support, when it is broken away, should not project more than 4 inches above a 60-inch chord (i.e., typical space between wheel paths).


SIGN LOCATION

PAVED SHOULDERS

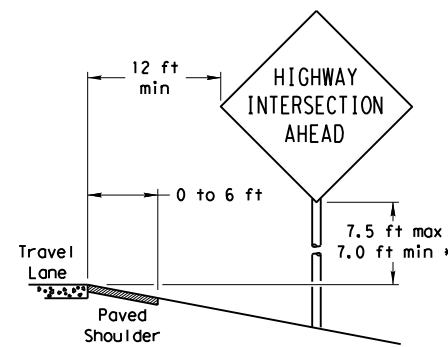

LESS THAN 6 FT. WIDE


When the shoulder is 6 ft. or less in width, the sign must be placed at least 12 ft. from the edge of the travel lane.

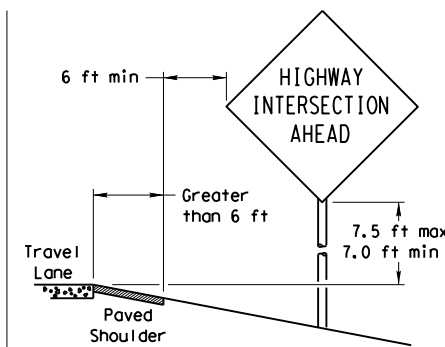

GREATER THAN 6 FT. WIDE


When the shoulder is greater than 6 ft in width, the sign must be placed at least 6 ft. from the edge of the shoulder.

T-INTERSECTION

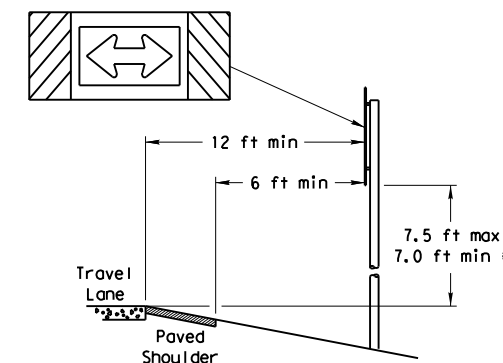


When this sign is needed at the end of a two-lane, two way roadway, the right edge of the sign should be in line with the centerline of the roadway. Place as close to ROW as practical.

No more than 2 sign posts should be located within a 7 ft. circle.

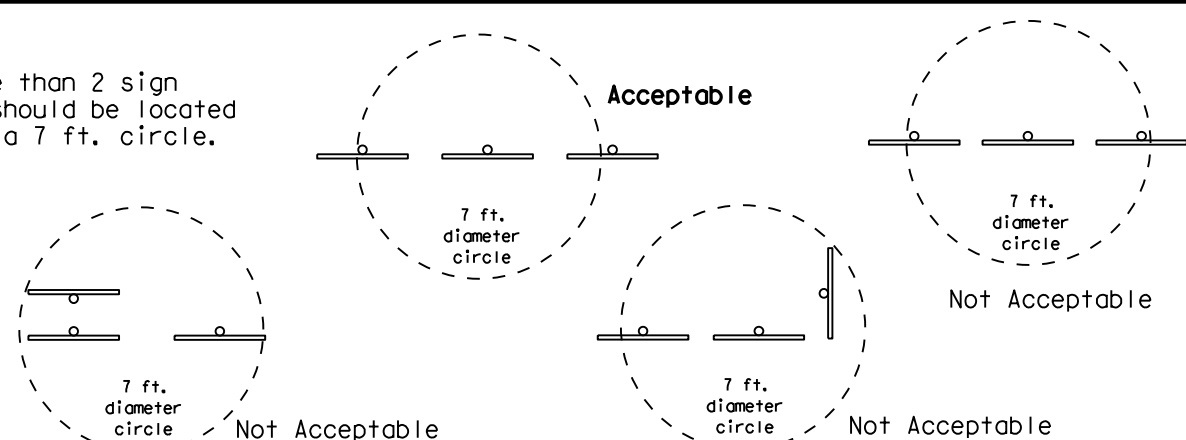


BEHIND BARRIER

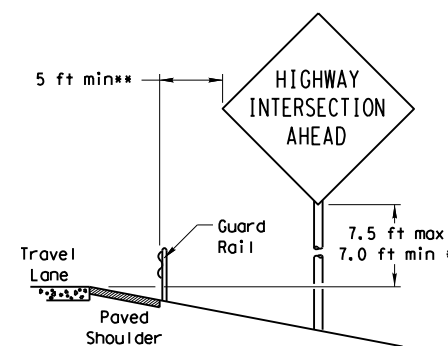


BEHIND GUARDRAIL

**Sign clearance based on distance required for proper guard rail or concrete barrier performance.

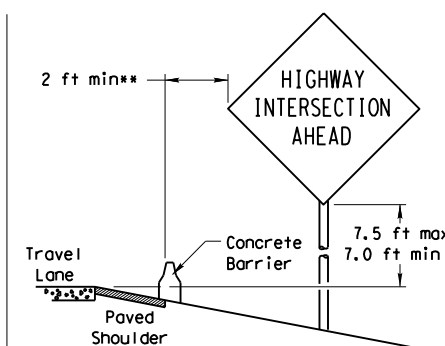

BEHIND CONCRETE BARRIER

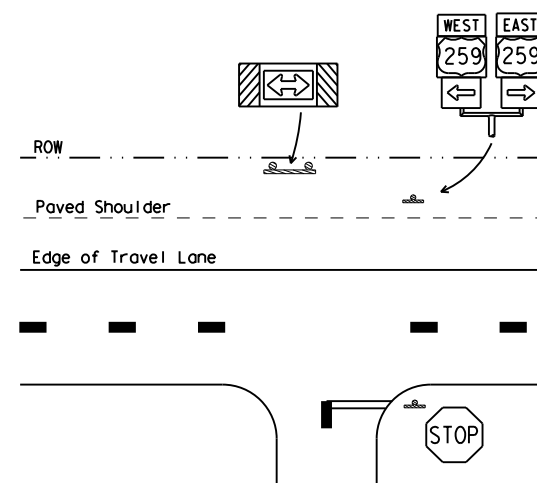

* Signs shall be mounted using the following condition that results in the greatest sign elevation:


- (1) a minimum of 7 to a maximum of 7.5 feet above the edge of the travel lane or
- (2) a minimum of 7 to a maximum of 7.5 feet above the grade at the base of the support when sign is installed on the backslope.

The maximum values may be increased when directed by the Engineer.

See the Traffic Operations Division website for detailed drawings of sign clamps, Triangular Slipbase System components and Wedge Anchor System components.

The website address is:
<http://www.txdot.gov/publications/traffic.htm>

TYPICAL SIGN ATTACHMENT DETAIL

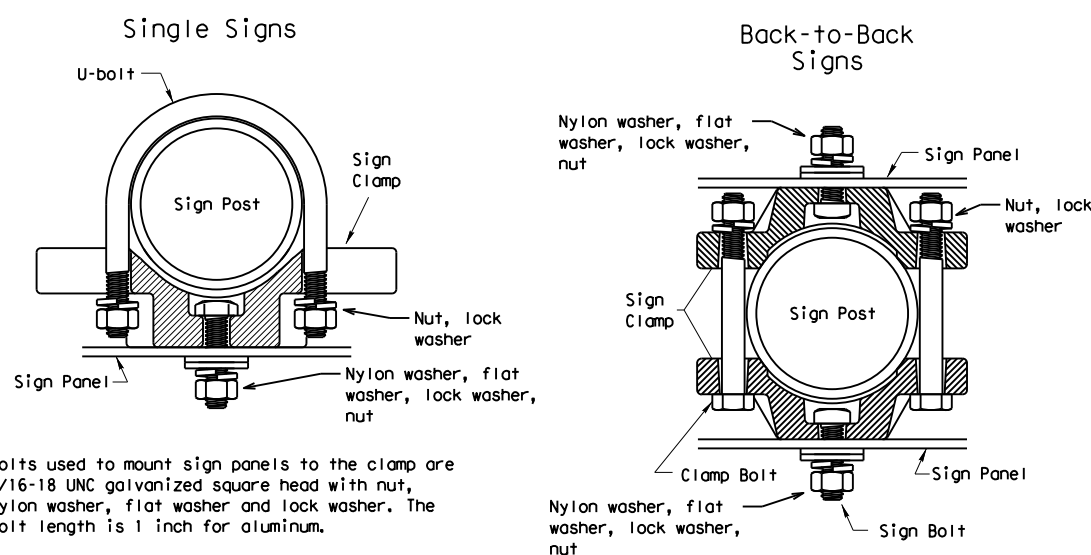


Bolts used to mount sign panels to the clamp are 5/16-18 UNC galvanized square head with nut, nylon washer, flat washer and lock washer. The bolt length is 1 inch for aluminum.

When two sign clamps are used to mount signs back-to-back, use a 5/16-18 UNC galvanized hex head per ASTM A307 with nut and helical-spring lock washer. The approximate bolt lengths for various post sizes and sign clamp types are given in the table at right. The bolt length may need to be adjusted depending upon field conditions.

Sign clamps may be either the specific size clamp or the universal clamp.


Pipe Diameter	Approximate Bolt Length	
	Specific Clamp	Universal Clamp
2" nominal	3"	3 or 3 1/2"
2 1/2" nominal	3 or 3 1/2"	3 1/2 or 4"
3" nominal	3 1/2 or 4"	4 1/2"

SIGNS WITH PLAQUES

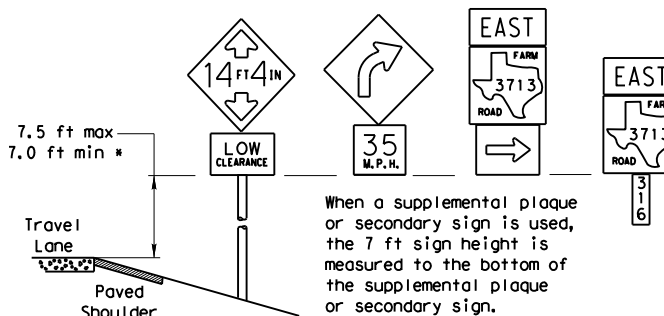


When a supplemental plaque or secondary sign is used, the 7 ft sign height is measured to the bottom of the supplemental plaque or secondary sign.

CURB & GUTTER OR RAISED ISLAND

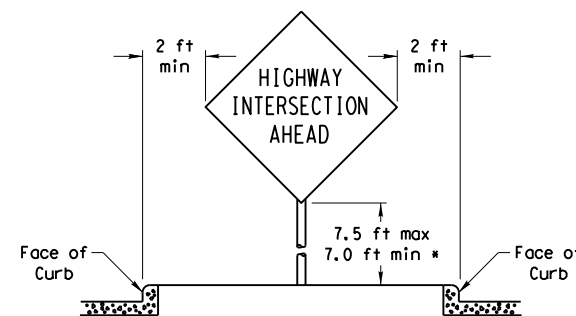

RESTRICTED RIGHT-OF-WAY (When 6 ft min. is not possible.)

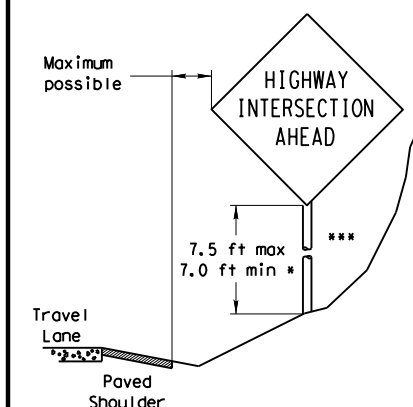

Right-of-way restrictions may be created by rocks, water, vegetation, forest, buildings, a narrow island, or other factors.

In situations where a lateral restriction prevents the minimum horizontal clearance from the edge of the travel lane, signs should be placed as far from the travel lane as practical.

*** Post may be shorter if protected by guardrail or if Engineer determines the post could not be hit due to extreme slope.



SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS GENERAL NOTES & DETAILS


SMD(GEN) - 08

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		1392	01	044, ETC	FM 1378, ETC
		DIST	COUNTY		SHEET NO.
		DAL	COLLIN		289


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/11/2022 1:04:33 PM
 FILE: D:\MARK D-DRIVE\SIGNING STANDARDS WITH PRINT SET\SMD (slip-1) -08 dal.dgn

TRIANGULAR SLIPBASE INSTALLATION GENERAL REQUIREMENTS



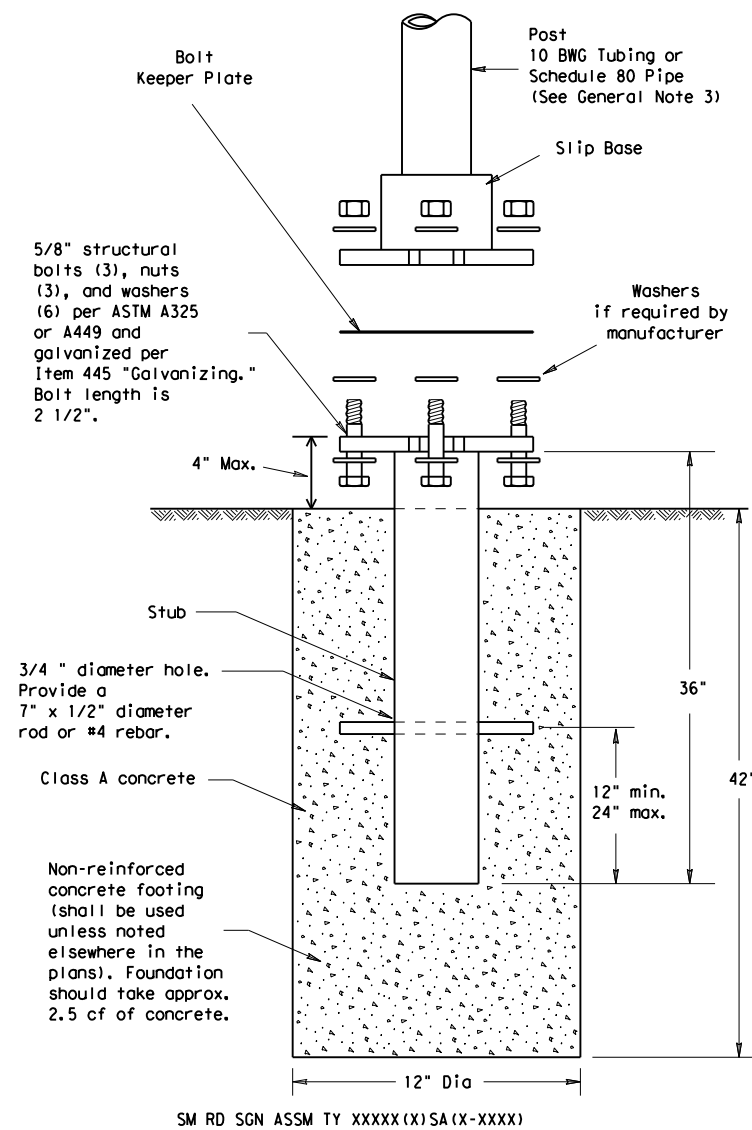


CONCRETE ANCHOR

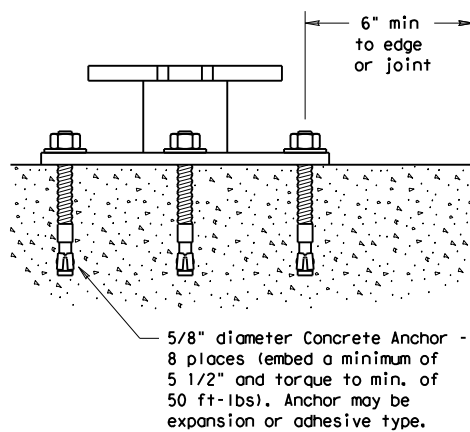

Concrete anchor consists of 5/8" diameter stud bolt with UNC series bolt threads on the upper end. Heavy hex nut per ASTM A563, and hardened washer per ASTM F436. The stud bolt shall have a minimum yield and ultimate tensile strength of 50 and 75 KSI, respectively. Nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing." Adhesive type anchors shall have stud bolts installed with Type III epoxy per DMS-6100, "Epoxyes and Adhesives." Adhesive anchors may be loaded after adequate epoxy cure time per the manufacturer's recommendations. Top of bolt shall extend at least flush with top of the nut when installed. The anchor, when installed in 4000 psi normal-weight concrete with a 5 1/2" minimum embedment, shall have a minimum allowable tension and shear of 3900 and 3100 psi, respectively.

NOTE
 The devices shall be installed per manufacturers' recommendations. Installation procedures shall be provided to the Engineer by Contractor.

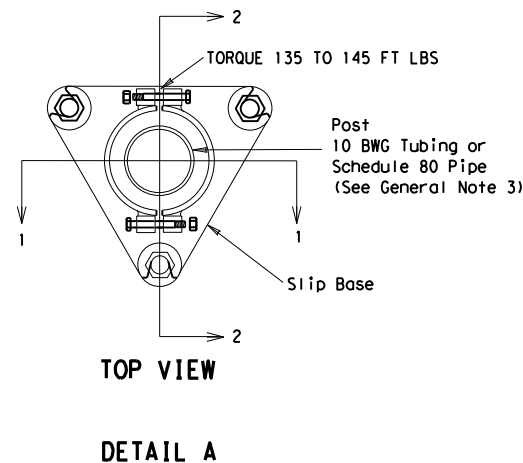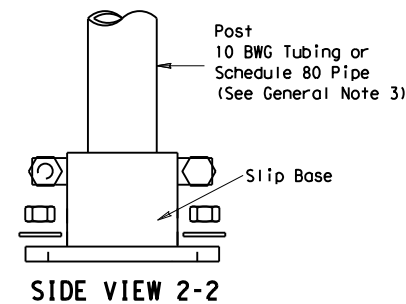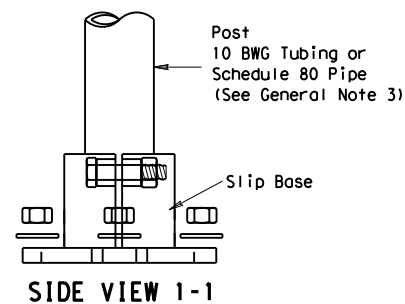

GENERAL NOTES:

- Slip base shall be permanently marked to indicate manufacturer. Method, design, and location of marking are subject to approval of the TxDOT Traffic Standards Engineer.
- Material used as post with this system shall conform to the following specifications:
 - 10 BWG Tubing (2.875" outside diameter)
 - 0.134" nominal wall thickness
 - Seamless or electric-resistance welded steel tubing or pipe
 - Steel shall be HSLAS Gr 55 per ASTM A1011 or ASTM A1008
 - Other steels may be used if they meet the following:
 - 55,000 PSI minimum yield strength
 - 70,000 PSI minimum tensile strength
 - 20% minimum elongation in 2"
 - Wall thickness (uncoated) shall be within the range of 0.122" to 0.138"
 - Outside diameter (uncoated) shall be within the range of 2.867" to 2.883"
 - Galvanization per ASTM A123 or ASTM A653 G210. For precoated steel tubing (ASTM A653), recoat tube outside diameter weld seam by metallizing with zinc wire per ASTM B833.
 - Schedule 80 Pipe (2.875" outside diameter)
 - 0.276" nominal wall thickness
 - Steel tubing per ASTM A500 Gr C
 - Other seamless or electric-resistance welded steel tubing or pipe with equivalent outside diameter and wall thickness may be used if they meet the following:
 - 46,000 PSI minimum yield strength
 - 62,000 PSI minimum tensile strength
 - 21% minimum elongation in 2"
 - Wall thickness (uncoated) shall be within the range of 0.248" to 0.304"
 - Outside diameter (uncoated) shall be within the range of 2.855" to 2.895"
 - Galvanization per ASTM A123
- See the Traffic Operations Division website for detailed drawings of sign clamps and Texas Universal Triangular Slipbase System components. The website address is: <http://www.txdot.gov/publications/traffic.htm>
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.

ASSEMBLY PROCEDURE

Foundation

- Prepare 12-inch diameter by 42-inch deep hole. If solid rock is encountered, the depth of the foundation may be reduced such that it is embedded a minimum of 18 inches into the solid rock.
- The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor-driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Concrete shall be Class A.
- Push the pipe end of the slip base stub into the center of the concrete. Rotate the stub back and forth while pushing it down into the concrete to assure good contact between the concrete and stub. Continue to work the stub into the concrete until it is between 2 to 4 inches above the ground.
- Plumb the stub. Allow a minimum of 4 days to set, unless otherwise directed by the Engineer.
- The triangular slipbase system is multidirectional and is designed to release when struck from any direction.

Support

- Cut support so that the bottom of the sign will be 7 to 7.5 feet above the edge of the travelway (i.e., edge of the closest lane) when slip plate is below the edge of pavement or 7 to 7.5 feet above slip plate when the slip plate is above the edge of the travelway. The cut shall be plumb and straight.
- Attach sign to support using connections shown. When multiple signs are installed on the same support, ensure the minimum clearance between each sign is maintained. See SMD (SLIP-2) for clearances based on sign types.

ADDED DETAIL A FOR CLAMP BASE

10-2010

















SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS TRIANGULAR SLIPBASE SYSTEM

SMD (SLIP-1) -08 (DAL)

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
12-10 (DISTRICT)		1392	01	044, ETC	FM 1378, ETC
ADDED CLAMP BASE DETAIL FOR SLIP BASE INSTALLATION		DIST	COUNTY	SHEET NO.	
		DAL	COLL TN	290	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/11/2022 1:04:34 PM
 FILE: D:\MARK D-DRIVE\SIGNING STANDARDS WITH PRINT SET\SMD (SLIP-2) - 08.DGN

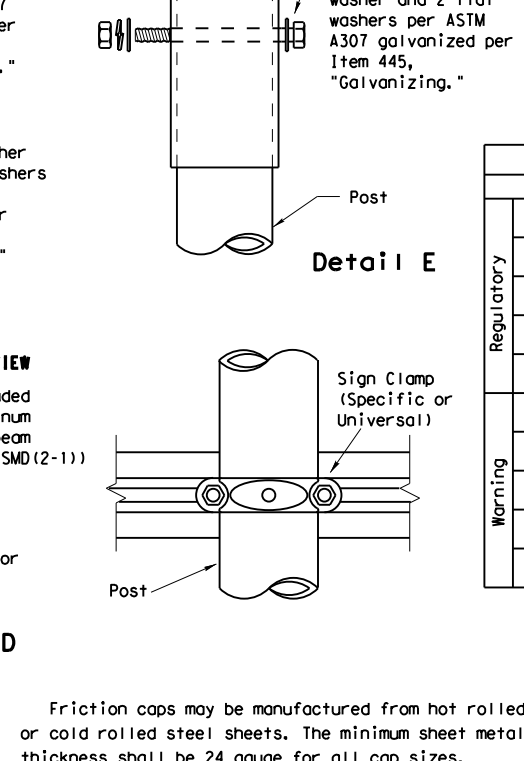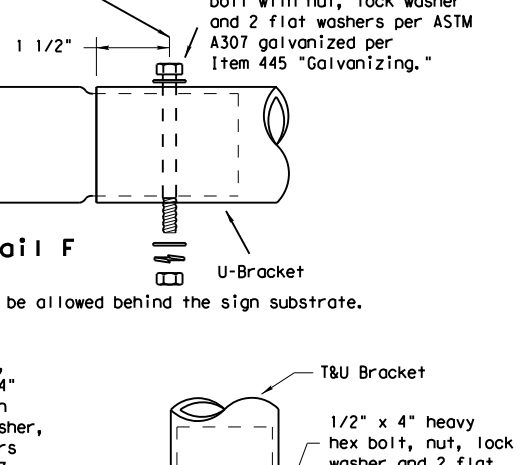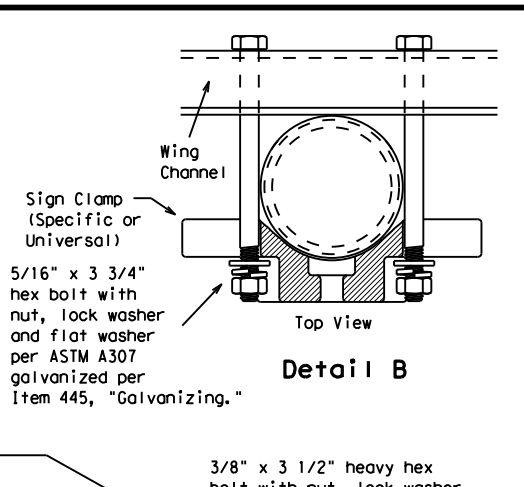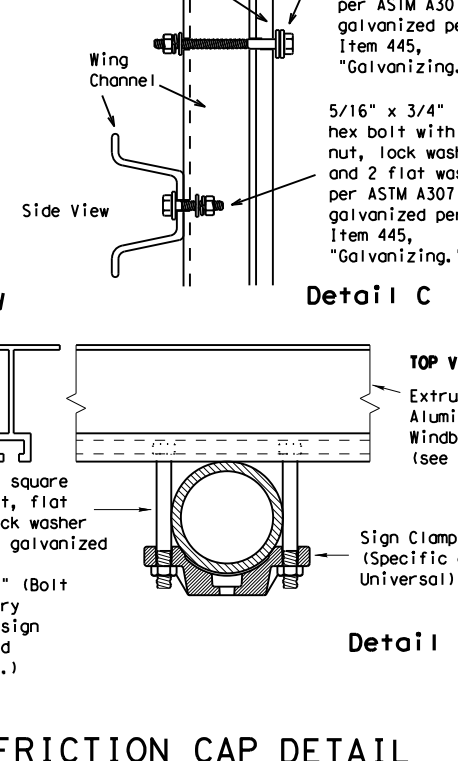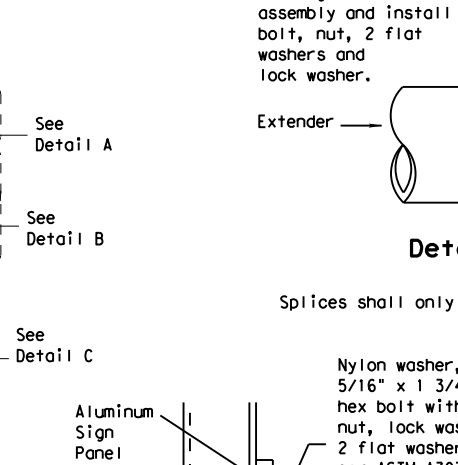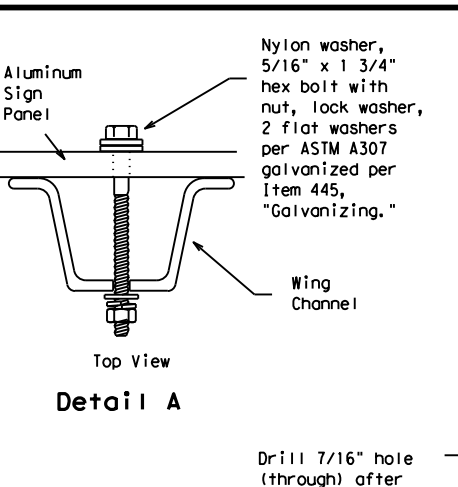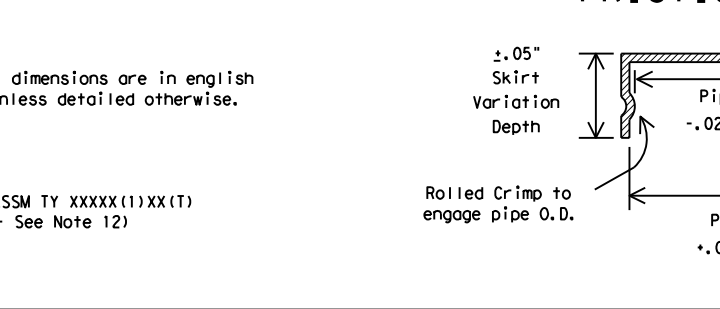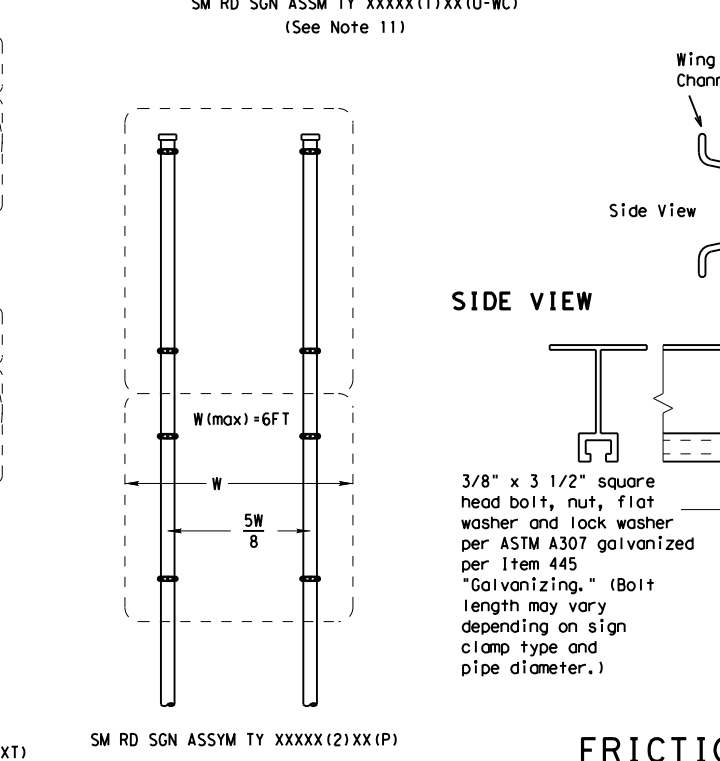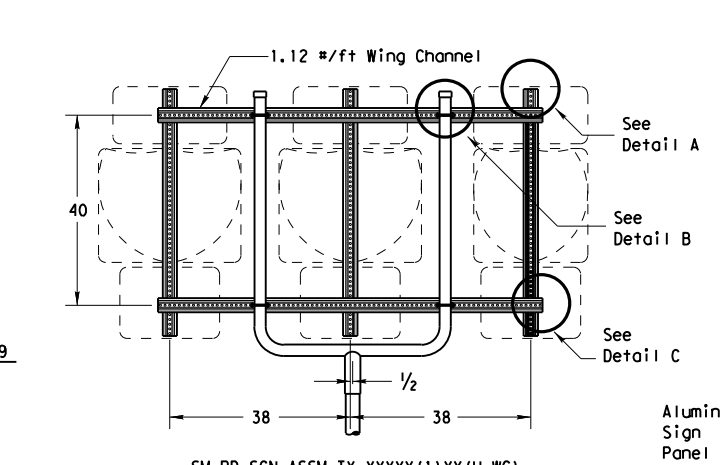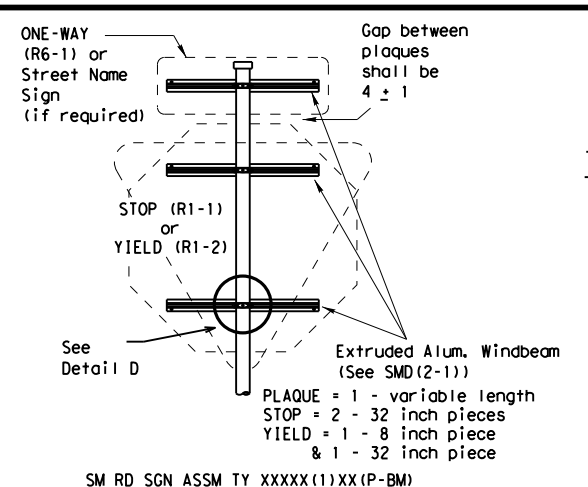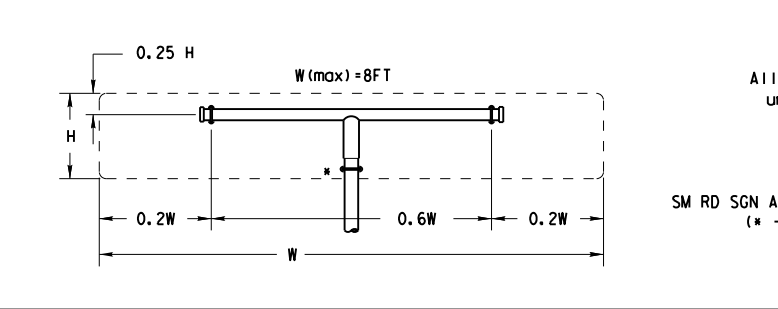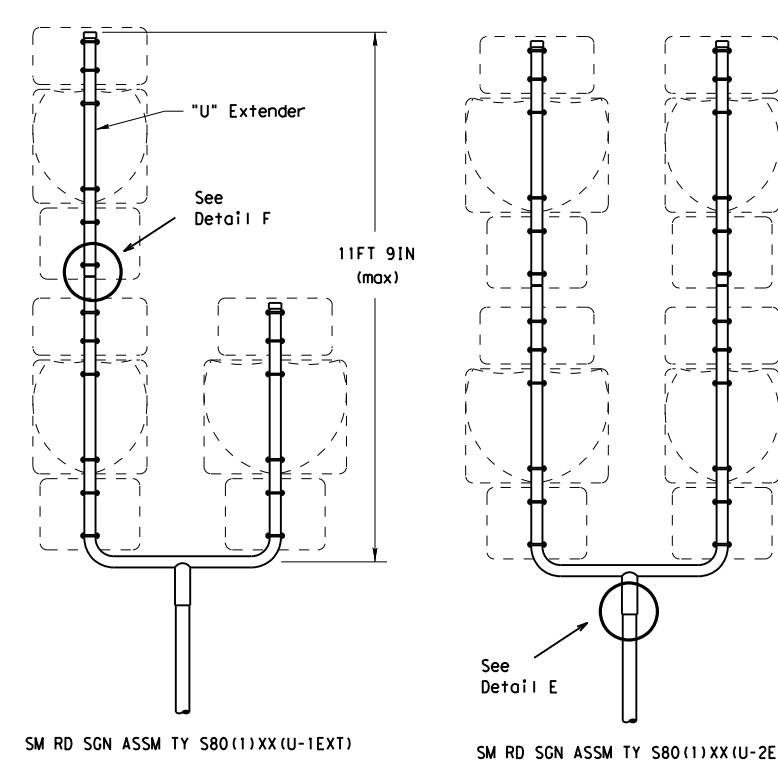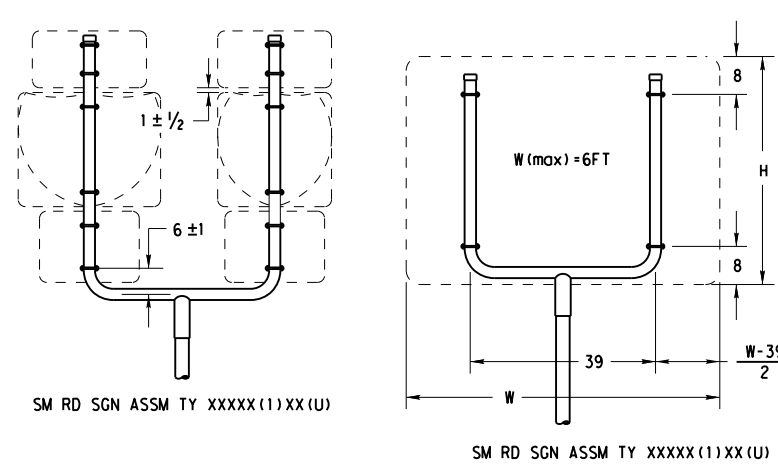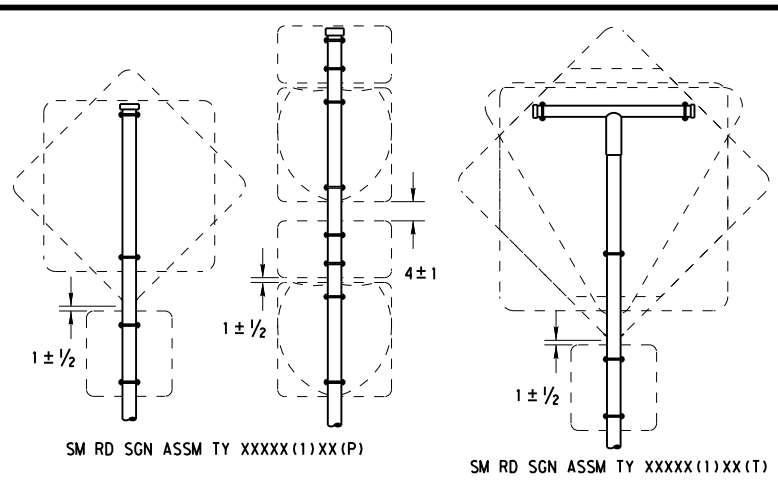

Friction caps may be manufactured from hot rolled or cold rolled steel sheets. The minimum sheet metal thickness shall be 24 gauge for all cap sizes. The rim edges shall be reasonably straight and smooth. Caps shall be sized and formed in such a manner as to produce a drive-on friction fit and have no tendency to rock when seated on the pipe. The depth shall be sufficient to give positive protection against entrance of rainwater. They shall be free of sharp creases or indentations and show no evidence of metal fracture. Caps shall have an electrodeposited coating of zinc in accordance with the requirements of ASTM B633 Class FE/ZN 8.

GENERAL NOTES:

SIGN SUPPORT	# OF POSTS	MAX. SIGN AREA
10 BWG	1	16 SF
10 BWG	2	32 SF
Sch 80	1	32 SF
Sch 80	2	64 SF

- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Additional route markers may be added vertically, provided the total sign area does not exceed the maximum allowable amount per Note 1.
- Additional sign clamp required on the "T-bracket" post for 24 inch height signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.
- Sign blanks shall be the sizes and shapes shown on the plans.

	REQUIRED SUPPORT	
	SIGN DESCRIPTION	SUPPORT
Regulatory	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
Warning	48x60-inch signs	TY S80(1)XX(T)
	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
	48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)
	Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)


Texas Department of Transportation
 Traffic Operations Division

SIGN MOUNTING DETAILS
SMALL ROADSIDE SIGNS
TRIANGULAR SLIPBASE SYSTEM
SMD(SLIP-2) - 08


© TxDOT July 2002		DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
9-08	REVISIONS	CON: 1392	SECT: 01	JOB: 044, ETC	HIGHWAY: FM 1378, ETC
		DIST: DAL	COUNTY: COLLTN	SHEET NO.: 291	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 1/11/2022 1:04:35 PM
 FILE: D:\MARK D-DRIVE\SIGNING STANDARDS WITH PRINT SET\SMD (SLIP-3) - 08.DGN

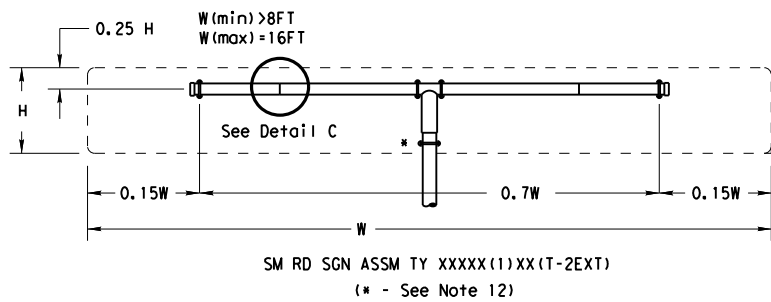


SM RD SGN ASSM TY XXXX(1)XX(T-2EXT)
 (* - See Note 12)

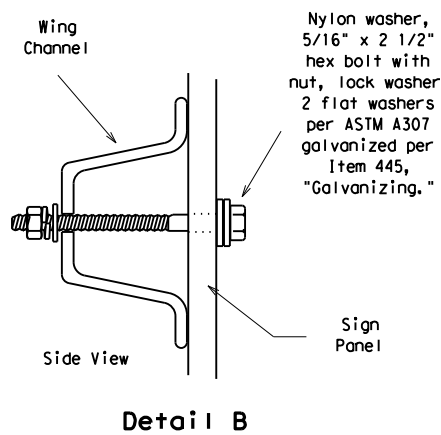


Detail B

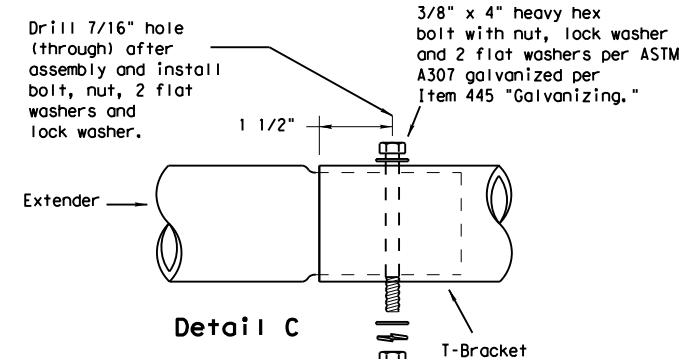

Detail C
 Splices shall only be allowed behind the sign substrate.

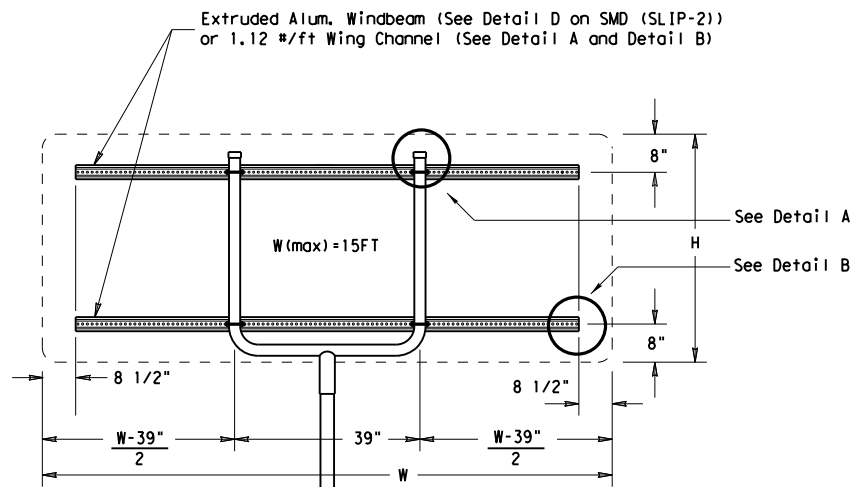


SM RD SGN ASSM TY XXXX(1)XX(U-XX)

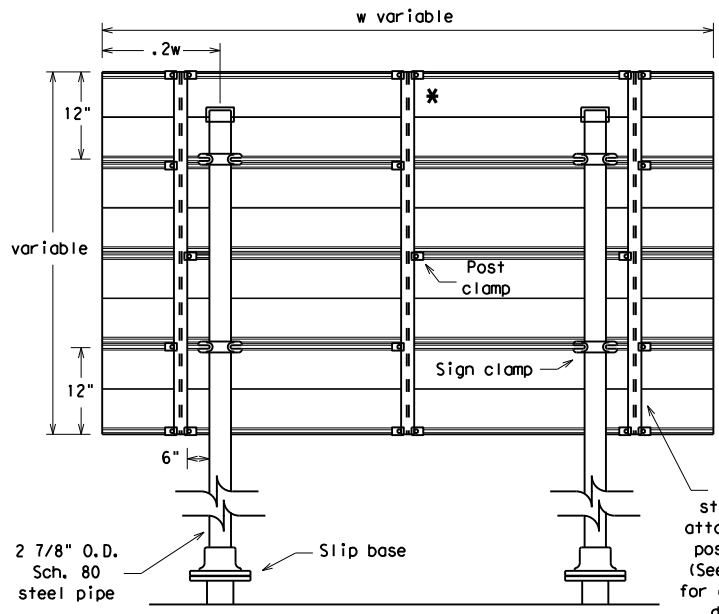


Typical Sign Mount
 SM RD SGN ASSM TY S80(2)XX(IP-EXAL)


* Additional stiffener placed at approximate center of signs when sign width is greater than 10'.



Detail E

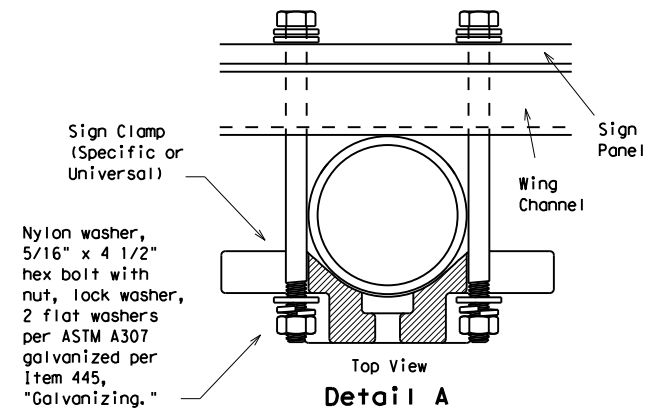


Detail A

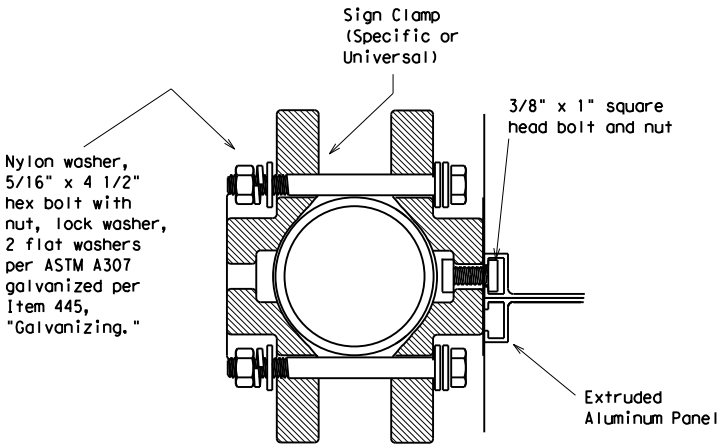


Detail D

EXTRUDED ALUMINUM SIGN WITH T BRACKET

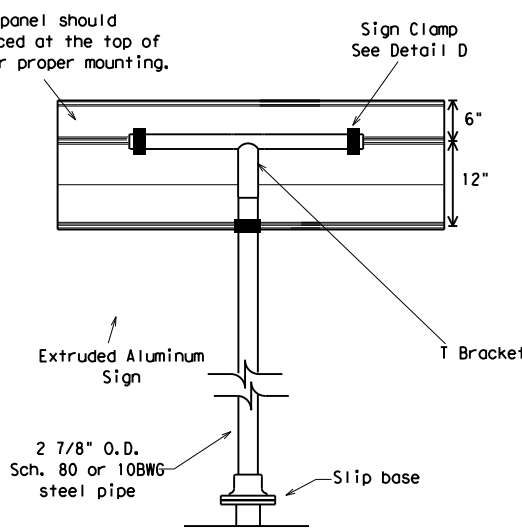

Extruded Aluminum Sign With T Bracket

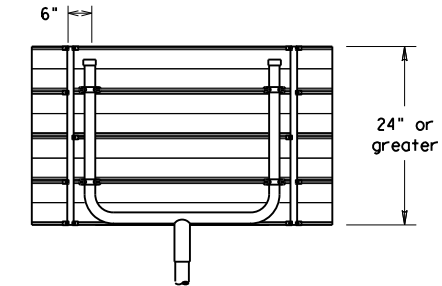

Use Extruded Alum. Windbeam as stiffeners See SMD (2-1) for additional details
 See Detail E for clamp installation

GENERAL NOTES:

- | SIGN SUPPORT | # OF POSTS | MAX. SIGN AREA |
|--------------|------------|----------------|
| 10 BWG | 1 | 16 SF |
| 10 BWG | 2 | 32 SF |
| Sch 80 | 1 | 32 SF |
| Sch 80 | 2 | 64 SF |
- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Sign blanks shall be the sizes and shapes shown on the plans.
- Additional sign clamp required on the "T-bracket" post for 24 inch high signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.

REQUIRED SUPPORT


	REQUIRED SUPPORT	
	SIGN DESCRIPTION	SUPPORT
Regulatory	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
Warning	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
	48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)
	Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)

Texas Department of Transportation
 Traffic Operations Division


SIGN MOUNTING DETAILS
 SMALL ROADSIDE SIGNS
 TRIANGULAR SLIPBASE SYSTEM
 SMD(SLIP-3)-08

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		1392	01	044, ETC	FM 1378, ETC
		DIST	COUNTY	SHEET NO.	
		DAL	COLLIN	292	


Dallas District Standard for Two-Lane Highway Curve Signing/Markings

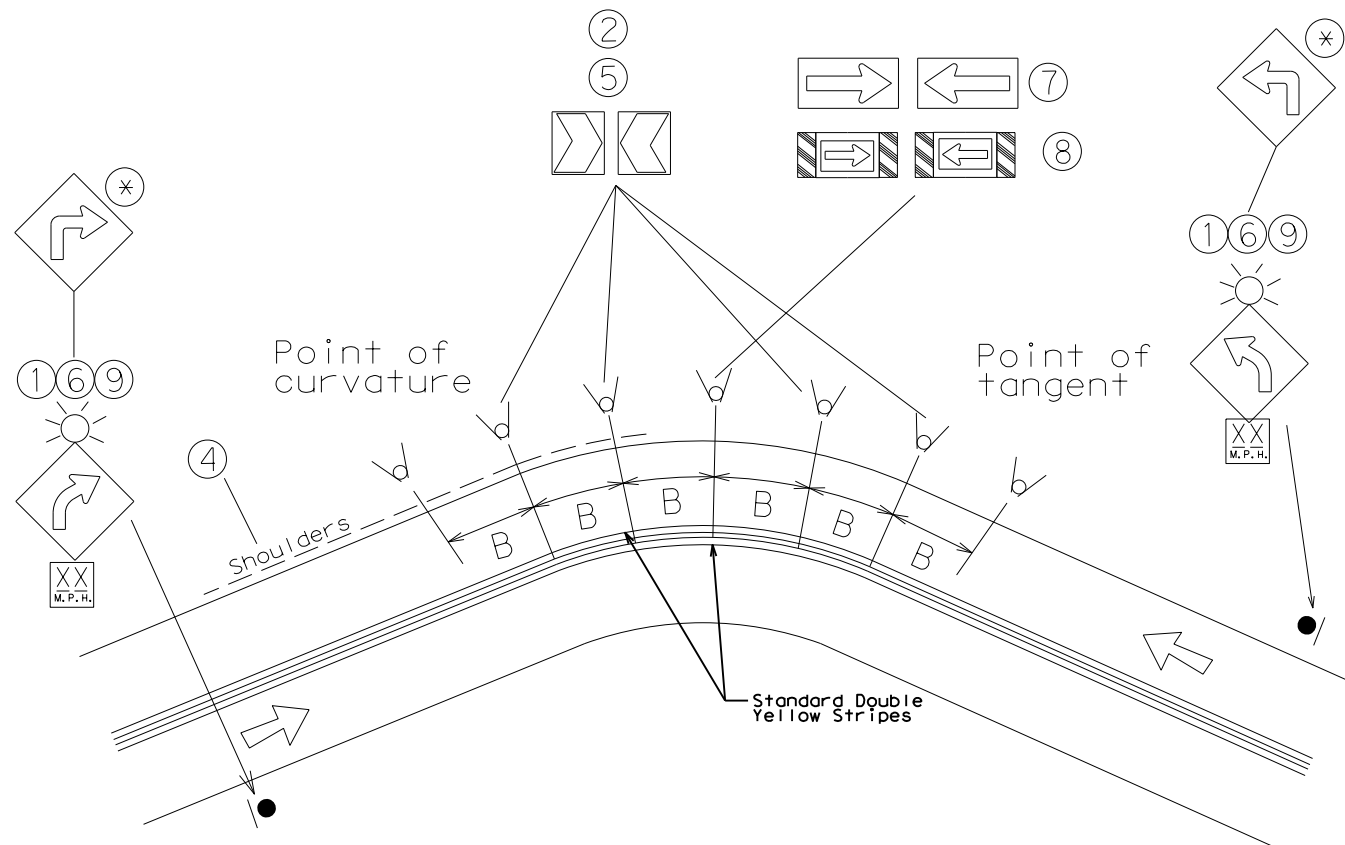

Typical Curve Treatment with Intersection

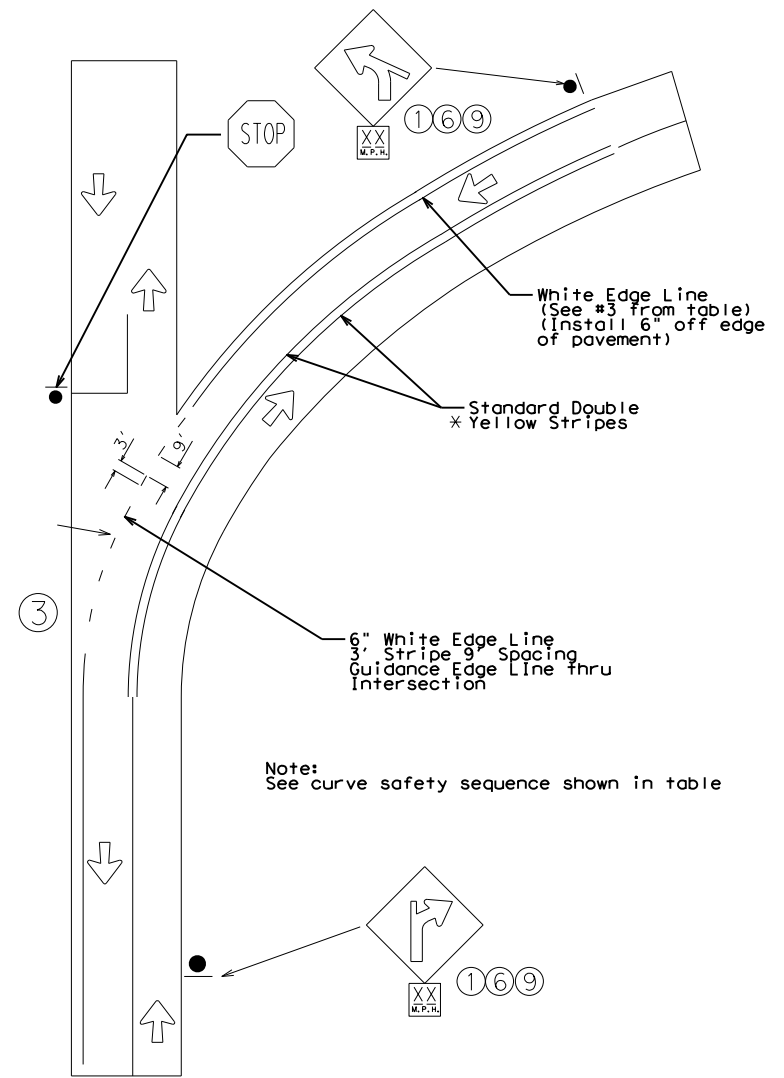

Typical Reverse Curve Edge Line Treatment

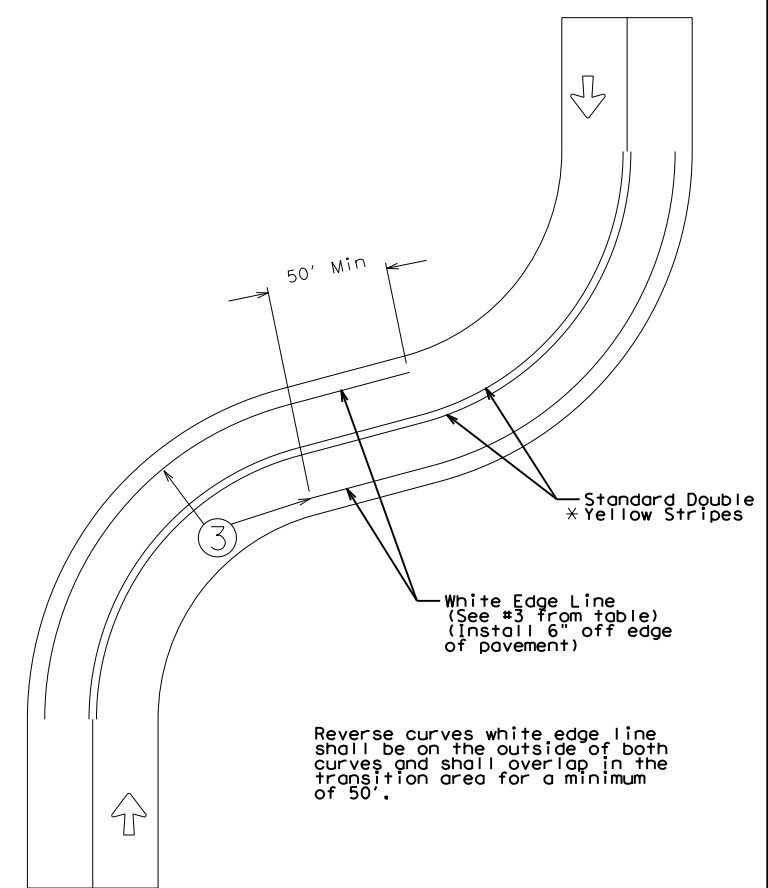

Curve Safety Sequence

Applicable Minimum Measures			Curve signing, delineation and pavement markings (listed in order from minimum to maximum level of treatment as needed)
Advisory Speed 55 mph or higher	Advisory Speed 40-50 mph	Advisory speed 35 mph or less	
+	+	+	1 Advance warning (36" x 36") and advisory mph (18" x 18")
+	+	+	2 Chevron alignment signs if advisory speed is 15 mph or greater than posted speed
	+	+	3 Edge lines
			3a Pavement width 24' or greater 6" solid white edge line
			3b Pavement width 20' - 24' 4" solid white edge line
			3c Pavement width 20' or less no edge line
			Supplemental Measures
		#	4 Add shoulders and edge line (see #3a)
		#	5 Yellow high intensity fluorescent chevron alignment signs - add reflective sheeting to sign support from bottom edge of sign
#	#	#	6 Large advance warning (48" x 48") and advisory mph (30" x 30")
#	#	#	7 Arrow sign (48" x 24")
		#	8 Large arrow sign with diagonals (96" x 36")
		#	9 Add flashers to advance warning signs
#	#	#	10 Surface treatment to improve friction
		**	** The W1-1R or L sign shall only be used when the advisory speed is 30 mph or less

* Standard Double Yellow Stripes shall be dropped through a non-signalized intersection within the city limit. Outside the city limit, the Standard Double Yellow Strip shall be carried through all non-signalized intersections.

+ = required
= optional
Applications 4 - 10 are additional supplemental applications which may be added as directed by the Area Engineer.

Note:
"B" - Chevron Spacing referenced from D&OM(3)-15B

Notes:
1. Two methods will be used to determine the appropriate advisory speed for curves, the GPS Method (existing curves) and the Design Method (new curves).
2. Notify the Traffic Engineering Section for all requests on advisory speeds for existing curves.

OCT-2014
UPDATED NOTES
JAN-2016
NOTE ADDED
SEPT-2016
NOTE ADDED
FOR STRIPING
IN CURVE
MAR-2017
REMOVED
REFERENCE
TO DELINEATORS
MAY-2019
MODIFIED
SIGN SIZE

Texas Department of Transportation
© 2013

**TWO-LANE HIGHWAY
CURVE SIGNING
& MARKINGS**
DALLAS DISTRICT STANDARD

SCALE: NTS SHEET 1 OF 1

DESIGN/CK BLS	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. SEE TITLE SHEET		HIGHWAY NO. FM 1378, ETC.
CHECK BLS	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK FRC	TEXAS	DALLAS	VARIOUS	293
CHECK ARO	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/12/2022 11:09:00 AM
 FILE: c:\ttdot\pw_online\ttdot5\matthew.norris\d0483316\dom1-20.dgn

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS

DELINEATORS

D & OM DESCRIPTIVE CODES

	SIZE 1	SIZE 2	SIZE 3	SIZE 4
DEVICE				
SHEETING	Yellow, White or Red Type B or C reflective sheeting			
NOTE	1. Size 1 and 4 - Direct applied reflective sheeting for use on flexible post (flx). 2. Size 2 and 3 - For use on wing channel (wc) post only. Use approved metal, plastic or fiberglass backplate with 17/64" mounting holes.			

	SINGLE		DOUBLE	
DEVICE				
SHEETING	Yellow, White or Red Type B or C Reflective Sheeting			
POST TYPE	WC	YFLX, WFLX	WC	YFLX, WFLX
MOUNT TYPE	GND	GND, SRF	GND	GND, SRF

INSTR DEL ASSM (D-XX)SZ X (XXXX)XXX (XX)

NUMBER OF REFLECTORS
 S = Single
 D = Double

COLOR OF REFLECTORS
 W = White
 Y = Yellow
 R = Red

REFLECTOR UNIT SIZE
 1 or 2

TYPE OF POST OR DELINEATOR
 WC = Wing Channel Post
 YFLX = Yellow Flexible Post
 WFLX = White Flexible Post
 BRF = Barrier Reflector

TYPE OF MOUNT
 GND = Embedded (drivable or set in concrete)
 CTB = Concrete Barrier Mount
 GF1 or GF2 = Guard Fence Attachment
 SRF = Surface Mount

DIRECTION
 If Required
 BI = Bi-Directional
 BR = Bi-Directional with red on back

INSTR OM ASSM (OM-XX) (XXXX)XXX (XX)

TYPE OF OBJECT MARKER
 1, 2, 3, or 4

NUMBER OF REFLECTORS OR DIRECTION
 X = 3-Size 2 reflector units (Type 2 only)
 Y = 1-Size 3 reflector unit (Type 2 only)
 Z = 3-Size 1 or 1-Size 4 reflector unit(s) (Type 2 only)
 L = Left Side (Type 3 Object Marker only)
 R = Right Side (Type 3 Object Marker only)
 C = Center (Type 3 Object Marker only)

TYPE OF POST
 WC = Wing Channel Post
 WFLX = White Flexible Post
 TWT = Thin Walled Tubing

TYPE OF MOUNT
 GND = Embedded (drivable)
 SRF = Surface Mount
 WAS = Wedge Anchor Steel
 WAP = Wedge Anchor Plastic

DIRECTION
 If Required
 BI = Bi-Directional

OBJECT MARKERS

	Type 1 (OM-1)	Type 2 (OM-2)			Type 3 (OM-3)			Type 4 (OM-4)
DEVICE								
SHEETING	Yellow-Type B _{FL} or C _{FL} Sheeting	Yellow - Type B or C Sheeting			Alternating acrylic black and retroreflective yellow - Type B _{FL} or C _{FL} Sheeting			Red -Type B _{FL} or C _{FL} Sheeting
POST TYPE	TWT	WC	WC	WFLX	TWT			TWT
MOUNT TYPE	WAS, WAP	GND	GND	GND, SRF	WAS, WAP			WAS, WAP

DEPARTMENTAL MATERIAL SPECIFICATIONS

FLEXIBLE DELINEATOR & OBJECT MARKER POSTS (EMBEDDED & SURFACE MOUNT TYPES)	DMS-4400
SIGN FACE MATERIALS	DMS-8300
DELINEATORS, OBJECT MARKERS AND BARRIER REFLECTORS	DMS-8600

BARRIER REFLECTORS (BRF)

CHEVRONS

ONE DIRECTION LARGE ARROW

DEVICE				DEVICE							
NOTE	1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			NOTE	1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).						
SHEETING	Yellow, White, Red			SIZE (W x L)	18" x 24" (Conventional)	24" x 30" (Conventional Oversize)	30" x 36" (Expressway)	36" x 48" (Freeway)	SIZE (W x L)	48" x 24" (Conventional)	60" x 30" (Expressway & Freeway)
NOTE	1. Reflective sheeting shall have a minimum dimension of 3 inches and minimum surface area of 9 square inches.			MOUNTING HEIGHT	4'-0" or 7'-0"			7'-0" Only	MOUNTING HEIGHT	7'-0"	

NOTE:
 Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.

Texas Department of Transportation
 Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION
D & OM(1)-20

FILE: dom1-20.dgn	DN: TxDOT	CK: TxDOT	OW: TxDOT	CR: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044, ETC.FM 1378, ETC.	
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	DAL	COLLIN	294	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/12/2022 11:09:05 AM
 FILE: c:\txdot\pw_online\matthew.norris\dot5\dom2-20.dgn

POST TYPE AND SUPPORT FOUNDATION DETAILS

TYPE OF BARRIER MOUNTS

WING CHANNEL (WC)

FLEXIBLE POSTS (YFLX, WFLX)

WEDGE ANCHOR SYSTEMS

GUARD FENCE ATTACHMENT

GND

GND








SRF

WAS

WAP

GF 1

GF 2

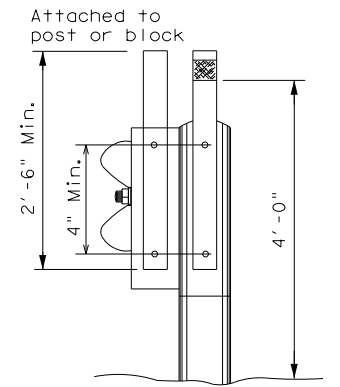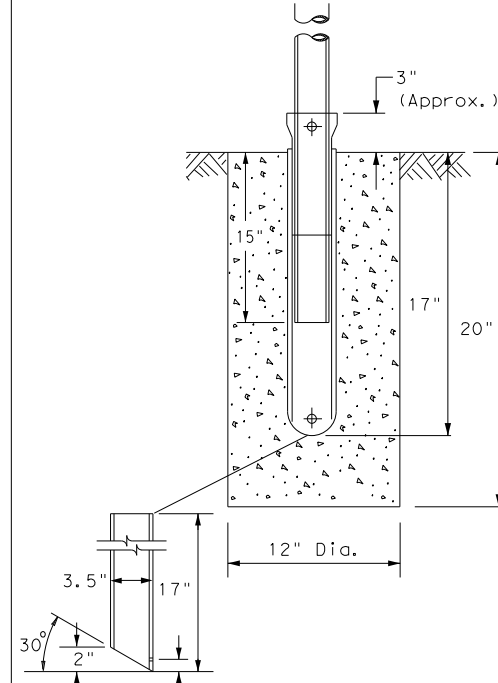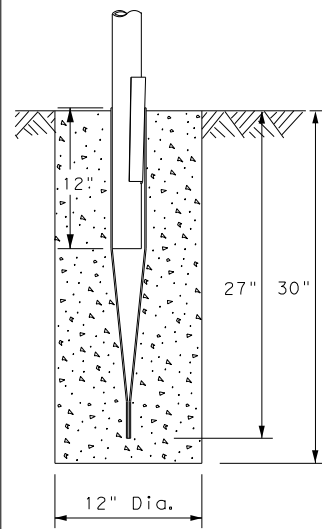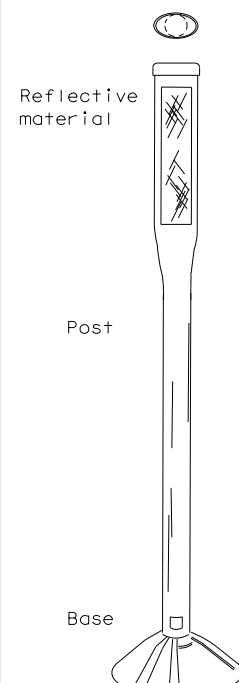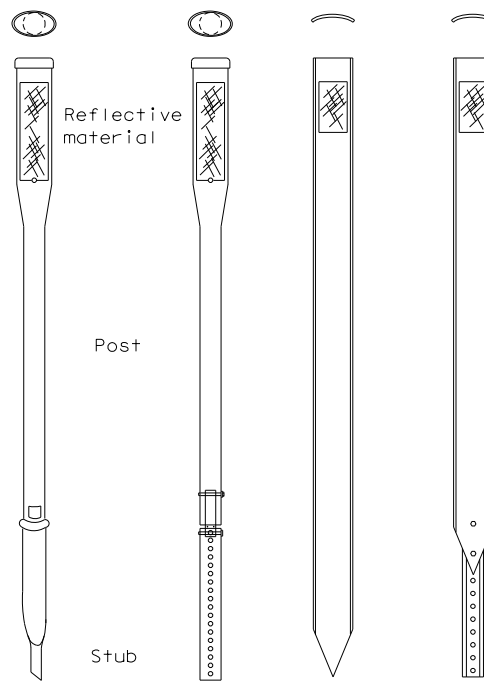

NOTES

1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only.
2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.


NOTES

1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices.
2. Install per manufacturer's recommendations.
3. Post length may vary to meet field conditions.
4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.

NOTE

1. Install per manufacturer's recommendations.

CONCRETE TRAFFIC BARRIER (CTB)

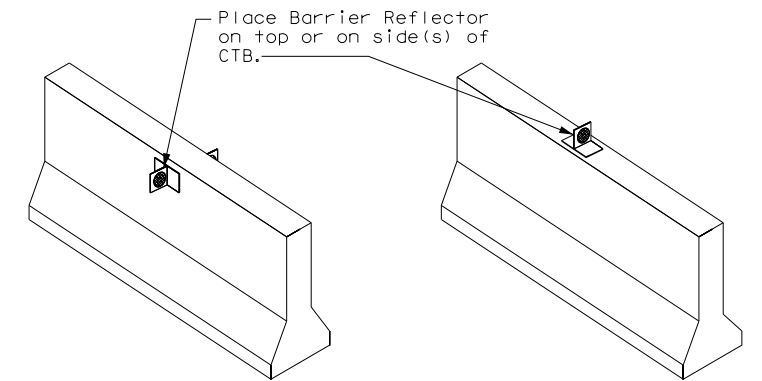


GENERAL NOTES

1. Place delineators on a section of roadway at a consistent distance from the edge of pavement.
2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction.
3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible.
4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation.
5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface.
6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.

TYPES 1,3, AND 4 OBJECT MARKERS AND CHEVRONS


CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN

DELINEATORS AND TYPE 2 OBJECT MARKERS

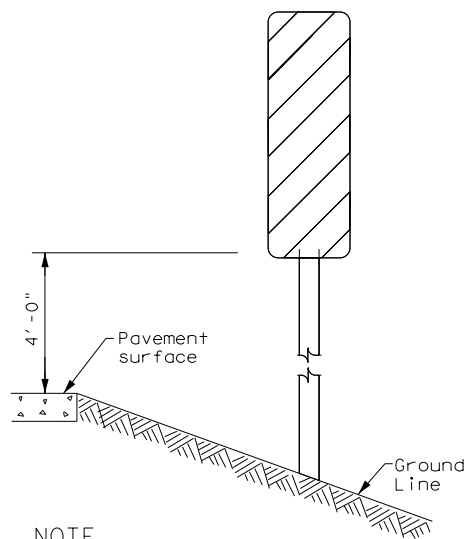


NOTE

Mounting at 4 feet to the bottom of the chevron is permitted for chevrons that will not exceed a height of 6'-6" to the top of the chevron (sizes 24" x 30" and smaller)

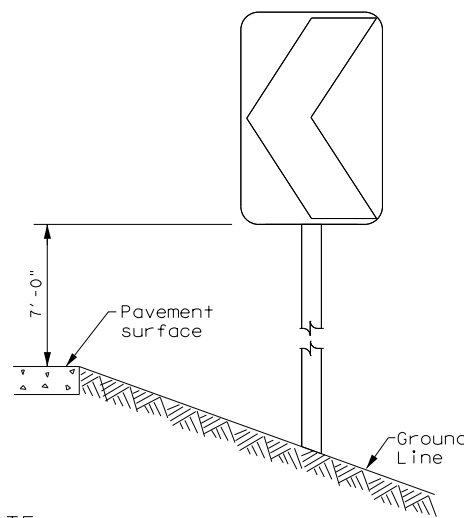

NOTE

Chevrons 30" x 36" and larger shall be mounted at a height of 7' to the bottom of the chevron. Chevron sign and ONE DIRECTION LARGE ARROW sign (W1-9T) shall be installed per SMD standard sheets and paid under item 644.

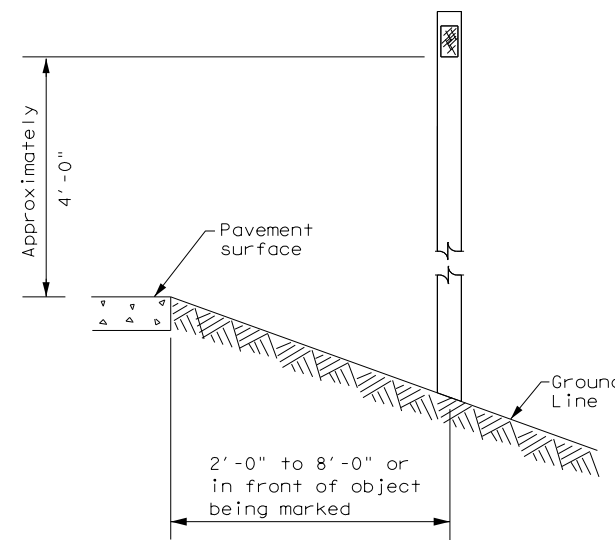

See general notes 1, 2 and 3.

		Traffic Safety Division Standard	
<p>DELINEATOR & OBJECT MARKER INSTALLATION</p> <p>D & OM(2)-20</p>			
FILE: dom2-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT August 2004	CONT	SECT	JOB
10-09 3-15	1392	01	044, ETC.FM 1378, ETC.
4-10 7-20	DIST	COUNTY	SHEET NO.
	DAL	COLLIN	295


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/12/2022 11:09:12 AM
 FILE: c:\txdot\pw_online\matthew.norris\dom3-20.dgn

MINIMUM WARNING DEVICES AT CURVES WITH ADVISORY SPEEDS

Amount by which Advisory Speed is less than Posted Speed	Curve Advisory Speed	
	Turn (30 MPH or less)	Curve (35 MPH or more)
5 MPH & 10 MPH	● RPMs	● RPMs
15 MPH & 20 MPH	● RPMs and One Direction Large Arrow sign	● RPMs and Chevrons; or ● RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons.
25 MPH & more	● RPMs and Chevrons; or ● RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons	● RPMs and Chevrons


SUGGESTED SPACING FOR DELINEATORS ON HORIZONTAL CURVES

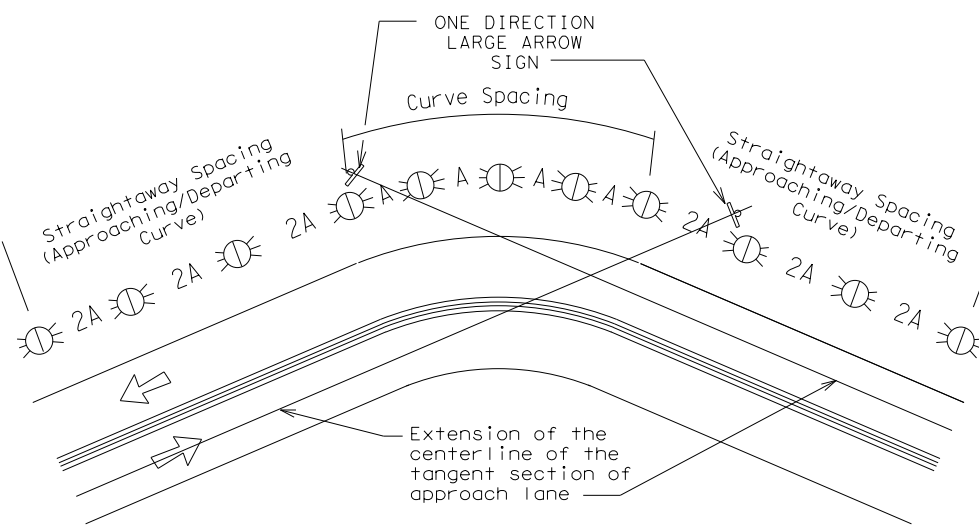

NOTE

ONE DIRECTION LARGE ARROW (W1-6) sign should be located at approximately and perpendicular to the extension of the centerline of the tangent section of approach lane.

SUGGESTED SPACING FOR CHEVRONS ON HORIZONTAL CURVES

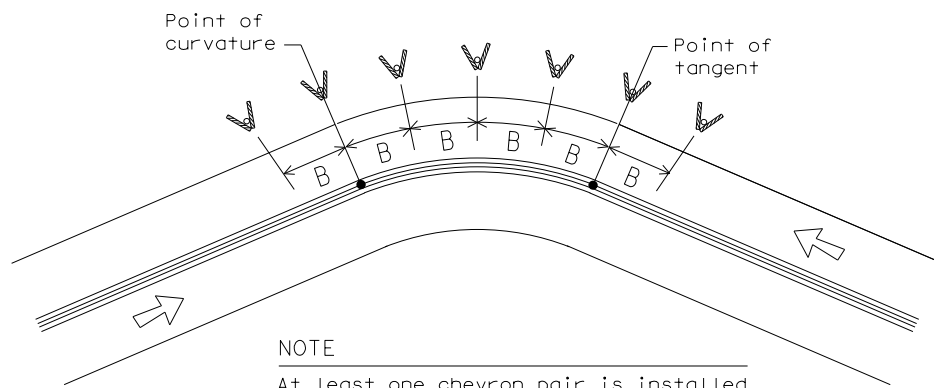

NOTE

At least one chevron pair is installed beyond the point of tangent in tangent section.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS KNOWN				
Degree of Curve	FEET			
	Radius of Curve	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
		A	2A	B
1	5730	225	450	—
2	2865	160	320	—
3	1910	130	260	200
4	1433	110	220	160
5	1146	100	200	160
6	955	90	180	160
7	819	85	170	160
8	716	75	150	160
9	637	75	150	120
10	573	70	140	120
11	521	65	130	120
12	478	60	120	120
13	441	60	120	120
14	409	55	110	80
15	382	55	110	80
16	358	55	110	80
19	302	50	100	80
23	249	40	80	80
29	198	35	70	40
38	151	30	60	40
57	101	20	40	40

Curve delineator approach and departure spacing should include 3 delineators spaced at 2A. This spacing should be used during design preparation or when the degree of curve is known.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS NOT KNOWN			
Advisory Speed (MPH)	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
	A	2xA	B
65	130	260	200
60	110	220	160
55	100	200	160
50	85	170	160
45	75	150	120
40	70	140	120
35	60	120	120
30	55	110	80
25	50	100	80
20	40	80	80
15	35	70	40

If the degree of curve is not known, delineator spacing may be determined based on the Advisory Speed of the curve. Use the delineator curve spacing for each Advisory Speed (MPH).

DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
Frwy./Exp. Tangent	RPMs	See PM-series and FPM-series standard sheets
Frwy./Exp. Curve	Single delineators on right side	See delineator spacing table
Frwy/Exp. Ramp	Single delineators on at least one side of ramp (should be on outside of curves) (see Detail 3 on D&OM(4))	100 feet on ramp tangents Use delineator spacing table for ramp curves ("straightway spacing" does not apply to ramp curves)
Acceleration/Deceleration Lane	Double delineators (see Detail 3 on D&OM(4))	100 feet (See Detail 3 on D & OM (4))
Truck Escape Ramp	Single red delineators on both sides	50 feet
Bridge Rail (steel or concrete) and Metal Beam Guard Fence	Bi-Directional Delineators when undivided with one lane each direction Single Delineators when multiple lanes each direction	Equal spacing (100' max) but not less than 3 delineators
Concrete Traffic Barrier (CTB) or Steel Traffic Barrier	Barrier reflectors matching the color of the edge line	Equal spacing 100' max
Cable Barrier	Reflectors matching the color of the edge line	Every 5th cable barrier post (up to 100' max)
Guard Rail Terminus/Impact Head	Divided highway - Object marker on approach end Undivided 2-lane highways - Object marker on approach and departure end	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5) and D & OM (6)
Bridges with no Approach Rail	Type 3 Object Marker (OM-3) at end of rail and 3 single delineators approaching rail	See D & OM(5)
Reduced Width Approaches to Bridge Rail	Type 2 and Type 3 Object Markers (OM-3) and 3 single delineators approaching bridge	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5)
Culverts without MBGF	Type 2 Object Markers	See Detail 2 on D & OM(4)
Crossovers	Double yellow delineators and RPMs	See Detail 1 on D & OM (4)
Pavement Narrowing (lane merge) on Freeways/Expressway	Single delineators adjacent to affected lane for full length of transition	100 feet

NOTES

- Unless indicated otherwise, the delineator or barrier reflector color shall conform to the color of the pavement edge line on the side of the road where the delineators or barrier reflectors are placed.
- Barrier reflectors may be used to replace required delineators.
- Single red delineators may be mounted on the back side of delineator posts for wrong way driver applications

LEGEND	
	Bi-directional Delineator
	Delineator
	Sign

Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER PLACEMENT DETAILS


D & OM(3) - 20

FILE: dom3-20.dgn	DN: TXDOT	CK: TXDOT	OW: TXDOT	CR: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS		1392 01	044, ETC.FM 1378, ETC.	
3-15 8-15	DIST	COUNTY	SHEET NO.	
8-15 7-20	DAL	COLLIN	296	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 1/12/2022 11:09:18 AM
 FILE: c:\txdot\pw_online\txdot5\matthew.norris\dom4-20.dgn

CROSSOVERS

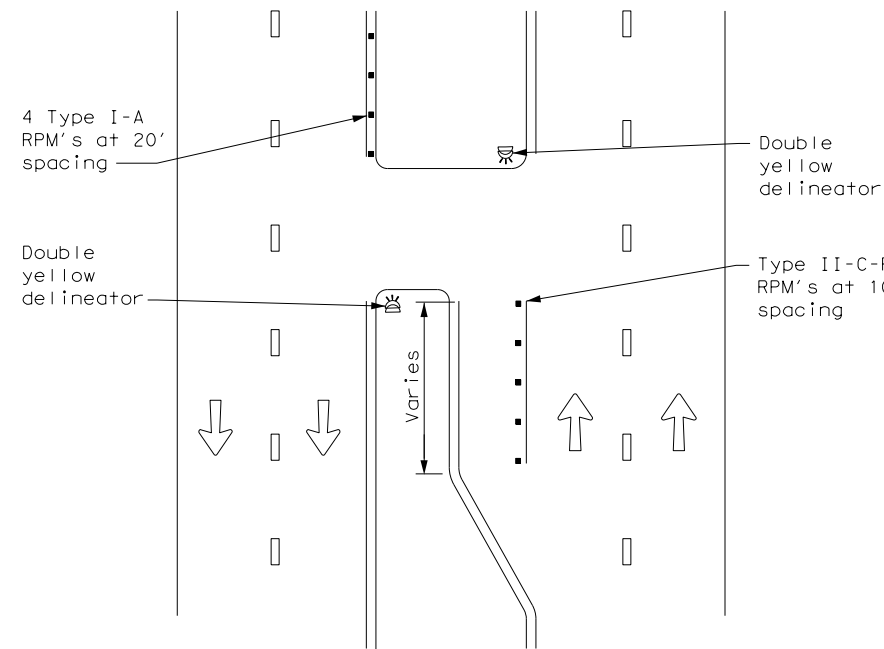


DETAIL 1

FOR CULVERTS WITHOUT MBGF

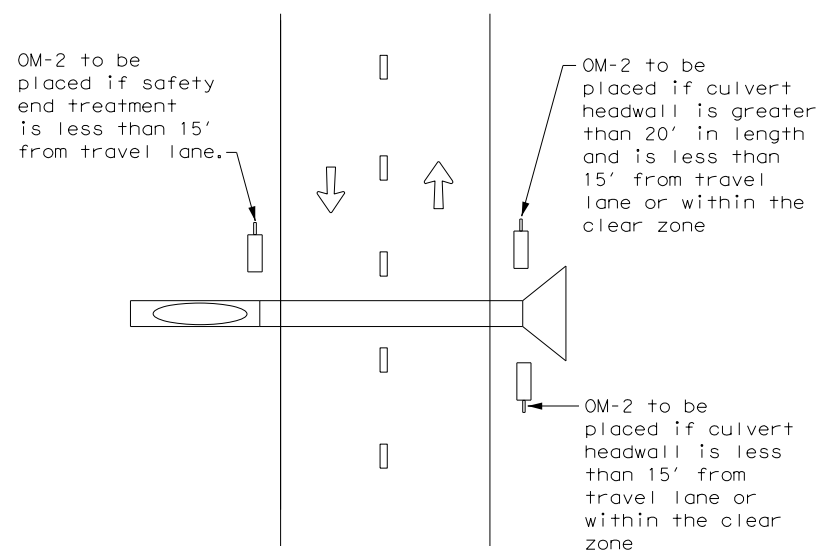


DETAIL 2

FREEWAY DELINEATION FOR RAMPS AND ACCELERATION/DECELERATION LANES

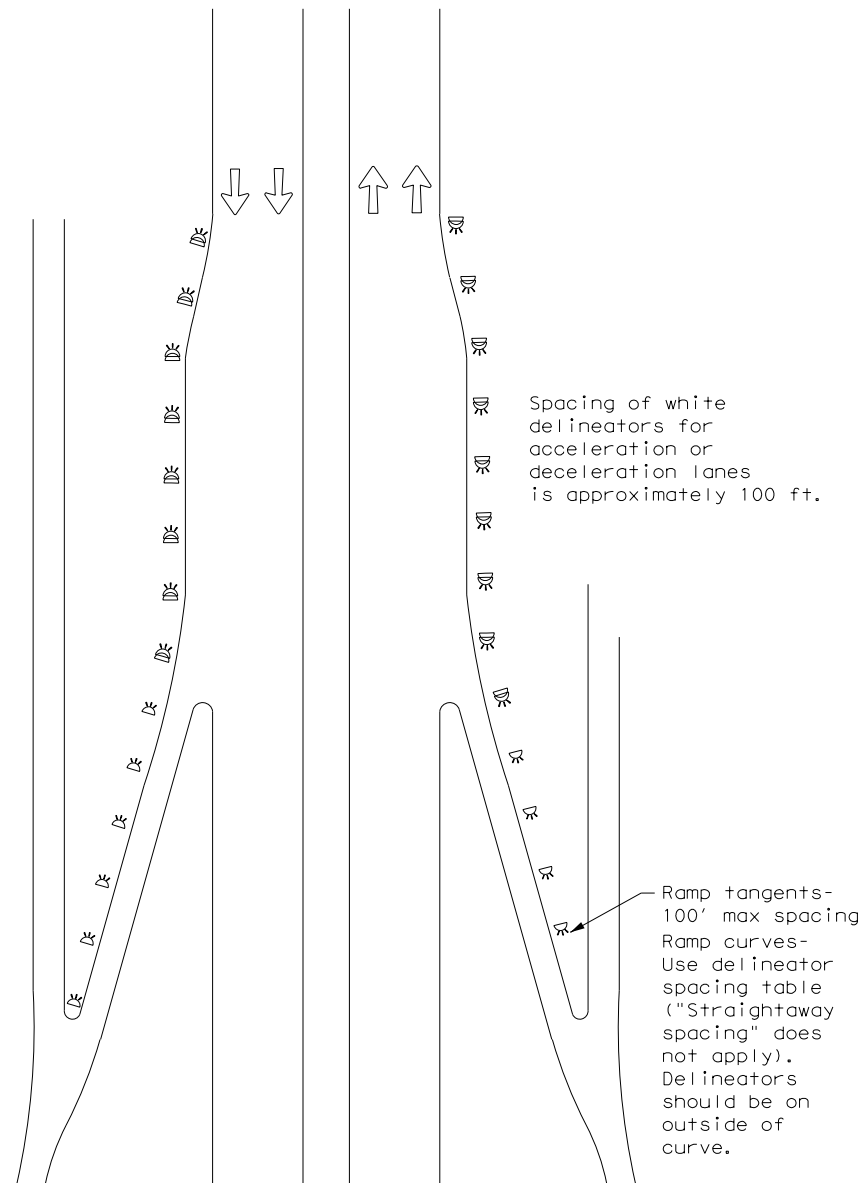


DETAIL 3

TYPICAL APPLICATION OF DEAD END BARRICADE

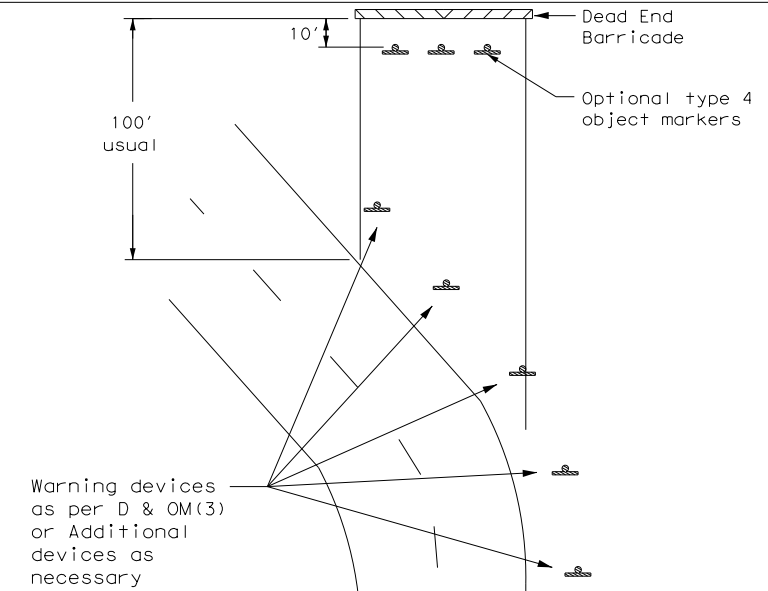

DETAIL 4

TYPICAL DEAD END BARRICADE INSTALLATION

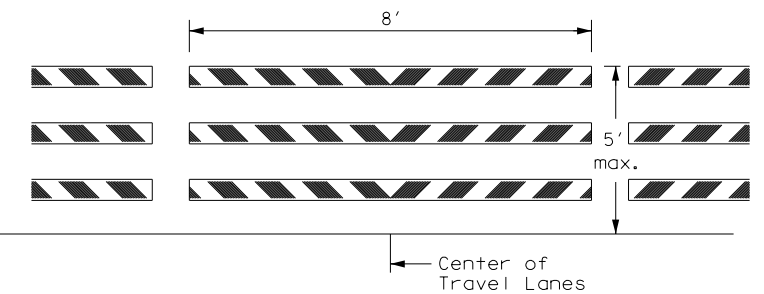

NOTES

- Barricade striping shall be red and white reflective sheeting for all permanent road closures.
- Barricade striping is red and white sloping toward the center of the roadway.
- Type 3 Barricade Supports should be anchored to soil or pavement as described in compliant Work Zone Traffic Control Devices List, section D.2.f and D.2.g.

DETAIL 5

LEGEND	
	Bidirectional Delineator
	Delineator
	OM-3
	Barricade
	Sign
	OM-2
	Double Delineator




DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(4) - 20

FILE: dom4-20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CR: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044, ETC.FM 1378, ETC.	
3-15	DIST	COUNTY	SHEET NO.	
7-20	DAL	COLLIN	297	


**TWO-WAY, TWO LANE ROADWAY
WITH REDUCED WIDTH APPROACH RAIL**

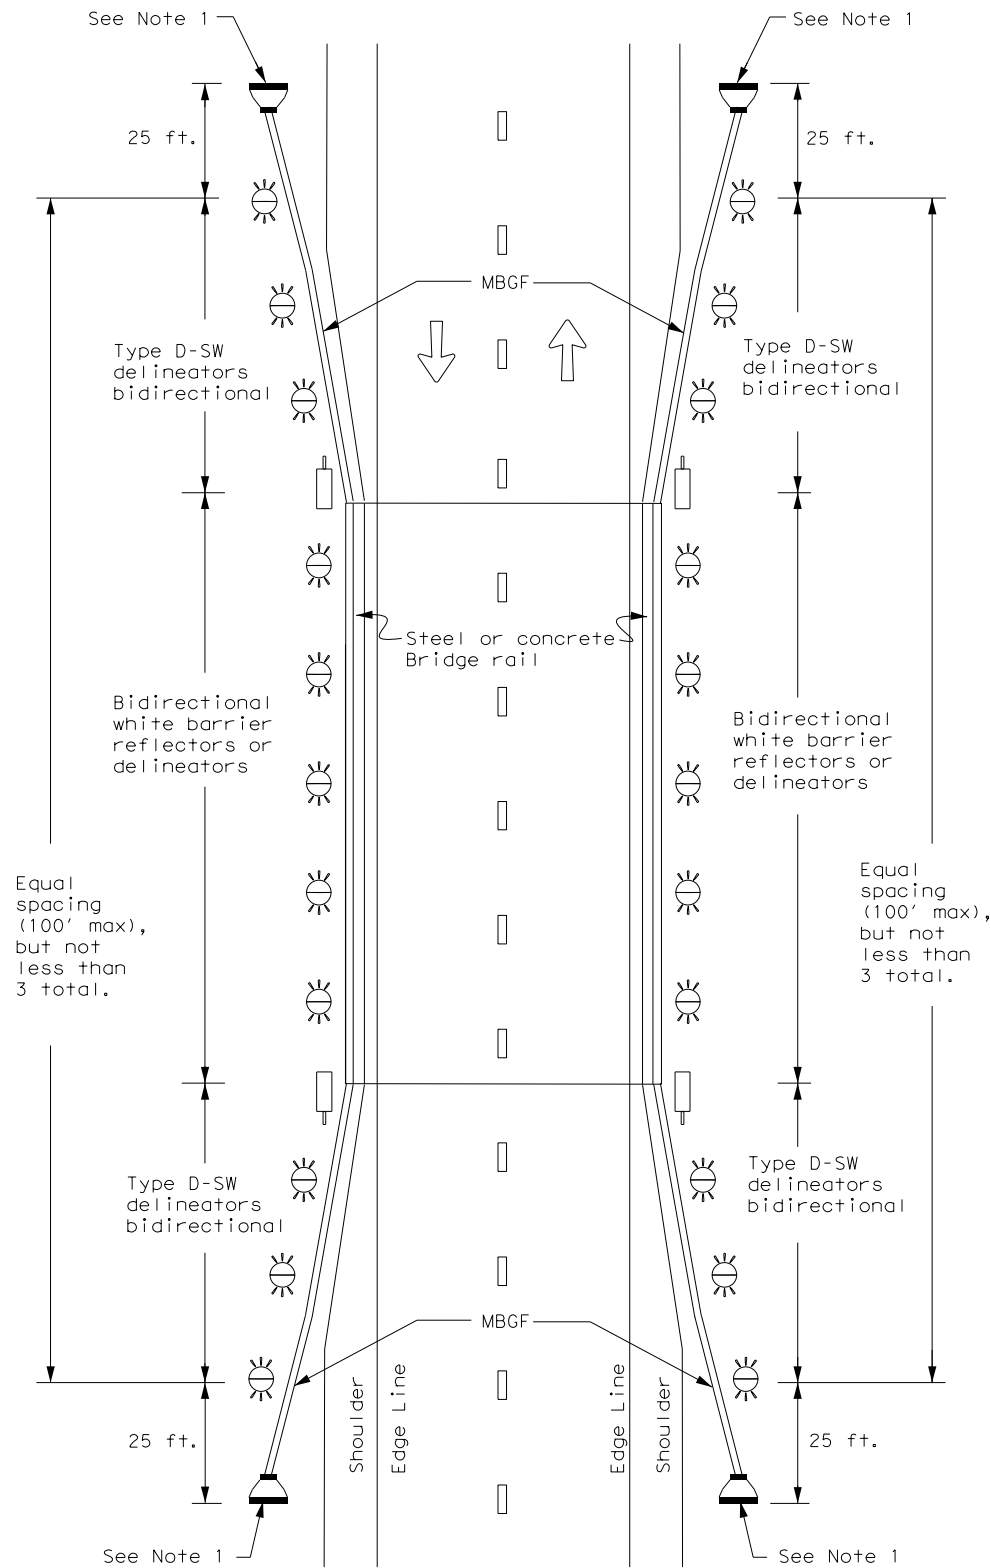

NOTE:

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.


**TWO-WAY, TWO LANE ROADWAY
WITH METAL BEAM GUARD FENCE (MBGF)**

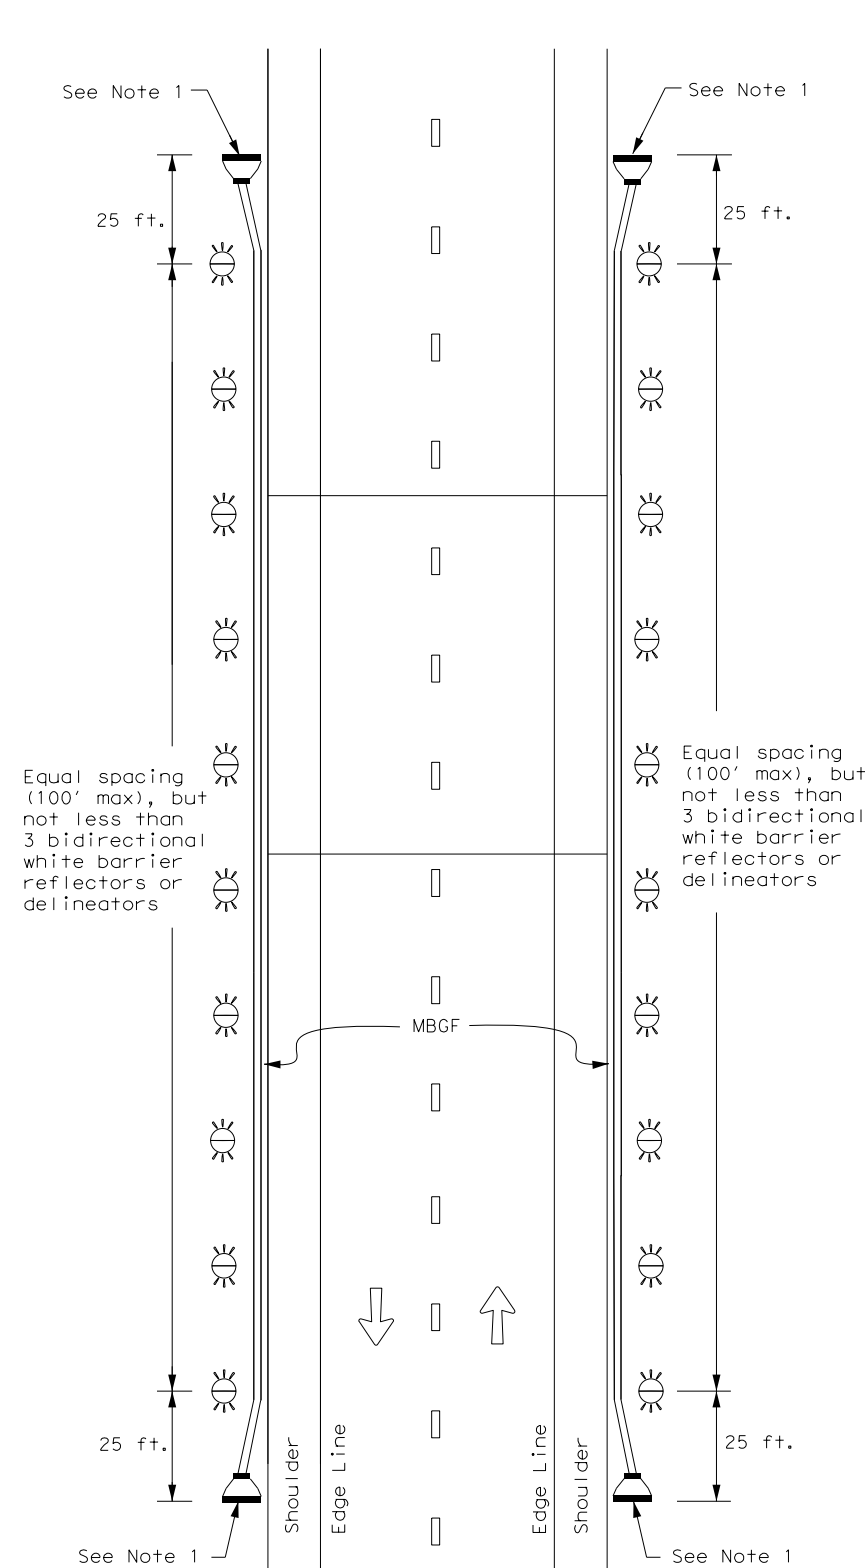

NOTE:

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

**TWO-WAY, TWO LANE ROADWAY
BRIDGE WITH NO APPROACH RAIL**

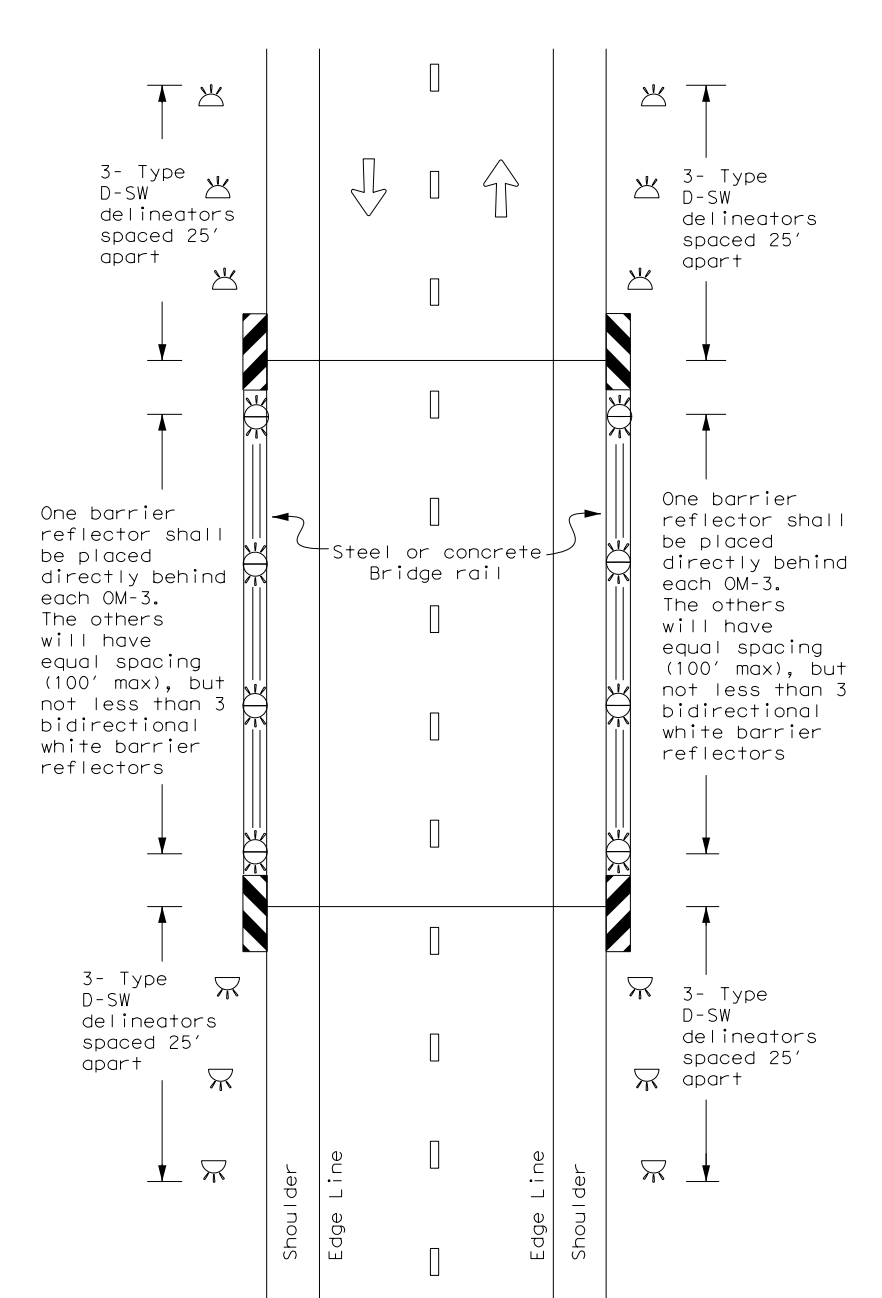

LEGEND

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow

Texas Department of Transportation
Traffic Safety Division Standard

**DELINEATOR &
OBJECT MARKER
PLACEMENT DETAILS**

D & OM(5) - 20


FILE: dom5-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044, ETC.FM 1378, ETC.	
7-20	DIST	COUNTY	SHEET NO.	
	DAL	COLLIN	298	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 1/12/2022 11:09:23 AM
 FILE: c:\t\dot\pw_online\matthew.norris\0483316\dom5-20.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 1/12/2022 11:09:34 AM
 FILE: c:\t\dot\pw_online\t\dot5\matthew.norris\0483316.pml-20.dgn

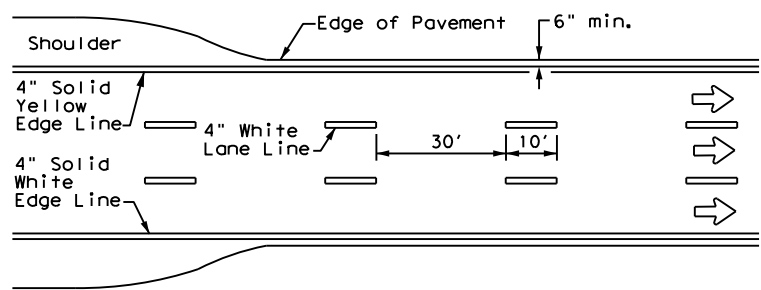


**EDGE LINE AND LANE LINES
 ONE-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS**

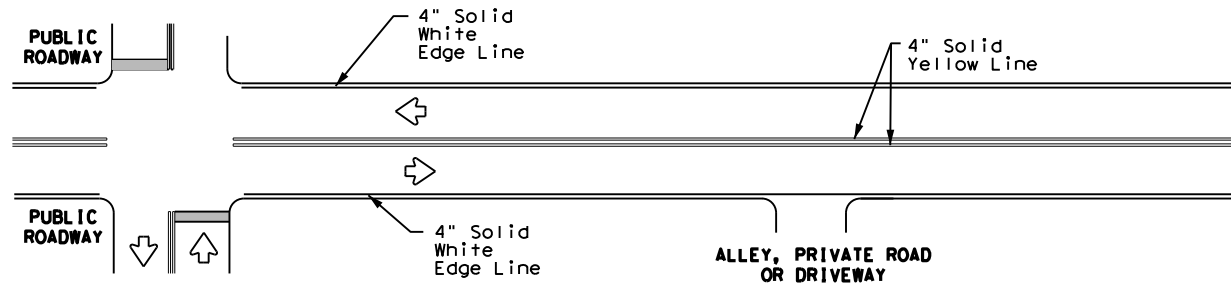


**TYPICAL TWO-LANE, TWO-WAY PAVEMENT
 MARKINGS THROUGH INTERSECTIONS**

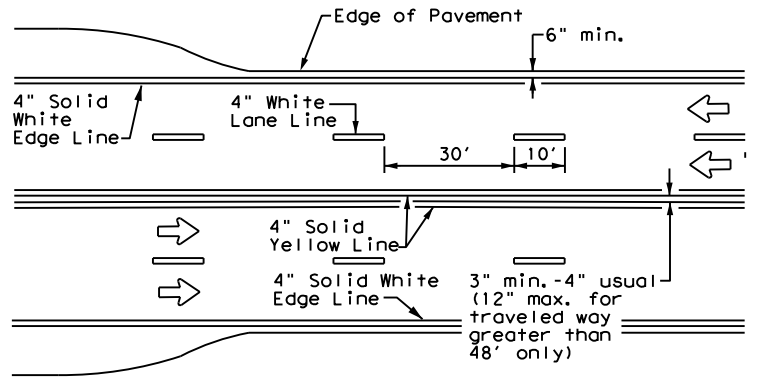


**CENTERLINE AND LANE LINES
 FOUR LANE TWO-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS**

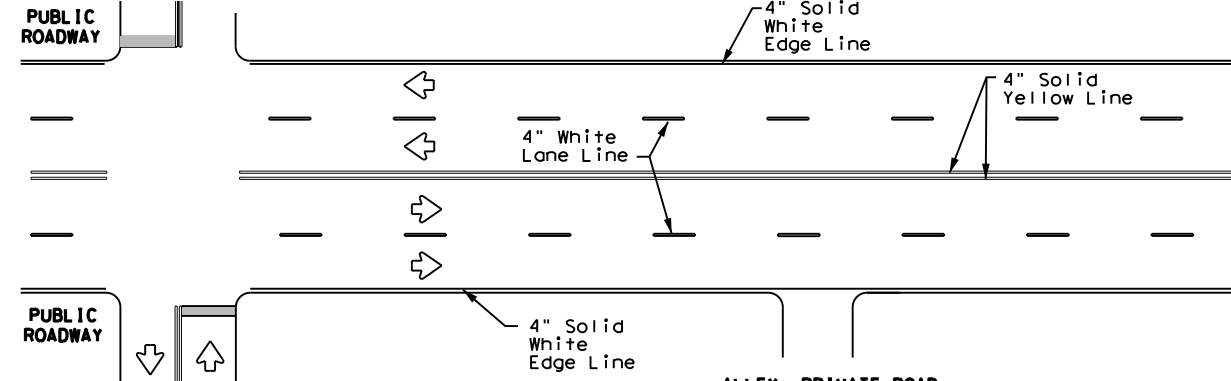


**TYPICAL MULTI-LANE, TWO-WAY PAVEMENT
 MARKINGS THROUGH INTERSECTIONS**

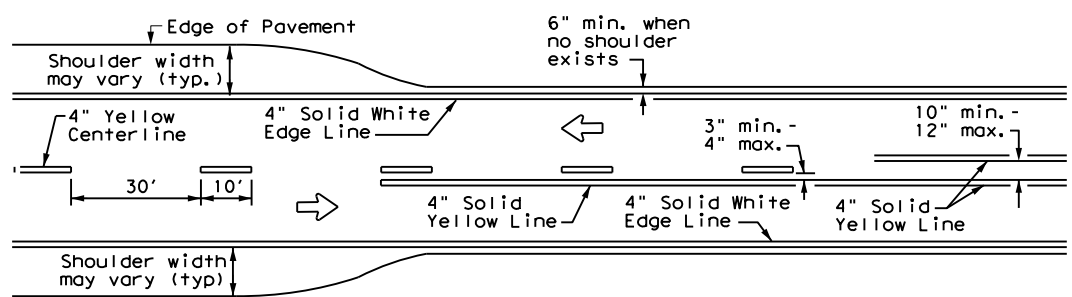

**TWO LANE TWO-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS**




For posted speed on road being marked equal to or less than 40 MPH.



For posted speed on road being marked equal to or greater than 45 MPH.

YIELD LINES

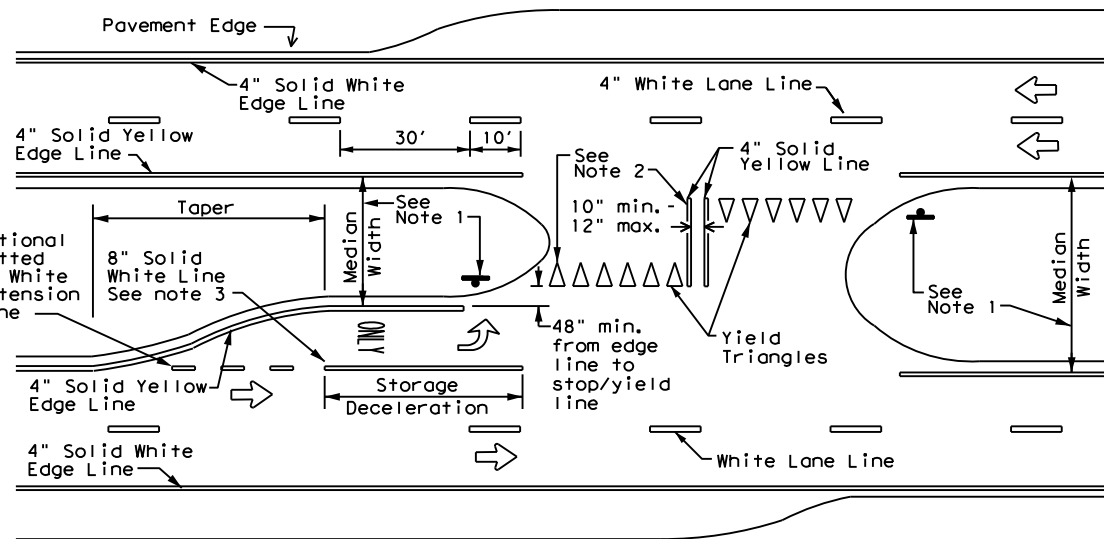

FOUR LANE DIVIDED ROADWAY CROSSOVERS

NOTES


- Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs are optional as determined by the Engineer.
- Install median striping (double yellow centerlines and stop bars/yield triangles) when a 50' or greater median centerline can be placed. Stop bars shall only be used with stop signs. Yield triangles shall only be used with yield signs.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

GENERAL NOTES

- Edgeline striping shall be as shown in the plans or as directed by the Engineer. The edgeline should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edgelines are not required in curb and gutter sections of roadways.
- The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the inside of edgeline to the inside of edgeline of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

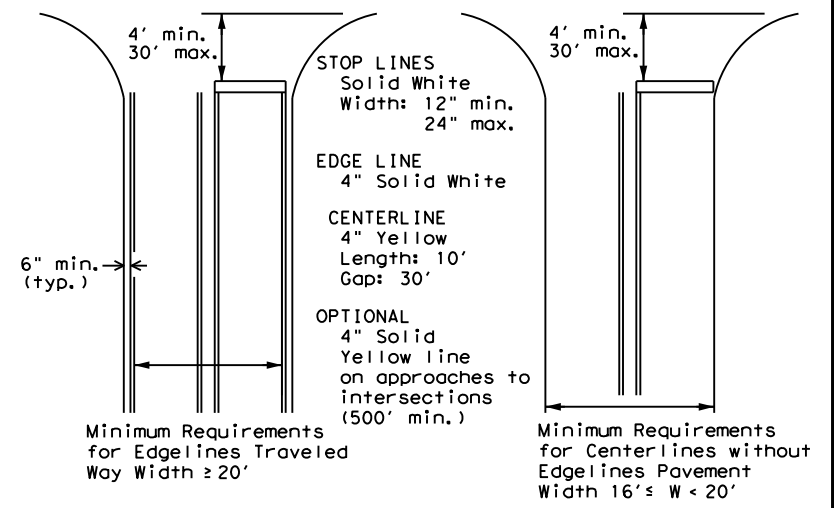

**GUIDE FOR PLACEMENT OF STOP LINES,
 EDGE LINE & CENTERLINE**

Based on Traveled Way and Pavement Widths for Undivided Highways



**TYPICAL STANDARD
 PAVEMENT MARKINGS**


PM(1) - 20

FILE: pml-20.dgn	DN:	CK:	DW:	CK:
© TxDOT November 1978	CONT	SECT	JOB	HIGHWAY
8-95 3-03 REVISIONS	1392	01	044, ETC.	FM 1378, ETC.
5-00 2-12	DIST	COUNTY	SHEET NO.	
8-00 6-20	DAL	COLLIN	300	


REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.



DATE: 1/12/2022 11:09:40 AM
FILE: c:\txdot\pw_online\txdot5\matthew.norris\d0483316\pm2-20.dgn

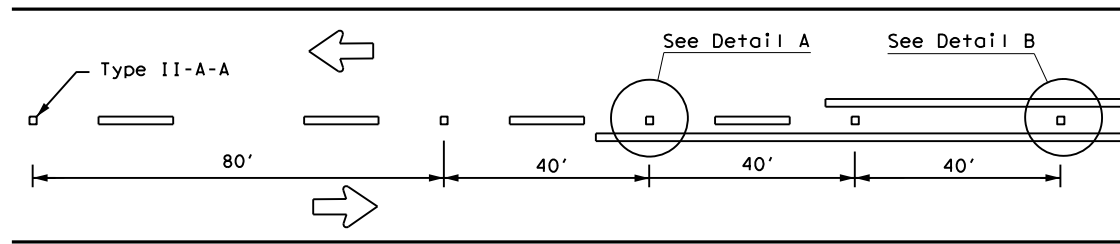


CENTERLINE FOR ALL TWO LANE ROADWAYS

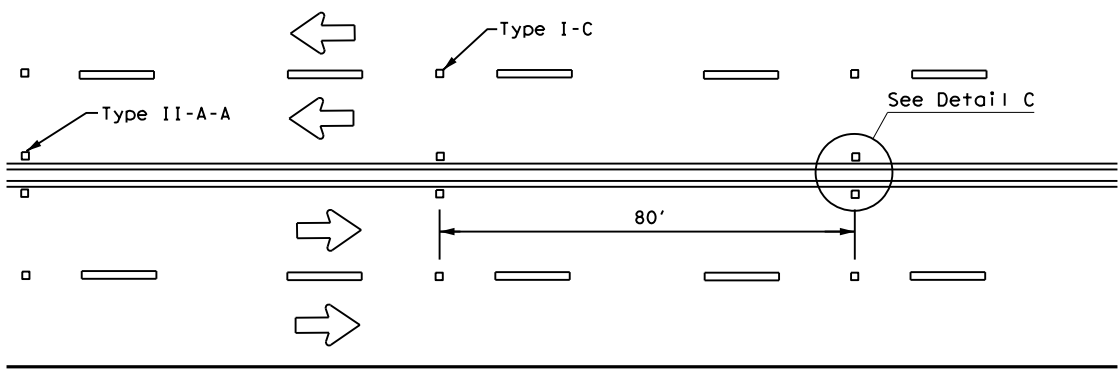

**CENTERLINE & LANE LINES
FOR FOUR LANE TWO-WAY HIGHWAYS**

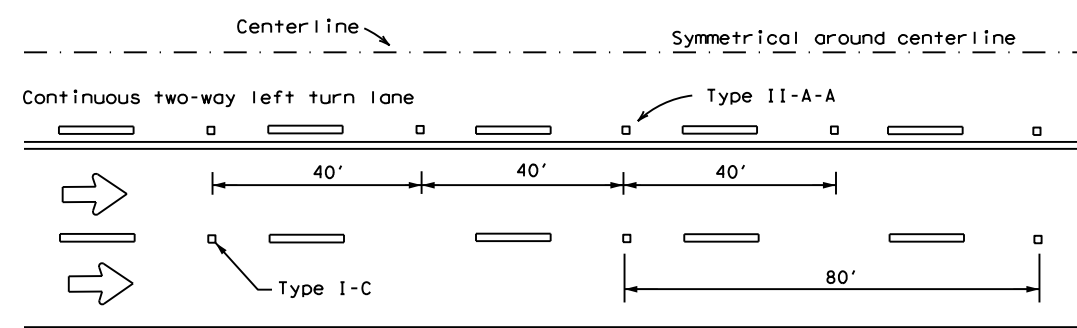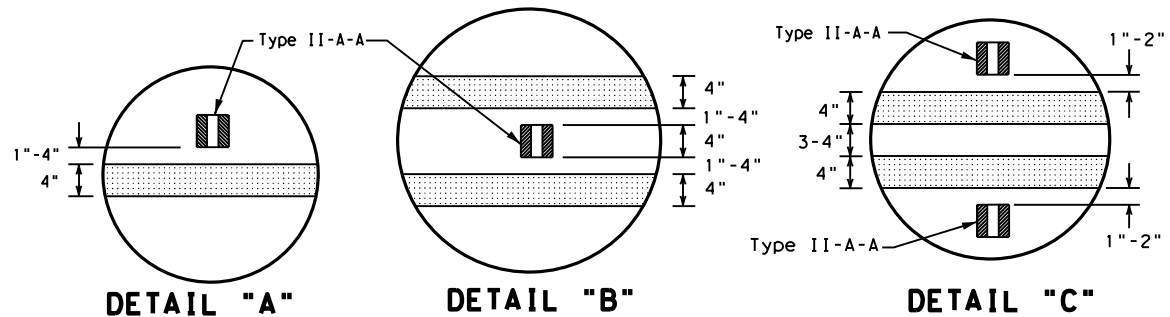

CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE

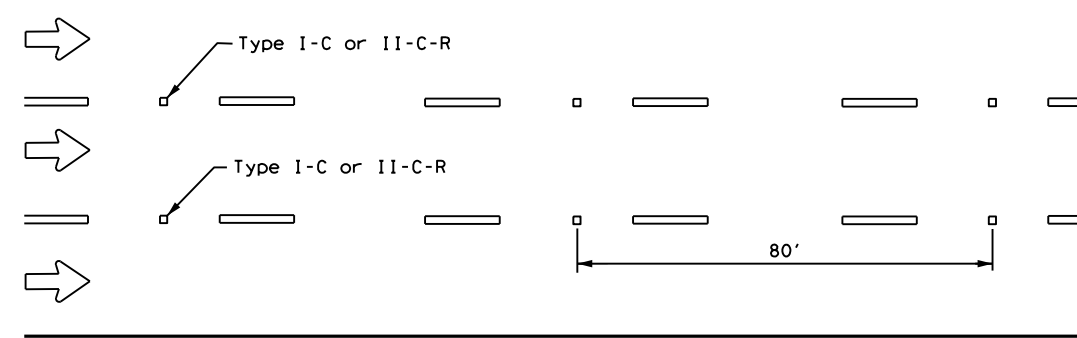


LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)


Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

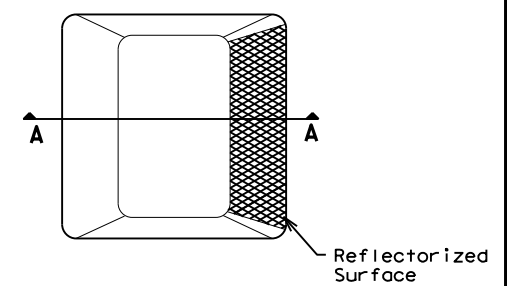

Type I (Top View)

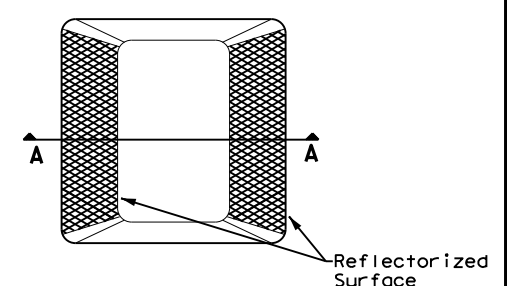

Type II (Top View)

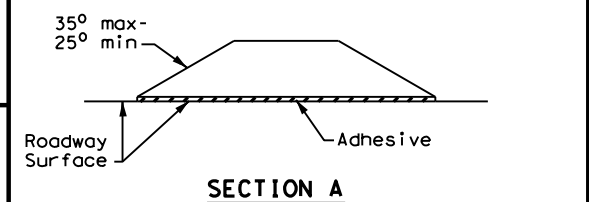

RAISED PAVEMENT MARKERS


GENERAL NOTES

1. All raised pavement markers placed in broken lines shall be placed in line with and midway between the stripes.
2. On concrete pavements the raised pavement markers should be placed to one side of the longitudinal joints.




POSITION GUIDANCE USING RAISED MARKERS REFLECTORIZED PROFILE MARKINGS PM(2) - 20

FILE: pm2-20.dgn	DN:	CK:	DW:	CK:
© TxDOT April 1977	CONT	SECT	JOB	HIGHWAY
4-92 2-10 REVISIONS	1392	01	044, ETC.	FM 1378, ETC.
5-00 2-12	DIST	COUNTY		SHEET NO.
8-00 6-20	DAL	COLLIN		301

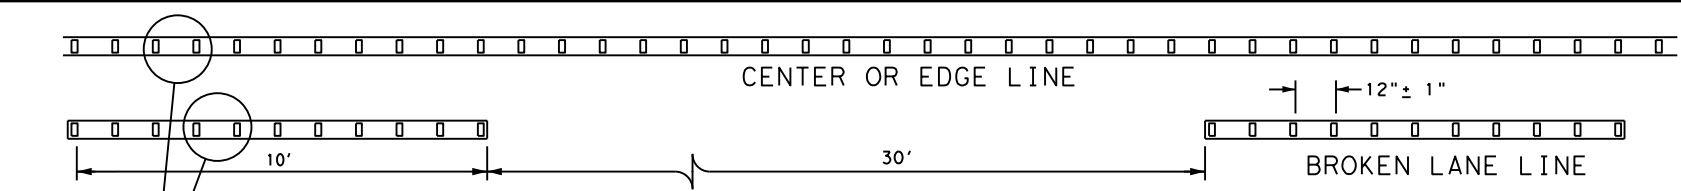


**REFLECTORIZED PROFILE
PATTERN DETAIL**
USING REFLECTIVE PROFILE PAVEMENT MARKINGS

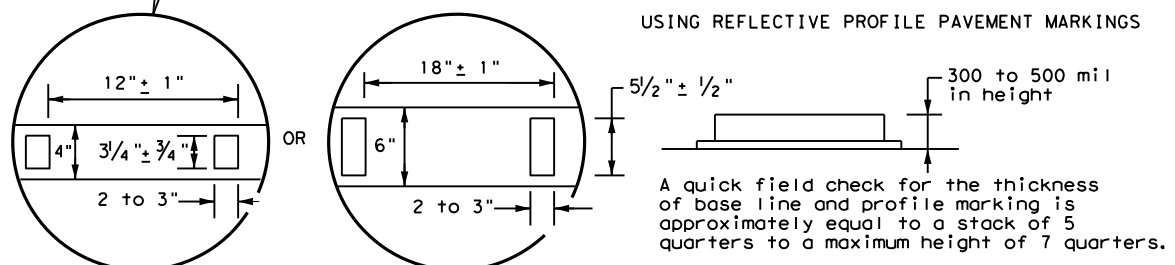

NOTE
Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/12/2022 11:09:45 AM
 FILE: c:\txdot\pw_online\matthew.norris\d0483316\pm3-20.dgn

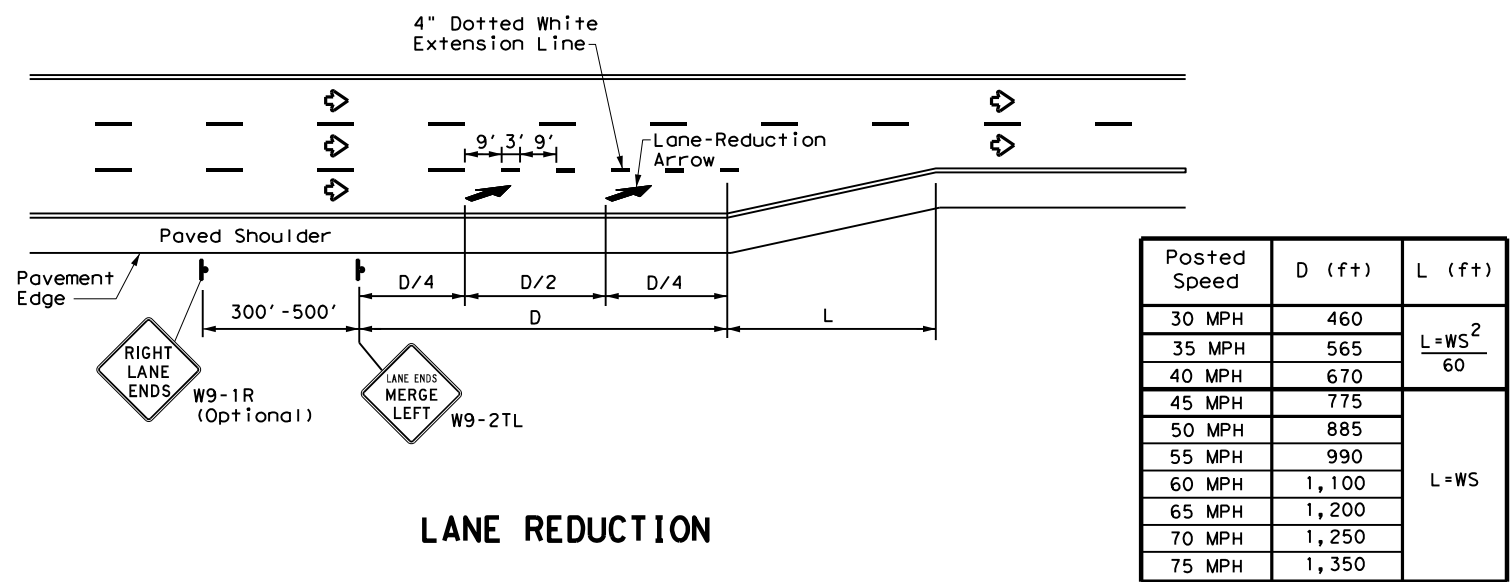

LANE REDUCTION

NOTES


- Lane reduction pavement markings are used where the number of through lanes is reduced because of narrowing of the roadway or because of a section of on-street parking in what would otherwise be a through lane. For Texas Super 2 Passing Lanes, see TS2(PL) standard sheets.
- On divided highways, an additional W9-1R "RIGHT LANE ENDS" sign may be installed in the median aligned with the W9-1R sign on the right side of the highway.
- Lane reduction arrows are required for speeds of 45 mph or greater. An optional third lane reduction arrow may be added based on engineering judgement. If used, the optional third lane reduction arrow should be centered between the first and last lane reduction arrows.
- For lane reductions on Freeways and Expressways, signing shall conform to the TxDOT Freeway Signing Handbook.

GENERAL NOTES


- Lane use word and arrow markings shall be used where through lanes approaching an intersection become mandatory turn lanes. Lane use word and arrow markings should be used in auxiliary lanes of substantial length. Lane use arrow markings or word and arrow markings may be used in other lanes and turn bays for emphasis. Details for words and arrows are as shown in the Standard Highway Sign Designs for Texas.
- When lane-use words and arrow markings are used, two sets of arrows should be used if the length of the bay is greater than 180 feet. When a single lane use arrow or word and arrow marking is used for a short turn lane, it should be located at or near the upstream end of the full-width turn lane.
- Use raised pavement marker Type I-C with undivided highways, flush medians and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

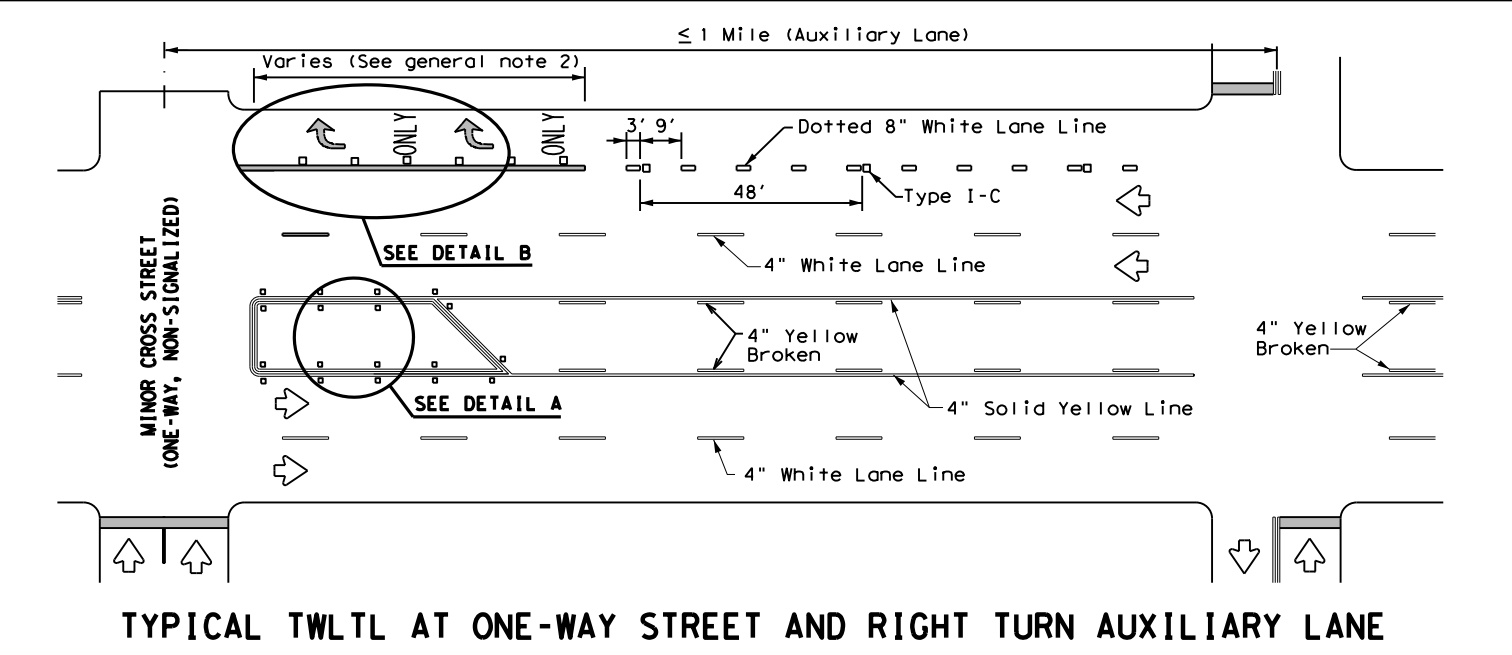


TYPICAL TWLTL AT ONE-WAY STREET AND RIGHT TURN AUXILIARY LANE

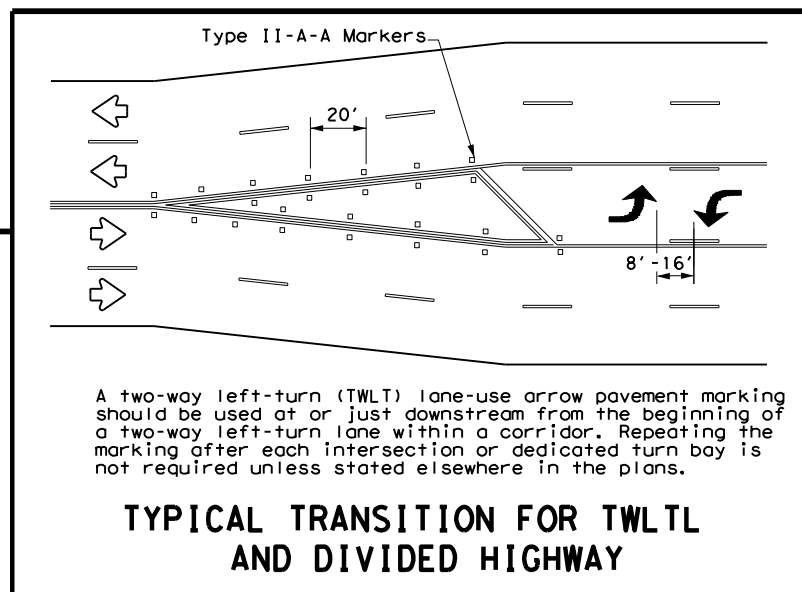


TYPICAL TRANSITION FOR TWLTL AND DIVIDED HIGHWAY

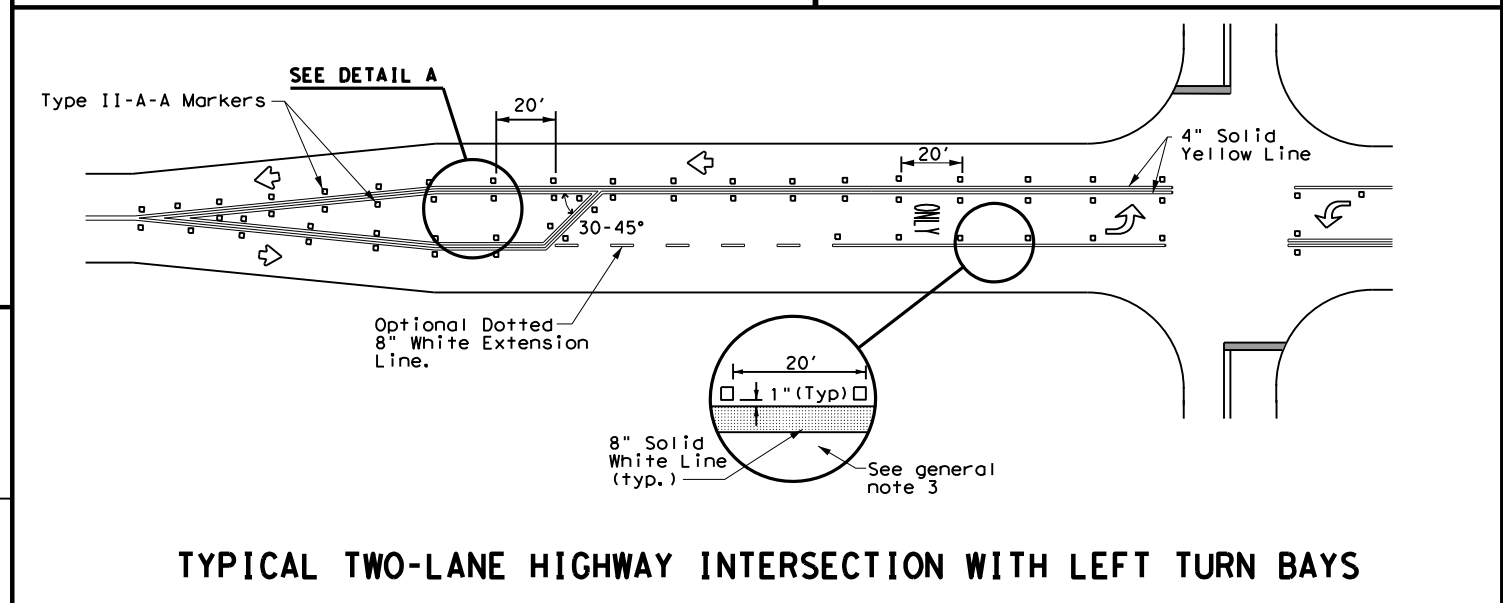

TYPICAL TWO-LANE HIGHWAY INTERSECTION WITH LEFT TURN BAYS

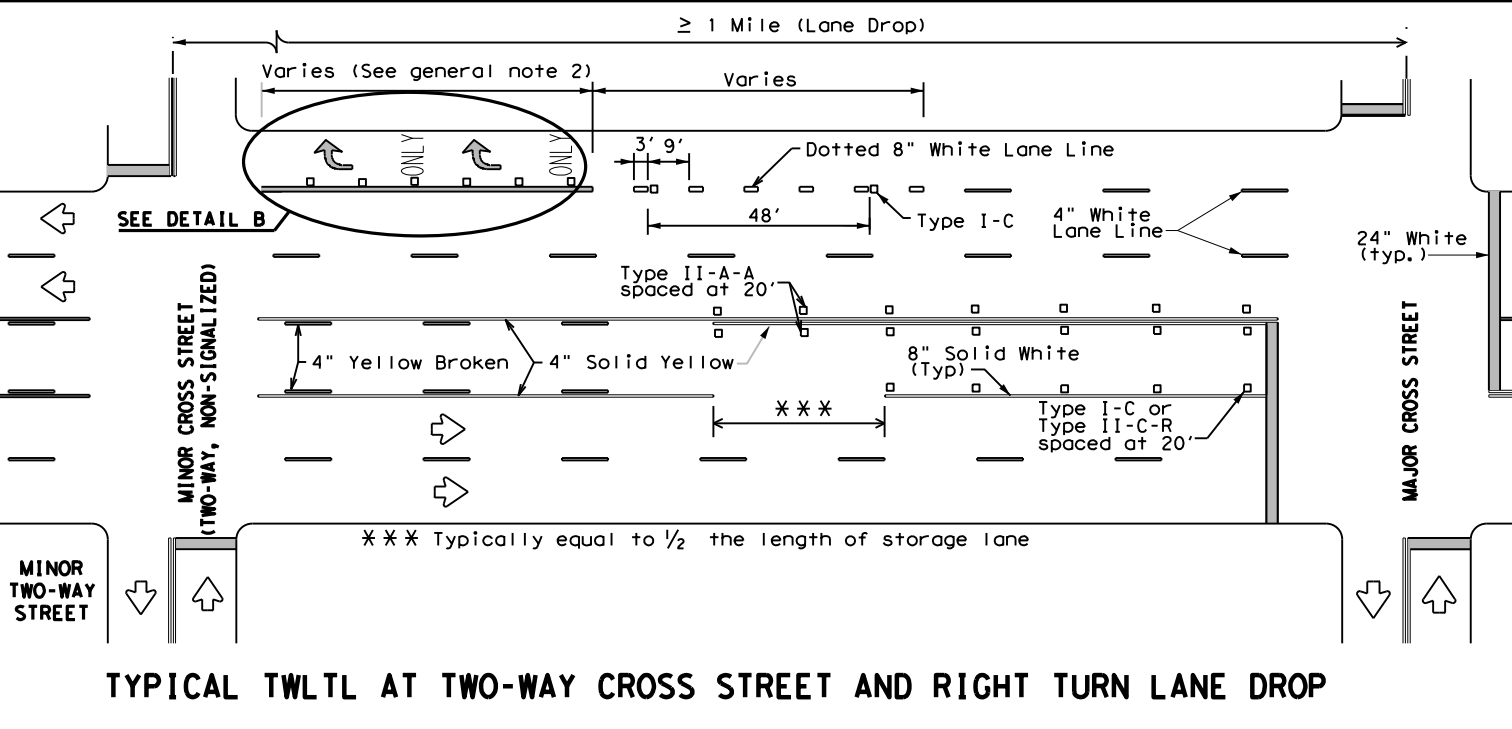

TYPICAL TWLTL AT TWO-WAY CROSS STREET AND RIGHT TURN LANE DROP

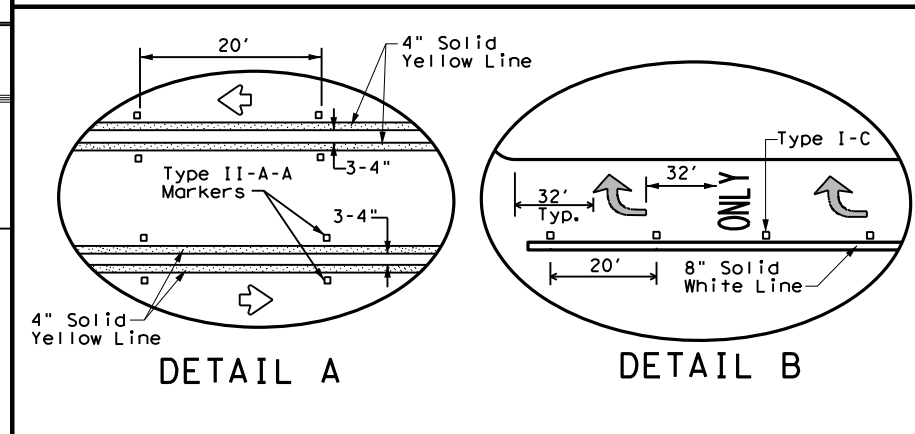

DETAIL A

DETAIL B


Texas Department of Transportation
 Traffic Safety Division Standard

TWO-WAY LEFT TURN LANES, RURAL LEFT TURN BAYS, AND LANE REDUCTION PAVEMENT MARKINGS PM(3) - 20

FILE: pm3-20.dgn	DN:	CK:	DW:	CK:
© TxDOT April 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044, ETC.FM 1378, ETC.	
5-00 2-10	DIST	COUNTY	SHEET NO.	
8-00 2-12	DAL	COLLIN	302	
3-03 6-20				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/12/2022 11:09:51 AM
 FILE: c:\txdot\pw_online\matthew.norris\0483316\pm4-20.dgn

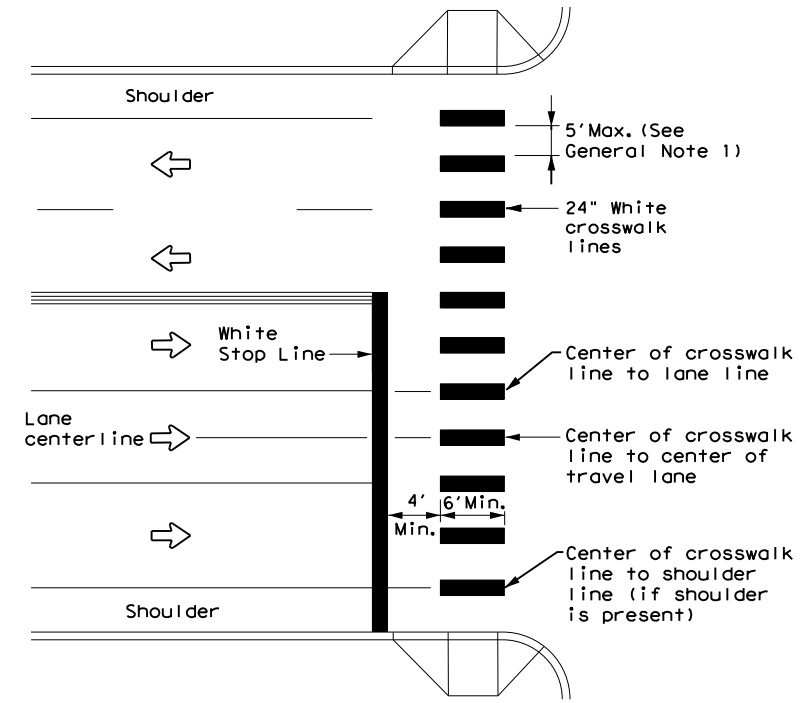


HIGH-VISIBILITY LONGITUDINAL CROSSWALK AT CONTROLLED APPROACH

GENERAL NOTES

1. Longitudinal crosswalk lines should not be placed in the wheel path of vehicles. Center the crosswalk lines on travel lanes, lane lines, and shoulder lines (if present).
2. A minimum 6" clear distance shall be provided to the curb face. If the last crosswalk line falls into this distance it must be omitted.
3. For divided roadways, adjustments in spacing of the crosswalk lines should be made in the median so that the crosswalk lines are maintained in their proper location across the travel portion of the roadway.
4. At skewed crosswalks, the crosswalk lines are to remain parallel to the lane lines.
5. Each crosswalk shall be a minimum of 6' wide.
6. The High-Visibility Longitudinal Crosswalk is the preferred crosswalk pattern on State Highways. Other crosswalk patterns as shown in the "Texas Manual on Uniform Traffic Control Devices" may be used. All crosswalk designs and dimension shall comply with the "Texas Manual on Uniform Traffic Control Devices."
7. Final placement of Stop Bar/Yield Triangles and Crosswalk shall be approved by the Engineer in the field.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

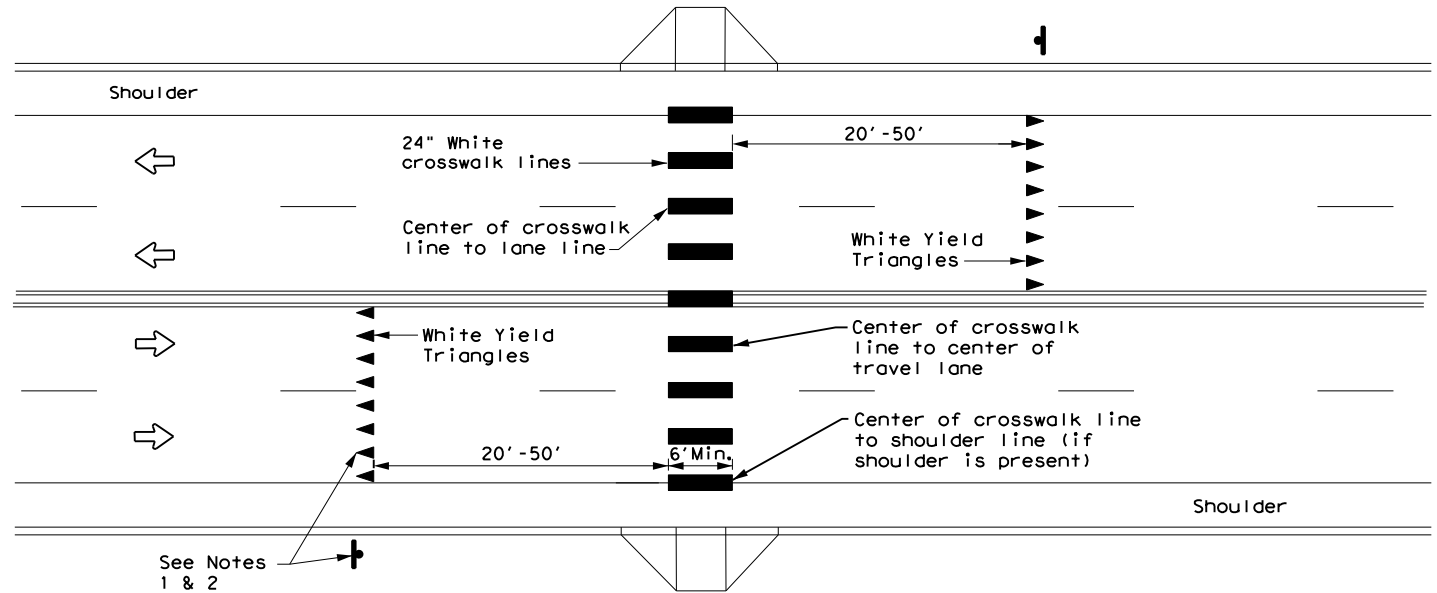

UNSIGNALIZED MID BLOCK HIGH-VISIBILITY LONGITUDINAL CROSSWALK

NOTES

1. Use yield triangles with "Yield Here to Pedestrians" signs at unsignalized mid block crosswalks.
2. Use stop bars with "Stop Here on Red" signs at mid block crosswalks controlled by traffic signals or pedestrian hybrid beacons.

		Texas Department of Transportation		Traffic Safety Division Standard	
<h2>CROSSWALK PAVEMENT MARKINGS</h2> <h3>PM(4) -20</h3>					
FILE:	pm4-20.dgn	DN:	CK:	DW:	CK:
© TxDOT	June 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS		1392	01	044, ETC.FM 1378, ETC.	
DIST	COUNTY	SHEET NO.			
DAL	COLLIN	303			

A. GENERAL SITE DATA

1. PROJECT LIMITS: FM 1378 @ FM 3286

Begin Project Coordinates : Latitude (N) : 33.085236 Longitude (W) : -96.579594

2. PROJECT SITE MAPS:

- * Project Location Map: See Title Sheet and Project Layout Sheets.
- * Drainage Patterns: See Exterior Drainage Area Map Sheet.
- * Slopes Anticipated After Major Gradings or Areas of Soil Disturbance: See typical Sections Sheets
- * Location of Erosion and Sediment Controls: See SW3P Site Map Sheets
- * Surface Waters and Discharge Locations: See Culvert Layouts Sheets
- * Project Specific Location(s) (PSL): To be determined by the project Construction Personnel. Location(s) shown on SW3P Site Map (if PSL location(s) is within one mile of project) and information located in project SW3P Binder (Reference Item *10 below).

3. PROJECT DESCRIPTION:

CONSTRUCT INTERSECTION IMPROVEMENTS (SIDEWALK & TURN LANES)

4. MAJOR SOIL DISTURBING ACTIVITIES:

Construction of Intersection Improvements consisting of paving, grading, final surface preparation, revegetation, Drainage, Signing and Traffic Signal Construction, and final surface preparation and vegetation.

5. EXISTING CONDITION OF SOIL & VEGETATIVE COVER AND % OF EXISTING VEGETATIVE COVER:

Gentle sloping to sloping, 100% materials were light to dark brown clay with aggregate fragments and fill sand at the top layers. The project area consists mostly of short grasses and shrubs, with a few small trees throughout. A portion of the site has been developed with streets and houses. The estimated existing vegetative cover is 60%.

6. TOTAL PROJECT AREA: 17.80 Acres

7. TOTAL AREA TO BE DISTURBED: 16.90 Acres

8. WEIGHTED RUNOFF COEFFICIENT

BEFORE CONSTRUCTION: 0.45
AFTER CONSTRUCTION: 0.50

9. NAME OF RECEIVING WATERS:

White Rock Creek East Tributary No:1, which flows to Lake Lavon (Segment 082), no water quality impairments).

10. PROJECT SW3P Binder:

A. For projects disturbing one to five acres, TxDOT will maintain a SW3P Binder at the project field office (if there is not a project field office, should be kept at the Area Office) which contains the following: Index Sheet, TCEQ Signature Authority, TxDOT's and Contractor's Small Construction Site Notice, SW3P Inspector Qualification Statements, EPIC Sheet, SW3P Sheet, Site Location Maps, Inspection and Maintenance Reports (Form 2118), Construction Stage Gate Checklist(s) (CSGC), Stored Material Lists specifying associated control measures and the Appendix which contains the TPDES Construction General Permit, TxDOT and Contractor MS4 Operator Notification(s) and the Construction PSL Permits per all applicable requirements.

B. For projects disturbing 5 acres or more, TxDOT will follow the actions listed in (10.A.) above with the addition of the following: TxDOT and Contractor Notice Of Intent (N.O.I.) and Fee Payment Form, TxDOT and Contractor Large Construction Site Notice (to be used instead of Small Site Notice), and TPDES Permit Coverage Notice.

C. For projects disturbing less than one acre, actions described in (10.A.) and (10.B.) above are not required. Acreage is calculated by adding Total Area To Be Disturbed Acres on project (See *7 above) and the PSL(s) acreage located within one mile of project.

B. EROSION AND SEDIMENT CONTROLS

1. SOIL STABILIZATION PRACTICES: (Select T = Temporary or P = Permanent, as applicable)

- | | |
|------------------------------------|--|
| <u>T</u> TEMPORARY SEEDING | <u>P</u> PRESERVATION OF NATURAL RESOURCES |
| <u>---</u> MULCHING (Hay or Straw) | <u>---</u> FLEXIBLE CHANNEL LINER |
| <u>---</u> BUFFER ZONES | <u>---</u> RIGID CHANNEL LINER |
| <u>---</u> PLANTING | <u>---</u> SOIL RETENTION BLANKET |
| <u>---</u> SEEDING | <u>P</u> COMPOST MANUFACTURED TOPSOIL |
| <u>P</u> SODDING | <u>P</u> VERTICAL TRACKING |
| | <u>---</u> OTHER: |

2. STRUCTURAL PRACTICES: (Select T = Temporary or P = Permanent, as applicable)

- | |
|---|
| <u>T</u> SILT FENCES |
| <u>T</u> EROSION CONTROL LOGS |
| <u>---</u> EROSION CONTROL COMPOST BERMS (Low Velocity) |
| <u>T</u> ROCK FILTER DAMS |
| <u>---</u> DIVERSION, INTERCEPTOR, OR PERIMETER DIKES |
| <u>---</u> DIVERSION, INTERCEPTOR, OR PERIMETER SWALES |
| <u>---</u> DIVERSION DIKE AND SWALE COMBINATIONS |
| <u>---</u> PIPE SLOPE DRAINS |
| <u>---</u> PAVED FLUMES |
| <u>T</u> ROCK BEDDING AT CONSTRUCTION EXIT |
| <u>---</u> TIMBER MATTING AT CONSTRUCTION EXIT |
| <u>---</u> CHANNEL LINERS |
| <u>---</u> SEDIMENT TRAPS |
| <u>---</u> SEDIMENT BASINS |
| <u>---</u> STORM INLET SEDIMENT TRAP |
| <u>P</u> STONE OUTLET STRUCTURES |
| <u>P</u> CURBS AND GUTTERS |
| <u>P</u> STORM SEWERS |
| <u>---</u> VELOCITY CONTROL DEVICES |
| <u>---</u> OTHER: |

NOTE: TOP OF BMP'S SHOULD NOT BE HIGHER THAN ROADWAY ELEVATION AS NOT TO FLOOD ROADWAY UNLESS PRIOR APPROVAL FROM ENGINEER IS OBTAINED.

3. STORM WATER MANAGEMENT:

- A. Storm water drainage will be provided by ditches, inlets, and storm water systems which carry drainage within the R.O.W. to the lows within the roadway and project site which drains to natural facilities.
- B. Concrete washout, portable sanitary units and other chemicals shall not be stored within 50 feet upgradient of a stormwater drainage feature without implementation of appropriate pollution prevention and control devices.

4. STORM WATER MANAGEMENT ACTIVITIES: (Sequence of Construction See Phases 1-2)

See construction progress schedule and durations of relevant soil disturbance and stabilization activities.

1. PLACE ADVANCED WARNING AND TEMPORARY TRAFFIC CONTROL SIGNS AND TCP DEVICES.
2. PLACE EROSION, SEDIMENT AND POLLUTION PREVENTION/CONTROL DEVICES AS APPROPRIATE TO PROTECT STORMWATER DISCHARGE QUALITY AT PROXIMAL STORMWATER DRAINAGE FEATURES AND TO PREVENT SEDIMENTATION OF ADJACENT ACTIVE ROADWAYS.
3. STABILIZE SOIL WITH TEMPORARY SEEDING OR PERMANENT SODDING AS OUTLINED IN SW3P.
4. FINAL CLEAN UP AND REMOVAL OF EROSION AND SEDIMENT CONTROL DEVICES.

Sedimentation basins are not feasible on this project due to limited room within the TxDOT ROW. Alternate BMPs have been included in the SW3P Site Plan to provide equivalent sedimentation control.

5. NON-STORM WATER DISCHARGES:

Filter non-storm water discharges, or hold in retention basins, before being allowed to mix with storm water. These discharges consist of, but not limited to, non-polluted ground water, spring water, foundation or footing drain water, water used for dust control or pavement washing and vehicle washwater containing no detergents.

C. OTHER REQUIREMENTS & PRACTICES

1. MAINTENANCE:

Maintain all erosion and sediment controls in good working order. Perform any necessary cleaning/repairs/replacements at the earliest possible date prior to next rain event, but no later than 7 calendar days. Ensure the surrounding ground has dried sufficiently to prevent damage from equipment. "Too Wet" is the only reason for not adhering to timeframes described. When construction activities permanently or temporarily cease and are not expected to resume for 14 or more days on a disturbed portion of the site, stabilization measures must be initiated immediately.

2. INSPECTION:

A TxDOT Inspector will perform a regularly scheduled SW3P Inspection every 7 calendar days. An Inspection and Maintenance Report, signed by the TxDOT Inspector and the Contractor, will be filed for each inspection. Revise/clean/repair/replace each BMP control device in accordance with the current Field Inspection and Maintenance Report (Form 2118) and Item 1 (Maintenance) above.

3. WASTE MATERIALS:

On a daily basis, or as may be directed, collect all waste materials, trash and debris from the construction site and deposit into a metal dumpster having a secure cover and which meets all state and local city solid waste management requirements. Empty the dumpster as required by regulation, or as may be directed, at a local approved landfill site. Do not bury construction waste on the construction project site.

4. HAZARDOUS WASTE & SPILL REPORTING:

As a minimum, any products in the following categories are considered to be hazardous: Paints, Acids, Solvents, Fuels, Asphalt Products, Chemical Additives for Soil Stabilization, and Concrete Curing Compounds or Additives. When storing hazardous material on the project site, or at a Project Specific Location, take all practicable precaution to prevent and/or contain any spillage of these materials. In the event of a spill, contact the spill coordinator immediately.

5. SANITARY WASTE:

Use a licensed sanitary waste management contractor to collect all sanitary waste from portable units as may be required by local regulation, or as directed.

6. CONSTRUCTION VEHICLE TRACKING:

On a regular basis, or as may be directed, dampen haul roads for dust control and construct construction entrances/exits. Provide for a motorized broom or vacuum type sweeper to be available on a daily basis, or as may be directed, to remove sediment from paved roadways on project, abutting and traversing the project site.

7. MANAGEMENT PRACTICES:

- A. Construct disposal areas, stockpiles, haul roads and PSL's in a manner that will minimize and control the amount of sediment that may enter receiving waters. Do not locate disposal areas in any wetland, waterbody or streambed.
- B. Locate construction staging areas, vehicle maintenance and PSL's areas in a manner to minimize the runoff of pollutants.
- C. When working in or near a wetland, install and maintain operating soil erosion and sediment controls at all times during construction and isolate the work from the wetland.
- D. Clear all waterways as soon as practicable of temporary embankment, temporary bridges, matting, falsework, piling, debris or other obstructions placed during construction operations that are not a part of the finished work.
- E. Procedures and/or practices should be taken to control dust.
- F. Sediment to be removed from roadways daily or when work begins after weather events if construction activities have ceased due to weather event.

FILE NAME _____ DATE _____ DESIGNER _____

PRELIMINARY		Texas Department of Transportation © 2022	
FOR REVIEW ONLY Not intended for construction, bidding or permit purposes.		DALLAS DISTRICT ENVIRONMENTAL	
Engineer: IBRAHIM I. EL SAAD P.E. No.: 142049 Date: 1/14/2022		STORM WATER POLLUTION PREVENTION PLAN (SW3P)	
TEMPLATE REVISION DATE: 02/07/18			
DESIGN SM	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. SEE TITLE SHEET	
GRAPHICS SM	STATE	DISTRICT	COUNTY
CHECK	TEXAS	DAL	DALLAS
CHECK	CONTROL	SECTION	JOB
Signature of Registrant & Date		1392	01 044, etc.

304

DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act".
 No warranty of any kind is made by TxDOT for any purpose whatsoever.
 TxDOT assumes no responsibility for the conversion of this standard to other
 formats or for incorrect results or damage resulting from its use.

Notes To Designer:
 1. Do not alter Sheet Design or Font style, size or weight - match text attributes.
 2. If additional space is needed for a numbered section, fence and adjust sections up or down
 as needed for proportioning and readability but do not relocate from its relative position.
 3. All areas should be addressed thoroughly and verify the necessary pay items are set up to
 support actions needed.
Filed Out: xx/xx/xxxx
Prepared by:

I. STORMWATER POLLUTION PREVENTION PLAN-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.
 List adjacent MS 4 Operator(s) that receive discharges from this project. They need to be notified prior to construction activities.
 (Note: Leave blank only if no adjacent MS 4 Operator(s) are affected.)

1. City of Lucas Phase II MS 4- Contact Stanton Foerster.

No Action Required Required Action

Action Number:

1. Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000.
2. Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
3. Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
4. When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas. No equipment is allowed in any stream channel below the ordinary High Water Mark except on approved temporary stream crossings or drill pads.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required: NWP# 3(a)

Required Actions: List Waters of the US Permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

REFER TO EPIC SHEET 2 OF 2 FOR SECTION II - FOR CONTINUATION OF SECTIONS 401 AND 404

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices for applicable 401 General Conditions:
 (Note: If CORP Permit not required, do not check boxes.)

Erosion	Sedimentation	Post-Construction TSS
<input checked="" type="checkbox"/> Temporary Vegetation	<input checked="" type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Mulch Filter Berm and Socks
<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input checked="" type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	<input type="checkbox"/> Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

No Action Required Required Action

Action Number:

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751 & 752 in order to comply with requirements for invasive species, beneficial landscaping and tree/brush removal commitments.

No Action Required Required Action

Action Number:

- 1.
- 2.
- 3.

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS TREATY ACT.

No Action Required Required Action

Action Number:

1. Texas garter snake and slender glass lizard - Terrestrial Reptile BMPs: a) Apply hydromulching and/or hydroseeding in areas for soil stabilization and/or revegetation of disturbed areas where feasible. If hydromulching and/or hydroseeding are not feasible due to site conditions, utilize erosion control blankets or mats that contain no netting or contain loosely woven, natural fiber netting is preferred. Plastic netting should be avoided to the extent practicable. b) For open trenches and excavation pits, install escape ramps at an angle of less than 45 degrees (1:1) in areas left uncovered. Visually inspect excavation areas for trapped wildlife prior to backfilling. c) Inform contractors that if reptiles are found on project site, allow species to safely leave the project area. d) Avoid or minimize disturbing or removing downed trees, rotting stumps, and leaf litter where feasible. e) Contractors will be advised of potential occurrence in the project area, and to avoid harming the species if encountered.

REFER TO EPIC SHEET 2 OF 2 FOR SECTION II - FOR CONTINUATION OF SECTIONS V

Special Note: The Migratory Bird Act of 1918 states that it is unlawful to kill, capture, collect, possess, buy, sell, trade or transport any migratory bird, nest, young, feather or egg in part or in whole, without a federal permit issued in accordance with the Act's policies and regulations. The contractor would remove all old migratory bird nests from any structure or trees where work would be done from October 1 to February 15. In addition, the contractor would be prepared to prevent migratory birds from building nest(s) between February 15 to October 1. In the event that migratory birds are encountered on-site during project construction, efforts to avoid adverse impacts on protected birds, active nests, eggs and/or young would be observed.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corp of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act. Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- * Dead or distressed vegetation (not identified as normal)
- * Trash piles, drums, canisters, barrels, etc.
- * Undesirable smells or odors
- * Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation(s) or replacement(s) (bridge class structures not including box culverts)?

Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

No Action Required Required Action

Action Number:

- 1.

VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)

No Action Required Required Action

Action Number:

GENERAL NOTE:

Any change orders and/or deviations from the final design must be reported to the Engineer prior to commencement of construction activities, as additional environmental clearance may be required.



ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS (EPIC) SHEET 1 OF 2

FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. SEE TITLE SHEET		HIGHWAY NO. FM 1378
STATE TEXAS	DISTRICT DALLAS	COUNTY Collin	SHEET NO.
CONTROL 1392	SECTION 01	JOB 044, ETC.	305

DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act".
 No warranty of any kind is made by TxDOT for any purpose whatsoever.
 TxDOT assumes no responsibility for the conversion of this standard to other
 formats or for incorrect results or damage resulting from its use.

Notes To Designer:
 1. Do not alter Sheet Design or Font style, size or weight - match text attributes.
 2. If additional space is needed for a numbered section, fence and adjust sections up or down
 as needed for proportioning and readability but do not relocate from its relative position.
 3. All areas should be addressed thoroughly and verify the necessary pay items are set up to
 support actions needed.
 Filled Out: xxxxxx
 Prepared By:

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER
 ACT SECTIONS 401 AND 404 - CONTINUATION FROM PAGE 1.


1. Unnamed Tributary to Lake Lavon- Desc: Sta. 24+50
2. Unnamed Tributary to Lake Lavon- Desc: Sta. 30+05
3. Unnamed Tributary to Lake Lavon -Desc: Sta. 103+00

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES,
 CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES
 AND MIGRATORY BIRD TREATY ACT.- CONTINUATION FROM PAGE 1.

2. Eastern spotted skunk - Contractors will be advised of potential occurrence in the project area, to avoid harming the species if encountered, and avoid unnecessary impacts to dens.
3. Western Burrowing Owl Bird BMPs: In addition to complying with the Migratory Bird Treaty Act perform the following BMPs: a) Prior to construction, perform daytime surveys for nests including under bridges and in culverts to determine if they are active before removal. Nests that are active should not be disturbed. b) Do not disturb, destroy, or remove active nests, including ground nesting birds, during the nesting season. c) Avoid the removal unoccupied, inactive nests, as practicable. d) Prevent the establishment of active nests during the nesting season on TxDOT owned and operated facilities and structures proposed for replacement or repair. e) Do not collect, capture, relocate, or transport birds, eggs, young, or active nests without a permit.
4. Woodhouse's toad - Contractors will be advised of potential occurrence in the project area, and to avoid harming the species if encountered.

NA...


GENERAL NOTE:
 Any change orders and/or deviations from the final design must be reported to the Engineer prior to commencement of construction activities, as additional environmental clearance may be required.

© 2020  Texas Department of Transportation
 Dallas District

**ENVIRONMENTAL PERMITS,
 ISSUES AND COMMITMENTS
 (EPIC)** SHEET 2 OF 2

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
6	SEE TITLE SHEET		FM 1378
STATE	DISTRICT	COUNTY	
TEXAS	DALLAS	Collin	
CONTROL	SECTION	JOB	
1392	01	044, ETC.	
			SHEET NO. 306


FILE: c:\txdot\pw\onl\ine\txdot5\mot\thw.norr\is\0326861\SW3P_P1S1_SITE_MAP_SHEETS.dgn
 TIME: 11:43:06 AM
 DATE: 1/14/2022



LEGEND

- DIRECTION OF FLOW
- ⊖ SCF SEDIMENT CONTROL FENCE
- ⊖ ECL EROSION CONTROL LOG
- ⊖ RFD2 ROCK FILTER DAM (TY II)
- ⊖ AREF AMPHIBIAN AND REPTILE EXCLUSION FENCE
- ▭ CONSTRUCTION EXIT
- ▨ TEMPORARY SEEDING
- ▩ PERMANENT BLOCK SODDING
- PERMANENT CONSTRUCTION PREVIOUS PHASE
- PERMANENT CONSTRUCTION THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
 CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.
 BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.
 SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

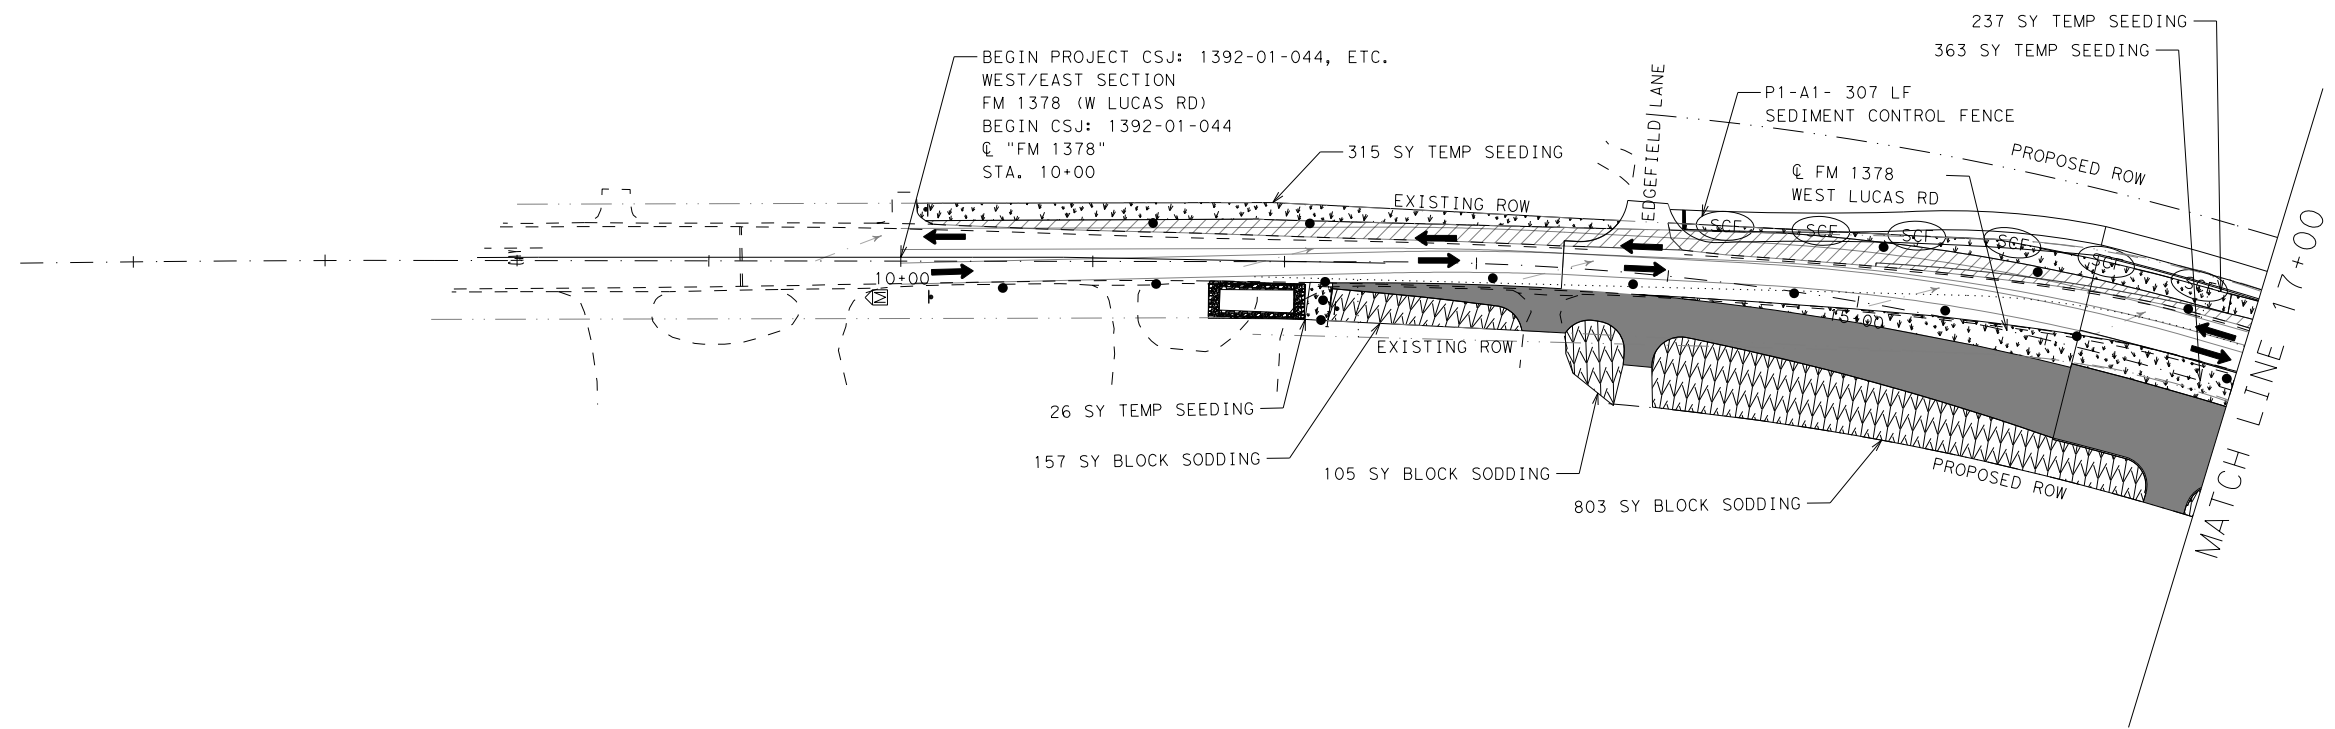

PRELIMINARY

FOR REVIEW ONLY
 Not intended
 for construction, bidding or
 permit purposes.

Engineer: IBRAHIM I. EL SAAD
 P.E. No.: 142049
 Date: 1/14/2022

P1-Ⓐ

DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES

BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE
P1-A1					



© 2022

FM 1378
AT FM 3286
SW3P SITE MAP
PHASE I STAGE 1

SCALE: 1"=100' SHEET 01 OF 04

DESIGN PR	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
PR	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK	TEXAS	DAL	COLLIN	307
CHECK	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	

DATE: 1/14/2022 TIME: 11:43:09 AM FILE: c:\txdot\pw\onl\ine\txdot5\mot\thw.norr\is\0326861\SW3P_P1S1_SITE_MAP_SHEETS.dgn

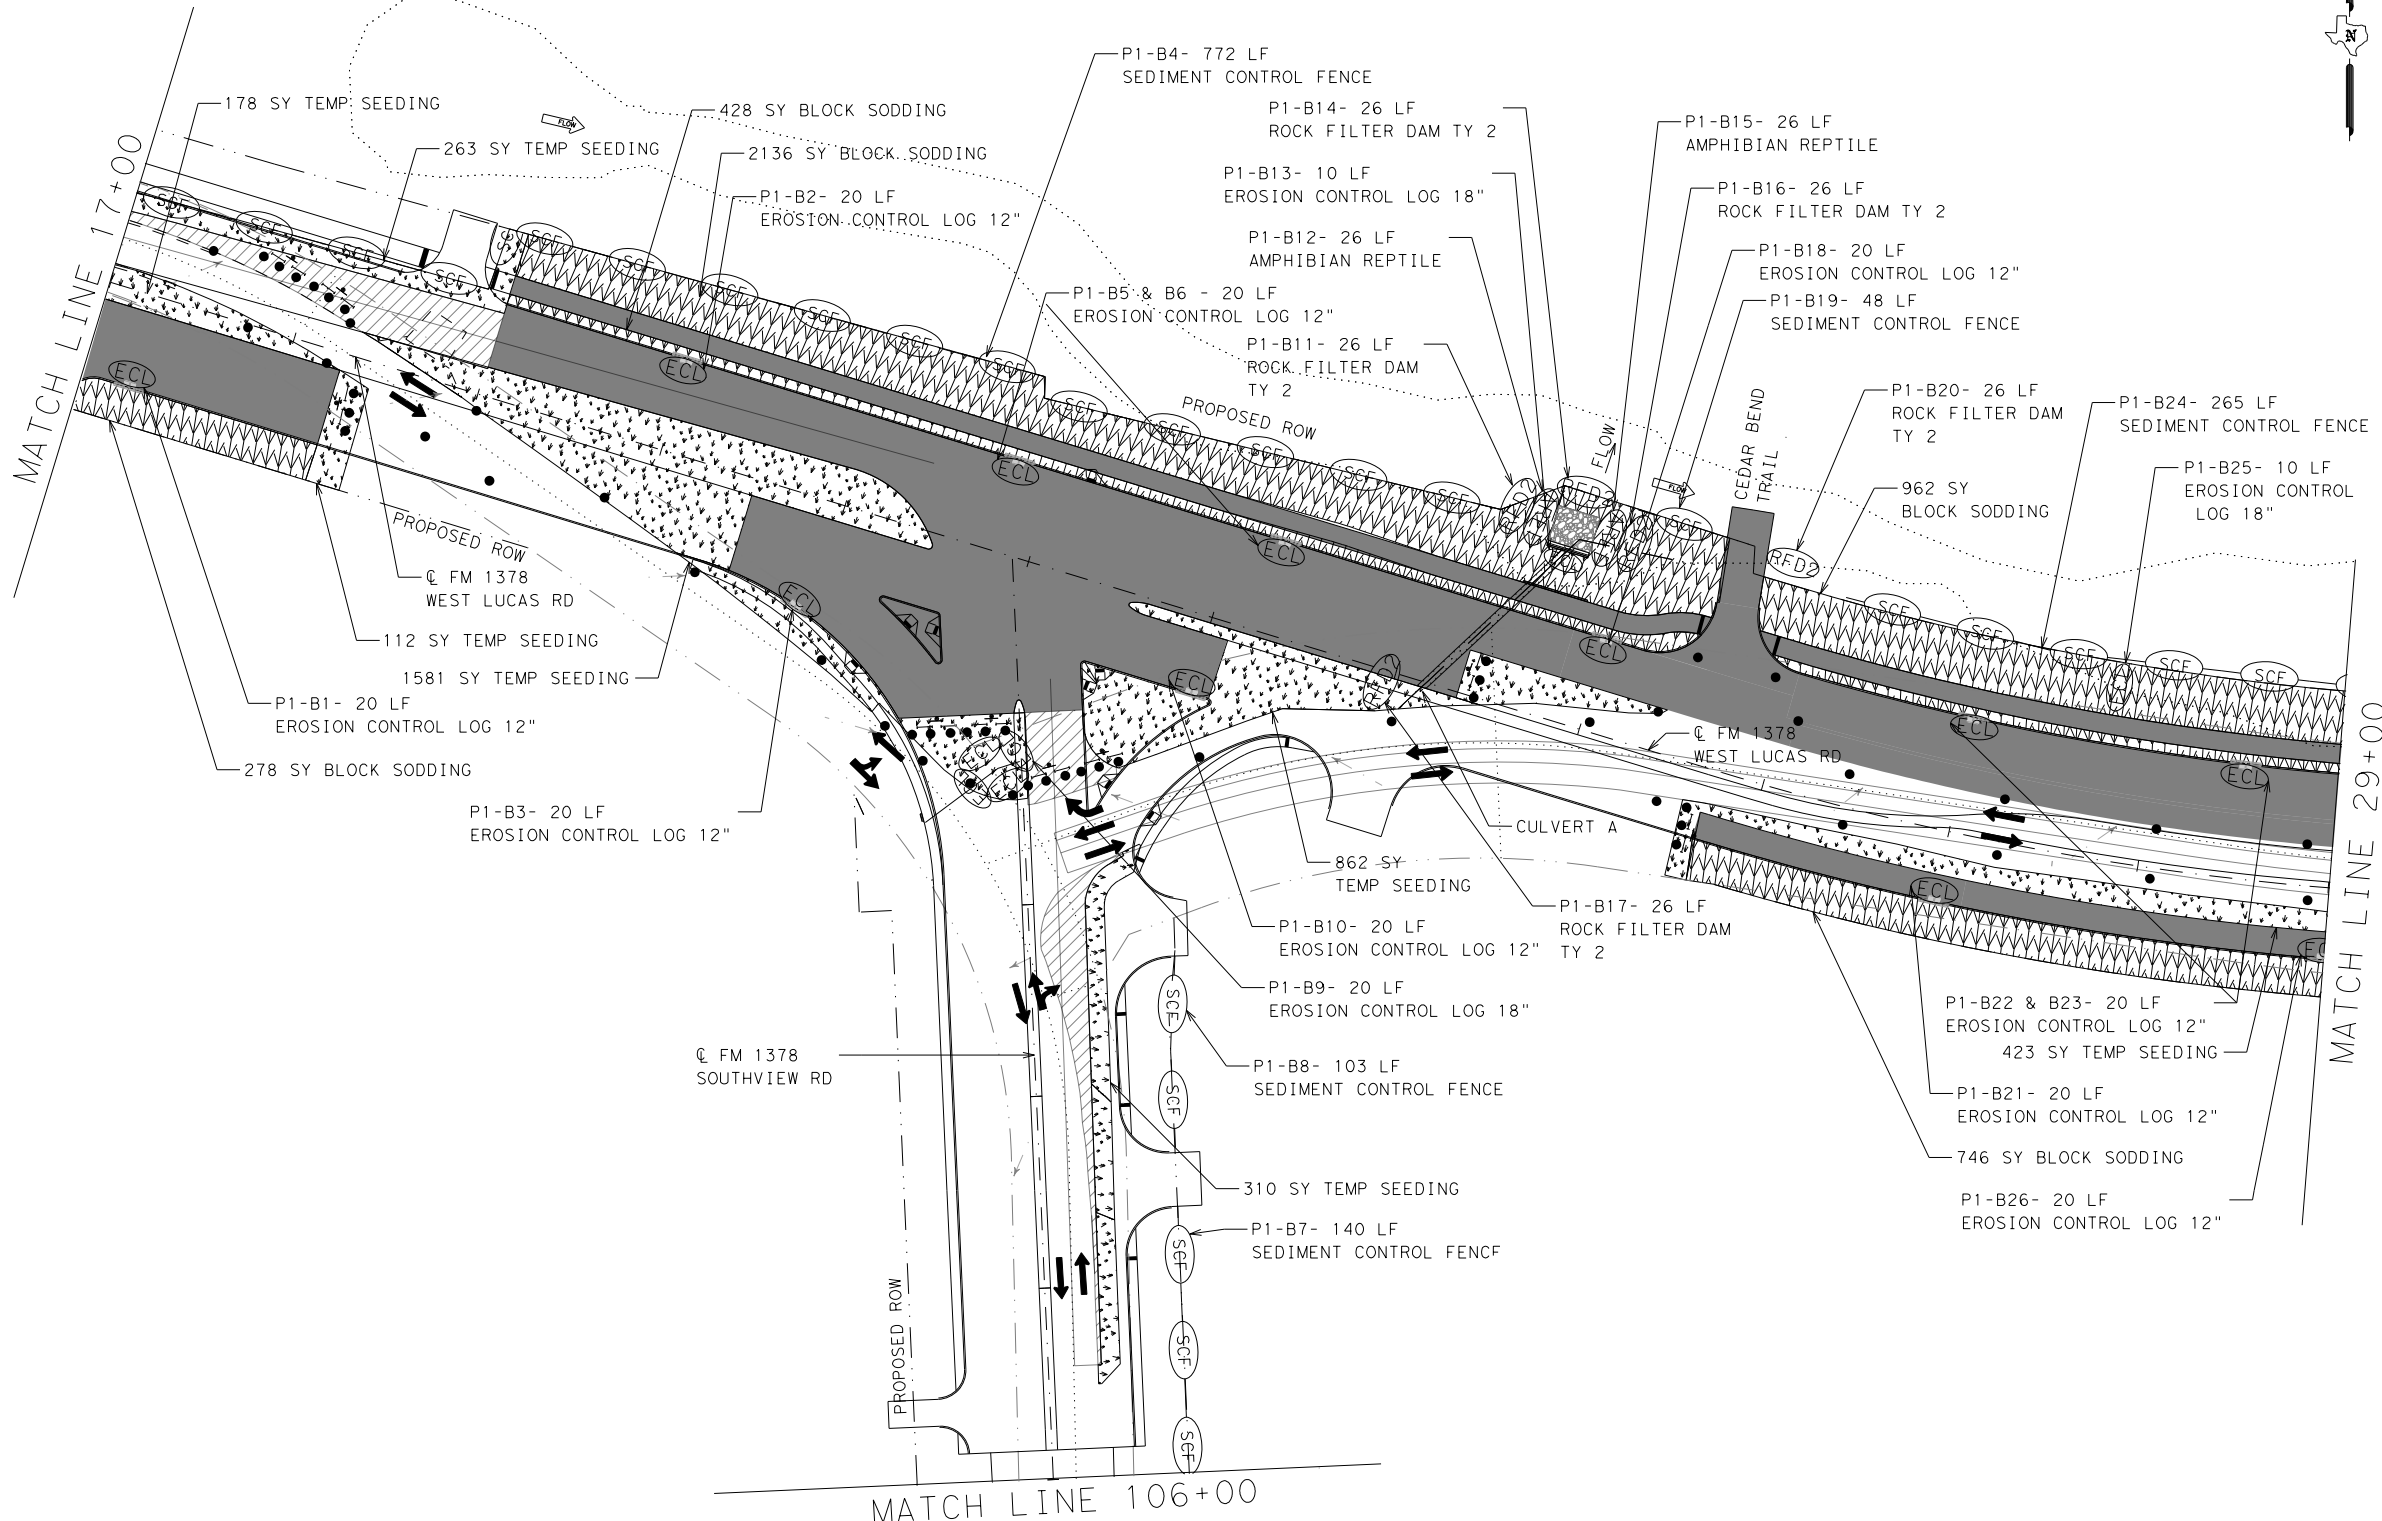

- LEGEND**
- DIRECTION OF FLOW
 - SCF SEDIMENT CONTROL FENCE
 - ECL EROSION CONTROL LOG
 - RFD2 ROCK FILTER DAM (TY II)
 - AREF AMPHIBIAN AND REPTILE EXCLUSION FENCE
 - ▭ CONSTRUCTION EXIT
 - ▨ TEMPORARY SEEDING
 - ▩ PERMANENT BLOCK SODDING
 - ▭ PERMANENT CONSTRUCTION PREVIOUS PHASE
 - ▭ PERMANENT CONSTRUCTION THIS PHASE
 - ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
 - ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.

BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.

SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

PRELIMINARY

FOR REVIEW ONLY
Not intended
for construction, bidding or
permit purposes.

Engineer: IBRAHIM I. EL SAAD
P.E. No.: 142049
Date: 1/14/2022



FM 1378
AT FM 3286
**SW3P SITE MAP
PHASE 1 STAGE 1**

SCALE: 1"=100' SHEET 02 OF 04

DESIGN PR	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. SEE TITLE SHEET		HIGHWAY NO. FM 1378, ETC.
GRAPHICS PR	STATE TEXAS	DISTRICT DAL	COUNTY COLLIN	SHEET NO. 308
CHECK	CONTROL 1392	SECTION 01	JOB 044, ETC.	



P1-ⓑ

DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES


BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE
P1-B1			P1-B8			P1-B15			P1-B22		
P1-B2			P1-B9			P1-B16			P1-B23		
P1-B3			P1-B10			P1-B17			P1-B24		
P1-B4			P1-B11			P1-B18			P1-B25		
P1-B5			P1-B12			P1-B19			P1-B26		
P1-B6			P1-B13			P1-B20					
P1-B7			P1-B14			P1-B21					

DATE: 1/14/2022 TIME: 11:43:13 AM FILE: c:\t\dot\pw\on\line\t\dot\5\mot\thw.norr\is\0326861\SW3P_P1S1_SITE_MAP_SHEETS.dgn

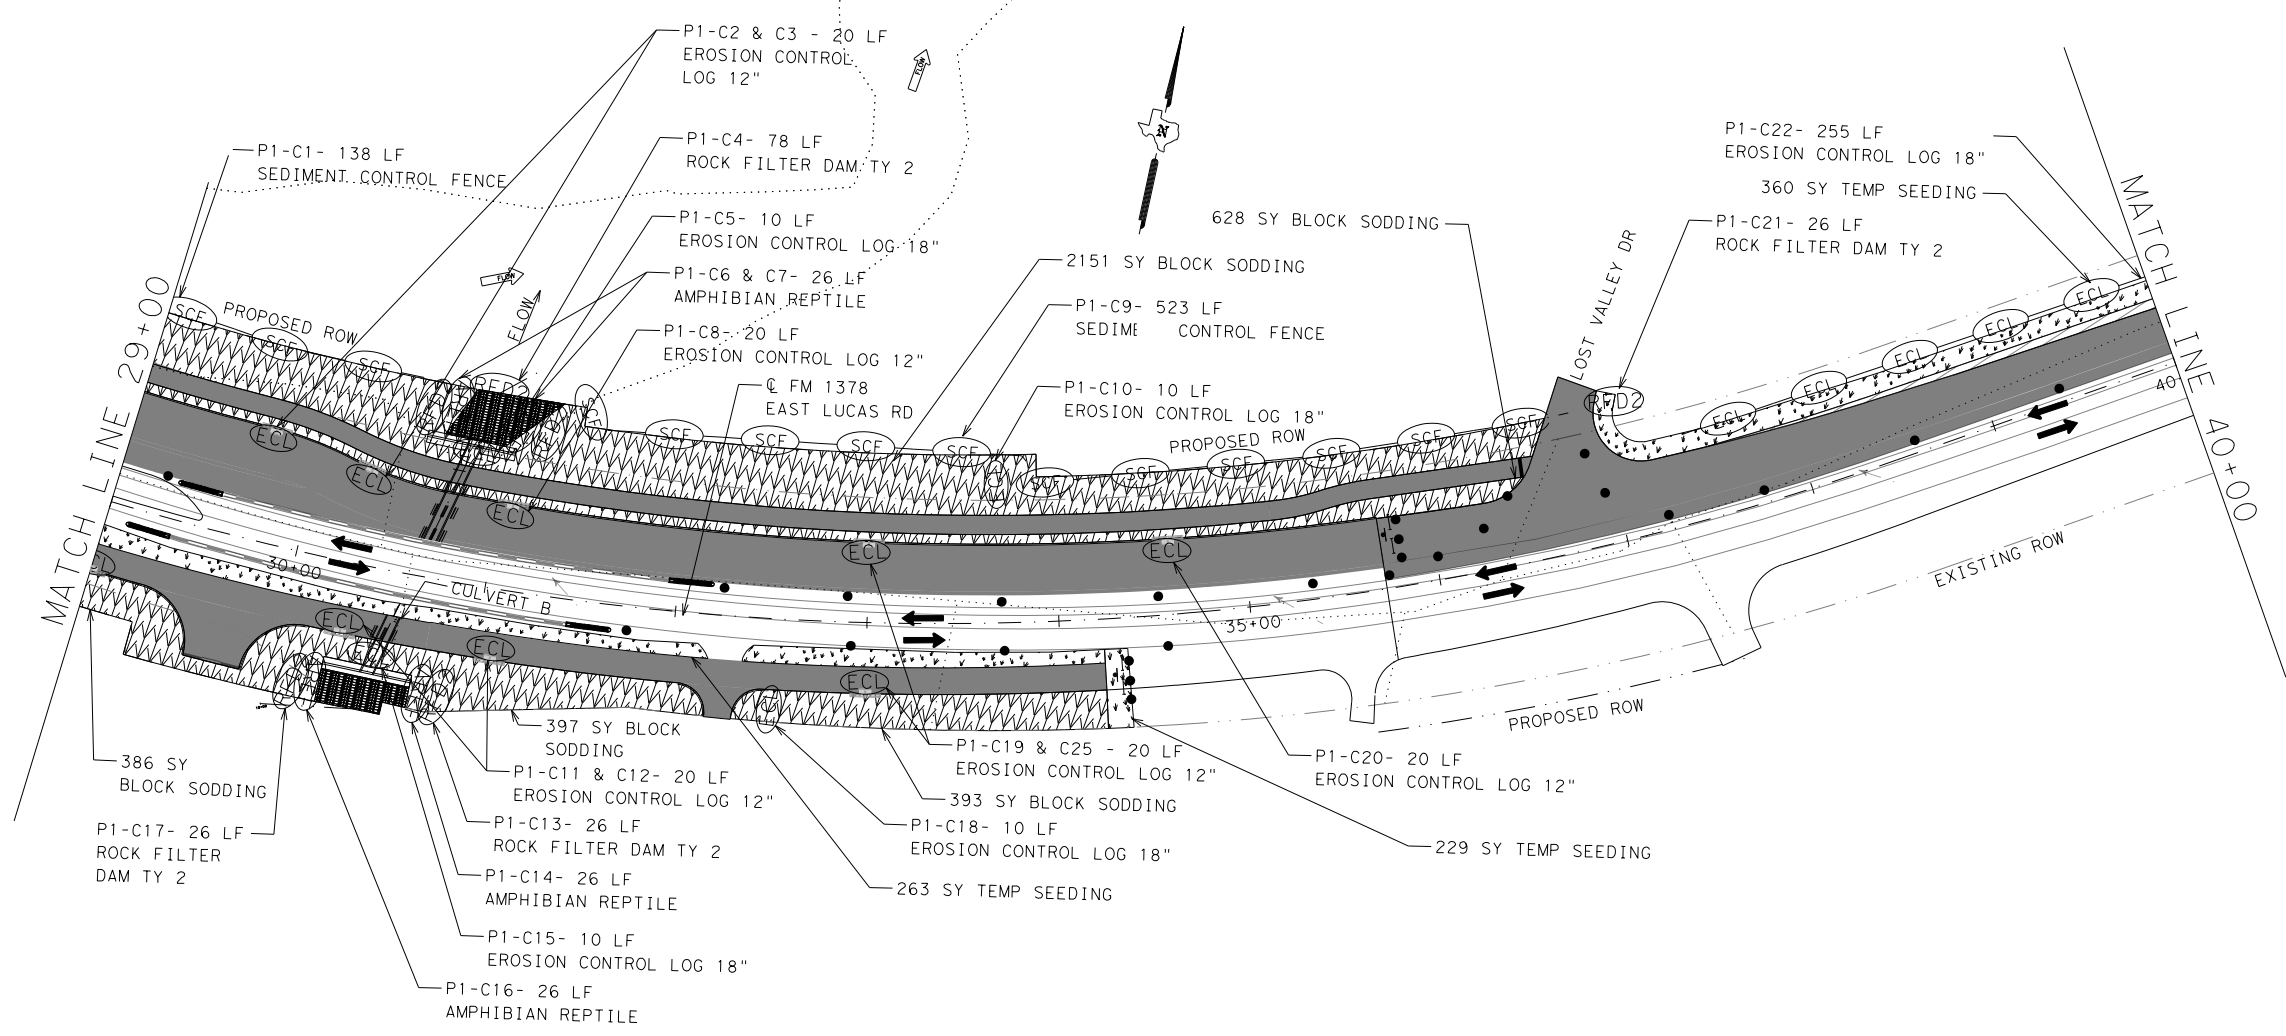

- LEGEND**
- DIRECTION OF FLOW
 - SCF SEDIMENT CONTROL FENCE
 - ECL EROSION CONTROL LOG
 - RFD2 ROCK FILTER DAM (TY II)
 - AREF AMPHIBIAN AND REPTILE EXCLUSION FENCE
 - ▭ CONSTRUCTION EXIT
 - ▨ TEMPORARY SEEDING
 - ▩ PERMANENT BLOCK SODDING
 - ▭ PERMANENT CONSTRUCTION PREVIOUS PHASE
 - ▭ PERMANENT CONSTRUCTION THIS PHASE
 - ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
 - ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.
BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.
SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

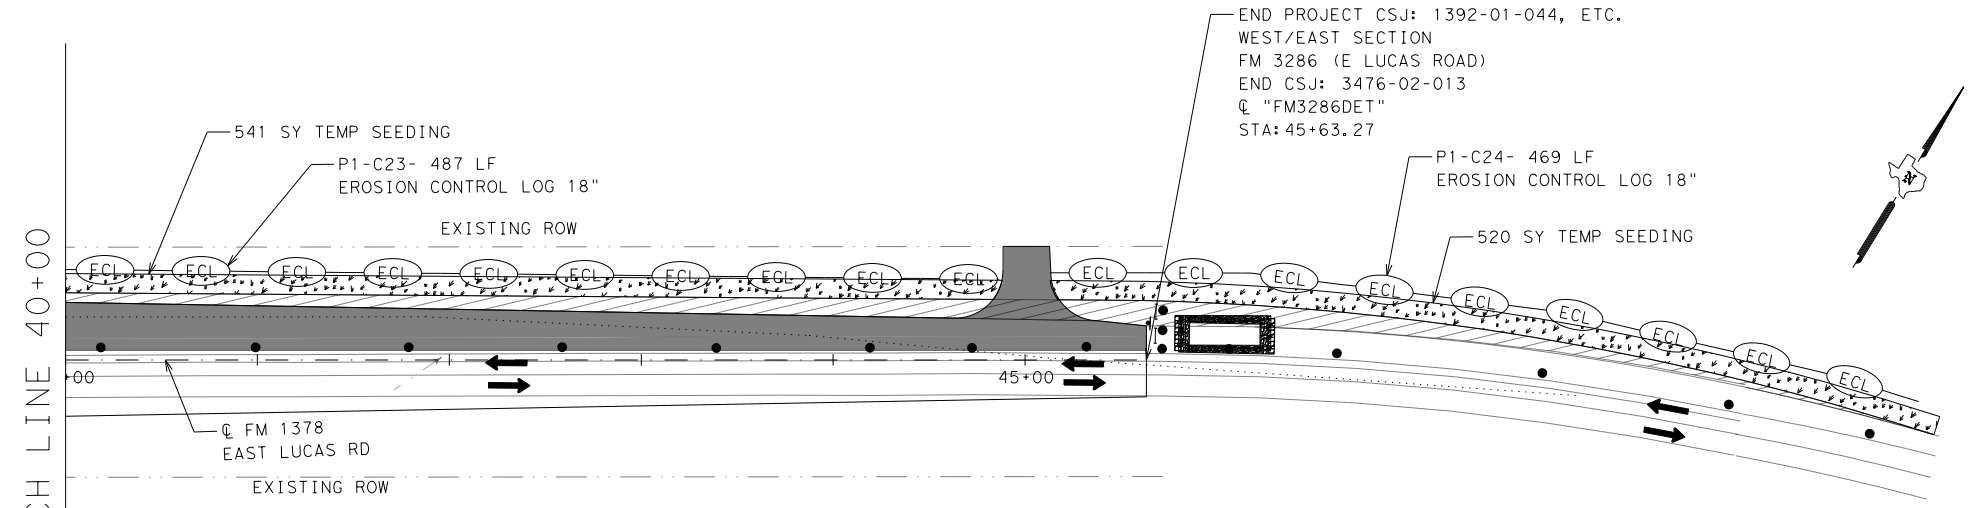

END PROJECT CSJ: 1392-01-044, ETC.
WEST/EAST SECTION
FM 3286 (E LUCAS ROAD)
END CSJ: 3476-02-013
"FM3286DET"
STA: 45+63.27

P1-C

DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES

BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE
P1-C1			P1-C6			P1-C11		
P1-C2			P1-C7			P1-C12		
P1-C3			P1-C8			P1-C13		
P1-C4			P1-C9			P1-C14		
P1-C5			P1-C10			P1-C15		
						P1-C16		
						P1-C17		
						P1-C18		
						P1-C19		
						P1-C20		
						P1-C21		
						P1-C22		
						P1-C23		
						P1-C24		
						P1-C25		

PRELIMINARY

FOR REVIEW ONLY
Not intended for construction, bidding or permit purposes.


Engineer: IBRAHIM I. EL SAAD
P.E. No.: 142049
Date: 1/14/2022



**FM 1378
AT FM 3286
SW3P SITE MAP
PHASE 1 STAGE 1**

SCALE: 1"=100' SHEET 03 OF 04

DESIGN PR	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
GRAPHICS PR	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK	TEXAS	DAL	COLLIN	309
	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	



LEGEND

- DIRECTION OF FLOW
- SCF SEDIMENT CONTROL FENCE
- ECL EROSION CONTROL LOG
- RFD2 ROCK FILTER DAM (TY II)
- AREP AMPHIBIAN AND REPTILE EXCLUSION FENCE
- ▭ CONSTRUCTION EXIT
- ▨ TEMPORARY SEEDING
- ▩ PERMANENT BLOCK SODDING
- PERMANENT CONSTRUCTION PREVIOUS PHASE
- PERMANENT CONSTRUCTION THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.

BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.

SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

PRELIMINARY

FOR REVIEW ONLY
 Not intended
 for construction, bidding or
 permit purposes.

Engineer: IBRAHIM I. EL SAAD
P.E. No.: 142049
Date: 1/14/2022





FM 1378
AT FM 3286
SW3P SITE MAP
PHASE 1 STAGE 1

SCALE: 1"=100' SHEET 04 OF 04

DESIGN PR	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
GRAPHICS PR	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK	TEXAS	DAL	COLLIN	
CHECK	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	

310

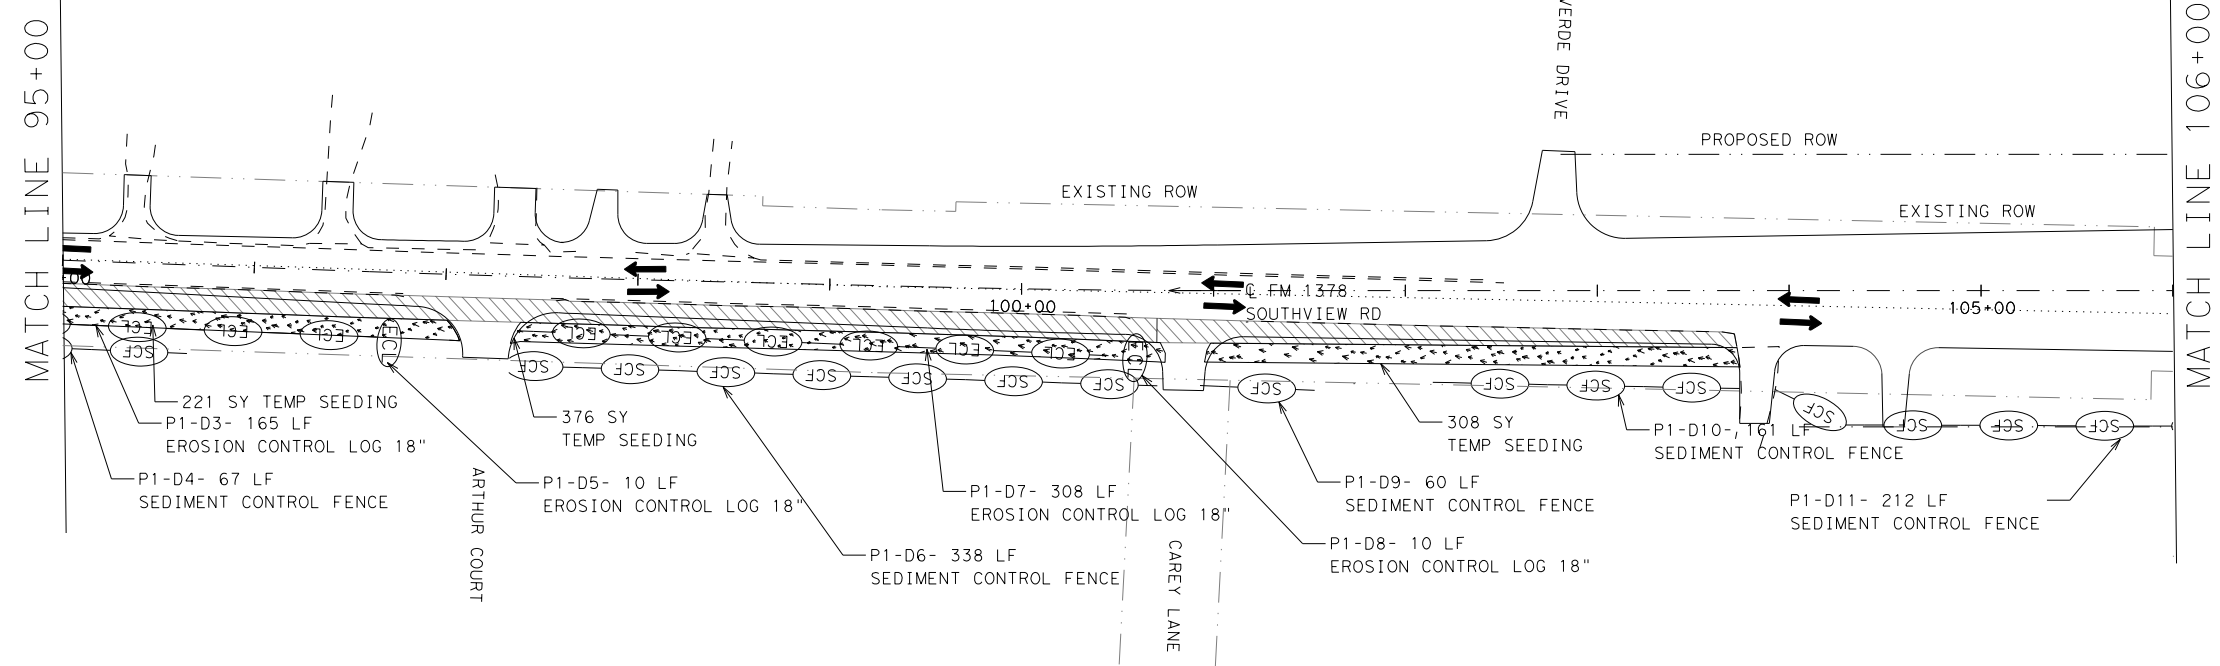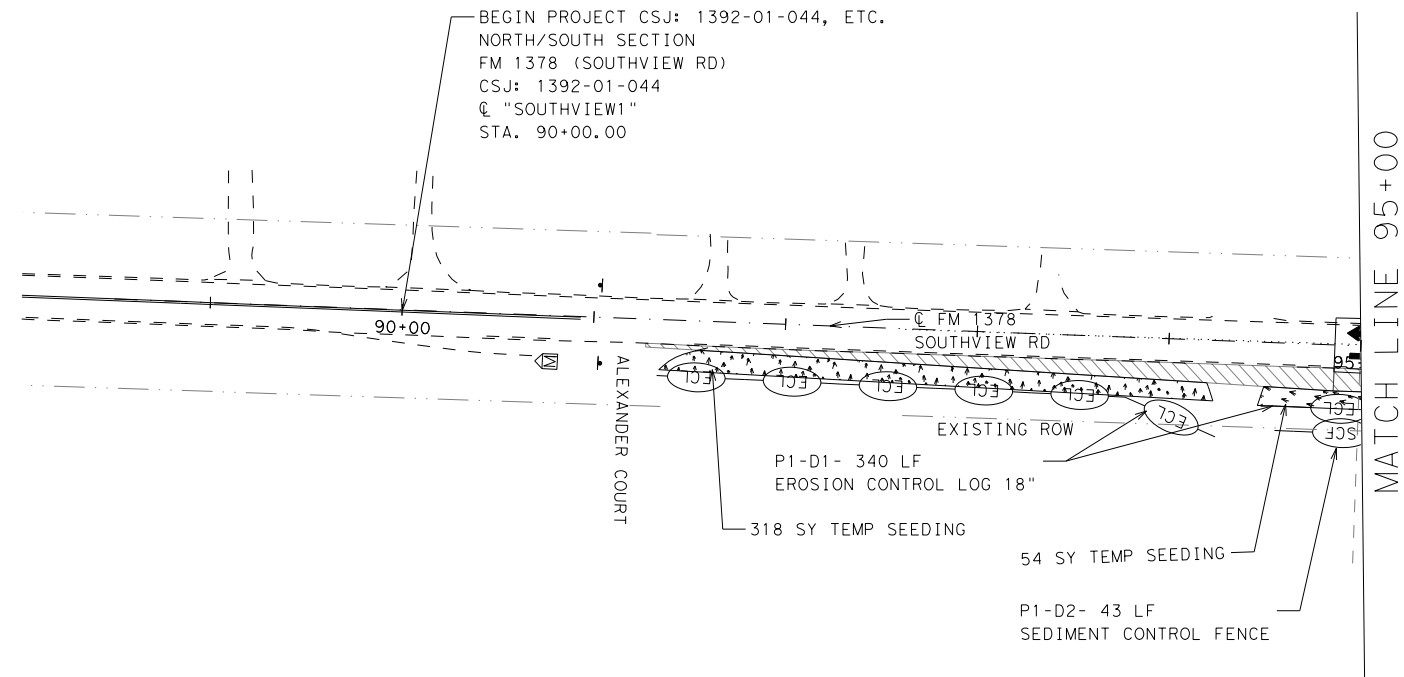

PI-Ⓧ


DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES

BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE
P1-D1			P1-D6			P1-D11		
P1-D2			P1-D7					
P1-D3			P1-D8					
P1-D4			P1-D9					
P1-D5			P1-D10					

FILE: c:\txdot\pwworking\txdot\5\mattthew.norris\0326861\SW3P_P1S1_SITE_MAP_SHEETS.dgn
 DATE: 1/14/2022
 TIME: 11:43:17 AM

DATE: 1/14/2022 TIME: 11:43:23 AM FILE: c:\txdot\pw\onl\ine\txdot5\mot\thw.norr\is\0326861\SW3P_P1S2_SITE_MAP_SHEETS.dgn

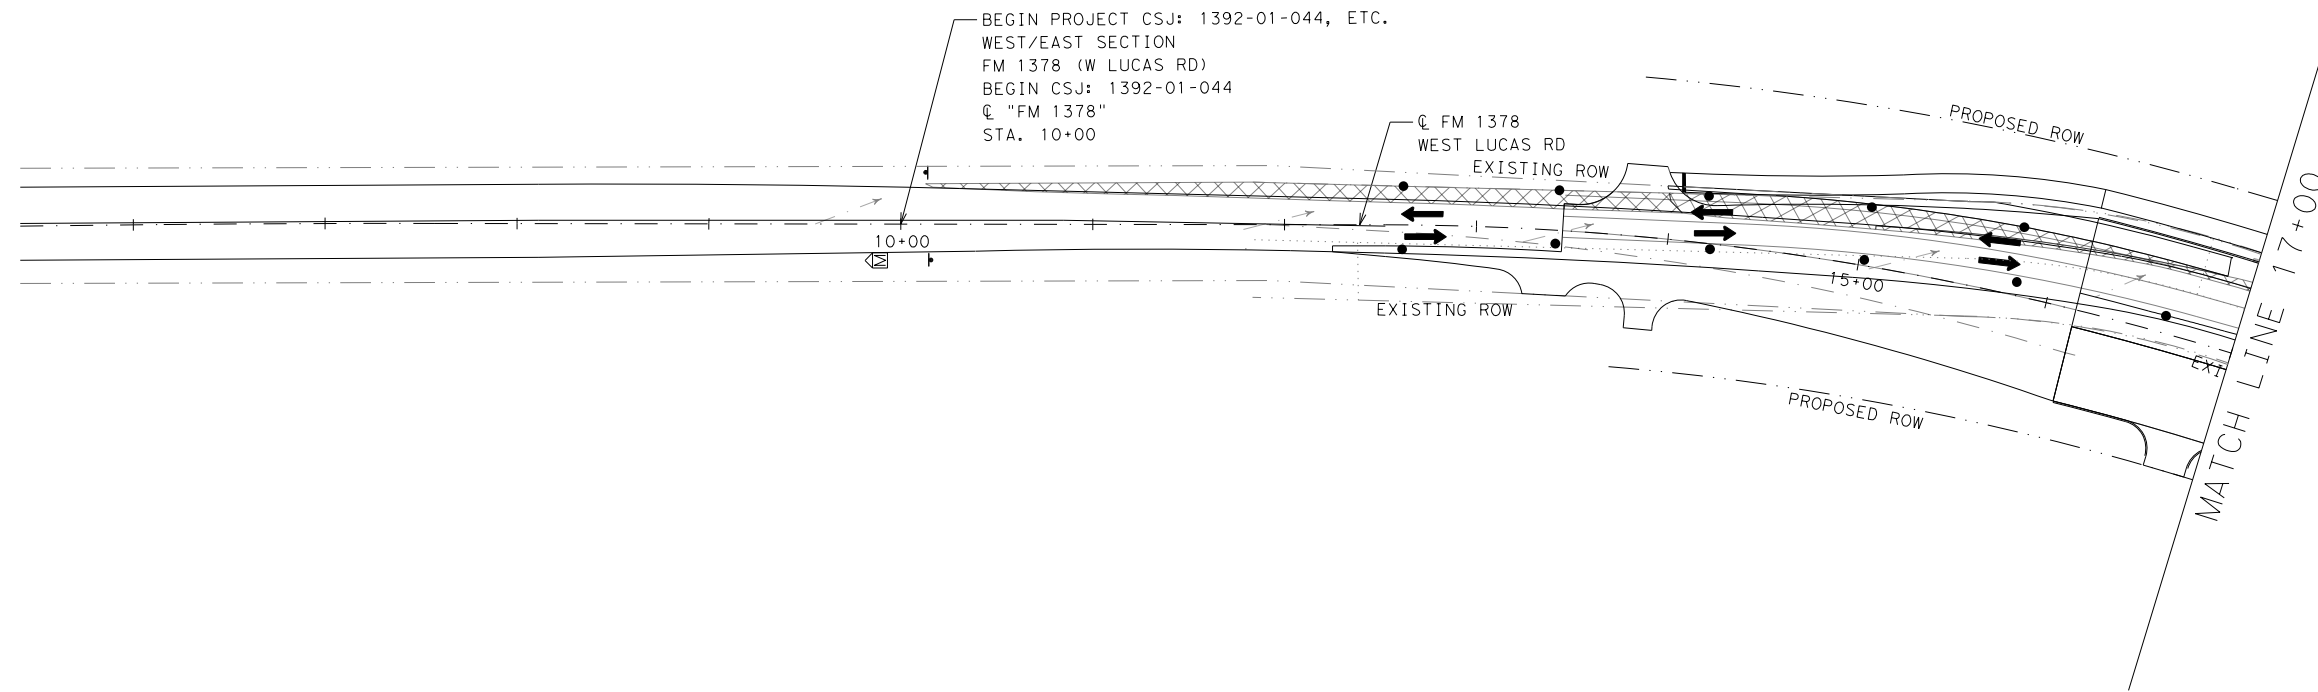


P1S2-(A)

DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES

BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE

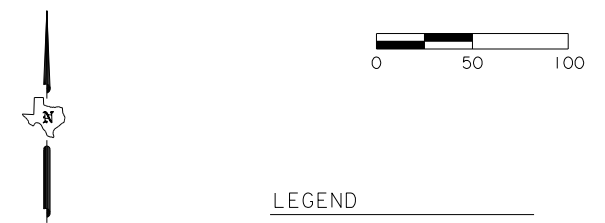

- LEGEND**
- DIRECTION OF FLOW
 - (SCF)— SEDIMENT CONTROL FENCE
 - (ECL)— EROSION CONTROL LOG
 - (RFD2)— ROCK FILTER DAM (TY II)
 - (AREF)— AMPHIBIAN AND REPTILE EXCLUSION FENCE
 - ▭ CONSTRUCTION EXIT
 - ▨ TEMPORARY SEEDING
 - ▩ PERMANENT BLOCK SODDING
 - PERMANENT CONSTRUCTION PREVIOUS PHASE
 - PERMANENT CONSTRUCTION THIS PHASE
 - ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
 - ▧ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
 CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.
 BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.
 SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

PRELIMINARY

FOR REVIEW ONLY
 Not intended
 for construction, bidding or
 permit purposes.
 Engineer: IBRAHIM I. EL SAAD
 P.E. No.: 142049
 Date: 1/14/2022





FM 1378
AT FM 3286
SW3P SITE MAP
PHASE 1 STAGE 2

SCALE: 1" = 100' SHEET 01 OF 04

DESIGN PR	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
GRAPHICS PR	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK PR	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK	TEXAS	DAL	COLLIN	311
CHECK	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	

DATE: 1/14/2022 TIME: 11:43:25 AM FILE: c:\txdot\pw\onl\ine\txdot5\mat\thw.norr\is\0326861\SW3P_P1S2_SITE_MAP_SHEETS.dgn

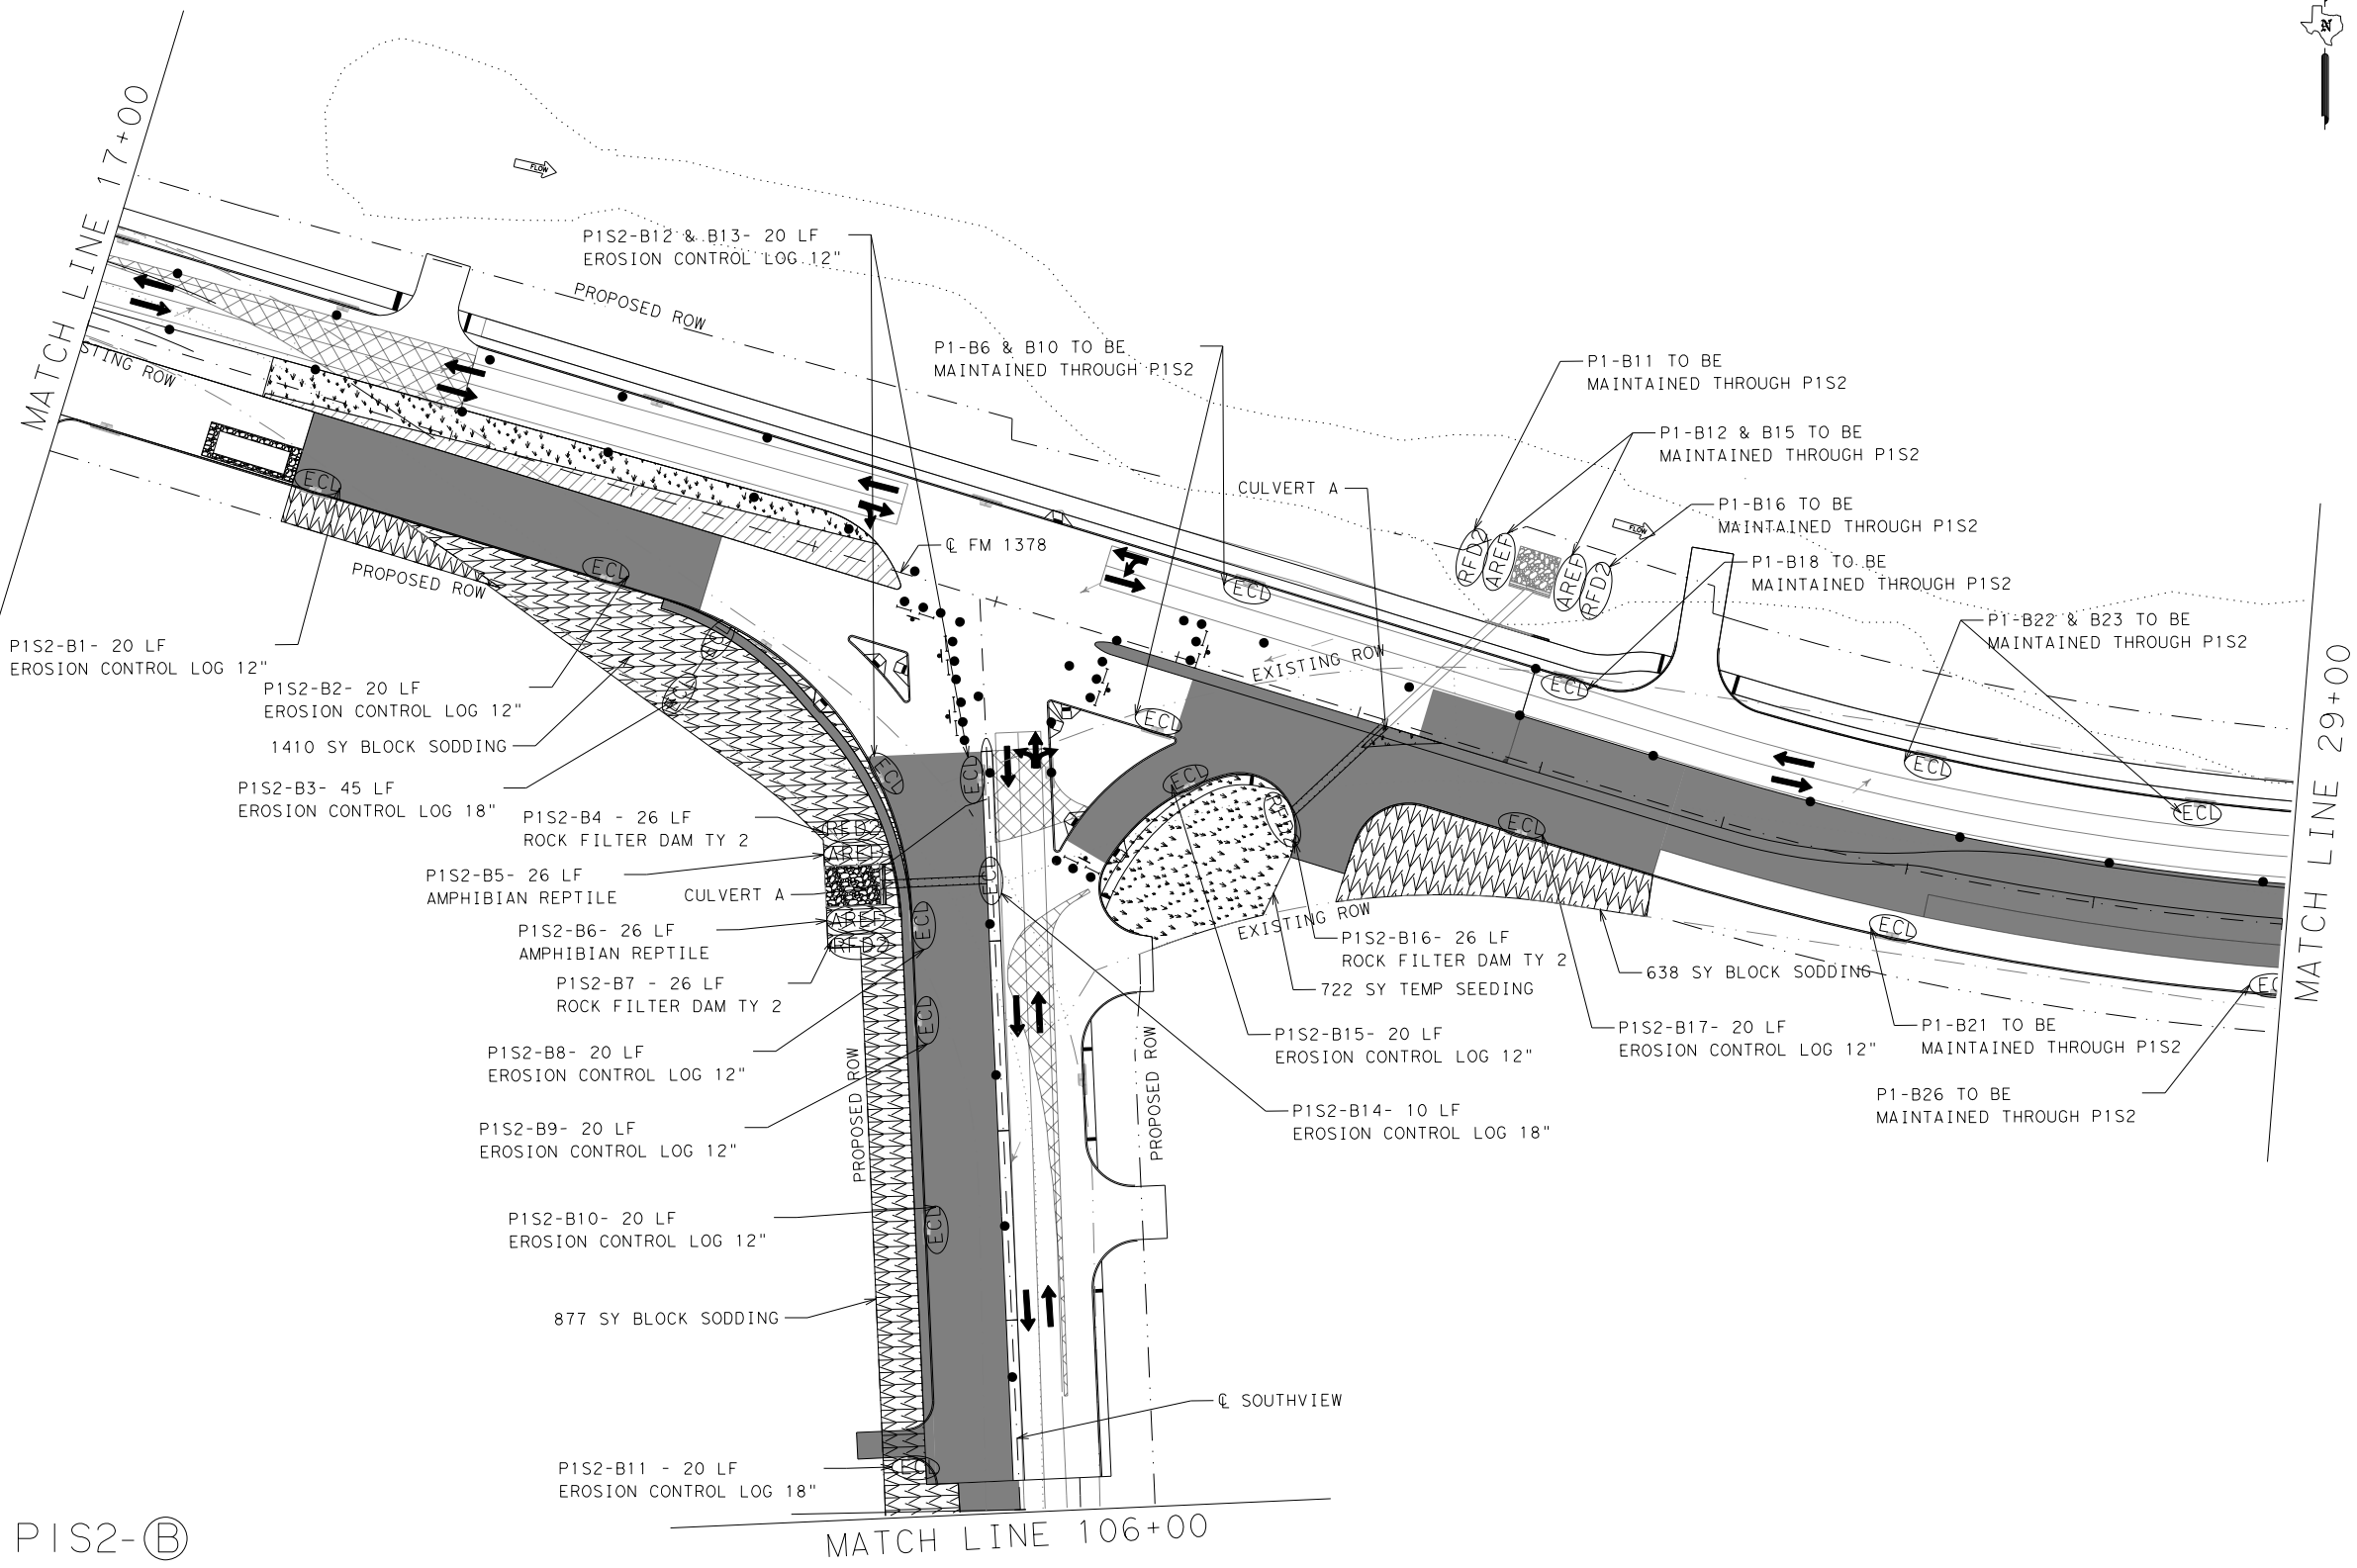

- LEGEND**
- DIRECTION OF FLOW
 - ⊖ SCF SEDIMENT CONTROL FENCE
 - ⊖ ECL EROSION CONTROL LOG
 - ⊖ RFD2 ROCK FILTER DAM (TY II)
 - ⊖ AREP AMPHIBIAN AND REPTILE EXCLUSION FENCE
 - ▭ CONSTRUCTION EXIT
 - ▨ TEMPORARY SEEDING
 - ▩ PERMANENT BLOCK SODDING
 - ▭ PERMANENT CONSTRUCTION PREVIOUS PHASE
 - ▭ PERMANENT CONSTRUCTION THIS PHASE
 - ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
 - ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.

BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.

SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

PRELIMINARY

FOR REVIEW ONLY
 Not intended
 for construction, bidding or
 permit purposes.

Engineer: IBRAHIM I. EL SAAD
P.E. No.: 142049
Date: 1/14/2022

P1S2-Ⓟ

DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES								
BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE
P1S2-B1			P1S2-B8			P1S2-B15		
P1S2-B2			P1S2-B9			P1S2-B16		
P1S2-B3			P1S2-B10			P1S2-B17		
P1S3-B4			P1S3-B11					
P1S3-B5			P1S3-B12					
P1S3-B6			P1S3-B13					
P1S3-B7			P1S3-B14					



FM 1378
AT FM 3286
SW3P SITE MAP
PHASE 1 STAGE 2

SCALE: 1"=100' SHEET 02 OF 04

DESIGN PR	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
GRAPHICS PR	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK	TEXAS	DAL	COLLIN	312
	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	



LEGEND

- DIRECTION OF FLOW
- ⊖(SCF) SEDIMENT CONTROL FENCE
- ⊖(ECL) EROSION CONTROL LOG
- ⊖(RFD2) ROCK FILTER DAM (TY II)
- ⊖(AREF) AMPHIBIAN AND REPTILE EXCLUSION FENCE
- ▭ CONSTRUCTION EXIT
- ▨ TEMPORARY SEEDING
- ▩ PERMANENT BLOCK SODDING
- ▭ PERMANENT CONSTRUCTION PREVIOUS PHASE
- ▭ PERMANENT CONSTRUCTION THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.

BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.

SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

PRELIMINARY


FOR REVIEW ONLY
 Not intended
 for construction, bidding or
 permit purposes.

Engineer: **IBRAHIM I. EL SAAD**
 P.E. No.: 142049
 Date: 1/14/2022




FM 1378
AT FM 3286
SW3P SITE MAP
PHASE 1 STAGE 2

SCALE: 1" = 100'		SHEET 03 OF 04	
DESIGN PR	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
GRAPHICS PR	6	SEE TITLE SHEET	FM 1378, ETC.
CHECK	TEXAS	DAL	COLLIN
CHECK	CONTROL	SECTION	JOB
	1392	01	044, ETC.

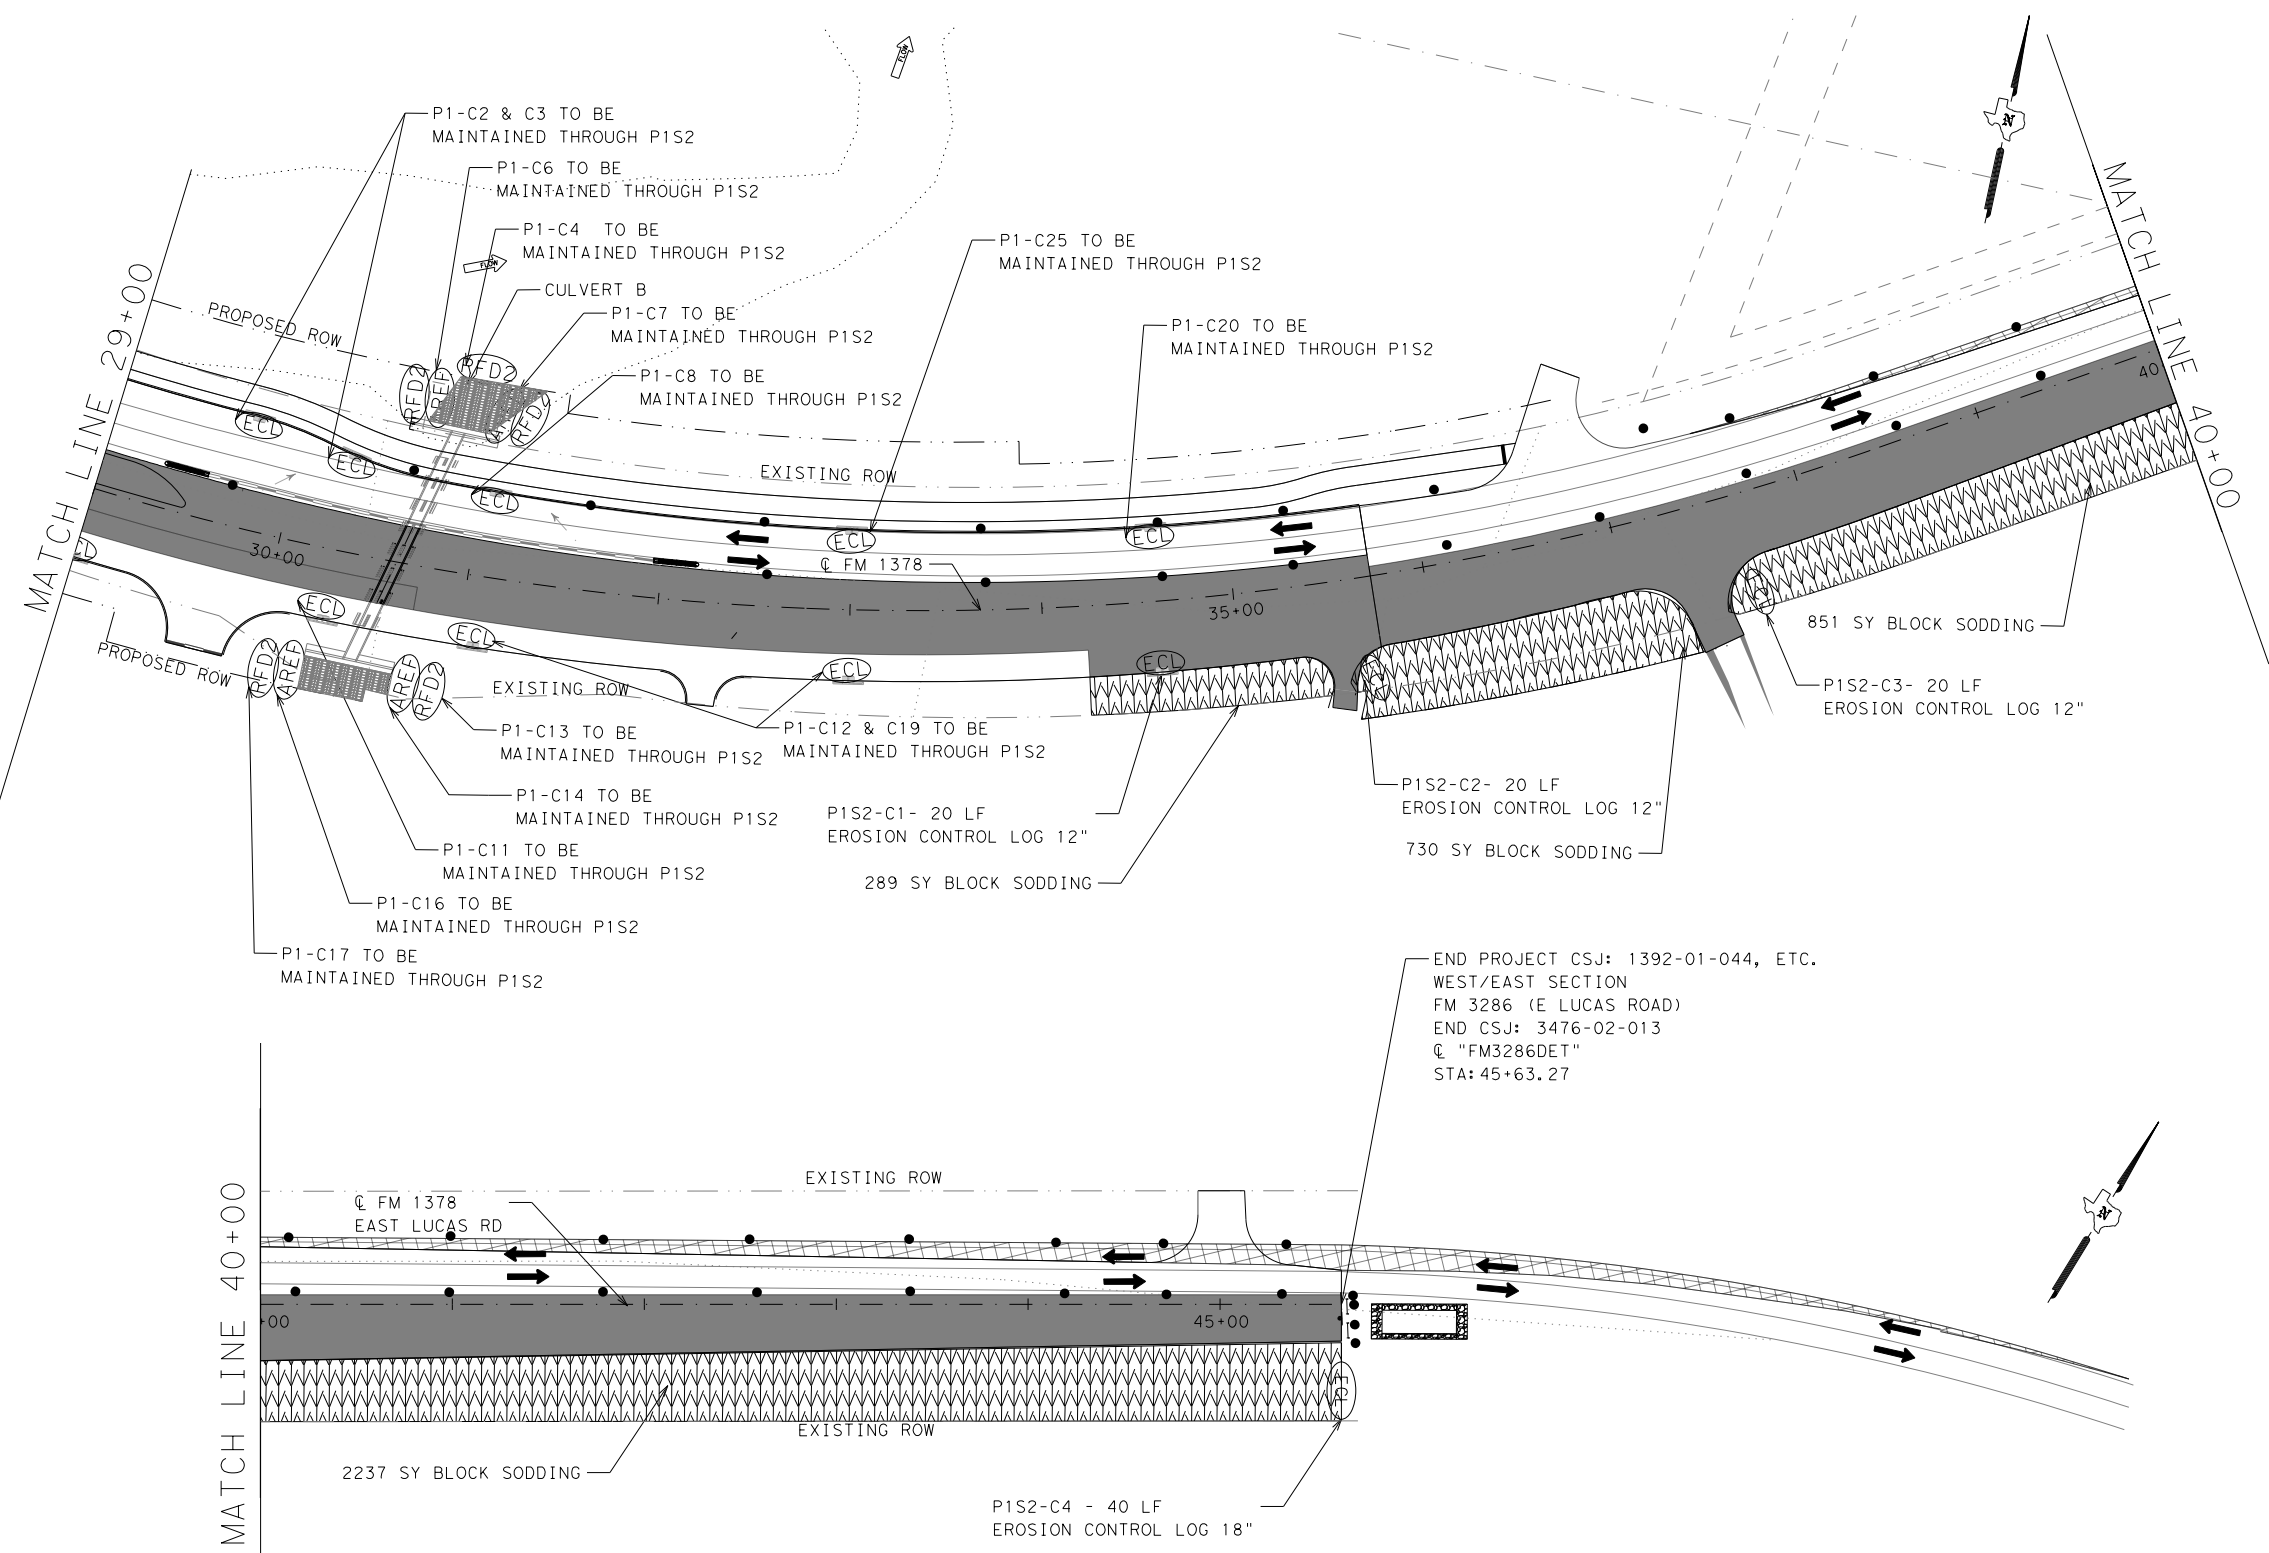

END PROJECT CSJ: 1392-01-044, ETC.
 WEST/EAST SECTION
 FM 3286 (E LUCAS ROAD)
 END CSJ: 3476-02-013
 Q "FM3286DET"
 STA: 45+63.27

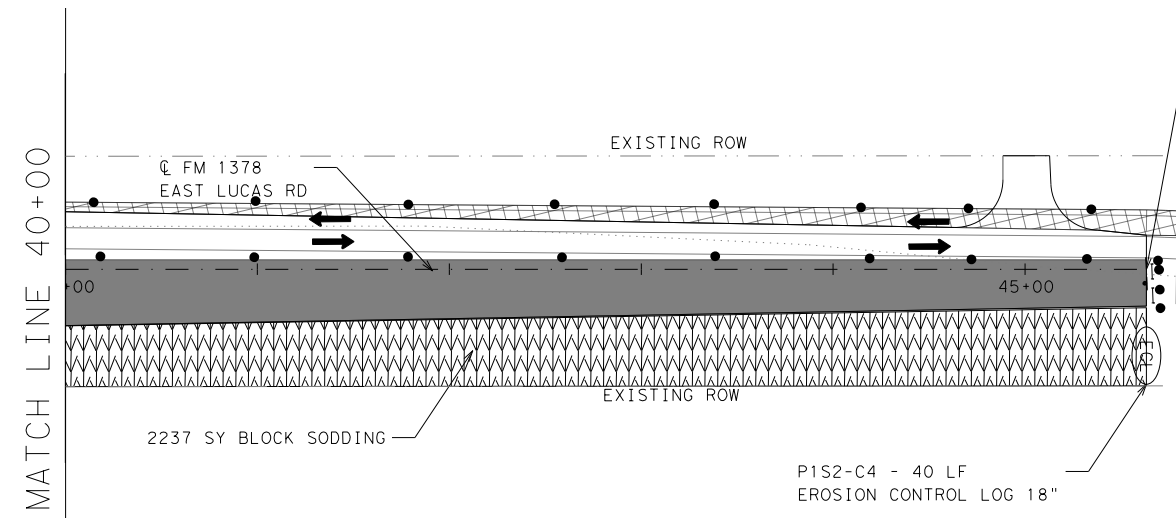

P1S2-C



DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES

BMP #	INSTALL DATE	REMOVE DATE
P1S2-C1		
P1S2-C2		
P1S2-C3		
P1S2-C4		

DATE: 1/14/2022 TIME: 11:43:28 AM FILE: c:\t\dot\pw\on\line\t\dot\5\mat\thw.norr\is\0326861\SW3P_P1S2_SITE_MAP_SHEETS.dgn

DATE: 1/14/2022 TIME: 11:43:31 AM FILE: c:\txdot\pw\onl\ine\txdot5\mat\thw.norri\0326861\SW3P_P1S2_SITE_MAP_SHEETS.dgn

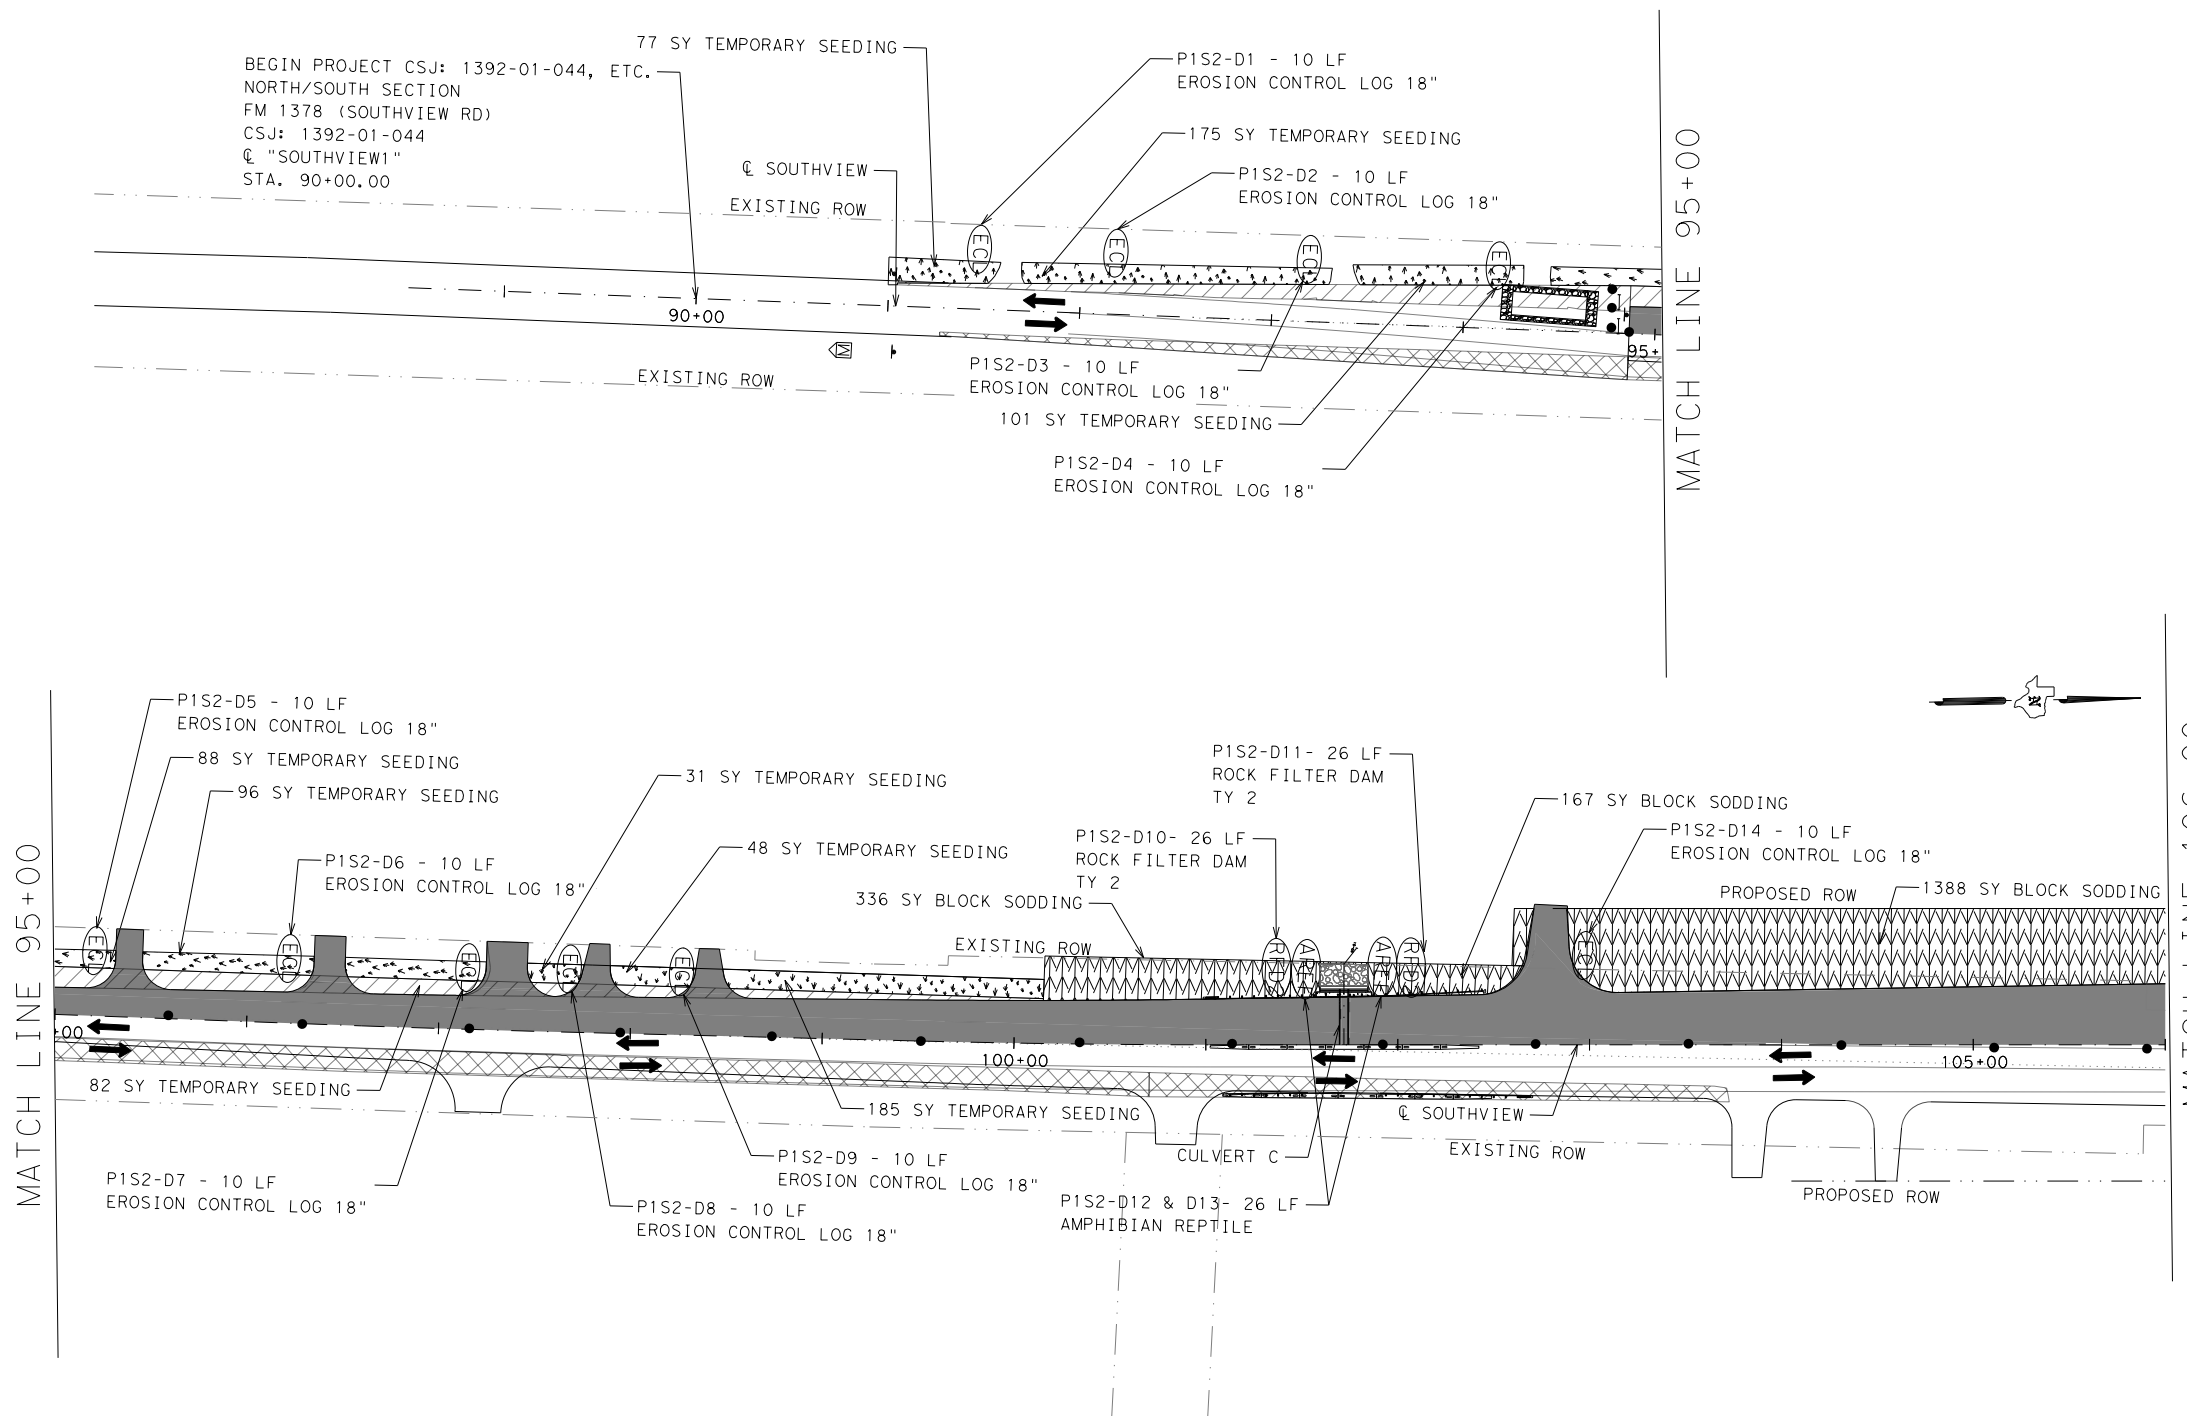

- LEGEND**
- DIRECTION OF FLOW
 - ⊖ SCF SEDIMENT CONTROL FENCE
 - ⊖ ECL EROSION CONTROL LOG
 - ⊖ RFD2 ROCK FILTER DAM (TY II)
 - ⊖ AREF AMPHIBIAN AND REPTILE EXCLUSION FENCE
 - ▭ CONSTRUCTION EXIT
 - ▨ TEMPORARY SEEDING
 - ▩ PERMANENT BLOCK SODDING
 - ▭ PERMANENT CONSTRUCTION PREVIOUS PHASE
 - ▭ PERMANENT CONSTRUCTION THIS PHASE
 - ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
 - ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
 CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.

BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.

SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

PRELIMINARY

FOR REVIEW ONLY
 Not intended
 for construction, bidding or
 permit purposes.

Engineer: IBRAHIM I. EL SAAD
 P.E. No.: 142049
 Date: 1/14/2022



FM 1378
AT FM 3286
SW3P SITE MAP
PHASE 1 STAGE 2

P1S2-Ⓧ

DATE DISTURBED	DATE STABILIZED


BMP INSTALL/ REMOVE DATES

BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE
P1S2-D1			P1S2-D6			P1S2-D11		
P1S2-D2			P1S2-D7			P1S2-D12		
P1S2-D3			P1S2-D8			P1S2-D13		
P1S2-D4			P1S2-D9			P1S2-D14		
P1S2-D5			P1S2-D10					

SCALE: 1" = 100' SHEET 04 OF 04

DESIGN PR	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
6	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK PR	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK	TEXAS	DAL	COLLIN	314
CHECK	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	

DATE: 1/14/2022 TIME: 11:43:44 AM FILE: c:\txdot\pw\onl\ine\txdot5\mot\thw.nor\is\d0326861\SW3P_P2S1_SITE_MAP_SHEETS.dgn




LEGEND

- DIRECTION OF FLOW
- (SCF)— SEDIMENT CONTROL FENCE
- (ECL)— EROSION CONTROL LOG
- (RFD2)— ROCK FILTER DAM (TY II)
- (AREF)— AMPHIBIAN AND REPTILE EXCLUSION FENCE
- ▭ CONSTRUCTION EXIT
- ▨ TEMPORARY SEEDING
- ▩ PERMANENT BLOCK SODDING
- PERMANENT CONSTRUCTION PREVIOUS PHASE
- PERMANENT CONSTRUCTION THIS PHASE
- ▧ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.

BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.

SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

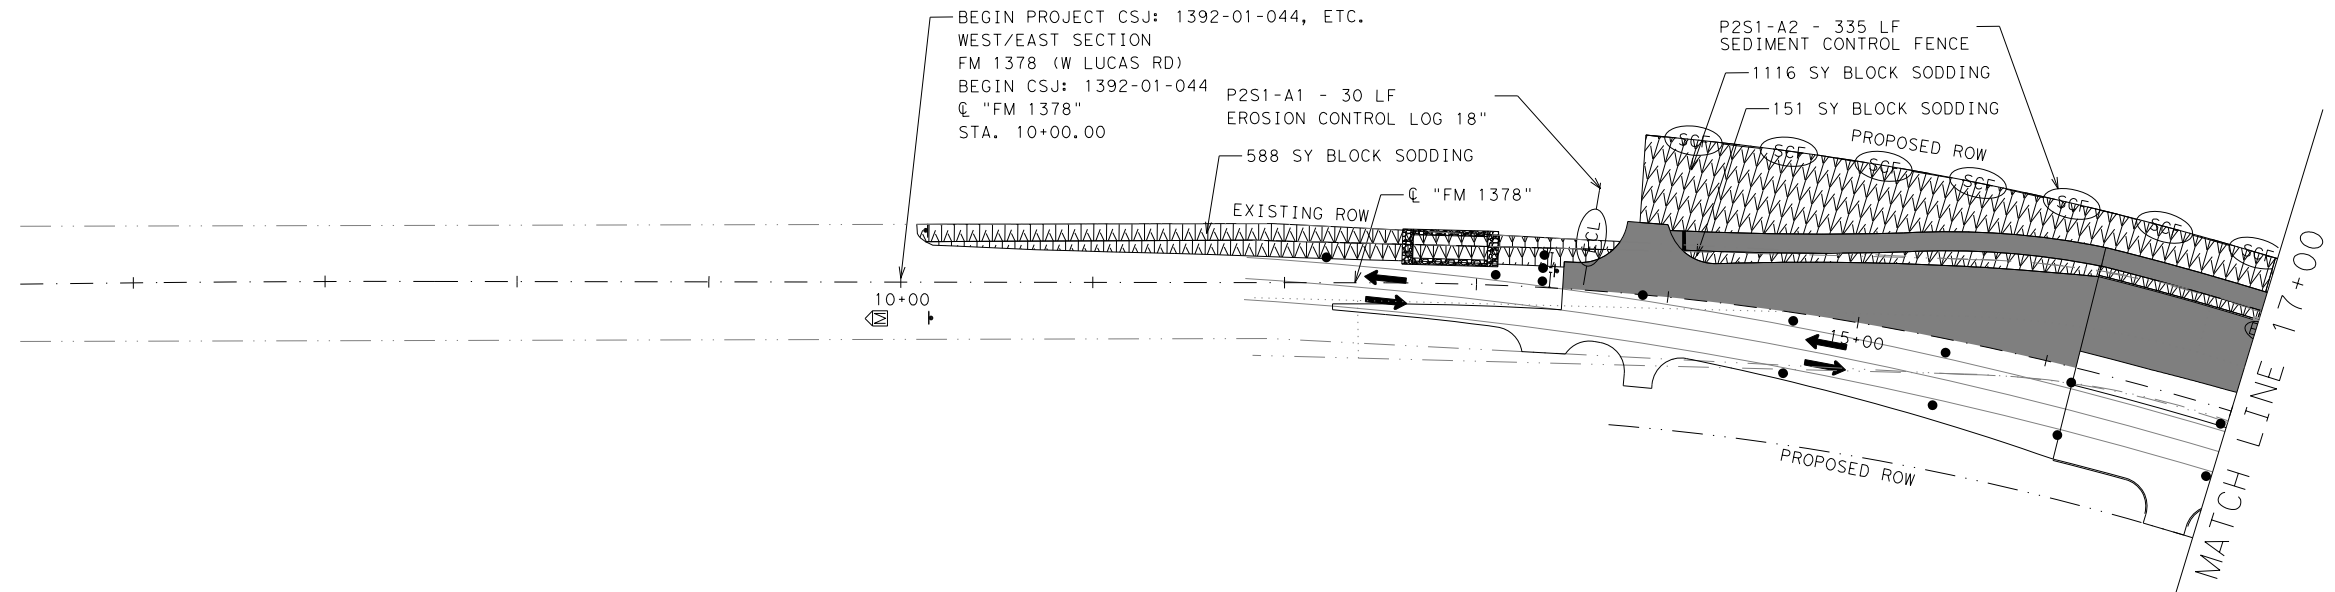

PRELIMINARY

FOR REVIEW ONLY
 Not intended
 for construction, bidding or
 permit purposes.

Engineer: IBRAHIM I. EL SAAD
P.E. No.: 142049
Date: 1/14/2022

P2S1-A

DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES					
BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE
P2S1-A1					
P2S1-A2					

© 2022

Texas Department of Transportation



FM 1378
AT FM 3286

SW3P SITE MAP
PHASE 2 STAGE 1

SCALE: 1" = 100' SHEET 01 OF 04

DESIGN RI/MN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
	6	SEE TITLE SHEET		FM 1378, ETC.
GRAPHICS RI/MN	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK SM/MN	TEXAS	DAL	COLLIN	315
CHECK	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	

DATE: 1/14/2022 TIME: 11:43:48 AM FILE: c:\t\dot\pw\on\line\t\dot\5\mat\thw.norr\is\d0326861\SW3P_P2S1_SITE_MAP_SHEETS.dgn

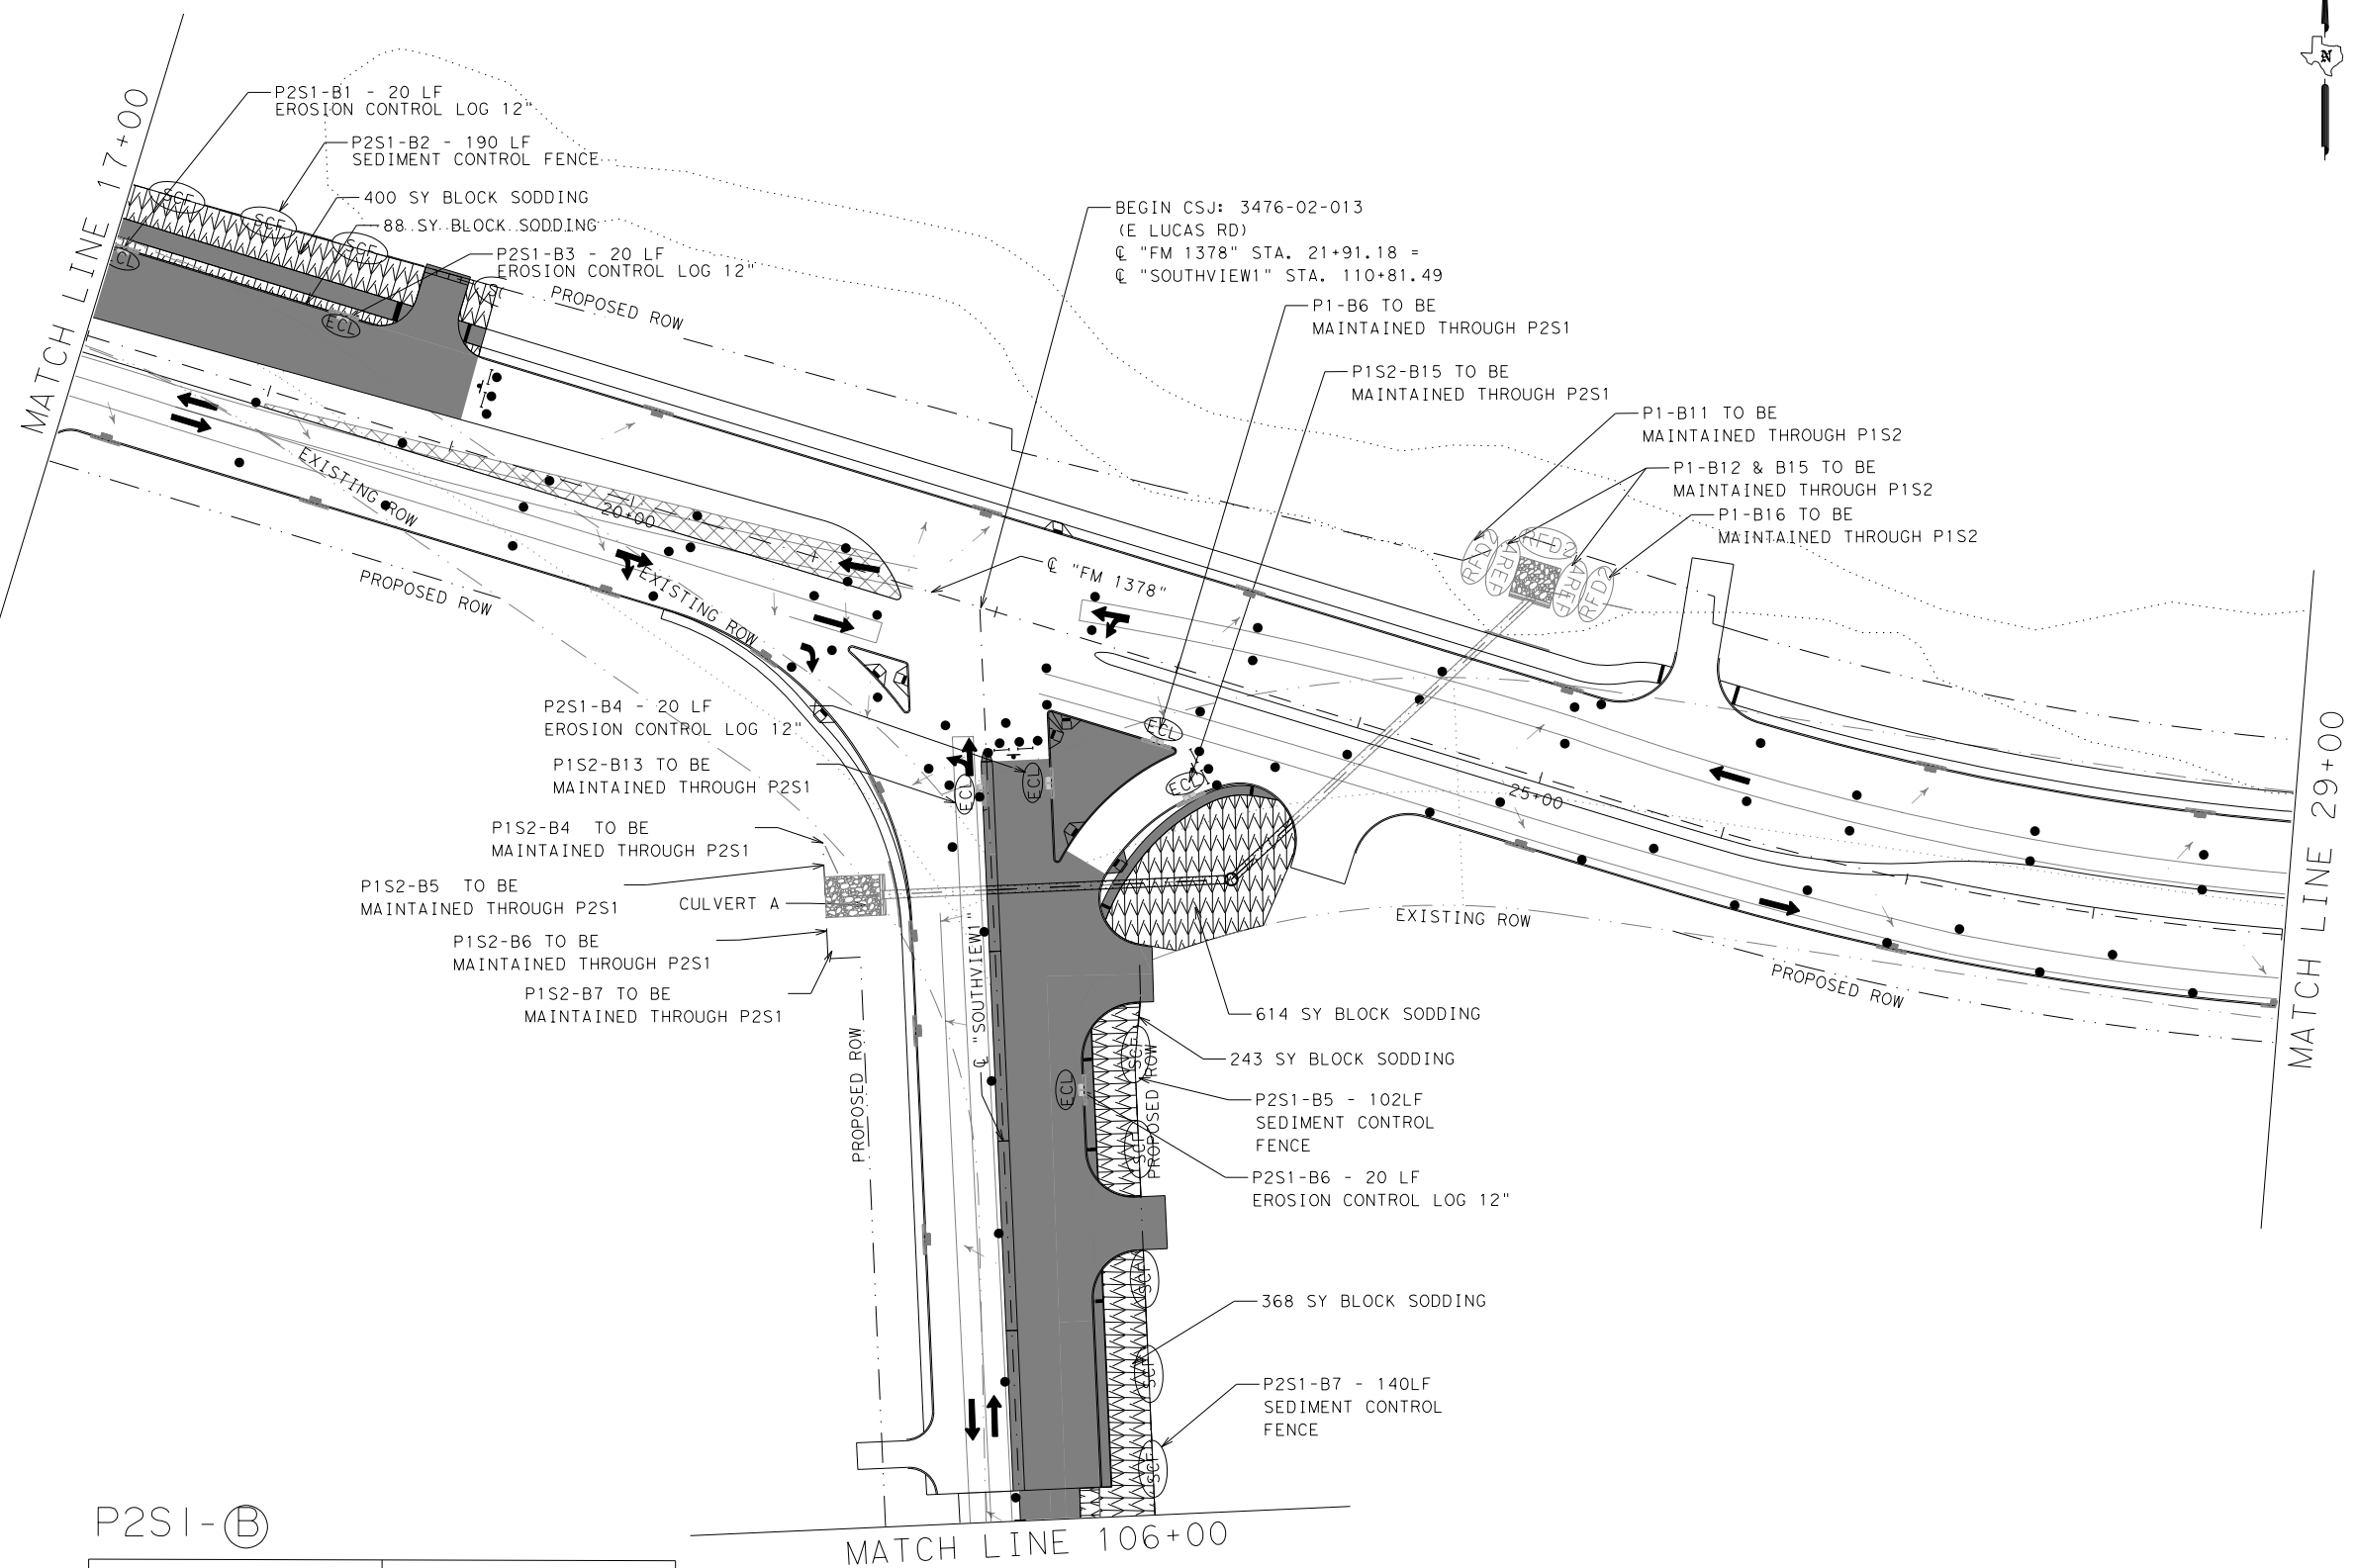

LEGEND

- DIRECTION OF FLOW
- (SCF)— SEDIMENT CONTROL FENCE
- (ECL)— EROSION CONTROL LOG
- (RFD2)— ROCK FILTER DAM (TY II)
- (AREF)— AMPHIBIAN AND REPTILE EXCLUSION FENCE
- ▭ CONSTRUCTION EXIT
- ▨ TEMPORARY SEEDING
- ▩ PERMANENT BLOCK SODDING
- ▭ PERMANENT CONSTRUCTION PREVIOUS PHASE
- ▭ PERMANENT CONSTRUCTION THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.

BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.

SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

PRELIMINARY

FOR REVIEW ONLY
 Not intended
 for construction, bidding or
 permit purposes.

Engineer: **IBRAHIM I. EL SAAD**
 P.E. No.: 142049
 Date: 1/14/2022



FM 1378
AT FM 3286
SW3P SITE MAP
PHASE 2 STAGE 1

SCALE: 1"=100' SHEET 02 OF 04

DESIGN RI/MN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
GRAPHICS RI/MN	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK SM/MN	TEXAS	DAL	COLLIN	
CHECK	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	


316

P2S1-B

DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES

BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE
P2S1-B1			P2S1-B6		
P2S1-B2			P2S1-B7		
P2S1-B3					
P2S1-B4					
P2S1-B5					



LEGEND

- DIRECTION OF FLOW
- ⊖ SCF SEDIMENT CONTROL FENCE
- ⊖ ECL EROSION CONTROL LOG
- ⊖ RFD2 ROCK FILTER DAM (TY II)
- ⊖ AREF AMPHIBIAN AND REPTILE EXCLUSION FENCE
- ▭ CONSTRUCTION EXIT
- ▨ TEMPORARY SEEDING
- ▩ PERMANENT BLOCK SODDING
- ▭ PERMANENT CONSTRUCTION PREVIOUS PHASE
- ▭ PERMANENT CONSTRUCTION THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.

BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.

SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

PRELIMINARY

FOR REVIEW ONLY
Not intended
for construction, bidding or
permit purposes.


Engineer: **IBRAHIM I. EL SAAD**
P.E. No.: **142049**
Date: **1/14/2022**



FM 1378
AT FM 3286

SW3P SITE MAP
PHASE 2 STAGE 1

DESIGN R/MN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
	6	SEE TITLE SHEET		FM 1378, ETC.
GRAPHICS R/MN	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK SM/MN	TEXAS	DAL	COLLIN	317
CHECK	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	

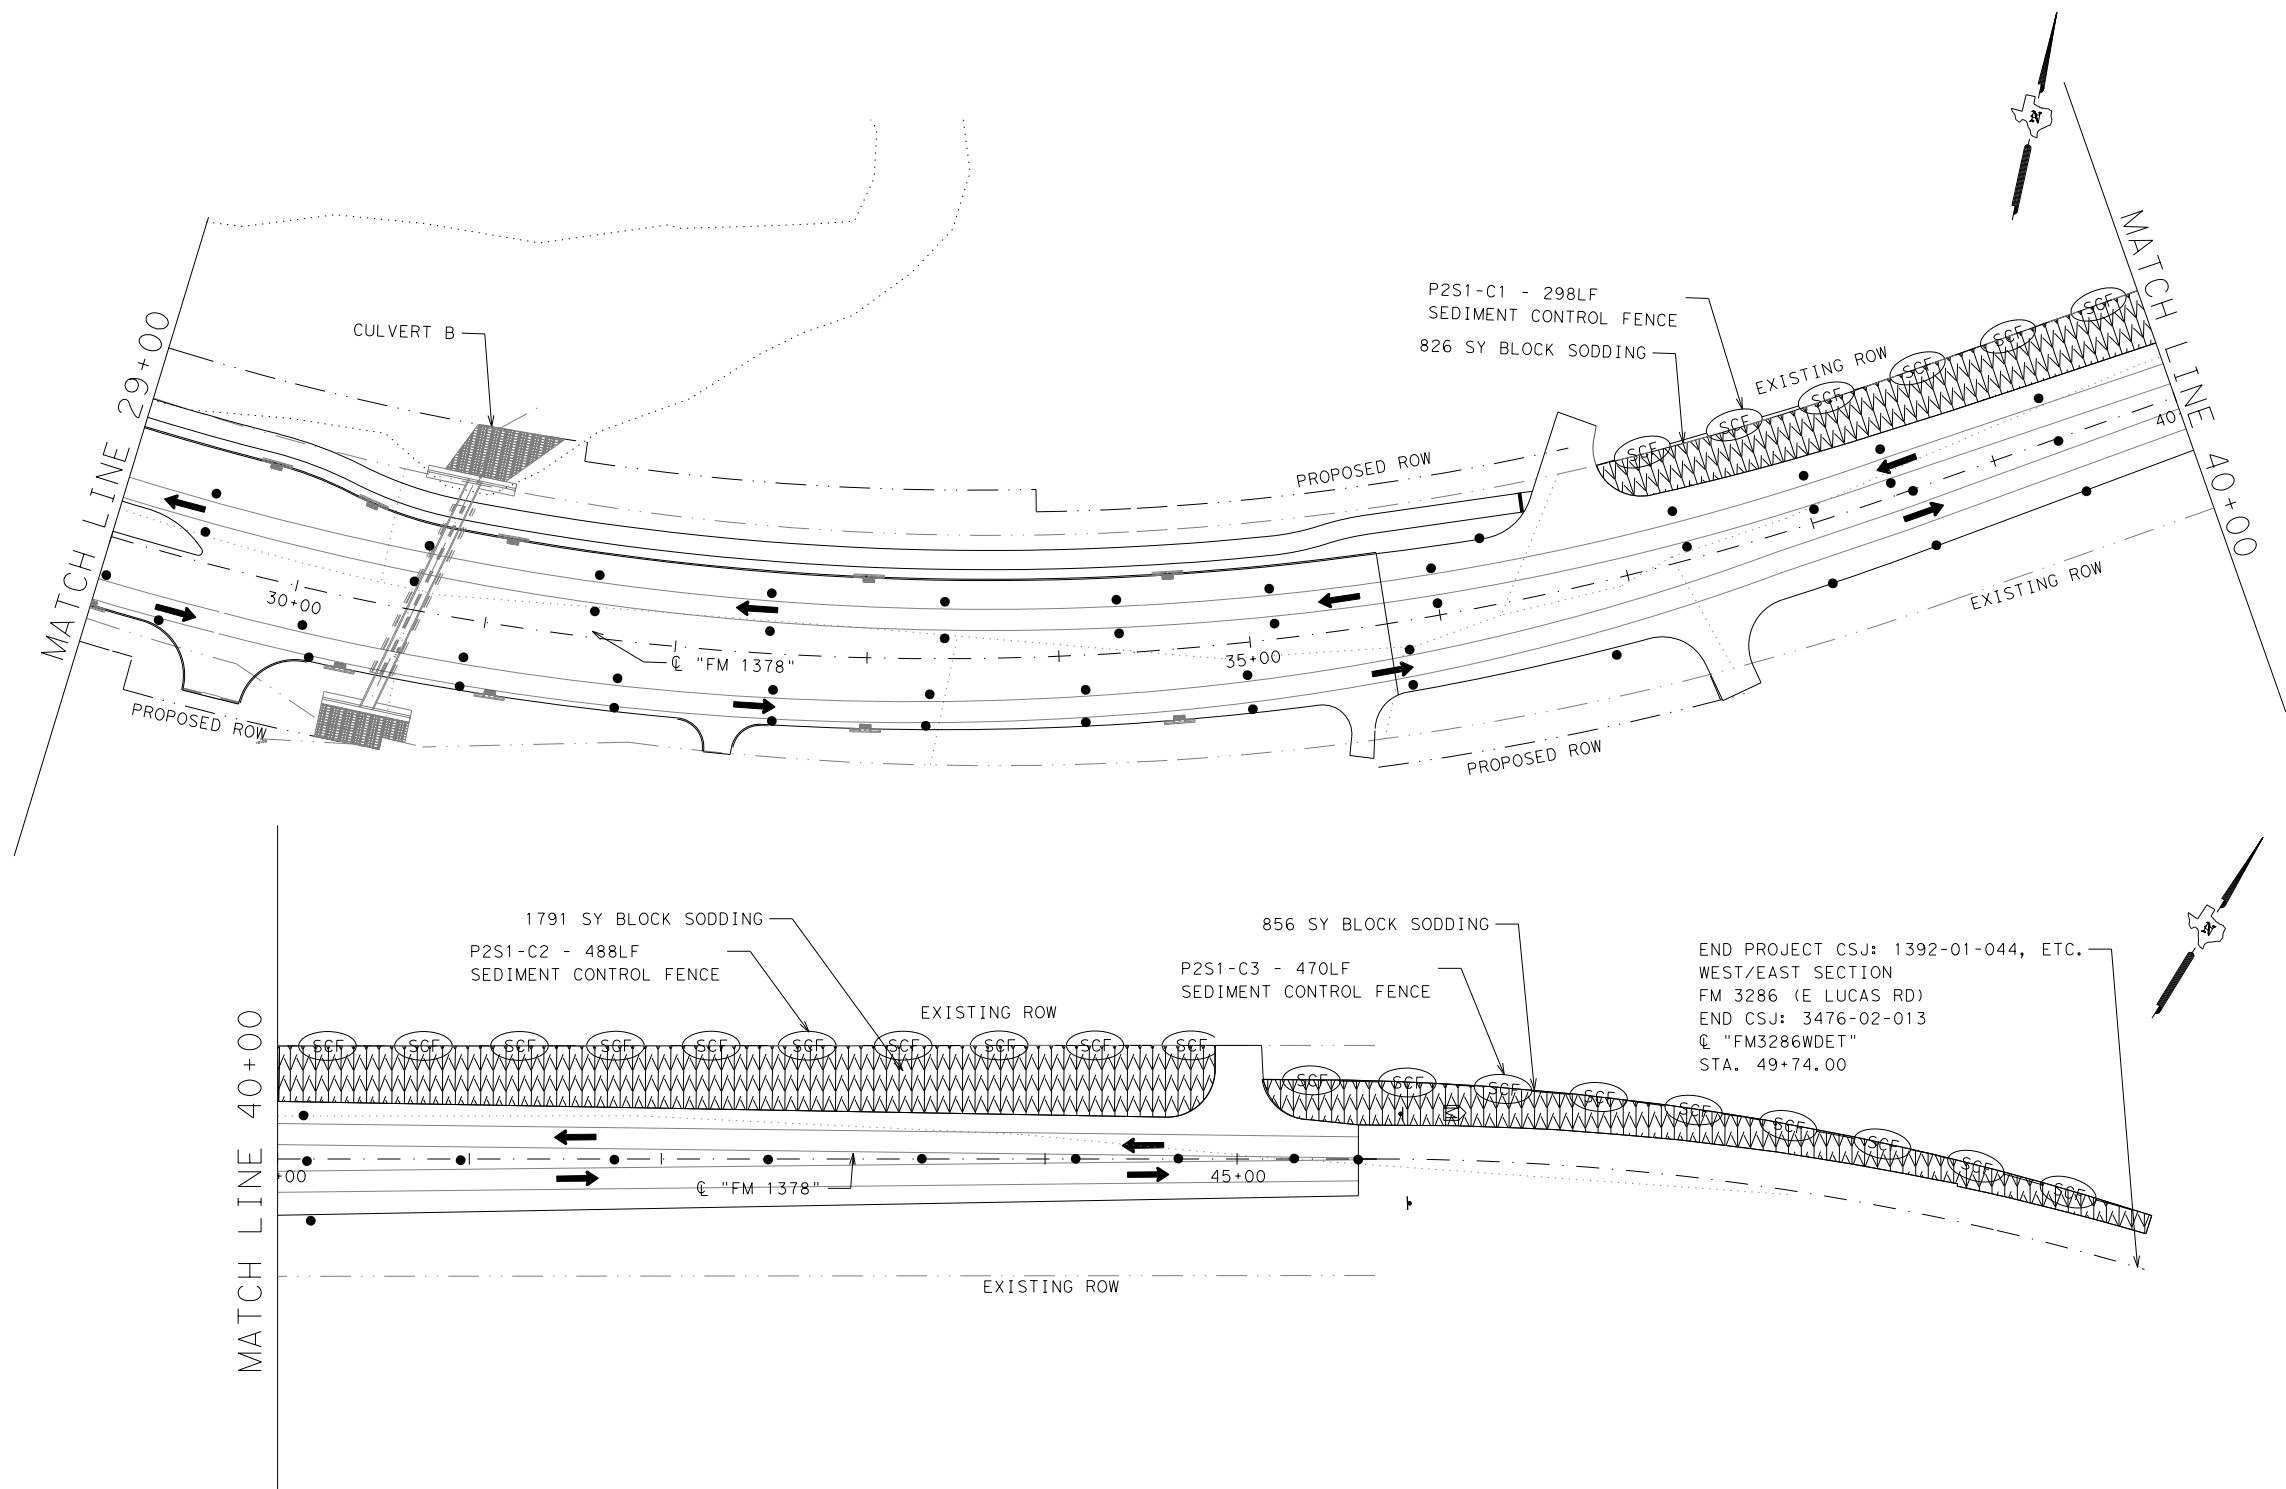

END PROJECT CSJ: 1392-01-044, ETC.
WEST/EAST SECTION
FM 3286 (E LUCAS RD)
END CSJ: 3476-02-013
CL "FM3286WDET"
STA. 49+74.00

P2S1-C


DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES

BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE
P2S1-C1					
P2S1-C2					
P2S1-C3					

FILE: c:\t\dot\pw\onl\ine\t\dot\5\mat\thw.norr\is\0326861\SW3P_P2S1_SITE_MAP_SHEETS.dgn
 TIME: 1/14/2022 11:43:54 AM
 DATE: 1/14/2022


FILE: c:\txdot\pw\onl\ine\txdot5\mat\thw.nor\is\0326861\SW3P_P2S1_SITE_MAP_SHEETS.dgn
 TIME: 1/14/2022 11:43:57 AM
 DATE: 1/14/2022



LEGEND

- DIRECTION OF FLOW
- SCF SEDIMENT CONTROL FENCE
- ECL EROSION CONTROL LOG
- RFD2 ROCK FILTER DAM (TY II)
- AREP AMPHIBIAN AND REPTILE EXCLUSION FENCE
- ▭ CONSTRUCTION EXIT
- ▨ TEMPORARY SEEDING
- ▩ PERMANENT BLOCK SODDING
- ▭ PERMANENT CONSTRUCTION PREVIOUS PHASE
- ▭ PERMANENT CONSTRUCTION THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED THIS PHASE
- ▨ TEMPORARY PAVEMENT CONSTRUCTED PREVIOUS PHASE

NOTE:
 CONTRACTOR IS RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES FROM PREVIOUS PHASE(S) THROUGHOUT DURATION OF PROJECT.
 BMP'S SHALL BE INSTALLED NO SOONER THAN TWO WEEKS PRIOR TO SOIL DISTURBANCE IN THEIR CONTROL AREA.
 SEE DAILY WORK REPORTS FOR INITIAL STABILIZATION TIMEFRAMES.

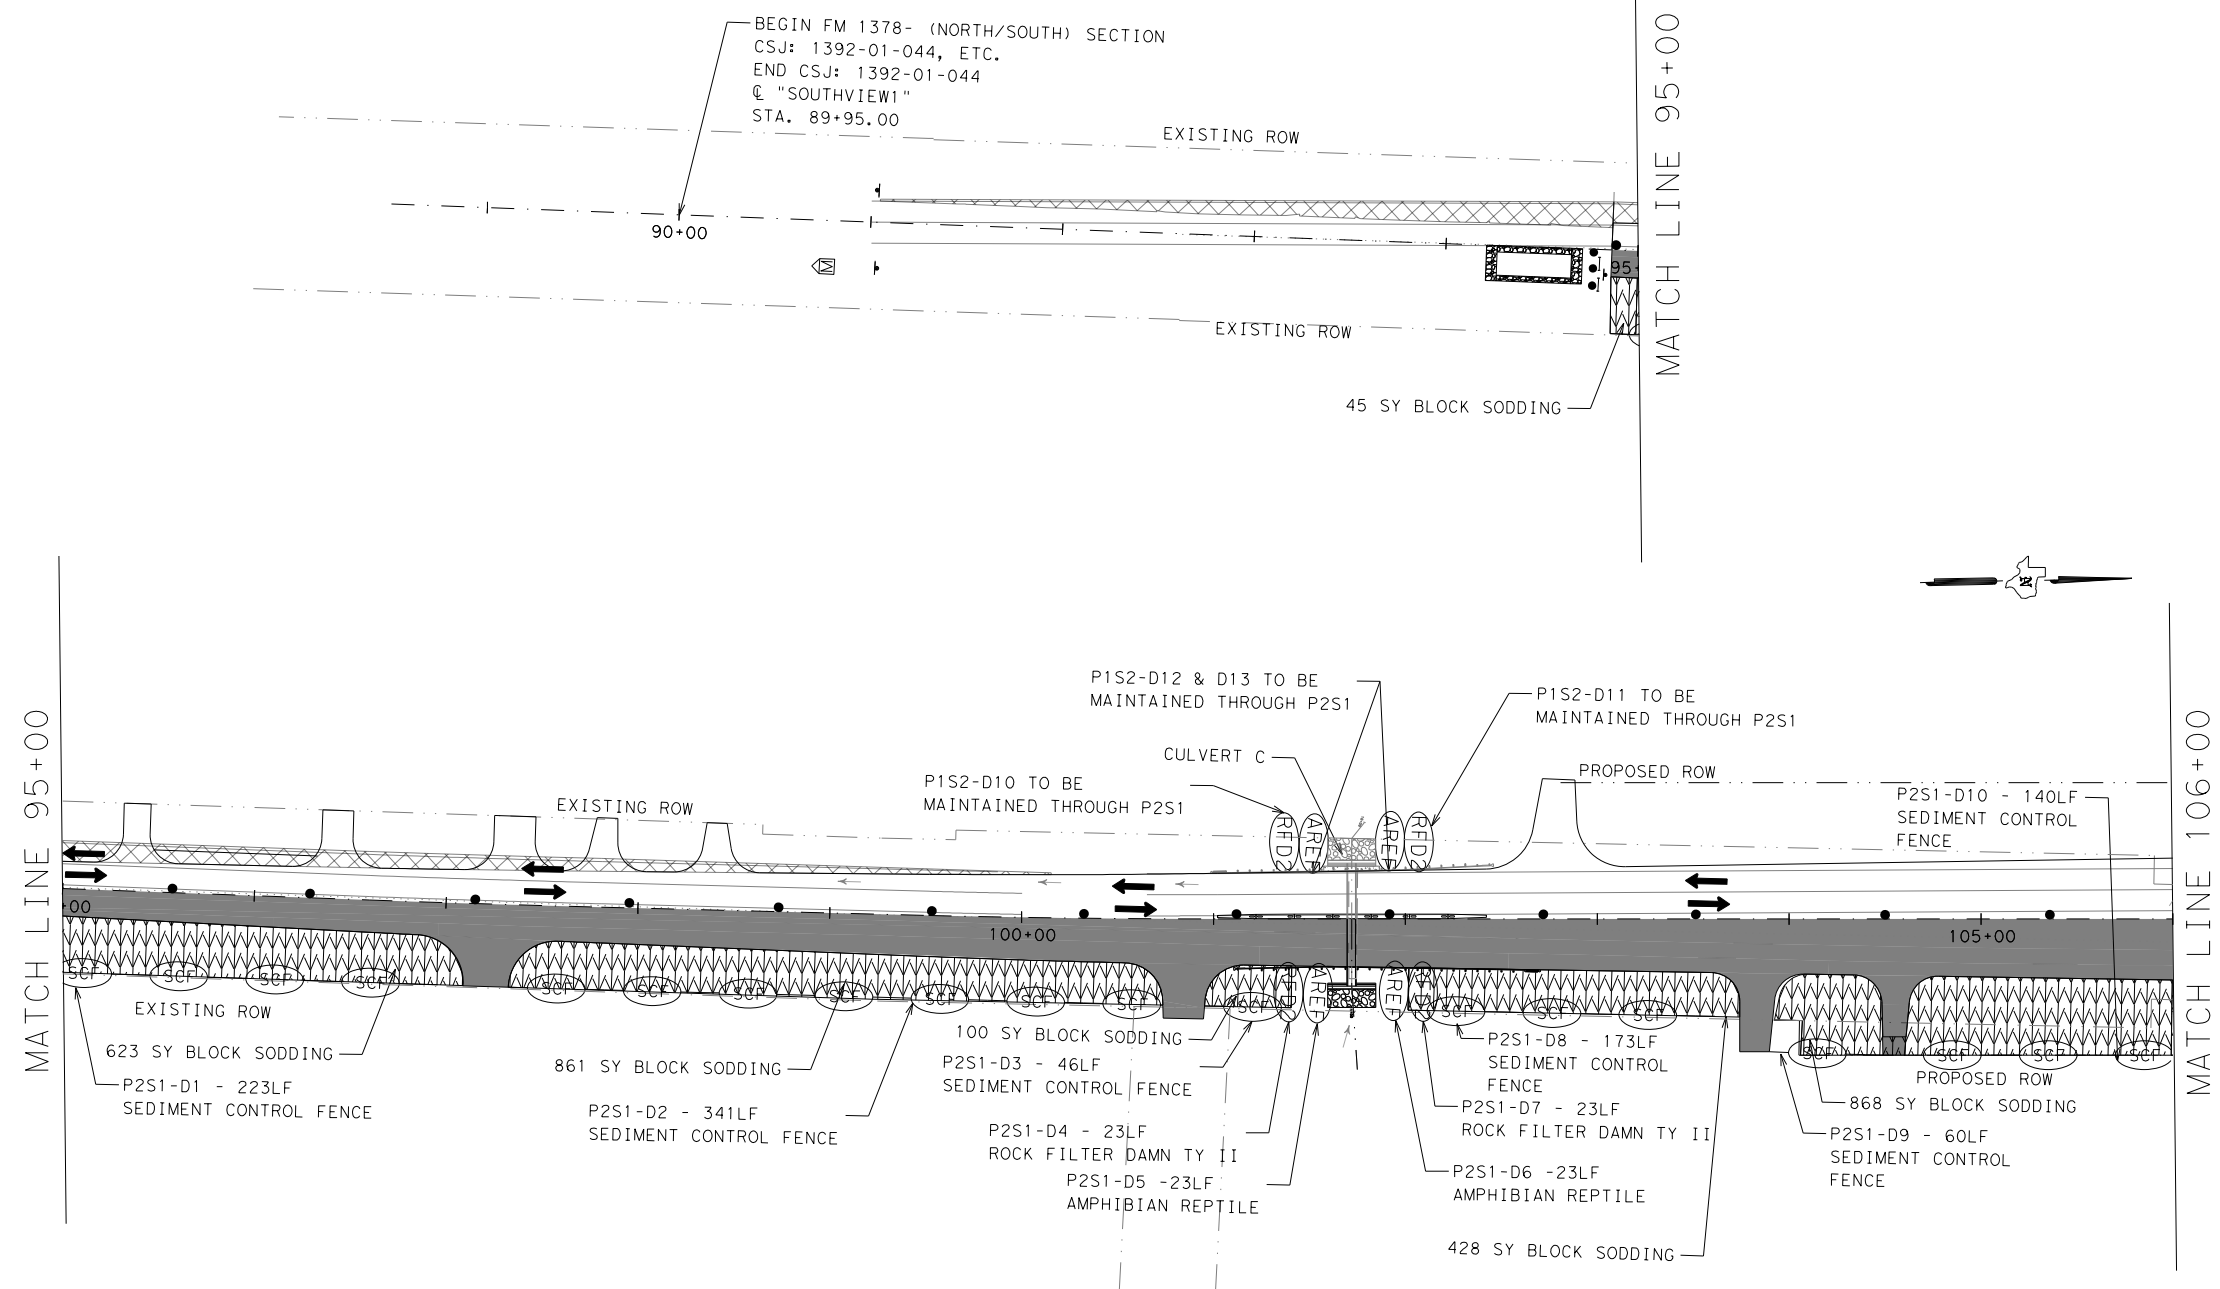

PRELIMINARY

FOR REVIEW ONLY
 Not intended
 for construction, bidding or
 permit purposes.

Engineer: **IBRAHIM I. EL SAAD**
 P.E. No.: 142049
 Date: 1/14/2022



FM 1378
AT FM 3286
SW3P SITE MAP
PHASE 2 STAGE 1

SCALE: 1" = 100' SHEET 04 OF 04

DESIGN RI/MN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
GRAPHICS RI/MN	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK SM/MN	TEXAS	DAL	COLLIN	
CHECK	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	

318

P2S1-D









DATE DISTURBED	DATE STABILIZED

BMP INSTALL/ REMOVE DATES

BMP #	INSTALL DATE	REMOVE DATE	BMP #	INSTALL DATE	REMOVE DATE
P2S1-D1			P2S1-D6		
P2S1-D2			P2S1-D7		
P2S1-D3			P2S1-D8		
P2S1-D4			P2S1-D9		
P2S1-D5			P2S1-D10		

DATE: 1/12/2022
 FILE: c:\txdot\pw_online\txdot5\matthew.norris\0483329\ec216.dgn

DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

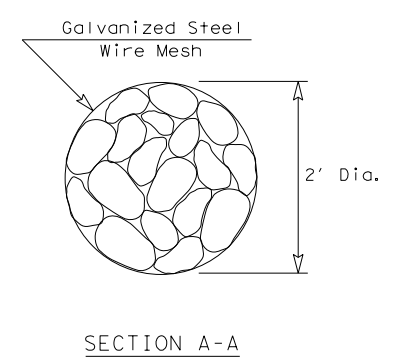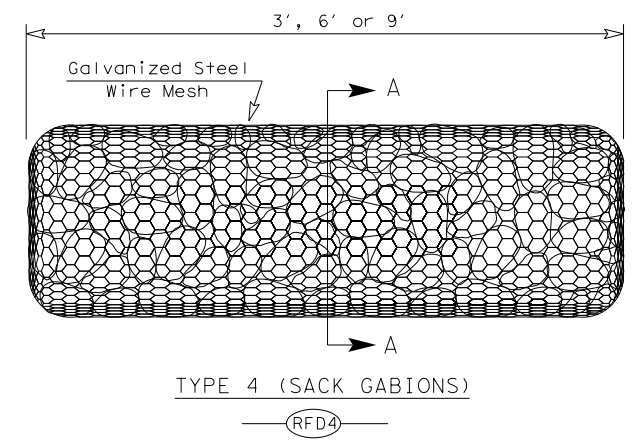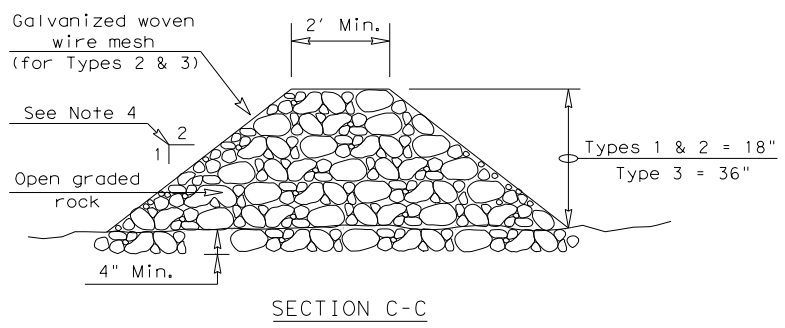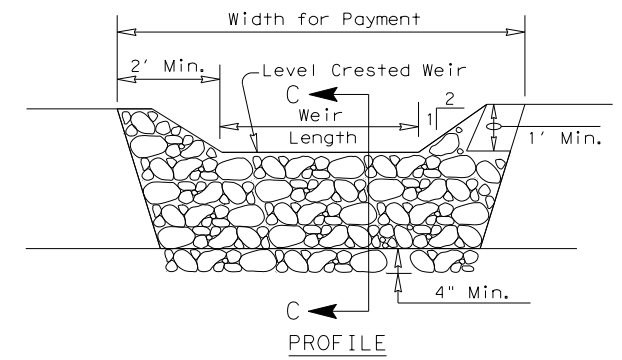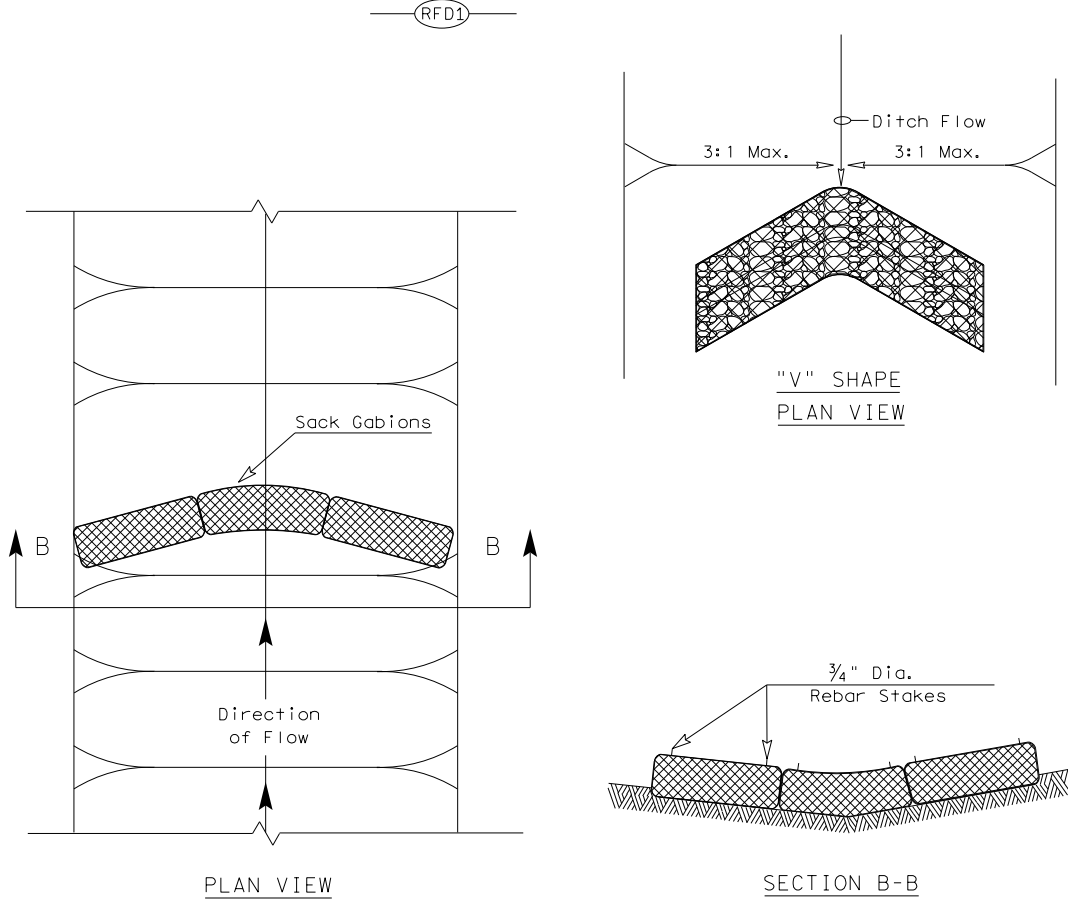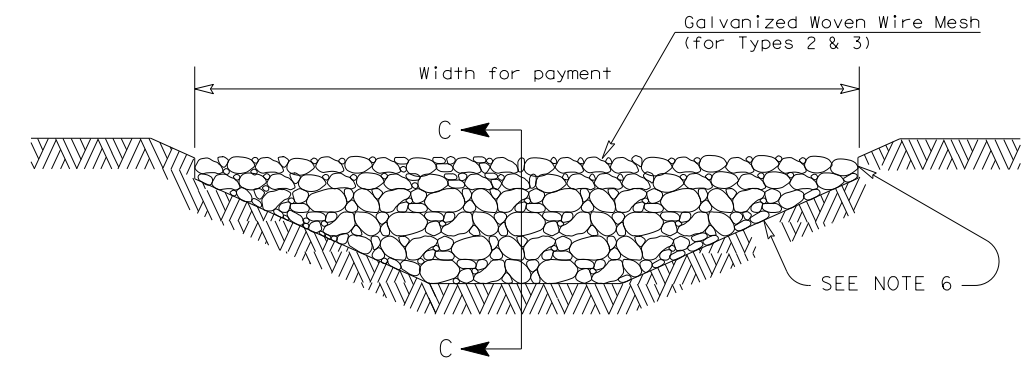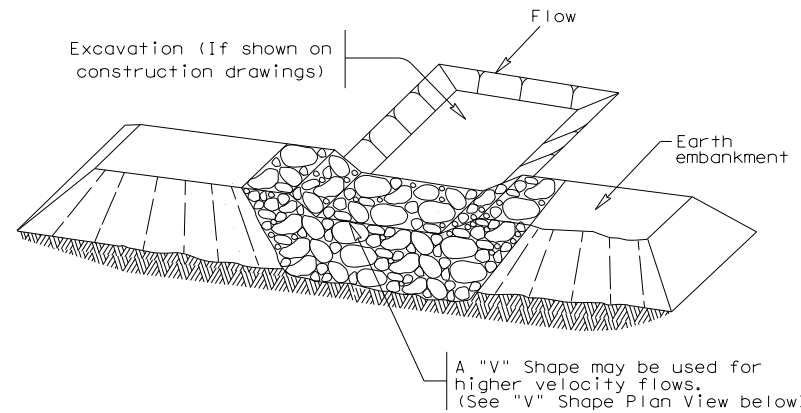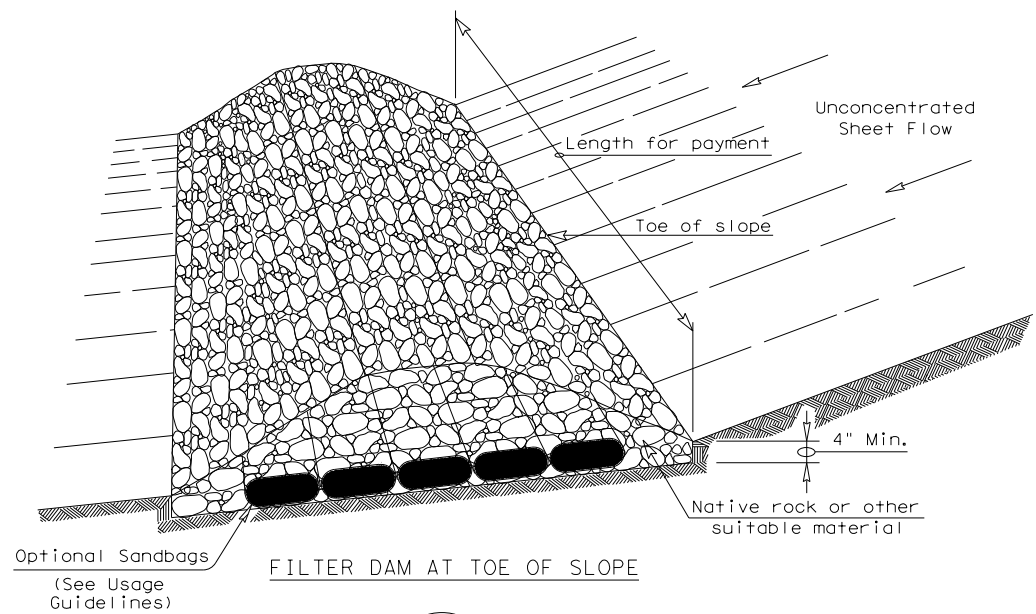

ROCK FILTER DAM USAGE GUIDELINES

Rock Filter Dams should be constructed downstream from disturbed areas to intercept sediment from overland runoff and/or concentrated flow. The dams should be sized to filter a maximum flow through rate of 60 GPM/FT² of cross sectional area. A 2 year storm frequency may be used to calculate the flow rate.

Type 1 (18" high with no wire mesh) (3" to 6" aggregate): Type 1 may be used at the toe of slopes, around inlets, in small ditches, and at dike or swale outlets. This type of dam is recommended to control erosion from a drainage area of 5 acres or less. Type 1 may not be used in concentrated high velocity flows (approximately 8 Ft/Sec or more) in which aggregate wash out may occur. Sandbags may be used at the embedded foundation (4" deep min.) for better filtering efficiency of low flows if called for on the plans or directed by the Engineer.

Type 2 (18" high with wire mesh) (3" to 6" aggregate): Type 2 may be used in ditches and at dike or swale outlets.

Type 3 (36" high with wire mesh) (4" to 8" aggregate): Type 3 may be used in stream flow and should be secured to the stream bed.

Type 4 (Sack gabions) (3" to 6" aggregate): Type 4 May be used in ditches and smaller channels to form an erosion control dam.

Type 5: Provide rock filter dams as shown on plans.

- GENERAL NOTES**
1. If shown on the plans or directed by the Engineer, filter dams should be placed near the toe of slopes where erosion is anticipated, upstream and/or downstream at drainage structures, and in roadway ditches and channels to collect sediment.
 2. Materials (aggregate, wire mesh, sandbags, etc.) shall be as indicated by the specification for "Rock Filter Dams for Erosion and Sedimentation Control".
 3. The rock filter dam dimensions shall be as indicated on the SW3P plans.
 4. Side slopes should be 2:1 or flatter. Dams within the safety zone shall have sideslopes of 6:1 or flatter.
 5. Maintain a minimum of 1' between top of rock filter dam weir and top of embankment for filter dams at sediment traps.
 6. Filter dams should be embedded a minimum of 4" into existing ground.
 7. The sediment trap for ponding of sediment laden runoff shall be of the dimensions shown on the plans.
 8. Rock filter dam types 2 & 3 shall be secured with 20 gauge galvanized woven wire mesh with 1" diameter hexagonal openings. The aggregate shall be placed on the mesh to the height & slopes specified. The mesh shall be folded at the upstream side over the aggregate and tightly secured to itself on the downstream side using wire ties or hog rings. For in stream use, the mesh should be secured or staked to the stream bed prior to aggregate placement.
 9. Sack Gabions should be staked down with 3/4" dia. rebar stakes, and have a double-twisted hexagonal weave with a nominal mesh opening of 2 1/2" x 3 1/4".
 10. Flow outlet should be onto a stabilized area (vegetation, rock, etc.).
 11. The guidelines shown hereon are suggestions only and may be modified by the Engineer.

PLAN SHEET LEGEND


Type 1 Rock Filter Dam (RFD1)
 Type 2 Rock Filter Dam (RFD2)
 Type 3 Rock Filter Dam (RFD3)
 Type 4 Rock Filter Dam (RFD4)

Texas Department of Transportation
 Design Division Standard


TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES
ROCK FILTER DAMS
EC(2) - 16

FILE: ec216	DN: TxDOT	CK: KM	DW: VP	DN/CK: LS
© TxDOT: JULY 2016	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044, ETC.FM 1378, ETC.	
	DIST	COUNTY	SHEET NO.	
	DAL	COLLIN	320	

DATE: 1/12/2022
 FILE: c:\txdot\pw_online\txdot5\matthew.norris\0483329\ec316.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

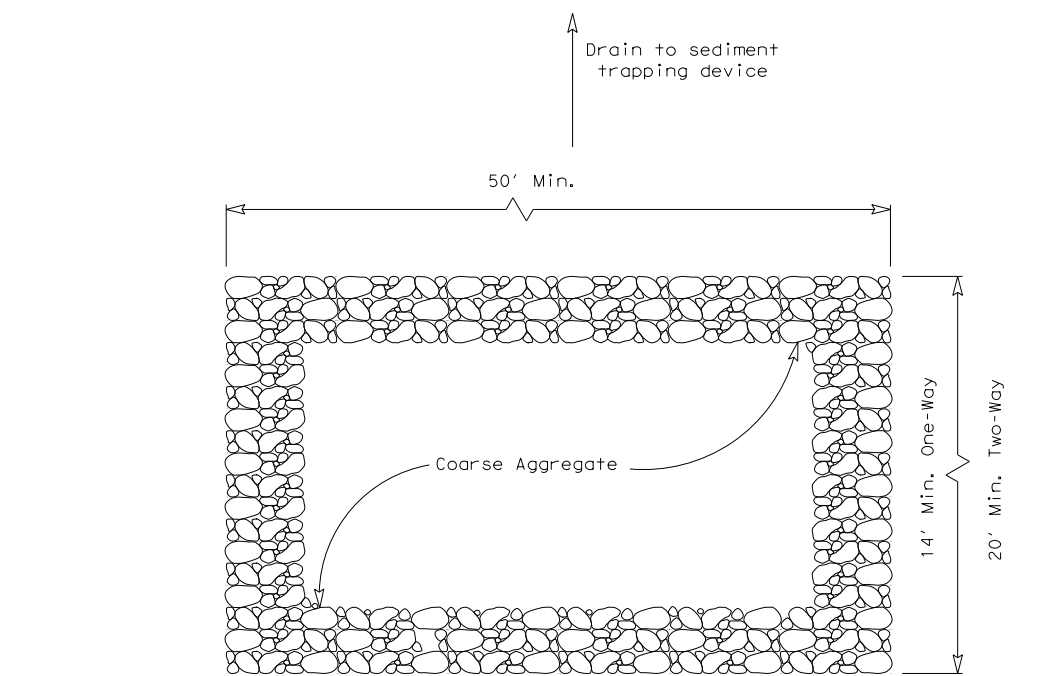

PLAN VIEW

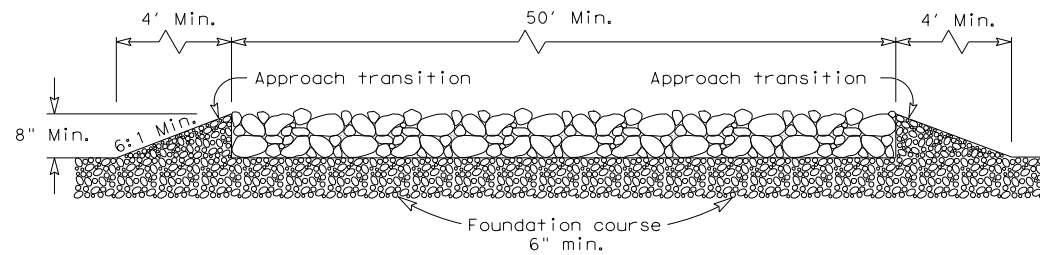


ELEVATION VIEW


CONSTRUCTION EXIT (TYPE 1)
ROCK CONSTRUCTION (LONG TERM)

GENERAL NOTES (TYPE 1)

1. The length of the type 1 construction exit shall be as indicated on the plans, but not less than 50'.
2. The coarse aggregate should be open graded with a size of 4" to 8".
3. The approach transitions should be no steeper than 6:1 and constructed as directed by the Engineer.
4. The construction exit foundation course shall be flexible base, bituminous concrete, portland cement concrete or other materials approved by the Engineer.
5. The construction exit shall be graded to allow drainage to a sediment trapping device.
6. The guidelines shown hereon are suggestions only and may be modified by the Engineer.
7. Construct exits with a width of at least 14 ft. for one-way and 20 ft. for two-way traffic for the full width of the exit, or as directed by the engineer.

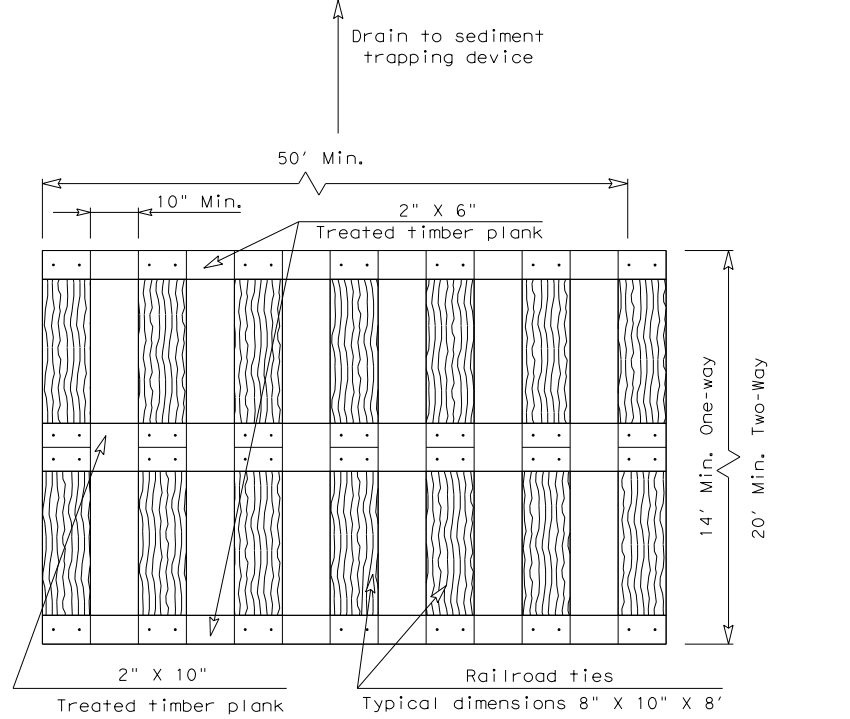

PLAN VIEW

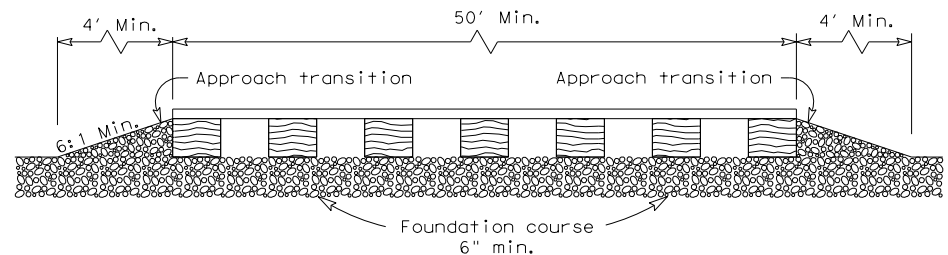


ELEVATION VIEW

CONSTRUCTION EXIT (TYPE 2)
TIMBER CONSTRUCTION (LONG TERM)


GENERAL NOTES (TYPE 2)

1. The length of the type 2 construction exit shall be as indicated on the plans, but not less than 50'.
2. The treated timber planks shall be attached to the railroad ties with 1/2" x 6" min. lag bolts. Other fasteners may be used as approved by the Engineer.
3. The treated timber planks shall be #2 grade min., and should be free from large and loose knots.
4. The approach transitions shall be no steeper than 6:1 and constructed as directed by the Engineer.
5. The construction exit foundation course shall be flexible base, bituminous concrete, portland cement concrete or other material as approved by the Engineer.
6. The construction exit should be graded to allow drainage to a sediment trapping device.
7. The guidelines shown hereon are suggestions only and may be modified by the Engineer.
8. Construct exits with a width of at least 14 ft. for one-way and 20 ft. for two-way traffic for the full width of the exit, or as directed by the engineer.

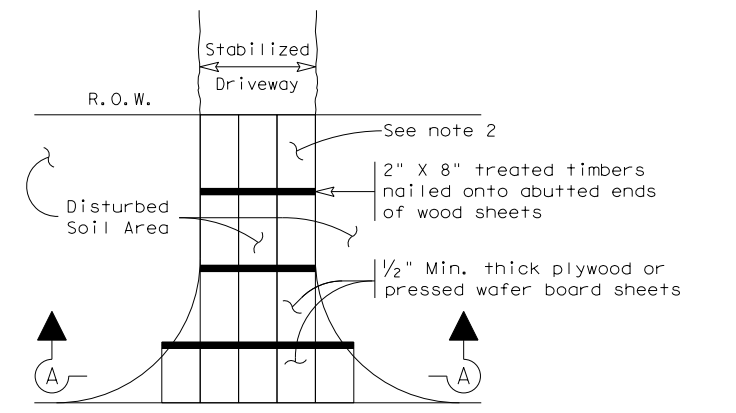

Paved Roadway

PLAN VIEW

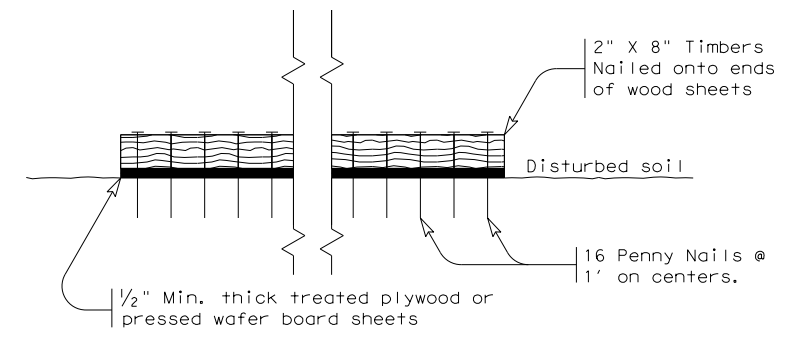

SECTION A-A


CONSTRUCTION EXIT (TYPE 3)
SHORT TERM

GENERAL NOTES (TYPE 3)


1. The length of the type 3 construction exit shall be as shown on the plans, or as directed by the Engineer.
2. The type 3 construction exit may be constructed from open graded crushed stone with a size of two to four inches spread a min. of 4" thick to the limits shown on the plans.
3. The treated timber planks shall be #2 grade min., and should be free from large and loose knots.
4. The guidelines shown hereon are suggestions only and may be modified by the Engineer.

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES CONSTRUCTION EXITS EC(3)-16			
FILE: ec316	DN: TxDOT	CK: KM	DW: VP
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	1392	01	044, ETC. FM 1378, ETC.
DIST	COUNTY		SHEET NO.
DAL	COLLIN		321


DATE: 1/12/2022
 FILE: c:\txdot\p_w_online\txdot5\matthew.norris\d0483329\ec916.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

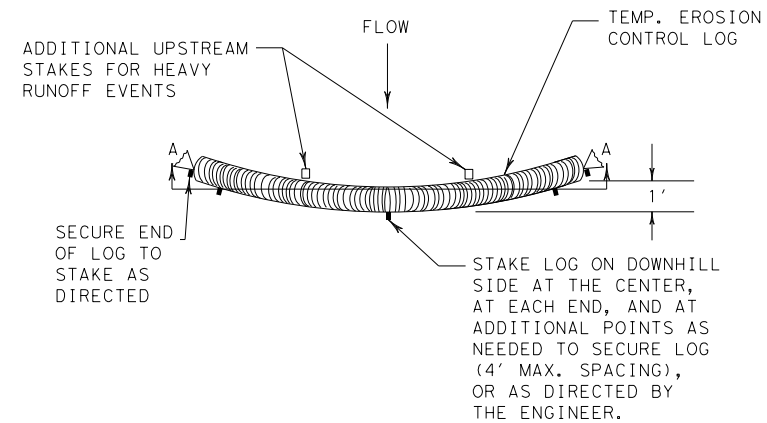


PLAN VIEW

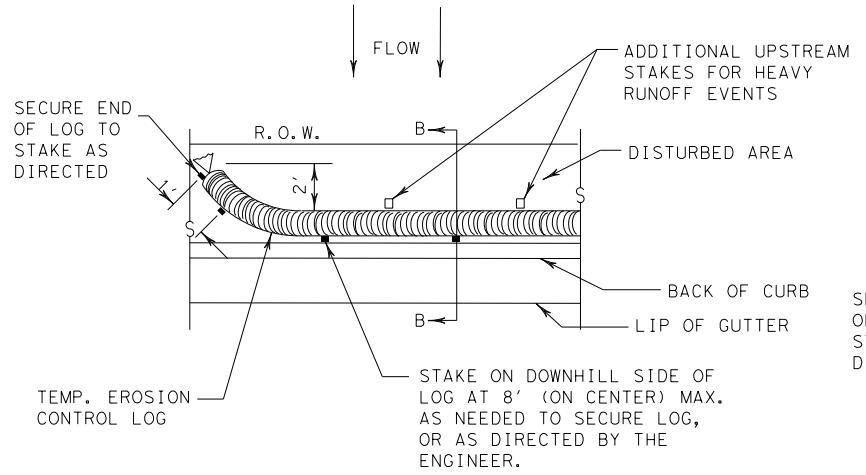

PLAN VIEW

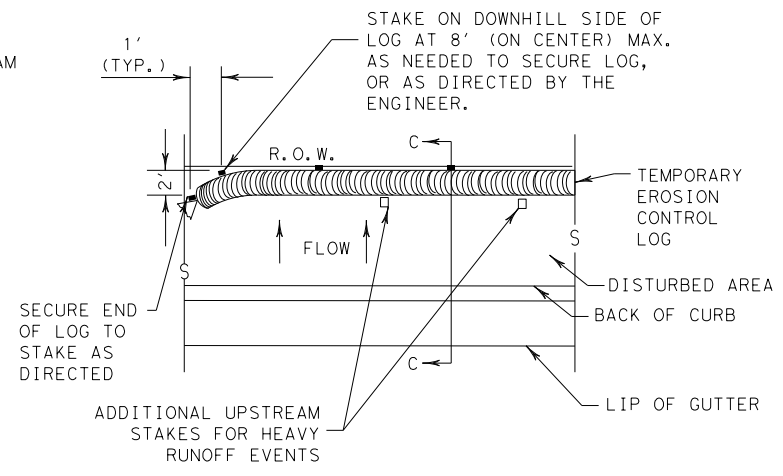


PLAN VIEW

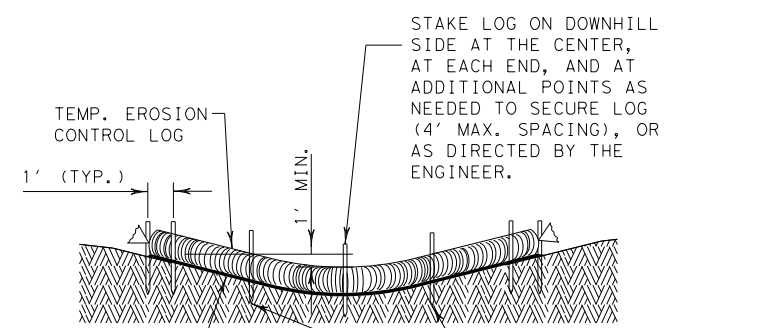

SECTION A-A

EROSION CONTROL LOG DAM


CL-D

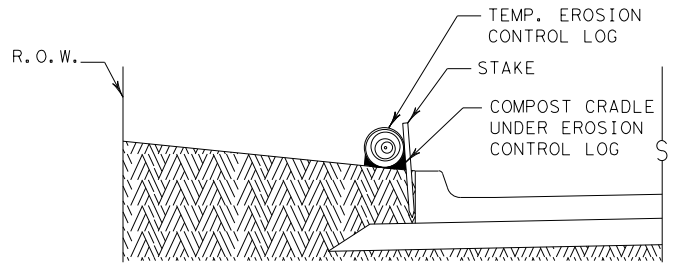

SECTION B-B

EROSION CONTROL LOG AT BACK OF CURB


CL-BOC

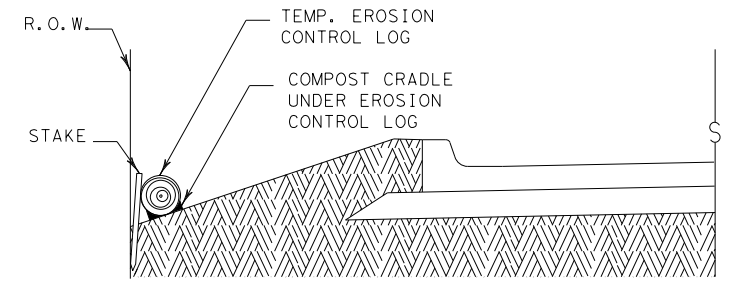

SECTION C-C


EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

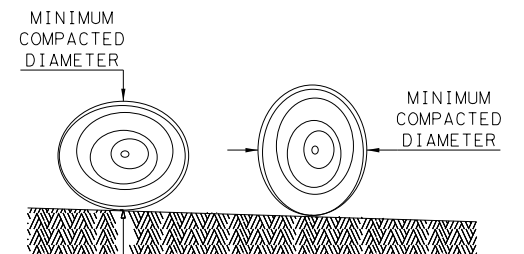

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS

- LEGEND
- CL-D EROSION CONTROL LOG DAM
 - CL-BOC EROSION CONTROL LOG AT BACK OF CURB
 - CL-ROW EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY
 - CL-SST EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING
 - CL-SSL EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING
 - CL-DI EROSION CONTROL LOG AT DROP INLET
 - CL-CI EROSION CONTROL LOG AT CURB INLET
 - CL-GI EROSION CONTROL LOG AT CURB & GRATE INLET



REBAR STAKE DETAIL

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion control log sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

Log Traps: The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Control logs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.


GENERAL NOTES:

1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4' LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.

SHEET 1 OF 3


		Design Division Standard	
<p>TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES</p> <p>EROSION CONTROL LOG</p> <p>EC (9) - 16</p>			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS		1392 01	044, ETC.FM 1378, ETC.
DIST	COUNTY	SHEET NO.	
DAL	COLLIN	322	

DATE: 1/12/2022
 FILE: c:\txdot\pw_online\txdot5\matthew.norris\0483329\ec916.dgn
 DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

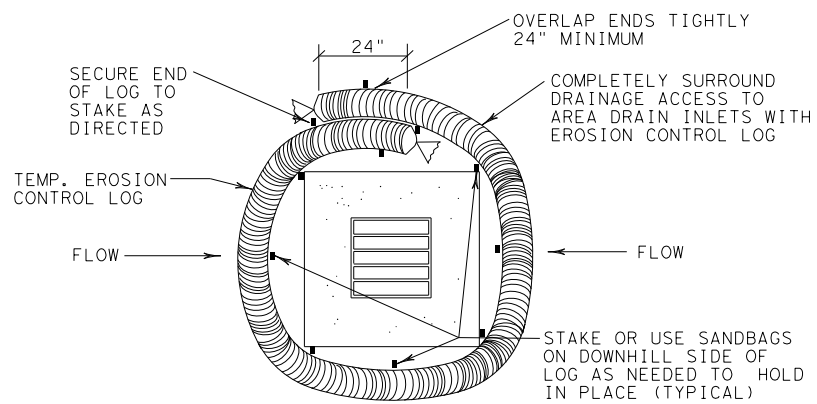


EROSION CONTROL LOG AT DROP INLET

CL-DI

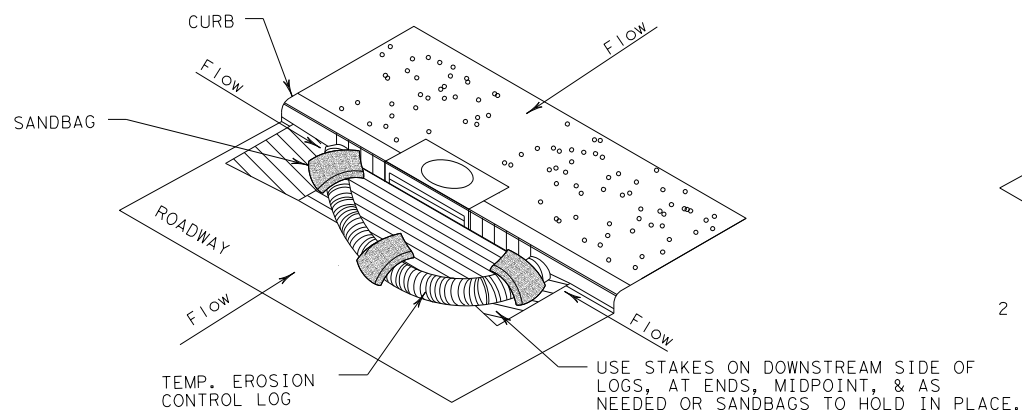

EROSION CONTROL LOG AT CURB INLET


CL-CI

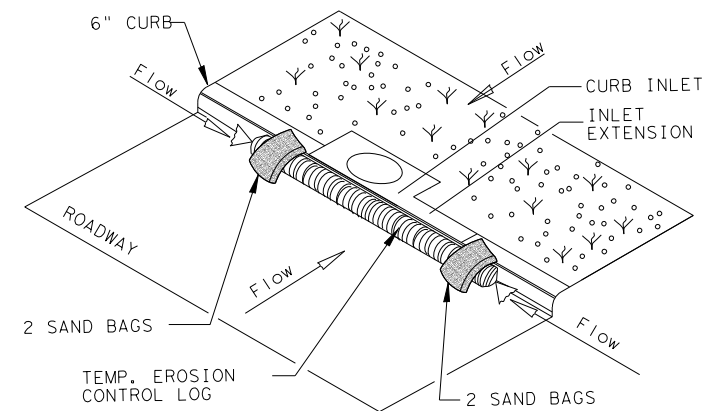

EROSION CONTROL LOG AT CURB INLET



CL-CI

NOTE:
 EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

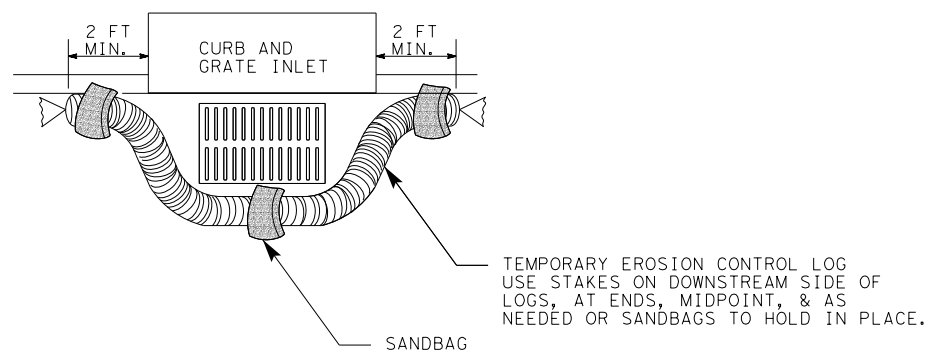

EROSION CONTROL LOG AT CURB & GRADE INLET


CL-GI

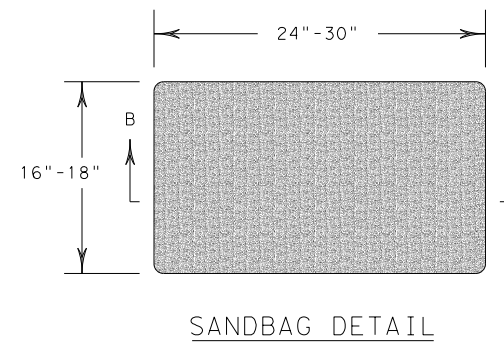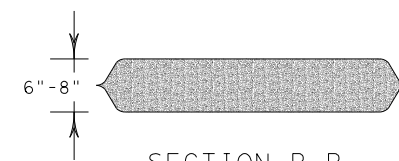

SHEET 3 OF 3


		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC (9) - 16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	1392	01	044, ETC. FM 1378, ETC.
DIST	COUNTY		SHEET NO.
DAL	COLLIN		323

DATE: 1/12/2022
 FILE: c:\txdot\pw_online\txdot5\matthew.norris\d0483329\ec916.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

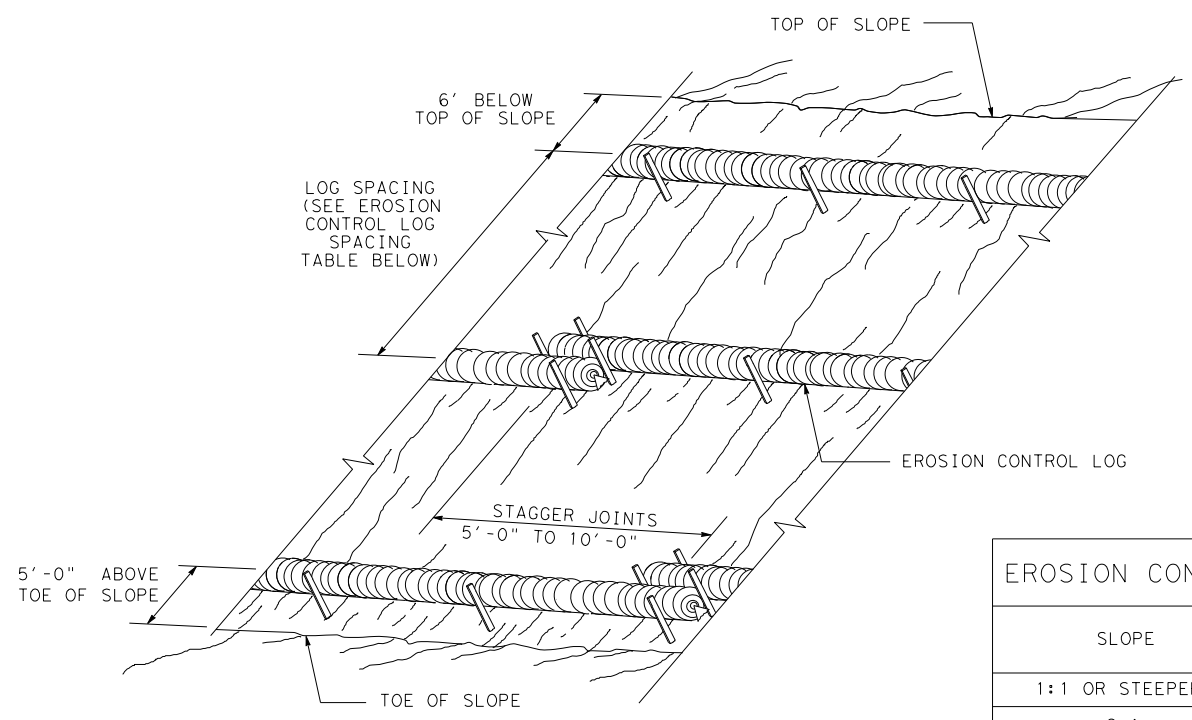

EROSION CONTROL LOGS ON SLOPES
STAKE AND TRENCHING ANCHORING


CL-SST

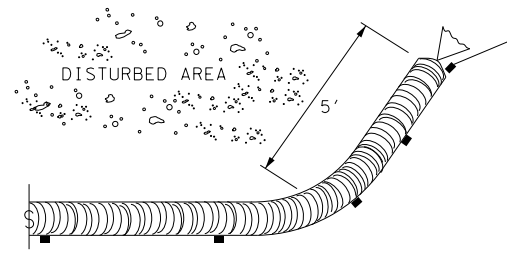

END SECTION RAP DETAIL


EROSION CONTROL LOG SPACING TABLE				
SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

* ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:
SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;
HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

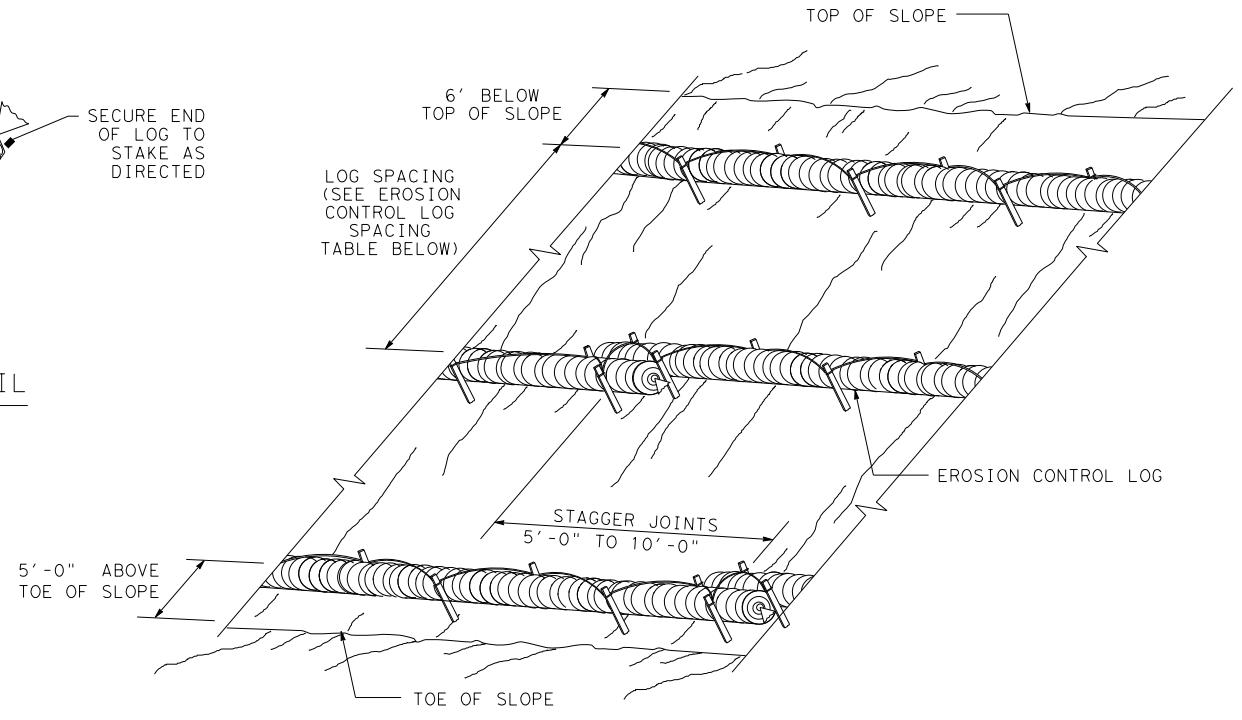


EROSION CONTROL LOGS ON SLOPES
STAKE AND LASHING ANCHORING

CL-SSL

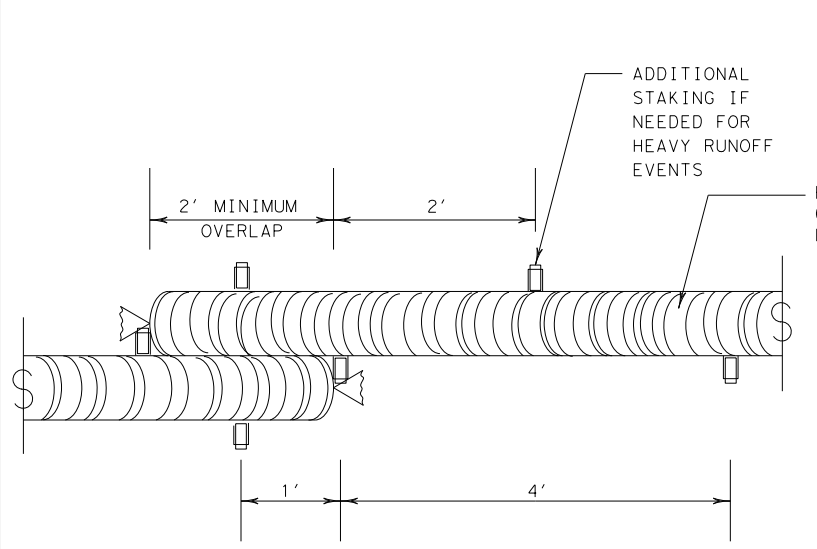

STAKE AND TRENCHING ANCHORING DETAIL


CL-SST

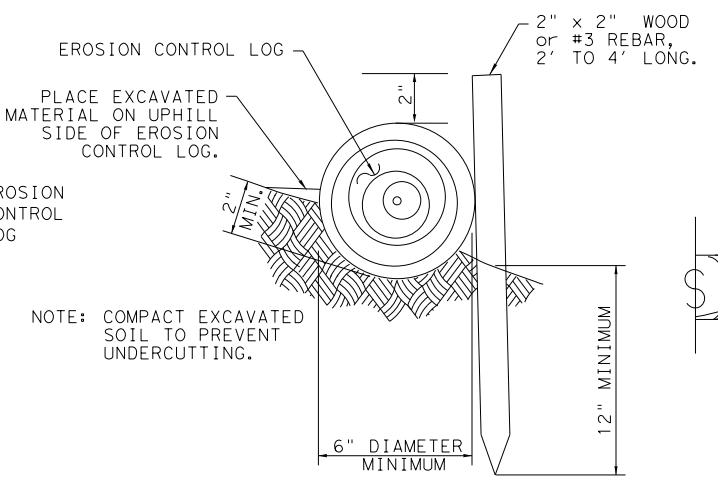


STAKE AND LASHING ANCHORING DETAIL

CL-SSL

TRENCH DEPTH TABLE	
LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"




STAKE NOTCH DETAIL

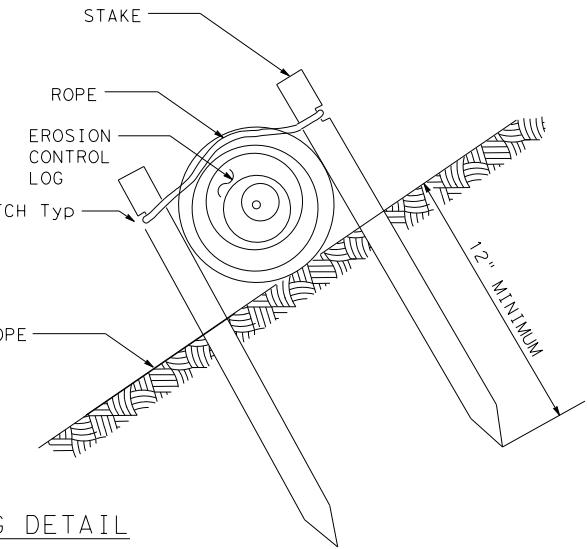



SHEET 2 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC (9) - 16			
FILE: ec116	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT SECT	JOB	HIGHWAY
REVISIONS	1392 01	044, ETC.FM 1378, ETC.	
DIST	COUNTY	SHEET NO.	
DAL	COLLIN	324	


DATE: 1/12/2022
 FILE: c:\txdot\pw_online\txdot5\matthew.norris\d0483329\aref21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

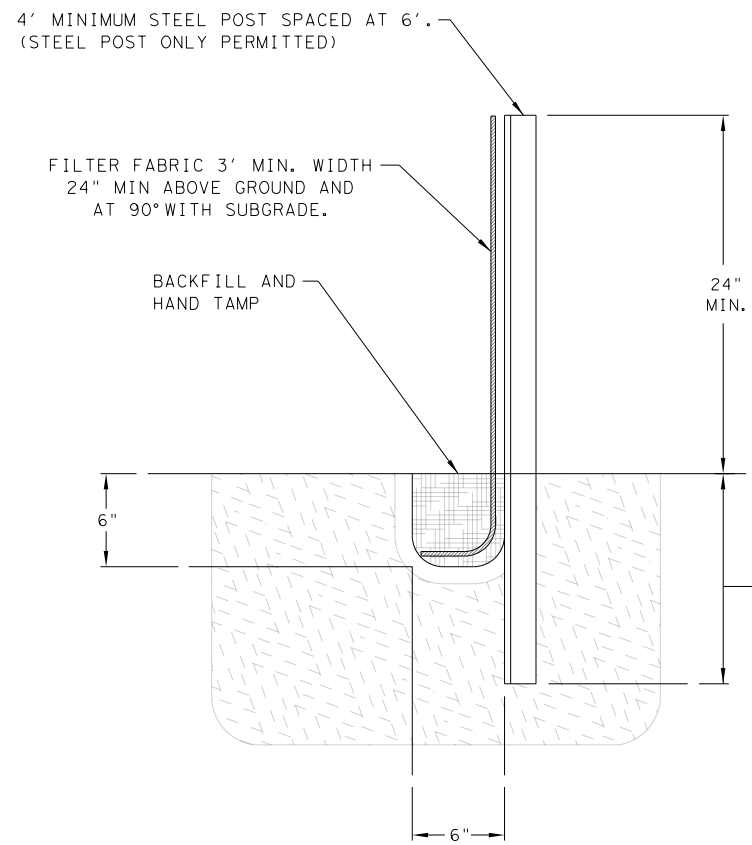

TRENCH SIDE VIEW DETAIL
 FABRIC TOE-IN IS TO RUN DOWN THE TRENCH AND ALONG THE BOTTOM OF THE TRENCH

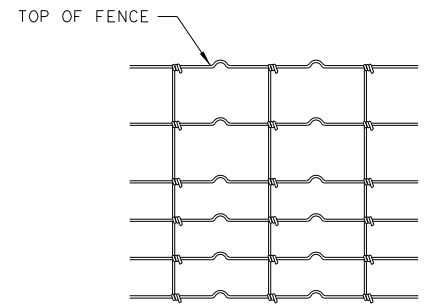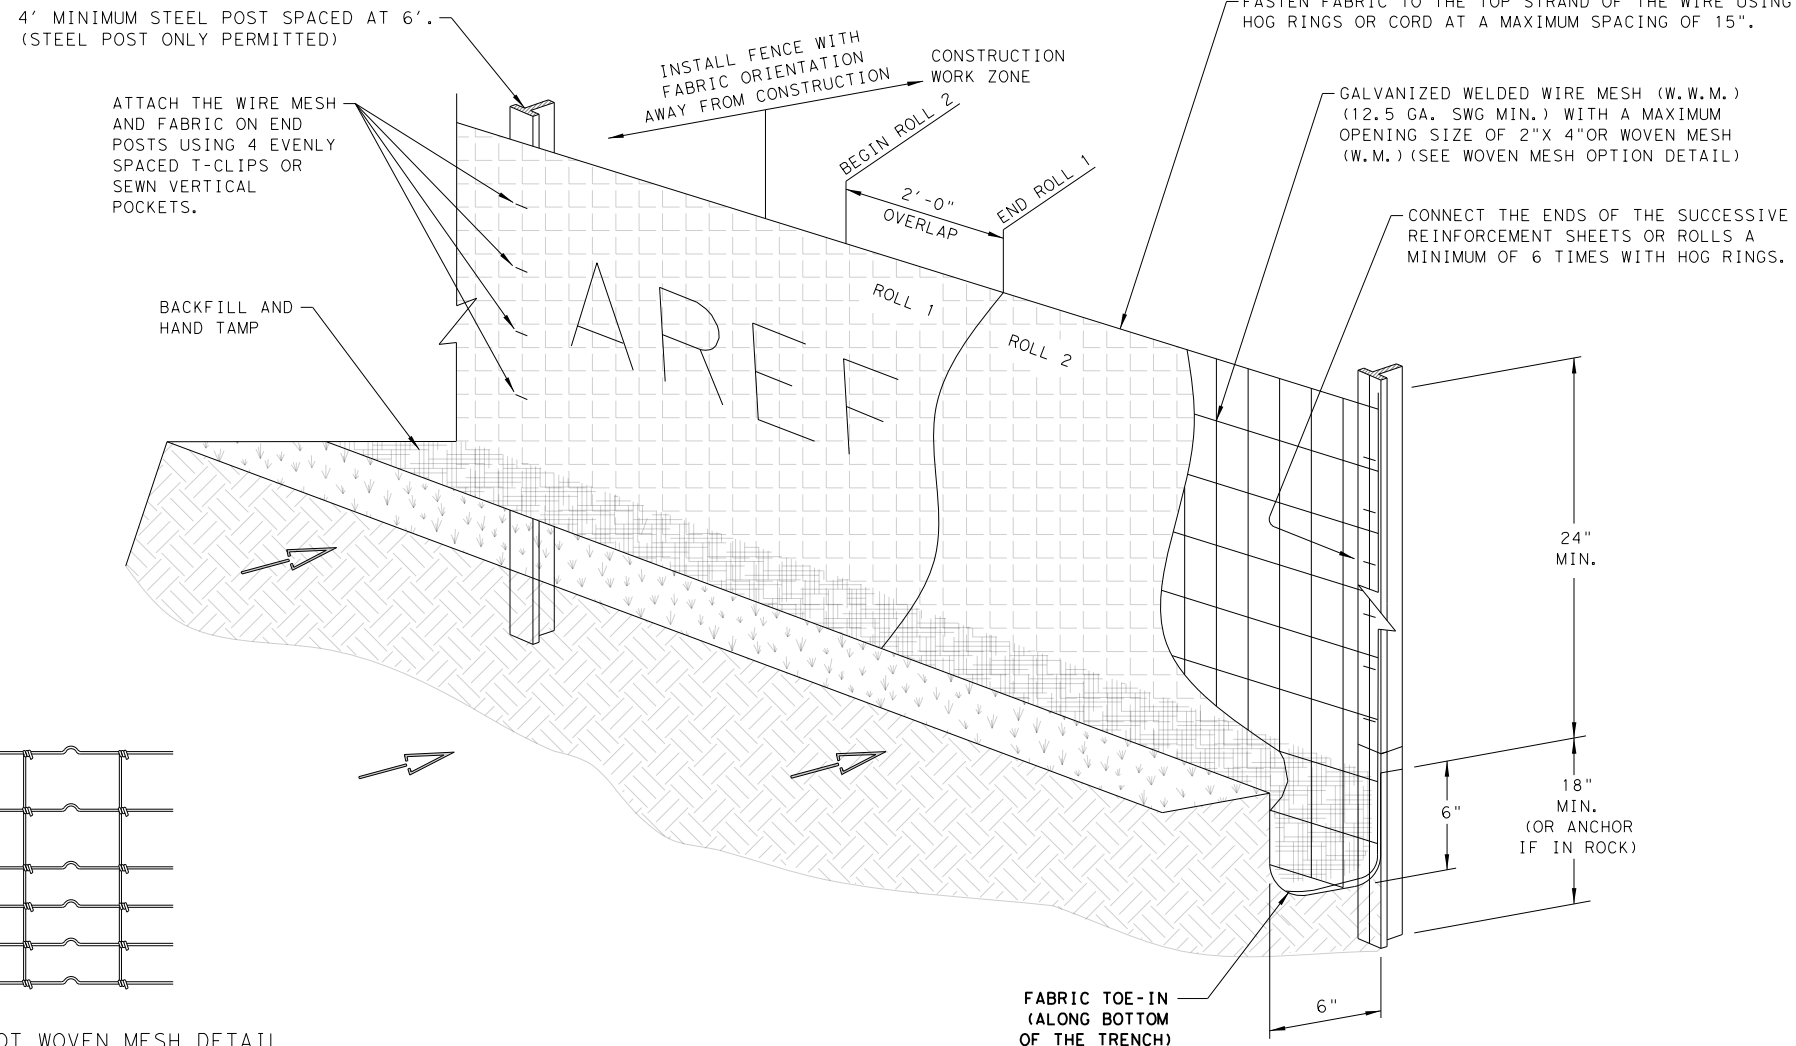

HINGE JOINT KNOT WOVEN MESH DETAIL
 GALVANIZED HINGE JOINT KNOT WOVEN MESH (12.5 GA. SWG MIN.) REQUIRES A MINIMUM OF FIVE HORIZONTAL WIRES SPACED AT A MAXIMUM OF 12 INCHES APART AND ALL VERTICAL WIRES SPACED AT A MAXIMUM OF 12 INCHES APART.

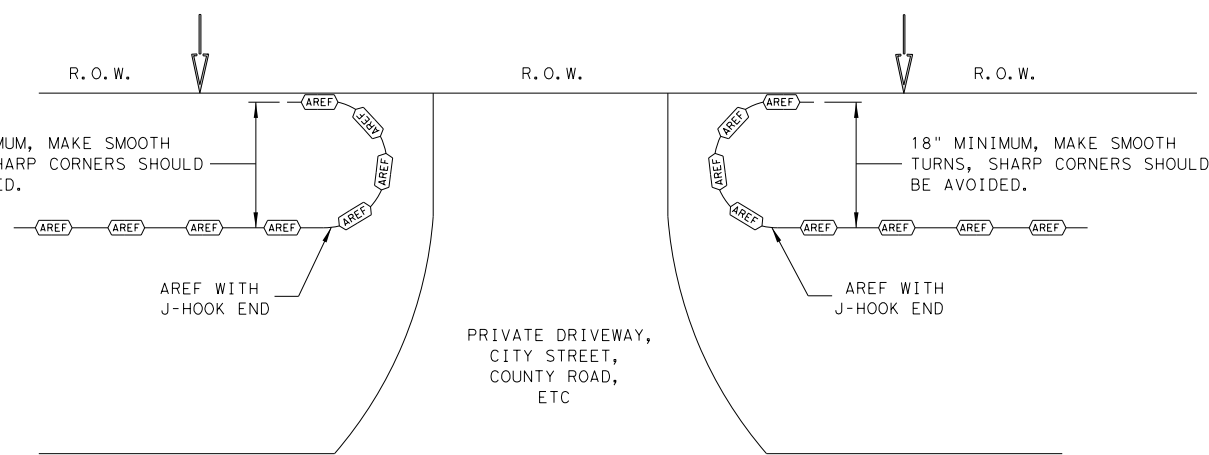

J-HOOK END OF FENCE DETAIL (TOP VIEW)
 TRENCH IS TO STAY 6 IN DEEP AND 6 IN WIDE WITH FABRIC TOE-IN TO MATCH TRENCH DETAIL.
 J-HOOK APPLIES AT DRIVEWAY BREAKS, ROADWAY BREAKS, AND AT ANY LOCATION AS DIRECTED BY THE ENGINEER.

GENERAL NOTES

1. REMOVE ALL ROOTS AND OTHER OBSTRUCTIONS FROM THE TRENCH BEFORE FABRIC PLACEMENT.
2. AMPHIBIAN AND REPTILE EXCLUSION FENCE MUST BE CHECKED DAILY, INCLUDING DAYS DURING RAINFALL SHUTDOWN PERIODS.
3. ANY DAMAGE TO FENCE, INCLUDING SMALL HOLES, MUST BE REPAIRED THE DAY IT IS OBSERVED BEFORE DARK.
4. SMALL HOLES (WITH THE ENGINEER'S DISCRETION) MAY BE REPAIRED WITH TAPE AS DIRECTED BY THE ENGINEER.
5. AS DIRECTED BY THE ENGINEER, SECTIONS OF FENCE WHERE THE DAMAGE IS DEEMED DETRIMENTAL TO THE FENCE WILL BE REPLACED RATHER THAN REPAIRED.
6. A MINIMUM OF 2' SHOULD BE OVERLAPPED WHEN JOINING FABRIC SECTIONS.
7. PAINT "AREF" OR "TEF" ON THE FABRIC IN BRIGHT COLOR EVERY 50' AND AT BREAKS.
8. REMOVE SEDIMENT, VEGETATION, OR OTHER DEBRIS TO MAINTAIN THE 24" AREF CLEARANCE.
9. FOR PAYMENT AND ADDITIONAL INFORMATION FOR AREF, SEE SPEC. 5116 (AMPHIBIAN AND REPTILE EXCLUSION FENCE).

LEGEND

AMPHIBIAN AND REPTILE EXCLUSION FENCE
 AMPHIBIAN AND REPTILE DIRECTION OF TRAVEL

Design Division Standard

AMPHIBIAN AND REPTILE EXCLUSION FENCE

AREF-21

FILE: aref21.dgn	DN: TJ	CK: KM	DW: SS	CK: AG
© TxDOT: FEBRUARY 2021	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044, ETC.FM 1378, ETC.	
DIST	COUNTY		SHEET NO.	
DAL	COLLIN		325	

SURFACE PREPARATION ITEM 160* TOPSOIL SY / ITEM 161* COMPOST MANUF. TOPSOIL (BOS) (4") SY

SURFACE PREPARATION

Prepare planting area surface BEFORE placing Topsoil, Compost, Fertilizer, Seed and/or Sod. Once project area has been completed to final lines, grade and compaction, remove objectionable materials from planting area surface and cultivate existing surface to a depth of 4 inches, unless otherwise specified or directed.

Refer to Items 160 and 161 of TxDOT 2014 Standard Specifications* for specifications, dimensions, volumes, and measurements that have been modified or not shown in plans. Materials and construction shall meet all specifications.

TOPSOIL NOTES:

- When Topsoil is specified under Item 160, use suitable material salvaged from the project ROW in accordance with Item 160 specifications, and/or secure additional good material from approved sources.
- Topsoil shall include only the top 6 inches of its native surface, and be easily cultivated, fertile, erosion-resistant and free of objectionable materials.
- Topsoil obtained from sites outside of the ROW must come from approved sources and have a pH between 5.5 and 8.5 su.
- Place Topsoil on pre-cultivated surface, spread to a uniform loose cover at thickness specified, and shape per plans. Water and roll the finished surface with a light roller or other suitable equipment per Item 160.3; do not over-compact.

COMPOST NOTES:

- When Compost Manufactured Topsoil (4") is specified under Item 161, use compost meeting all requirements of Item 161.2 and Table 1. Provide quality control (QC) documentation and obtain Engineer approval prior to compost delivery.
- Contractor shall provide tickets/invoices that document material type, quantity and placement for all compost delivered.
- Additional topsoil may be required to be imported to achieve the compost/topsoil mix ratio. Topsoil must meet Item 160 specifications.

APPLICATION OF COMPOST MANUFACTURED TOPSOIL (4")

AFTER Surface Preparation, uniformly spread a 1-inch layer of compost on-grade with 3 inches topsoil over pre-cultivated planting area. (25% compost and 75% topsoil = 1" compost and 3" topsoil.) Then mix compost and topsoil together by cultivating the compost into the topsoil (by till or disk) to a 4-inch (4") depth. Roll the finished surface with a light corrugated drum; do not over-compact.

FERTILIZER ITEM 166* FERTILIZER AC

SOIL ANALYSIS FOR FERTILIZER APPLICATION RATE

Unless otherwise stated in the plans, Contractor shall perform at least one soil analysis on each project before fertilization, and submit results to Engineer with recommended fertilizer rates based on soil analysis. Engineer may direct sample location(s). Soil analysis may be waived if both compost and sod are used on entire project.

FERTILIZER NOTES:

- Refer to Item 166 of TxDOT 2014 Standard Specifications* for specifications, dimensions, volumes, and measurements that have been modified or not shown in plans. Materials and construction shall meet all specifications.
- Apply fertilizer BEFORE seeding, or AFTER placing sod.
- Use fertilizer containing nitrogen (N), phosphoric acid (P) and potash (K) nutrients, unless otherwise specified. At least 50% of the Nitrogen component shall be a slow-release sulfur-coated urea as described in Item 166.3. Do not apply more than 60 lbs Nitrogen per acre without Engineer concurrence.
- Deliver fertilizer in bags, clearly labeled to show contents, unless otherwise specified or approved prior to delivery. When non-bagged, loose fertilizer is approved, provide documentation for each load of material delivered, to validate authenticity of the material.
- Apply fertilizer uniformly, as a dry, granular material, essentially dust-free, and do not mix with water for application as a slurry.
- When both temporary and permanent seeding are specified for the same area, apply half of the required fertilizer before the temporary seeding operation and the other half before the permanent seeding operation.

SEEDING FOR EROSION CONTROL ITEM 164* DRILL SEEDING AC

RECOMMENDED PLANTING SEASON	PERMANENT RURAL SEED MIX ITEM 164 - DRILL SEEDING (PERM) (RURAL) (CLAY)	PERMANENT URBAN SEED MIX ITEM 164 - DRILL SEEDING (PERM) (URBAN) (CLAY)	TEMPORARY DRILL SEED MIX ITEM 164 - DRILL SEEDING (TEMP) (WARM OR COOL)																														
WARM SEASON Mar. 15th, April, May, June, July, August, Sept. 15th	<table border="1"> <tr><td>Green Sprangletop (Van Horn)</td><td>- 1.0 lbs/AC</td></tr> <tr><td>Sideoats Grama (Haskell)</td><td>- 1.0 lbs/AC</td></tr> <tr><td>Texas Grama (Atascosa)</td><td>- 1.0 lbs/AC</td></tr> <tr><td>Hairy Grama (Chaparral)</td><td>- 0.4 lbs/AC</td></tr> <tr><td>Shortspike Windmillgrass (Welder)</td><td>- 0.2 lbs/AC</td></tr> <tr><td>Little Bluestem (OK Select)</td><td>- 0.8 lbs/AC</td></tr> <tr><td>Purple Prairie Clover (Cuero)</td><td>- 0.6 lbs/AC</td></tr> <tr><td>Engelmann Daisy (Eldorado)</td><td>- 0.75 lbs/AC</td></tr> <tr><td>Illinois Bundlesflower</td><td>- 1.3 lbs/AC</td></tr> <tr><td>Awnless Bushsunflower (Plateau)</td><td>- 0.2 lbs/AC</td></tr> </table>	Green Sprangletop (Van Horn)	- 1.0 lbs/AC	Sideoats Grama (Haskell)	- 1.0 lbs/AC	Texas Grama (Atascosa)	- 1.0 lbs/AC	Hairy Grama (Chaparral)	- 0.4 lbs/AC	Shortspike Windmillgrass (Welder)	- 0.2 lbs/AC	Little Bluestem (OK Select)	- 0.8 lbs/AC	Purple Prairie Clover (Cuero)	- 0.6 lbs/AC	Engelmann Daisy (Eldorado)	- 0.75 lbs/AC	Illinois Bundlesflower	- 1.3 lbs/AC	Awnless Bushsunflower (Plateau)	- 0.2 lbs/AC	<table border="1"> <tr><td>Green Sprangletop (Leptochloa dubia)</td><td>- 0.3 lbs/AC</td></tr> <tr><td>Sideoats Grama (El Reno) (Bouteloua curtipendula)</td><td>- 3.6 lbs/AC</td></tr> <tr><td>Buffalograss (Texoka) (Buchloe dactyloides)</td><td>- 1.6 lbs/AC</td></tr> <tr><td>Bermudagrass (Cynodon dactylon)</td><td>- 2.4 lbs/AC</td></tr> </table>	Green Sprangletop (Leptochloa dubia)	- 0.3 lbs/AC	Sideoats Grama (El Reno) (Bouteloua curtipendula)	- 3.6 lbs/AC	Buffalograss (Texoka) (Buchloe dactyloides)	- 1.6 lbs/AC	Bermudagrass (Cynodon dactylon)	- 2.4 lbs/AC	<table border="1"> <tr><td>Foxtail Millet (Setaria italica)</td><td>- 34 lbs/AC</td></tr> </table>	Foxtail Millet (Setaria italica)	- 34 lbs/AC
Green Sprangletop (Van Horn)	- 1.0 lbs/AC																																
Sideoats Grama (Haskell)	- 1.0 lbs/AC																																
Texas Grama (Atascosa)	- 1.0 lbs/AC																																
Hairy Grama (Chaparral)	- 0.4 lbs/AC																																
Shortspike Windmillgrass (Welder)	- 0.2 lbs/AC																																
Little Bluestem (OK Select)	- 0.8 lbs/AC																																
Purple Prairie Clover (Cuero)	- 0.6 lbs/AC																																
Engelmann Daisy (Eldorado)	- 0.75 lbs/AC																																
Illinois Bundlesflower	- 1.3 lbs/AC																																
Awnless Bushsunflower (Plateau)	- 0.2 lbs/AC																																
Green Sprangletop (Leptochloa dubia)	- 0.3 lbs/AC																																
Sideoats Grama (El Reno) (Bouteloua curtipendula)	- 3.6 lbs/AC																																
Buffalograss (Texoka) (Buchloe dactyloides)	- 1.6 lbs/AC																																
Bermudagrass (Cynodon dactylon)	- 2.4 lbs/AC																																
Foxtail Millet (Setaria italica)	- 34 lbs/AC																																
COOL SEASON Sept 16th, Oct, Nov, Dec, Jan, Feb, Mar 14th			<table border="1"> <tr><td>Tall Fescue (Festuca arundinaceae)</td><td>- 4.5 lbs/AC</td></tr> <tr><td>Western Wheatgrass (Agropyron smithii)</td><td>- 5.6 lbs/AC</td></tr> <tr><td>Red Winter Wheat (Triticum aestivum)</td><td>- 34 lbs/AC</td></tr> <tr><td>Cereal Rye</td><td>- 34 lbs/AC</td></tr> </table>	Tall Fescue (Festuca arundinaceae)	- 4.5 lbs/AC	Western Wheatgrass (Agropyron smithii)	- 5.6 lbs/AC	Red Winter Wheat (Triticum aestivum)	- 34 lbs/AC	Cereal Rye	- 34 lbs/AC																						
Tall Fescue (Festuca arundinaceae)	- 4.5 lbs/AC																																
Western Wheatgrass (Agropyron smithii)	- 5.6 lbs/AC																																
Red Winter Wheat (Triticum aestivum)	- 34 lbs/AC																																
Cereal Rye	- 34 lbs/AC																																

SEEDING NOTES:

- When seeding is specified under Item 164, refer to TxDOT 2014 Standard Specifications* for specifications, dimensions, volumes, and measurements that have been modified or not shown. Materials and construction shall meet specifications.
- Conduct seeding upon completion of each applicable construction stage (dependent upon planting season requirements), without compensation for additional move-ins.
- Place seed AFTER preparing planting area surface. Refer to Surface Preparation detail in this sheet, as well as Topsoil Item 160 and Compost Manufactured Topsoil Item 161 when specified. Apply fertilizer per Item 166 BEFORE seeding, per specifications and this sheet, to help drill the fertilizer into the soil.
- When temporary grasses are well-established and more than 2 inches tall, mow planting area before seeding permanent grasses; mowing for this purpose will be subsidiary. When vegetation is not already well-established, cultivate planting area to a depth as described in Item 164.3, before temporary seeding and before permanent seeding.
- Seed material must be appropriate to the location, soil type and season. Use the seed mix species and pure live seed rates designated in Tables 1-4 of the TxDOT 2014 Standard Specifications* for Item 164, unless otherwise specified.
- All seed shall meet labeling, delivery, analysis, and testing requirements described in Item 164.2.1. Deliver seed in labeled, unopened bags or containers to Engineer prior to planting.
- Uniformly plant seed over the designated planting area, along the contour of slopes, and drill seed to a depth as described in Item 164.3.4.
- Hydroseeding may be allowed, when specified or Engineer concurs.
- Implement and continue Vegetative Watering per the schedule, rate and volume specified under Item 168.

TxDOT REFERENCE MATERIALS:

- "STANDARD SPECIFICATIONS FOR CONSTRUCTION AND MAINTENANCE OF HIGHWAYS, STREETS, AND BRIDGES" 2014
- "A GUIDANCE TO ROADSIDE VEGETATION ESTABLISHMENT" 2004
- ONLINE TRAINING COURSE: MNT415 REVEGETATION DURING CONSTRUCTION
- DALLAS DISTRICT "VEGETATION ESTABLISHMENT GUIDELINES"

SODDING FOR EROSION CONTROL ITEM 162* BLOCK SOD (BERMUDA) SY

BLOCK OR ROLL SOD	COMMON NAME	BOTANICAL NAME
	Common Bermuda Grass	Cynodon dactylon

SODDING NOTES:

- Refer to Item 162 of TxDOT 2014 Standard Specifications* for specifications, dimensions, volumes, and measurements that have been modified or not shown in plans. Materials and construction shall meet all specifications.
- Place sod between the average date of the last freeze in the Spring and 6 weeks before the average date of the first freeze in the Fall, per the Texas Almanac for the project area.
- Place sod only AFTER soil surface preparation is complete as detailed in this sheet. Dry soil may require pre-watering.
- Place all sod (blocks or rolls) within 24 hours of delivery to the site, and keep moist from the time it is dug up until it is planted. Sod with dried roots will not be accepted.
- Place sod with joints alternating on each row to prevent all joints from lining up, and place blocks firmly against adjacent blocks. Roll, tamp and trim sod per Item 162.3.
- Place fertilizer promptly AFTER sodding operation is complete in each area.
- Water sod immediately following placement, and continue Vegetative Watering per Item 168.

VEGETATIVE WATERING FOR ESTABLISHING SEED AND SOD ITEM 168* VEGETATIVE WATERING MG

SEASON (Usual Months)	RATE	TIME SCHEDULE	TOTAL WATER ESTIMATE
SPRING & FALL (March, April, May, October)	7,000 gallons/acre per working day	Vegetative watering for seed shall begin on the day after rainfall described below and continue for 60 consecutive working days; vegetative watering for sod shall begin on the day the sod is placed and continue for a minimum of 15 consecutive working days.	420,000 gallons/acre (60 working days)
SUMMER (June, July, August, September)	12,000 gallons/acre per working day		720,000 gallons/acre (60 working days)
WINTER (November through February)	1,000 gallons/acre per working day	Vegetative watering for seed and/or sod shall begin on the day after placement for 15 consecutive working days	15,000 gallons/acre (15 working days)

Notes: Rate and frequency may be adjusted, with the approval of the Engineer, to meet site conditions (especially with sod). For informational purposes only: 1,000 gallons equals 1 MG

VEGETATIVE WATERING NOTES:

- Refer to Item 168 of TxDOT 2014 Standard Specifications* for specifications, dimensions, volumes, and measurements that have been modified or not shown in plans. Materials and construction shall meet all specifications.
- Use clean water free of industrial waste and other substances harmful to vegetation growth, per Item 168.2.
- Use Vegetative Watering to keep the seed bed moist during germination; not to provide initial watering. After drill seeding, postpone watering operations until site receives at least 1/2-inch of natural rainfall in a single day. Delay watering operations for warm season grasses until soil temperature exceeds 70 degrees F.
- For sod, water immediately.
- All water distribution equipment shall be furnished and operated to provide water at a uniform and controllable rate. Use a metering device on all watering equipment.
- Evenly distribute water over entire area designated for seeding and/or sodding, using even spray patterns that do not disturb seed bed and/or dislodge seed from seed bed.
- Do not water between the hours of 12:00 p.m. and 6:00 p.m. when daytime temperatures exceed 95 degrees F.
- After initial establishment period, continue intermittent watering of newly established seed or sod at a rate of approximately 1-inch water/week, during summer months until end of contract.
- If 1/4-inch or more of rainfall occurs on site on any given working day, no vegetative watering will be needed on that working day. (Note: 1/4-inch rain equals 7,000 gallons of water per acre.)
- Should the Contractor fail to apply the specified amount of water within the time allowed, any seed or sod in poor condition shall be replaced, fertilized, and watered at Contractor's expense.

ROADSIDE MOWING ITEM 730* PROJECT MAINTENANCE AC

MOWING NOTES:

- During project construction, once seed is established, use mowing to promote permanent grasses by mowing any remaining temporary grasses.
- Also mow established turf and ROW grasses in designated areas of project limits as specified or directed by Engineer.
- Remove litter and debris prior to mowing.
- Do not mow on wet ground when soil rutting can occur.
- Hand-trim around obstructions and stormwater control devices as needed.
- Maintain paved surfaces free of tracked soils and clipped vegetation.

SEQUENCE OF WORK:

- CULTIVATE SURFACE SOIL.
- PREPARE / PLACE TOPSOIL, OR
- PREPARE / PLACE COMPOST MANUFACTURED TOPSOIL.
- APPLY FERTILIZER AND THEN PLACE SEEDING, OR
- PLACE SOD AND THEN APPLY FERTILIZER.
- CONDUCT VEGETATIVE WATERING.
- CONDUCT ROADSIDE MOWING, AS DIRECTED.




VEGETATION ESTABLISHMENT SHEET
(DALLAS DISTRICT)

TEMPLATE REVISION DATE: 02/21/19

DESIGN CPB	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
GRAPHICS XXX	6	(See Title Sheet)		FM 1378, ETC.
CHECK XXX	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK XXX	TEXAS	DALLAS	COLLIN	326
CHECK XXX	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	

DISCLAIMER:
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

LEVELS DISPLAYED	1
PATH:	

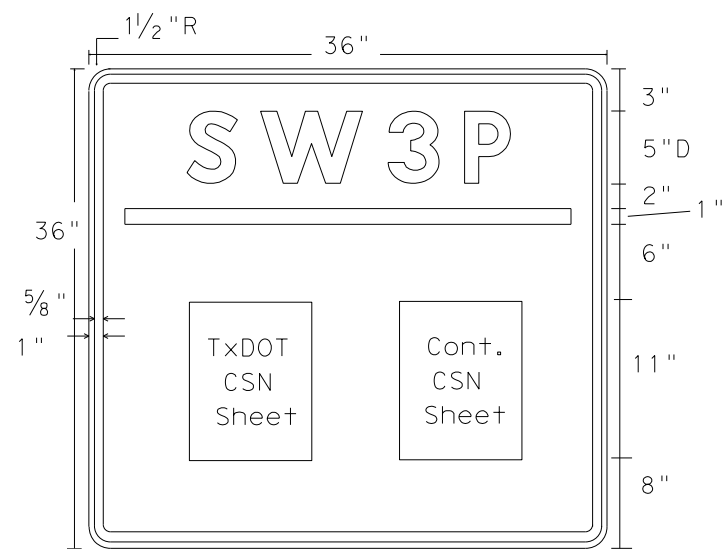


Sign Dimensions

36" X 36"

- Letters - White
- Numbers - White
- Border - White
- Background - Blue

SW3P SIGN

TxDOT & Contractor
Construction Site Note
(CSN)

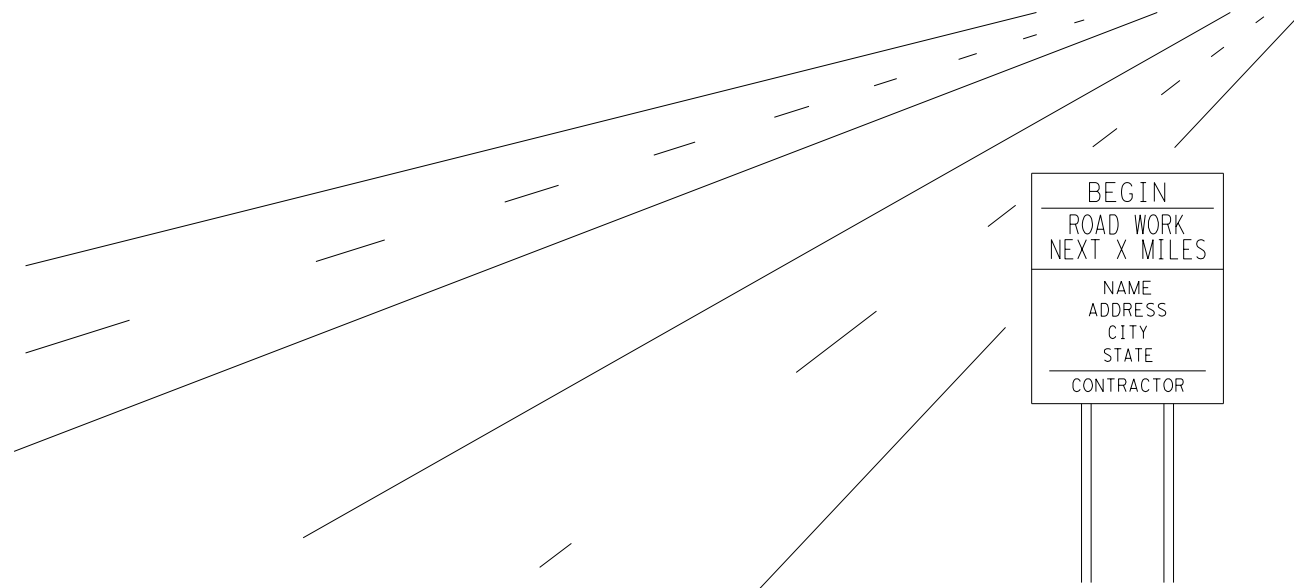

GENERAL NOTES:

- The alphabets and lateral spacing between letters and numerals shall conform with the "Texas Manual on Uniform Traffic Control Devices for Streets and Highways", (TMUTCD) latest edition, and the "Compliant Work Zone Traffic Control Devices List". Lateral spacing of text shall provide a balanced appearance. All materials shall conform to Department Specifications.
- Legend and border may be applied by reverse screening process with transparent colored ink, cut-out white reflective sheeting applied to colored background or combination thereof. Background shall be reflective sheeting Type C.
- CSN Sheets will be laminated and attached to the sign with an adhesive. Ensure sheets remain dry. (See Figure 1).
- SW3P Signs should be placed just inside the ROW line at the project limits at a readable height. It may be placed perpendicular or parallel to ROW line. If the sign cannot be placed outside the clear zone, it will be mounted per TMUTCD requirements.
- Final location of the signs will be as approved by the Engineer.

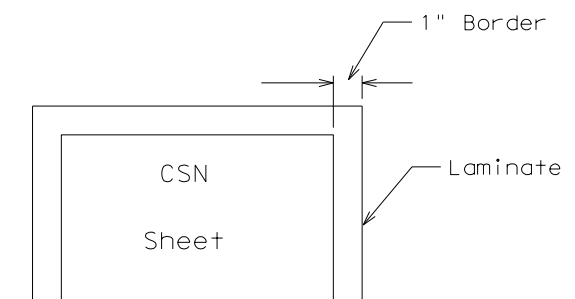


Figure 1

DEPARTMENT MATERIAL SPECIFICATIONS	
PLYWOOD SIGN BLANKS	DMS-7100
FLAT SURFACE REFLECTIVE SHEETING	DMS-8300
VINYL NON-REFLECTIVE DECAL SHEETING	DMS-8320

COLOR	USAGE	REFLECTIVE SHEETING OR OTHER MATERIAL
BLUE	BACKGROUND	TYPE C (FLUORESCENT PRISMATIC)
WHITE	LEGEND & BORDERS	VINYL NON-REFLECTIVE DECAL SHEETING

Texas Department of Transportation
DALLAS DISTRICT STANDARD

SW3P SIGN SHEET

FILE:	DN: IxDOT	CK:	DW:	CK:
© TxDOT 2016	DISTRICT	FEDERAL AID PROJECT		SHEET
REVISION DATE:	18	SEE TITLE SHEET		327
10-16-15	COUNTY	CONTROL SECT	JOB	HIGHWAY
	COLLIN	1392 01	044, ETC.	FM 1378, ETC.