

Float Arrangement Diagram



Oranco Systems*
Incorporated

814 ARWAY AVENUE
SUTHERLIN, OREGON

97479-9012


TELEPHONE:

(541) 459-4449

FACSIMILE:


(541) 459-2884


Check the appropriate box for the float function (color code) used in your system.

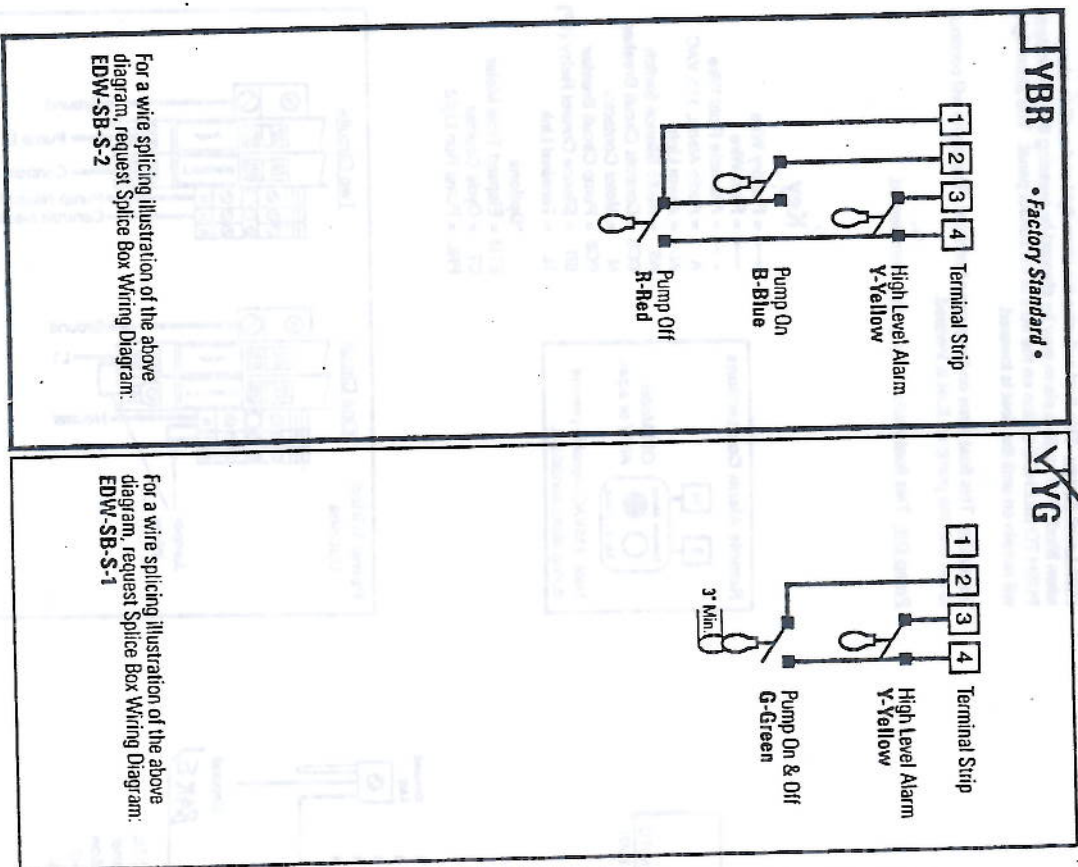


Float Types

Typical OSI float model: A
Specs: contact - normally open
differential - no minimum
power rating - signal
Possible substitutions: B, C, D, E


Typical OSI float model: E
Specs: contact - normally open
differential - 3' min.
power rating - signal
Possible substitutions: B, C, D


Typical OSI float model: B
Specs: contact - normally open
differential - 3' min.
power rating - pump
Possible substitutions: C, D


Typical OSI float model: R
Specs: contact - normally closed
differential - 3' min.
power rating - signal

Control Panel Series

S

Drawing No.

EDW-FA-S-1

EDW-FA-S-1
Rev 2.0 ©02/7/98