

6" DIA. HOLE FOR REFLECTIVE POST

2' RADIUS

CURVE DATA

UNLESS OTHERWISE SHOWN
ON PLANS

△ = 18° 11' 42"
R = 100.00'
L = 31.76'
T = 16.01'


POCKET LENGTH
AND NOSE LOCATION
PER PLANS

END CURVE


P.R.C.

62.45'

BEGIN CURVE

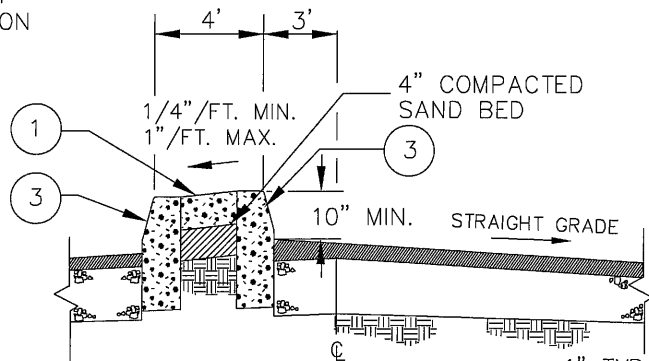

SECTION A-A

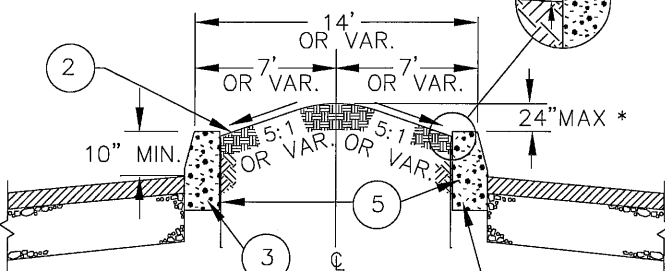

SECTION B-B

- 1 — CONSTRUCT 4" THICK PATTERN STAMPED CONCRETE CAP FLUSH WITH TOP OF CURBS. OVER 4" THICK COMPACTED SAND BED. CONCRETE COLOR TO BE BRICK RED #A-26 AS MANUFACTURED BY L.M. SCOFIELD OR APPROVED EQUAL.
- 2 — PROVIDE DROUGHT TOLERANT MEDIAN LANDSCAPING & DRIP IRRIGATION PER PLANS PREPARED OR APPROVED BY PWA DESIGN ENGINEERING
- 3 — CONSTRUCT 10" TYPE B-1 CURB PER STD. PLAN NO. 1101.
- 4 — CONSTRUCT 8"X 8" PCC MOW STRIP
- 5 — INSTALL 24" - 20 MIL PVC LINER.

REPLACES STD. PLAN NUMBER 118.

* 24" MAX. APPLIES WHEN MEDIAN WIDTH IS WIDER THAN 14' PER THE PLANS.

APPROVED:

DATE: 5.16.17

CITY ENGINEER

CITY OF SANTA ANA
PUBLIC WORKS AGENCY



DATE	REVISION
9-30-96	CHANGE CURB HEIGHT
11-7-97	ADD MOISTURE BARRIER AND CHANGE CURB TYPE
3-12-98	CHANGE BUBBLE NOTE NUMBER
2-18-99	REVISED BERM HEIGHTS AND STAMPED CONCRETE MAX. X-SLOPE
11-2-99	REVISED MAX. X-SLOPE
5-16-17	REVISED NOTE 2

STANDARD 14' MEDIAN
TURN POCKET

STD. PLAN
NUMBER
1118