


.375" Diameter Perforations Located .375" From Edge, Top & Bottom On Center

3" Suffix & Directional Upper Case, Series B

0.75" Radius

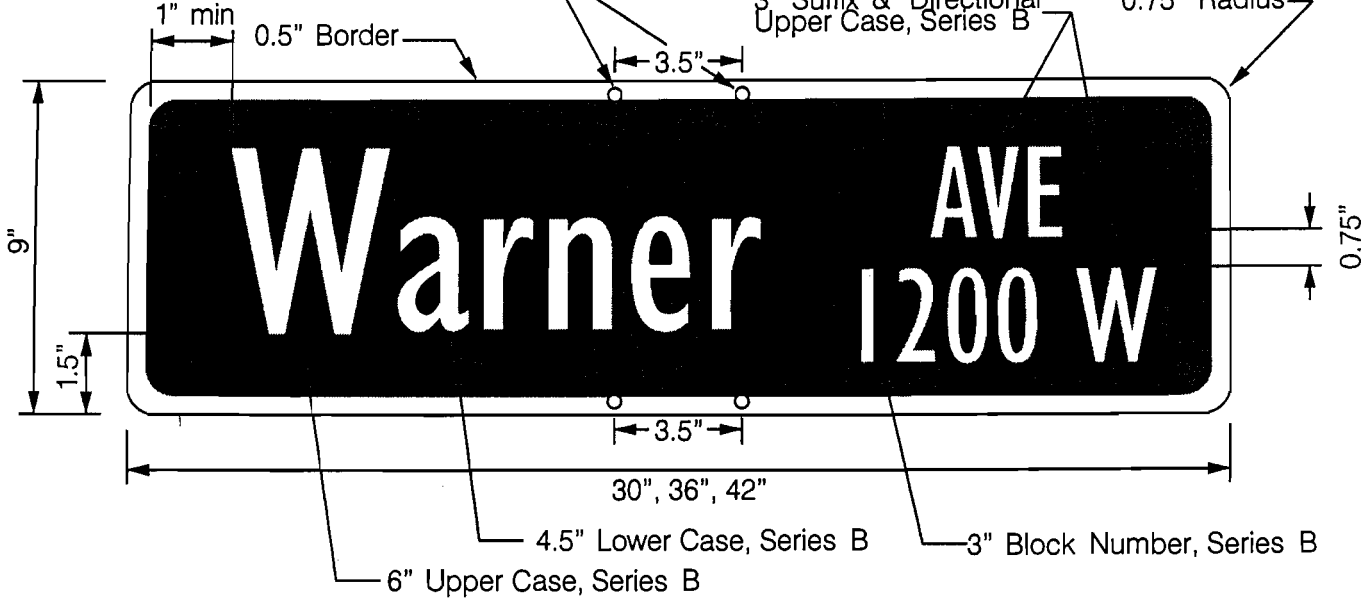

Notes:

1. Color of legends, letters, borders, etc. shall be white on a screened green background. Unless noted otherwise, same message shall be on both sides of the sign.
2. The retroreflective material shall meet or exceed ASTM D 4956 Type IX sheeting requirements.
3. Sign blade shall be flat aluminum and 0.10" thick. Predrilled holes are not required.
4. Minor vertical adjustment may be made to spacing between street name and border to accommodate letters g, j, p, q, and y.
5. Street name should not be abbreviated. Suffix and directional designation should be abbreviated.
6. Exception to the above requires prior approval from the City.

Acceptable Suffix Abbreviations:

Acceptable Directional Abbreviations:

Avenue	AVE	Highway	HWY
Boulevard	BLVD	Lane	LN
Center	CNTR	Loop	LP
Circle	CIR	Parkway	PKWY
Court	CT	Place	PL
Common	COM	Plaza	PLZ
Crossing	XING	Road	RD
Drive	DR	Street	ST
Expressway	EXPWY	Terrace	TER
Freeway	FRWY	Trail	TR
Glen	GLN	Way	WY

North	N
South	S
East	E
West	W
Northwest	NW
Northeast	NE
Southwest	SW
Southeast	SE

APPROVED:

DATE: 8-5-08

○ CITY OF SANTA ANA ○



CITY ENGINEER

PUBLIC WORKS AGENCY

DATE	RC	REVISION
7/23/08	RC	ADDED HOLES.

STREET NAME SIGN (SNS)

STD. PLAN NUMBER
1503