


ATTACH FILTER FABRIC  
SECURELY TO 2X4 WOOD  
FRAME, OVERLAPPING  
FABRIC TO NEXT STAKE

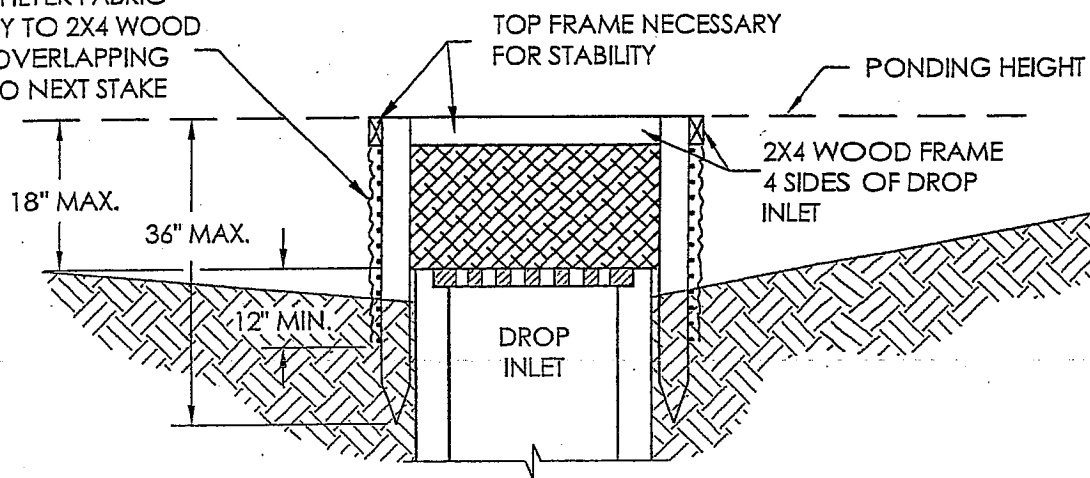

SECTION A-A

NOTES:

1. DROP INLET SEDIMENT BARRIERS ARE TO BE USED FOR SMALL, NEARLY LEVEL DRAINAGE AREAS. (LESS THAN 5%.)
2. USE 2X4 WOOD OR EQUIVALENT METAL STAKES, 3' MINIMUM LENGTH.
3. INSTALL 2X4 WOOD TOP FRAME TO INSURE STABILITY.
4. THE TOP OF THE FRAME (PONDING HEIGHT), MUST BE WELL BELOW THE GROUND ELEVATION DOWNSLOPE TO PREVENT RUNOFF FROM BY-PASSING THE INLET. A TEMPORARY DIKE MAY BE NECESSARY ON THE DOWNSLOPE SIDE OF THE STRUCTURE.



CITY OF WARR ACRES

CONSTRUCTION SITE RUNOFF  
STANDARD DETAILS

SILT FENCE DROP  
INLET SEDIMENT BARRIER

REVISION DATE: MARCH 2009

STORM SEWER: EC-09

PAGE NO. 9