




PRINCIPAL FEATURES



Heavy Duty Grates

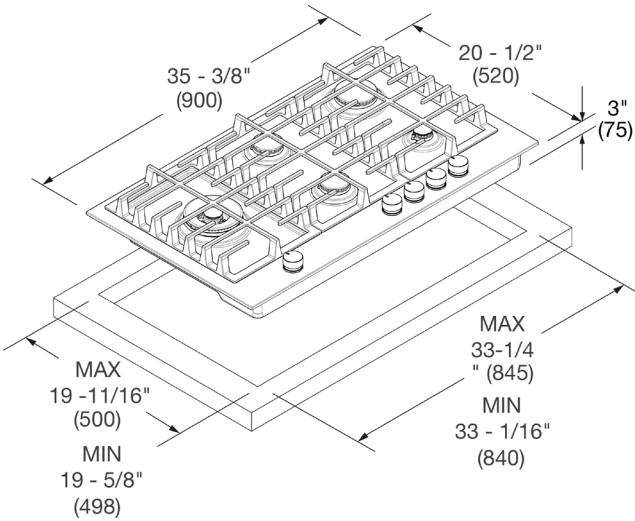

Continuous Grate Surface



Dual-Flame Burner



Automatic Reignition System



Brass Burners



Americans with Disabilities Act †

INCLUDED ACCESORIES

- 41091256
 - 49000100544
- Installation Kit

LP Conversion Kit

OPTIONAL ACCESORIES

- BFMWOK
 - BFMSIM
- Wok ring

Simmer plate

DESCRIPTION

The 36" gas cooktop blends sleek design with robust performance. Featuring brass burners and a unique European-inspired burner layout, including an offset wok burner for versatile cooking options. Its modern look suits any kitchen, while durable cast iron grates provide a sturdy, seamless surface that's easy to clean. The thoughtful burner design allows for smooth pan movement and efficient multitasking, with the added safety of automatic re-ignition. Built for discerning cooks, this cooktop delivers flexibility and precision, making every meal an enjoyable experience from start to finish.

FEATURES

- 5 gas burners with 1 dual-flame burner (Left)
- Polished Brass burners
- Automatic re-ignition system
- Heavy-duty continuous cast iron grates
- Elegant brushed stainless steel cook top base
- Convertible to Liquid Propane

*To achieve full ADA compliance, please consult the current ADA requirements for product installation instructions.

MODEL CODE	36" GAS COOKTOP - BKCTSS36MAST		
GENERAL DETAILS			
Finish	Brushed Stainless Steel		
Control Type	Knobs		
Fuel Type	Gas (NG or LP)		
Heavy-Duty Cast Iron Grates	3		
Cooking Zones	5		
Sealed Burners	Yes		
DIMENSIONS / WEIGHT			
Product Width, in. (mm)	35-3/8	(900)	
Product Height, in. (mm)	5-1/4	(132)	
Product Depth, in. (mm)	20-1/2	(520)	
Cutout Width (min-max), in. (mm)	33-1/16 - 33-1/4	(840 - 845)	
Cutout Height (min), in. (mm)	3-3/8	(86)	
Cutout Depth (min-max), in. (mm)	19-5/8 - 19-11/16	(498 - 500)	
Net Weight, lbs. (kg)	40	(18)	
POWER / RATINGS (120 V, 60 Hz)			
Power (min-max)(Left)	850 BTU/h (250 W) - 20000 BTU/h (5865 W)		
Power (min-max)(Front Center)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)		
Power (min-max)(Front-R)	1000 BTU/h (295 W) - 4000 BTU/h (1175 W)		
Power (min-max)(Rear-Center)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)		
Power (min-max)(Rear-R)	2200 BTU/h (645 W) - 12000 BTU/h (3520 W)		
TECHNICAL DETAILS			
Amperage Rating	0.1 A		
Maximum Power	52000 BTU/h (15295 W)		
Power Cable	3 Prong Nema 5 - 15P		
Power Cable Length, in. (mm)	51	(1300)	
Electrical Circuit	120 V - 60 Hz - 15 A		
LP Kit Included	Yes		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French / Spanish		
WARRANTY			
Limited Warranty	Parts and Labor (2-year)		