

A tradition of innovation since 1966

DURATECH[®] **model 2009**

[industrial tub grinder]

 **DURATECH**[®]



DURATECH....*Clearing the way for a better tomorrow.*

Made to grind or regrind, the DuraTech 2009 series of industrial tub grinders are the most economical grinders on the market. With a CAT C9 325 hp (242.4kw) Tier III diesel engine, a self adjusting HPTO microprocessor controlled clutch, enclosed engine compartment with a self cleaning air intake system, it's efficient and affordable. Plus it's available with a pintle or fifth wheel hitch and as a Track powered unit for those hard to get to grinding sites.

The DuraTech 2009 industrial tub grinders are built to grind and built to last.

features...

FEATURE



- 40" (101.6 cm) Rotor Mounted on 4 1/2" (11.43 cm) Shaft with 3 1/2" (8.89 cm) Oil Bath Bearings
- 18 Fixed and 36 Swinging Hammers
- Dynamically Balanced 1" (2.54 cm) Thick Screens in Various Sizes

FEATURE



- PT-TECH HPTO-12 Clutch
- Self Adjusting
- Built in Torque Limiter and Brake
- Microprocessor Controlled
- Superior Protection for Engine and Drive Line

FEATURE



- 325 HP (242.4 kw) C9 Caterpillar Electronic Diesel Engine
- Reliable CAT service
- Meets EPA Tier III Standards
- Lowest Decibel Reading in its class
- Enclosed Engine Protects Engine from Grinding Debris
- Easy Access to Engine

FEATURE



- Enclosed engine compartment with self cleaning air intake system.
- The enclosed engine compartment reduces engine noise and reduces maintenance
- Allows easy access to the engine from both sides.
- The self cleaning air intake system provides constant clean air to the radiator and the engine.

In a class all by itself...




24" (60.96 cm) wide top drive 21' 6" (6.55 m) stacking conveyor allows the operator to load material into a truck or into a 16' (4.88 m) pile. The optional magnetic roller and aluminum chute removes metal from the finished product.



The 2009T offers a compact 24" (60.96cm) x 11' 6" (3.5m) conveyor. The 24" x 21' 6" (6.55m) conveyor (above) is optional.

features...

FEATURE

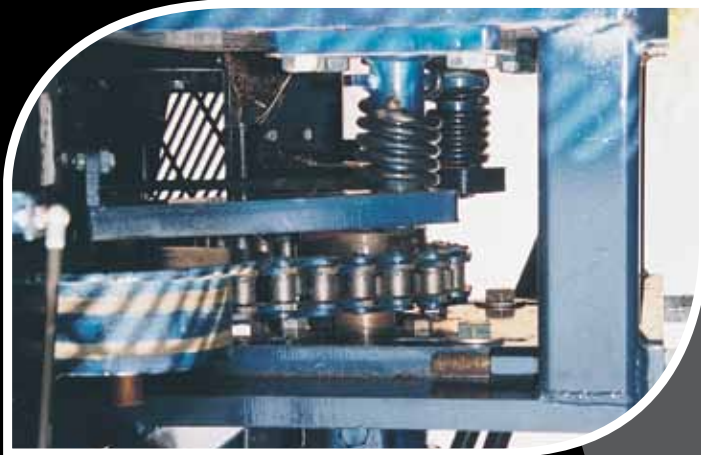

- Single drive orbit motor drives the tub
- Governor controlled tub speed
- Heavy duty 120H drive chain
- Spring adjustable chain tension
- Continuous chain sprocket around tub

FEATURE



Remote control is standard on 2009T

- Command console with optional remote control
- Master engine controls, gauges and shutoff
- Electric over hydraulic controls for: clutch, governor and stacking conveyor
- Optional 6 function remote controls: engine stop, tub rotation, stacking conveyor and optional tub cover

FEATURE




- 30" (76.2 cm) wide belly belt carries the finished product to the stacking conveyor
- Impact resistant belt


FEATURE



- Optional tub cover controls flying debris
- The Tub Cover is operated by remote control

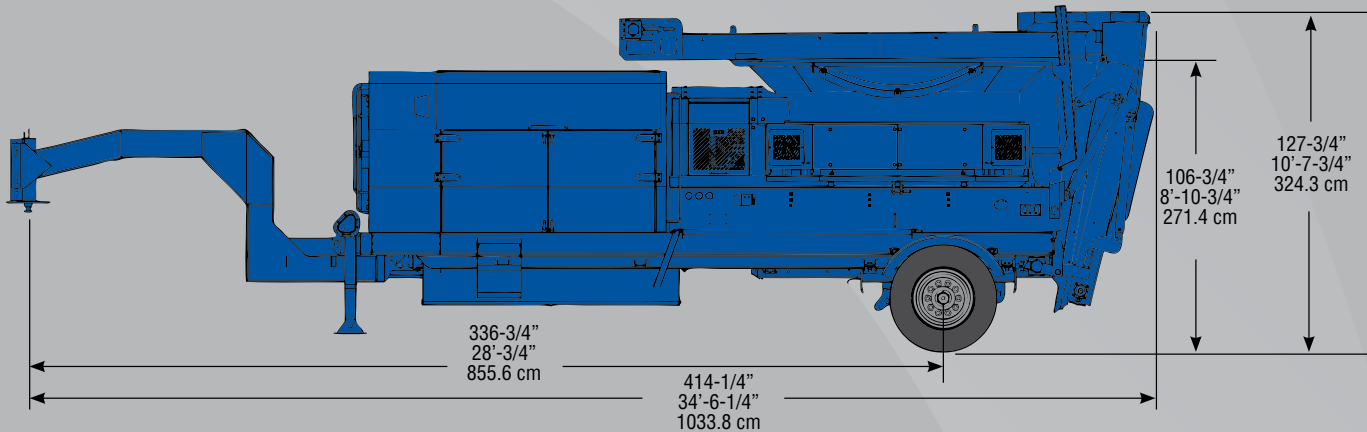

model 2009F (Fifth Wheel Hitch)

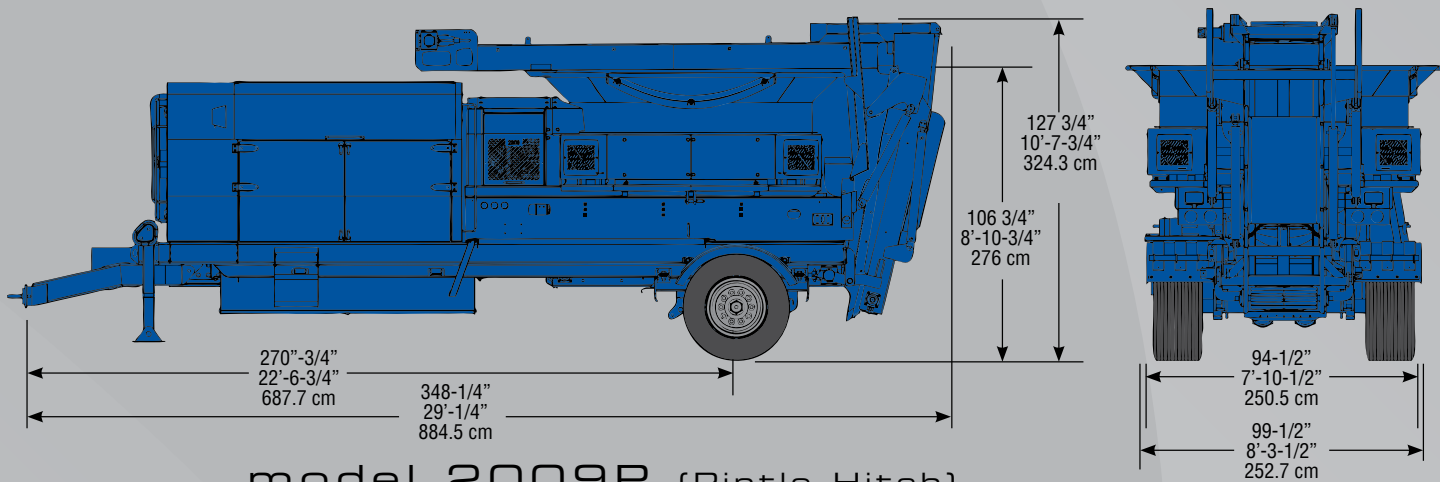

model 2009P (Pintle Hitch)

SPECIFICATIONS [model 2009]

Weight (Pintle Hitch)	24,200lbs (10,976.94 kg)	Tub Floor	1/4" (.635 cm) Thick
Transport Width	8' 3-1/2" (2.52 m)	Tub Drive	Hydraulic Orbit Motor
Length (Pintle Hitch)	29' 1/4" (8.84 m)	Discharge Conveyor	21' 6" (6.55 m) Top Drive - 24" (60.96 cm) Wide
Axle	18,500 lbs (8,409.6kg) Single Axle	Belly Conveyor	30" (76.2 cm) Wide with a V Cleat
Tongue Weight (Pintle Hitch)	5,700 lbs (2,585.5 kg)	Tub Speed Sensor	Electronic Self Governing
Brakes	Air	Safety Switches	Safety Shutdown
Electrical	12 Volt	Hammers	18 Fixed Single Bolt Hammers, 36 Swinging Hammers
Tires	(2) 455/50R22.5 Super Singles	Hammermill Opening	41" x 25" (104.14 cm x 63.5 cm)
Fuel Capacity	100 Gallons (378.5 L)	Length	40" (101.6 cm)
Hydraulic Oil Capacity	50 Gallons (189.3 L)	Cylinder Plates	16" (40.64 cm) in Diameter 1-1/2" (3.81 cm) Thick
Lights	Tail, Clearance and Directional	Cylinder Shaft	4-1/2" (11.43 cm) Stress Proof Steel
Engine	Caterpillar C9 325 HP (242.4 kw) Tier III Electronic Diesel	Hammermill Drive	Direct Drive with Built in Torque Limiter
Clutch	PT Tech HPTO-12	Bearings	3-1/2" (8.89 cm) Pillow Block Bearings
Governor	Electro-Hydraulic Sensing	Hammer Rods	1-1/2" (3.81 cm) Diameter
Tub Width	9' 6-3/8" (2.91 m) at Flare	Screens	1" (2.54 cm) Thick Split Screens
Depth	3' 4" (1.02 m)	Transport Height w/ Tub Cover	129.85 in (329.82 cm)
Tub Diameter at Base	7' 6" (2.27 m)		
Tub Wall	3/16" (.476 cm) Thick		

Illustrations, specifications, and descriptions contained herein were accurate at the time of publication, but are subject to change without notice. Illustrations may include optional equipment and accessories and may not include all standard equipment.



FEATURE

CAT 312 Track system
20" (50.8cm) x 11'6" (3.5m)





FEATURE

Compact Stacking Conveyor



FEATURE

Remote control handles most
grinder functions

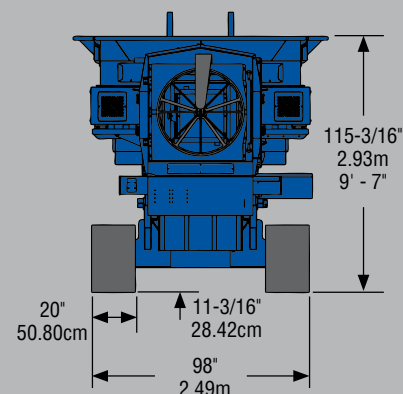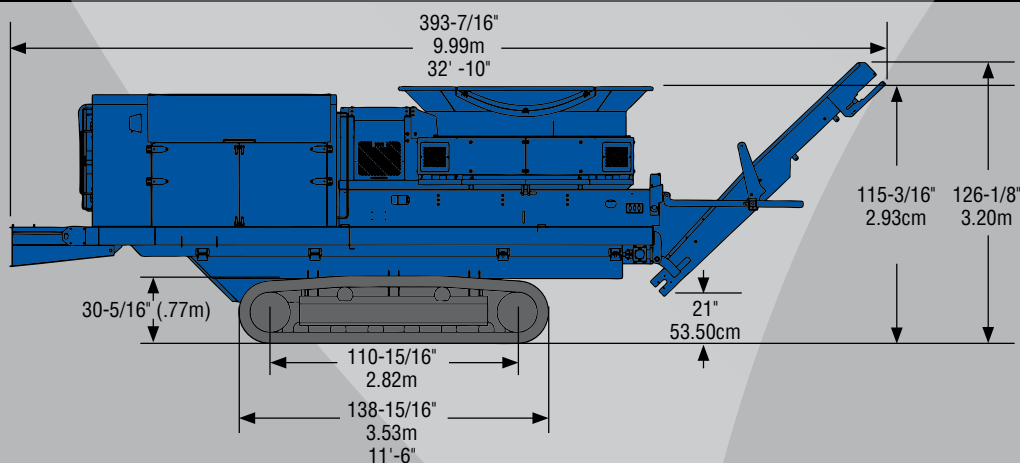

SPECIFICATIONS [model 2009T]

Weight approximately	33,960 lbs (15,404 kg)
Transport Width	8' 6" (2.59 m)
Length	32' 10" (9.99 m)
Ground Clearance	11" (27.94cm)
Incline Grade	Tracks will Climb 40% Incline Grade
Track System	312 CAT Tracks with 500mm Shoes 20" (50.8cm) w x 11' 6" (3.5m)
Clutch	PT Tech HPTO-12 Clutch
Electrical	24 Volt
Fuel Capacity	100 Gallons (378.5 Liters)
Hydraulic Oil Capacity	50 Gallons (189.3 Liters)
Tub Width	9' 6-3/8" (2.91 m) at Flare
Tub Depth	40" (1.02 m)
Tub Diameter at Base	7' 6" (2.27 m)
Tub Wall	3/16" (.476 cm) Thick
Tub Floor	1/4" (.635 cm) Thick
Tub Drive	Hydraulic Orbit Motor

Tub Speed Sensor	Electronic Self Governing
Tub Governor	Electro-Hydraulic Sensing
Belly Conveyor	30" (76.2 cm) Wide with a V Cleave
Stacking Conveyor	11'6" (3.5m) L x 24" (60.96cm) W x 8" (20.3cm) D
Safety Switches	Safety Shutdown
Hammermill Opening	41" x 25" (104.14 cm x 63.5 cm)
Rotor Length	40" (101.6 cm)
Rotor Plates	16" (40.64 cm) in Diameter 1" (2.54 cm) Thick
Hammer Rods	1-1/2" (3.43 cm) Diameter
Rotor - Shaft Diameter	6" (15.24 cm) Stress Proof Steel
Bearings	3-1/2" (8.89 cm) Pillow Block
Bearings	
Hammers	18 Fixed Single Bolt, or 36 Swinging Hammers
Hammermill Drive	Direct Drive thru HPTO Clutch
Screens	1" (2.54 cm) Thick Split Screens

Illustrations, specifications, and descriptions contained herein were accurate at the time of publication, but are subject to change without notice.
Illustrations may include optional equipment and accessories and may not include all standard equipment.

SOLD AND SERVICED BY:

