

FIONA



FLOORING



LVT


LVT Peel and stick
Length : 1914.4mm
Width : 152.4 mm
Thickness : 2mm / 3mm
Wear layer : 0.2mm / 0.3mm

LVT Dry back
Length : 1914.4mm
Width : 152.4 mm
Thickness : 2mm / 3mm
Wear layer : 0.2mm / 0.3mm

LVT is designed to replicate hard surface flooring materials such as stone or wood, yet provide many more practical benefits. Available in planks or tiles, LVT uses a realistic photographic print film and a clear vinyl layer that opens up a wide variety of design concepts.


Advantages of LVT Dry back

- + Durable, long-lasting performance
- + Easy maintenance
- + Natural looks and feel
- + Competitive price

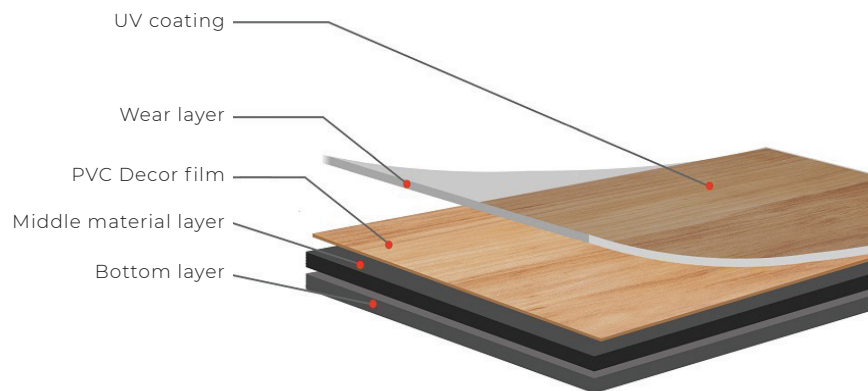

Advantages of LVT Peel and Stick

- + Durable, long-lasting performance
- + DIY Installation
- + Easy maintenance
- + Natural looks and feel
- + Competitive price

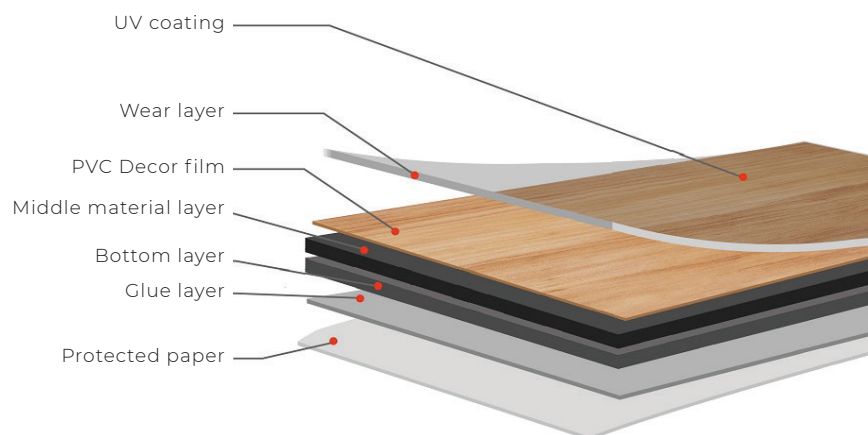

LVT DRY BACK & PEEL AND STICK

TECHNICAL DATA SHEET

Product Specification	Test Standard	Test Result
Surface treatment		UV Coating
Peeling strength of layers	EN 431	55
Castor chair	EN 425	Pass
Fire resistance	EN 13501-1	Bfl - s1
Chemical resistance	EN 423	OK
Residual indentation	EN 433	0,07
Underfloor heating	EN 12524	0.096 W/(m.k)
Slip resistance	DIN 51130 EN 13893	DS ≥ 0.3
Abrasion resistance	EN 660-1	Dynamic Coefficient of Friction Class DS
Dimensional stability	EN 434	0.048 long edge 0.012 short edge
Sound reduction	EN ISO 717 - 2 (Δ Lw)	2 dB
Light Fastness	ISO 105 - B02	15
Toxicity	EN 71	Not toxic. Does not contain heavy metal and formaldehyde
Warranty		10 years
Formaldehyde emission	EN 717-1	E1...≤0.124 mg/m ³
Anti static		YES
Abrasion Class	AC3 ≥ 2000	4000


DESIGN FOR LVT AND SPC FLOOR




SCG01



SCG04

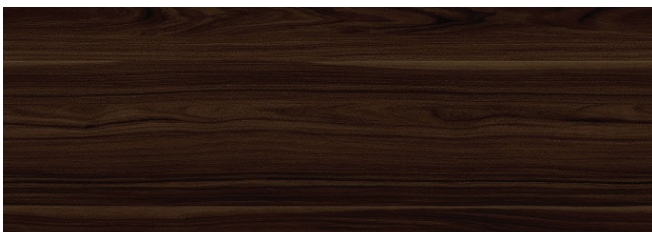

SCG02

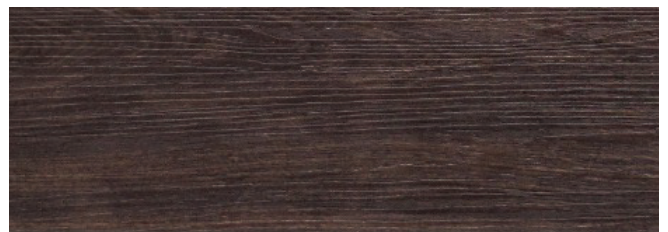

SCG05



SCG03



SCG06

DESIGN FOR LVT AND SPC FLOOR



SCG07



SCG10



SCG08



SCG11



SCG09



SCG12

FLOORING



100%
RECYCLABLE



ANTI
BACTERIA



ANTI
TERMITE



PROVIDE
COMFORTABLE
FEELING



SCATCH
RESISTANCE



WATER
RESISTANCE

