

FIONA



FLOORING




SHOCK
ABSORP-
TION
FLOOR

Shock absorption floor is Heterogeneous vinyl which is a multi-layer vinyl with a printed top layer providing endless design possibilities, lasting performance and low maintenance cost.

Advantages of Shock absorption floor

- + Reduce the severity of injuries from accidents caused by falling to the ground
- + Sound absorption
- + Suitable for Elder care / Children segment
- + Natural looks and feel

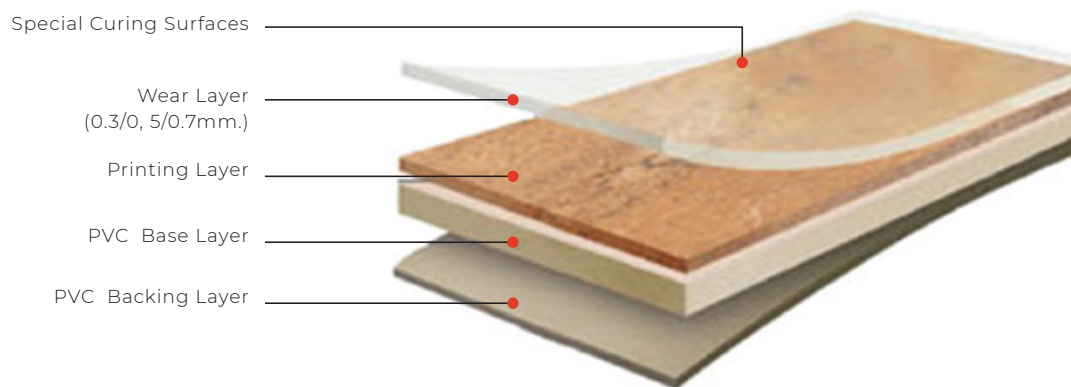

SHOCK ABSORPTION FLOOR

TECHNICAL DATA SHEET

Properties	Standard	Requirement	Result
Total thickness	EN ISO 24346	-	2.95 mm
Hardness (shore A)	ASTM D2240	-	88
Density	EN ISO 23997	-	20 mil (0.5 mm)
Anti-slip resistance	DIN 51130	-	Dry test : 54 (R12) Wet test : 32 (R10)
Dimensional stability to heat	EN 434	< 0.25 %	0.09 %
Curling after expose to heat	EN 434	< 2 mm	0.05 mm
Dimensional variations after change in relative humidity	En 13329 : Annex C	< 0.9 mm	0.05 mm
Abrasion resistance	En 660-2	Volume loss < 2.0 mm ³ , T group Abrasion class = 23, 31	0.03 mm ³ , T group 23, 31
Color fastness	Internal - QUV 200 h	Delta E < 9.95	6.65

SHOCK ABSORPTION FLOOR



SAF001



SAF002



SAF003



SAF004



SAF005



SAF006

SHOCK ABSORPTION FLOOR




SAF007




SAF008




SAF009

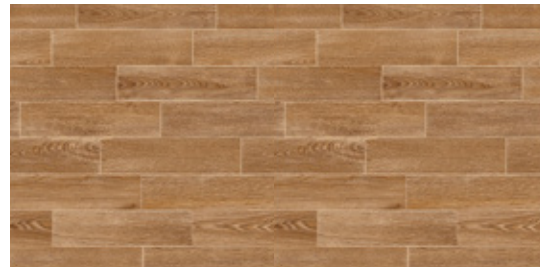

SAF010

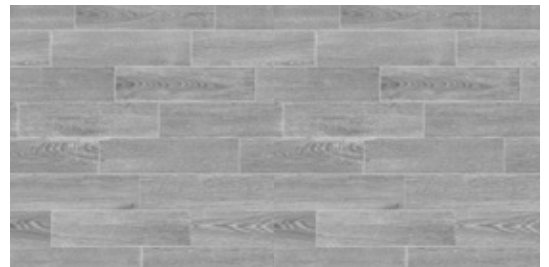

SAF011

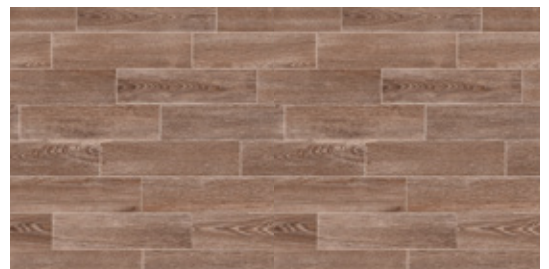

SAF012

SHOCK ABSORPTION FLOOR



SAF013



SAF014



SAF015



SAF016



SAF017



SAF018

FLOORING



100%
RECYCLABLE



ANTI
BACTERIA



ANTI
TERMITE



PROVIDE
COMFORTABLE
FEELING



SCATCH
RESISTANCE



WATER
RESISTANCE

