


# Decorative Kraft Paper

## Application

It is mainly used for laminating manmade board (HDF, MDF, Multiply board, etc.), and has better covering ability. The product is widely used in floor, furniture, painting paper, overlay paper, backing paper, HP fire-proof board, etc.

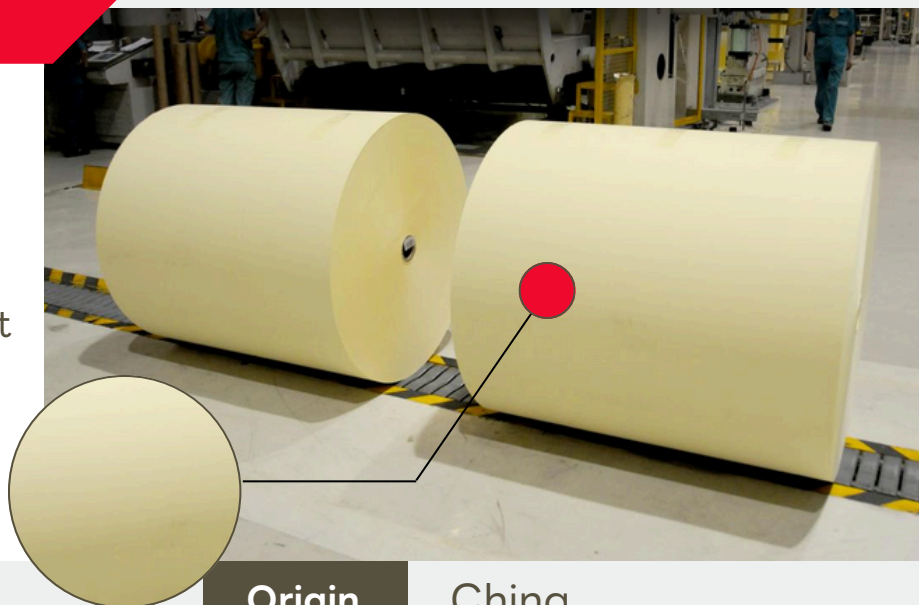

**Grade** 70 gsm | 80gsm

**Origin** China

## Typical Specification

### Krono 0114-80

检测项目 List of controls	单位 Units	标准 Target	低限 LCL	高限 UCL
定量 Basis Weight	g/m <sup>2</sup>	80	78	82
伸缩率 (量) Hygroexpansivity CD/MD/diagonal	%/mm/mm	参考客户要求生产		
正面平滑度 Smoothness Bekk	s	/	/	100
葛尔来透气度 Gurley Porosity	s/100ml	21	18	24
纵向抗张强度 Tensile Strength MD/dry	N/15mm	32	27	/
湿抗张强度 Tensile Strength MD/wet	N/15mm	6.5	6.0	/
吸水高度 Water absorption property	mm/15min	27	23	/
PH value hot-extraction		7.5	7.0	8.0
灰分 Ash content	%	40	39	41

# Decorative Kraft Paper

## 0183 - 70

检测项目 List of controls	单位 Units	标准 Target	低限 LCL	高限 UCL
定量 Basis Weight	g/m <sup>2</sup>	70	68	72
伸缩率 (量) Hygroexpansivity CD/MD/diagonal	%/mm/mm	参照客户要求生产		
正面平滑度 Smoothness Bekk	s	190	170	210
葛尔来透气度 Gurley Porosity	s/100ml	22	19	25
纵向抗张强度 Tensile Strength MD/dry	N/15mm	29	27	/
湿抗张强度 Tensile Strength MD/wet	N/15mm	6.5	6.0	/
吸水高度 Water absorption property	mm/15min	27	25	/
PH value hot-extraction		7.5	7.0	8.0
灰分 Ash content	%	36	35	37

## 0104 - 70

检测项目 List of controls	单位 Units	标准 Target	低限 LCL	高限 UCL
定量 Basis Weight	g/m <sup>2</sup>	70	68	72
伸缩率 (量) Hygroexpansivity CD/MD/diagonal	%/mm/mm	参照客户要求生产		
正面平滑度 Smoothness Bekk	s	190	170	210
葛尔来透气度 Gurley Porosity	s/100ml	23	20	26
纵向抗张强度 Tensile Strength MD/dry	N/15mm	33	31	/
湿抗张强度 Tensile Strength MD/wet	N/15mm	6.5	6.0	/
吸水高度 Water absorption property	mm/15min	23	21	/
PH value hot-extraction		7.5	7.0	8.0
灰分 Ash content	%	35	34	36

# Decorative Kraft Paper

## 0122 - 80

检测项目 List of controls	单位 Units	标准 Target	低限 LCL	高限 UCL
定量 Basis Weight	g/m <sup>2</sup>	80	78	82
伸缩率 (量) Hygroexpansivity CD/MD/diagonal	%/mm/mm	参照客户要求生产		
正面平滑度 Smoothness Bekk	s	/	/	80
葛尔来透气度 Gurley Porosity	s/100ml	24	21	27
纵向抗张强度 Tensile Strength MD/dry	N/15mm	28	26	/
湿抗张强度 Tensile Strength MD/wet	N/15mm	6.5	6.0	/
吸水高度 Water absorption property	mm/15min	25	23	/
PH value hot-extraction		7.5	7.0	8.0
灰分 Ash content	%	44	43	45