


Saturating Kraft Paper

Application

Saturating kraft paper is mainly used as the basic material for producing high-pressure decorative laminates, which are used in insulation boards, countertop surfaces, and floors.

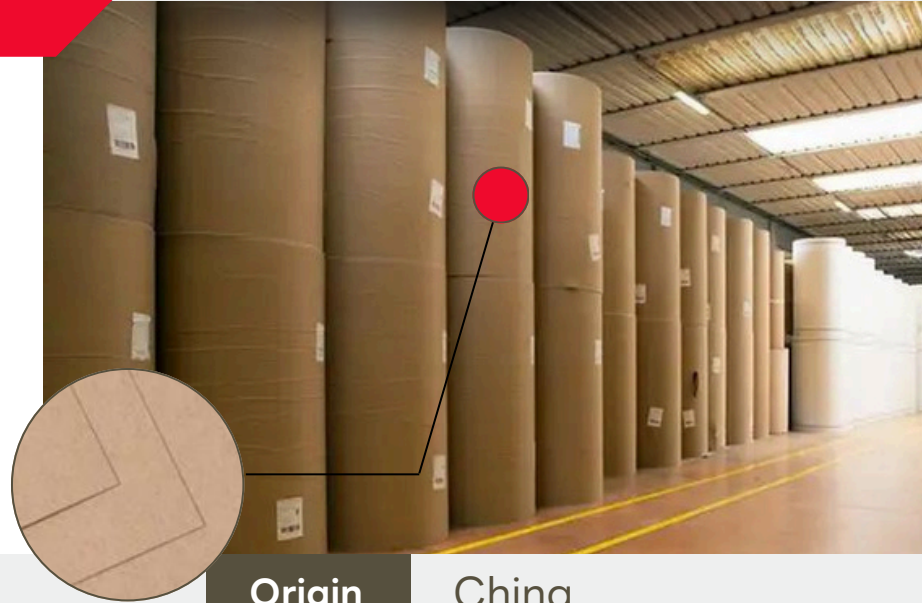

Grade

80 - 200 gsm

Origin

China

Typical Specification

| Items | Unit | Parameters |
|---------------------------------|------------------|-------------|
| Basis weight | g/m ² | 80 - 200gsm |
| Tolerance | g/m ² | +6g |
| Height of capillary rise | mm | 30 - 48 |
| Tensile (MD) | m | 300min |
| Moisture | % | 6 - 8 |
| Ash | % | 2 - 4 |
| Porosity | um/(Pa.s) | 10 - 45 |