


**TR5362W**

## Tamper-resistance in a construction grade receptacle – now with Federal Specification listing!

TR5262, TR5362

Tamper-resistant child safety receptacles that conform to 2008 NEC Article 406.11 are now available in construction grade. They offer a UL Federal Specification WC596 listing at an exceptional value. The sturdy mechanical shutter system helps prevent children from inserting foreign objects into the receptacle. Corrosion-resistant plated steel straps, rugged nylon faces, and triple-wipe power contacts combine with tamper-resistant shutters to deliver safe and reliable long-term performance. Screw-pressure-plate back wiring ensures excellent electrical connections and easy installation.

### Features & Benefits

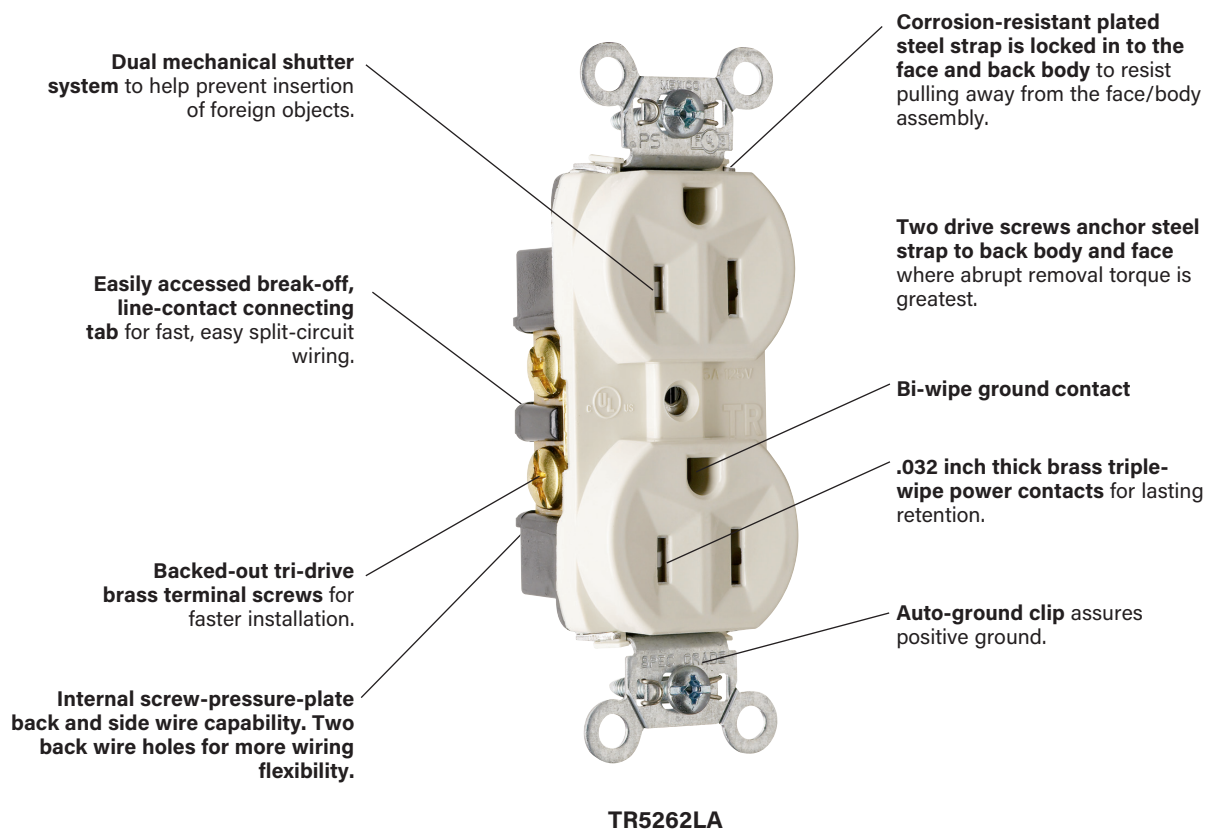

### 3rd Party Compliance



UL Listed, File Number E140596, Standard UL498, Federal Specification WC596,  
CSA/CUL Approved, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

## Technical Specifications

### Performance

#### Electrical

|                            |                                                                                                                              |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Dielectric Voltage         | Withstands 2000V minimum                                                                                                     |
| Maximum Working Voltage    | 125V                                                                                                                         |
| Maximum Continuous Current | TR5262 = 15A<br>TR5362 = 20A                                                                                                 |
| Temperature Rise           | Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current |

#### Mechanical


|                        |                                         |
|------------------------|-----------------------------------------|
| Terminal Accommodation | #14 - #10 AWG copper conductor only     |
| Product Identification | Amperage, Voltage, 3rd Party Compliance |

#### Environmental

|                       |                                                        |
|-----------------------|--------------------------------------------------------|
| Flammability          | UL94 V2                                                |
| Operating Temperature | Maximum continuous +60°C, minimum -40°C without impact |

### Materials

|                           |                                                          |
|---------------------------|----------------------------------------------------------|
| Face                      | Nylon                                                    |
| Back Body                 | PVC                                                      |
| Line Contacts             | .032 Olin 688 Brass                                      |
| Mounting Strap            | .042 Zinc-Plated Steel                                   |
| Ground Contacts           | .040 Olin 688 Brass                                      |
| Pressure Plate            | .080 Steel                                               |
| Tamper-Resistant Shutters | Thermoplastic                                            |
| Terminal Screws           | #8 Tri-Drive Brass<br>(Neutral = Nickel-Plated Steel)    |
| Ground Screw              | #8 Hex Tri-Drive Steel; Zinc Coating with Green Chromate |
| Assembly Drive Screw      | Zinc-Plated Steel                                        |
| Auto-Ground Clip          | Stainless Steel                                          |
| Mounting Screws           | Tri-Drive Steel                                          |

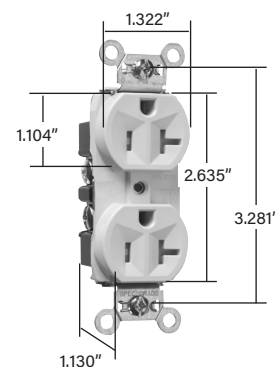

**Dimensions for  
15 & 20 Amp**

### Warranty

1 Year

## Ordering Information

| Catalog<br>Number                     | Ratings |     | Color        | NEMA<br>Config. |
|---------------------------------------|---------|-----|--------------|-----------------|
|                                       | A       | V   |              |                 |
| Duplex Receptacles - Back & Side Wire |         |     |              |                 |
| TR5262I                               | 15      | 125 | Ivory        | 5-15R           |
| TR5262W                               | 15      | 125 | White        | 5-15R           |
| TR5262                                | 15      | 125 | Brown        | 5-15R           |
| TR5262GRY                             | 15      | 125 | Gray         | 5-15R           |
| TR5262BK                              | 15      | 125 | Black        | 5-15R           |
| TR5262RED                             | 15      | 125 | Red          | 5-15R           |
| TR5262LA                              | 15      | 125 | Light Almond | 5-15R           |
| TR5362I                               | 20      | 125 | Ivory        | 5-20R           |
| TR5362W                               | 20      | 125 | White        | 5-20R           |
| TR5362                                | 20      | 125 | Brown        | 5-20R           |
| TR5362GRY                             | 20      | 125 | Gray         | 5-20R           |
| TR5362BK                              | 20      | 125 | Black        | 5-20R           |
| TR5362RED                             | 20      | 125 | Red          | 5-20R           |
| TR5362LA                              | 20      | 125 | Light Almond | 5-20R           |
| TR5362BL                              | 20      | 125 | Blue         | 5-20R           |



**NEMA  
5-15R**



**NEMA  
5-20R**

---

### Also available

- USB Charging Devices
- Hospital Grade Devices
- SPD & Isolated Ground Devices
- PlugTail® Wiring Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

