
ELBOXS







. 660.00	520111	. 250.00
	500MM	



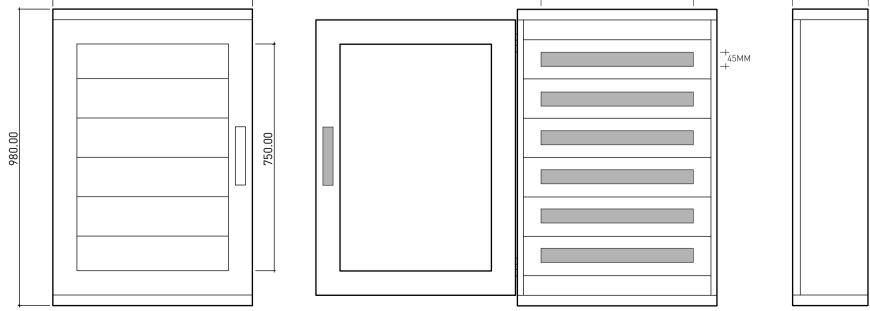

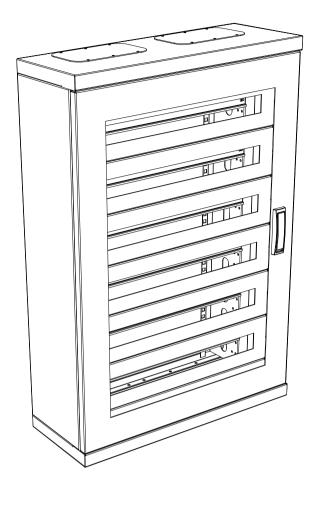

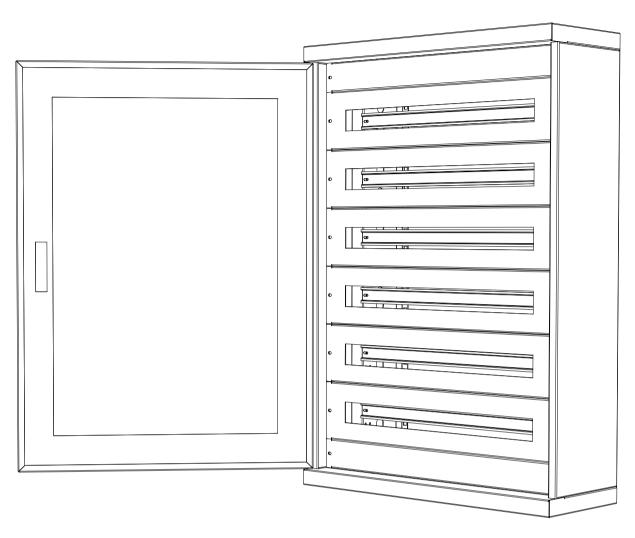

NO.	DESCRIPTION	REQUIREMENT	
1	Material	Cold rolled steel sheet	
2	Surface treatment	Etch primer for box body and door piate;powder coating for outside.	
3	Protection grade	IP30	
4		Box body:2.0mm	
	Plate thickness	Door plate:2.0mm	
		Mounting piate:2.0mm	
5	Ambient temperature	-25°C ~ 45°C	
6	Average temperature (within 24h)	≤35° C	
7	Altitude (installed indoors)	≼2000m	
8	Relative humidity of ambient air	≤50% (40°C)	
9	Inclination (vertical installation)	≤5°	
10	The equipment should be installed in a place where there is no serve vibrition or impac,and where the electrical components are not easily to be corroded.		
11	Rated voltage of main circuit	AC380V	
12	Rated voltage of auxiliary circuit	AC220 AC380	
13	Rated frequency	50Hz	
14	Rated insulation voltage	660V	
15	Rated current	<800A	