

1/18 ASPHALT LATE MODEL SETUP SHEET

Driver : _____ Date: _____
 Track Name: _____ City/State: _____
 Surface: _____ Indoor Outdoor (check one)
 Race: _____ Start: _____ Finish: _____

Left Front

Tire Compound: Std Soft
 Shock O-Ring: Yes No
 Shock Type: Plastic Alum
 Oil/Grease: _____
 Spring: Soft Med Hard
 Spring Preload: _____
 Caster: _____
 Corner Weight: _____
 Chassis Height: _____

Electronics


Servo: _____
 ESC: _____
 Tx: _____
 Rx: _____
 Battery: 4 Cell 5 Cell Other
 Motor: 8700kv 10,000kv

Left Rear

Tire Compound: Std Soft
 Shock O-Ring: Yes No
 Shock Type: Plastic Alum
 Oil/Grease: _____
 Spring: Soft Med Hard
 Spring Preload: _____
 Caster: _____
 Corner Weight: _____
 Chassis Height: _____

Front

Toe: _____
 Caster: _____
 Total Car Weight: _____

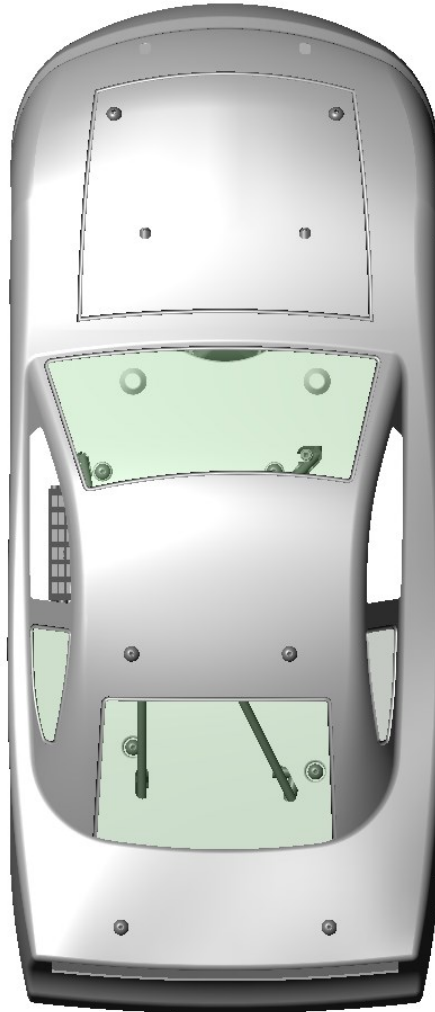

Rear

Other: _____

Right Front

Tire Compound: Std Soft
 Shock O-Ring: Yes No
 Shock Type: Plastic Alum
 Oil/Grease: _____
 Spring: Soft Med Hard
 Spring Preload: _____
 Caster: _____
 Corner Weight: _____
 Chassis Height: _____

Misc

Servo Arm Hole: Upr Lwr
 Dual Rate Amount: _____
 Motor Heatsink: Yes No
 Other: _____

Right Rear

Tire Compound: Std Soft
 Shock O-Ring: Yes No
 Shock Type: Plastic Alum
 Oil/Grease: _____
 Spring: Soft Med Hard
 Spring Preload: _____
 Caster: _____
 Corner Weight: _____
 Chassis Height: _____

Notes: _____
