


PATRIOT

BY CUSTOMWORKS

INSTRUCTIONS

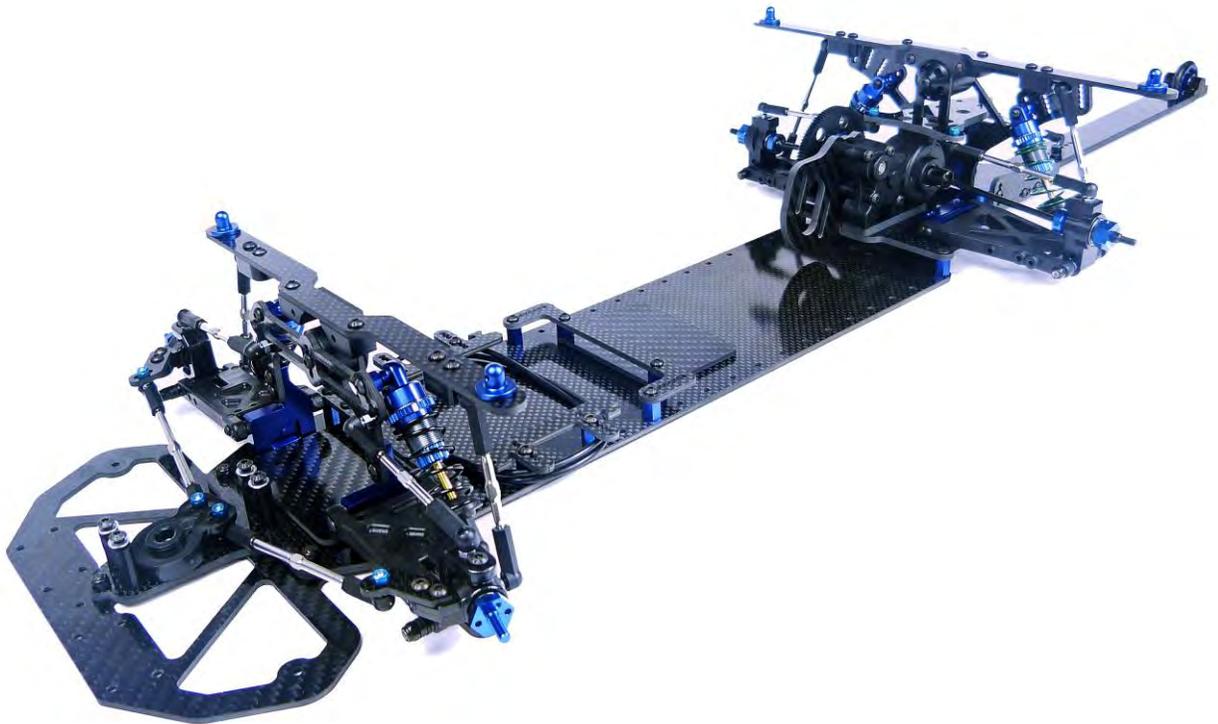

#0852 PATRIOT V2 Drag Racing Kit



Manufactured by:
Custom Works RC Products
760-B Crosspoint Drive
Denver, NC 28037
www.customworksrc.com



Thank you for purchasing the Custom Works Patriot! The Patriot drag racing platform is the culmination of over a year of testing and development by the Custom Works team **at America's largest "no prep" drag race events.**

This kit includes most of the parts required for the build. The following additional equipment must be added to complete the car.

- Surface transmitter and receiver (minimum 2 channel.)
- Drag specific electronic speed control
- 540 size brushless motor
- Pinion gear (48 pitch, appropriate size for motor)
- 2S drag racing LiPo battery
- Low Profile steering servo (**1" or 26mm case height** maximum to fit mounts)
- Front and rear wheels and tires
- Silicone shock oil (60 weight recommended)
- Lexan **"No Prep"** style body
- Lexan paint and/or vinyl wrap for body

Tools

The following tools are provided in the kit and will get you started. We suggest that you purchase higher quality tools for future maintenance.

- .050 Allen key
- 1.5mm Allen key
- 1/16 Allen key
- 5/64 or 2mm Allen key
- Turnbuckle & 3/16 wrench

Additional tools

These tools are recommended for the build and may be required to complete.

- Curved scissors
- Needle nose pliers
- Hobby knife
- Blue thread-lock
- Assorted sandpaper
- 7mm hex driver

Building tips

Parts are made with tight tolerance and held to the side of a "snug" fit as wear is expected over time. Try as we may, occasionally a burr may remain in a part and fit more tightly than desired. It is ok to use 400 Grit Sandpaper or a .125" drill to SLOWLY relieve a part from time to time. Suspension components should always pivot and swivel freely but without too much slop.



A lite to medium strength (usually the blue variety) thread locking fluid is suggested for all parts where metal screws thread into other metal parts. This will keep the screws from vibrating loose during operation and still allow the screw to be removed if needed. Remember it only takes a very small amount of thread-lock to secure the screw.

Do NOT use power screwdrivers to drive screws into parts. The fast rotation speed can melt and strip plastic parts or cross-thread into the aluminum parts.



Lightly sand the edges of the carbon fiber pieces using a medium grade sandpaper to avoid splinters. A thin bead of Super Glue can be used to seal the edges of the carbon fiber for more protection against chips and splinters.

Note: Many of the plastic parts in this kit have holes sized to work with our older #4-40 screws as well as the newer M3 screws. The M3 screws/ballstuds in this kit may sometimes require a little extra force to get thread started in the plastic parts. **Most holes can be carefully drilled slightly larger with a .100" or 2.5mm drill bit** if you wish to have a more precise fit when first threading in the M3 screws and ballstuds.



Front Suspension Arm Assembly

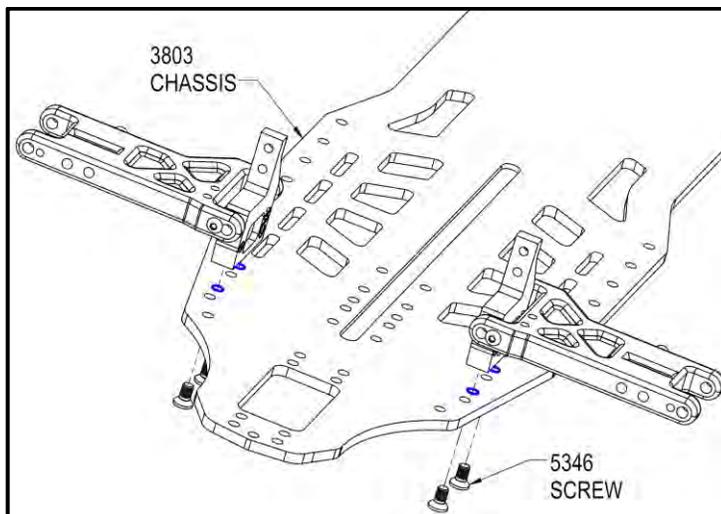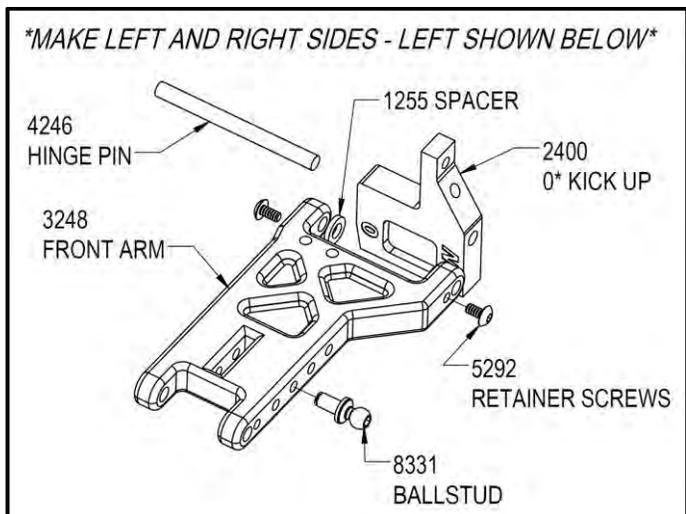



Caster Block Assembly

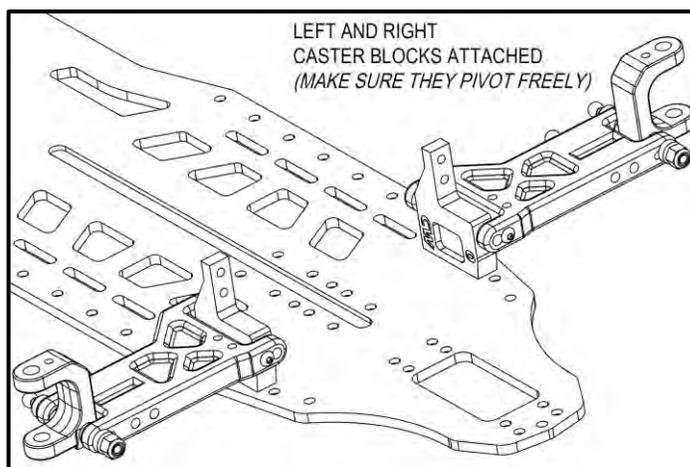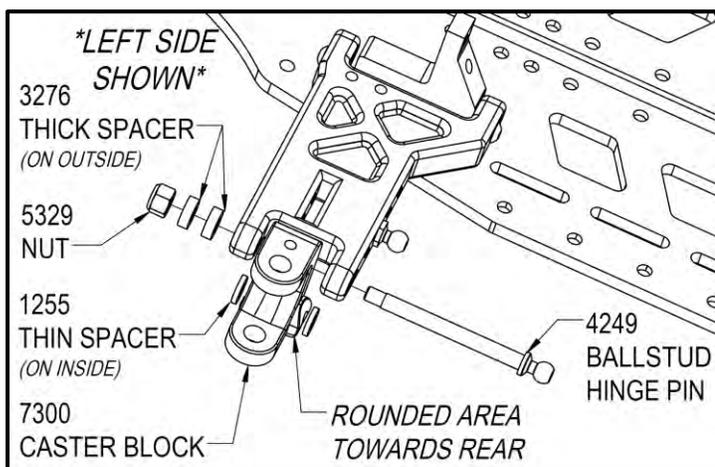



Steering Servo Mounting

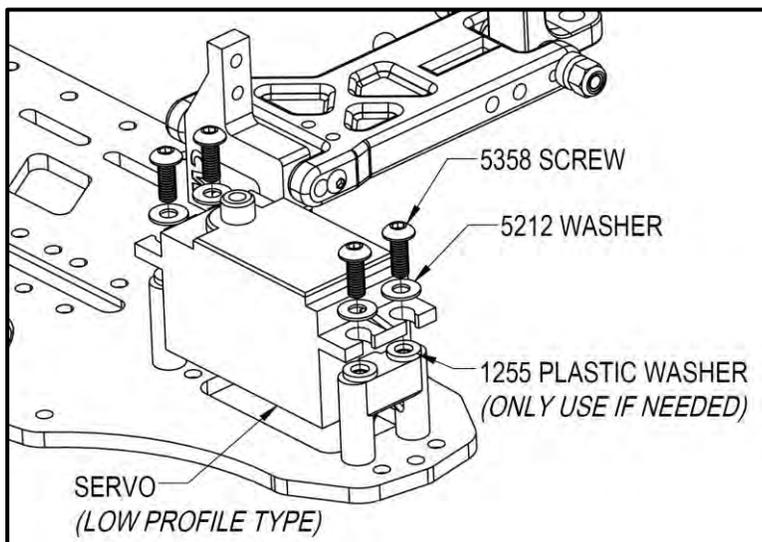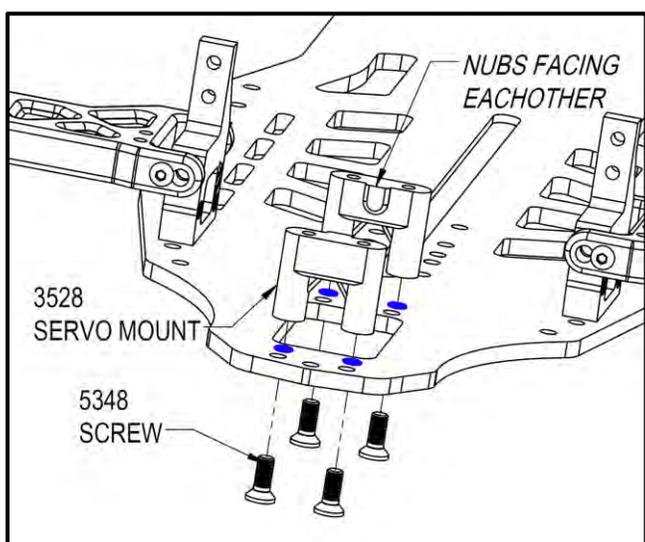


Servo Saver

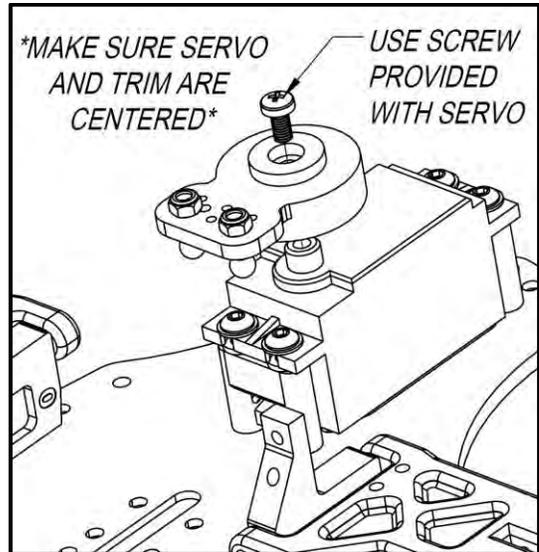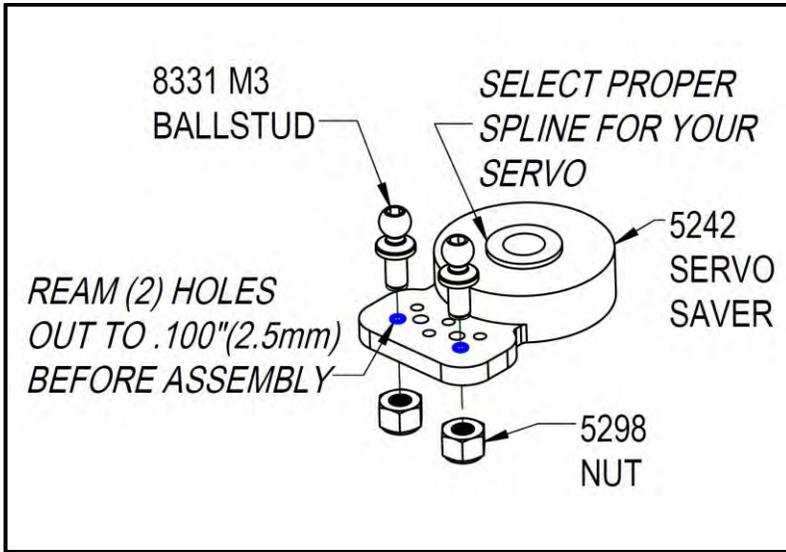



Steering Blocks

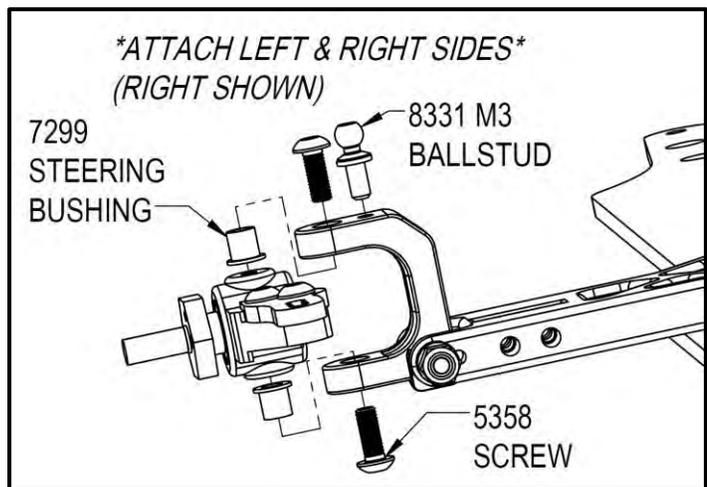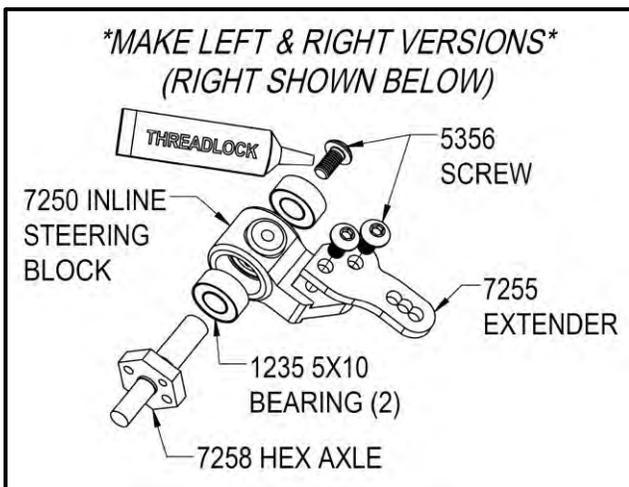


Front Shock Tower Assembly

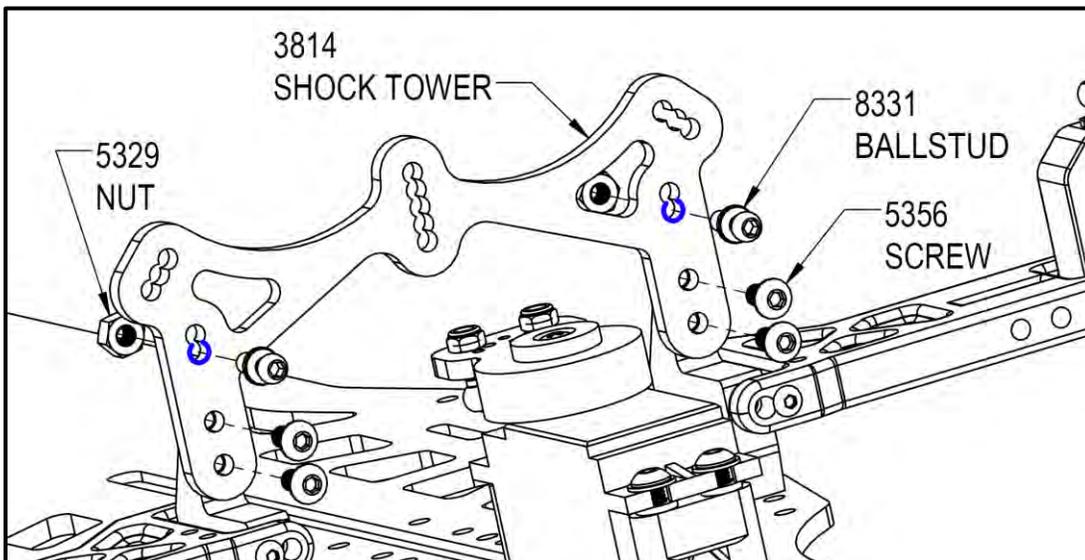



Steering/Front Camber Links

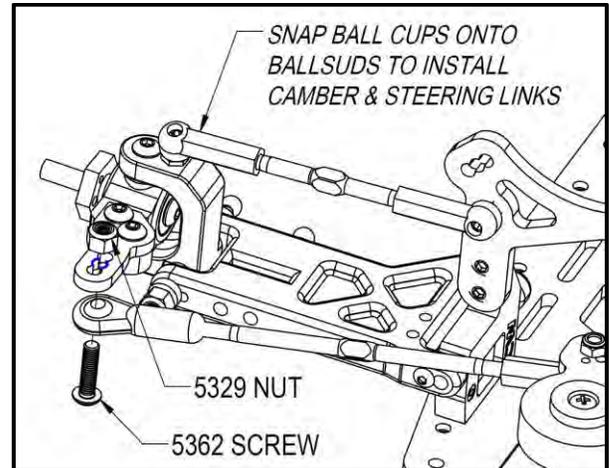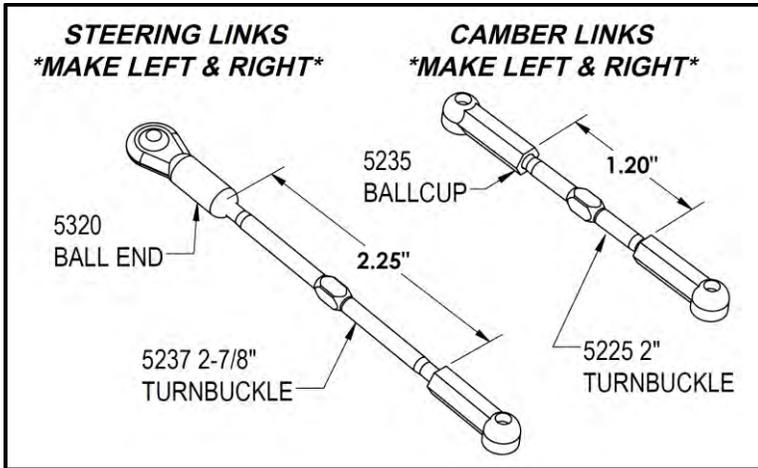



Front Bumper Assembly

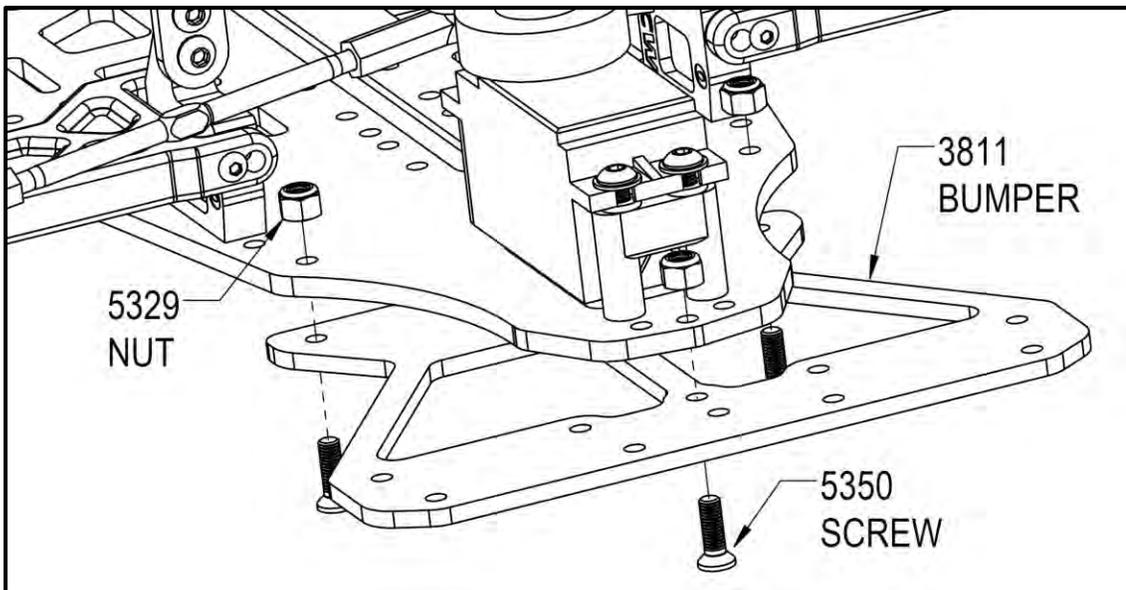

Rear Suspension Arm Assembly

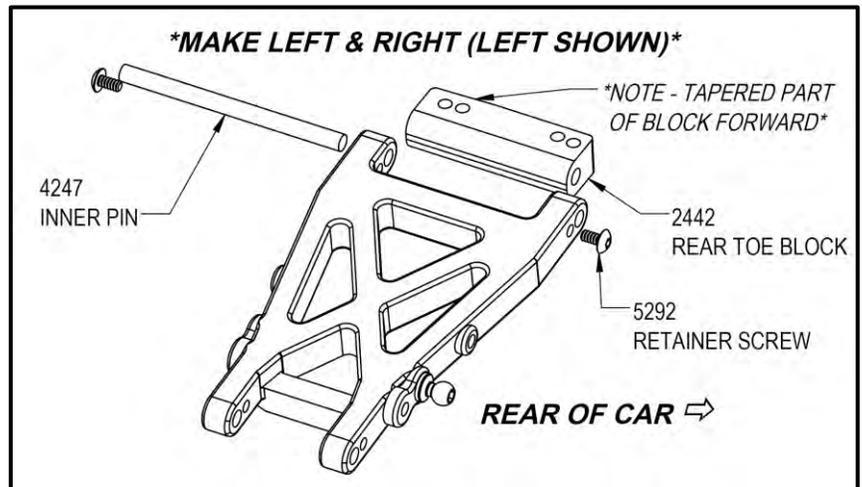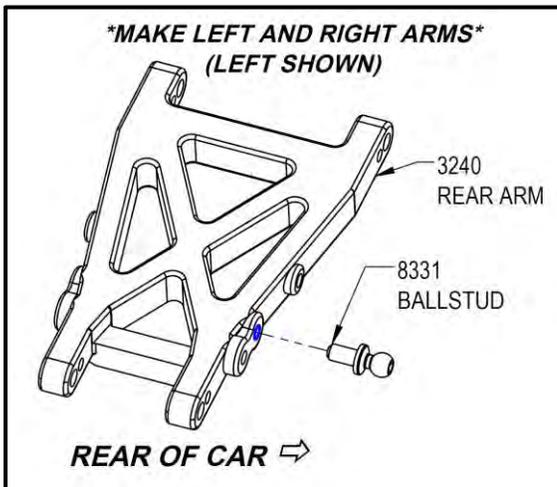

Rear Plate Assembly (set aside when completed)

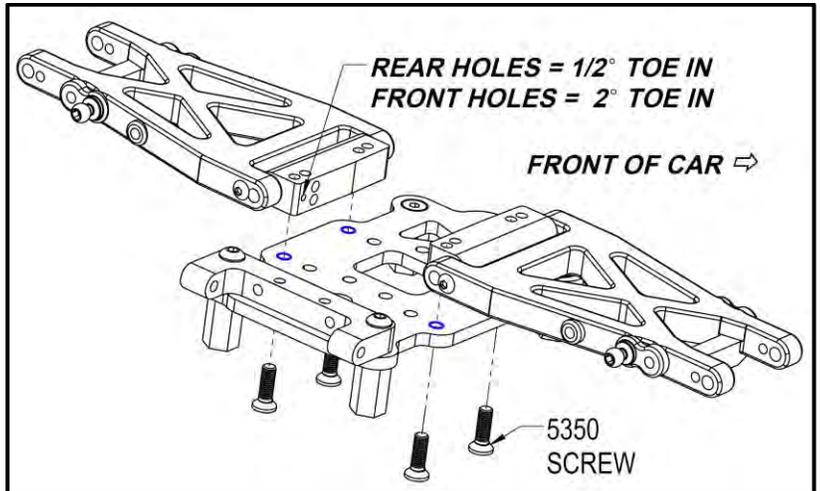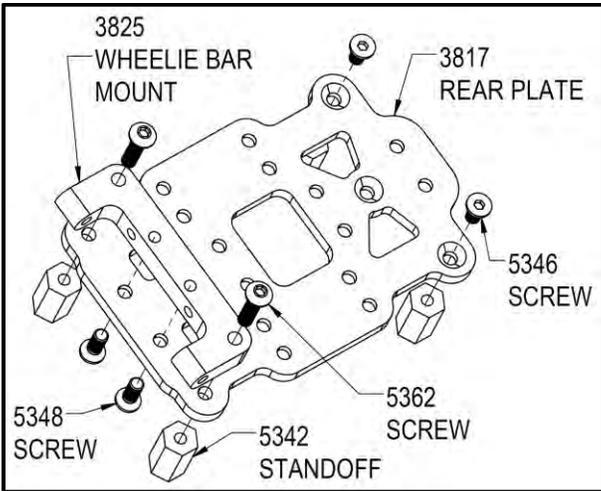

Differential Assembly

***Use the included #4159 Aluminum gear diff cover and the #4164 Aluminum diff gear in place of the plastic cover and gear in the instructions below.

:: Bag 5 - Step 1

91780 Gear Diff washer 5x8mm

91783 Gear Diff Gear

91782 Gear Diff O-Ring

#6588 black grease

91785 Gear Diff Outdrive

91780 Gear Diff Sun Gear

91785 Gear Diff Outdrive Pin

! One pocket is flat for inserting the #91785 gear diff outdrive pin.

:: Bag 5 - Step 2

91783 Gear Diff Crosspin

91780 ~~X4~~ Planet Gear Diff Shim 3.5 x 9mm

91780 ~~X4~~ Planet Gear

91780 Gear Diff washer 5x8mm

91783 Gear Diff Cover

#6588 black grease

91782 Gear Diff O-Ring

91785 Gear Diff Outdrive

! #91782 3.3x0.6mm Gear Diff O-Rings are a tuning option. Kit setup is built without O-Rings

:: Bag 5 - Step 3

91780
Gear Diff
Sun Gear



91785
Gear Diff
Outdrive
Pin



91782
Gear Diff
Gasket

31522
M2.5 x 10mm
BHCS






Diff fluid
#5455





Fill to top of the
cross pins

Transmission Assembly


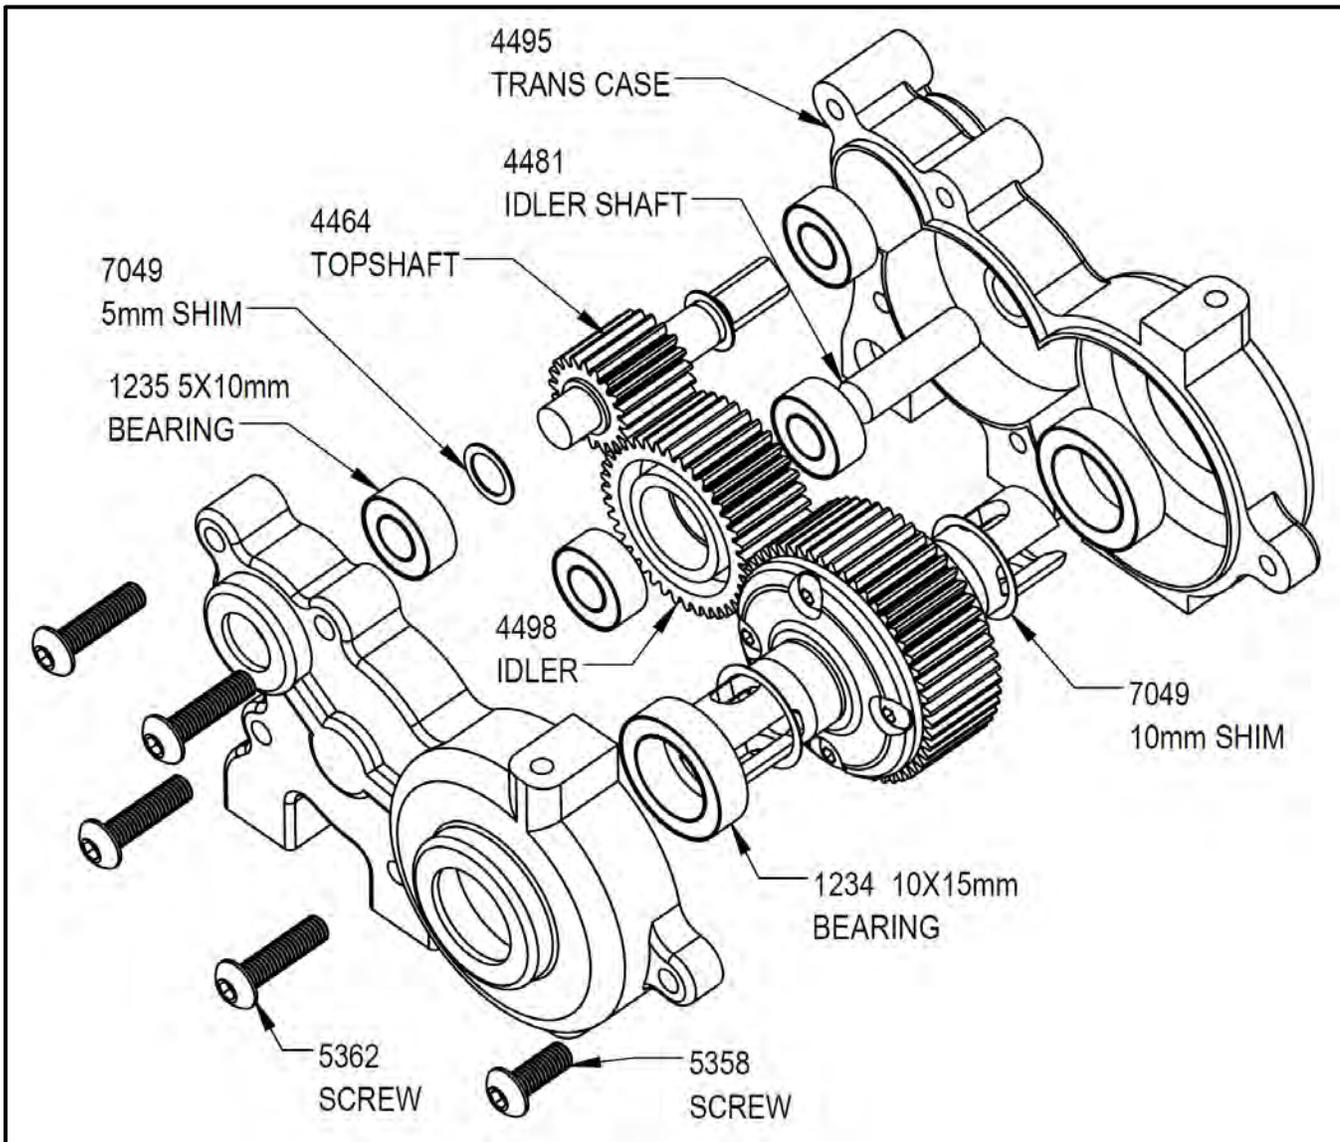


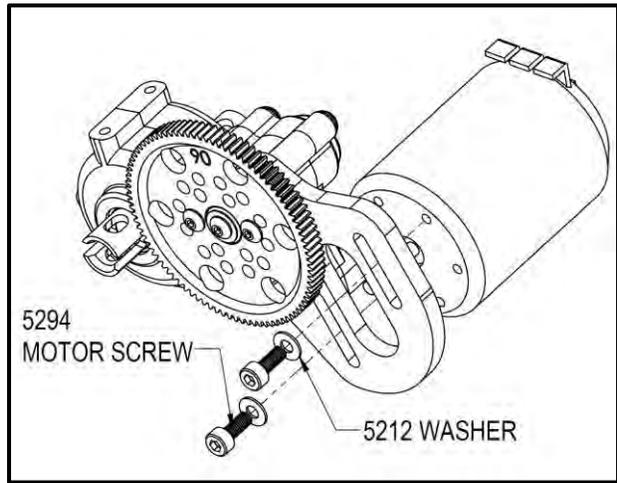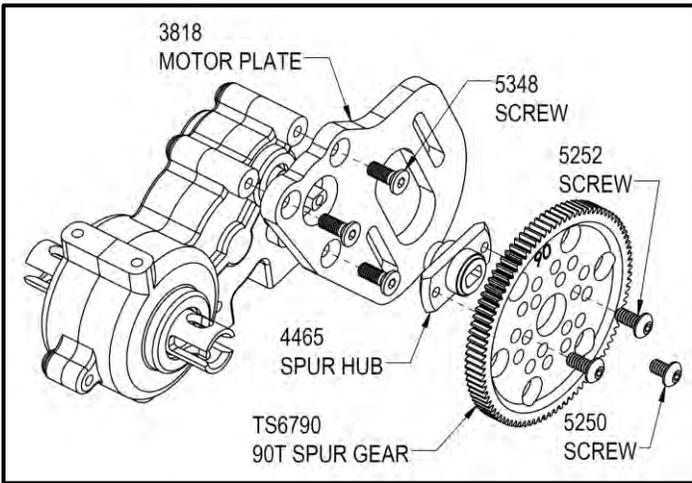



Transmission Mounting

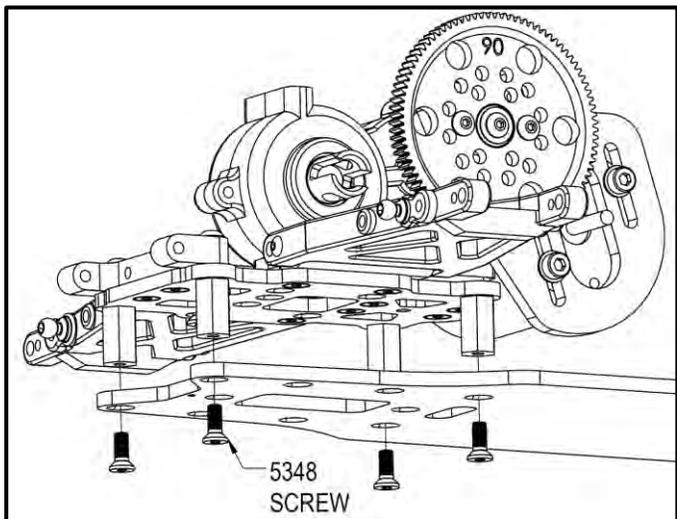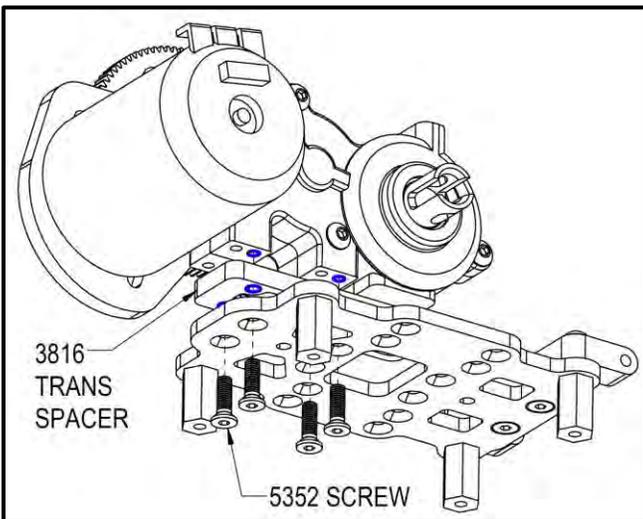



Rear Shock Tower Assembly

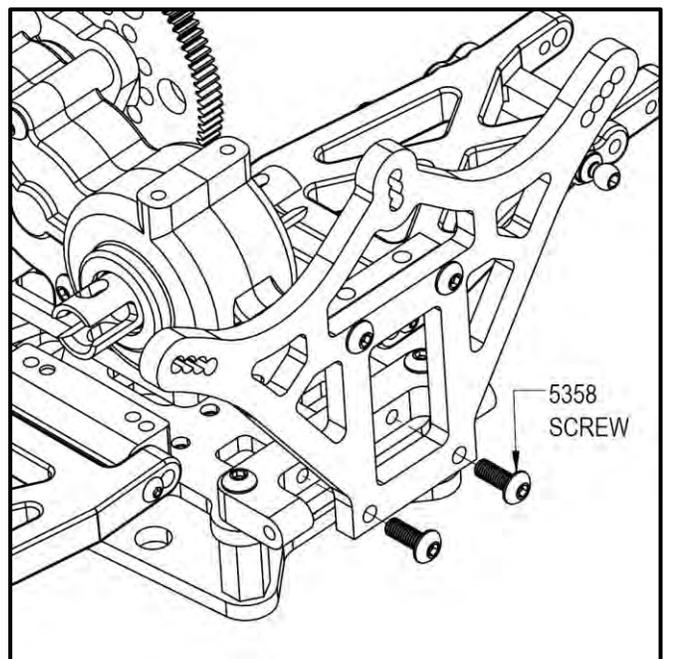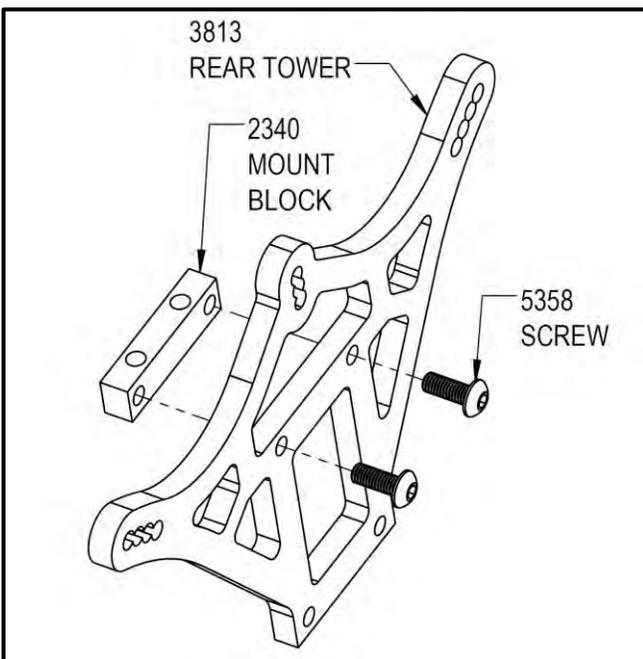



Top Plate Assembly

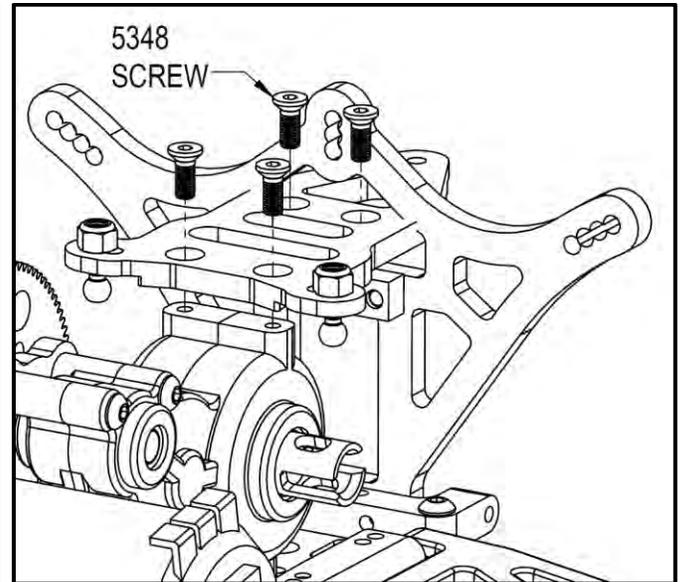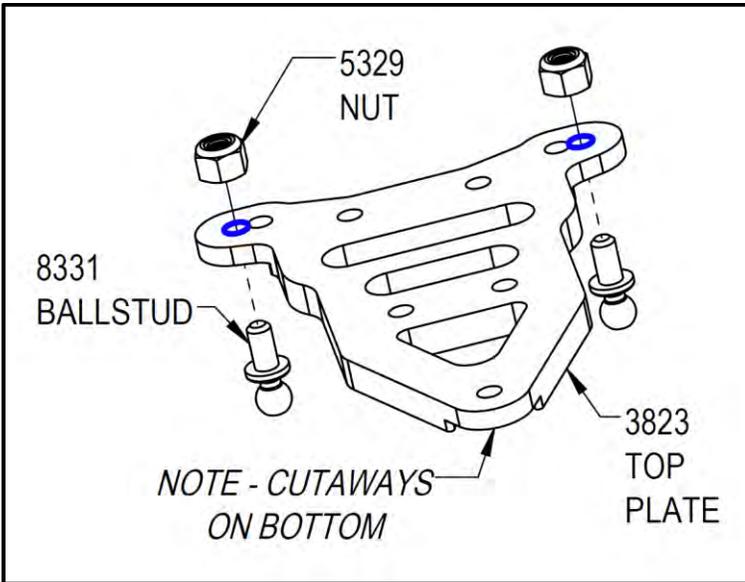


Rear Hub Carrier Assembly

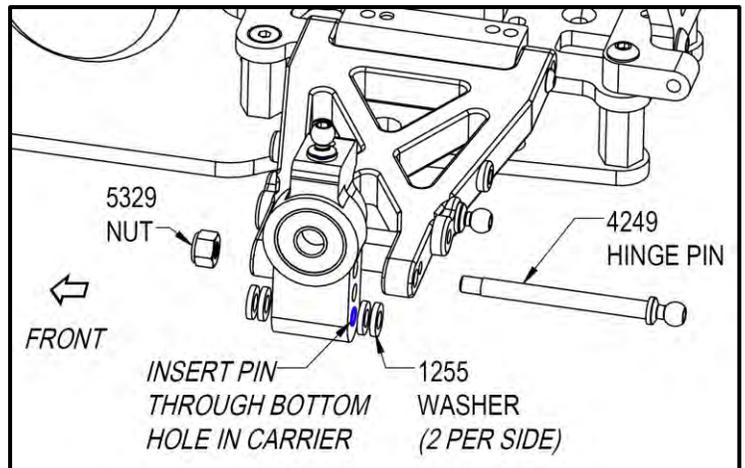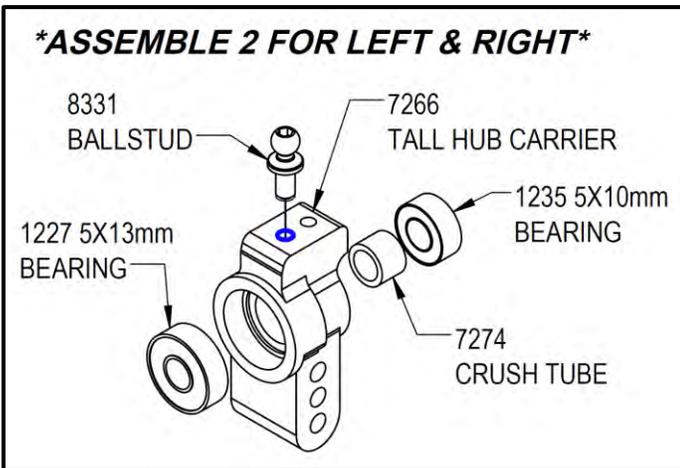


Drivetrain (CVA) Assembly

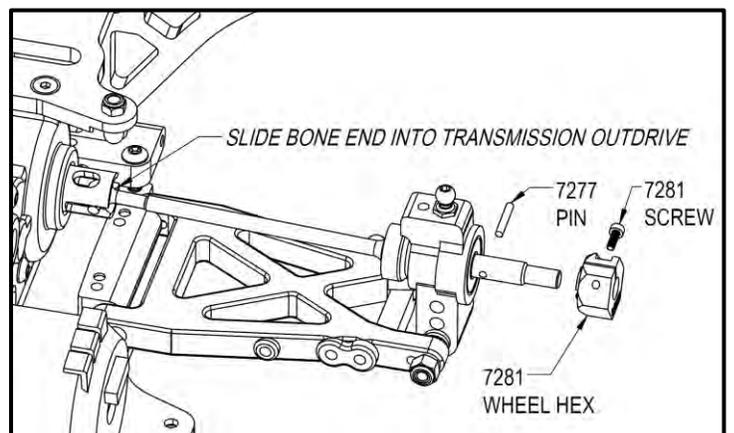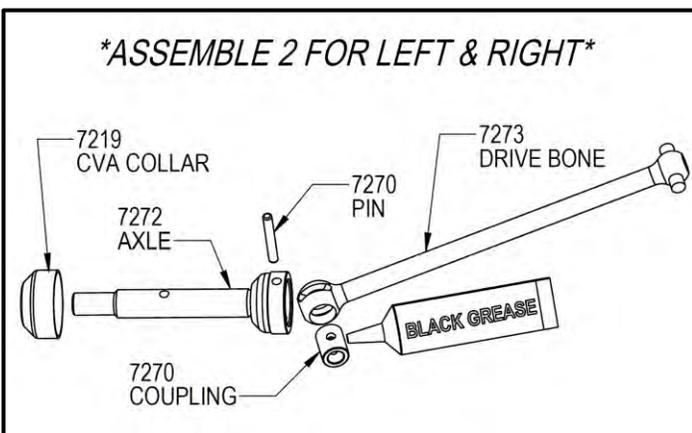


Rear Camber Link Assembly

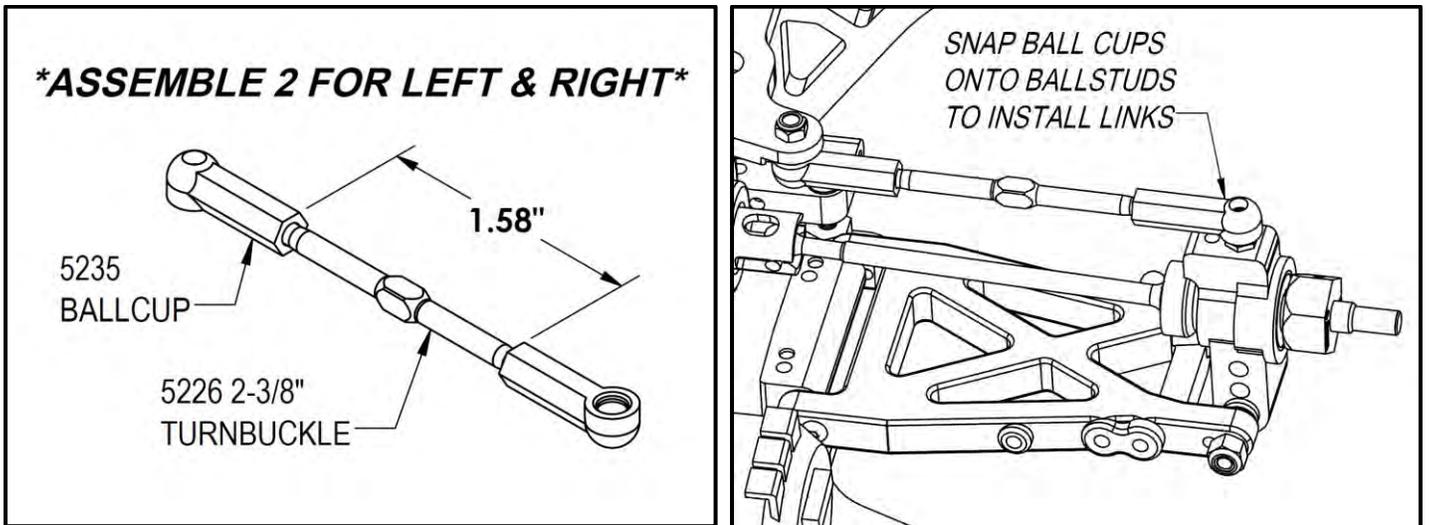

Shock Assembly

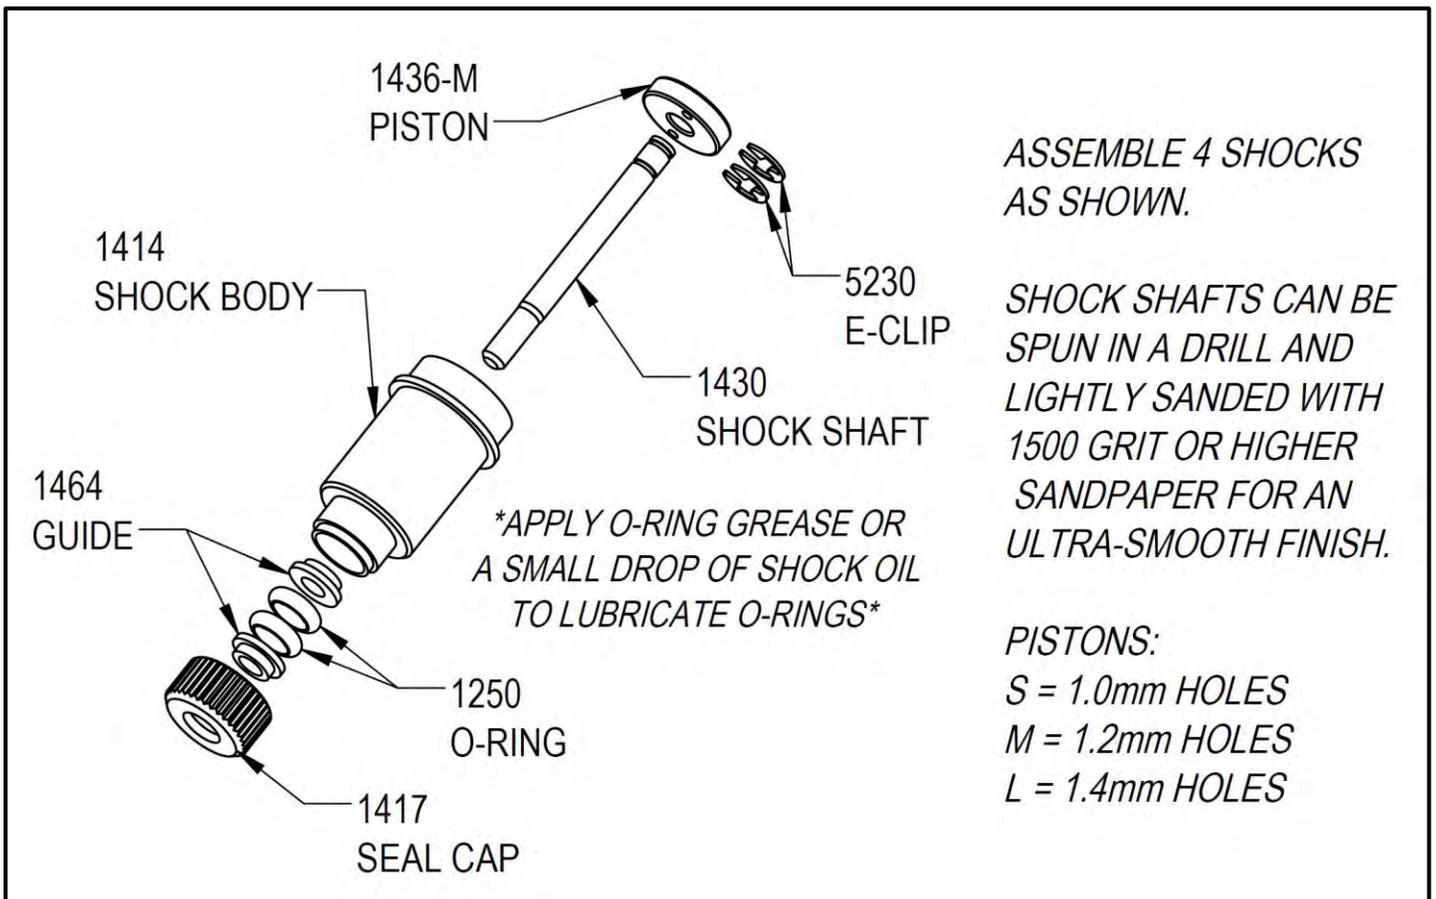

Shock Assembly continued

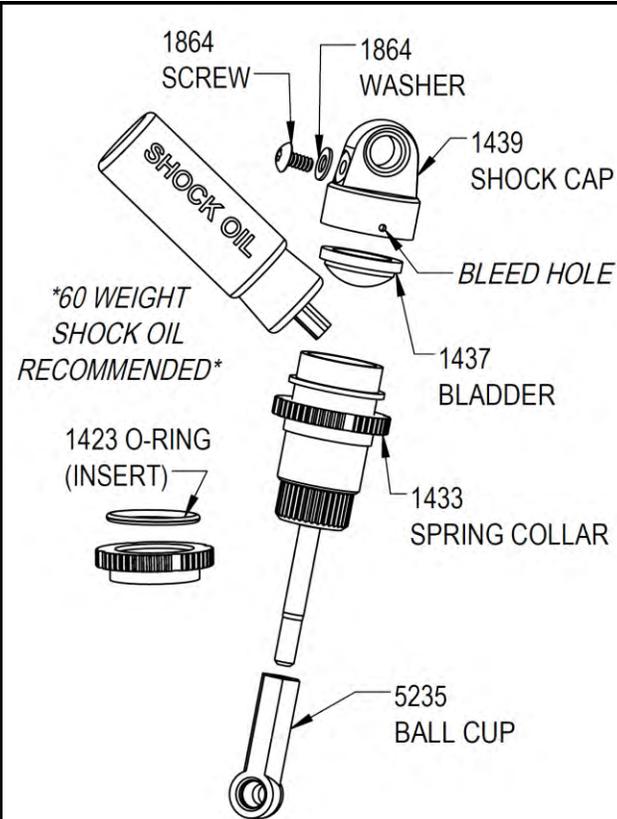


The diagram shows the shock assembly components and the process of filling it with oil. The components are labeled as follows:

- 1864 SCREW
- 1864 WASHER
- 1439 SHOCK CAP
- BLEED HOLE
- 1437 BLADDER
- 1433 SPRING COLLAR
- 5235 BALL CUP
- 1423 O-RING (INSERT)
- *60 WEIGHT SHOCK OIL RECOMMENDED*

SHOCK FILLING INSTRUCTIONS

1. INSTALL SCREW & WASHER INTO SHOCK CAP.
2. EXTEND THE SHOCK AND FILL WITH SHOCK OIL. LEAVE SPACE AT THE TOP FOR THE BLADDER.
3. MOVE THE SHOCK SHAFT UP AND DOWN SLOWLY TO REMOVE ANY AIR BUBBLES.
4. BEGIN TO SCREW ON THE SHOCK CAP AND BLADDER (1 TO 2 FULL TURNS).
5. SLOWLY PUSH THE SHAFT ALL THE WAY INTO THE SHOCK. ANY EXCESS OIL WILL SEEP OUT OF THE BLEED HOLE IN THE BOTTOM OF THE SHOCK CAP.
6. FINISH SCREWING ON THE SHOCK CAP ALL THE WAY UNTIL HAND TIGHT.
7. THE SHOCK SHAFT SHOULD MOVE SMOOTHLY UP AND DOWN. IF IT GETS TIGHT NEAR THE TOP - THERE IS TOO MUCH OIL IN THE SHOCK. RE-BLEED USING LESS OIL.

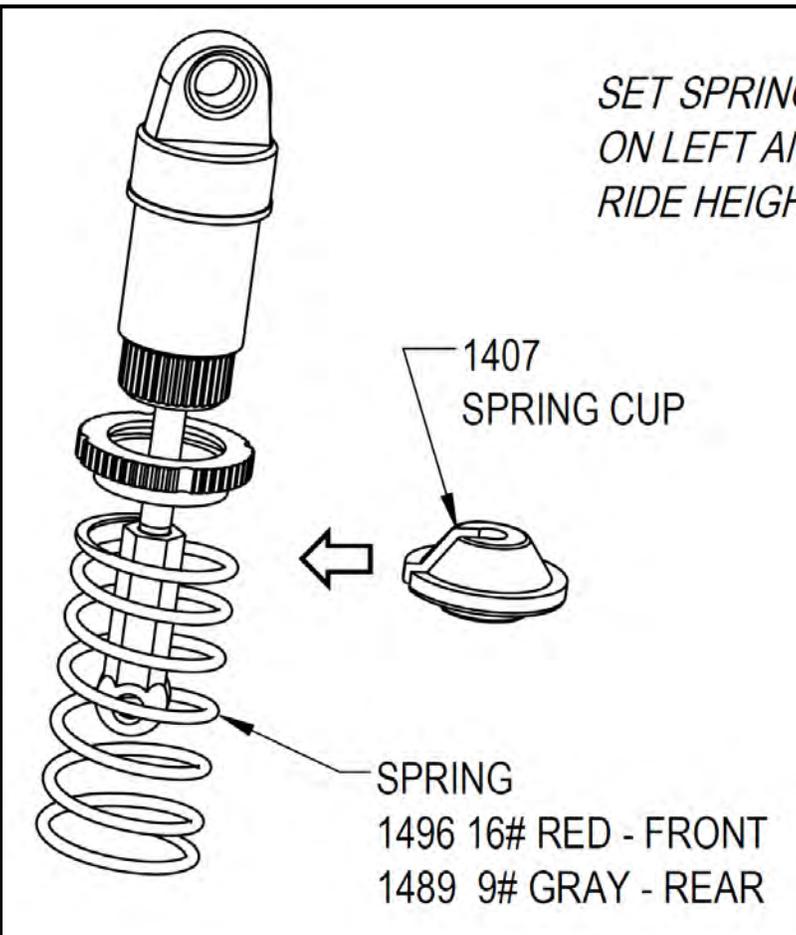

The diagram shows the spring assembly components and the process of setting the spring collars. The components are labeled as follows:





- 1407 SPRING CUP
- SPRING
- 1496 16# RED - FRONT
- 1489 9# GRAY - REAR

SET SPRING COLLARS THE SAME ON LEFT AND RIGHT TO ADJUST RIDE HEIGHT.


OPTIONAL SPRINGS:

- 1485 5# YELLOW
- 1486 6# RED
- 1487 7# GREEN
- 1488 8# CHROME
- 1490 10# BLACK
- 1491 11# PLATINUM
- 1492 12# ORANGE
- 1494 14# WHITE



Shock Mounting

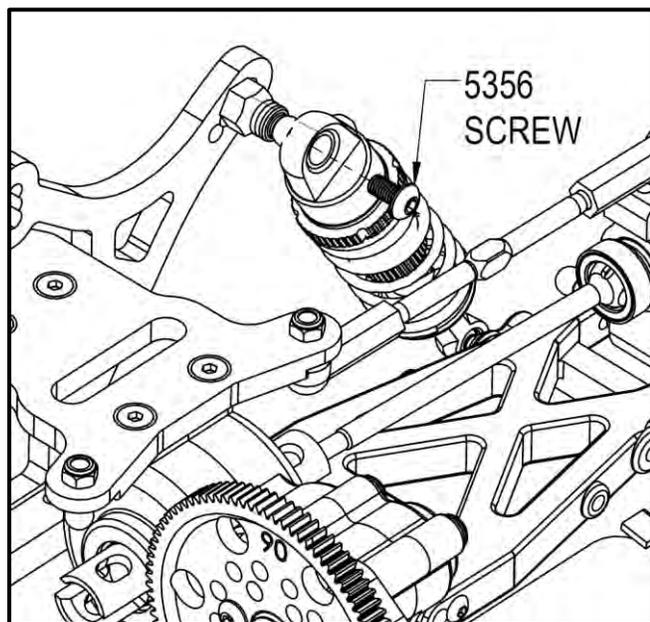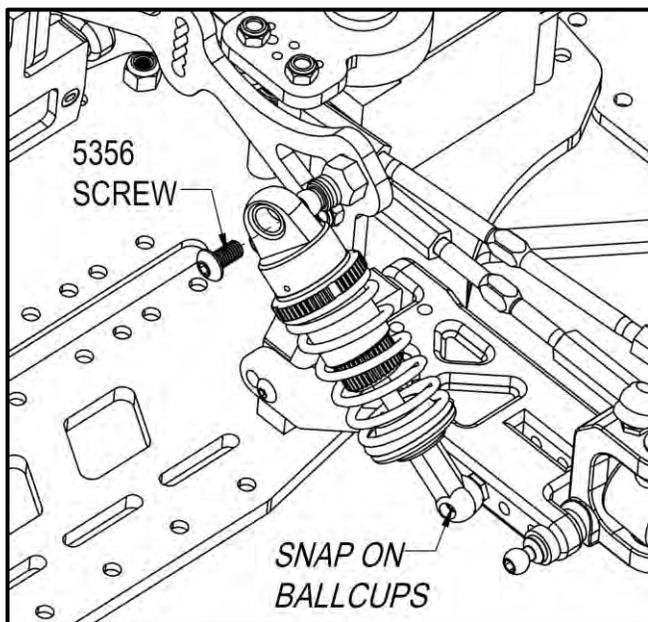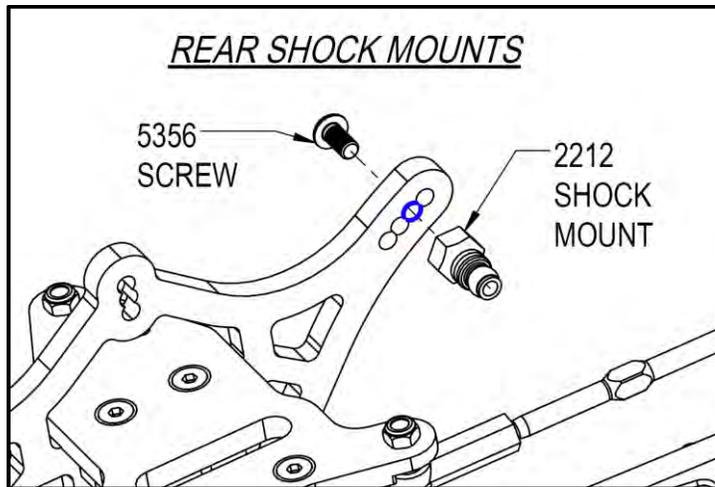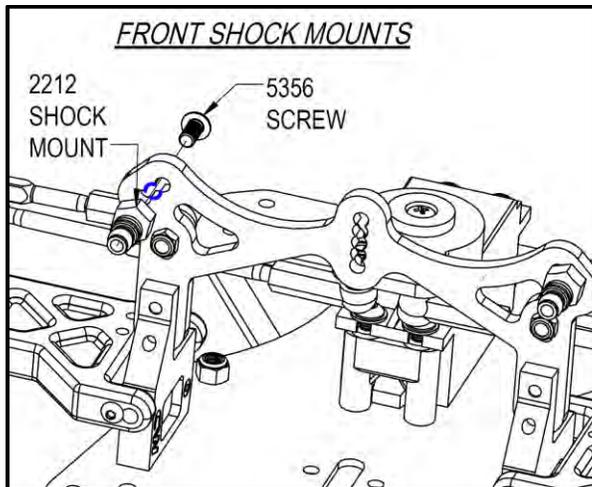





Battery & Electronics Mounting

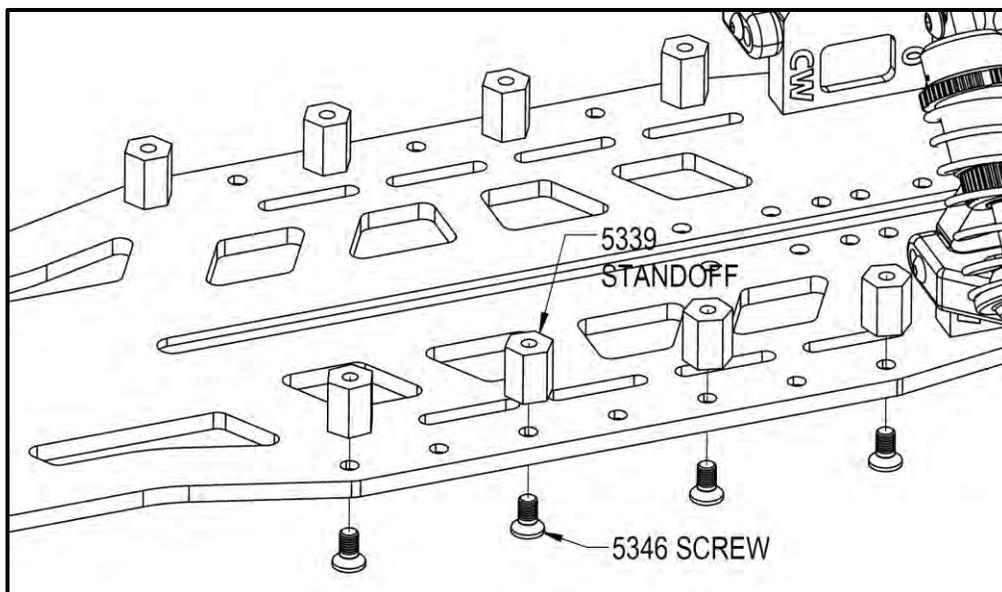

Battery & Electronics Mounting (continued)

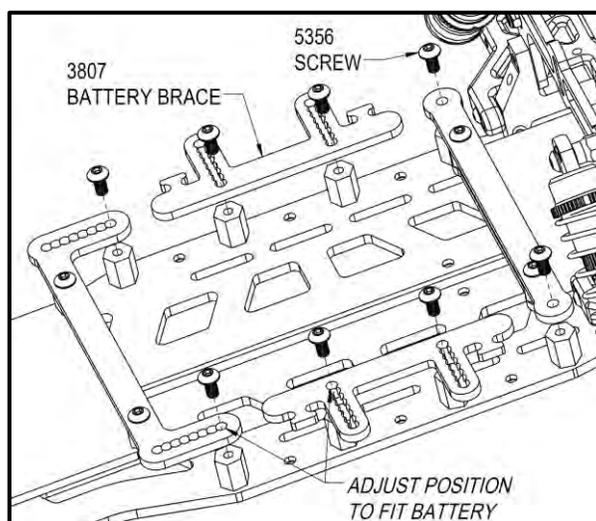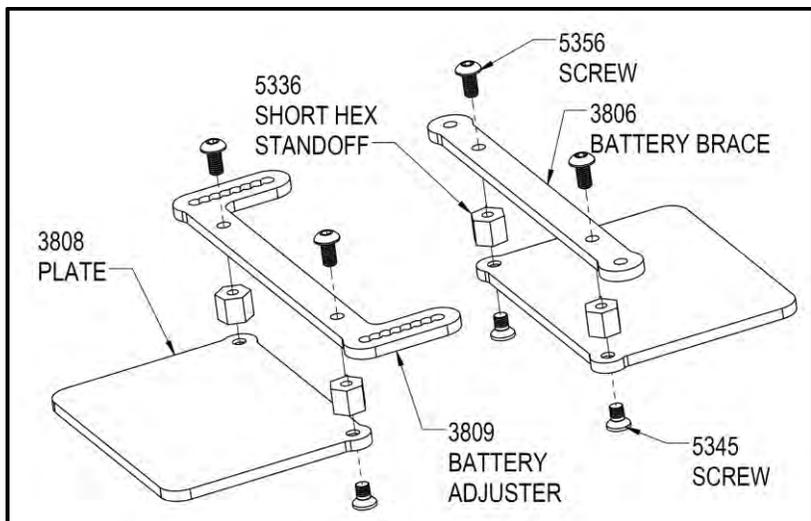


Wheelie Bar

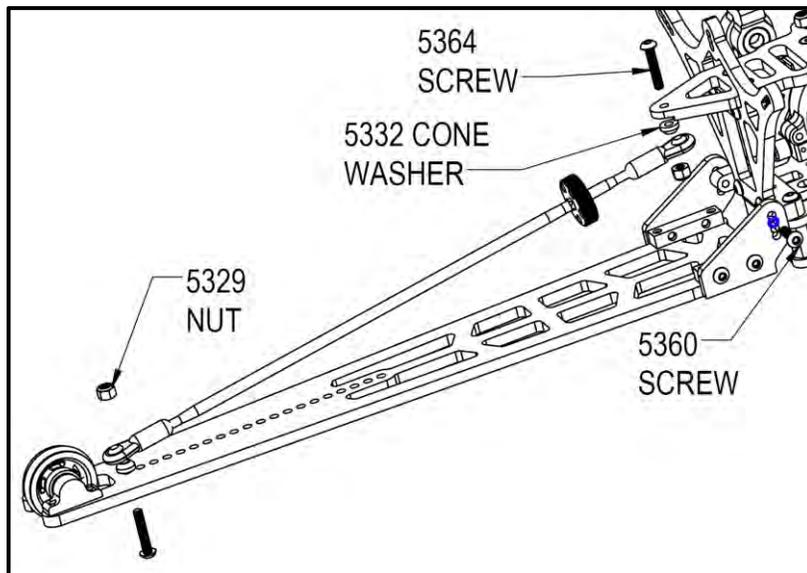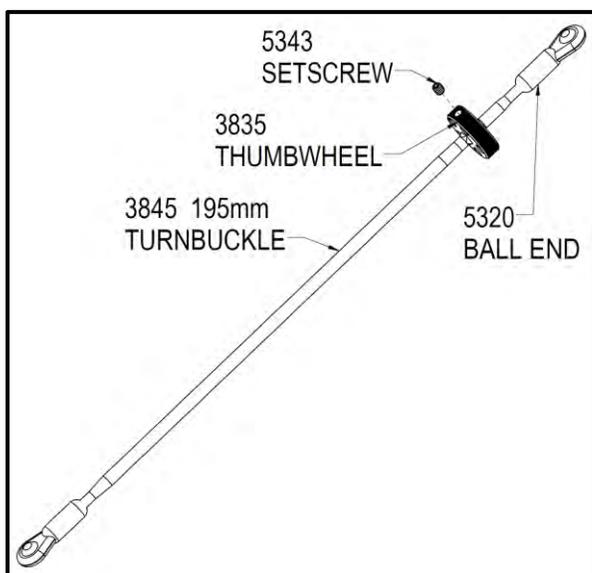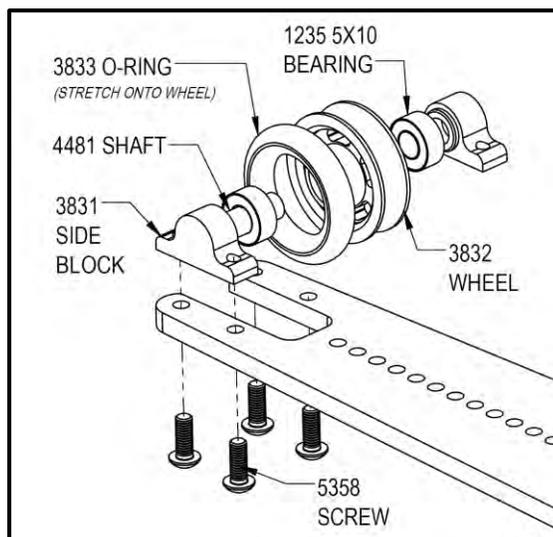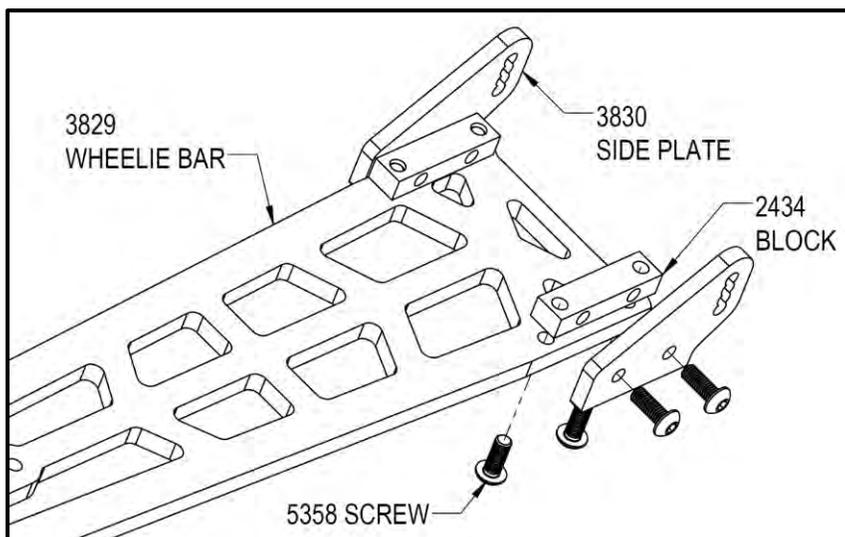


Floating Body Mount System

ASSEMBLE FRONT CROSSBAR

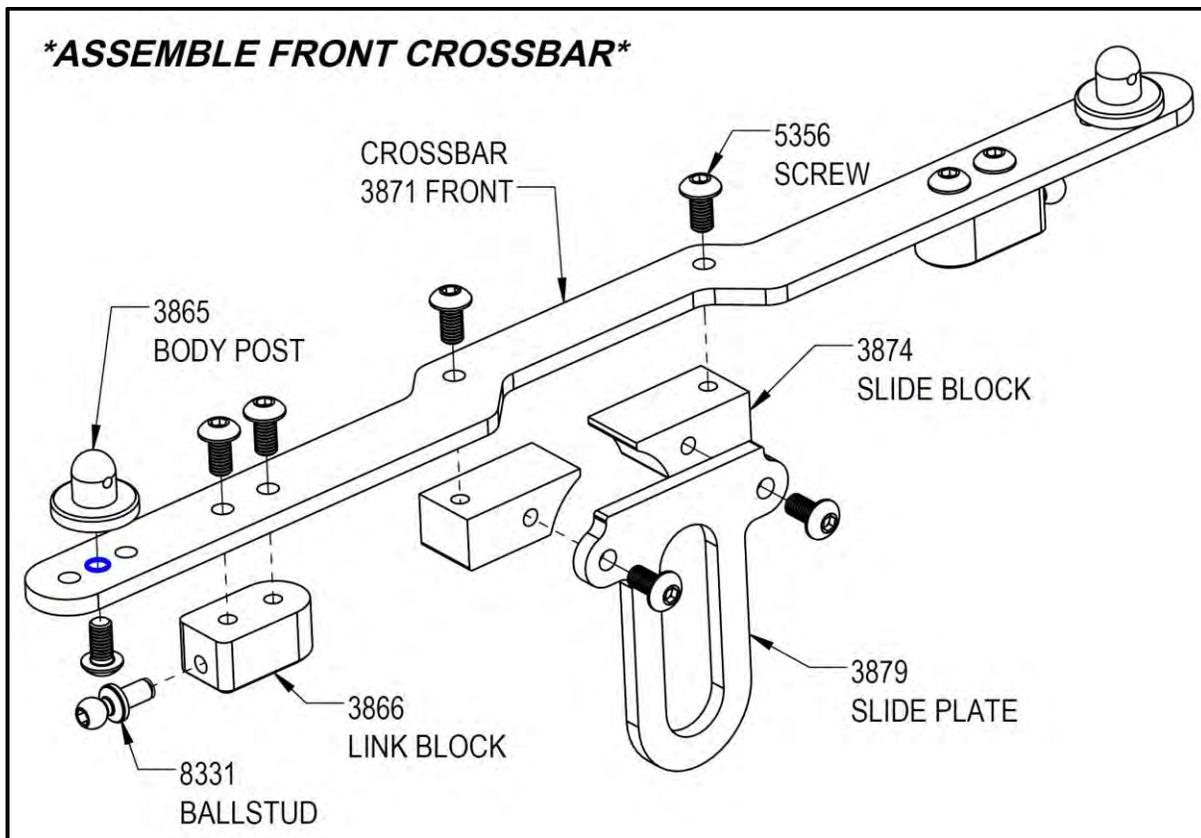


ASSEMBLE REAR CROSSBAR

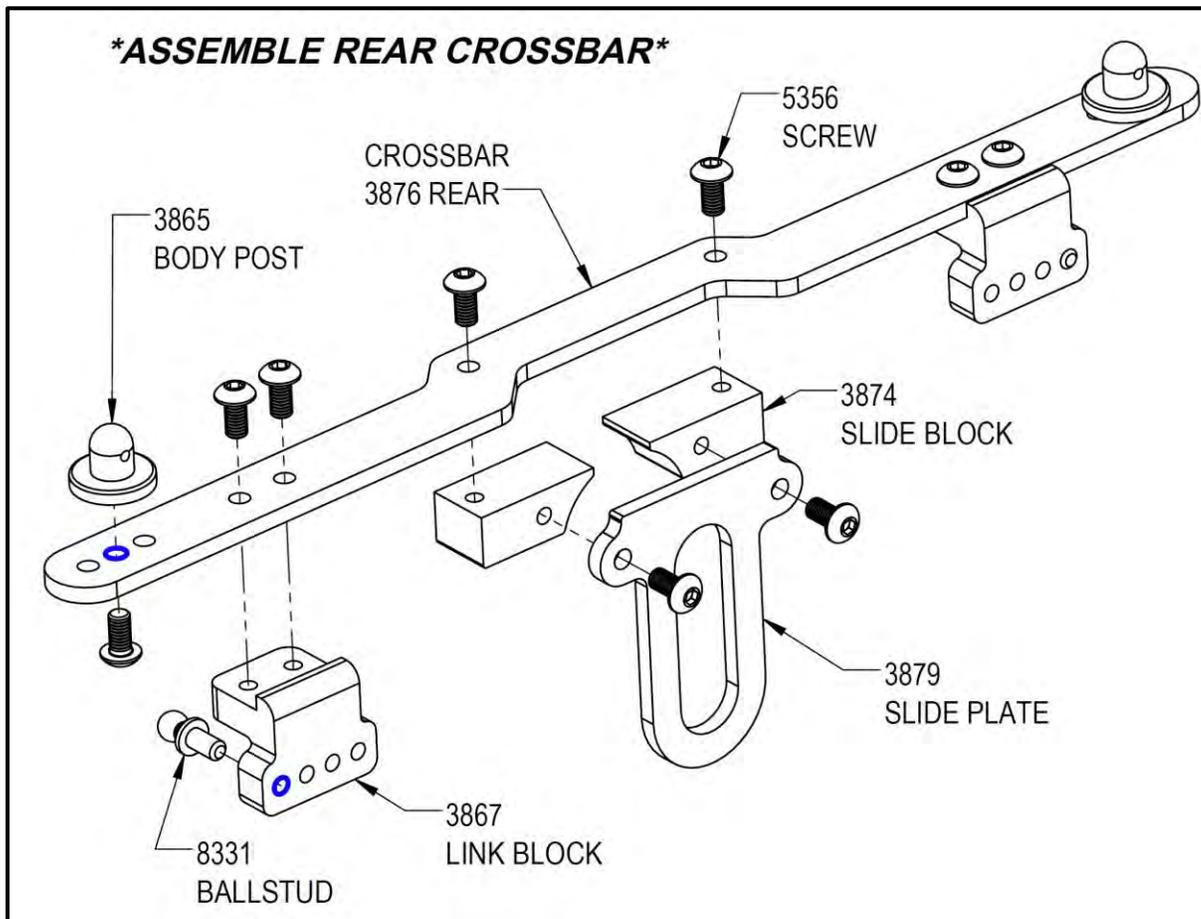



Floating Body Mount System (continued)

ATTACH FRONT SPACER TO BACK OF FRONT SHOCK TOWER

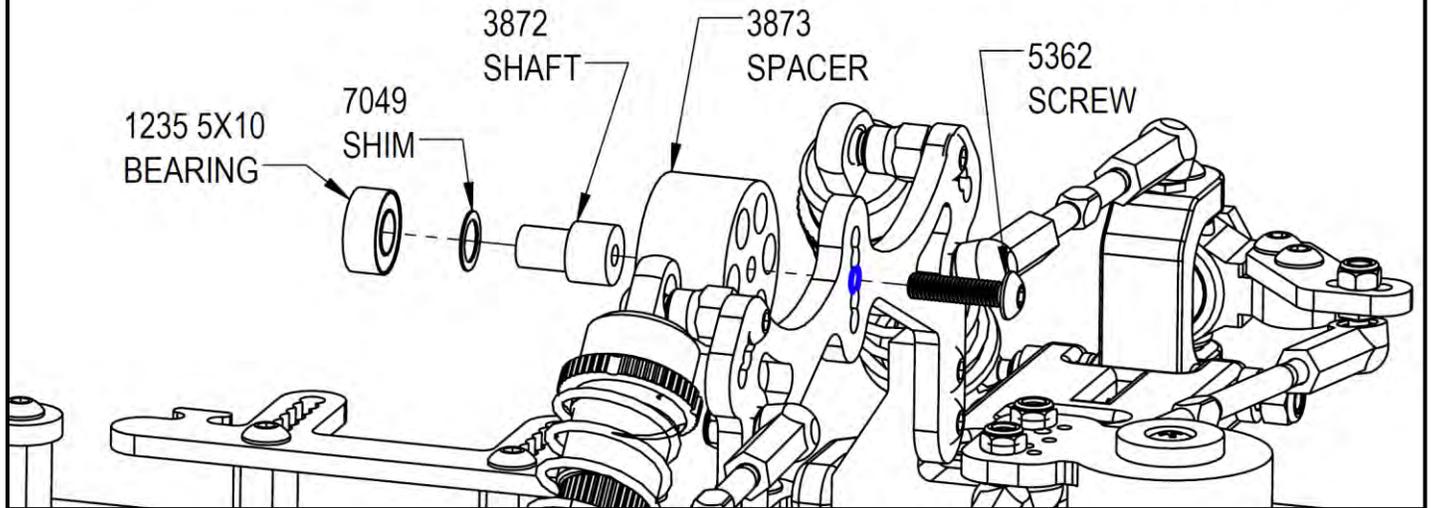

ATTACH REAR SPACER TO FRONT OF REAR SHOCK TOWER

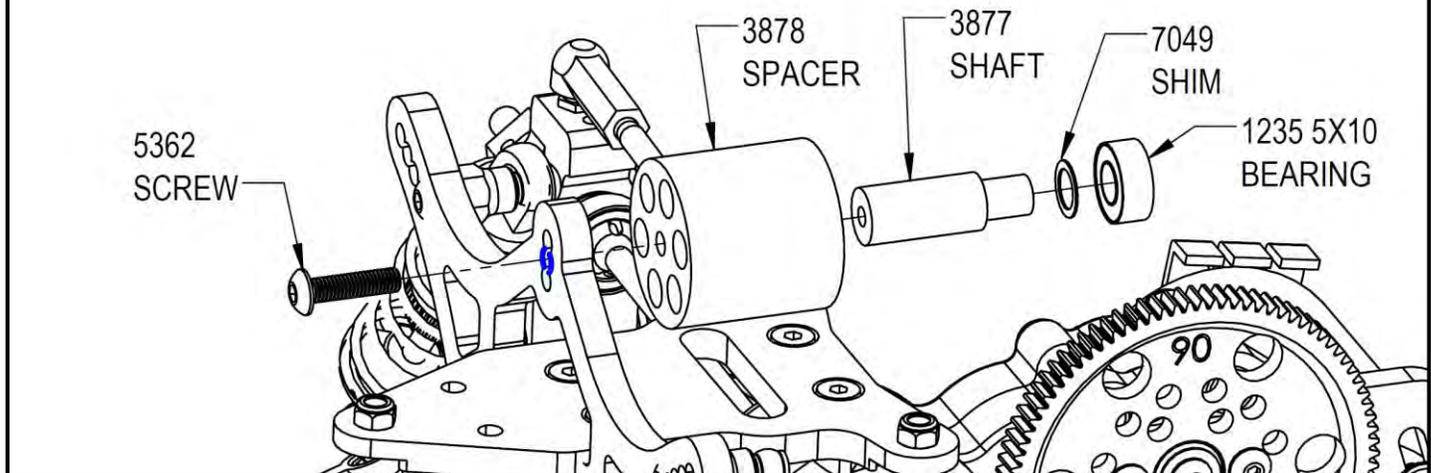

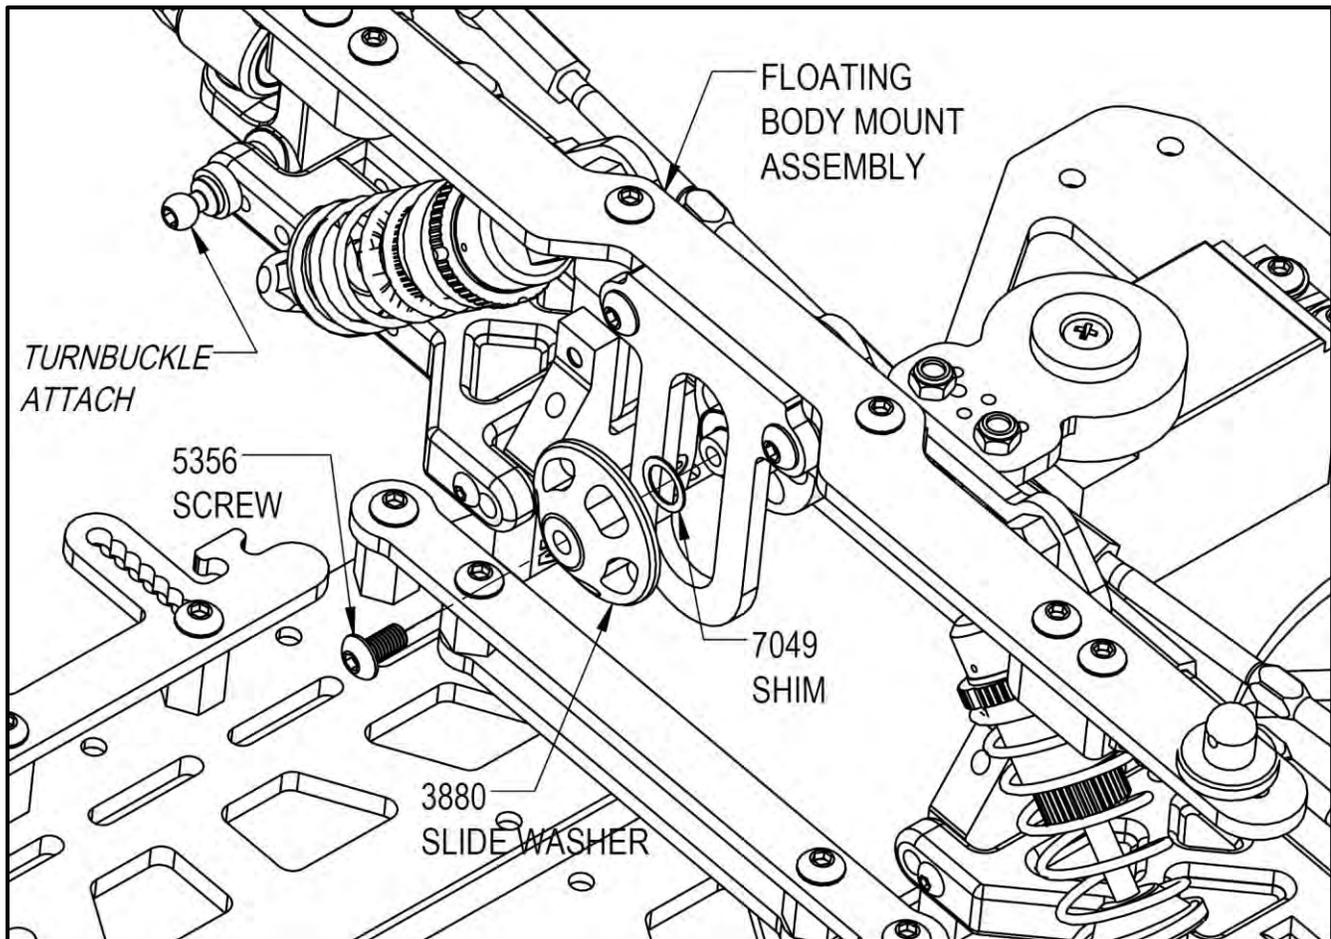

- *Attach rear Floating Body Mount assembly the same as the front assembly shown.*
- *Use an additional #7049 shim if assembly does not slide up and down freely.*
- *Attach short turnbuckles to support front body mount.*
- *Attach long turnbuckles to support rear body mount.*
- *Remove 1 shim from behind slide washer when marking body for mounting to allow solid alignment. Replace the shim when finished.*

Congratulations! The assembly process is nearly complete. Install wheels and tires of your choice using the included wheel nuts.

FINAL SETUP:

- *Set ride height. We recommend starting at 11mm rear and 10mm front (bottom of chassis.)*
- *Set front toe to 0 degrees with the servo centered.*
- *Adjust camber on all 4 tires to 0 degrees.*
- *Set wheelie bar height to 8mm (bottom of wheel) using the turnbuckle link. Lower the wheel for higher grip tracks and raise it to let the rear squat more on lower grip tracks.*



Driver: _____ Class: _____

Track: _____ Surface: Smooth Bumpy

Event: _____ Traction: High Low

Tires

	Compound	Diameter	Insert
RF			
LF			
RR			
LR			

Cleaned With: _____

Traction Additive: _____

Notes: _____

Shocks

	Body Length	Shaft Length	Spring	Oil	Piston	Shock Length	Collar	Spring Cup
RF	S M L	S M L			S M L			Std. Ext.
LF	S M L	S M L			S M L			Std. Ext.
RR	S M L	S M L			S M L			Std. Ext.
LR	S M L	S M L			S M L			Std. Ext.

Shock Notes: _____

Ride Height

LF	RF
LR	RR

Max Chassis Height

LF	RF
LR	RR

Corner Weights


LF	RF
LR	RR

Front %	
Rear %	


Measured From: Bottom of Chassis Top of Chassis

Total Weight: _____ Measured without body

Front Suspension



Rear Suspension



Left

- 0
- 1 2
- 3 4
- None
- .060
- .125
- Short
- Long
- Upper
- Lower

Camber

- Spacers Behind Hub**
- 0
- 1 2
- 3 4
- None
- .060
- .125
- Short
- Long
- Upper
- Lower

Right

- 0
- 1 2
- 3 4
- None
- .060
- .125
- Short
- Long
- Upper
- Lower

Left

- Inner
- Outer
- None
- 1.5°
- 3°
- Inner
- Outer

Toe

- Outer Link Location**
- Inner
- Outer
- None
- 1.5°
- 3°
- Inner
- Outer
- Bottom Shock Hole**
- Hex Offset**

Right

- Inner
- Outer
- None
- 1.5°
- 3°
- Inner
- Outer

Aerodynamics

Body: _____

Body Mount: Floating(FBM) Solid

FBM Mount Links – Exposed Turnbuckle F-_____ R-_____

Rear Deck Height From Bottom Of Chassis: _____

Spoiler: _____

Spoiler Angle: _____ Wickerbill: _____

Power

Motor: _____ Speed Control: _____

2 Pole 4 Pole

Timing/Boost: _____

Endbell Timing: _____ Battery: _____

Pinion: _____ Spur: _____ Battery Position: _____

Diff: Ball Gear Fluid: _____ Transmitter: _____

Wheelie Bar


Wheelie Bar Height: _____

Wheel: Yes No

Turnbuckle Mount



Side Plate Location

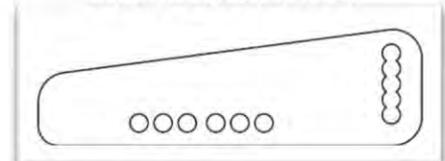

Notes:

