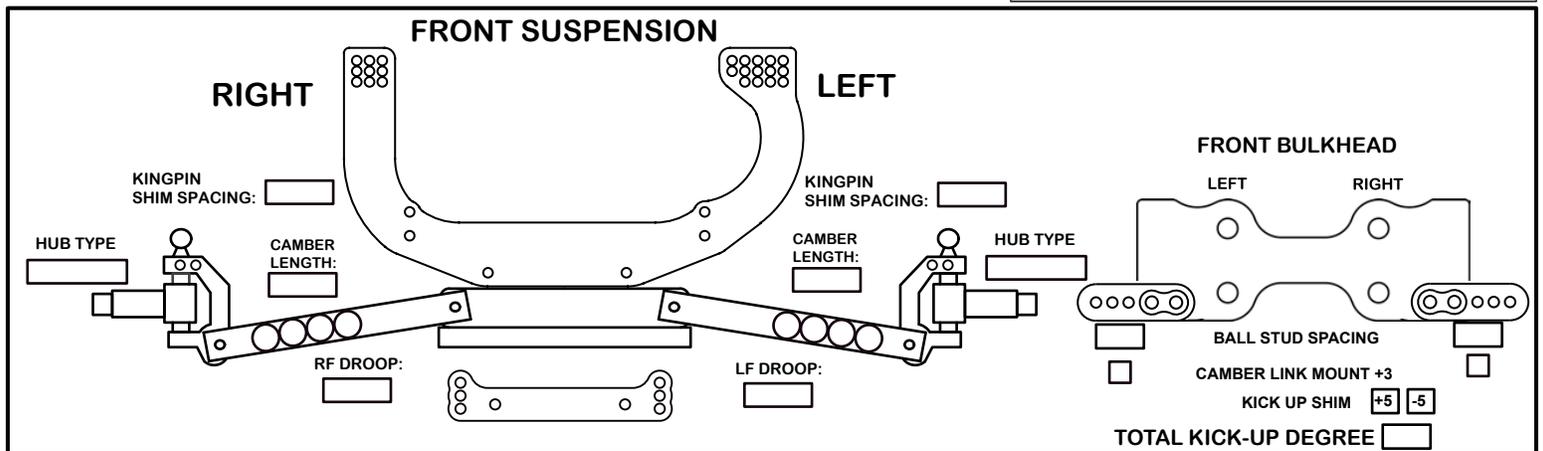# 2025 WEAPON
1/10 SCALE DIRT MIDGET

GFR-7130

DRIVER: _____
DATE: _____
EVENT: _____
CLASS: _____
TRACK: _____

☐ CLAY ☐ HARD PACKED ☐ CARPET
☐ ASPHALT ☐ CONCRETE
☐ FLAT ☐ BANKED ☐ OVAL ☐ TRI-OVAL
TRACTION: ☐ LOW ☐ MEDIUM ☐ HIGH

NOTES: _____
_____
_____

FRONT SUSPENSION

RIGHT   LEFT

FRONT BULKHEAD
LEFT   RIGHT

KINGPIN SHIM SPACING: _____
KINGPIN SHIM SPACING: _____

HUB TYPE _____
CAMBER LENGTH: _____
CAMBER LENGTH: _____
HUB TYPE _____

RF DROOP: _____
LF DROOP: _____

BALL STUD SPACING
CAMBER LINK MOUNT +3
KICK UP SHIM ☐ +5 ☐ -5
TOTAL KICK-UP DEGREE _____

SHOCKS

BIG BORE ☐
SMALL BORE ☐

COLLAR — SHOCK LENGTH

	SPRING	BORE	OIL	PISTON	LENGTH	COLLAR
LF		S / B				
RF		S / B				
LR		S / B				
RR		S / B				

FRONT SHAFTS LENGTH _____   REAR SHAFT LENGTH _____

CORNER WEIGHTS

CROSSWEIGHT _____
FRONT WEIGHT _____
REAR WEIGHT _____

CHASSIS HEIGHT _____ _____
MEASURED FROM ☐ TOP ☐ BOTTOM

OVERALL _____

	Make/tread	Additive
LF		
RF		
LR		
RR		

	Compound	Insert
LF		
RF		
LR		
RR		

CHASSIS:

LEFT TOE BLOCK _____   RIGHT TOE BLOCK _____
LEFT TOTAL TOE _____   RIGHT TOTAL TOE _____

BATTERY _____

MOTOR
BRAND: _____   ENDBELL TIMING _____
ROTOR: _____   AMP DRAW _____
SETTINGS: ☐ "BLINKY"
BRAND: _____   MODEL: _____
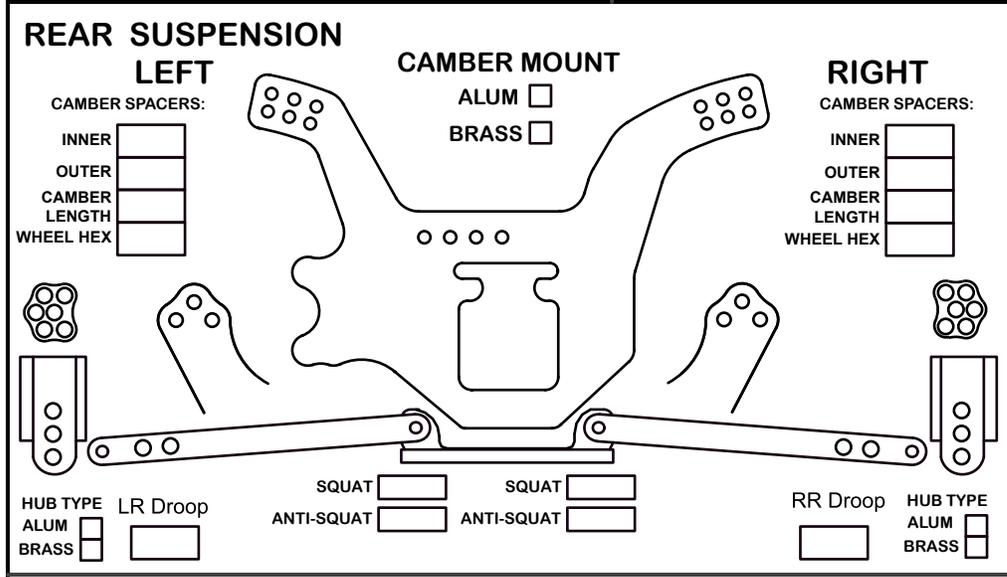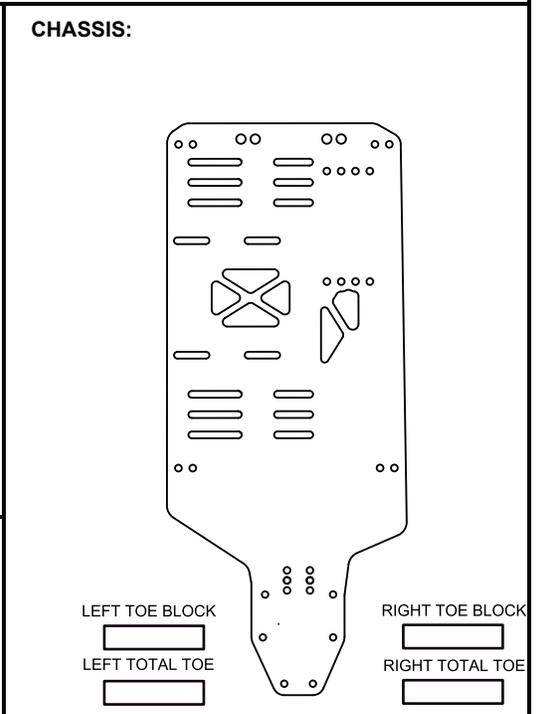
BOOST	START RPM	END RPM	TURBO	TURBO DELAY	TURBO RAMP

GEARBOX RATIO _____

☐ BALL DIFF
☐ GEAR DIFF
☐ DIRECT DRIVE
DIFF OIL _____

HEAT	#1	#2	#3	MAIN
SPUR				
PINION				
ROLL OUT				
MOTOR TEMP				

REAR SUSPENSION

LEFT   RIGHT

CAMBER MOUNT
ALUM ☐
BRASS ☐

CAMBER SPACERS:
INNER _____
OUTER _____
CAMBER LENGTH _____
WHEEL HEX _____

CAMBER SPACERS:
INNER _____
OUTER _____
CAMBER LENGTH _____
WHEEL HEX _____

SQUAT _____   SQUAT _____
ANTI-SQUAT _____   ANTI-SQUAT _____

HUB TYPE
ALUM ☐
BRASS ☐
LR Droop

RR Droop
HUB TYPE
ALUM ☐
BRASS ☐

NOTES: _____
_____
_____
_____
_____

	HEAT 1	HEAT 2	HEAT 3	MAIN
LAPS				
TIME				
FAST LAP				

TQ LAPS _____   TIME _____   FAST LAP _____