

X3 3.0 EVO SABRE

SET-UP SHEET

AIR TEMP F° °C

LAPS

BEST LAP TIME

in LAP

TRACK SIZE

☐ OPEN ☐ MEDIUM ☐ TIGHT

TRACK TRACTION

☐ HIGH ☐ MEDIUM ☐ LOW

DIFFERENTIAL OIL

FRONT CENTER REAR
STD STD STD

OIL wt.

FRONT CENTER REAR

CLUTCH

SHOE BRAND

COMPOUND ☐ ALUM
☐ CARBON

SPRING BRAND

TENSION mm

CLUTCH SHOES SHOE

GEARING

SPUR GEAR T

PINION GEAR T

TIRES

FRONT TYPE

COMPOUND

INSERT FOAM

REAR TYPE

COMPOUND

INSERT FOAM

ENGINE

TYPE

PORT

PLUG

☐ NORMAL ☐ TURBO


HEAD CLEARANCE

PIPE

FUEL BRAND

NAME RACE DATE
TRACK CITY/COUNTRY TRACK CONDITION

FRONT

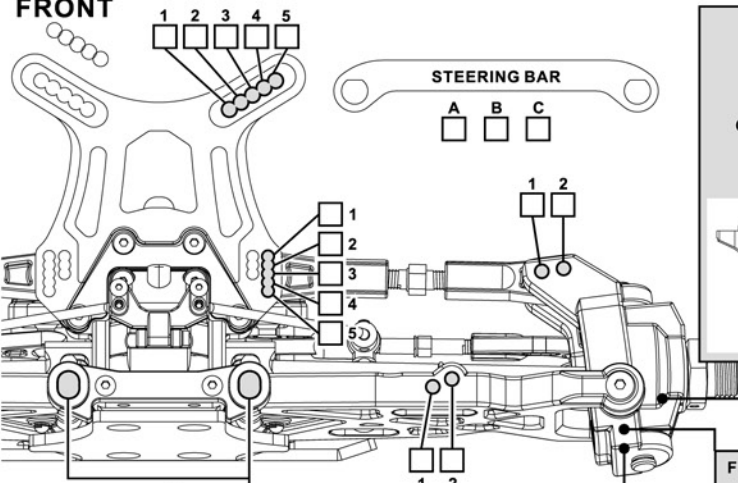


STEERING BAR

☐ A ☐ B ☐ C

INSERT NR.

☐ ☐ ☐ ☐



INSERT NR.

☐ ☐ ☐ ☐

TOTAL CASTER

☐ 18° ☐ 22.5°
☐ 18.5° ☐ 23°
☐ 19° ☐ 23.5°
☐ 19.5° ☐ 24°
☐ 20° ☐ 24.5°
☐ 20.5° ☐ 25°
☐ 21° ☐ 25.5°
☐ 21.5° ☐ 26°
☐ 22°


RIDE HEIGHT mm

SWAY BAR mm

CAMBER ANGLE °

TOE ANGLE °

☐ PLASTIC ☐ ALUM



FRONT SPINDLE CARRIERS

☐ PLASTIC
☐ ALUM

STEERING KNUCKLE ARM

☐ PLASTIC
☐ ALUM

FRONT SPINDLE CARRIERS CASTER

☐ 20°
☐ 22°
☐ 24°

SHOCK

FRONT

SHOCK LENGTH mm


OIL wt.

PISTON

SPRING




REAR

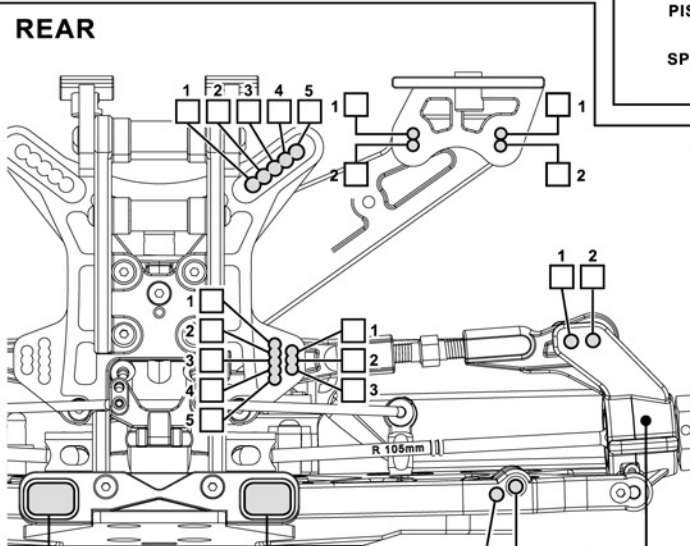

INSERT NR.

☐ ☐ ☐ ☐



INSERT NR.

☐ ☐ ☐ ☐

WHEELBASE SHIMS


☐ 0mm ☐ 2mm
☐ 2.5mm ☐ 4.5mm

RIDE HEIGHT mm

SWAY BAR mm

CAMBER ANGLE °

☐ PLASTIC ☐ ALUM



WHEEL HUB

☐ PLASTIC
☐ ALUM

SHOCK

REAR

SHOCK LENGTH mm

OIL wt.

PISTON

SPRING

