

B7Z1
TEAM KIT

1:10 Scale 2WD Electric Off Road
Competition Buggy Kit

RC10
SINCE 1984



TEAM ASSOCIATED



1:10 Scale 2WD Electric Off Road Competition Buggy Kit Manual

#90046 RC10B7.1 Buggy Kit



CHAMPIONS by DESIGN
AssociatedElectrics.com

TEAM ASSOCIATED

⚙ Introduction

Thank you for purchasing this Team Associated product. This assembly manual contains instructions and tips for building and maintaining your new vehicle. Please take a moment to read through the manual and familiarize yourself with the steps. We are continually changing and improving our designs; therefore, actual parts may appear slightly different than the illustrations. New parts will be noted on supplementary sheets located in the appropriate parts bags.

Check each bag for these sheets before you start to build.

Check www.AssociatedElectrics.com for the latest versions of our instruction manuals.

⚙ RC10B7.1 Team Kit Features

- Includes 3-Gear Laydown Transmission that maintains original B7 motor position while reducing rotational weight and drag
- NEW Steering and Caster Block Assembly simplifies assembly and reduces weight without sacrificing tunability
- NEW -2mm Front Ballstud Mount included along with updated Top Plate and Standard Ballstud Mount
- NEW Front Suspension Arms with Hinge Pin Brace for improved durability
- NEW -2mm Front Shock Tower and "Gull-Dropper" Rear Shock Tower and Suspension Arm Plates for lower center of gravity
- Includes FT Inverted Rear Shock Standoff Set
- NEW -1-degree Arm Mount "C"
- Includes 78mm Rear Suspension Arms and 69mm CVA Bones
- Includes Front and Rear Anti-Roll Bars and hardware
- Includes High-Volume Gear Differential
- Low- Profile RC10B7 Body, 7-inch Rear Wing, and 2.5-inch Front Wing
- 7075-T6 Aluminum Chassis with Optional Weight Plate Pockets (Aluminum plate included with both kits)
- Shock Tower Covers Front and Rear
- 3.5mm Turnbuckles and Ballcups
- 13mm Big-Bore Shocks

⚙ Additional

Your new RC10B7 Team Kit comes unassembled and requires the following items for completion (refer to www.AssociatedElectrics.com and www.Reedypower.com for suggestions):

- R/C two channel surface frequency radio system
- AA-size batteries for transmitter
- Electronic Speed Control ("ESC")
- Steering servo
- R/C electric motor (540 size)
- Pinion gear (48P), size determined by type/turn or kV of motor
- Battery charger (a peak detection charger, or LiPo compatible charger)
- 2 cell LiPo battery pack
- Polycarbonate specific spray paint
- Cyanoacrylate glue ("CA") (#1697)
- Thread locking compound (#1596)
- Tires and Inserts, Fronts and Rears
- Wheels w/12mm Hex
 - Front Wheels #9690 (white), #9691 (yellow)
 - Rear Wheels #9695 (white), #9696 (yellow)
- Slim Front Wheels w/12mm Hex (carpet/astro turf)
 - #91757 (white) #91758 (yellow)

⚙ Other Helpful Items

- Silicone Shock Fluid (Refer to AssociatedElectrics.com for complete listings)
- Green Slime shock lube (#1105)
- FT Turnbuckle Wrench, 4mm (#1112)
- FT Body Reamer (#1499)
- Shock Pliers (#1681)
- Wire Cutters
- FT Hex/Nut Wrenches (#1519)
- FT Ballcup Wrench (#1579)
- Hobby Knife
- Needle Nose Pliers
- FT Universal Tire Balancer (#1498)
- Calipers or a Precision Ruler
- FT Body Scissors (#1737)
- Soldering Iron

Associated Electrics, Inc.
21062 Bake Parkway.
Lake Forest, CA 92630



Customer Service
Tel: 949.544.7500
Fax: 949.544.7501

Hardware - 1:1 Scale View

Button Head (bhcs)

	2x4mm (31510)
	2.5x6mm (31520)
	3x4mm (91158)
	3x6mm (31531)
	3x8mm (31532)
	3x10mm (25211)
	3x12mm (89202)
	3x14mm (25187)
	3x16mm (89203)
	3x22mm (25189)
	3x24mm (89204)

Flat Head (fhcs)

	2x3mm (91749)
	2.5x8mm (31472)
	3x6mm (31541)
	3x8mm (25201)
	3x10mm (25202)
	3x12mm (25203)
	3x14mm (89208)
	3x22mm (89455)

Cap Head (shcs)

	1.6x5mm (91611)
	3x16mm (89224)

LP Socket Head (lp shcs)

	3x6mm (41089)
	3x8mm (41096)
	3x22mm (41095)

Nuts (lock/plain)

	M3 Nut (91477)
	M3 Alum. Locknut, Blue (31550)
	M3 Locknut, Black (25215)
	M3 Locknut w/Flange (25612)
	FT 3mm Locknuts, Blue(25392)
	M4 Locknuts:
	Serrated Steel LP (91150)
	Serrated Steel (Silver) (91826)
	Serrated Aluminum (Black) (91738)

Ball Bearings

	4x7x2.5mm (31732)
	5x8x2.5mm (31400)
	5x10x4mm (91560)
	5x10x4mm flanged (92324)
	5x12x4 (91567)
	10x15x4 (91563)


Shims and Washers

	5.5x0.5mm (31381)
	5.5x1.0mm (31382)
	5.5x2.0mm (31383)
	3x8mm Washer (89218)

Set Screws

	3x3mm (25225)
	3x6mm (81257)
	3x12mm (81258)
	3x20mm (91737)

Ballstuds

	HD 6mm, Short (32042)
	HD 8mm, Short (32040)
	HD 6mm (91047)
	Ti HD 6mm (91751)
	HD 8mm (91048)
	Ti HD 8mm (91752)
	HD 10mm (91049)
	Ti HD 10mm (91753)

Notes:

Table of Contents

1.....	Cover	11.....	Gearbox Build Bag 6
2.....	Introduction	14.....	Rear Hubs Build Bag 7
3.....	1:1 Hardware “Fold Out”	15.....	Turnbuckles Build Bag 8
4.....	Table of Contents	16.....	Shocks Build Bag 9
5.....	Steering Build Bag 1	19.....	Electronics Build Bag 10
5.....	Front Suspension Build Bag 2	22.....	Tuning Tips
8.....	Caster / Steering Blocks Build Bag 3	24.....	Setup Sheet “Kit Setup”
9.....	Rear Suspension Build Bag 4	25.....	Setup Sheet “Blank”
10.....	Gear Differential Build Bag 5	26.....	Back Cover

Notes



This symbol indicates a special note or instruction in the manual.

x2

This symbol indicates the number of the same part that is required.

2

This symbol indicates the order within a step to assemble parts.




This symbol indicates there are optional FT parts available




This symbol indicates a Racers Tip.




There is a 1:1 hardware foldout page in the front of the manual. To check the size of a part, line up your hardware with the correct drawing until you find the exact size. Each part in the foldout has a number assigned to it for ordering replacement parts.



This symbol indicates where Thread Lock Adhesive should be applied. *not included



This symbol indicates where Diff Fluid should be applied.



This symbol indicates where Shock Fluid should be applied.



This symbol indicates where FT Silicone Grease should be applied. *not included



This symbol indicates where FT Diff Lube should be applied. *not included




This symbol indicates where Black Grease should be applied.




This symbol indicates where Green Slime can be applied. *not included


:: Bag 1 - Step 1

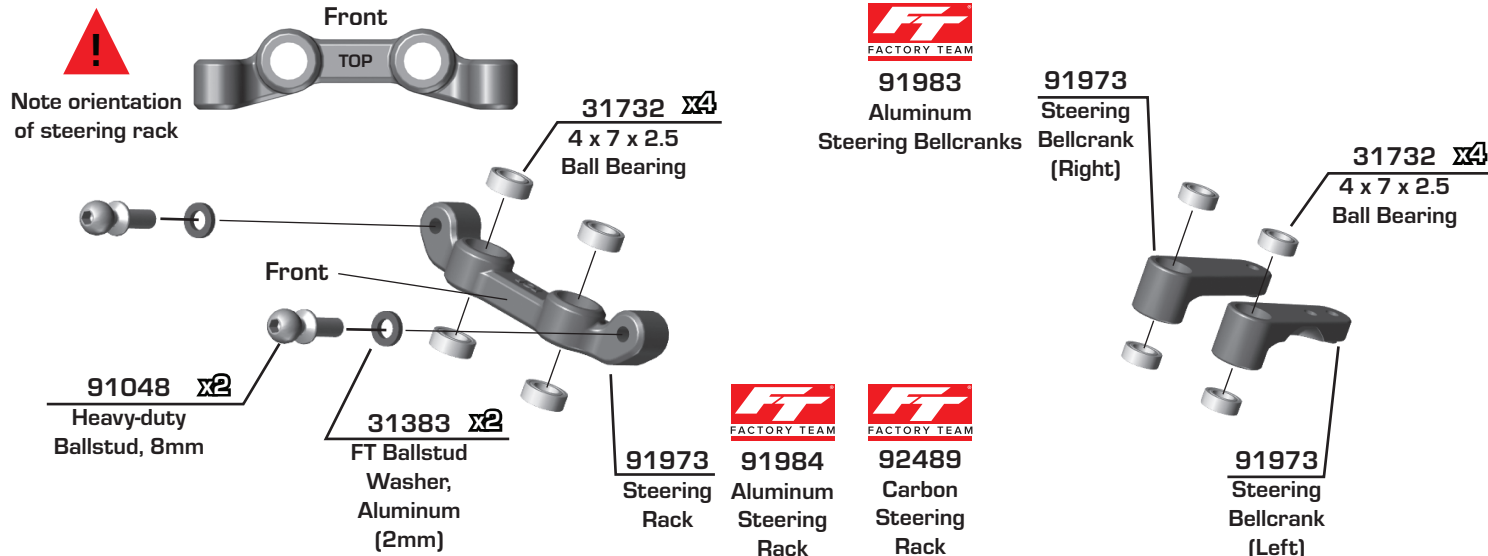


:: Bag 1 - Step 2

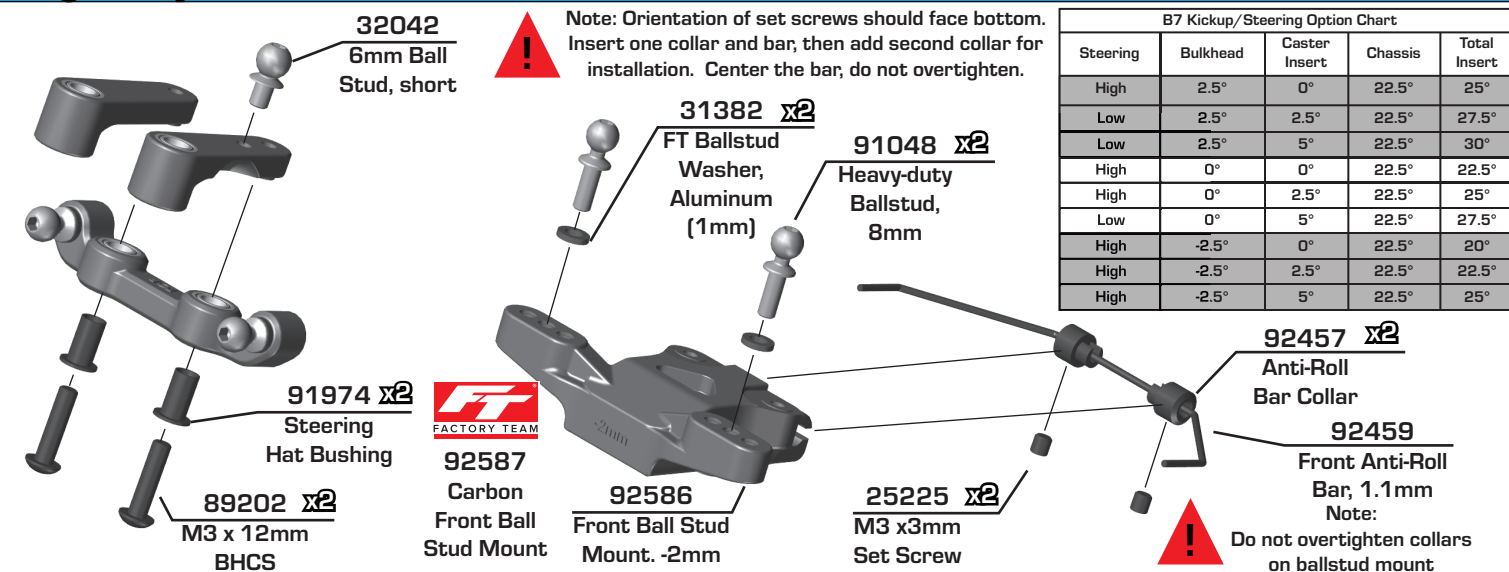


:: Bag 1 - Step 3

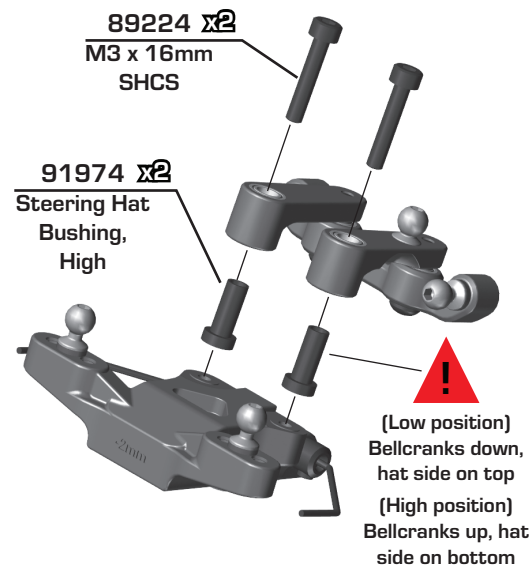


:: Bag 2 - Step 1

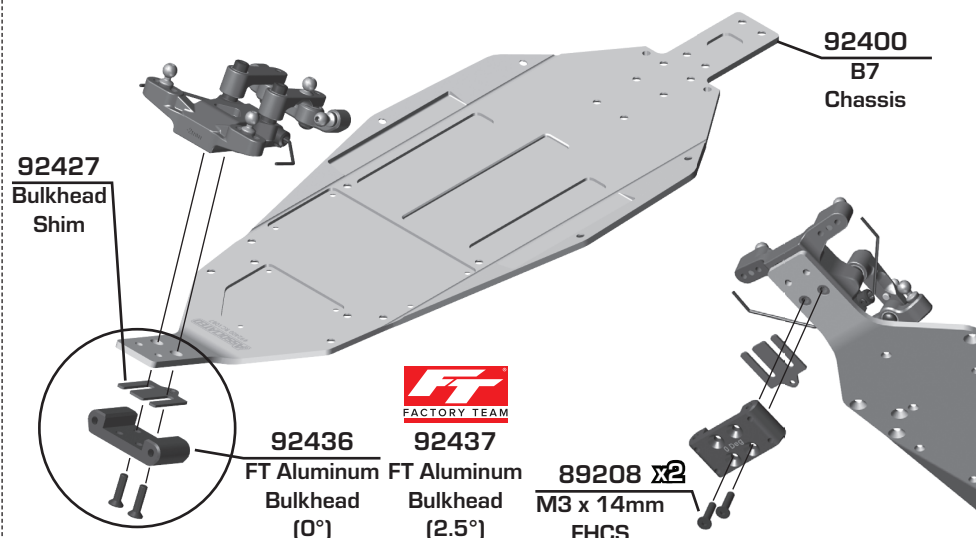


Bag 2 - Step 2

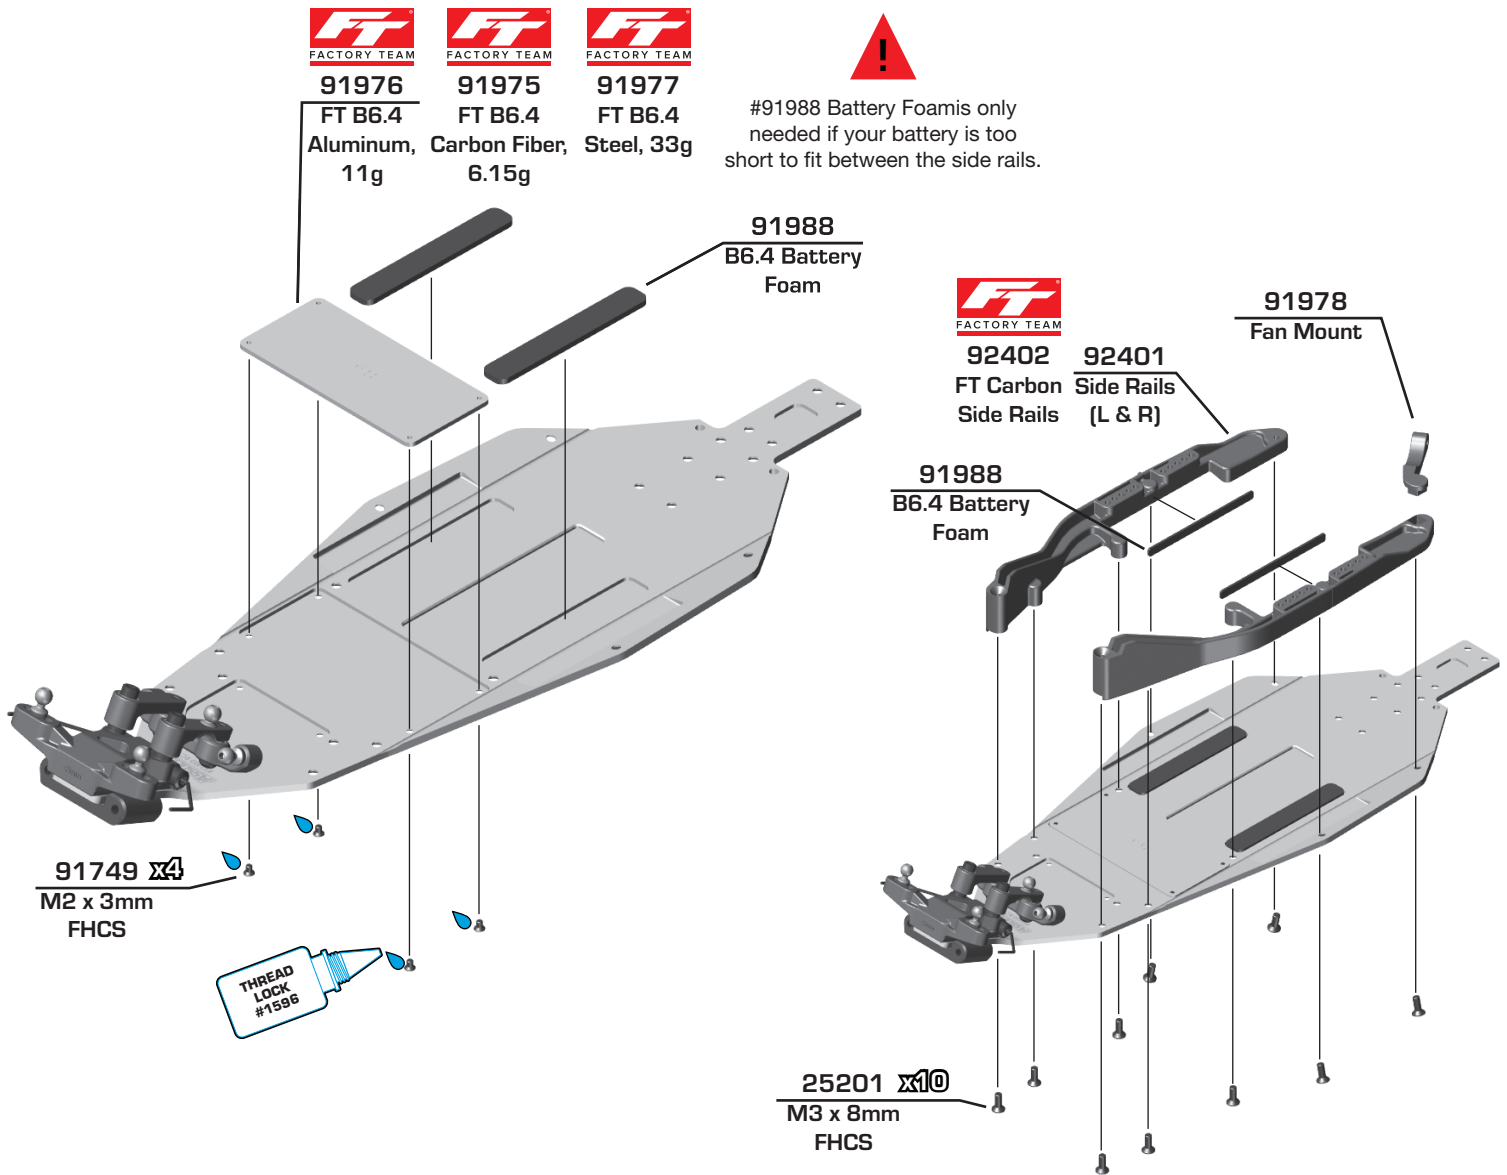


Bag 2 - Step 3

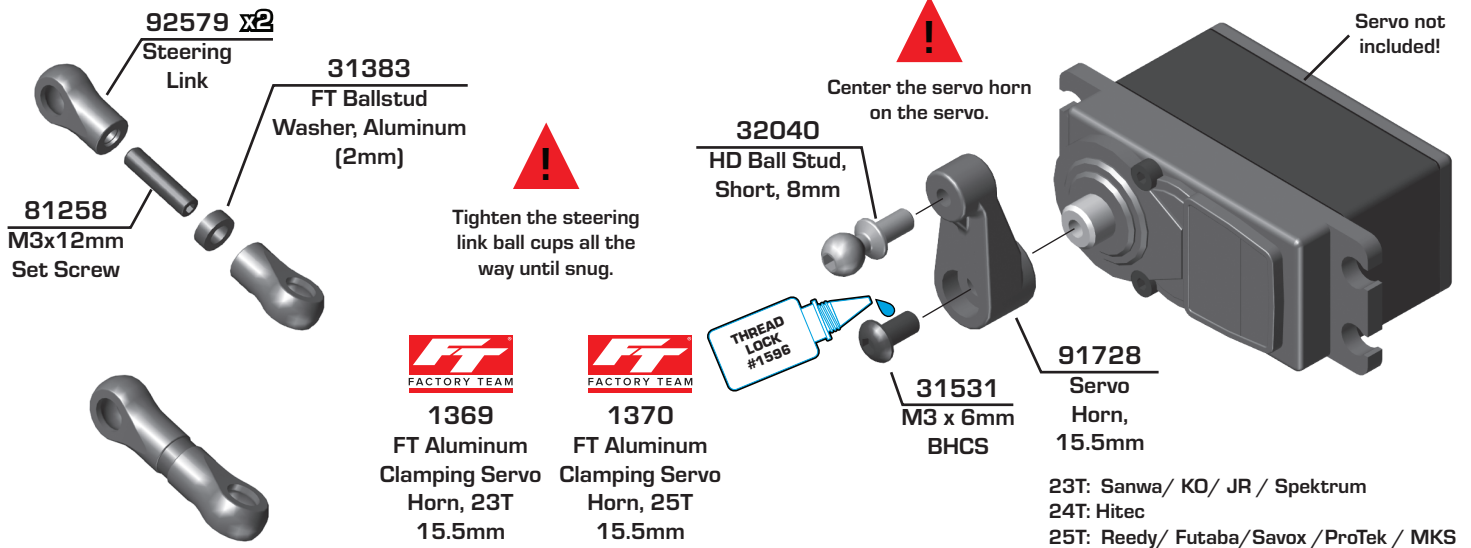


:: Bag 2 - Step 4

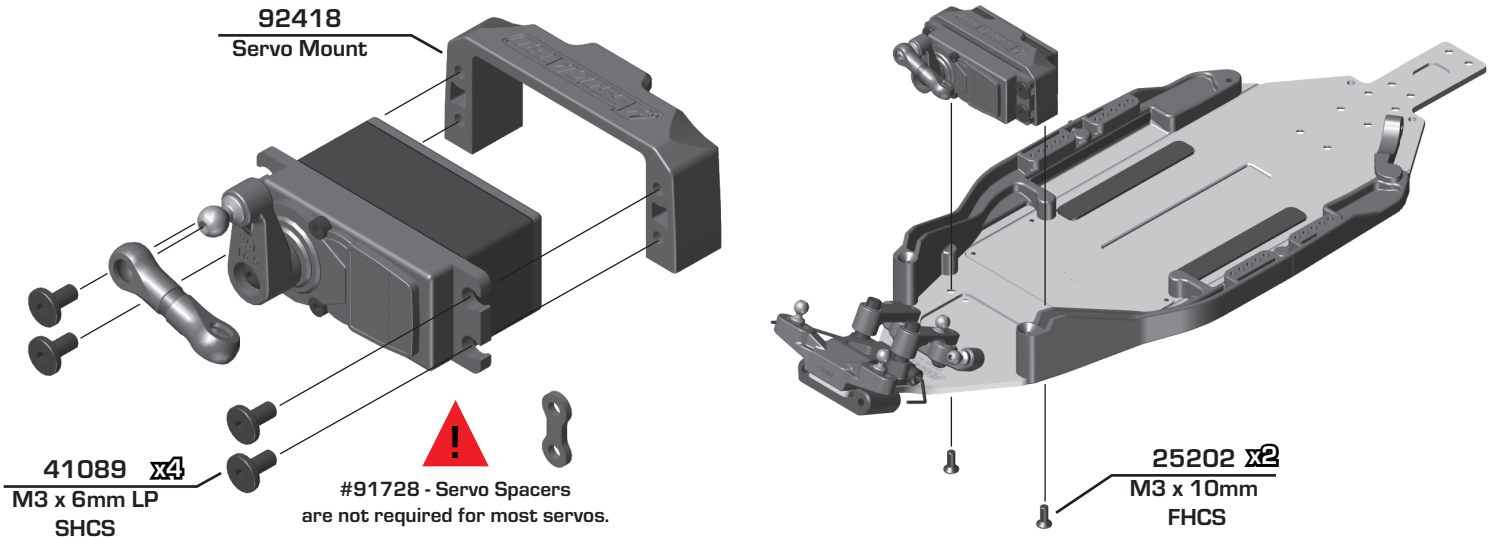


:: Bag 2 - Step 5

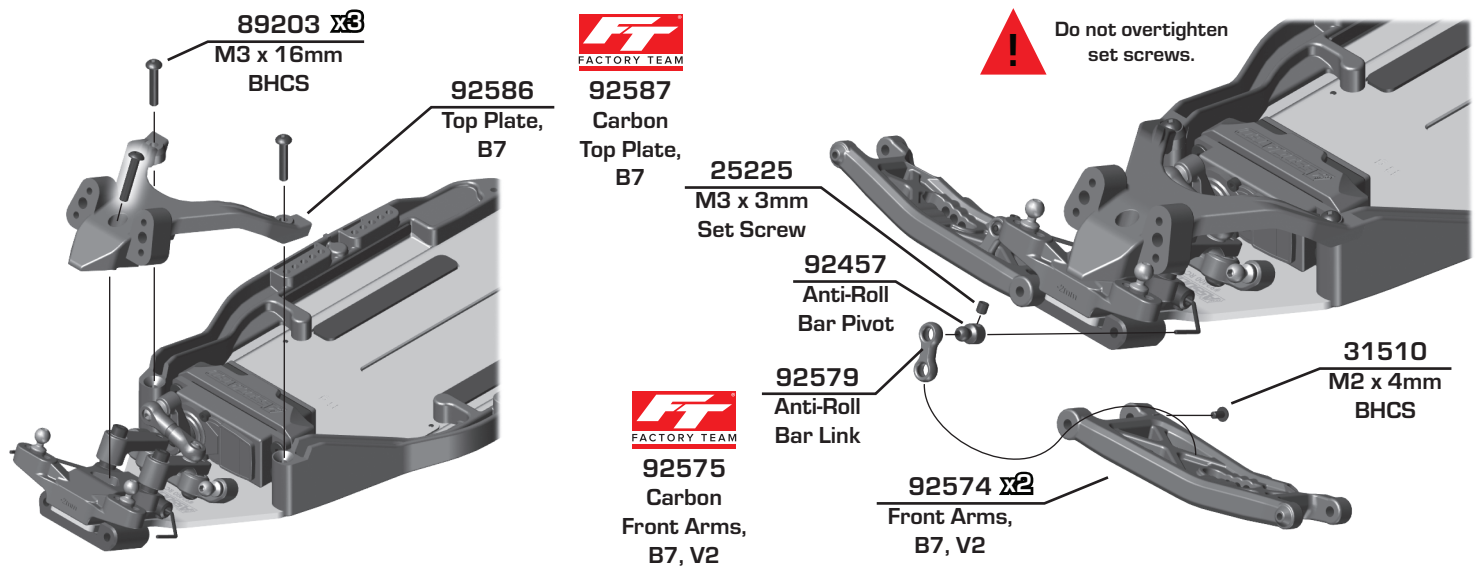


:: Bag 2 - Step 6

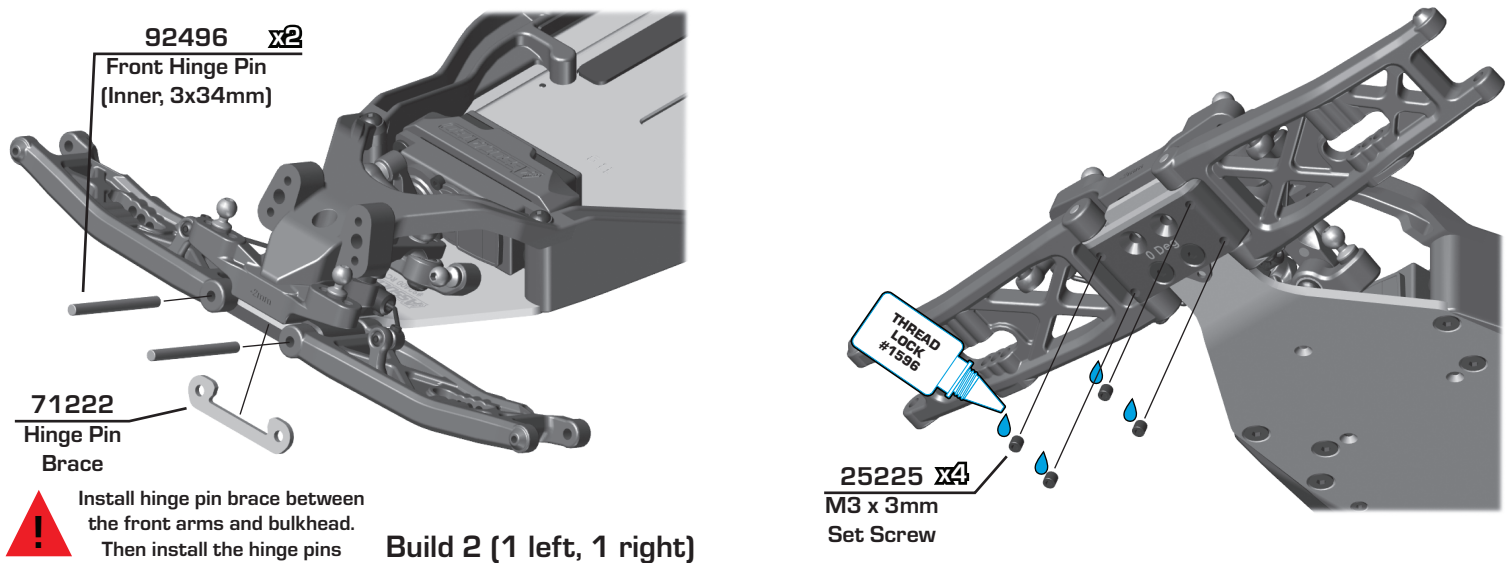


Bag 2 - Step 7

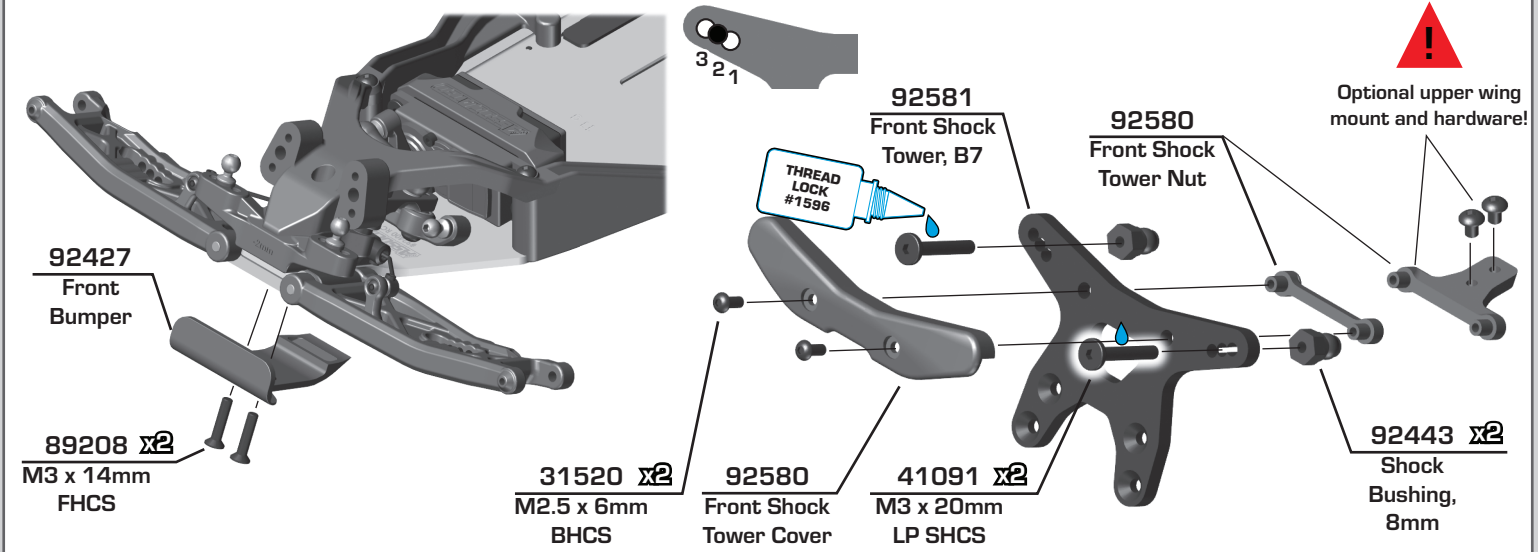


Bag 2 - Step 8

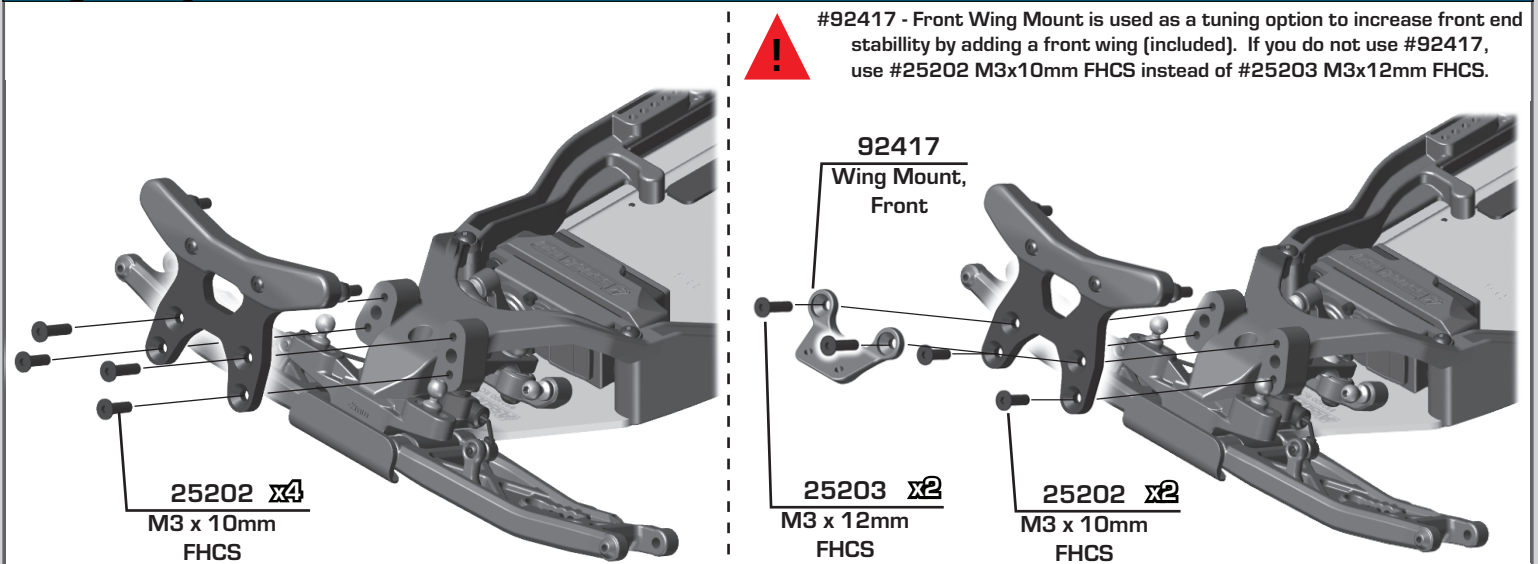


Bag 3 - Step 1

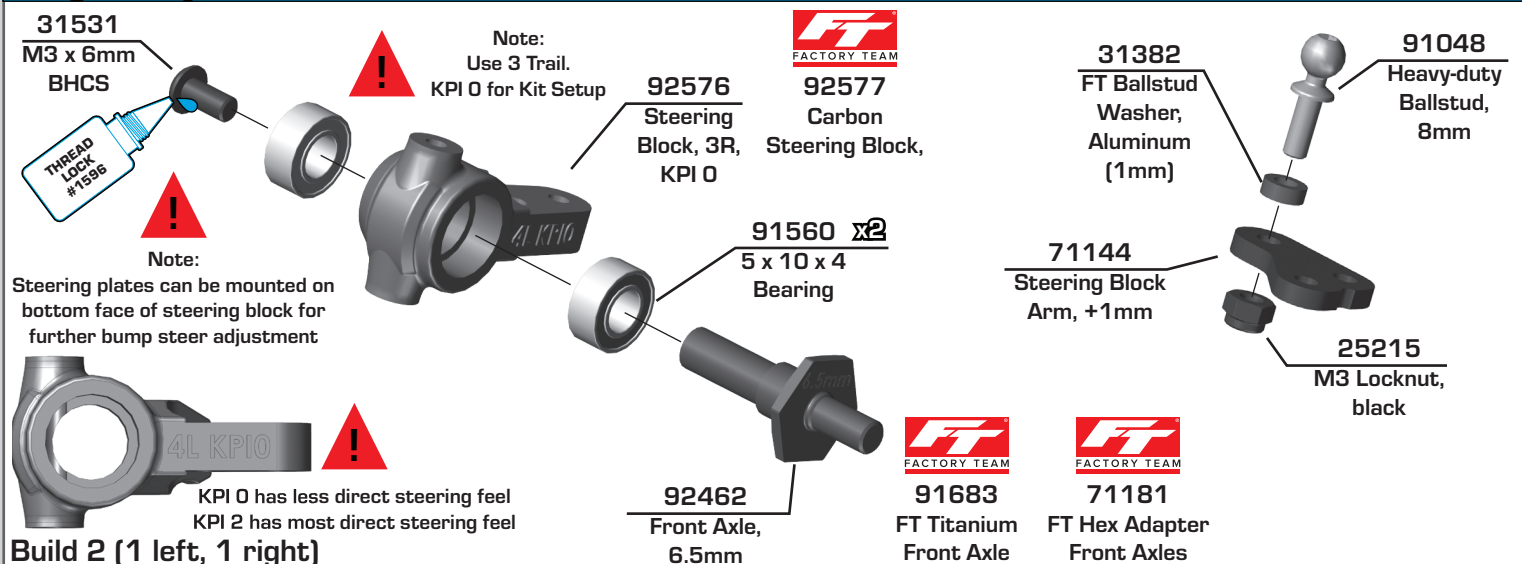


Bag 3 - Step 2

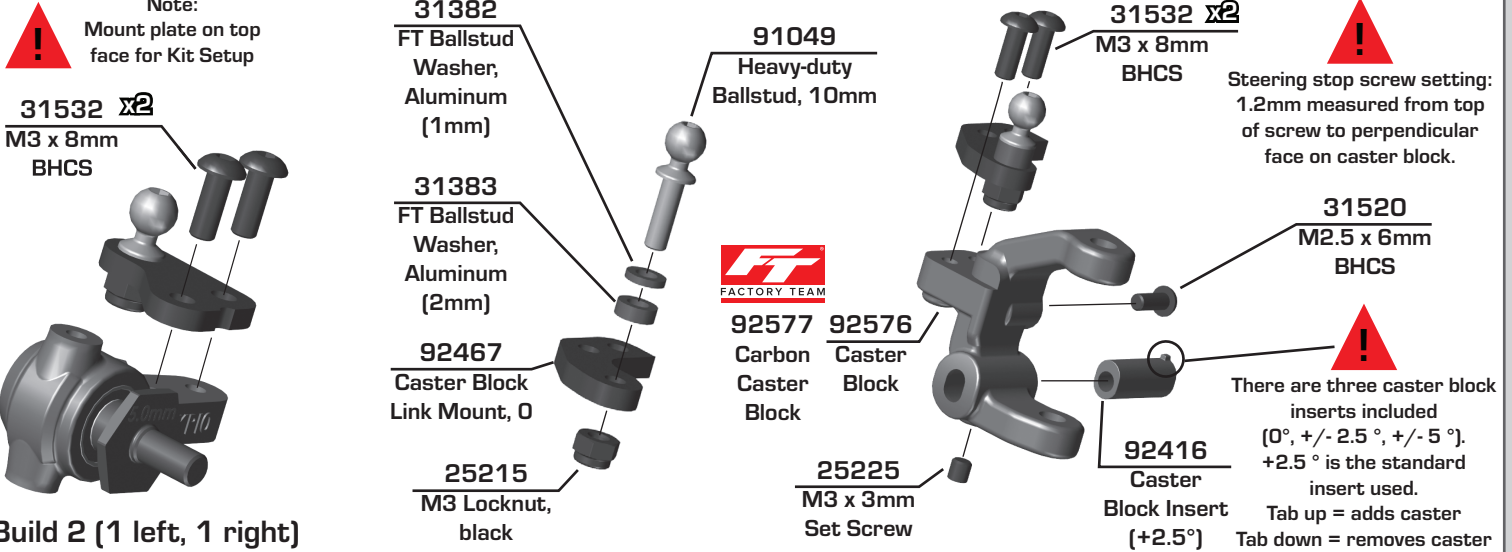


Bag 3 - Step 3

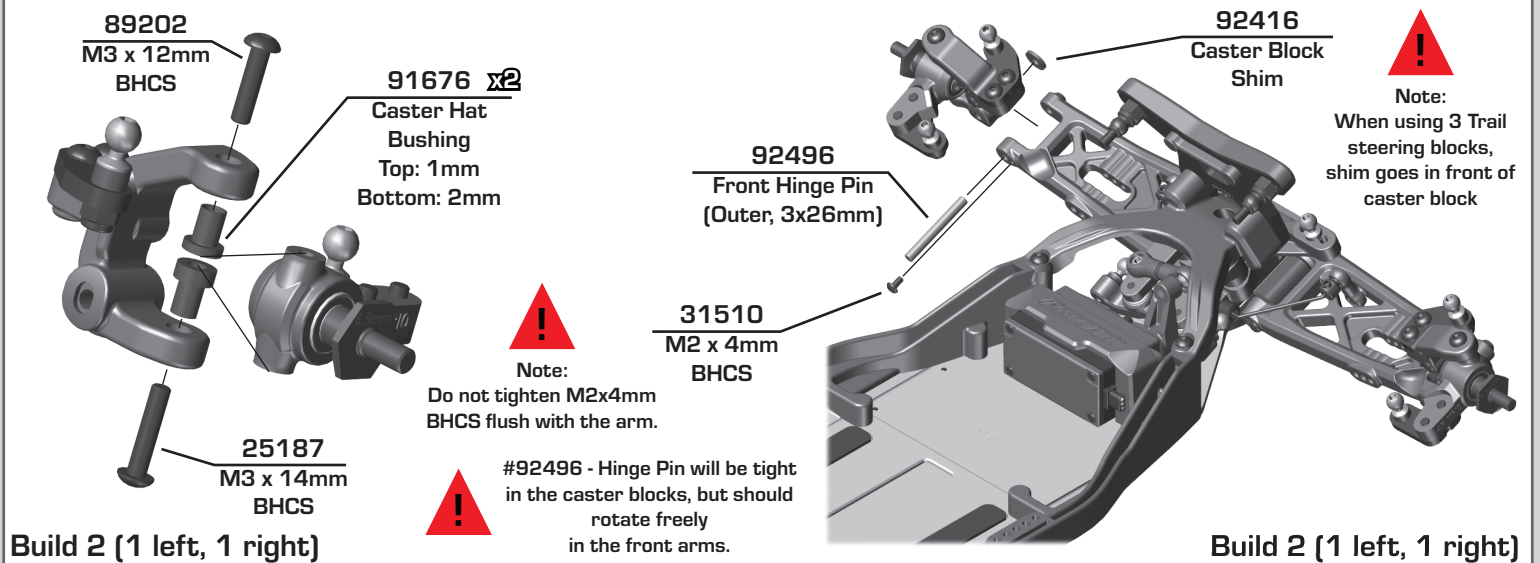

Bag 4 - Step 1

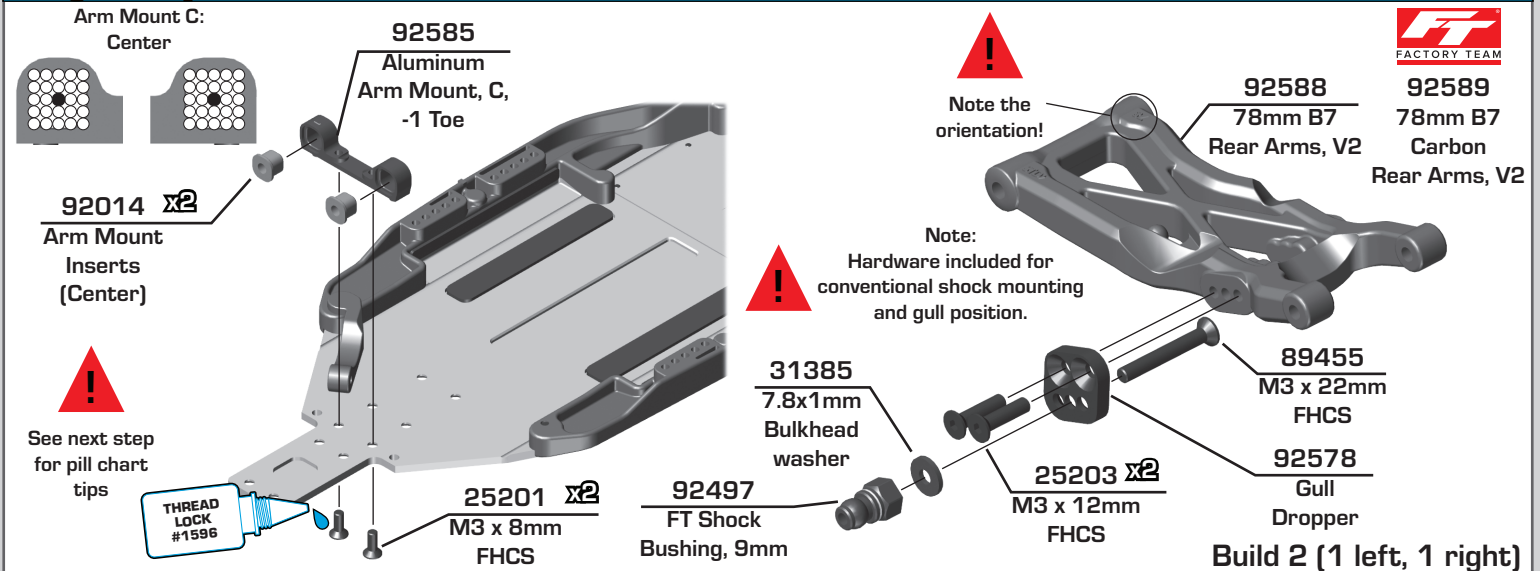

Bag 4 - Step 2

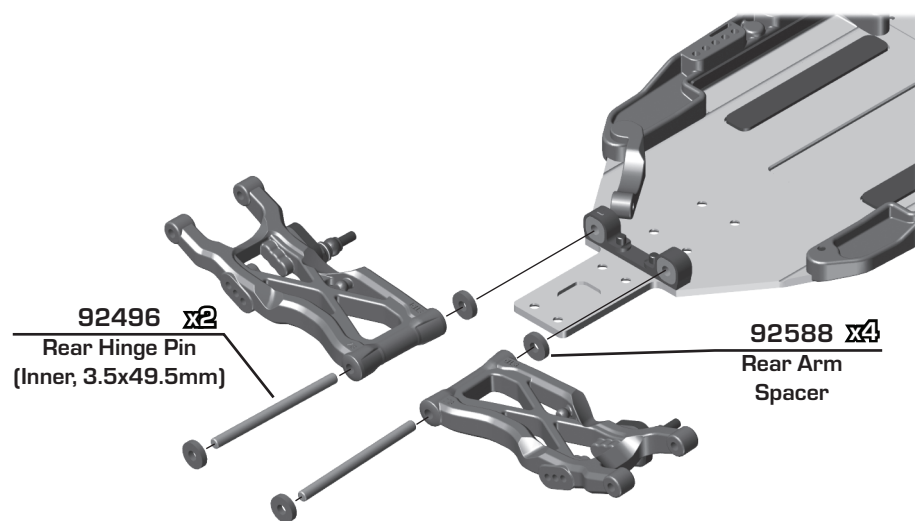


The (#92432) C and (#92433) D aluminum arm mounts allow for a large amount of setup combinations when using the (#92014) 0.5° and 1° arm mount inserts.


For a complete list of pill setup combinations, please visit our website by using the link below.
<http://bit.ly/B6PillChart>

Arm Mount C: Center	Toe-In	Anti-Squat
	2° Kit Setup	1° Kit Setup
Arm Mount D: Center		




Bag 5 - Step 1

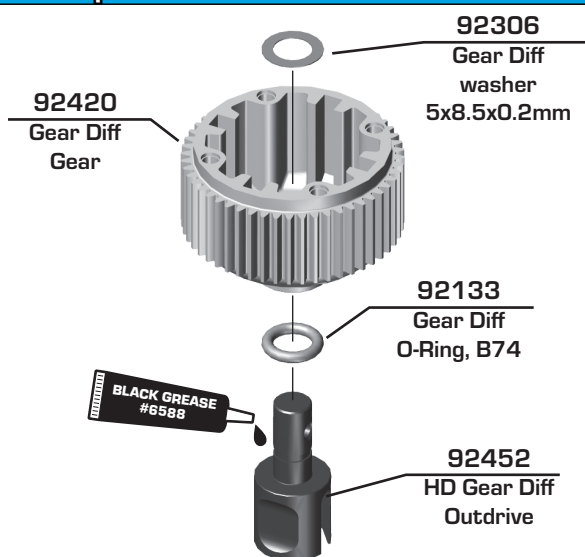


Note:
5x8.5x0.1mm shims
included for fine tuning gear
mesh as needed.

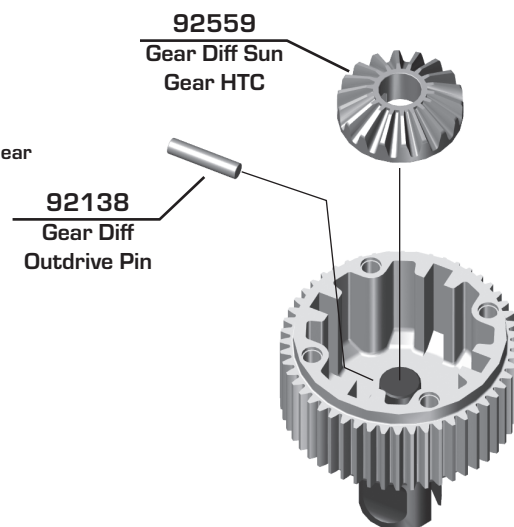


Bag 5 - Step 2

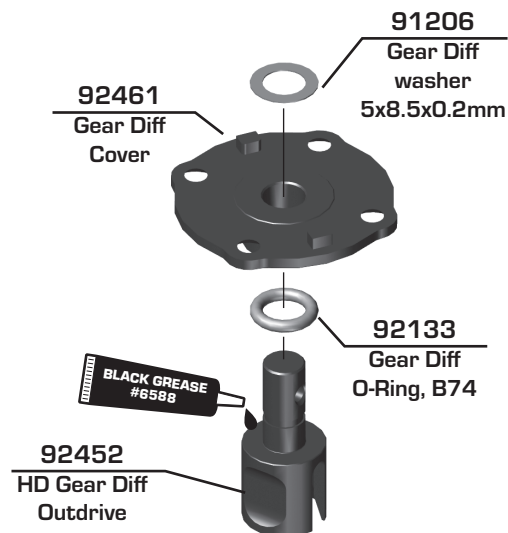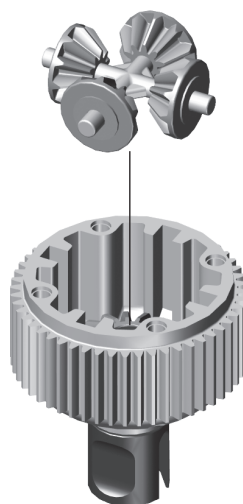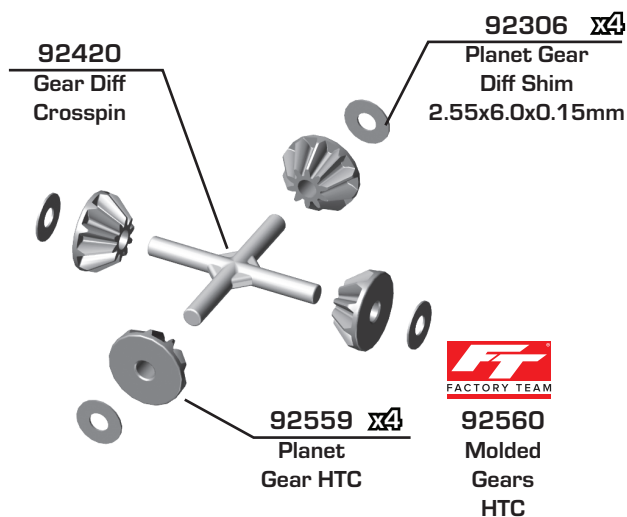


Bag 5 - Step 3

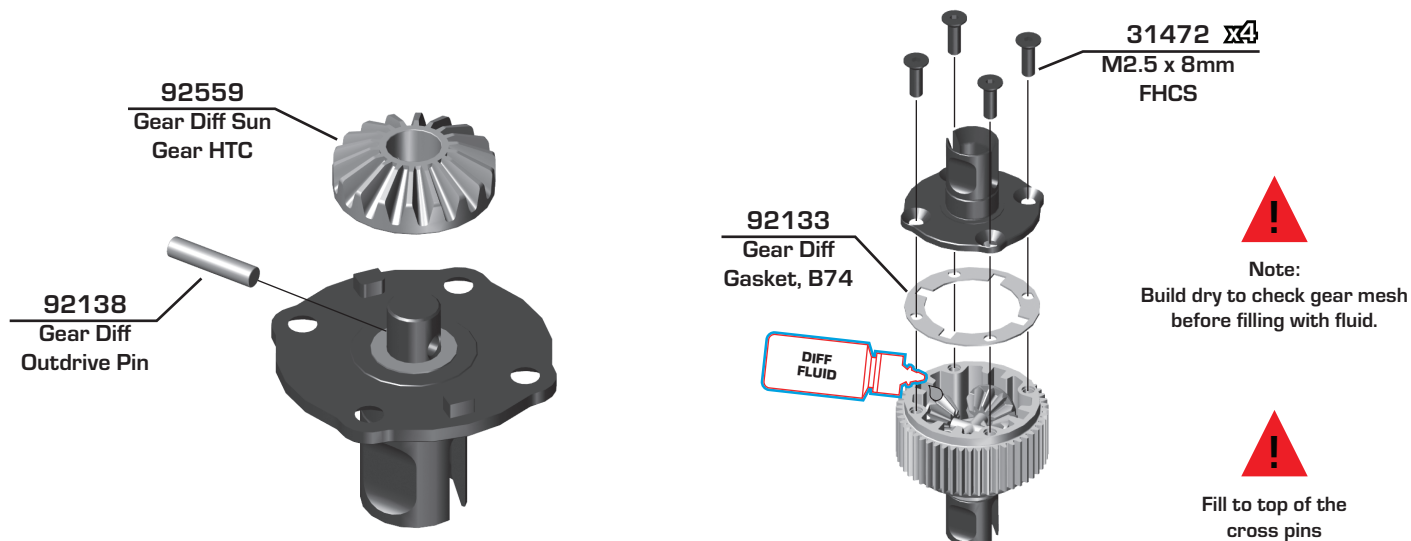


Bag 6 - Step 1

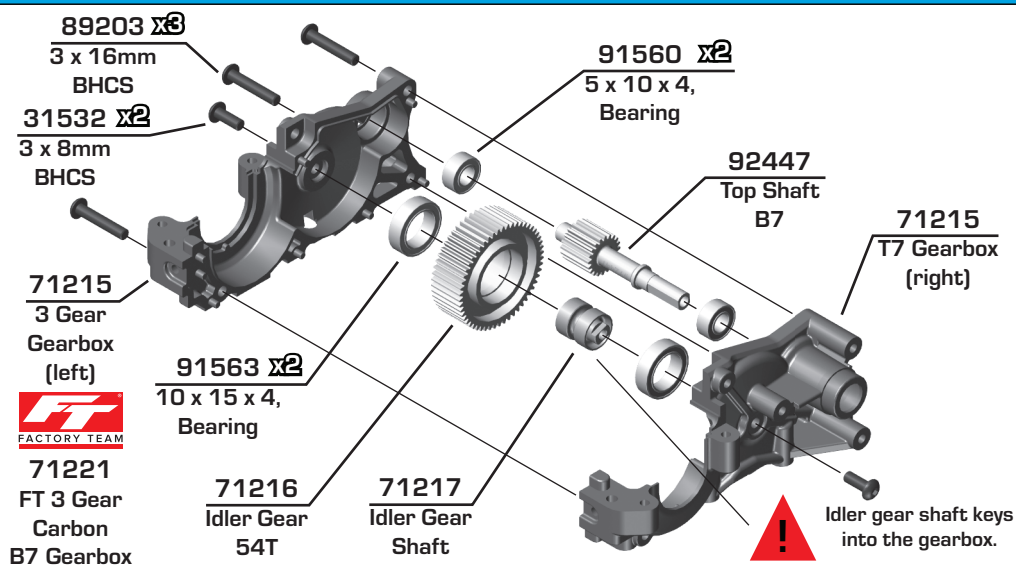


Bag 6 - Step 2

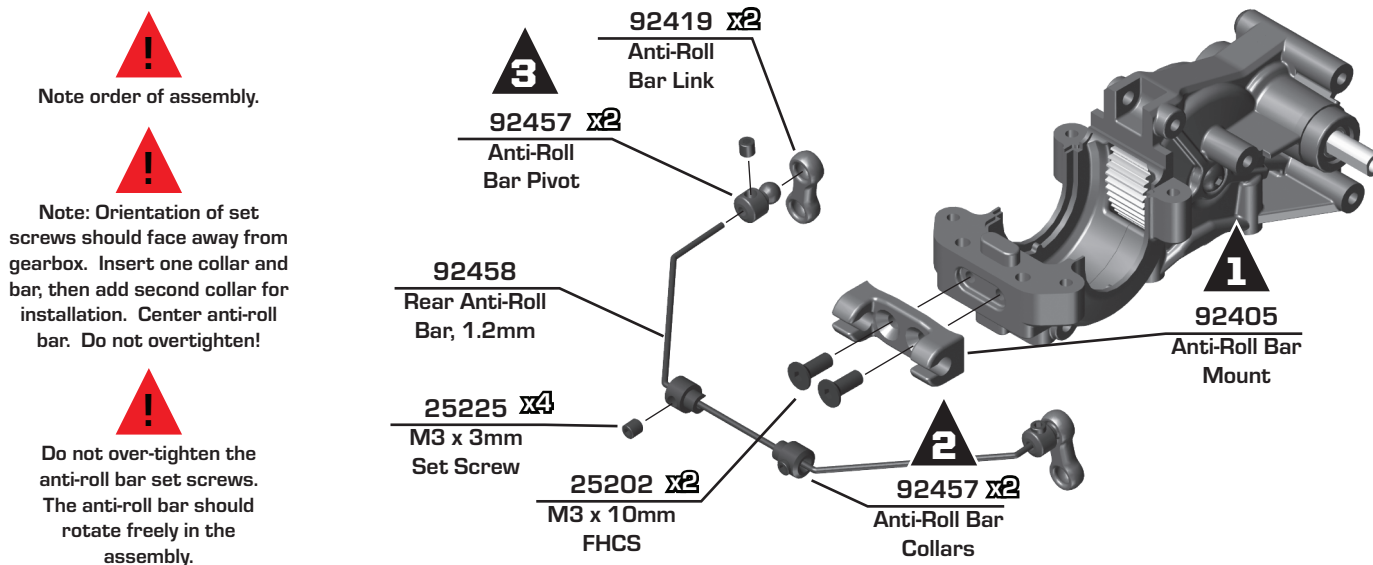

Bag 6 - Step 5

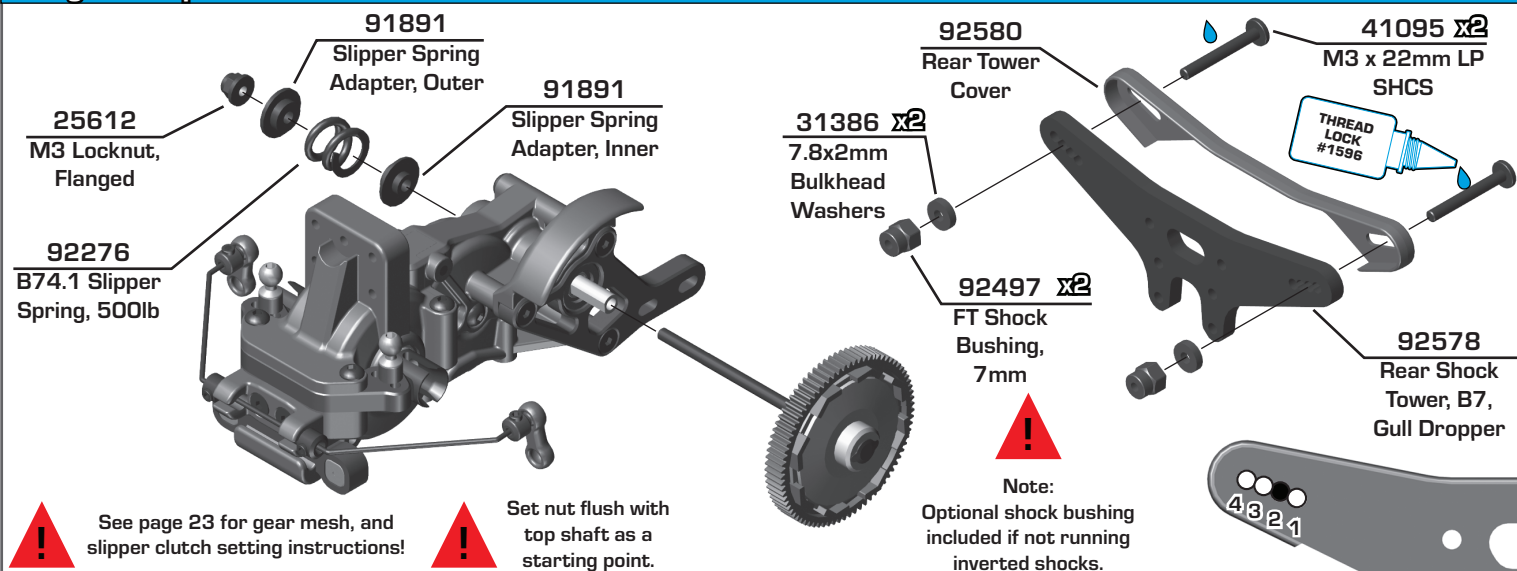

Bag 6 - Step 6

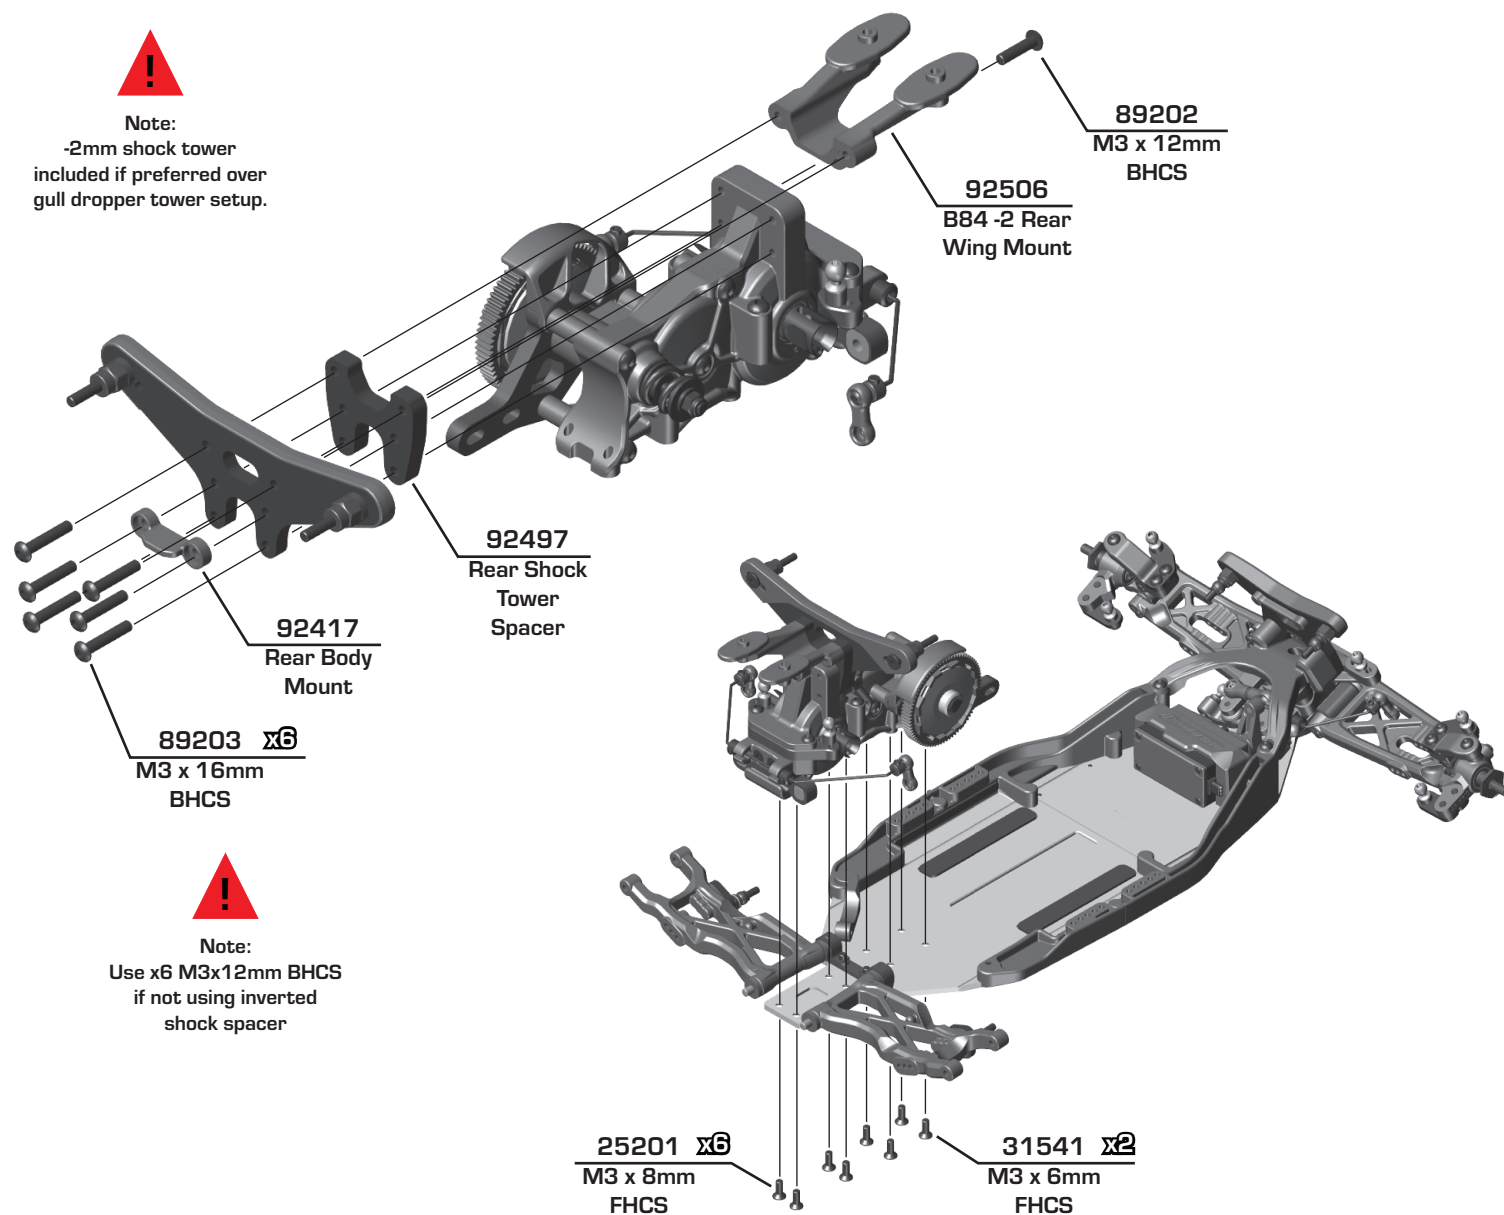

Bag 7 - Step 1

91051
Heavy-duty
Ballstud, 4mm

92441
Rear Hub Link
Mount, +1mm

31382 x2
Ballstud Washers,
5.5x1.0mm, blue

92412
B7 Rear
Hubs, HRC

92413
Carbon B7
Rear Hubs,
HRC

92179
Rear Hub
Inserts

89202 x2
M3 x 12mm
BHCS

81267 x2
M3 x 6mm
Set Screw

Thread Lock #1596

Note: HRC and Std hubs included in Kit.
HRC allows for higher axle heights (+2 positions)

Build x2 (right and left side)

Rear Axle Height

↑ 3	0 ↓	3 ↑	+3mm
↑ 2	1 ↓	2 ↑	+2mm
↓ 2	1 ↑	1 ↑	+1mm Kit Setup
↓ ε	0 ↑	0 ↑	+0mm

Bag 7 - Step 2

91438
CVA Coupler

92454
HD CVA
Bone,
69mm

91438
CVA Pin

91859
CVA Axle,
+2mm

BLACK GREASE #8588

Build x2

91563
10 x 15 x 4
Bearing

91567
5 x 12 x 4
Bearing

Build x2 (right and left side)

Bag 7 - Step 3

91436
CVA Wheel
Hex Pin

71034
Clamping Wheel Hex,
6mm Offset (rear)

91611
M1.6 x 5mm
SHCS

Do not overtighten the 1.6 x 5mm SHCS into the Clamping wheel hex.

Build x2 (right and left side)

92188
Rear Hub
Hinge Pin


25215
M3
Locknut

92179 x2
Rear Hub
Spacer

Hinge Pin will be tight in the rear hub, but should rotate freely in the rear arms.


Build x2 (right and left side)

:: Bag 8 - Step 1

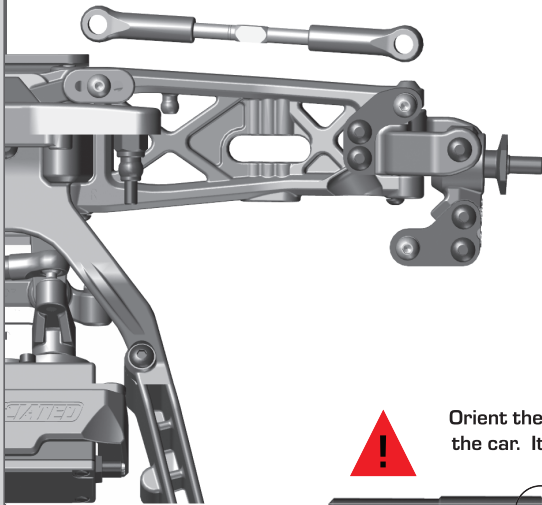


Racers Tip:

Use black grease (#6588) on the threads of the turnbuckles for easier ball cup installation!

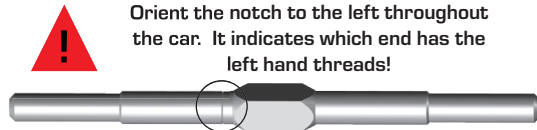

! Orient the notch to the left throughout the car. It indicates which end has the left hand threads!

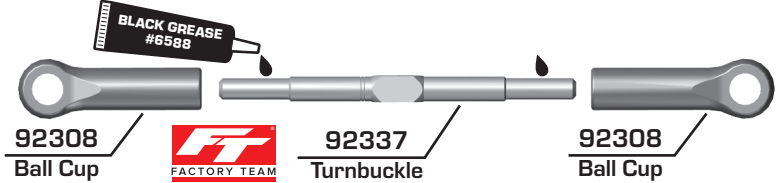


! Measurements given are approximation. Camber should be set with a gauge at ride height.

Front Camber Turnbuckle
25.70mm




Build x2 (right and left side)


:: Bag 8 - Step 2

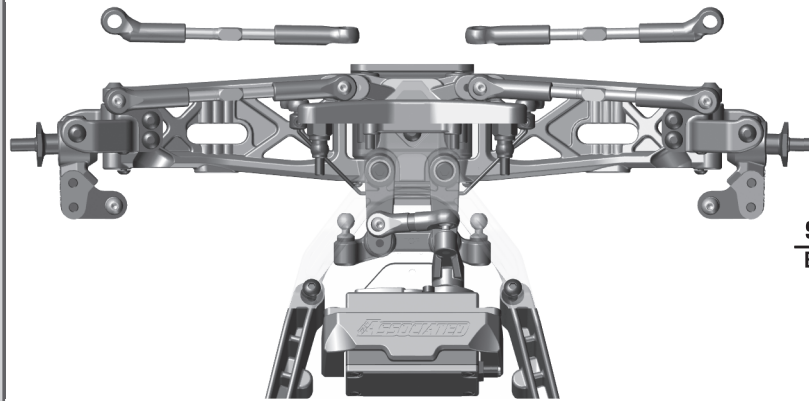

There are two offset ballcups labeled "1" and "2". The ballcup labeled "1" goes on the right side of the vehicle.

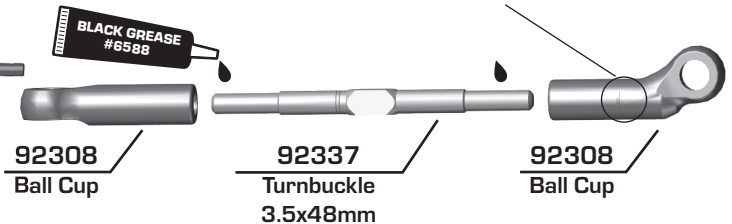


Steering Turnbuckle
27.00mm




Build x2 (right and left side)

:: Bag 8 - Step 3

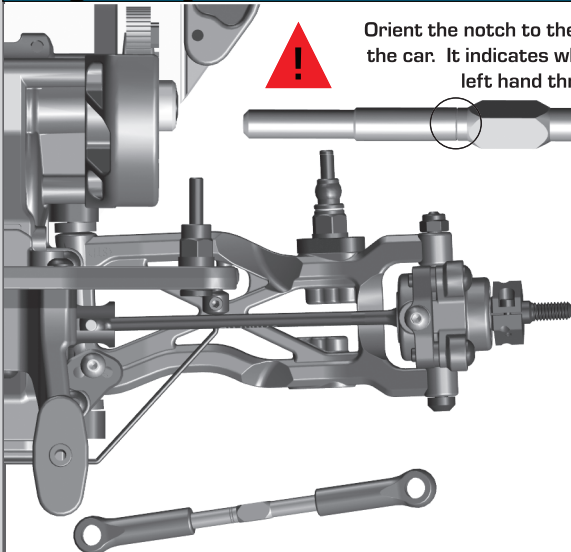


! Orient the notch to the left throughout the car. It indicates which end has the left hand threads!

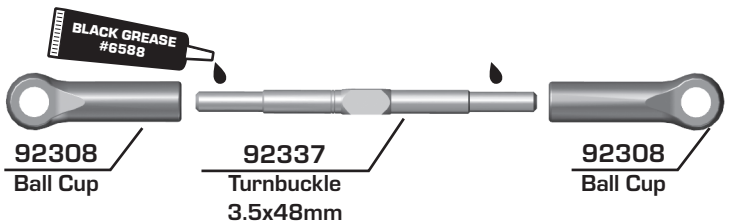



! Measurements given are approximation. Camber should be set with a gauge at ride height.

Rear Camber Turnbuckle
27.20mm




Build x2 (right and left side)

Bag 9 - Step 1

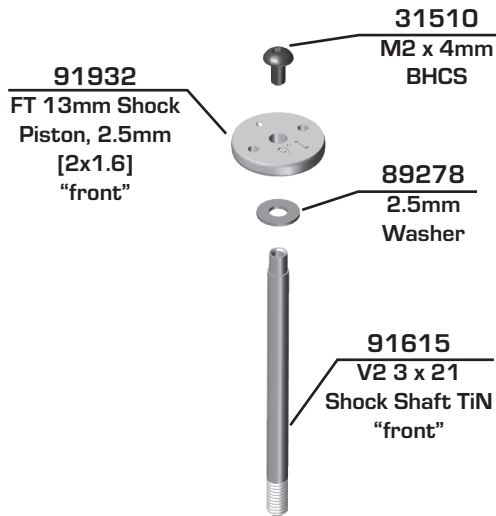


Use a marker over the
numbers on the pistons to
make them easily visible!

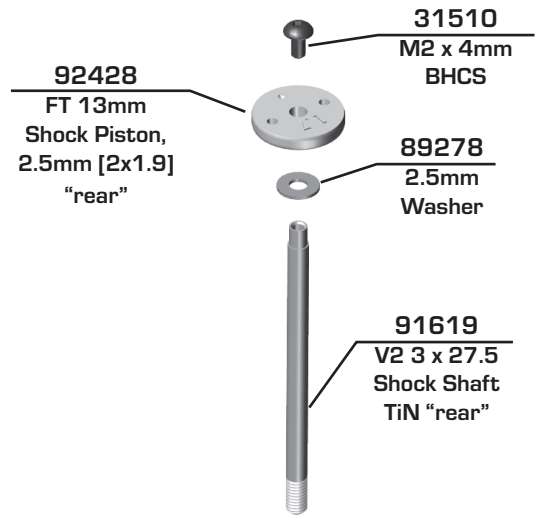

Build x2 front shocks


Build x2 rear shocks

Bag 9 - Step 2

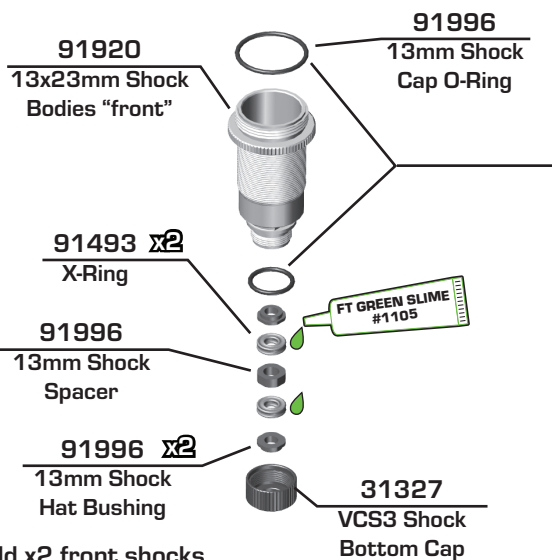


Coating the O-rings with
green slime (#1105) helps
seal & reduce O-ring swell!
Green slime not included
in kit!

Build x2 front shocks

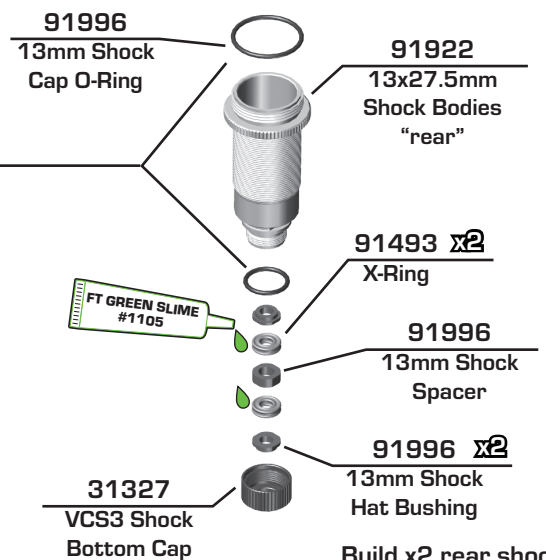


Build x2 rear shocks


Bag 9 - Step 3

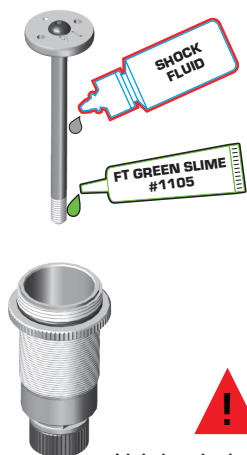


Lightly rub shock fluid or
green slime on threads

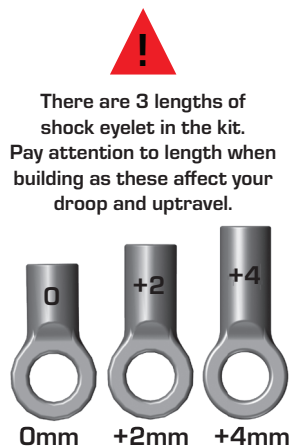

There are 3 lengths of
shock eyelet in the kit.
Pay attention to length when
building as these affect your
droop and uptravel.

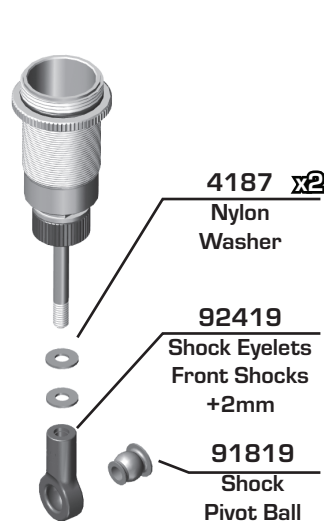

Build x2 front shocks

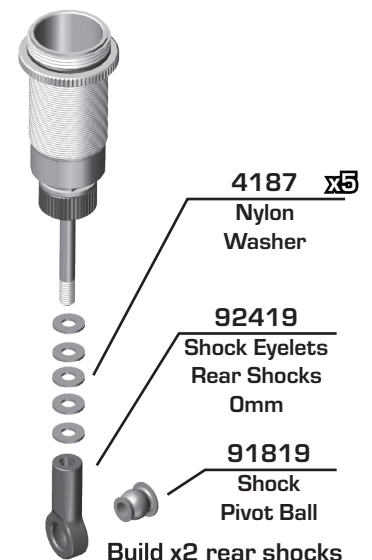

Build x2 rear shocks

:: Bag 9 - Step 4

SHOCK FLUID

Front Shock: 35wt #5429
Rear Shock: 30wt #5422

91926
13mm Shock Cap

Steps 2-3 Steps 4-5 Steps 6-7 Step 8

Shock Bleeding Steps:

1. Before assembly, get each bleed screw and thread it 1-2 turns into the shock cap, then remove the screw. This will make it easier when you are bleeding your shocks.
2. Pull shock shaft down.
3. Fill shock body 3/4 full with silicone shock fluid.
4. Slowly move the shock shaft up and down to remove air from under the piston.
5. Wait for bubbles to come to surface.
6. Fill shock body to top with silicone shock fluid.
7. Place a drop of oil in the cap and on cap threads.
8. Install cap (without bleed screw) and tighten completely.
9. Slowly compress shaft all the way to bleed excess silicone shock fluid out the hole in the cap (use rag around shock to catch excess fluid).
10. Install M2x4mm button head screw until snug while shaft is fully compressed.

31510
M2 x 4mm
BHCS

Stroke

Stroke
Front: 20mm
Rear: 29mm

Steps 9-10

:: Bag 9 - Step 5

91996 x4
13mm Threaded Collar O-ring

91928 x4
13mm Threaded Collar

Build x4

91946
13mm Front Spring, Purple (4.60lb)

91959
13mm Rear Spring, Purple (2.60lb)

Racers Tip:
Use your finger to rub shock fluid on the O-ring for smoother adjustment!

:: Bag 9 - Step 6

91966
13mm Shock Spring Cup (Front - 5mm)

Build x2 front shocks

91966
13mm Shock Spring Cup (Rear - 5mm)

Build x2 rear shocks

!
Screw collars to top.
Use to adjust ride height.


#91966 13mm Shock Spring Cups

0mm 5mm 9mm

Bag 9 - Step 7



Use outer
hole in
front arm!

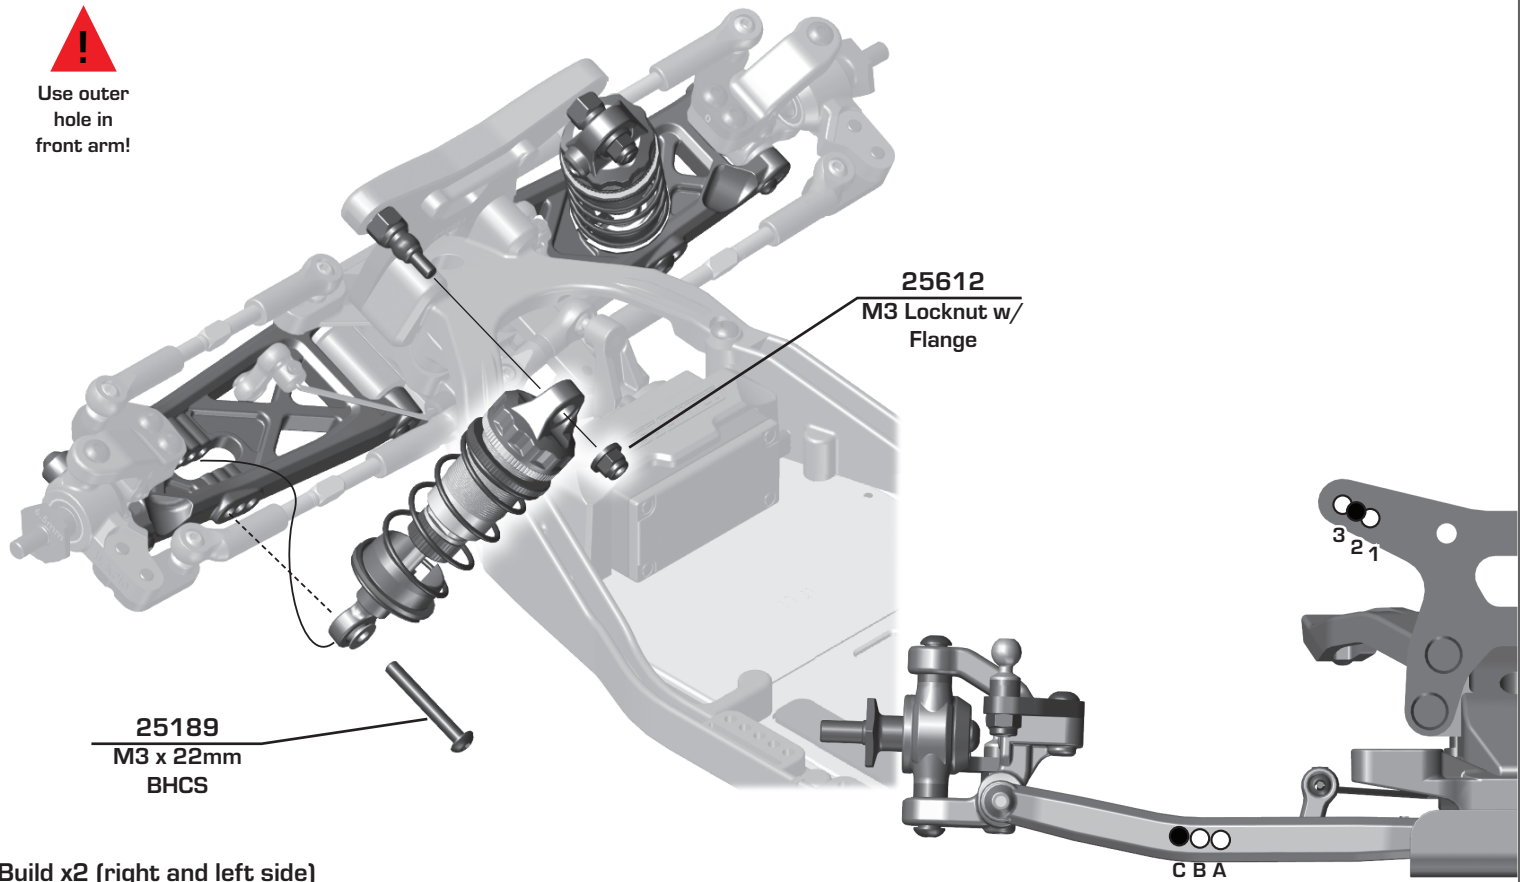


Build x2 (right and left side)

Bag 9 - Step 8



Make sure the flange on
the shock pivot ball is
towards the rear arm.

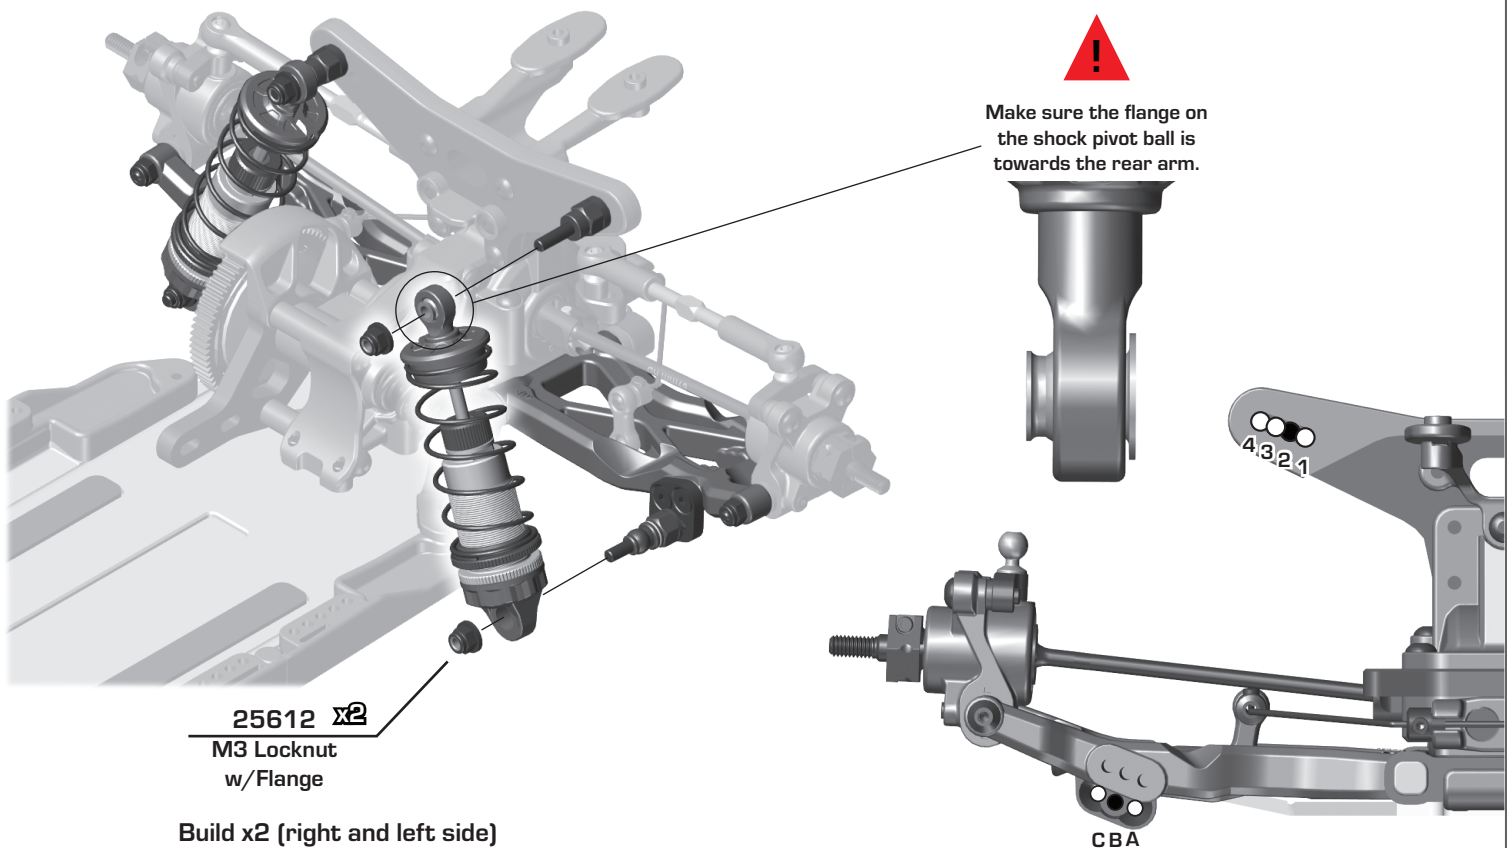


Build x2 (right and left side)


Bag 10 - Step 1




See page 25 for gear mesh setting instructions!

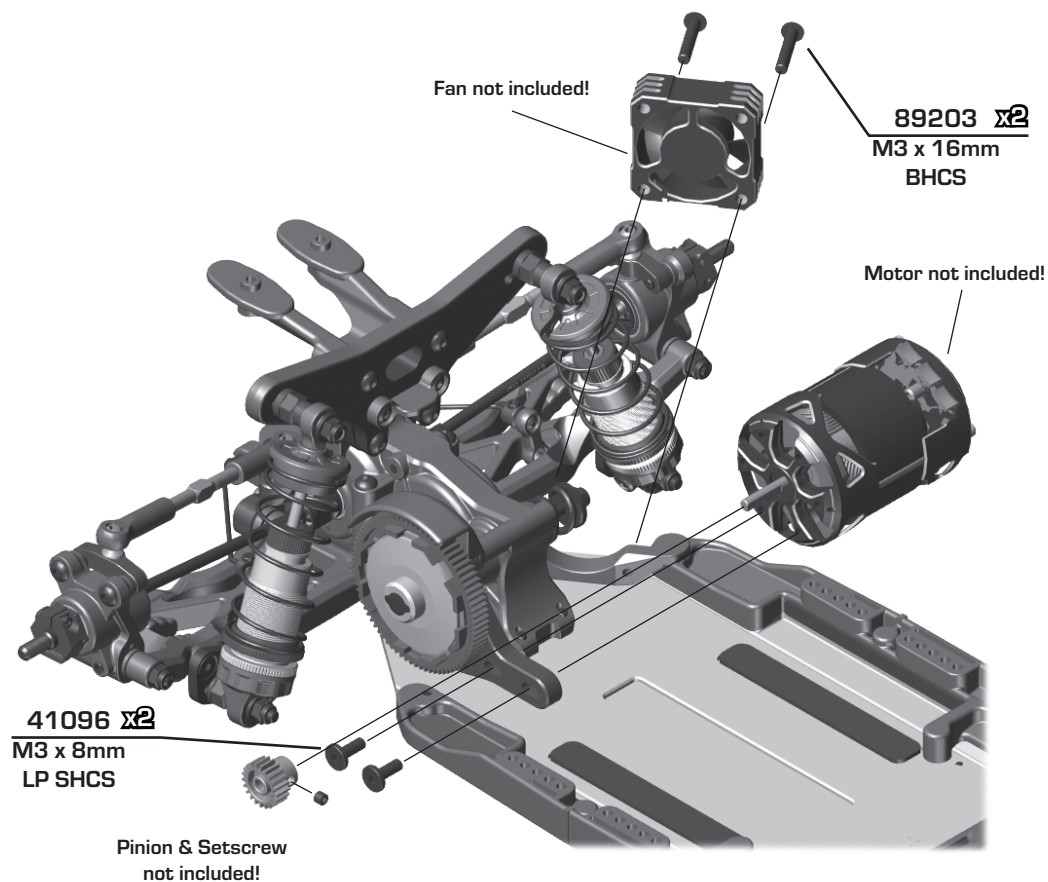

Bag 10 - Step 2

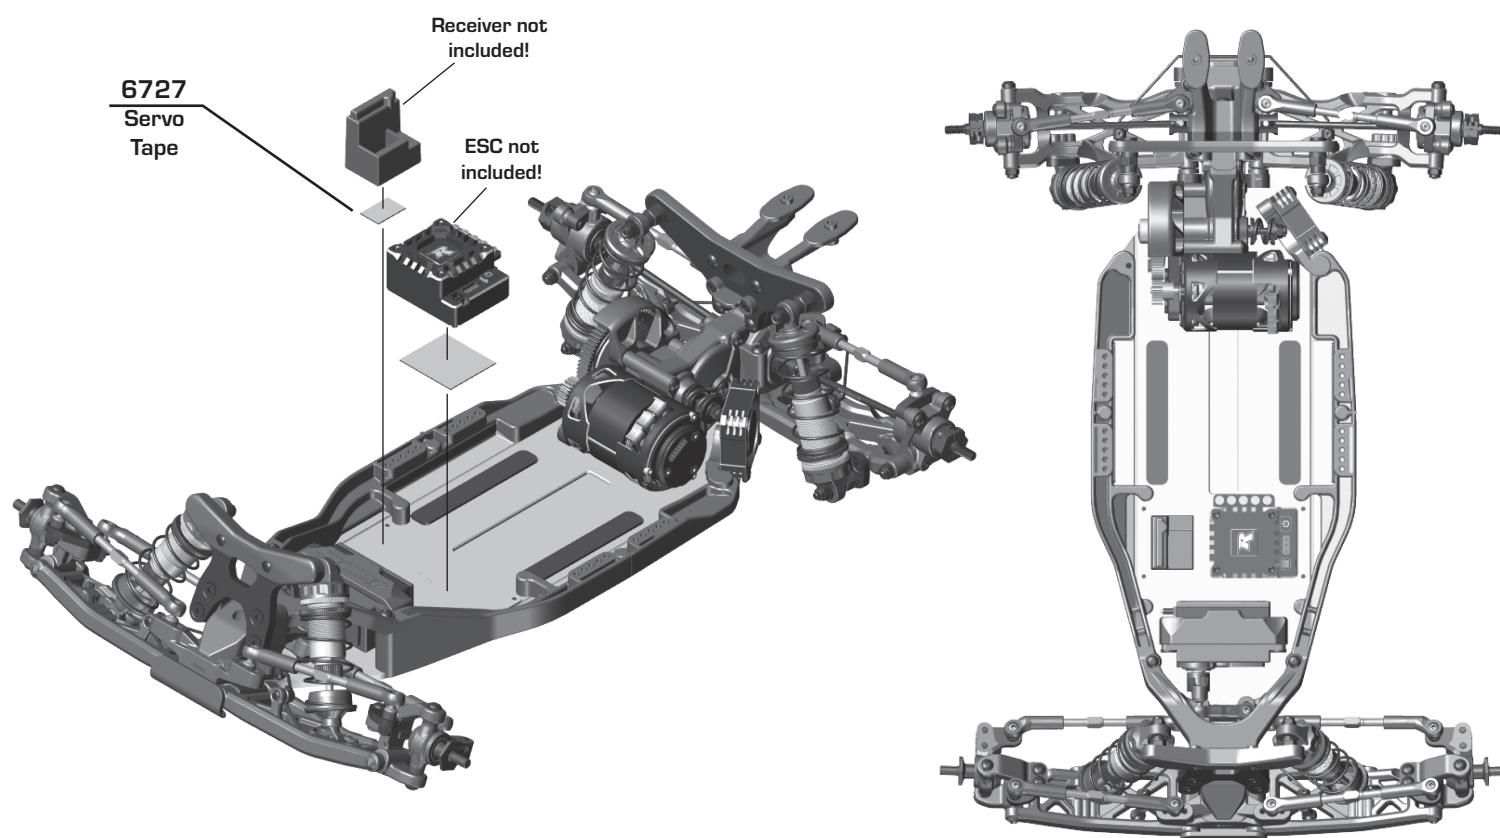


Bag 10 - Step 3

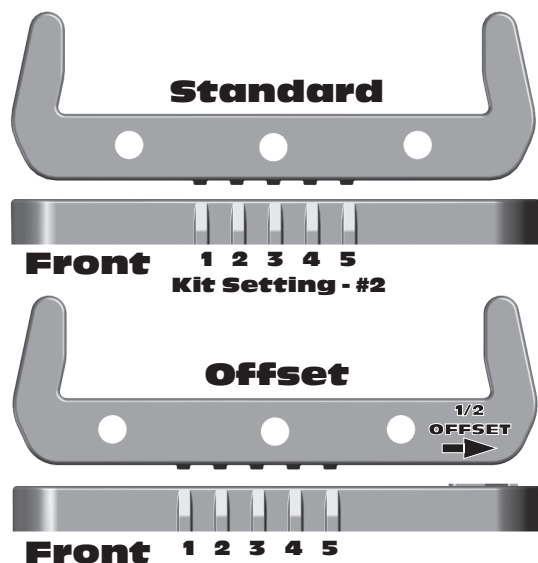

Standard and Low Profile battery thumb screws are included. Shims may need to be added if battery weights are used.

Use M3 x 18mm for standard height

Use M3 x 12mm LP height

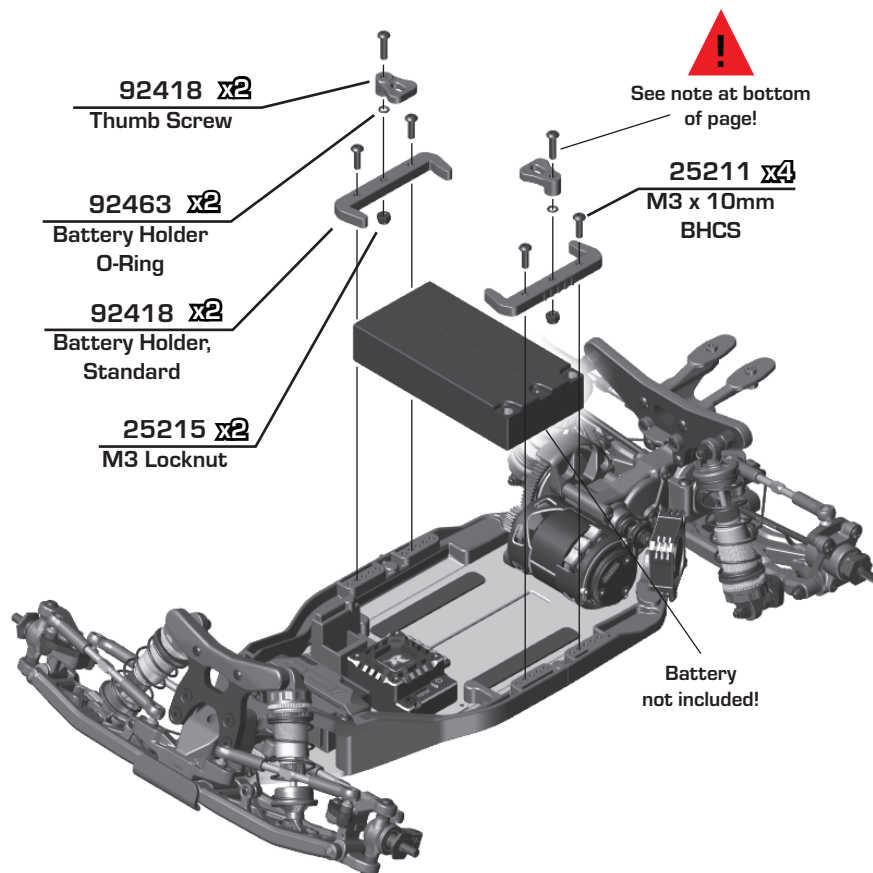

See note at bottom of page!

Bag 10 - Step 4

91158 x2
M3 x 4mm BHCS

92425
B7 Wing, front





92422
B7 Body, clear



92423
B7 Body, Clear (Light Weight)



There are two options for trimming the kit body on the left rear side. Dotted line is preferred if you run a motor fan.

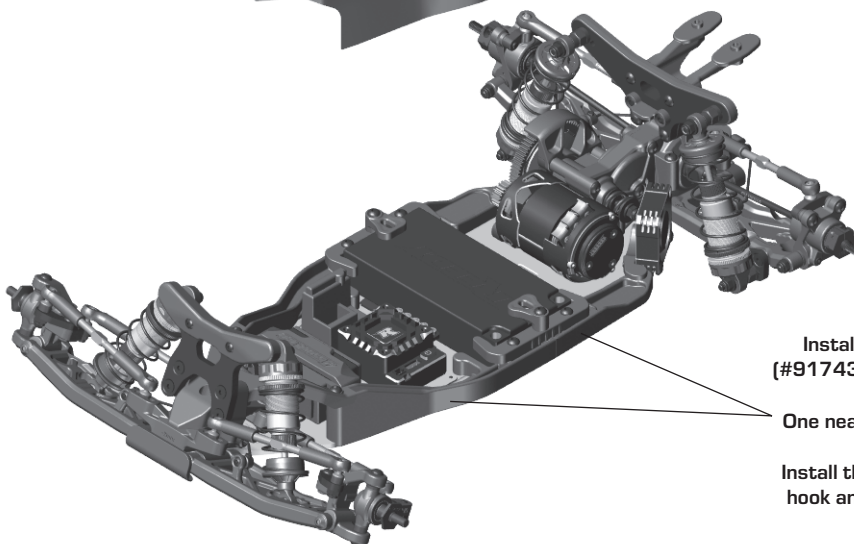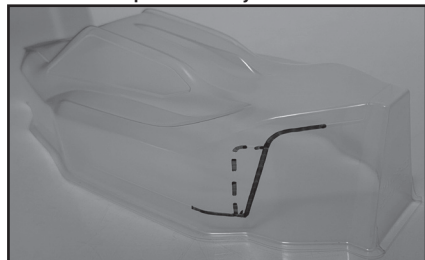

Install hook and loop tape (#91743) along the side braces in 2 spots. One near the front, and one in the middle. Install the opposite side of the hook and loop tape inside the body!

Bag 10 - Step 5

92424
Wing, B7

25202 **x2**
M3 x 10mm
FHCS

92417
Wing
Button

92417
Wing
Mount


Install button and washer
with wing mount

Wing Mount

6° - Mount under wing - KIT

3° - Mount on top of wing

0° - Mount under wing

Front of Vehicle
←

Bag 10 - Step 6

Wheels, Tires, and Inserts
are
not included!

FT TIRE
ADHESIVE
#1597


Carefully apply CA glue (tire
adhesive) to the tire bead on
the side. Do one side at a time,
allowing it to dry before gluing the
other side!
CA glue not included!

Build x2

Build x2

Wheels, Tires, and Inserts
are
not included!

91150 **x2**
M4 Low Profile
Serrated Steel
Wheel Nuts

Build 2 (1 left, 1 right)

Tuning Tips - Painting, Beginners

Painting:

Your Kit requires a clear polycarbonate body. You will need to prep the body before you can paint it. Wash the INSIDE thoroughly with warm water and liquid detergent (do not use any detergents with scents or added hand lotion ingredients!). Dry the body using a clean, soft, lint-free cloth. Use the supplied window masks to cover the windows from the INSIDE of the body (RC bodies get painted on the inside). Using high quality masking tape, apply tape to the inside of the body to create a design. Spray (use either rattle can or airbrush) the paint on the inside of the body (preferably dark colors first, lighter colors last). NOTE: ONLY use paint that is recommended for (polycarbonate) plastics. If you do not, you can destroy the body! After the paint has completely dried (usually after 24 hours), cut the body along the trim lines. Make sure to drill or use a body reamer to make the holes for the antenna if needed! Use hook and loop tape to secure the body to the side rails of the vehicle.

Tips for Beginners:

Before making any changes to the standard setup, make sure you can get around the track without crashing. Changes to your vehicle will not be beneficial if you can't stay on the track. Your goal is consistent laps. Once you can get around the track consistently, start tuning your vehicle. Make only ONE adjustment at a time, testing it before making another change. If the result of your adjustment is a faster lap, mark the change on the included setup sheet (make additional copies of the sheet before writing on it). If your adjustment results in a slower lap, revert back to the previous setup and try another change. When you are satisfied with your vehicle, fill in the setup sheet thoroughly and file it away. Use this as a guide for future track days or conditions. Periodically check all moving suspension parts. Suspension components must be kept clean and move freely without binding to prevent poor and/or inconsistent handling.

Rear Arm Mount Pill Insert Setup:

The aluminum rear arm mounts utilize eccentric pill inserts to make fine adjustments to anti-squat, toe, pin heights, and pin width. Adjustments can be made using the supplied inserts (#92014)

Standard Position

Use this position as a reference when changing pill locations.

Toe: 3°

Anti-squat: 2°

Roll Center: +0

Pivot Width: +0

Arm Mount C



Insert Hole Locations

Number indicates degree of change:
0.5°, 1.0°, 0° (center dot)




Hole 0.5° or 0.35mm from center



Hole 1.0° or 0.7mm from center

Possible Insert Locations




Pin Width

More distance = wider pivot

Less distance = narrow pivot

*Note: For pin width -1.4mm, use 67mm CVA driveshafts




C Mount D Mount

		= +1.4mm
		= +0.7mm
		= 0mm
		= -0.7mm
		= -1.4mm*

Pin Height

Higher pin = Higher roll center

Lower pin = lower roll center



C Mount D Mount

		= +0.7°mm
		= +0.35°mm
		= 0mm
		= -0.35°mm
		= -0.7°mm

Anti-squat Angle

More angle = More anti-squat

Less angle = Less anti-squat

Shown in 1° changes



C Mount D Mount


		= 1°
		= 0°
		= -1°
		= 2°
		= 1°
		= 0°
		= 3°
		= 2°
		= 1°

Toe Angle

More angle = More toe in

Less angle = Less toe in

Shown in 1° changes



C Mount D Mount

		= 3°
		= 4°
		= 5°
		= 2°
		= 3°
		= 4°
		= 1°
		= 2°
		= 3°



For additional setup tips, please visit our website by using the link or QR code below.

<http://bit.ly/B6PillChart>



⚙️ Tuning Tips (cont.)


Motor Gearing:

Proper motor gearing will result in maximum performance and run time while reducing the chance of overheating and premature motor failure. The gear ratio chart lists recommended starting gear ratios for the most widely used motor types. Gear ratios will vary depending upon motor brand, wind, and electronic speed control. Consult your motor and electronic speed control manufacturers for more information. Team Associated is not responsible for motor damage due to improper gearing.

B7 Gear Ratio Chart (Internal Gear Ratio 2.60:1)

Motor	Pinion	Spur	Final Drive Ratio
21.5 Reedy S-Plus Brushless	33	72	5.67:1
17.5 Reedy S-Plus Brushless	29	72	6.45:1
13.5 Reedy S-Plus Brushless	27	*75	7.22:1
10.5 Reedy 540-M4 Brushless	24	78	8.45:1
9.5 Reedy 540-M4 Brushless	23	78	8.82:1
8.5 Reedy 540-M4 Brushless	22	78	9.22:1
7.5 Reedy 540-M4 Brushless	21	78	9.65:1
6.5 Reedy 540-M4 Brushless	20	78	10.14:1

*75T spur gear (#92294) not included

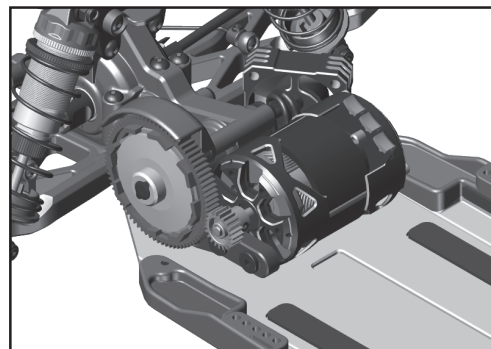

Set The Gear Mesh:

You should be able to rock the spur gear back and forth in the teeth of the pinion gear without making the pinion gear move. If the spur gear mesh is tight, then loosen the #41096 screws (p.19) and move the motor away, then try again.

A gear mesh that is too tight or too loose will reduce power and damage the gear teeth.

Diff Height Adjustment:

The diff height adjustment (p.12) is a good way to tune the car for grip level. On high grip with low ride heights, a higher diff height will be a good option. On lower grip with higher ride heights, a lower diff height will be better.

Slipper Clutch:


The assembly instructions give you a base setting for your clutch. Turn the nut on the shaft so that the end of the top shaft is even with the outside of the nut. At the track, tighten or loosen the nut in 1/8 turn increments until you hear a faint slipping sound for 1-2 feet on takeoffs. Another popular way to set the clutch is to hold both rear tires firmly in place and apply short bursts of throttle. If the clutch is properly set, the front tires should lift slightly up off the surface.

Caster:

Caster describes the angle of the caster block as it leans toward the rear of the vehicle. Positive caster means the kingpin leans rearward at the top. The kit includes three inserts to adjust caster angle at the caster block, 0°, 2.5°, and +5°. The total caster angle is the sum of the kick-up angle and the caster block angle. Standard total caster angle for the B6 is 30°, with 25° kick-up and +5° caster block angle. For less entry steering and more exit steering, try 0° caster block angle.

Front Camber:

Camber describes the angle at which the tire and wheel rides when looked at from the front. Negative camber means that the tire leans inward at the top. A good starting camber setting is -1°. Positive camber, where the top of the tire is leaning out, is not recommended. A camber gauge can be used to more accurately set camber.




Testing camber with
camber gauge

Rear Camber:

Camber describes the angle at which the tire and wheel rides when looked at from the back. Negative camber means that the tire leans inward at the top. A good starting camber setting is -1°. Adding a small amount of positive camber, where the top of the tire is leaning out, will tend to improve straight-line acceleration on loose tracks. A camber gauge can be used to more accurately set camber.


Front Suspension:

Ride Height:	13mm
Camber:	-1 degree
Toe:	0 degree
Anti-Roll Bar:	1.1mm
Arm Type:	B7.1
Tower Type:	-2mm
Wheel Hex:	6.5mm
Steering Block:	KPI 0 3 Trail
Caster Block Insert:	0 ☐ +2.5 ☐ +5 ☐
Bulkhead Type:	
Kick-Up Angle:	-2.5 ☐ 0 ☐ +2.5 ☐
Steering Stop Spacing:	1.2mm
Caster Block Spacing:	Fwd ☐ Back ☐
Ballstud Mount:	Standard ☐ -2mm ☐
Notes:	

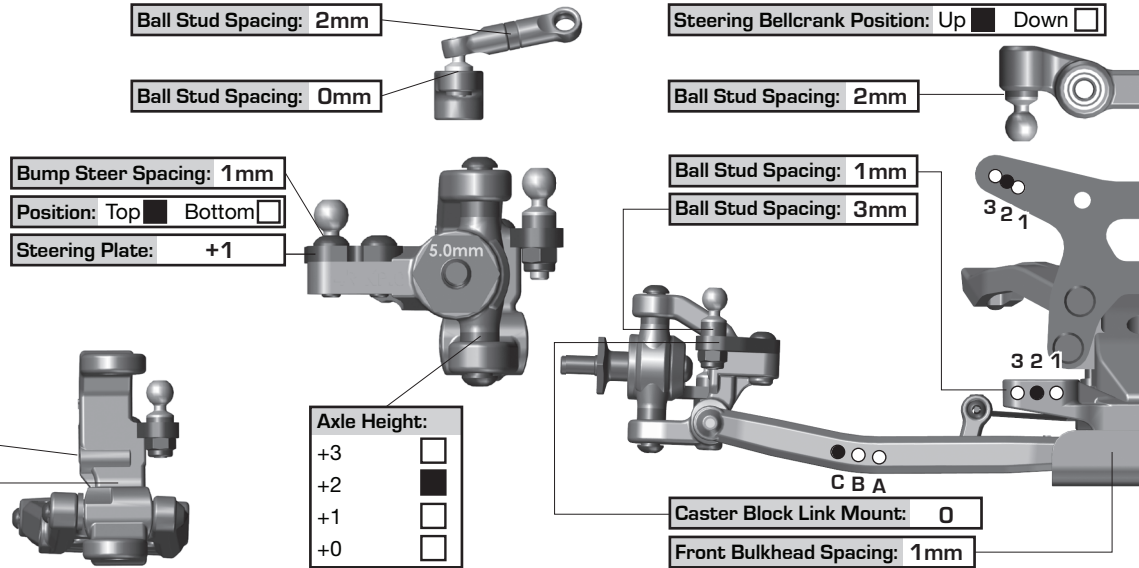

Rear Suspension:

Ride Height:	13mm
Camber:	-2 degree
Anti-Roll Bar:	1.2mm
Arm Type:	V2, 78mm Std. Position
Tower Type:	-2mm Gull Dropper
Arm Spacing:	Fwd ☐ Mid ☐ Back ☐
Wheel Hex:	6mm
Hub Type:	Std ☐ HRC ☐ Kit ☐
Hub Spacing:	Fwd ☐ Mid ☐ Back ☐
Drive Shaft:	CVA's ☐ Universals ☐
Notes:	

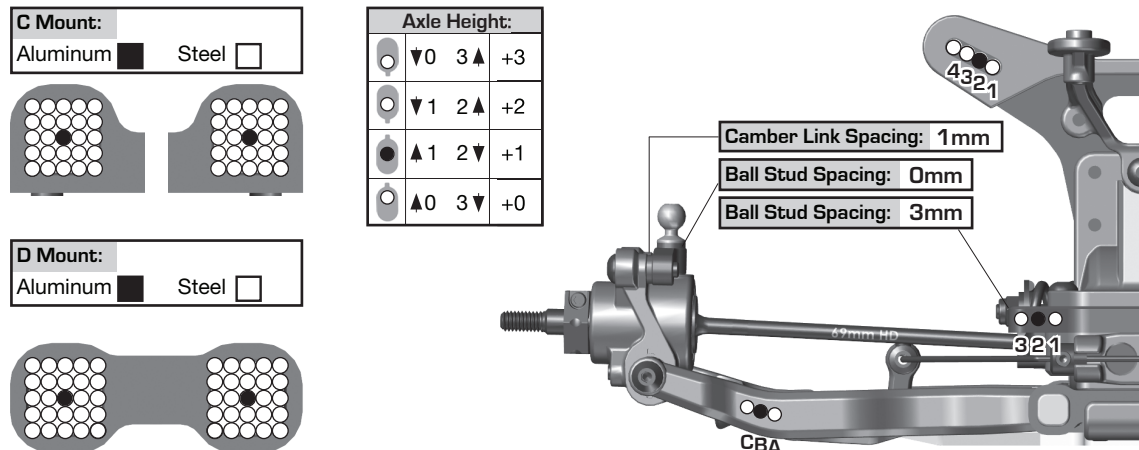

Electronics:

Radio:	Servo:
EPA: Throttle: %	Brake: %
ESC:	
ESC Settings:	
Motor / Wind:	Timing:
Pinion:	Spur:
Battery Mount: Std ☐ Offset ☐	
Back 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ Forward	
Battery:	Weight:
Notes:	

Drivetrain:

Differential:	Ball Diff: ☐
Height: 2	Gear Diff: ☐
Diff Setting:	HTC, 100k
Notes:	
Slipper Clutch:	
Type:	HD
# of Pads:	2x11mm
Setting:	
Notes:	

Shocks:

	Front	Rear
Piston:	2x1.6mm	2x1.9mm
Thickness:	2.5mm	2.5mm
Fluid:	35wt	30wt
Spring:	Purple	Purple
Limiters:	Int: _____ Ext: 2	Int: _____ Ext: 5
Stroke:	20mm	29mm
Eyelet:	0	+2
Cup Offset:	0 ☐ +5 ☐ +9 ☐ 0 ☐ +5 ☐ +9 ☐	
Kashima Bodies:	☐	Chrome Shafts: ☐ Machined Spacers: ☐
Notes:		



Track Info:

Size:
Surface:
Traction:
Moisture:
Condition:
Temperature:
Notes:

Tires:

Front Tires:
Front Compound:
Front Insert:
Rear Tires:
Rear Compound:
Rear Insert:
Wheel (F/R):
Notes:

Body, Weight:



Body:	RC10B7
Front Wing:	
Rear Wing:	RC10B7
Wing Angle:	0° ☐ 3° ☐ 6° ☐
Chassis Length:	Standard
Servo Weights:	None
Electronic Weights:	Aluminum
Total Vehicle Weight:	

Vehicle Comments:

Notes:


Front Suspension:

Ride Height:
Camber:
Toe:
Anti-Roll Bar:
Arm Type:
Tower Type:
Wheel Hex:
Steering Block:
Caster Block Insert: 0 ☐ +2.5 ☐ +5 ☐
Bulkhead Type:
Kick-Up Angle: -2.5 ☐ 0 ☐ +2.5 ☐
Steering Stop Spacing:
Caster Block Spacing: Fwd ☐ Back ☐
Ballstud Mount: Standard ☐ -2mm ☐
Notes:

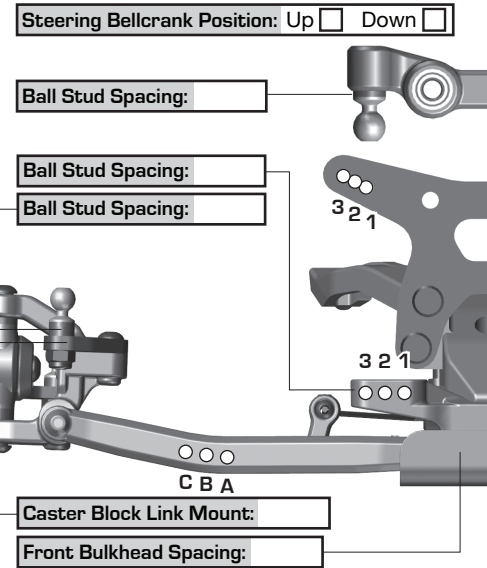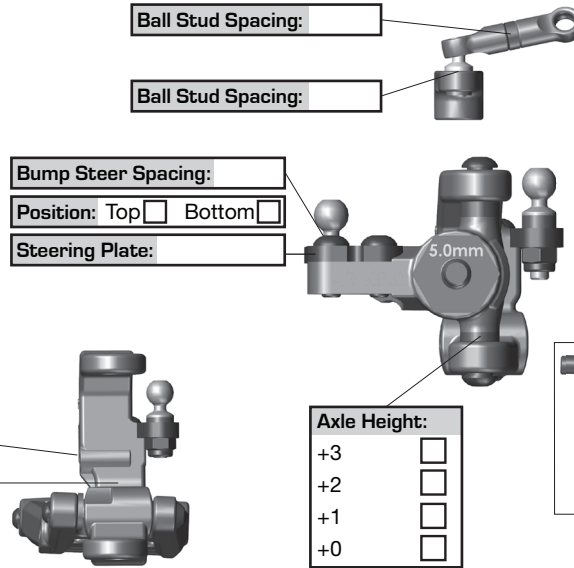


Rear Suspension:

Ride Height:
Camber:
Anti-Roll Bar:
Arm Type:
Tower Type:
Arm Spacing: Fwd ☐ Mid ☐ Back ☐
Wheel Hex:
Hub Type: Std ☐ HRC ☐
Hub Spacing: Fwd ☐ Mid ☐ Back ☐
Drive Shaft: CVA's ☐ Universals ☐
Notes:

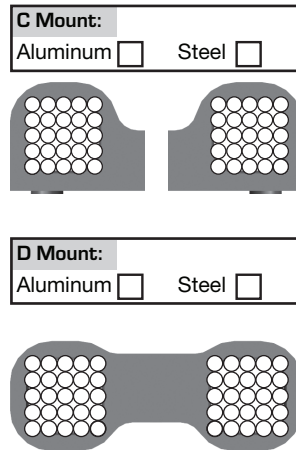

Axle Height:			
▼0	3▲	+3	
▼1	2▲	+2	
▲1	2▼	+1	
▲0	3▼	+0	

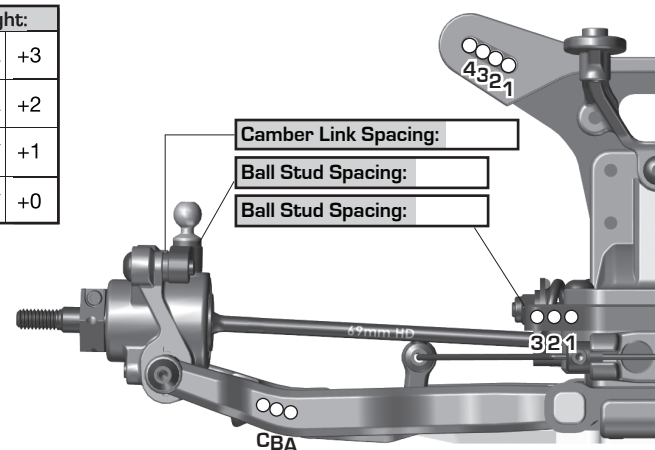

Electronics:

Radio:	Servo:
EPA: Throttle: %	Brake: %
ESC:	
ESC Settings:	
Motor / Wind:	Timing:
Pinion:	Spur:
Battery Mount: Std ☐ Offset ☐	
Back 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ Forward	
Battery:	Weight:
Notes:	

Drivetrain:

Differential:	Ball Diff: ☐
Height:	Gear Diff: ☐
Diff Setting:	
Notes:	

Slipper Clutch:

Type:
of Pads:
Setting:
Notes:

Shocks:

	Front	Rear
Piston:		
Thickness:		
Fluid:		
Spring:		
Limiters:	Int: Ext:	Int: Ext:
Stroke:		
Eyelet:		
Cup Offset:	0 +5 +9	0 +5 +9
Kashima Bodies:	☐	Chrome Shafts: ☐ Machined Spacers: ☐
Notes:		



Track Info:

Size:
Surface:
Traction:
Moisture:
Condition:
Temperature:
Notes:

Tires:

Front Tires:
Front Compound:
Front Insert:
Rear Tires:
Rear Compound:
Rear Insert:
Wheel (F/R):
Notes:

Body, Weight:

Body:
Front Wing:
Rear Wing:
Wing Angle: 0° 3° 6°
Chassis Length:
Servo Weights:
Electronic Weights:
Total Vehicle Weight:

Vehicle Comments:

Notes:



Associated Electrics, Inc.
21062 Bake Parkway Lake Forest, CA 92630 USA

call: (949) 544-7500 - fax: (949) 544-7501
Check out the following web sites for all of our kits, current products,
new releases, setup help, tips, and racing info!
www.AssociatedElectrics.com

FOLLOW US ON SOCIAL MEDIA



TeamAssociated
ReedyPower
ElementRC
FactoryTeam51



@TeamAssociatedRC
@ReedyPower
@Element_RC
@FactoryTeam_RC



@Team_Associated
@ReedyPower



@Associated_Electrics



TeamAssociatedRC
ElementRC



TeamAssociated
Reedy
Element-rc