

# ULTIMA RB7 SET UP SHEET



Name \_\_\_\_\_ Date \_\_\_\_\_ Truck / City \_\_\_\_\_ Event \_\_\_\_\_

## Front Suspension



Toe:  In  Out \_\_\_\_\_  
Tie Rod: \_\_\_\_\_

### Front Bulkhead Weight Placement:

None  
 Bulkhead Inside \_\_\_\_\_ oz \_\_\_\_\_ g  
 On the skid plate \_\_\_\_\_ oz \_\_\_\_\_ g \* 1oz=28g

**4.8mm Ball Stud: Camber:**  
 UM128(Std.)  
 UMW508 (+2mm High Mount)

**4.8mm Ball Stud Spacer:** \_\_\_\_\_ mm

**AL. Steering Support:**  
 None  
 UMW724

**4.8mm Ball Stud:**  
 LA246 (-1mm Low Mount)  
 97050M (Std)

**Ackerman Steer Spacer:** \_\_\_\_\_ mm  
 UMW701 Aluminum ST Plate  
 UMW702 Aluminum Clank Arm

**Upper Spacer:** \_\_\_\_\_ mm

**4.8mm Ball Stud:** \_\_\_\_\_ mm

**AL. Steering Support:**  
 None  
 UMW724

**Axle Spacer:**  
 Out \_\_\_\_\_ mm  
 In \_\_\_\_\_ mm

**Wheel Hub:**  
 UM569 / Std  
 UM506

**Bump Steer Spacer:** \_\_\_\_\_ mm

**Axle Height Spacer:**  
 \_\_\_\_\_ mm  
 \_\_\_\_\_ mm

**Knuckle:**  
 UM763/std.  
 UM714

**Caster:**  
 25°  
 30°

**Caster Block: Caster Block Position:**  
 0.5  0°  
 1.0  2°  IN (wide/Std)  
 None  4°  OUT (Narrow)

**Spacer:**  
 A (UM502)  B(UMW722/Brass)  
 B (UM721/Std)  B(UMW723/Alu)

**Wheelbase:** F: \_\_\_\_\_ mm R: \_\_\_\_\_ mm


Comments: \_\_\_\_\_

## Rear Suspension



**4.8mm Ball Stud:**  
 UM129  
 UMW508 (+2mm High Mount)  
 97050M  
 UM128(Std.)

**Upper Spacer:** \_\_\_\_\_ mm



**Sus Holder Spacer:**  
 F  0.5  1.0  None  
 R  0.5  1.0  None

**Anti-Squat:** \_\_\_\_\_°

**Camber:** \_\_\_\_\_°

**Universal Swing Shaft:**

**Upper Spacer:** \_\_\_\_\_ mm

**Wheelbase:**  
 F: \_\_\_\_\_ mm  
 R: \_\_\_\_\_ mm

**Wheelbase:**  
 F: \_\_\_\_\_ mm  
 R: \_\_\_\_\_ mm

**Sway Bar:**  None  \_\_\_\_\_ mm

**Drive Hub:**  
 4mm (TFW113)  
 4.5mm (LAW30GM/Std.)  
 5.2mm (UMW523)

**Axle Spacer:**  
 Out \_\_\_\_\_ mm  
 In \_\_\_\_\_ mm

**Rear Hub Carrier:**  
 0° Type-B (UM519)  
 0° Type-B2 (UM519-2)  
 0° Alu (UMW704-0)  
 0.5° Alu (UMW704-05)  
 1° Alu (UMW704-1)

**Lower Sus. Holder:**  
 Plastic  RF  RF2L  
 RF2  
 Option  UMW511GM (RF/Alu)

(Opt/Adjustable)  
 UMW705(RF/Alu) \_\_\_\_\_ Block  
 UMW725(RF-MID/Bra) \_\_\_\_\_ Block  
 (Opt/Adjustable)  
 UMW706(RR-RWD) \_\_\_\_\_ Block  
 UMW707(RR-MID) \_\_\_\_\_ Block

**Diff.**  
 Gear Diff. # \_\_\_\_\_  
 Ball Diff.

## Shock

	Front	Rear
Shock Piston:	_____	_____
Shock Oil:	# _____	# _____
Shock Spring:	_____	_____
Limiters:	in _____ mm out _____ mm	in _____ mm out _____ mm
Shock Length(A):	_____ mm	_____ mm
O-ring:	_____	_____
Shock Top type:	<input type="checkbox"/> Alu(UM719/Std) <input type="checkbox"/> UM753-1B	
Ball End type:	Front: <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L Rear: <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L	




## Battery Placement:

None  Screw

Front: Rear:

**Foam:**  
 Front  
 Rear  
 None

## Chassis

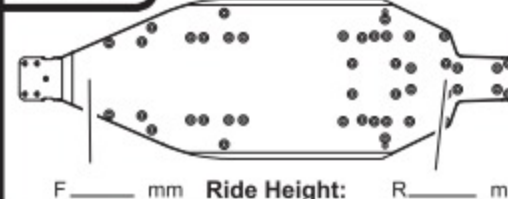

## Transmission

Rear Motor  
 Mid-Ship 3 Gear  
 Mid-Ship 4 Gear  
 Mid-Ship Laydown

## Battery Type

Straight  
 Separate  
 Short

Type: \_\_\_\_\_

## Truck Condition

Smooth  Sandy  
 Bumpy  Soft Dirt  
 Low Truction  Grass  
 Med. Truction  Blue Groore  
 Higt Truction  Clay  
 Wet  Dusty  
 Dry  Other

## Wing

UM767/Std.  
 Step 3.0 - Straight  
 Step 3.0 - Round  
 Other \_\_\_\_\_

\_\_\_\_\_ mm  
 Lip: \_\_\_\_\_ mm

## Tire

	Front	Rear	Traction Compound or comment:
Tire:	_____	_____	_____
Inserts:	_____	_____	_____
Wheel:	_____	_____	_____

## Other

Motor: \_\_\_\_\_  
 ESC: \_\_\_\_\_  
 Pinion/Spur: \_\_\_\_\_

## Comment

\_\_\_\_\_