XPRESS EXECUTE XQ10 SET-UP SHEET

Driver _____ Track Surface Outdoor Asphalt Track Temperture _____

Date _____ Track Traction Medium Result _____ Air Temperature _____

Track _____ Country _____ Best Lap _____ Humidity _____ Remark _____

Front

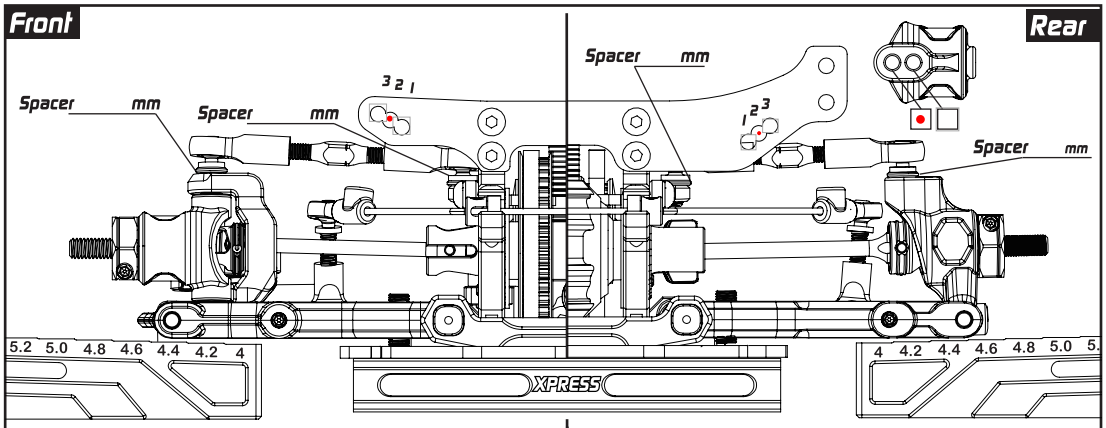

Camber Link

C-Hub ● M ○ H

Steering Block ● M ○ H

Suspension Arm ● M ○ H

Hex Offset _____ mm

Camber _____

Ride Height _____ mm

DownStop ☐ _____ mm

Sway Bar 1.3 mm

Rear

_____ mm

_____ °

_____ mm

_____ mm

1.3 mm

Rear Hub ● M ○ H

Suspension Arm ● M ○ H

Camber Link

Optional — On-Power Control System

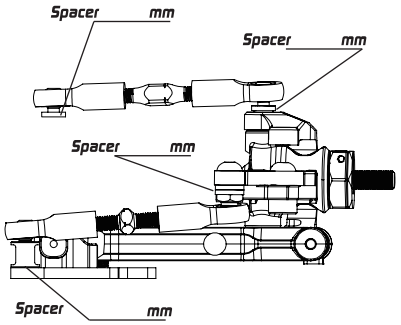

Hex Offset _____ mm

Camber _____

Ride Height _____ mm

DownStop _____ mm

Sway Bar 1.2 mm

Steering Block ☐ M ☐ H

Suspension Arm ☐ M ☐ H

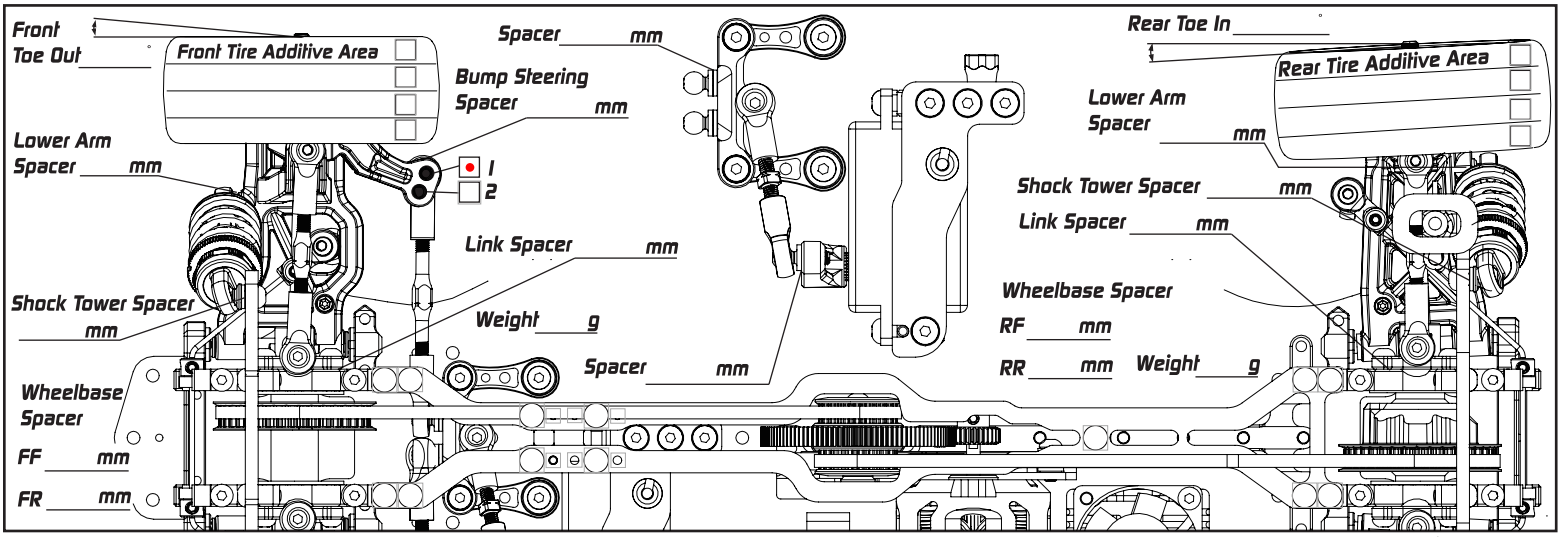

Suspension Mount Setup

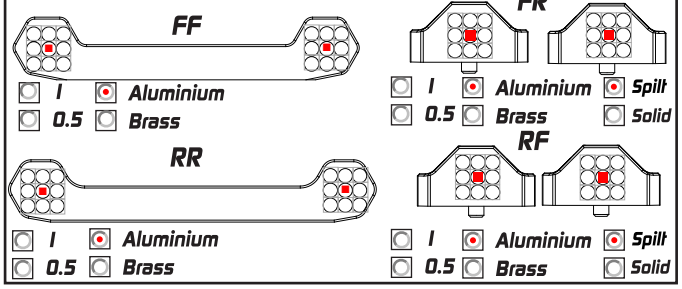

FF / RR: ○ 1 ● Aluminium ○ 0.5 ○ Brass

FR / RF: ○ 1 ● Aluminium ● Spilt ○ 0.5 ○ Brass ○ Solid

Flex Control

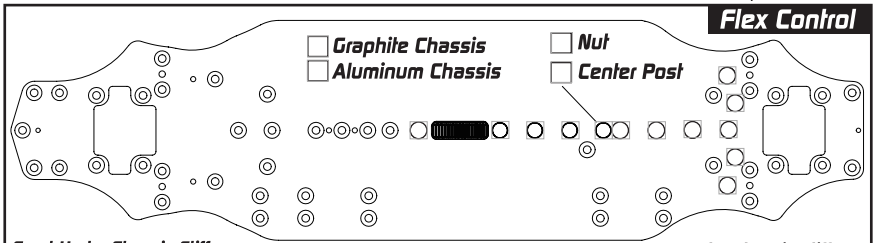

☐ Graphite Chassis ☐ Aluminum Chassis ☐ Nut ☐ Center Post

Front Under Chassis Stiffener: ☐ None ☐ Graphite ☐ Brass

☐ Standard Battery ☐ Short Battery (Forward Position) ☐ Short Battery (Backward Position)

Rear Under Chassis Stiffener: ☐ None ☐ Graphite ☐ Brass

Damper Setup

	Front	Rear
Spring		
Oil		
Rebound		
Piston	4	4
Length		
Foam Insert	☐	☐
Hole In Cap	☐	☐

Transmission Setup

Front		Rear	
	Spool	Gear Diff	
Oil		Oil	
Weight	g	Weight	g
Position	Low	Position	Low

Others

Servo _____ Tires _____

Esc _____ Additive _____

Motor _____ Body _____

Spur _____ P/ _____ T Rear Wing _____

Pinon _____ P/ _____ T FDR NaN